



MEASUREMENT REPORT

FCC ID : 2A8JK-TAITN-2BAND
APPLICANT : ACSL Ltd
Application Type : Certification
Product : Smart Controller
Model No. : TAITEN (AC-SCRC7-01-A)
Brand Name : ACSL
FCC Classification : Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s) : Part 15 Subpart E (Section 15.407)
Test Procedure(s) : ANSI C63.10-2013
Received Date : May 8, 2025
Test Date : May 22, 2025~July 12, 2025
Tested By : Fran Chen
(Fran Chen)
Reviewed By : Paddy Chen
(Paddy Chen)
Approved By : Chenz Ker
(Chenz Ker)



The test results only relate to the tested samples.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2505TW0106-U5	1.0	Original Report	2025-09-22	

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Operation Frequencies and Channel List	8
2.3. Test Mode	10
2.4. Test Software	10
2.5. Device Capabilities.....	10
2.6. Test Configuration	11
2.7. Test System Details	12
2.8. EMI Suppression Device(s)/Modifications	12
2.9. Labeling Requirements	12
3. DESCRIPTION OF TEST	13
3.1. Evaluation Procedure	13
3.2. AC Line Conducted Emissions	13
3.3. Radiated Emissions.....	14
4. ANTENNA REQUIREMENTS.....	15
5. TEST EQUIPMENT CALIBRATION DATE.....	16
6. MEASUREMENT UNCERTAINTY.....	17
7. TEST RESULT	18
7.1. Summary.....	18
7.2. 26dB Bandwidth & 99% Bandwidth Measurement.....	19
7.2.1. Test Limit.....	19
7.2.2. Test Procedure used	19
7.2.3. Test Setting	19
7.2.4. Test Setup	19
7.2.5. Test Result	20
7.3. 6dB Bandwidth Measurement	28
7.3.1. Test Limit.....	28
7.3.2. Test Procedure used	28
7.3.3. Test Setting	28

7.3.4.	Test Setup	28
7.3.5.	Test Result	29
7.4.	Output Power Measurement.....	32
7.4.1.	Test Limit.....	32
7.4.2.	Test Procedure Used.....	32
7.4.3.	Test Setting	33
7.4.4.	Test Setup	33
7.4.5.	Test Result	34
7.5.	Transmit Power Control.....	37
7.5.1.	Test Limit.....	37
7.5.2.	Test Procedure Used.....	37
7.5.3.	Test Setting	37
7.5.4.	Test Setup	37
7.5.5.	Test Result	38
7.6.	Power Spectral Density Measurement.....	39
7.6.1.	Test Limit.....	39
7.6.2.	Test Procedure Used.....	39
7.6.3.	Test Setting	40
7.6.4.	Test Setup	40
7.6.5.	Test Result	41
7.7.	Radiated Spurious Emission Measurement.....	50
7.7.1.	Test Limit.....	50
7.7.2.	Test Procedure Used.....	50
7.7.3.	Test Setting	50
7.7.4.	Test Setup	52
7.7.5.	Test Result	54
7.8.	Radiated Restricted Band Edge Measurement.....	132
7.8.1.	Test Limit.....	132
7.8.2.	Test Result	135
7.9.	AC Conducted Emissions Measurement	189
7.9.1.	Test Limit.....	189
7.9.2.	Test Procedure	189
7.9.3.	Test Setup	190
7.9.4.	Test Result	191
8.	CONCLUSION	193
	Appendix A : Test Photograph	194
	Appendix B : External Photograph.....	194

Appendix C : Internal Photograph194**General Information**

Applicant	ACSL Ltd
Applicant Address	Hulic Kasai Rinkai Building 1F, 3-6-4 Rinkaicho, Edogawa-ku, Tokyo 134-0086, Japan
Manufacturer	ACSL Ltd
Manufacturer Address	Hulic Kasai Rinkai Building 1F, 3-6-4 Rinkaicho, Edogawa-ku, Tokyo 134-0086, Japan
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
Test Device Serial No.	#1-1 ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
- MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

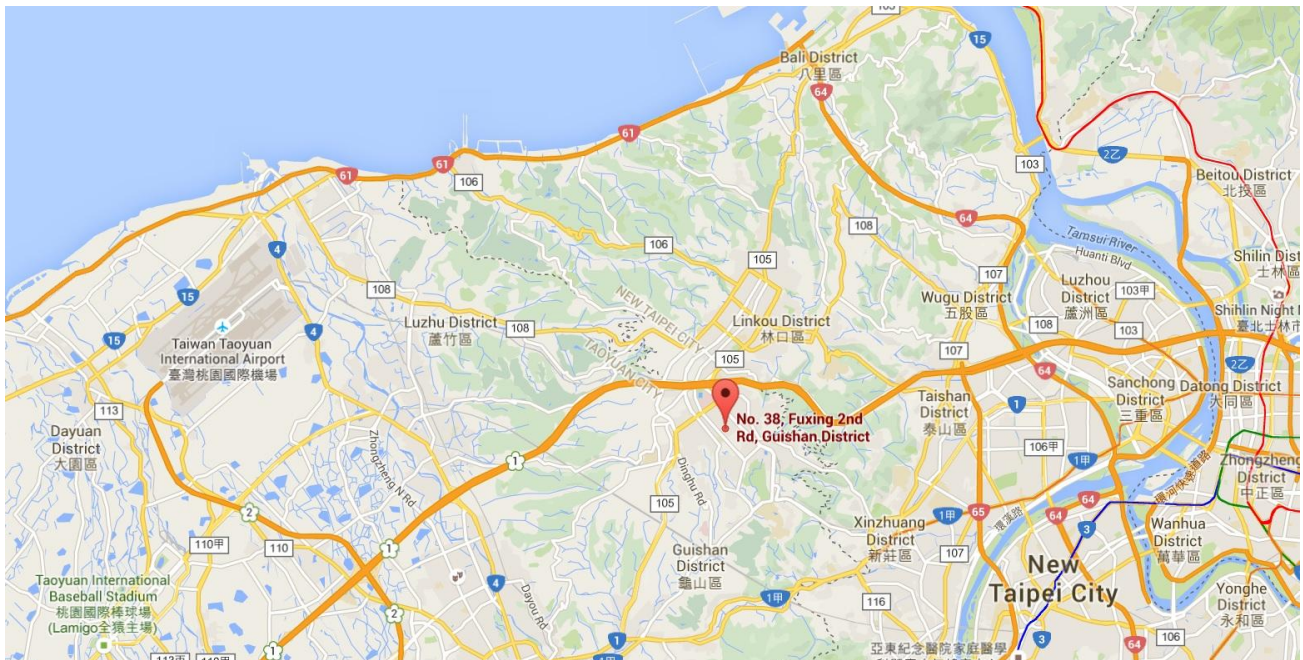

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Smart Controller
Model No.	TAITEN (AC-SCRC7-01-A)
Brand Name	ACSL
Wi-Fi Specification	802.11a/n/ac (1TX / 1RX)
Frequency Range	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz
Type of Modulation:	802.11a/n/ac: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps 802.11ac: up to 200Mbps
Accessory	
Power Adapter	Brand Name: I.T.E Power Supply Model: G651CU Input: AC 100-240V~50-60Hz, 1.5A Max Output USB-C: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3.25A PPS: 3.3V-11V=3A, 3.3V-21V=3A

2.2. Operation Frequencies and Channel List

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--


802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

Duty Cycle

Test Mode	Duty Cycle
802.11a	98.43%
802.11n-HT20	98.17%
802.11n-HT40	98.22%
802.11ac-VHT20	96.54%
802.11ac-VHT40	96.36%

Duty Cycle

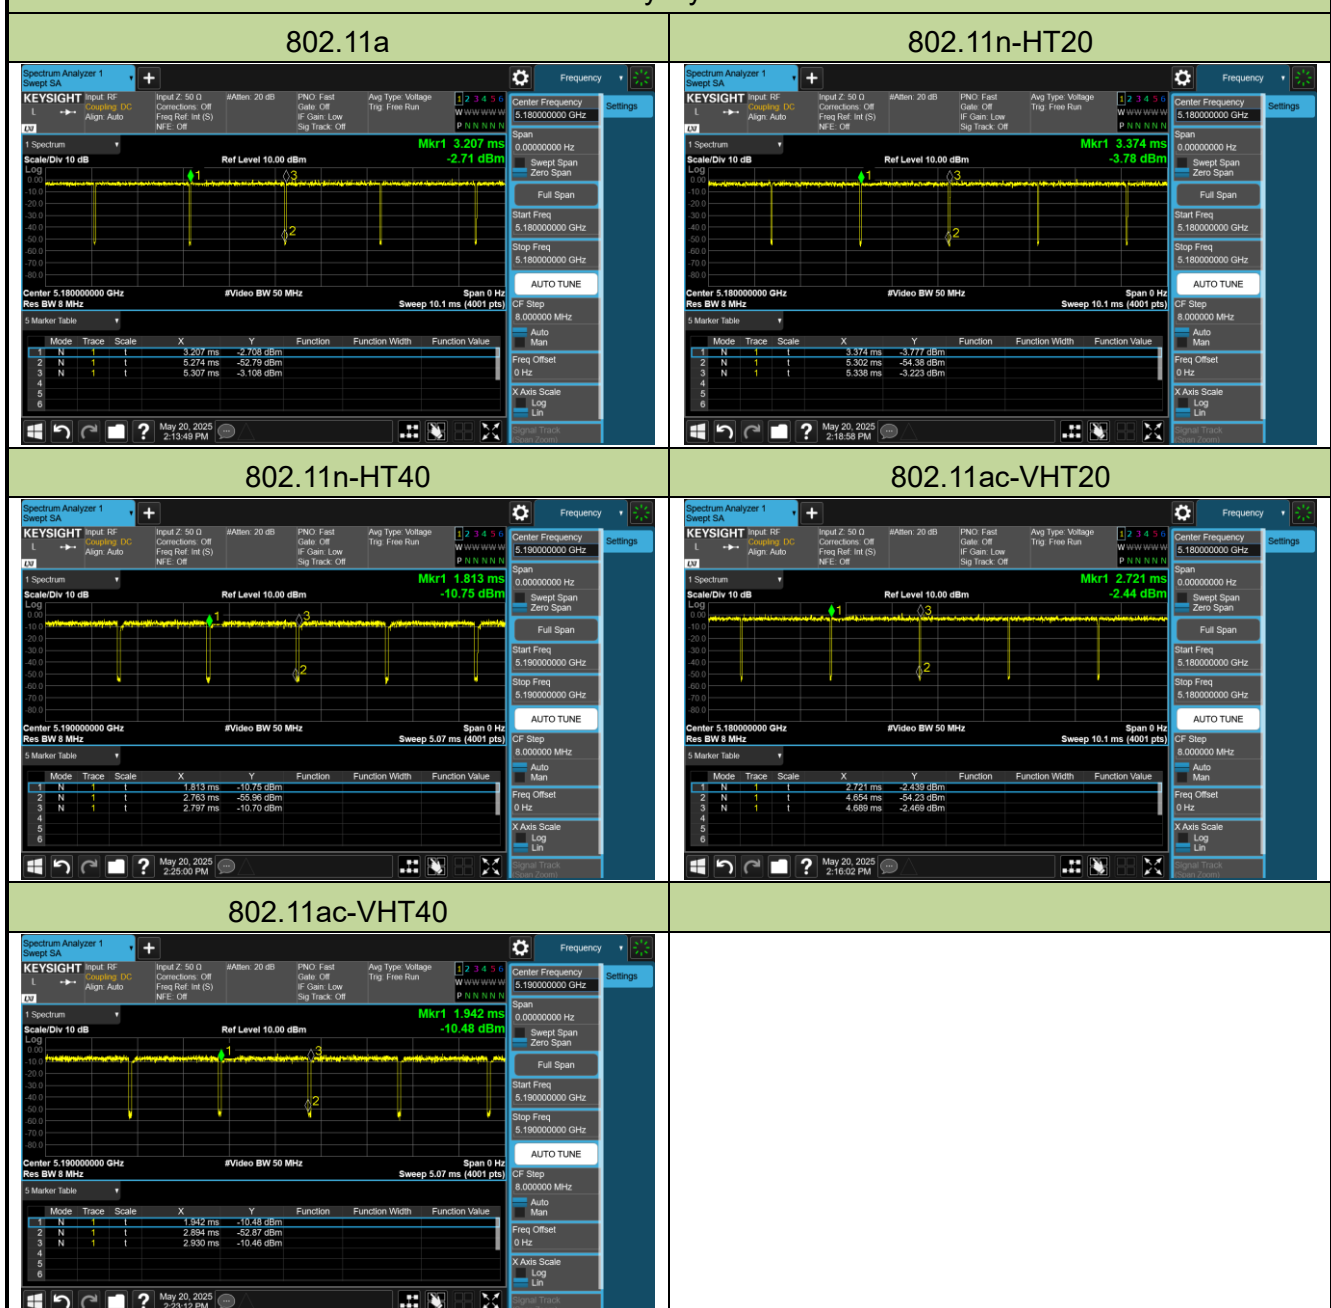

2.3. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)

Note 1: Due to the same modulation between 802.11n and 802.11ac, so 802.11ac-VHT20 and VHT40 are covered by 802.11n-HT20 and HT40 in this report, meanwhile, power setting for 802.11n-HT20 and HT40 will not be greater than 802.11ac-VHT20 and VHT40.

2.4. Test Software

The test utility software used during testing was “QRCT”.

2.5. Device Capabilities


This device contains the following capabilities:

2.4GHz WLAN (DTS) and 5GHz WLAN (NII).

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average per the guidance of Section B)2)b) of KDB 789033 D02v02r01. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100.

2.6. Test Configuration

This device was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

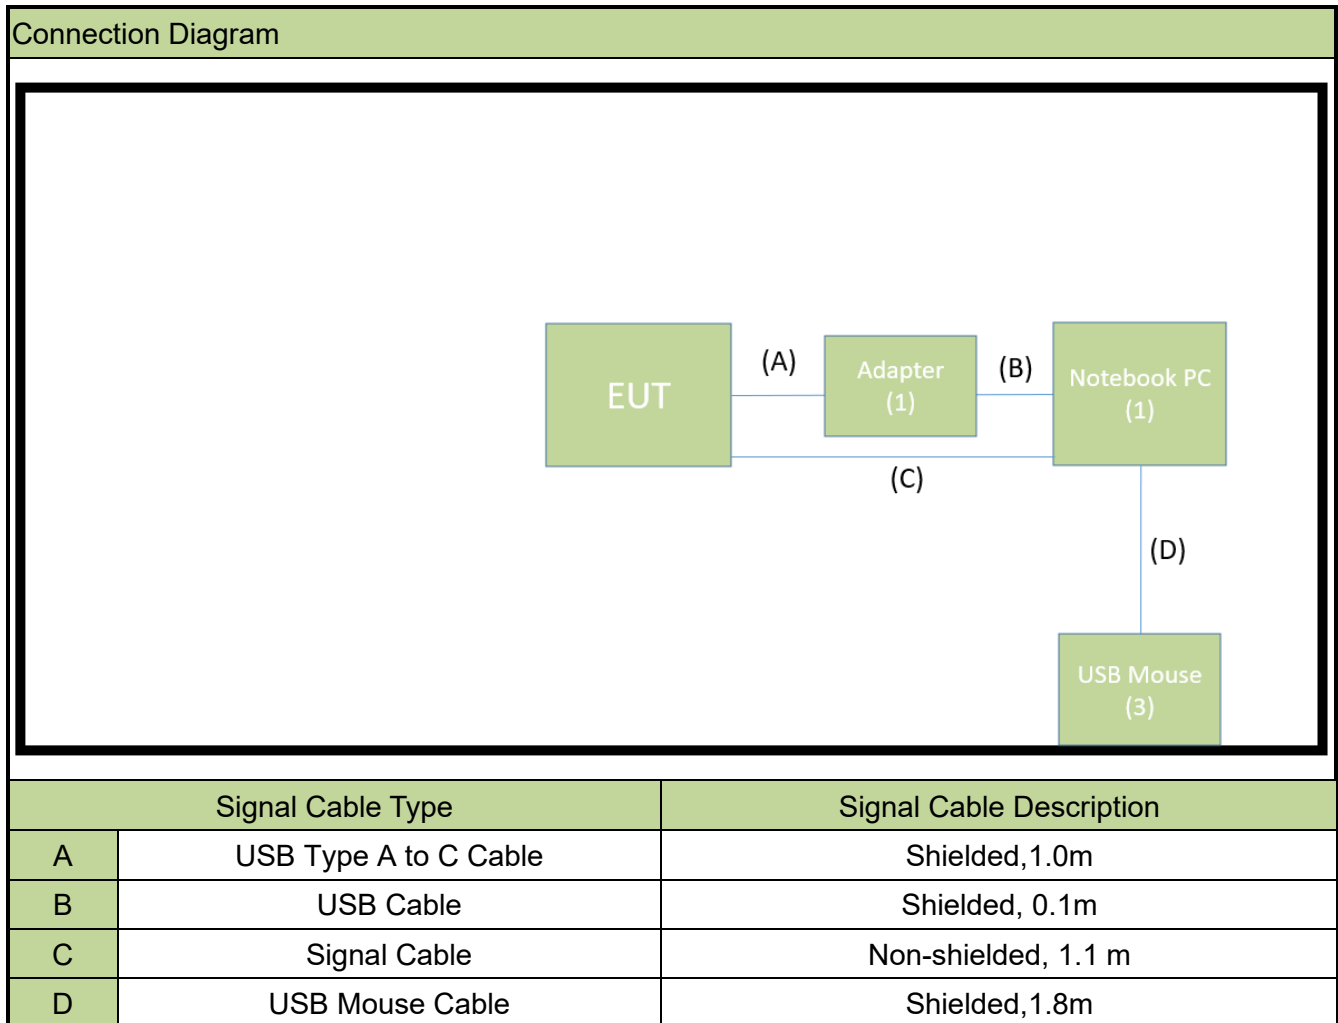

2.7. Test System Details

The types for all equipment, and descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	USB Adapter	PowerSync	CUBCKCR0001T	N/A	N/A
2	Notebook PC	Lenovo	21DH00A3TW	N/A	Non-shield, 0.8m
3	USB Mouse	Logitech	M90	N/A	N/A

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 were used in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 9'x4'x3' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

Line conducted emissions test results are shown in Section 7.10.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **Smart Controller**, is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

Antenna Type	Frequency Band (MHz)	T _x Paths	Max Antenna Gain (dBi)
BT/BLE & Wi-Fi Antenna			
FPCB	2402 ~ 2480	1	2.38
	2412 ~ 2462	1	2.38
	5150 ~ 5250	1	2.38
	5250 ~ 5350	1	2.44
	5470 ~ 5725	1	2.55
	5725 ~ 5850	1	2.52

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2026/4/14
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2026/3/4
Cable	Rosnol	N1C50-RG400-B 1C50-500CM	MRTTWE00013	1 year	2026/6/13

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2026/4/16
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00086	1 year	2025/11/5
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2026/2/11
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2026/2/11
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2026/3/27
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2026/3/20
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2026/3/4
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2026/5/20
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2026/5/19
Cable	Rosnol	K1K50-UP0264- K1K50-4M	MRTTWE00012	1 year	2025/9/24
Temperature/Humidity Meter	TFA	35.1083	MRTTWA00032	1 year	2026/6/5

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2025/9/24
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2025/8/12
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2026/3/11

Test Software

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 0.15MHz~30MHz: $\pm 2.53\text{dB}$
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz~30MHz: $\pm 3.92\text{dB}$ 30MHz~1GHz: $\pm 4.25\text{dB}$ 1GHz~18GHz: $\pm 4.40\text{dB}$ 18GHz~40GHz: $\pm 4.45\text{dB}$
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 78.4\text{Hz}$
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.3\%$

7. TEST RESULT

7.1. Summary

Company Name: Smart Controller

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(i), (2), (3)	Maximum Conducted Output Power	Refer to Section 7.5		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		N/A	Section 7.5
15.407(a)(1)(i), (2), (3), (5)	Power Spectral Density	Refer to Section 7.7		Pass	Section 7.6
15.407(b)(1), (4)	Undesirable Emissions	$\leq -27\text{dBm/MHz EIRP}$ $\leq -17\text{dBm/MHz EIRP}$	Radiated	Pass	Section 7.7 & 7.8
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.9

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 3) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

7.2. 26dB Bandwidth & 99% Bandwidth Measurement

7.2.1. Test Limit

N/A

7.2.2. Test Procedure used

KDB 789033 D02v02r01- Section II)C.1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

7.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

7.2.4. Test Setup

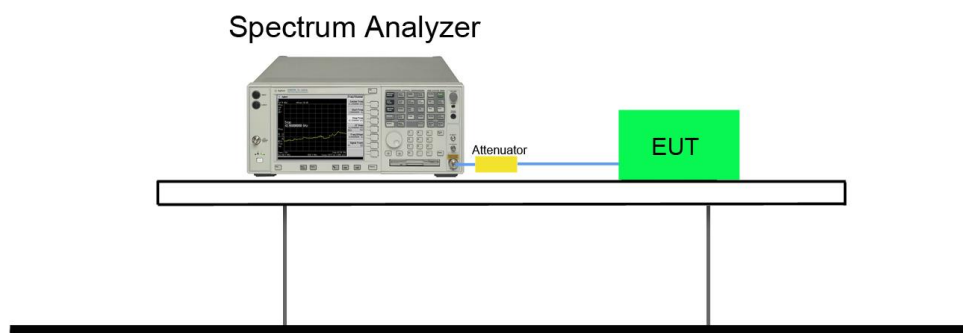

7.2.5. Test Result

Product	Smart Controller	Temperature	21°C
Test Engineer	Fran	Relative Humidity	56%
Test Site	SR6	Test Date	2025/5/27

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11a	6Mbps	36	5180	25.98	16.838
802.11a	6Mbps	44	5220	24.87	16.925
802.11a	6Mbps	48	5240	26.19	16.838
802.11a	6Mbps	52	5260	26.02	16.866
802.11a	6Mbps	60	5300	28.51	17.019
802.11a	6Mbps	64	5320	23.90	16.706
802.11a	6Mbps	100	5500	31.43	17.609
802.11a	6Mbps	116	5580	33.42	18.373
802.11a	6Mbps	140	5700	25.26	16.919
802.11a	6Mbps	144	5720	26.91	17.156
802.11a	6Mbps	149	5745	27.14	17.323
802.11a	6Mbps	157	5785	34.93	19.794
802.11a	6Mbps	165	5825	39.91	24.659
802.11n-VHT20	MCS0	36	5180	26.15	17.956
802.11ac-VHT20	MCS0	44	5220	28.09	18.142
802.11ac-VHT20	MCS0	48	5240	27.25	18.147
802.11ac-VHT20	MCS0	52	5260	28.96	18.130
802.11ac-VHT20	MCS0	60	5300	28.47	18.121
802.11ac-VHT20	MCS0	64	5320	25.33	17.913
802.11ac-VHT20	MCS0	100	5500	29.79	18.319
802.11ac-VHT20	MCS0	116	5580	32.74	18.843
802.11ac-VHT20	MCS0	140	5700	27.17	17.984
802.11ac-VHT20	MCS0	144	5720	33.62	19.374
802.11ac-VHT20	MCS0	149	5745	34.58	20.087
802.11ac-VHT20	MCS0	157	5785	33.54	20.219
802.11ac-VHT20	MCS0	165	5825	38.85	24.617


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 0					
802.11ac-VHT40	MCS0	38	5190	41.19	36.192
802.11ac-VHT40	MCS0	46	5230	42.26	36.365
802.11ac-VHT40	MCS0	54	5270	49.78	36.448
802.11ac-VHT40	MCS0	62	5310	41.16	36.184
802.11ac-VHT40	MCS0	102	5510	41.72	36.210
802.11ac-VHT40	MCS0	110	5550	63.54	36.556
802.11ac-VHT40	MCS0	134	5670	51.96	36.440
802.11ac-VHT40	MCS0	142	5710	61.98	36.686
802.11ac-VHT40	MCS0	151	5755	67.21	36.846
802.11ac-VHT40	MCS0	159	5795	78.91	42.042

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)




Channel 44 (5220MHz)

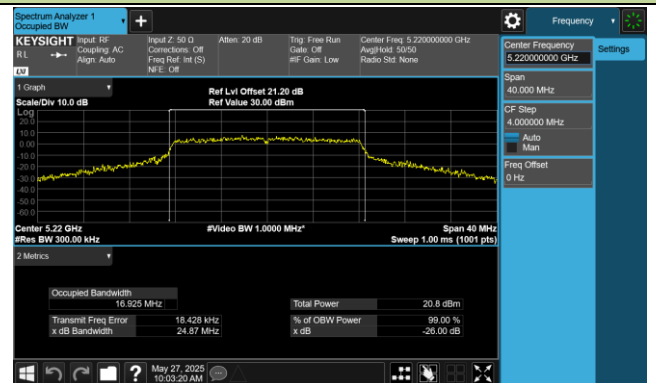

Channel 48 (5240MHz)

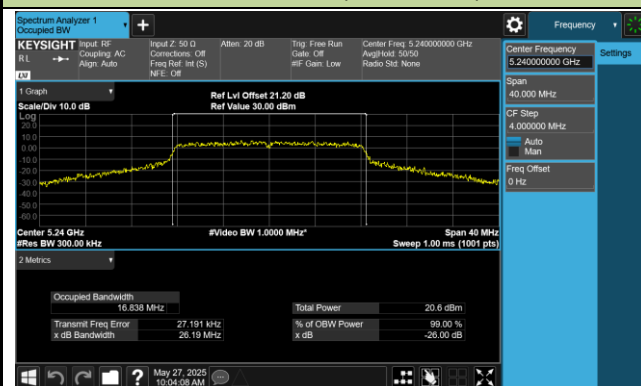


Channel 52 (5260MHz)

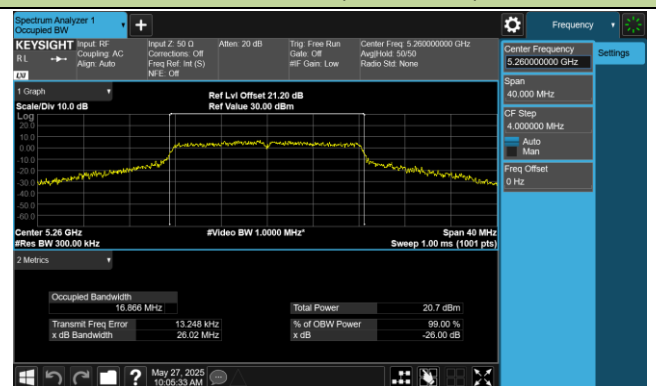

Channel 60 (5300MHz)



Channel 64 (5320MHz)

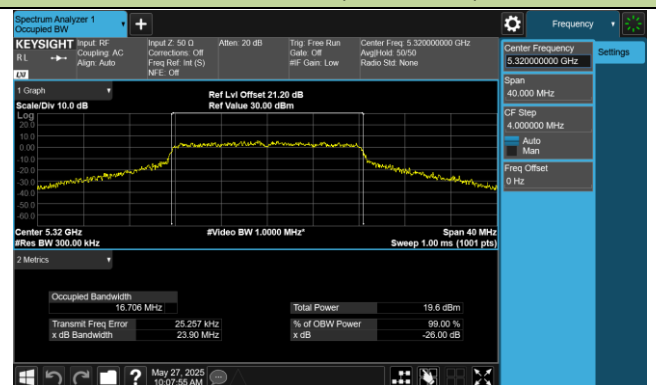


Channel 100 (5500MHz)



Channel 116 (5580MHz)



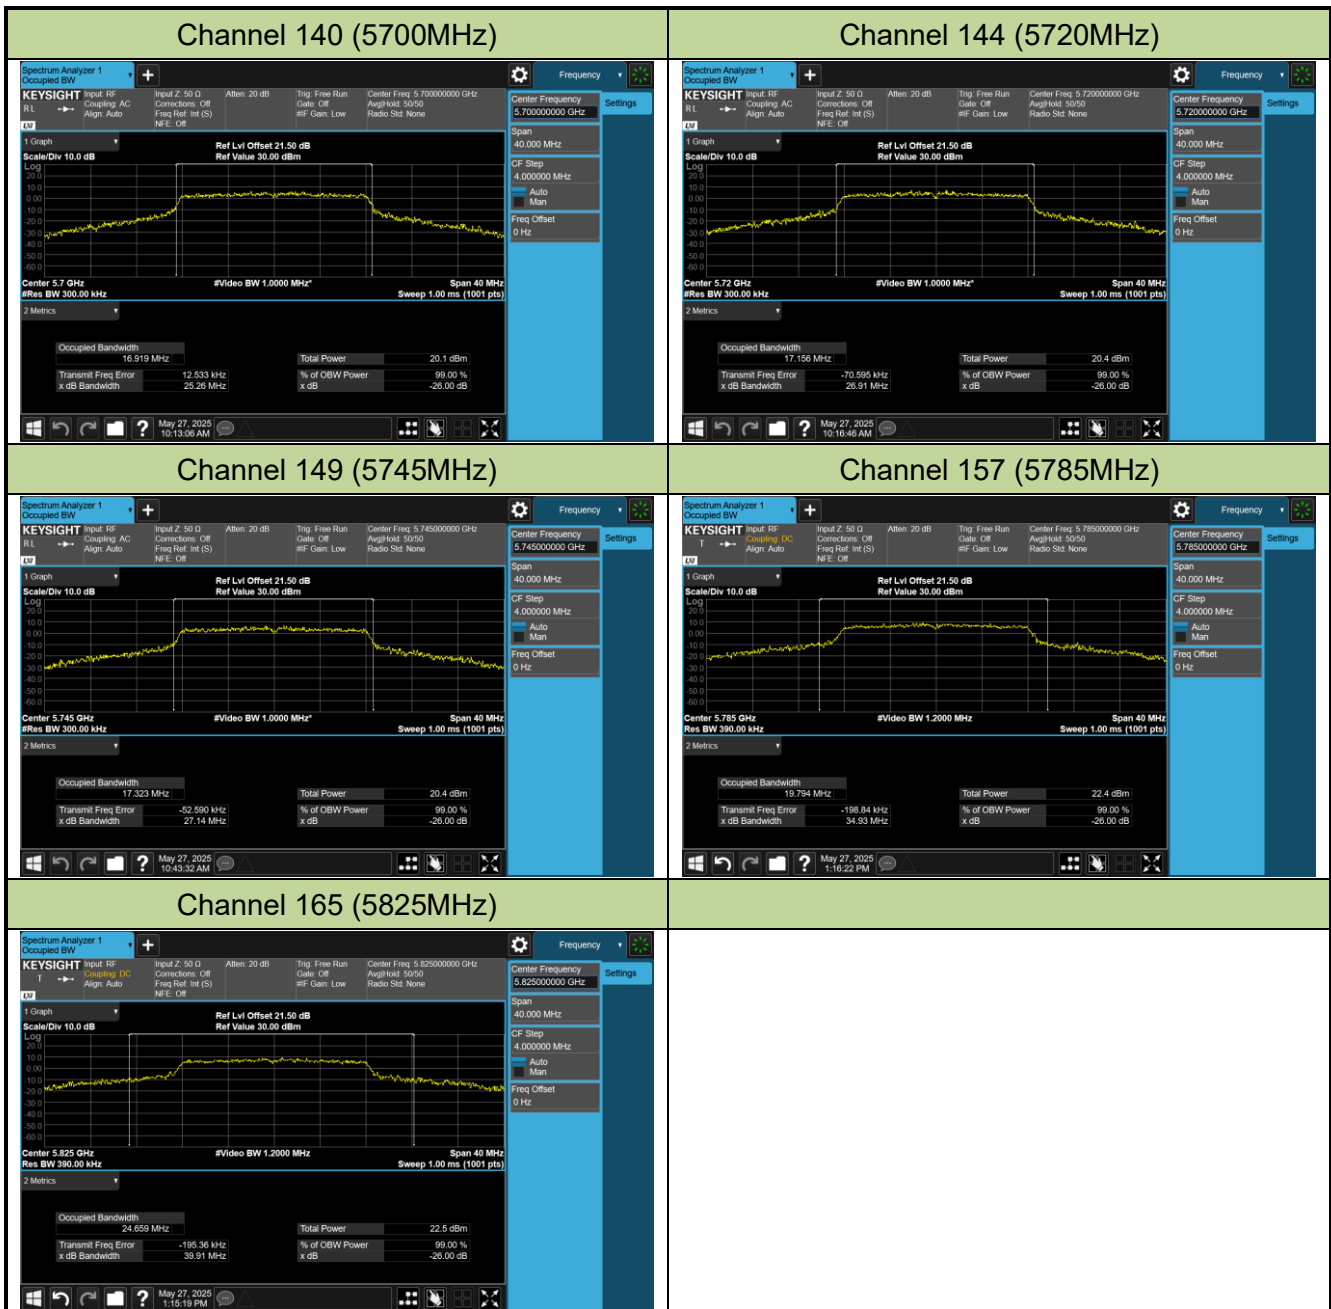


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth


Channel 36 (5180MHz)




Channel 44 (5220MHz)

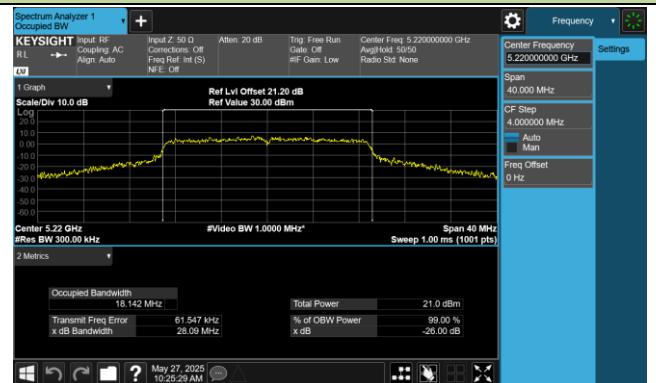


Channel 48 (5240MHz)

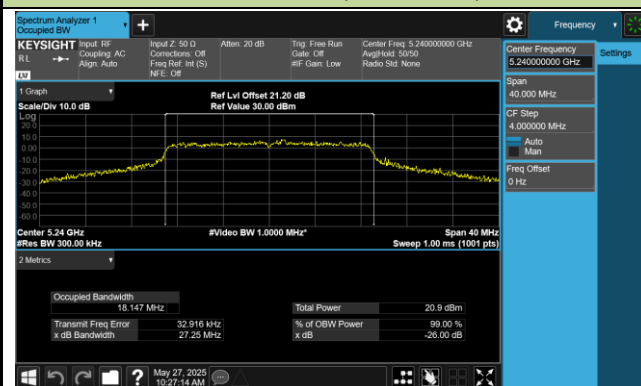


Channel 52 (5260MHz)

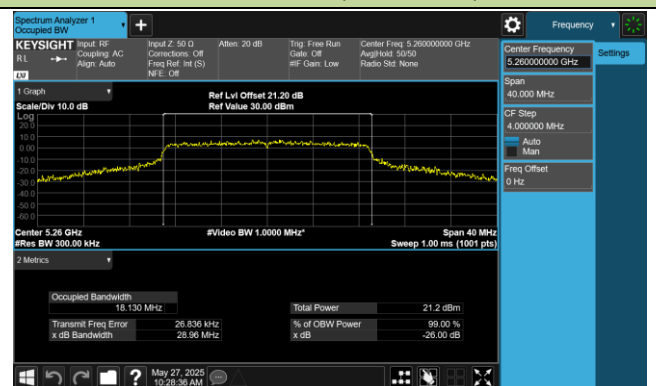


Channel 60 (5300MHz)

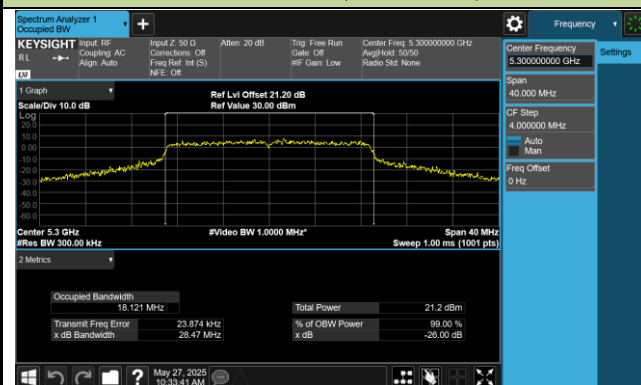

Channel 64 (5320MHz)

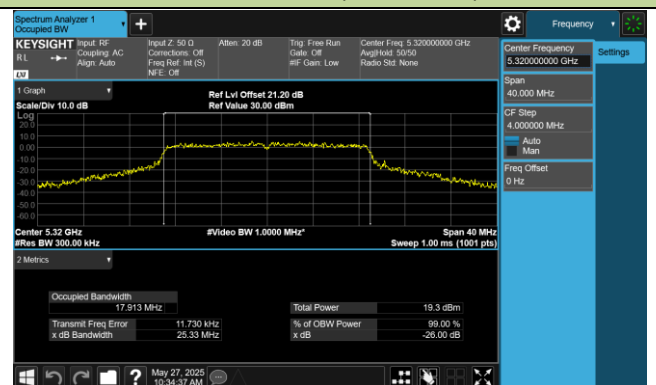


Channel 100 (5500MHz)

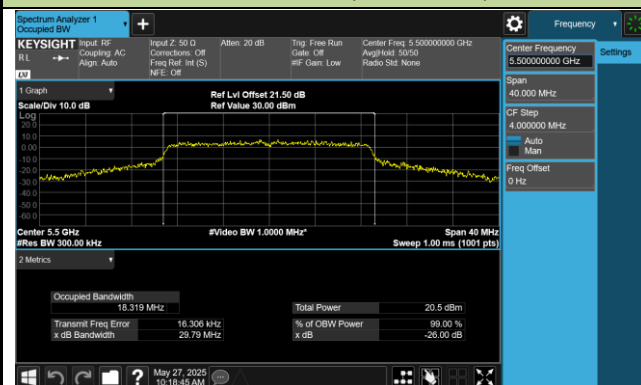


Channel 116 (5580MHz)



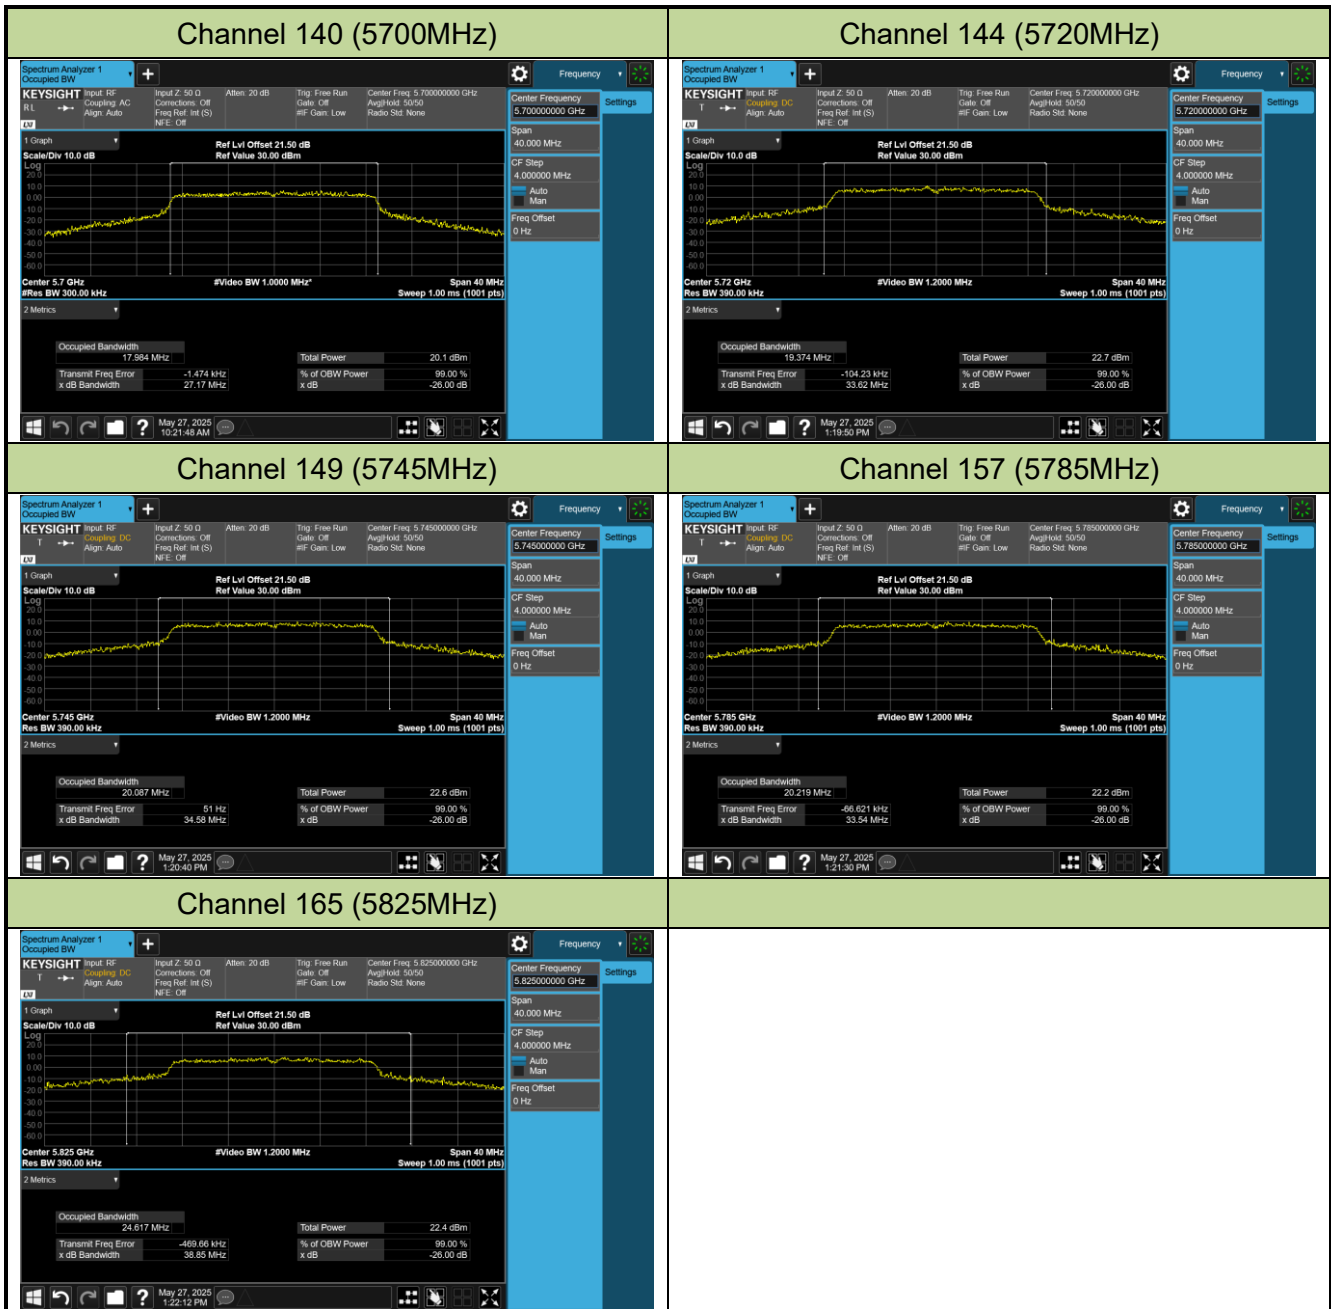


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth


Channel 38 (5190MHz)

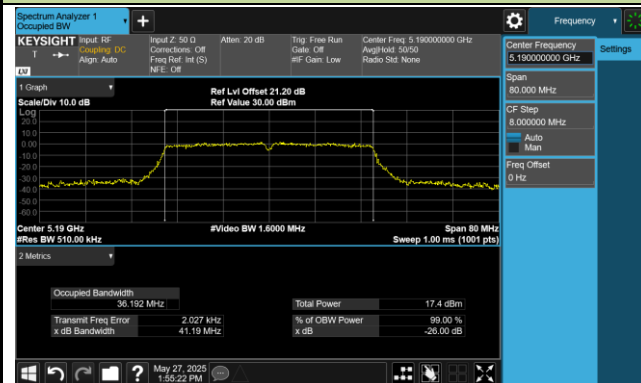


Channel 46 (5230MHz)

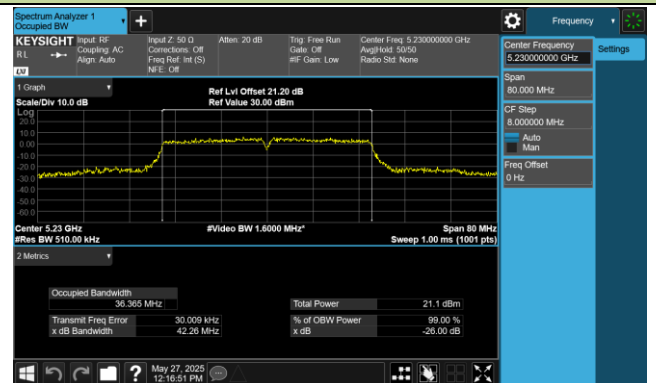


Channel 54 (5270MHz)

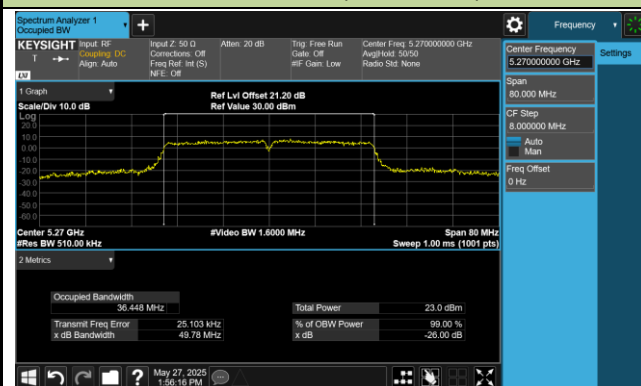


Channel 62 (5310MHz)

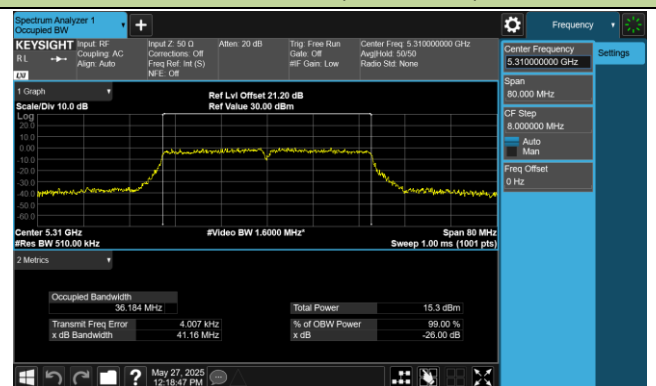


Channel 102 (5510MHz)

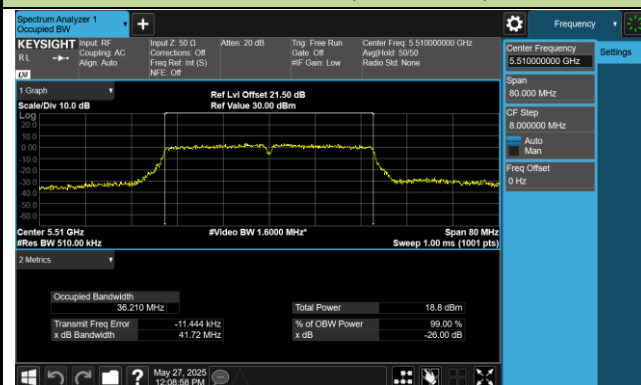


Channel 110 (5550MHz)

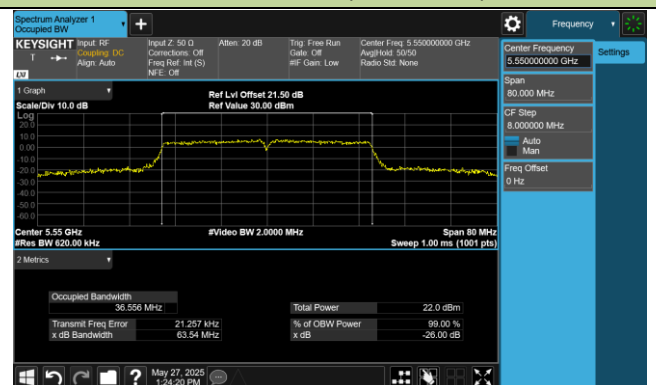


Channel 134 (5670MHz)

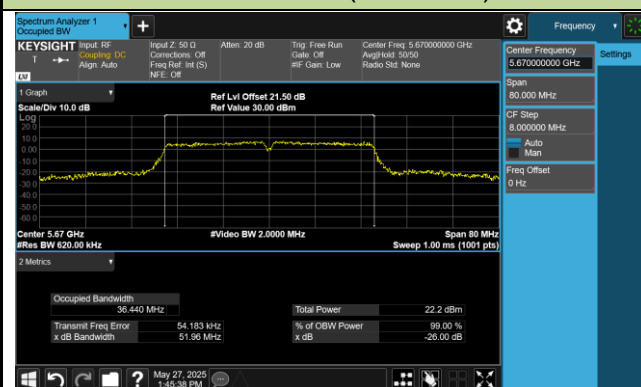

Channel 142 (5710MHz)

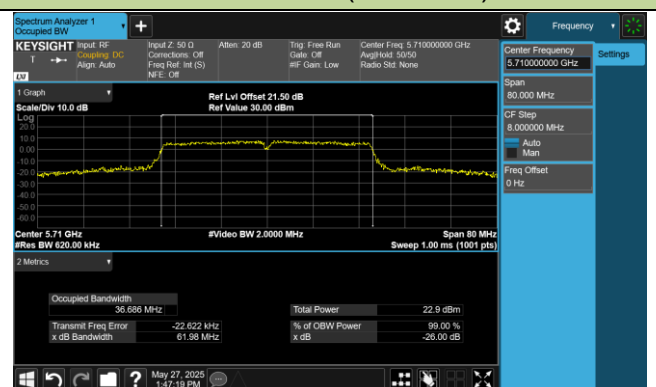

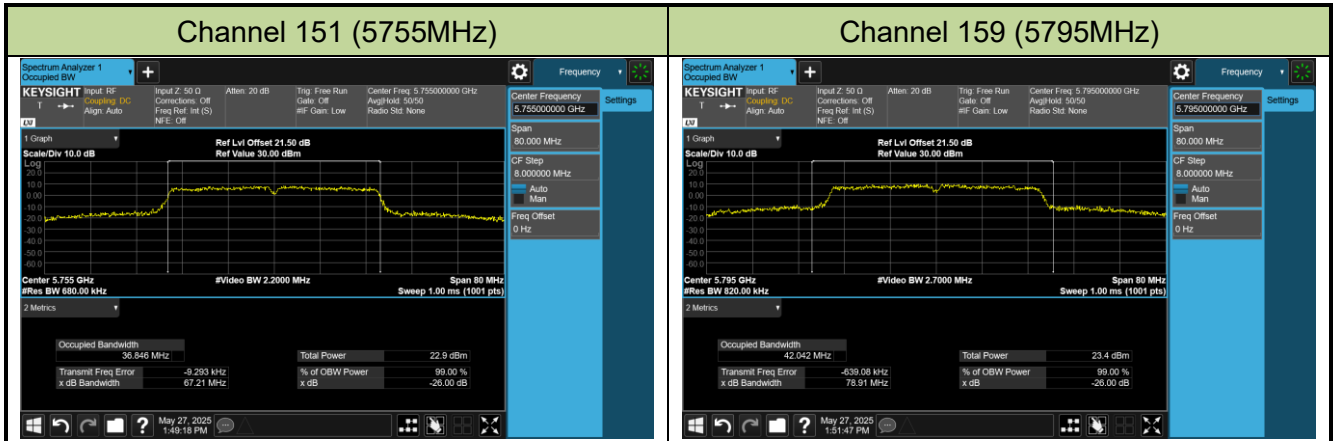

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

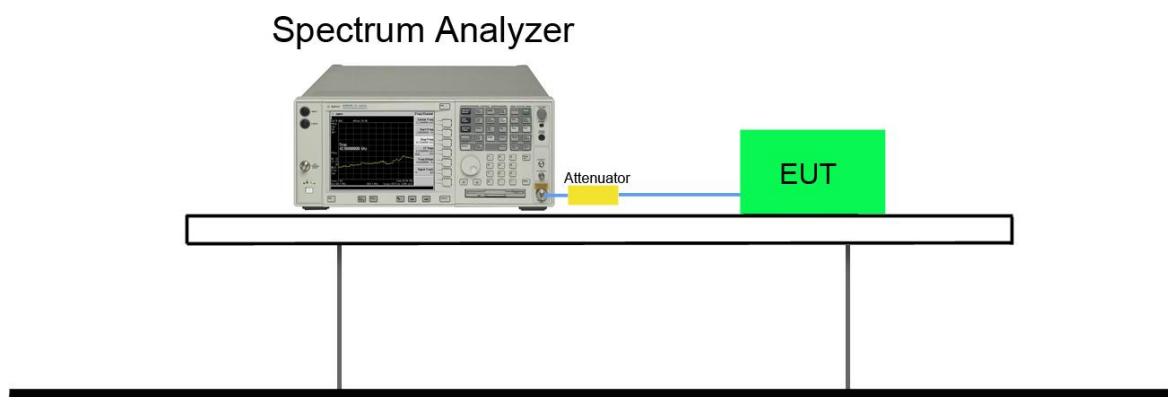


7.3.5. Test Result

Product	Smart Controller	Temperature	21°C
Test Engineer	Fran	Relative Humidity	56%
Test Site	SR6	Test Date	2025/5/27

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0						
802.11a	6Mbps	149	5745	16.38	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.31	≥ 0.5	Pass
802.11a	6Mbps	165	5825	15.05	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	16.26	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.52	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.57	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	35.26	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	36.33	≥ 0.5	Pass

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

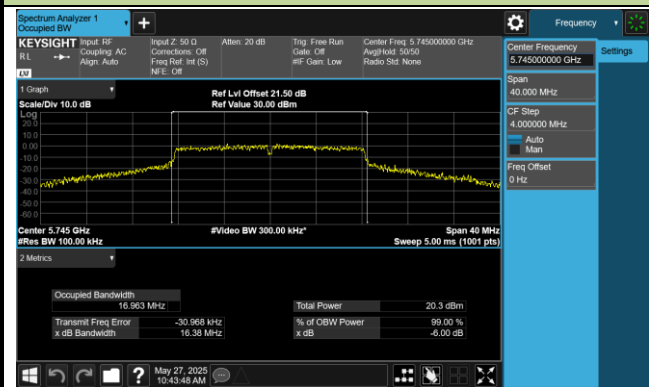

Channel 157 (5785MHz)




Channel 165 (5825MHz)

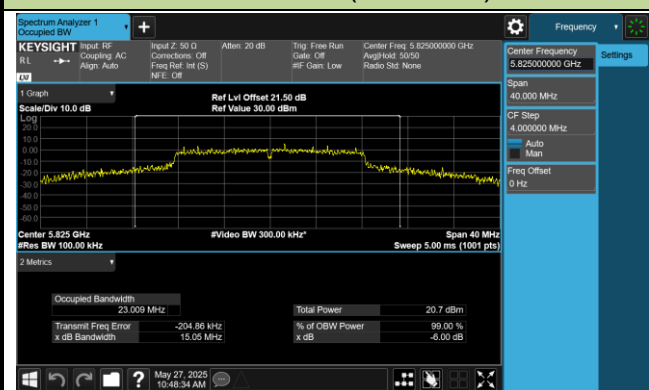


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

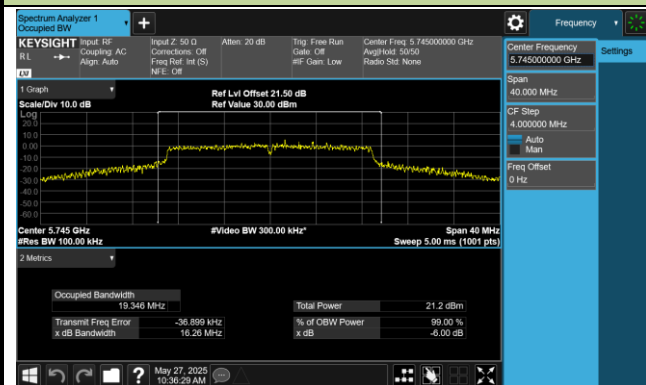

Channel 157 (5785MHz)

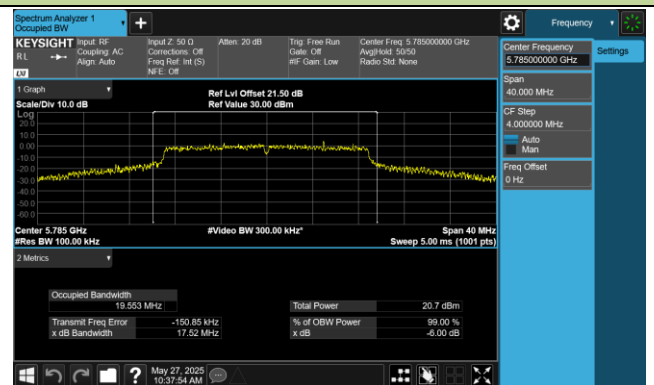


Channel 165 (5825MHz)

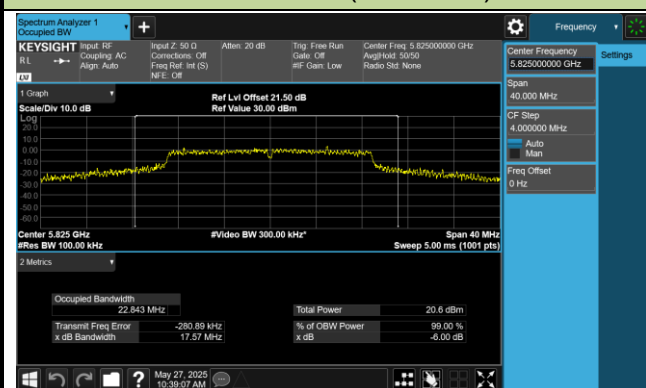


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

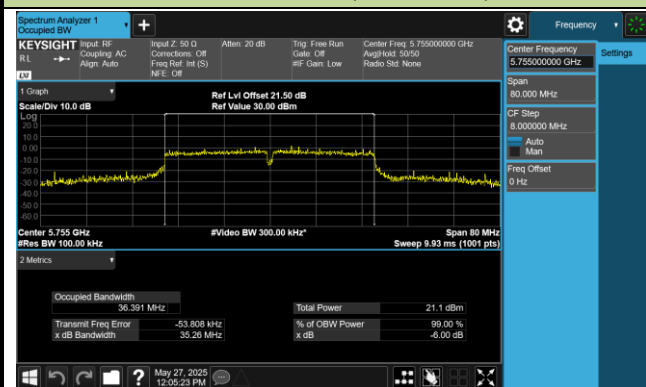

Channel 159 (5795MHz)

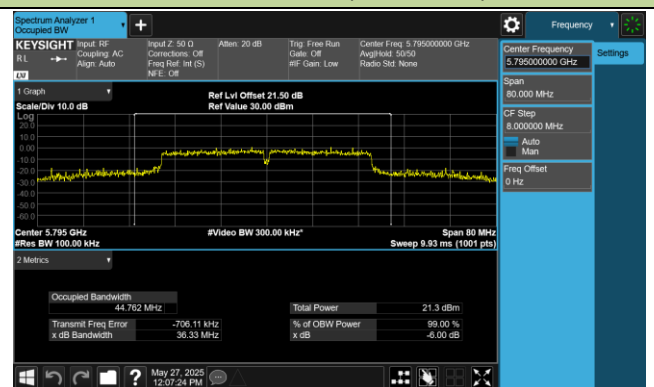

7.4. Output Power Measurement

7.4.1. Test Limit

For FCC Power Measurement Limit

For client operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 250mW.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (23.98dBm) or 11dBm +10 log (26dB BW).

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For IC Power Measurement Limit

For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW (23.01dBm) or $10 + 10 \cdot \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power shall not exceed 250 mW (23.98dBm) or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W (30dBm) or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

For the 5.725-5.85 GHz band, the maximum conducted output power shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033 D02v02r01 - Section E) 3) b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.4.4. Test Setup

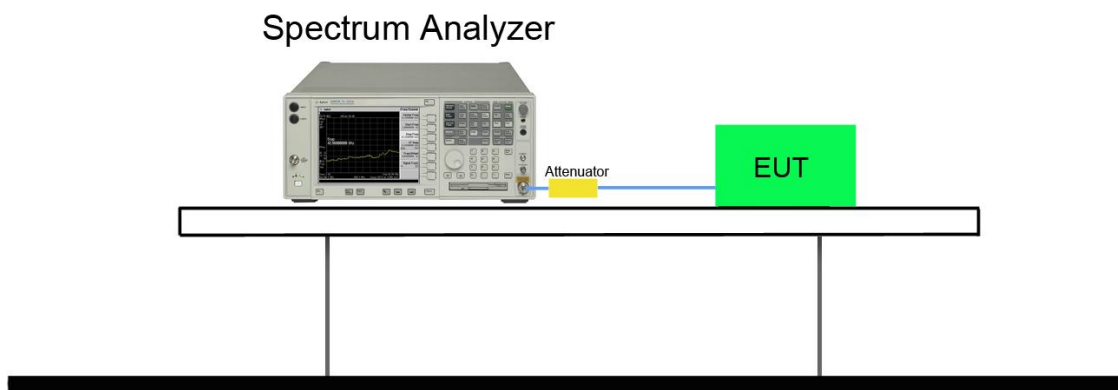

7.4.5. Test Result

Product	Smart Controller	Temperature	21°C
Test Engineer	Fran	Relative Humidity	56%
Test Site	SR6	Test Date	2025/7/1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	12.51	≤ 23.98	Pass
11a	6Mbps	44	5220	13.10	≤ 23.98	Pass
11a	6Mbps	48	5240	13.30	≤ 23.98	Pass
11a	6Mbps	52	5260	13.29	≤ 23.98	Pass
11a	6Mbps	60	5300	13.17	≤ 23.98	Pass
11a	6Mbps	64	5320	13.22	≤ 23.98	Pass
11a	6Mbps	100	5500	12.11	≤ 23.98	Pass
11a	6Mbps	116	5580	10.65	≤ 23.98	Pass
11a	6Mbps	140	5700	8.69	≤ 23.98	Pass
11a	6Mbps	144	5720	8.30	≤ 23.66	Pass
11a	6Mbps	149	5745	7.53	≤ 30.00	Pass
11a	6Mbps	157	5785	7.12	≤ 30.00	Pass
11a	6Mbps	165	5825	7.00	≤ 30.00	Pass
11n-HT20	MCS0	36	5180	12.41	≤ 23.98	Pass
11n-HT20	MCS0	40	5220	13.02	≤ 23.98	Pass
11n-HT20	MCS0	48	5240	13.07	≤ 23.98	Pass
11n-HT20	MCS0	52	5260	13.29	≤ 23.98	Pass
11n-HT20	MCS0	60	5300	13.04	≤ 23.98	Pass
11n-HT20	MCS0	64	5320	13.37	≤ 23.98	Pass
11n-HT20	MCS0	100	5500	11.95	≤ 23.98	Pass
11n-HT20	MCS0	116	5580	10.66	≤ 23.98	Pass
11n-HT20	MCS0	140	5700	8.43	≤ 23.98	Pass
11n-HT20	MCS0	144	5720	8.14	≤ 23.98	Pass
11n-HT20	MCS0	149	5745	7.53	≤ 30.00	Pass
11n-HT20	MCS0	157	5785	6.99	≤ 30.00	Pass
11n-HT20	MCS0	165	5825	6.72	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Average Power Limit (dBm)	Result
11n-HT40	MCS0	38	5190	12.17	≤ 23.98	Pass
11n-HT40	MCS0	46	5230	12.84	≤ 23.98	Pass
11n-HT40	MCS0	54	5270	13.25	≤ 23.98	Pass
11n-HT40	MCS0	62	5310	13.50	≤ 23.98	Pass
11n-HT40	MCS0	102	5510	11.84	≤ 23.98	Pass
11n-HT40	MCS0	110	5550	11.25	≤ 23.98	Pass
11n-HT40	MCS0	134	5670	8.73	≤ 23.98	Pass
11n-HT40	MCS0	142	5710	8.47	≤ 23.98	Pass
11n-HT40	MCS0	151	5755	7.35	≤ 30.00	Pass
11n-HT40	MCS0	159	5795	6.97	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	12.53	≤ 23.98	Pass
11ac-VHT20	MCS0	40	5220	13.09	≤ 23.98	Pass
11ac-VHT20	MCS0	48	5240	13.25	≤ 23.98	Pass
11ac-VHT20	MCS0	52	5260	13.37	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	13.38	≤ 23.98	Pass
11ac-VHT20	MCS0	64	5320	13.51	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	12.04	≤ 23.98	Pass
11ac-VHT20	MCS0	116	5580	10.71	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	8.49	≤ 23.98	Pass
11ac-VHT20	MCS0	144	5720	8.22	≤ 23.98	Pass
11ac-VHT20	MCS0	149	5745	7.63	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	7.25	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	6.99	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Average Power Limit (dBm)	Result
11ac-VHT40	MCS0	38	5190	12.29	≤ 23.98	Pass
11ac-VHT40	MCS0	46	5230	12.94	≤ 23.98	Pass
11ac-VHT40	MCS0	54	5270	13.32	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	13.61	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	11.93	≤ 23.98	Pass
11ac-VHT40	MCS0	110	5550	11.59	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	8.83	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	8.52	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	7.50	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	7.06	≤ 30.00	Pass

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v02r01 - Section E) 3) b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

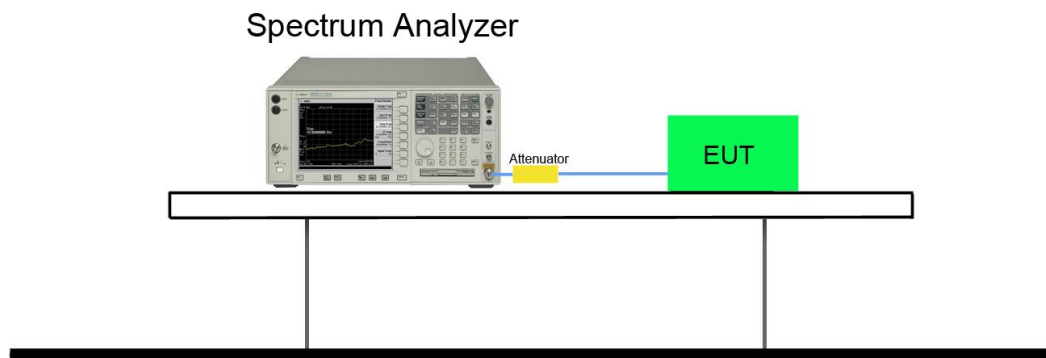

7.5.5. Test Result

Note: TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For FCC Power Spectral Density Limit

For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For IC Power Spectral Density Limit

For the band 5.15-5.25 GHz, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the 5.725-5.85 GHz band, the power spectral density shall not exceed 30 dBm in any 500 kHz band.


7.6.2. Test Procedure Used

KDB 789033 D02v02r01 - Section F

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
4. RBW = 100 kHz
5. VBW = 3MHz
6. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
7. Detector = power averaging (Average)
8. Sweep time = auto
9. Trigger = free run
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

7.6.4. Test Setup

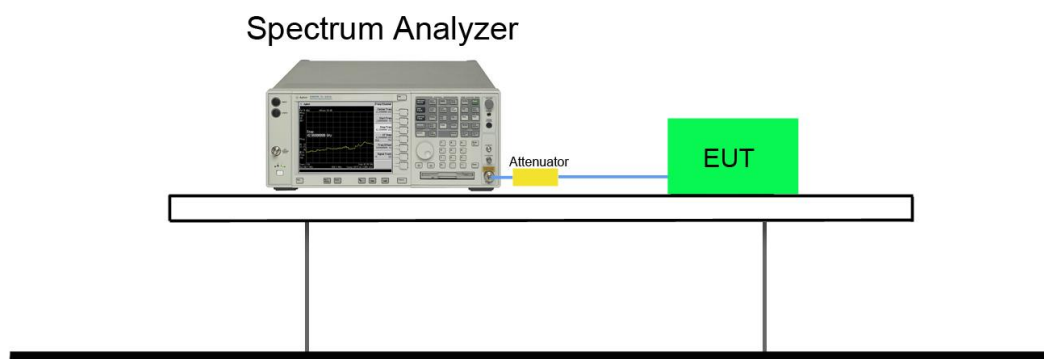

7.6.5. Test Result

Product	Smart Controller	Temperature	21°C
Test Engineer	Fran	Relative Humidity	56%
Test Site	SR6	Test Date	2025/7/1

FCC: U-NII-1 & U-NII-2A & U-NII-2C

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)	Result
11a	6Mbps	36	5180	0.800	98.43%	0.869	≤ 11.00	Pass
11a	6Mbps	44	5220	1.620	98.43%	1.689	≤ 11.00	Pass
11a	6Mbps	48	5240	1.603	98.43%	1.672	≤ 11.00	Pass
11a	6Mbps	52	5260	2.003	98.43%	2.072	≤ 11.00	Pass
11a	6Mbps	60	5300	1.660	98.43%	1.729	≤ 11.00	Pass
11a	6Mbps	64	5320	1.864	98.43%	1.933	≤ 11.00	Pass
11a	6Mbps	100	5500	0.399	98.43%	0.468	≤ 11.00	Pass
11a	6Mbps	116	5580	-0.683	98.43%	-0.614	≤ 11.00	Pass
11a	6Mbps	140	5700	-3.146	98.43%	-3.077	≤ 11.00	Pass
11a	6Mbps	144	5720	-3.274	98.43%	-3.205	≤ 11.00	Pass
11ac-VHT20	MCS0	36	5180	0.386	98.17%	0.466	≤ 11.00	Pass
11ac-VHT20	MCS0	40	5220	0.867	98.17%	0.947	≤ 11.00	Pass
11ac-VHT20	MCS0	48	5240	1.084	98.17%	1.164	≤ 11.00	Pass
11ac-VHT20	MCS0	52	5260	1.569	98.17%	1.649	≤ 11.00	Pass
11ac-VHT20	MCS0	60	5300	1.163	98.17%	1.243	≤ 11.00	Pass
11ac-VHT20	MCS0	64	5320	1.300	98.17%	1.380	≤ 11.00	Pass
11ac-VHT20	MCS0	100	5500	0.002	98.17%	0.082	≤ 11.00	Pass
11ac-VHT20	MCS0	116	5580	-1.165	98.17%	-1.085	≤ 11.00	Pass
11ac-VHT20	MCS0	140	5700	-3.771	98.17%	-3.691	≤ 11.00	Pass
11ac-VHT20	MCS0	144	5720	-3.649	98.17%	-3.569	≤ 11.00	Pass

Test Mode	Data Rate /MCS	Ch. No.	Freq. (MHz)	PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11ac-VHT40	MCS0	38	5190	-2.503	96.54%	-2.350	≤ 11.00	Pass
11ac-VHT40	MCS0	46	5230	-1.745	96.54%	-1.592	≤ 11.00	Pass
11ac-VHT40	MCS0	54	5270	-1.322	96.54%	-1.169	≤ 11.00	Pass
11ac-VHT40	MCS0	62	5310	-2.929	96.54%	-2.776	≤ 11.00	Pass
11ac-VHT40	MCS0	102	5510	-2.865	96.54%	-2.712	≤ 11.00	Pass
11ac-VHT40	MCS0	110	5550	-3.563	96.54%	-3.410	≤ 11.00	Pass
11ac-VHT40	MCS0	134	5670	-5.976	96.54%	-5.823	≤ 11.00	Pass
11ac-VHT40	MCS0	142	5710	-6.313	96.54%	-6.160	≤ 11.00	Pass

Note: Total PSD (dBm/MHz) = $10 \cdot \log\{10^{\text{Ant 0 PSD} / 10} + 10^{\text{Ant 1 PSD} / 10}\}$ (dBm/MHz) + $10 \cdot \log(1/\text{duty cycle})$.


FCC: U-NII-3

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	PSD (dBm/510KHz)	Duty Cycle (%)	Total PSD (dBm/510kHz)	Limit (dBm/ 500kHz)	Result
11a	6Mbps	149	5745	-6.671	98.43%	-6.602	≤ 30.00	Pass
11a	6Mbps	157	5785	-7.121	98.43%	-7.052	≤ 30.00	Pass
11a	6Mbps	165	5825	-7.811	98.43%	-7.742	≤ 30.00	Pass
11ac-VHT20	MCS0	149	5745	-7.191	98.17%	-7.111	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	-7.818	98.17%	-7.738	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	-7.838	98.17%	-7.758	≤ 30.00	Pass
11ac-VHT40	MCS0	151	5755	-10.643	96.54%	-10.490	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	-11.132	96.54%	-10.979	≤ 30.00	Pass

Note: Total PSD (dBm/500kHz) = $10 \cdot \log\{10^{\text{Ant 0 PSD} / 10} + 10^{\text{Ant 1 PSD} / 10}\}$ (dBm/500kHz) + $10 \cdot \log(1/\text{duty cycle})$.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

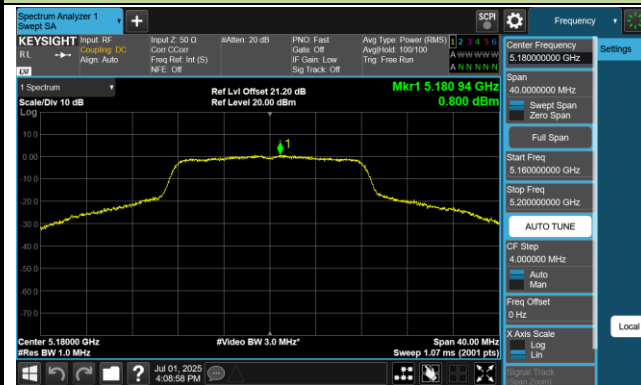


Channel 44 (5220MHz)



Channel 48 (5240MHz)

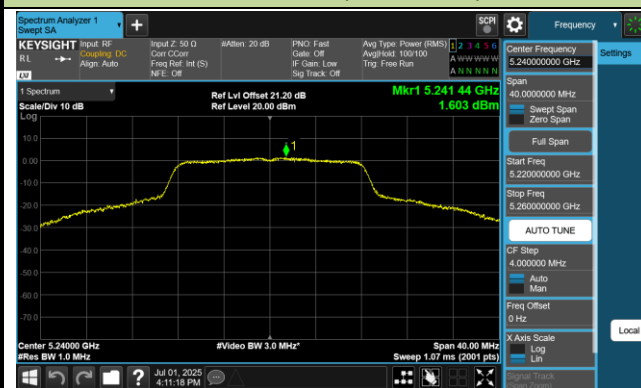

Channel 52 (5260MHz)

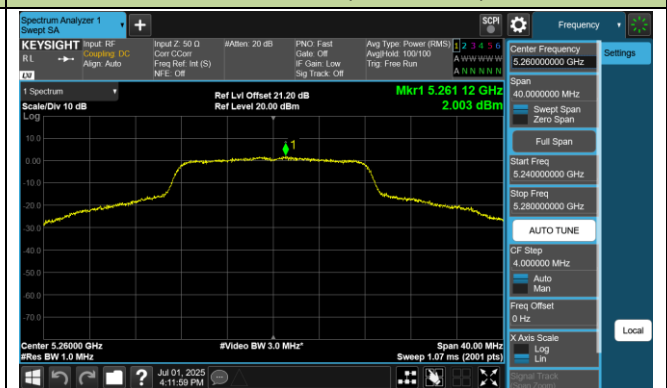

Channel 60 (5300MHz)



Channel 64 (5320MHz)




Channel 100 (5500MHz)




Channel 116 (5580MHz)



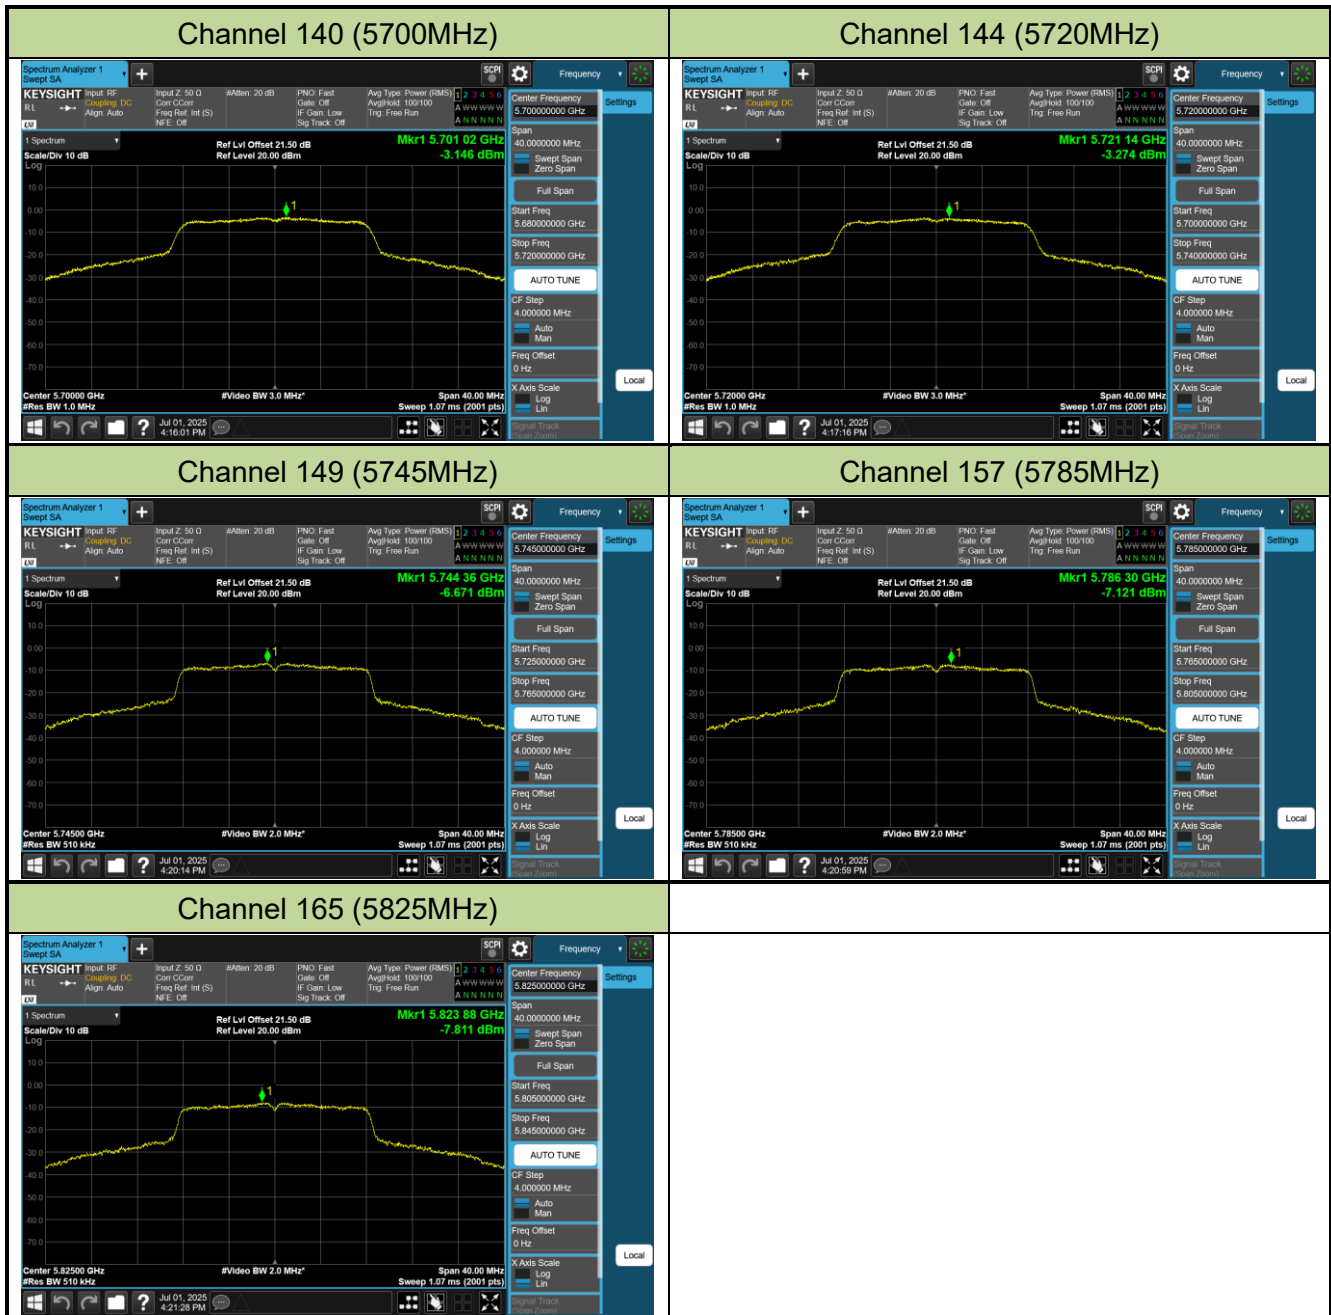


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

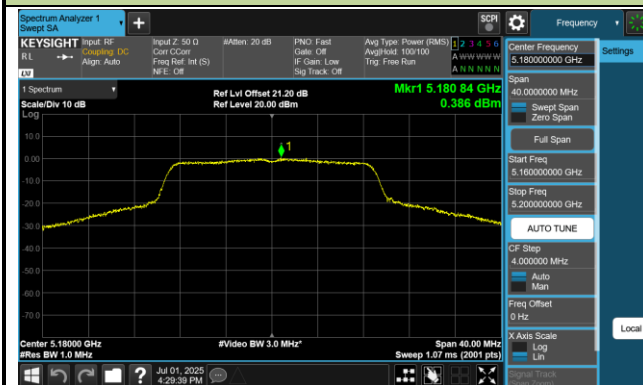

Channel 44 (5220MHz)

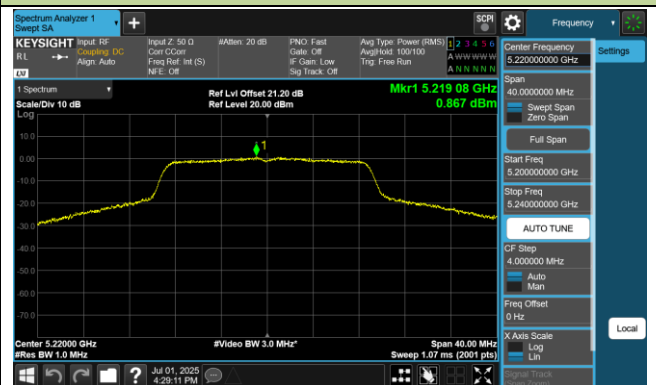


Channel 48 (5240MHz)

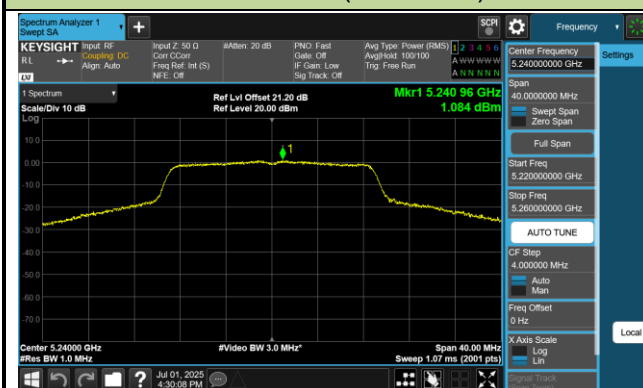


Channel 52 (5260MHz)




Channel 60 (5300MHz)

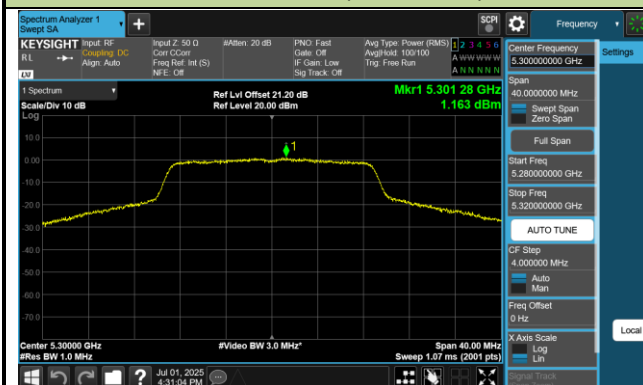

Channel 64 (5320MHz)

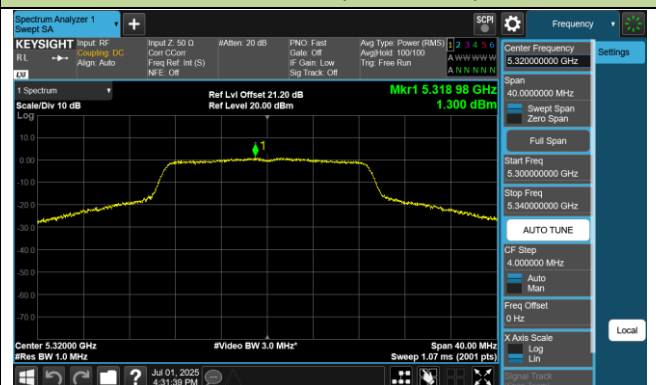

Channel 100 (5500MHz)

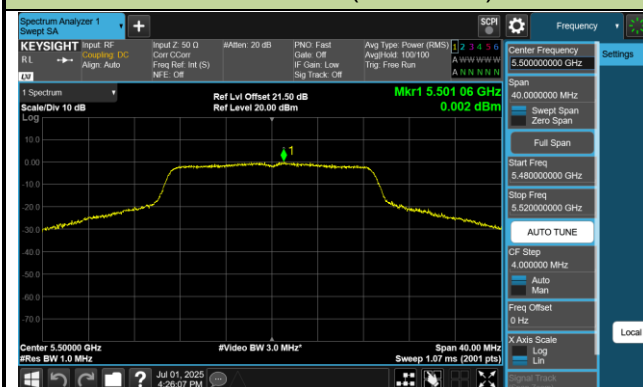

Channel 116 (5580MHz)



