


Title UV Smart D60 V1 Internal foto's FCC		
Author Koen van der Kouwe	Document ID DOC- TBD	Revision 0




How to open the D60 V1

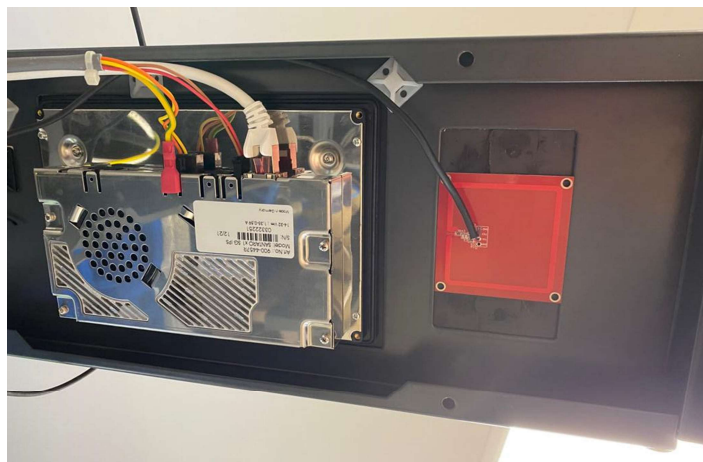

RFID antenna (red square)


Title UV Smart D60 V1 Internal foto's FCC		
Author Koen van der Kouwe	Document ID DOC- TBD	Revision 0

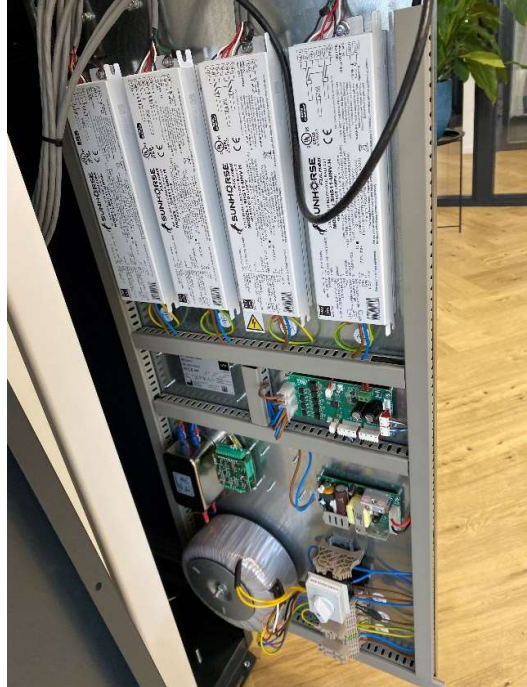

Barcode reader in front panel and open electrowall with transformer, ballasts, sensor PCB and on/off switch.




RFID Antenna

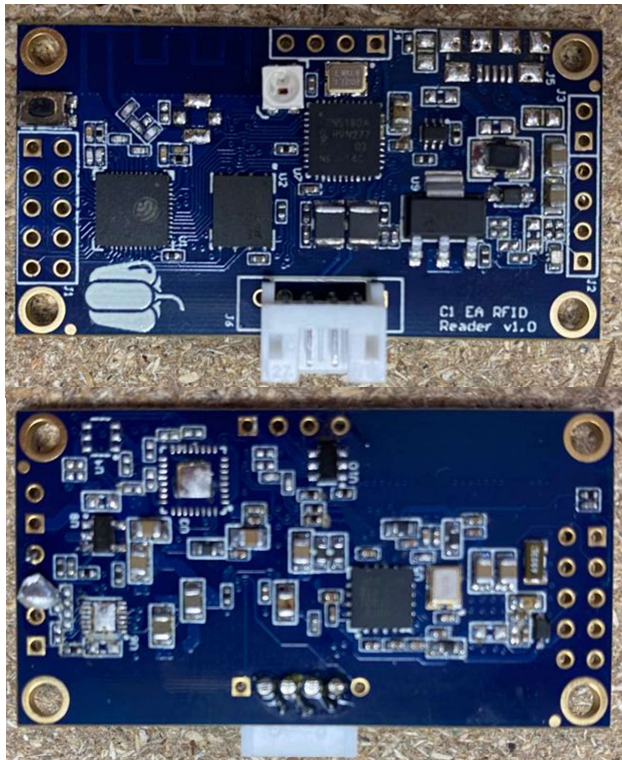

RFID PCB front and back

Title UV Smart D60 V1 Internal foto's FCC		
Author Koen van der Kouwe	Document ID DOC- TBD	Revision 0

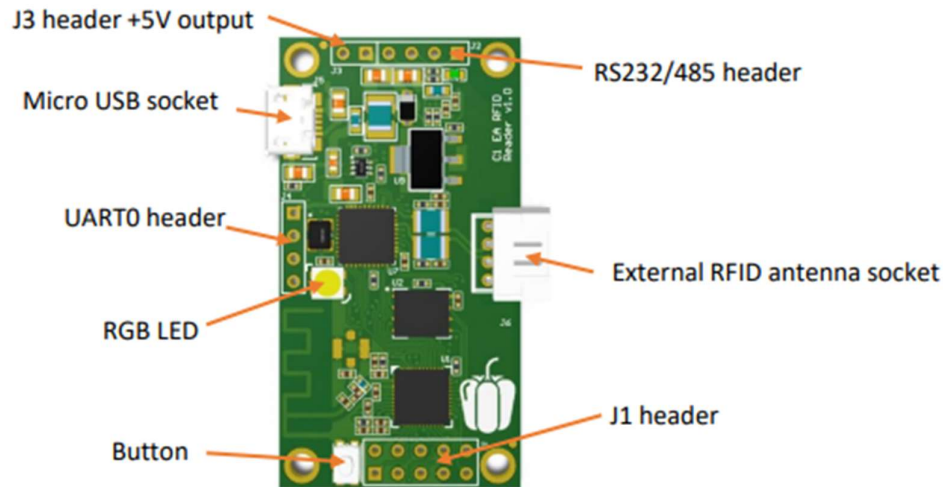


J1 header description


- **GND** – Ground
- **3.3V** – Output
- **GPIOx** - general-purpose input/output. Currently only GPIO4,GPIO5, GPIO16, GPIO17 can be used with polling
- **UART2_RX/UART2_TX** – UART2 in TTL standard with 3.3V levels



J2 header description (RS232 version)

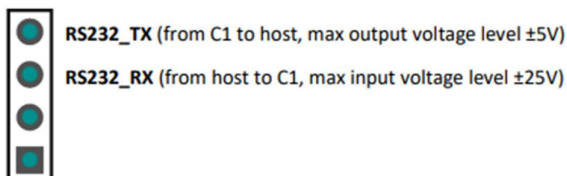

J3 header description



Title UV Smart D60 V1 Internal foto's FCC		
Author Koen van der Kouwe	Document ID DOC- TBD	Revision 0

J4 UART0 header description

- Vin** – Power supply, 3-5.5Voltage
- UART0 TX** – UART TX data from the module
- UART0 RX** – UART RX data to the module
- GND** – ground

