



FCC TEST REPORT

FCC: 2A8M4-DS05

Product : Smark lock
Model Name : DS05, DS01
Brand : N/A
Report No. : NCT26016494X1-3

Prepared for

Zhongshan Pulido Intelligent Technology Co., Ltd
No.30, Taiyu Road, Jidong Second Industrial Zone, Xiaolan Town, Zhongshan City,
China

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.
A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Z.S.F Technology Co.,Ltd
Address : No.30, Taiyu Road, Jidong Second Industrial Zone, Xiaolan Town, Zhongshan City, China
Manufacture's name : Shenzhen Z.S.F Technology Co.,Ltd
Address : No.30, Taiyu Road, Jidong Second Industrial Zone, Xiaolan Town, Zhongshan City, China
Product name : Smark lock
Model number : DS05, DS01
Standards : FCC CFR47 Part 15 Section 15.225
Test procedure : ANSI C63.10-2020 + COR. 1-2023 + C63.10A-2024 + ERRATA TO C63.10A-2024
Date of test : Jan. 23, 2026 to Feb. 07, 2026
Date of Issue : Feb 09, 2026

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:


Keven Wu / Engineer

Technical Manager:


Henry Wang / Manager

Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 TEST SETUP CONFIGURATION	6
3.3 TEST MODE	7
3.4 TEST SITE.....	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY.....	11
4.3 DESCRIPTION OF SUPPORT UNITS.....	11
5 CONDUCTED EMISSION	12
5.1 E.U.T. OPERATION.....	12
5.2 EUT SETUP	12
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
5.4 MEASUREMENT PROCEDURE	13
5.5 CONDUCTED EMISSION LIMIT.....	13
5.6 MEASUREMENT DESCRIPTION.....	13
5.7 CONDUCTED EMISSION TEST RESULT	13
6 RADIATED SPURIOUS EMISSIONS & RESTRICTED SPURIOUS EMISSION	14
6.1 EUT OPERATION	14
6.2 TEST SETUP	15
6.3 SPECTRUM ANALYZER SETUP.....	16
6.4 TEST PROCEDURE.....	17
6.5 SUMMARY OF TEST RESULTS	18
7 20DB&99% BANDWIDTH MEASUREMENT	22

7.1 TEST PROCEDURE.....	22
7.2 TEST RESULT	22
8 FREQUENCY STABILITY	23
8.1 TEST PROCEDURE.....	23
8.2 TEST RESULT	23
9 ANTENNA APPLICATION	25
9.1 ANTENNA REQUIREMENT.....	25
9.2 RESULT	25
10 TEST SETUP &EUT PHOTOS	26

2 Test Summary

FCC CFR47 Part 15 Section 15.225			
Standard Section	Test Item	Result	Remark
15.203	Antenna requirement	PASS	
15.207	Conducted Emission	N/A	
15.225(d) 15.209	Radiated Spurious Emission	PASS	
15.215	Bandwidth	PASS	
15.225(d) 15.209	Restricted Spurious Emission	PASS	
15.225(e)	Frequency Stability Tolerance	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Smarm lock
Model Name	:	DS05
Sample ID	:	NCT26016494X-0001
Sample(s) Status:	:	Engineer sample
Series Model	:	DS01
Model Different.:	:	There is no difference except for the appearance, shape and model name. So all the test were performed on the model DS05.
Operation Frequency	:	13.56 MHz
Number of Channel	:	1
Type of Modulation	:	ASK
Antenna installation	:	Coil Antenna
Antenna Gain	:	0 dBi
Power supply	:	DC 6V From Battery, DC 5V From Type-C for Emergency Mode
Hardware Version	:	V1.0
Software Version	:	V1.0
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

3.2 Test Setup Configuration

Conducted Emission



Radiated Emission(30MHz-1GHz)

EUT

3.3 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

3.4 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde&Schwarz	2025/6/10	2026/6/09
limitor	ESH3-Z2	NA	Ronde&Schwarz	2025/6/10	2026/6/09
Attenuation	PCL-10dB	221126	HTEC	2025/6/10	2026/6/09
LISN	ENV 216	102796	Rohde&Schwarz	2025/6/10	2026/6/09
LISN	VN1-13S	004023	CRANAGE	2025/6/10	2026/6/09
Cable	RG223-1500MM	NA	RG	2025/6/10	2026/6/09

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2025/6/10	2026/6/09
Amplifi (30MHz-1GHz)	BBV 9743 B	00374	SCHWARZBECK	2025/6/10	2026/6/09
Power Meter	ML2495A	10084	Anritu	2025/6/10	2026/6/09
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHWARZBECK	2025/3/08	2026/3/07
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2025/3/10	2026/3/09
Pream plifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2025/6/10	2026/6/09
Spectrum Analyze (10Hz-40GHz)	FSV 40	100952	Rohde&Schwarz	2025/6/10	2026/6/09
Pream plifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/6/10	2026/6/09

Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/3/10	2026/3/09
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHWARZBECK	2025/6/10	2026/6/09
Comprehensive tester	CWM500	104995	Rohde&Schwarz	2025/6/10	2026/6/09
Amplifier (9KHz-30MHz)	BBV 9745	00109	SCHWARZBECK	2025/6/10	2026/6/09
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/6/10	2026/6/09
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/6/10	2026/6/09
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/6/10	2026/6/09
Power Sensor	TR1029-2	512364	Techoy	2025/6/10	2026/6/09
RF Swith	TR1029-1	512364	Techoy	2025/6/10	2026/6/09
Cable	DA800-4000MM	NA	DA	2025/6/10	2026/6/09
Cable	DA800-11000MM	NA	DA	2025/6/10	2026/6/09

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 × 10 ⁻⁶
Bandwidth	± 1.5 × 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±3.82dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
			2008		

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2020
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :

Temperature	: 25 °C
Humidity	: 54% RH
Atmospheric Pressure	: 101kPa


5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2021 + COR. 1-2023 + C63.10A-2024 + ERRATA TO C63.10A-2024.

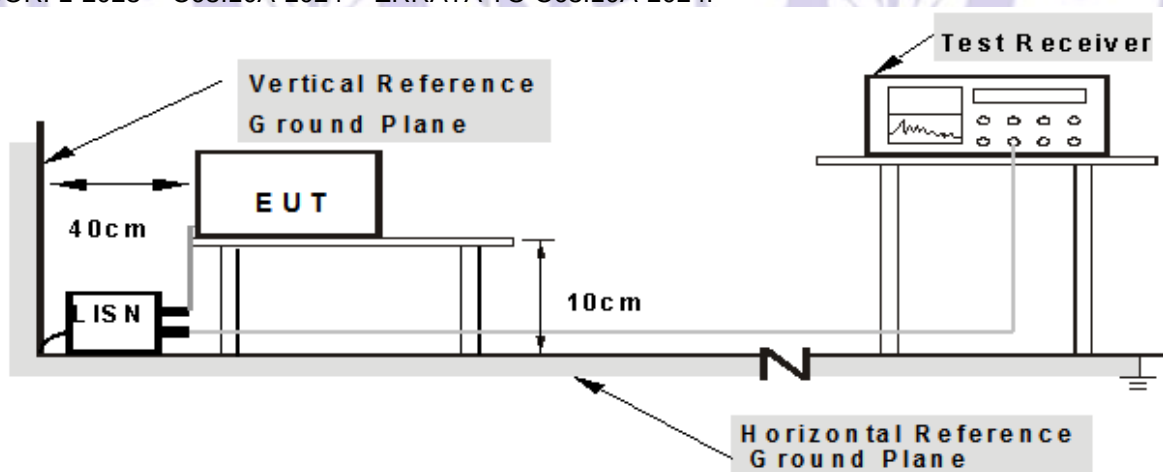

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 10 cm from EUT and at least 10 from other units and other metal planes

5.3 Test SET-UP (Block Diagram of Configuration)

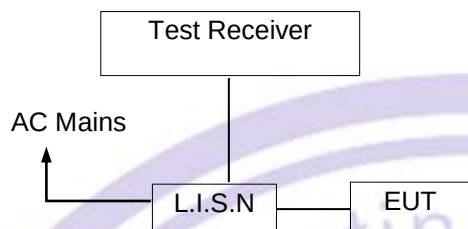

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.1m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

EUT power supply by battery, so the test not applicable.

6 Radiated Spurious Emissions & Restricted Spurious Emission

Test Requirement : FCC CFR 47 Part 15 Section 15.225(d)&15.209
 Test Method : ANSI C63.10-2020 + COR. 1-2023 + C63.10A-2024 + ERRATA TO C63.10A-2024
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

According to RSS-210 Annex B.6

Devices shall comply with the following requirements:

the field strength of any emission shall not exceed the following limits:

15.848 mV/m (84 dBuV/m) at 30 m, within the band 13.553-13.567 MHz

334 μV/m (50.5 dBuV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz

106 μV/m (40.5 dBuV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz

RSS-Gen general field strength limits for frequencies outside the band 13.110-14.010 MHz

6.1 EUT Operation


Operating Environment :

Temperature: : 25°C
 Humidity: : 54% RH
 Atmospheric Pressure: : 101kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

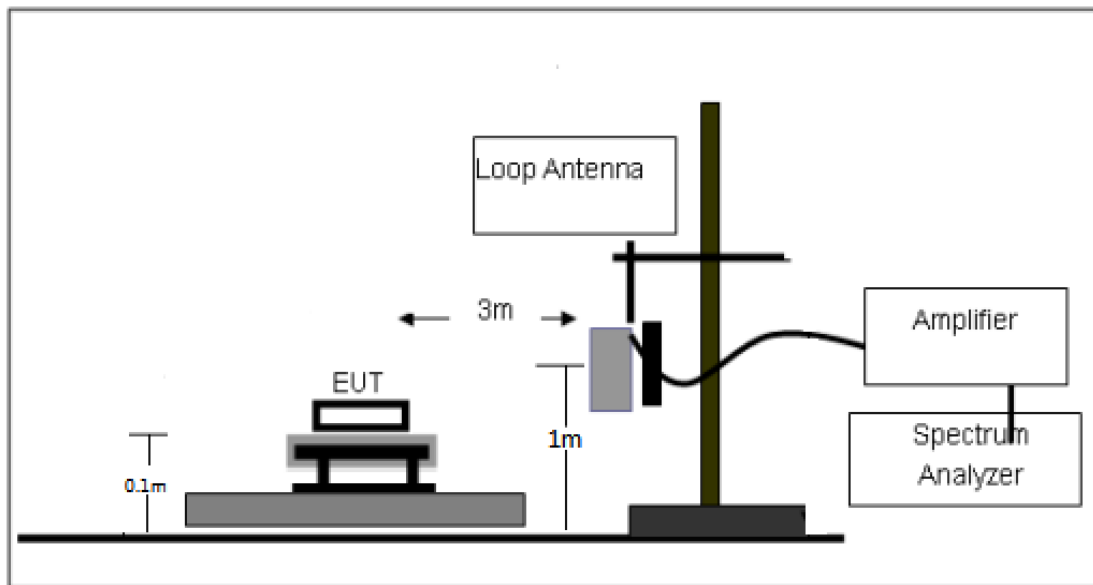

The test setup for emission measurement from 30 MHz to 1 GHz.

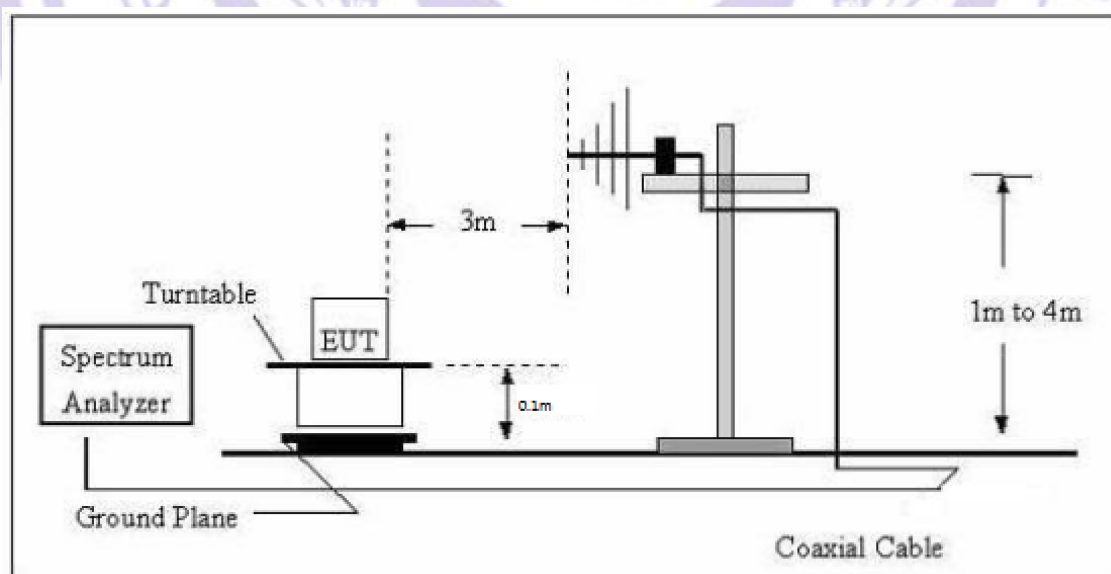

The test setup for emission measurement above 1 GHz

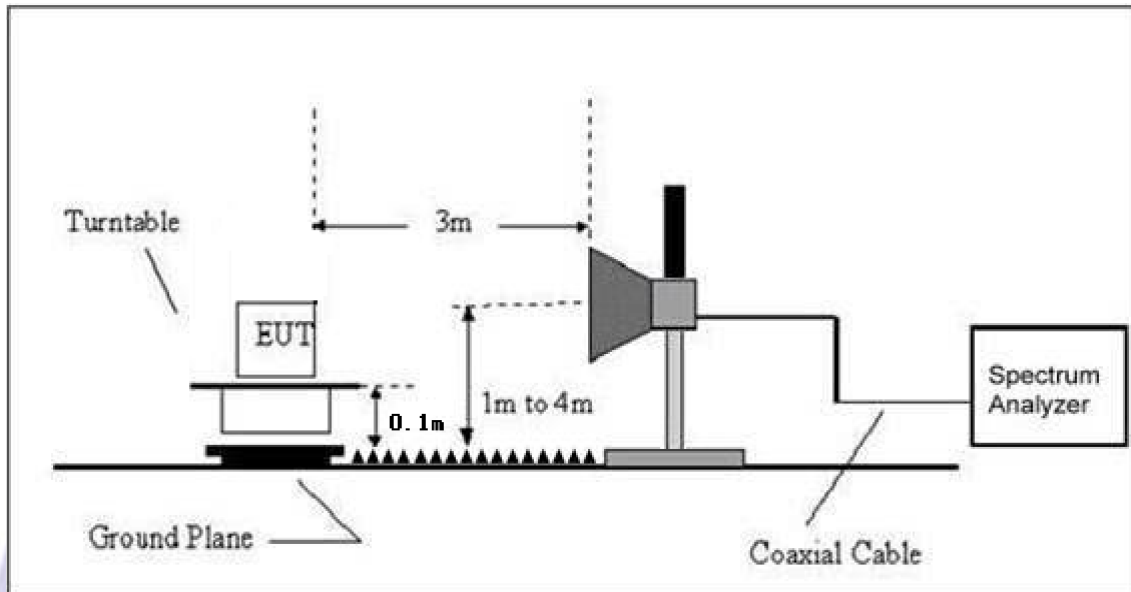

6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz


6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.1m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 0.1m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz


Ant Pol.:Coplanar

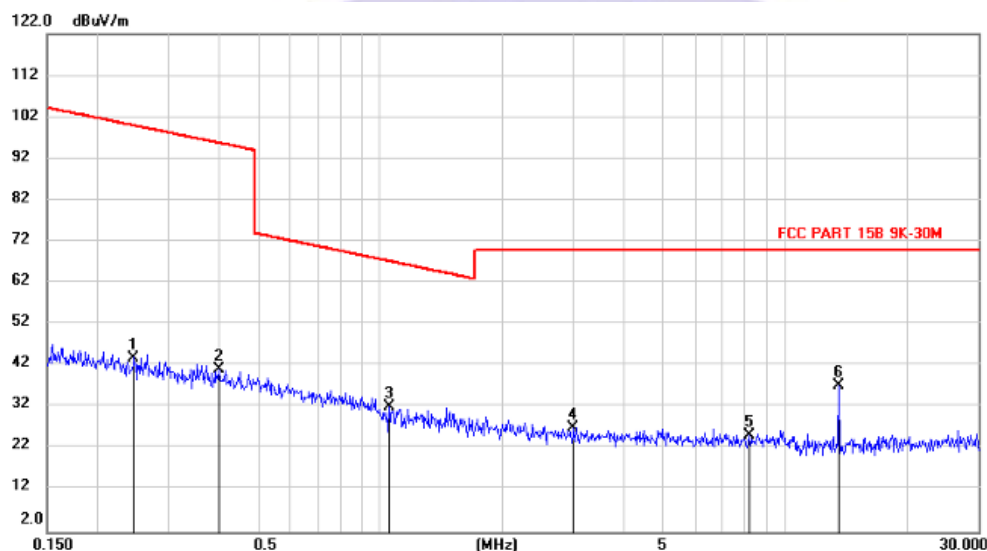

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		0.2464	43.90	0.10	44.00	99.95	-55.95	peak		
2		0.3995	41.09	0.10	41.19	95.77	-54.58	peak		
3		1.0496	32.13	0.10	32.23	67.28	-35.05	peak		
4		3.0028	26.96	0.10	27.06	70.00	-42.94	peak		
5		8.1610	25.11	0.10	25.21	70.00	-44.79	peak		
6	*	13.5652	37.25	0.10	37.35	70.00	-32.65	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

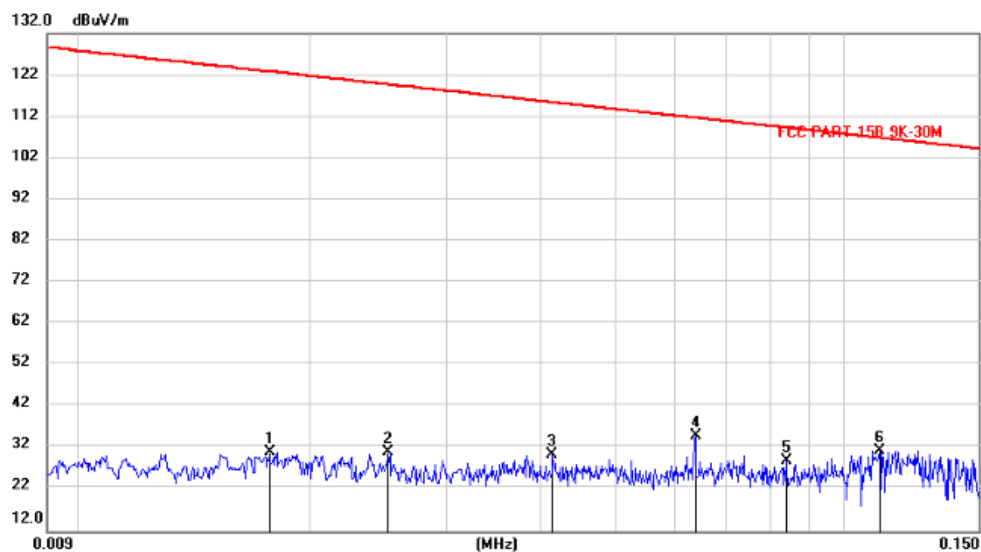


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0177	30.92	0.10	31.02	122.7	-91.73	peak		
2		0.0252	30.86	0.10	30.96	119.6	-88.73	peak		
3		0.0413	30.29	0.10	30.39	115.4	-85.02	peak		
4		0.0637	34.90	0.10	35.00	111.6	-76.66	peak		
5		0.0839	28.89	0.10	28.99	109.2	-80.29	peak		
6	*	0.1111	31.33	0.10	31.43	106.8	-75.42	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Test Frequency: 30MHz ~ 1GHz

Test plot for Horizontal

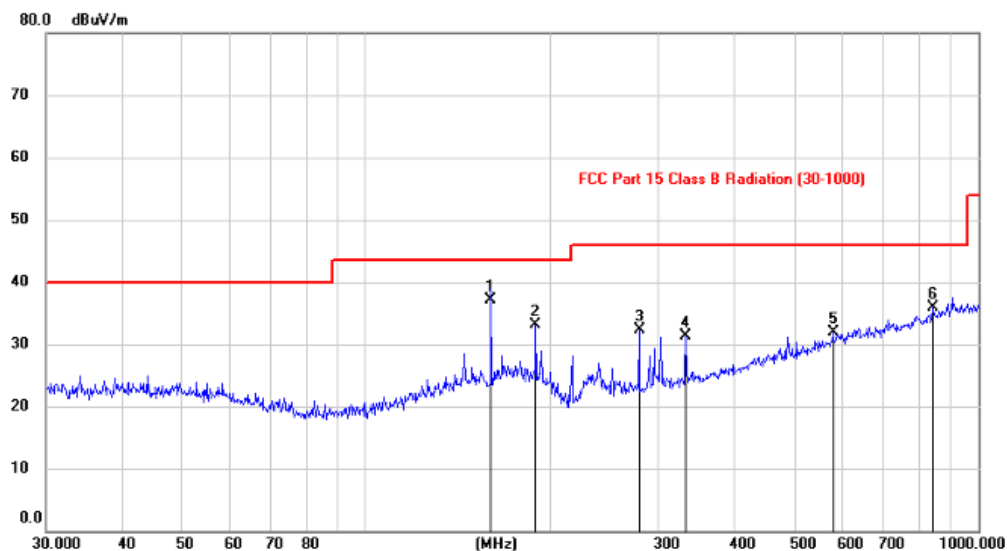


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	160.0086	22.11	15.04	37.15	43.50	-6.35	QP		
2		189.2512	21.64	11.56	33.20	43.50	-10.30	peak		
3		279.3700	18.75	13.55	32.30	46.00	-13.70	peak		
4		333.1022	16.38	14.90	31.28	46.00	-14.72	peak		
5		579.1435	12.12	19.80	31.92	46.00	-14.08	peak		
6		843.3116	12.56	23.29	35.85	46.00	-10.15	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Test plot for Vertical

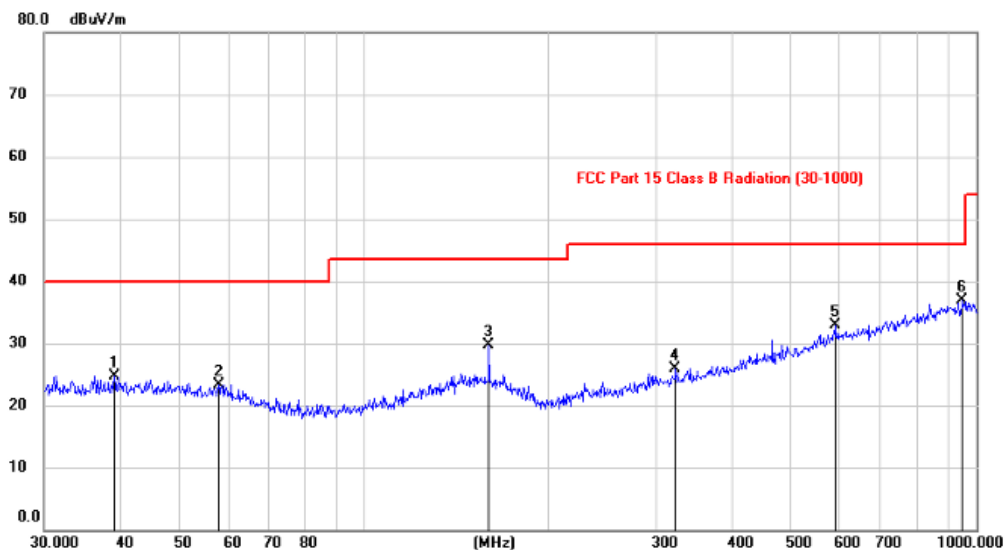

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		39.0382	10.16	14.46	24.62	40.00	-15.38	peak		
2		57.8571	9.95	13.41	23.36	40.00	-16.64	peak		
3		160.0087	14.73	15.04	29.77	43.50	-13.73	peak		
4		322.3393	11.27	14.67	25.94	46.00	-20.06	peak		
5		589.7317	12.87	20.01	32.88	46.00	-13.12	peak		
6	*	951.9824	12.18	24.65	36.83	46.00	-9.17	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

7 20dB&99% Bandwidth Measurement


Test Requirement : FCC CFR47 Part 15 Section 15.215
 Test Method : ANSI C63.10-2020 + COR. 1-2023 + C63.10A-2024 + ERRATA TO C63.10A-2024
 Test Limit : /

7.1 Test Procedure

1. Set RBW = 1% to 5% of the OBW
2. Set the video bandwidth (VBW) = 3*RBW.
3. Detector = Peak.
4. Trace mode = max hold
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.

7.2 Test Result

Modulation	Frequency (MHz)	20dB bandwidth (Hz)	99%dB bandwidth (kHz)	Result
ASK	13.56	470	1.401	Pass

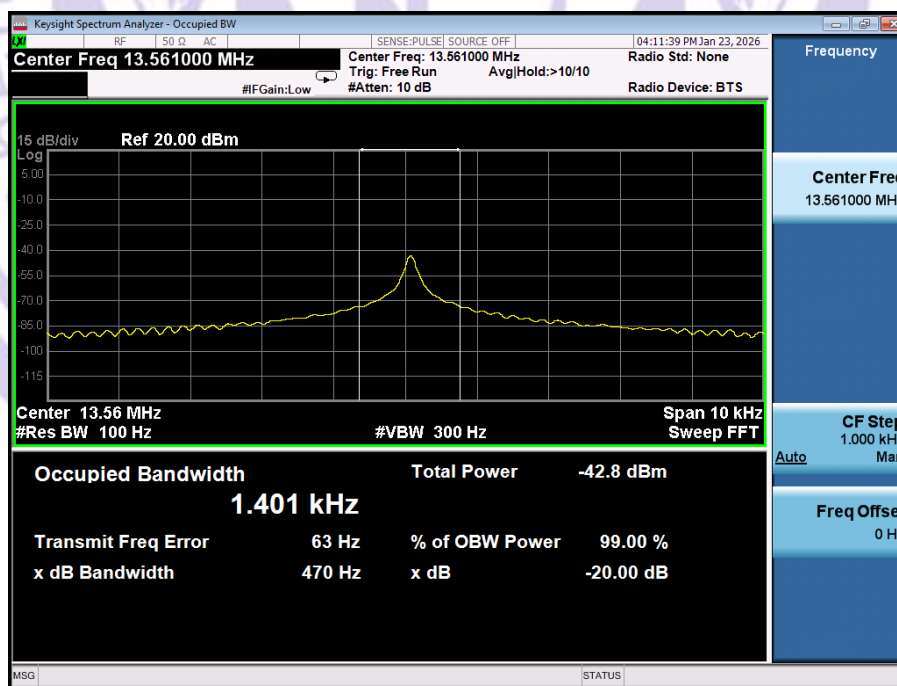

8 FREQUENCY STABILITY

Test Requirement	: FCC CFR47 Part 15 Section 15.225(e)
Test Method	: ANSI C63.10-2020 + COR. 1-2023 + C63.10A-2024 + ERRATA TO C63.10A-2024
Test Limit	: the carrier frequency stability shall not exceed ± 100 ppm

8.1 Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency.

Turn EUT off and set the chamber temperature to - 20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.

Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) or endpoint, record the maximum frequency change.

8.2 Test Result

Assigned Frequency(MHz): 13.56MHz				
Voltage	Temperature	Measured Frequency (MHz)	Frequency stability	Limit
Low DC 5.1V	+20℃	13.560335	0.000335	±100 ppm ±0.001356MHz
Normal DC 6V	-10℃	13.560044	0.000044	
	-5℃	13.558766	-0.001234	
	0℃	13.559117	-0.000883	
	+10℃	13.558686	-0.001314	
	+20℃	13.559076	-0.000924	
	+30℃	13.560778	0.000778	
	+40℃	13.559505	-0.000495	
	+50℃	13.559310	-0.000690	
	+60℃	13.559531	-0.000469	
High DC 6.9V	+20℃	13.560970	0.000970	

9 Antenna Application

9.1 Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Result

The antenna is coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

10 Test Setup &EUT Photos

Reference to the attachment for details.

*****THE END REPORT*****

