



FCC&IC TEST REPORT

FCC ID: 2A8M4S08

On Behalf of

Zhongshan Pulido Intelligent Technology Co., Ltd

Smart padlock

Model No.: S08, LD911

Prepared for : Zhongshan Pulido Intelligent Technology Co., Ltd
Address : No.30, Taiyu Road, Jidong Second Industrial Zone, Xiaolan Town,
Zhongshan City, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2605200-C03-R02
Date of Receipt : May 26, 2026
Date of Test : May 26, 2026 – July 31, 2026
Date of Report : August 6, 2026
Version Number : V0
Test Result : Pass

Contents

1.	General Information.....	5
1.1.	Description of Device (EUT)	5
1.2.	Accessories of Device (EUT)	6
1.3.	Ancillary Equipment Details.....	6
1.4.	Test Lab Information	6
2.	Summary of test.....	7
2.1.	Summary of test result.....	7
2.2.	Block Diagram	7
2.3.	Test mode	7
2.4.	Test Conditions	7
2.5.	Measurement Uncertainty (95% confidence levels, k=2)	8
2.6.	Test Equipment.....	9
3.	Occupied bandwidth and 20dB Bandwidth.....	11
3.1.	Limit	11
3.2.	Test Procedure	11
3.3.	Test Setup.....	11
3.4.	Test Result.....	11
4.	Radiated emissions	12
4.1.	Limit	12
4.2.	Block Diagram of Test setup.....	12
4.3.	Test Procedure	13
4.4.	Test Result.....	14
5.	Frequency stability	21
5.1.	Test limit.....	21
5.2.	Test Procedure	21
5.3.	Test Setup.....	21
5.4.	Test Results	22
6.	Power Line Conducted Emissions	23
6.1.	Block Diagram of Test Setup	23
6.2.	Limit	23
6.3.	Test Procedure	23
6.4.	Test Result.....	23
7.	Antenna Requirements.....	26
7.1.	Limit	26
7.2.	Antenna Connected Construction	26
7.3.	Results.....	26
8.	Test setup photo	27
9.	EUT photos	27

TEST REPORT DECLARATION

Applicant : Zhongshan Pulido Intelligent Technology Co., Ltd
Address : No.30, Taiyu Road, Jidong Second Industrial Zone,Xiaolan Town, Zhongshan
City, China
Manufacturer : Zhongshan Pulido Intelligent Technology Co., Ltd
Address : No.30, Taiyu Road, Jidong Second Industrial Zone,Xiaolan Town, Zhongshan
City, China
EUT Description : Smart padlock
(A) Model No. : S08, LD911
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.225

ANSI C63.10:2020

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen
Project Engineer

Yannis Wen

Approved by (name + signature).....:

Alan Fan
Project Manager

Alan Fan

Date of issue.....

August 6, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	August 6, 2026	Initial released Issue	Yannis Wen

1. General Information

1.1. Description of Device (EUT)

EUT	: Smart padlock
Model No.	: S08, LD911
DIFF	: The only difference product models is model name. Different model names are available to meet market demands. Other power supply methods, appearance, internal structures, circuits and key components are the same, and do not affect safety and electromagnetic compatibility performance. According to the above information, all tests were performed on S08.
Power supply	: DC 3.7V from battery
Radio Technology	: NFC
Operation frequency	: 13.56MHz
Channel No.	: 1 Channel
Modulation	: ASK
Antenna Type	: Internal antenna, max gain 0dBi (Antenna information is provided by applicant.)
Software version	: V1.0
Hardware Version/ FVIN	: V1.0
Intend use environment	: Residential, commercial and light industrial environment

1.2. Accessories of Device (EUT)

Accessories : /

Manufacturer : /

Model : /

Ratings : /

1.3. Ancillary Equipment Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	Adapter	XIAOMI	MDY-QB-EF	16074846340	N/A

1.4. Test Lab Information

Shenzhen Alpha Product Testing Co., Ltd


Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

2. Summary of test

2.1. Summary of test result

Description of Test Item	Standard	Results
	FCC	
Conducted Emission	15.207	PASS
Radiated emissions	15.209	PASS
Fundamental field strength limit	15.225	PASS
Frequency stability	15.225	PASS
20Db Emission Bandwidth	15.225	PASS
Antenna Requirement	15.203	PASS

2.2. Block Diagram



2.3. Test mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
1	CH1	13.56
Note: According exploratory test, EUT will have maximum output power in those data rate. so those data rate were used for all test.		

2.4. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	25.2℃
Humidity range:	25-75%	55.1%
Pressure range:	86-106kPa	98kPa

2.5. Measurement Uncertainty (95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.6. Test Equipment

Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last Cal.	Cal. Due day
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025.03.09	2029.03.08
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025.03.09	2029.03.08
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2025.08.04	2026.08.03
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2025.08.04	2026.08.03
Spectrum analyzer	Keysight	N9020A	A.19.05	MY54500254	2025.08.04	2026.08.03
Spectrum analyzer	ROHDE&SCHWARZ	FSU	4.71.SP5	200002	2025.08.04	2026.08.03
CMW500	ROHDE&SCHWARZ	CMW500	V 3.7.22	1201.0002K50-117239-sM	2025.08.04	2026.08.03
UXM 5G Base Wireless Test Platform	Keysight	E5175E	1.8.1.2908 2(NR)(LTE)	MY62226130	2026.03.03	2027.03.02
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2025.08.04	2026.08.03
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2025.08.04	2026.08.03
Bilog Antenna	SCHWARZBECK	VULB 9168	/	VULB 9168#627	2025.08.11	2027.08.10
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2025.08.11	2027.08.10
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2025.08.11	2027.08.10
RF Cable	Resenberger	Cable 1	/	RE1	2025.08.04	2026.08.03
RF Cable	Resenberger	Cable 2	/	RE2	2025.08.04	2026.08.03
RF Cable	Resenberger	Cable 3	/	CE1	2025.08.04	2026.08.03
Amplifier	HP	HP8347A	/	2834A00455	2025.08.04	2026.08.03
Amplifier	Agilent	8449B	/	3008A02664	2025.08.04	2026.08.03
Amplifier	SKET	LNPA_0118G-45	/	SK2020010801	2025.08.04	2026.08.03
Filter/Amplifier bank unit	SKET	RSESU-HPH-LNPP18G	/	SK20190712	2025.08.04	2026.08.03
L.I.S.N.#1	SCHWARZBECK	NSLK8126	/	8126-466	2025.08.04	2026.08.03
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2025.08.04	2026.08.03
Pulse Limiter	SCHWARZBECK	9516F	/	9618	2025.08.04	2026.08.03
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2025.08.11	2027.08.10
Preamplifier	SKET	LNPA_1840-50	/	SK2018101801	2025.08.04	2026.08.03
Vector Signal Generator	Agilent	N5182A	/	MY49060042	2025.08.04	2026.08.03
Vector Signal Generator	Agilent	N5172B	2.02	MY51350397	2025.08.04	2026.08.03
Analog Signal Generator	HP	83712B	10.02	US34490219	2025.08.04	2026.08.03
Power Meter	Agilent	E4419B	/	GB40202122	2025.08.04	2026.08.03
Power Sensor	Agilent	E9300A	/	MY41496628	2025.08.04	2026.08.03
Power Sensor	Agilent	E9304A	/	MY41496815	2025.08.04	2026.08.03
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2025.08.04	2026.08.03
Power Sensor	DARE	RPR3006W	/	15100041SNO92	2025.08.04	2026.08.03
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2026.07.07	2027.07.06
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2025.08.04	2026.08.03
Switching Mode	JUNKE	JK12010S	/	20140927-6	2025.08.04	2026.08.03

Power Supply						
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A
6dB Fixed Attenuator	SKET	AP_DC01G-2 W-N-6dB	/	N/A	2025.08.04	2026.08.03

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. Occupied bandwidth and 20dB Bandwidth


3.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in FCC part 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

3.2. Test Procedure


1. Set RBW = 1% to 5% of the OBW
2. Set the video bandwidth (VBW) = 3*RBW.
3. Detector = Peak.
4. Trace mode = max hold
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission

3.3. Test Setup



3.4. Test Result

Mode	Freq (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limit (kHz)	Conclusion
Tx Mode	13.56	0.724	2.063	/	PASS

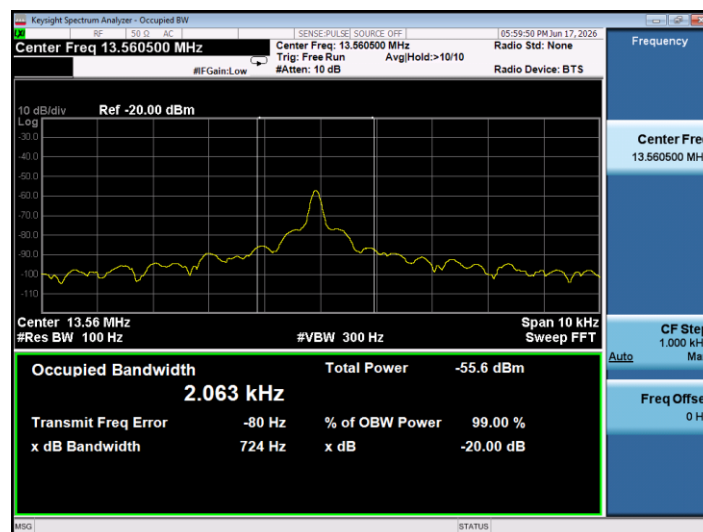

4. Radiated emissions

4.1. Limit

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Note:

- a) The tighter limit applies at the band edges.

For example: F.S limit at 88MHz is 100uV/m

- b) If measurement is made at 3m distance, then F.S Limit at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d2/d1)^2$.

For example:

F.S Limit at 30m(d_2) distance is 30uV/m(L_{d2}), then F.S Limit at 3m(d_1) distance is

$$L_{d1} = 30\text{uV/m} * (30/3)^2 = 100 * 30\text{uV/m} = 69.54 \text{ dBuV/m}$$

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.


- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.


- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

4.2. Block Diagram of Test setup

In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

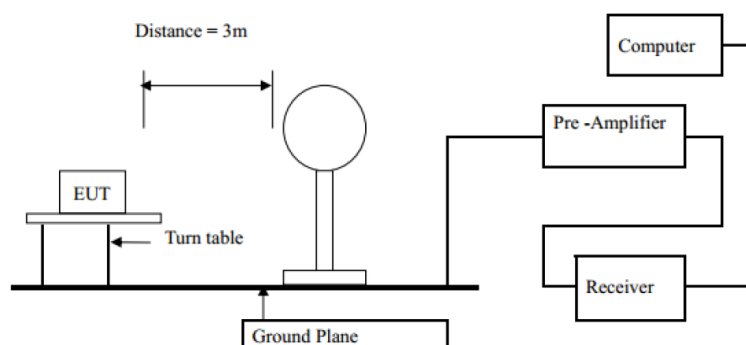

In 3m Anechoic Chamber Test Setup Diagram for frequency 30MHz-1GHz

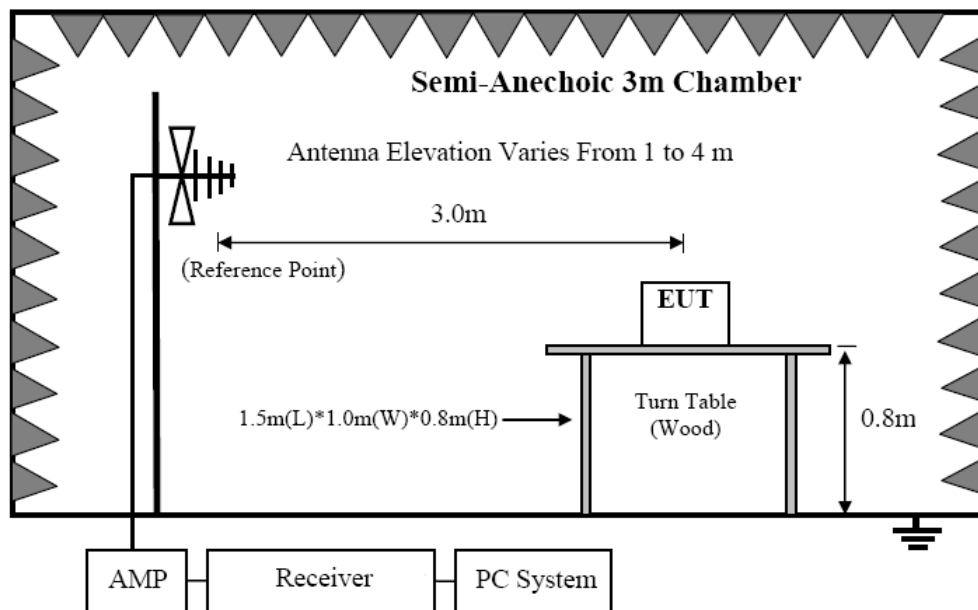

4.3. Test Procedure

Procedure of Preliminary Test

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 4.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2020.

Mains cables, telephone lines or other connections to auxiliary equipment located outside the test are shall drape to the floor, be fitted with ferrite clamps or ferrite tubes placed on the floor at the point where the cable reaches the floor and then routed to the place where they leave the turntable. No extension cords shall be used to mains receptacle.

The antenna was placed at 3 meter away from the EUT as stated in ANSI C63.10:2020. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Receiver quickly scanned from 9KHz to 30MHz and 30MHz to 1GHz The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in clause 2.4 were scanned during the preliminary test:

After the preliminary scan, we found the test mode producing the highest emission level. The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Receiver scanned from 9KHz to 30MHz and 30MHz to 1GHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 200Hz for 9 KHz to 150 KHz measure, 10 KHz for 150 KHz to 30MHz measure and 120 KHz for 30 MHz to 1GHz measure.

4.4. Test Result


PASS. (See below detailed test result)

Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Frequency Range	: 9KHz~30MHz
Test Mode	: TX: 13.56MHz
Test Results	: PASS
Note:	1. The test results are listed in next pages. 2. This mode is worst case mode, so this report only reflected the worst mode. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.


X

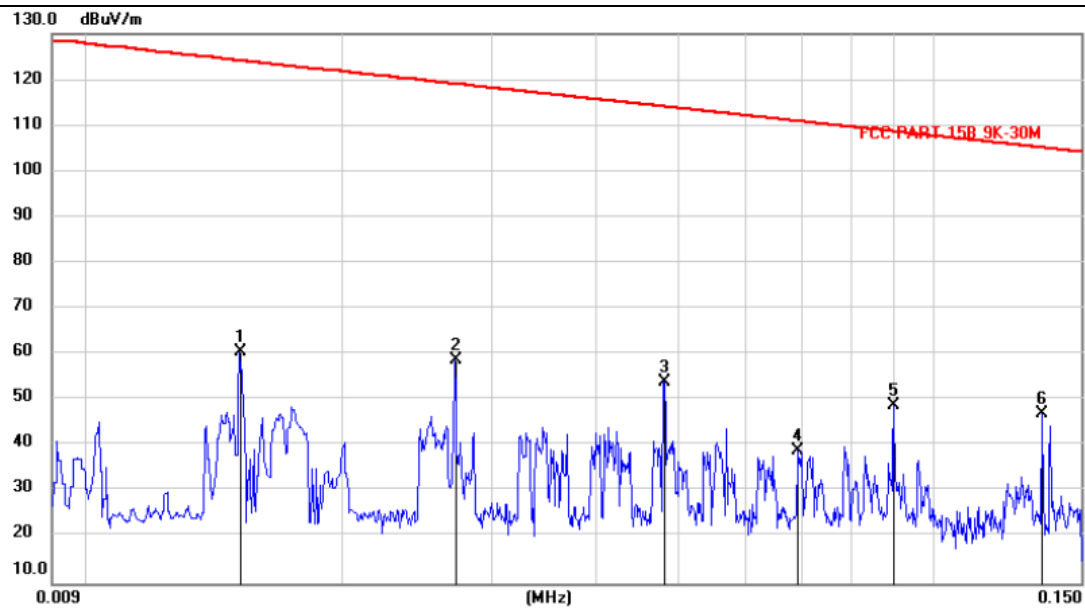

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		0.0151	41.32	19.35	60.67	124.1	-63.46	peak		
2		0.0270	39.32	19.47	58.79	119.0	-60.30	peak		
3		0.0480	34.82	19.22	54.04	114.1	-60.07	peak		
4		0.0692	19.77	19.19	38.96	110.9	-71.99	peak		
5		0.0900	29.74	19.10	48.84	108.6	-59.83	peak		
6	*	0.1350	27.79	19.20	46.99	105.1	-58.17	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

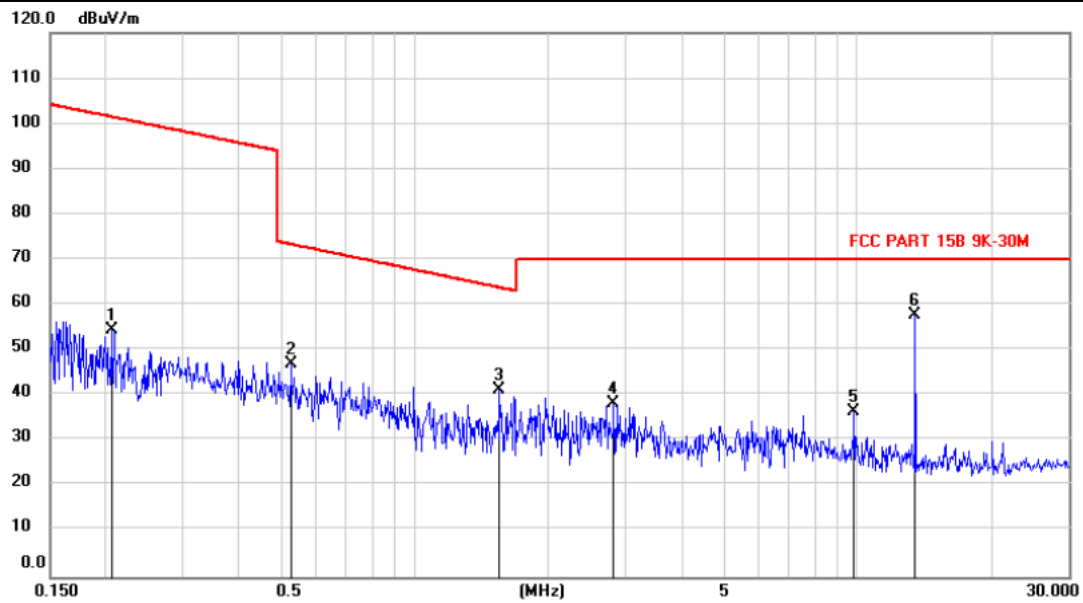


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.2066	35.14	19.19	54.33	101.4	-47.15			peak
2		0.5252	28.03	19.05	47.08	73.39	-26.31			peak
3		1.5584	22.09	19.06	41.15	63.79	-22.64			peak
4		2.8119	19.00	19.26	38.26	70.00	-31.74			peak
5		9.8239	16.60	19.80	36.40	70.00	-33.60			peak
6	*	13.5221	37.89	19.85	57.74	70.00	-12.26			peak

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

From 30MHz to 1GHz: Conclusion: PASS


Vertical:

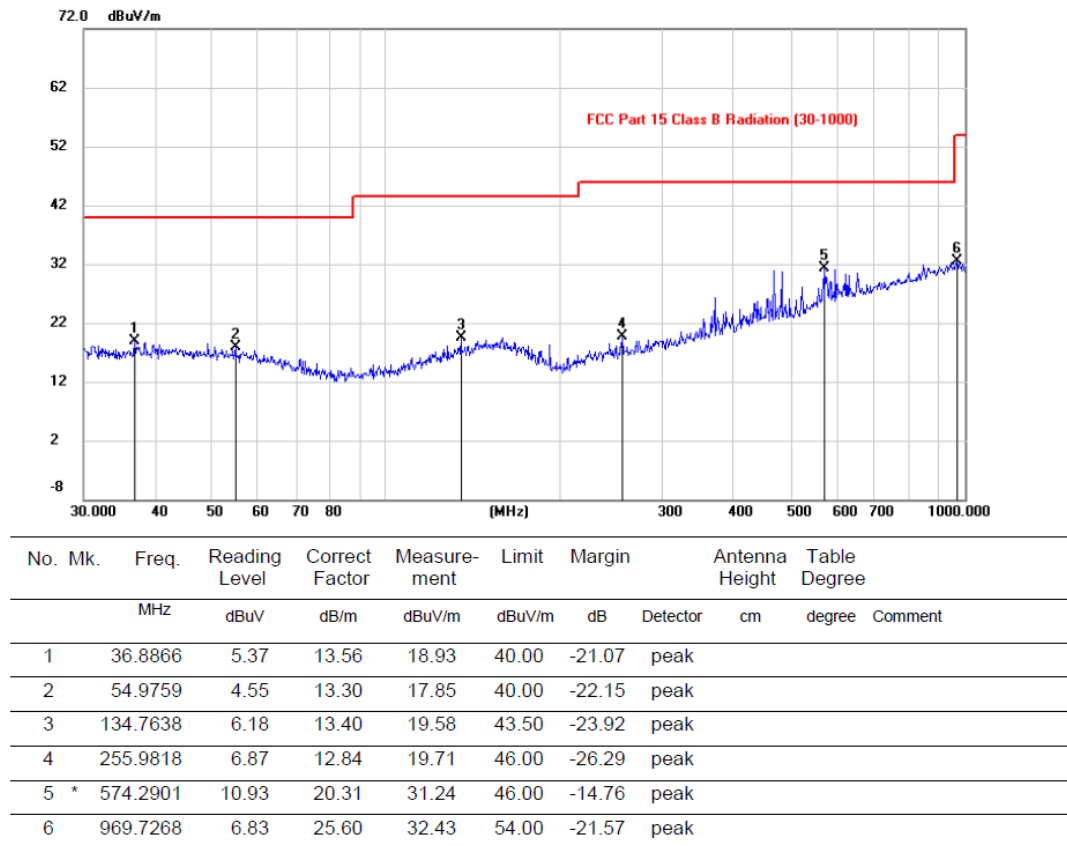

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Horizontal:

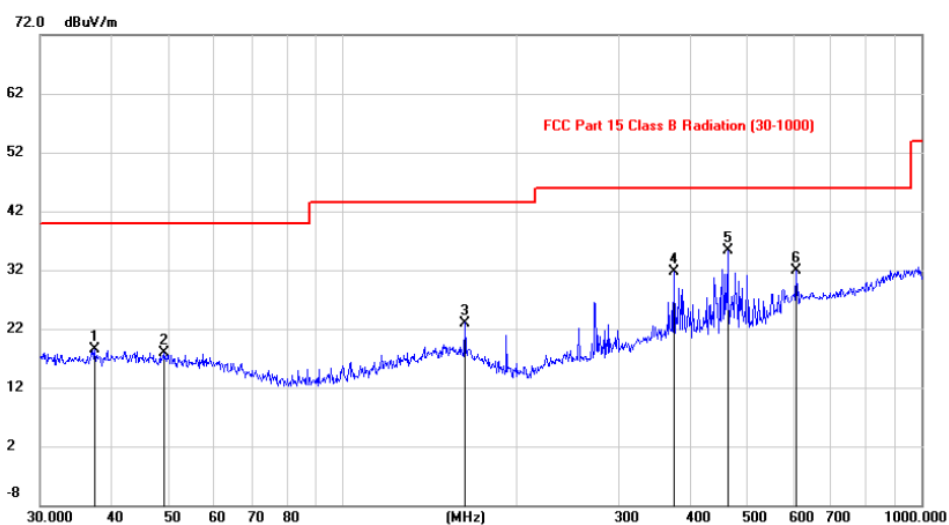

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		37.3813	4.78	13.65	18.43	40.00	-21.57	peak	
2		49.1291	4.38	13.58	17.96	40.00	-22.04	peak	
3		162.7626	8.60	14.40	23.00	43.50	-20.50	peak	
4		373.9662	15.59	16.02	31.61	46.00	-14.39	peak	
5	*	462.9943	17.22	18.16	35.38	46.00	-10.62	peak	
6		608.6398	10.95	20.97	31.92	46.00	-14.08	peak	


Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Field Strength Emissions Result

Temperature	23.6°C	Relative Humidity	53%
Pressure	101.2kPa	Distance	3m
Test Mode	TX		


Horizontal

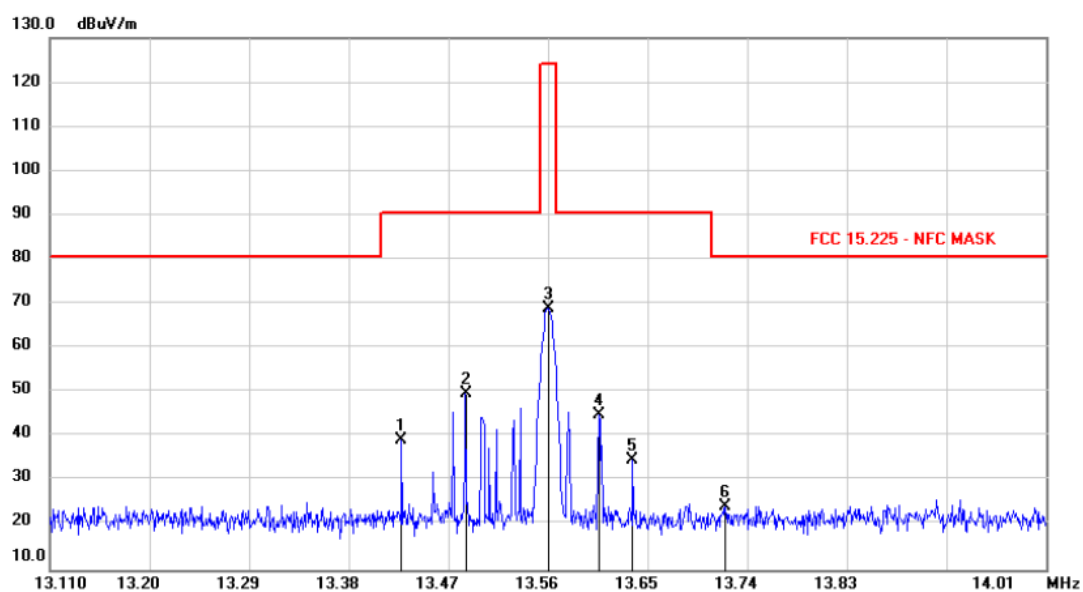

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13.4281	18.75	20.61	39.36	90.50	-51.14	peak		
2	*	13.4856	29.18	20.62	49.80	90.50	-40.70	peak		
3		13.5601	48.44	20.64	69.08	124.0	-54.92	peak		
4		13.6061	24.28	20.65	44.93	90.50	-45.57	peak		
5		13.6365	14.02	20.66	34.68	90.50	-55.82	peak		
6		13.7202	3.66	20.68	24.34	80.50	-56.16	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

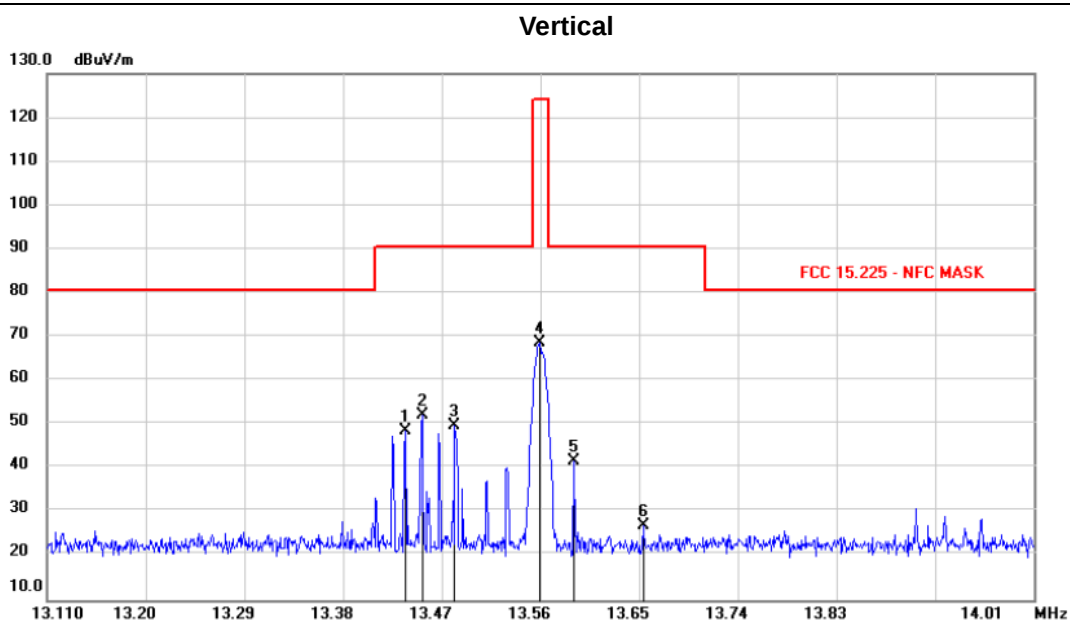

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13.4367	28.03	20.61	48.64	90.50	-41.86	peak		
2	*	13.4524	31.52	20.61	52.13	90.50	-38.37	peak		
3		13.4820	29.20	20.62	49.82	90.50	-40.68	peak		
4		13.5594	47.95	20.64	68.59	124.0	-55.41	peak		
5		13.5908	21.00	20.65	41.65	90.50	-48.85	peak		
6		13.6541	6.23	20.66	26.89	90.50	-63.61	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Note:

1: 30m to 3m correction factor calculation:

$$40 * \log(30\text{m}/3\text{m}) = 40$$

5. Frequency stability

5.1. Test limit


Please refer section 15.225e.

Regulation 15.225(e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.2. Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3. Test Setup



5.4. Test Results


PASS.

Detailed information please see the following page.

Assigned Frequency(MHz): 13.56MHz				
Voltage	Temperature	Measured Frequency (MHz)	Frequency stability	Limit
Low DC 3.33V	+20℃	13.560736	0.000736	±100 ppm ±0.001356MHz
Normal DC 3.7V	-10℃	13.559256	-0.000744	
	-5℃	13.559907	-0.000093	
	0℃	13.560756	0.000756	
	+10℃	13.560493	0.000493	
	+20℃	13.558653	-0.001347	
	+30℃	13.560556	0.000556	
	+40℃	13.559752	-0.000248	
	+50℃	13.560662	0.000662	
	+60℃	13.560283	0.000283	
High DC 4.07	+20℃	13.560286	0.000286	

6. Power Line Conducted Emissions

6.1. Block Diagram of Test Setup

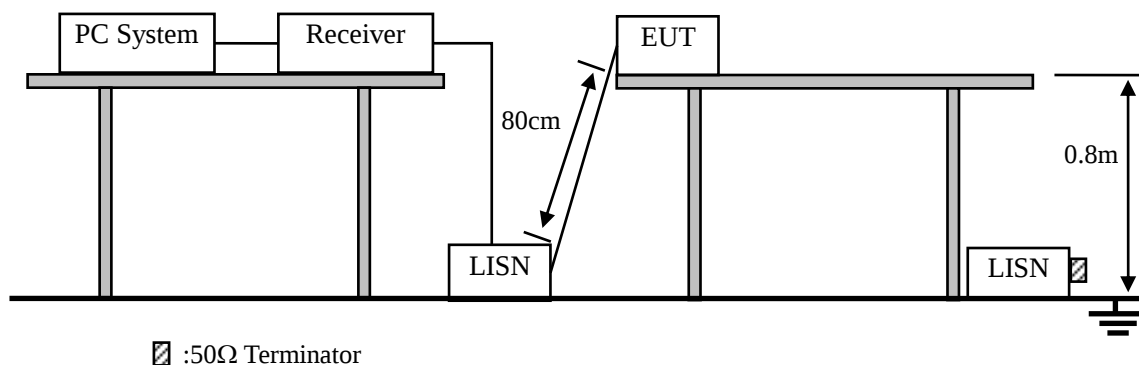

6.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

6.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N1), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C64.10:2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

6.4. Test Result

PASS. (See below detailed test data)


Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

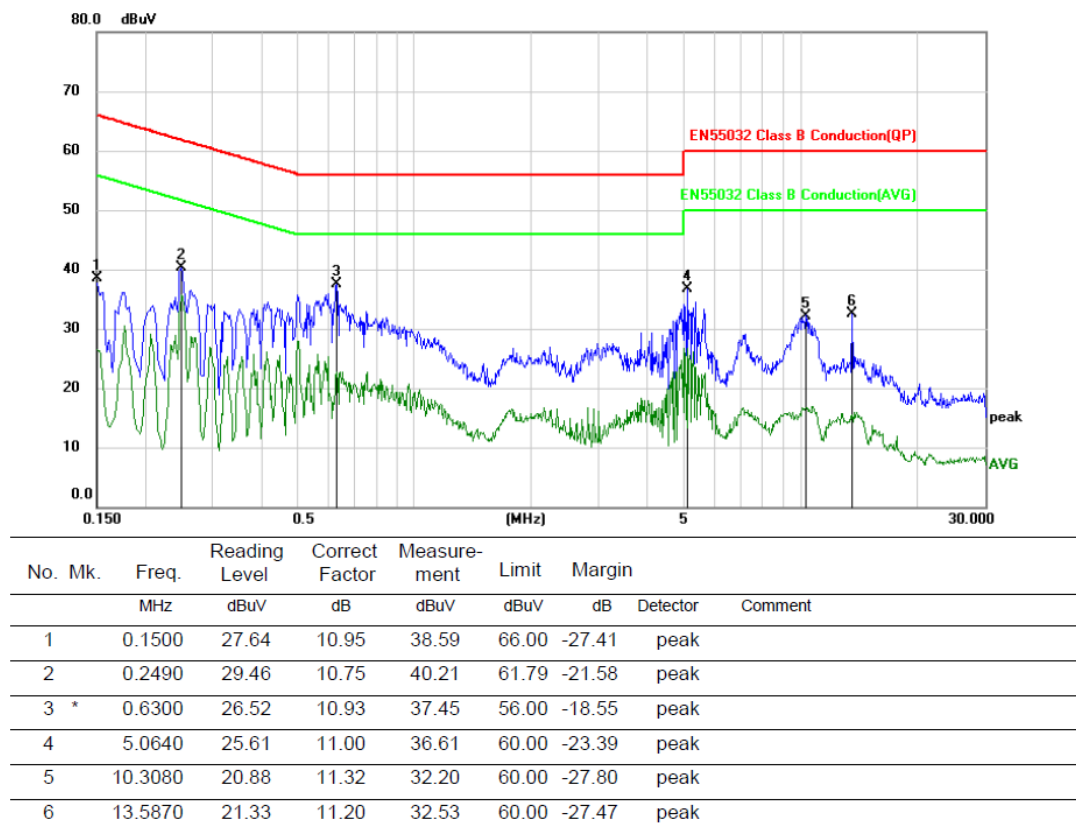

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

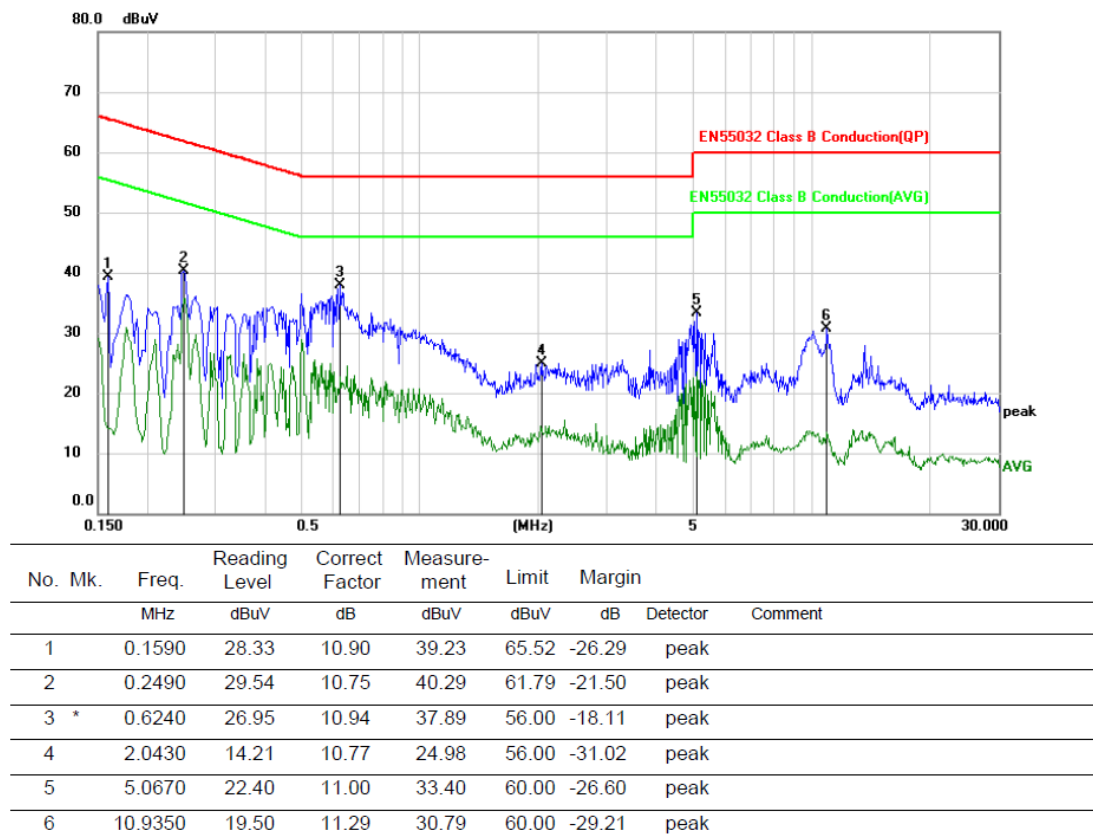Neutral:

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

7. Antenna Requirements

7.1. Limit

For intentional device, according to RSS-Gen Section 6.8 and FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.209, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

7.2. Antenna Connected Construction

The antenna is internal antenna and no consideration of replacement. Please see EUT photo for details.

7.3. Results

The EUT antenna is Internal Antenna. It complies with the standard requirement.

8. Test setup photo

Please refer to the Appendix of Test photos.

9. EUT photos

Please refer to the Appendix of EUT photos.

-----END OF THE REPORT-----