




RADIO TEST REPORT

FCC ID : 2A8MT-AP7PRO
Equipment : Tri-Band WiFi 7 Enterprise Access Point
Brand Name : 
Model Name : AP7-Pro
Applicant : Alta Networks, LLC
192 N. Old Highway 91, Unit 1 Hurricane, Utah,
United States 84737
Manufacturer : Alta Networks, LLC
192 N. Old Highway 91, Unit 1 Hurricane, Utah,
United States 84737
Standard : 47 CFR FCC Part 15.407

The product was received on Dec. 26, 2025, and testing was started from Dec. 30, 2025 and completed on Feb. 26, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

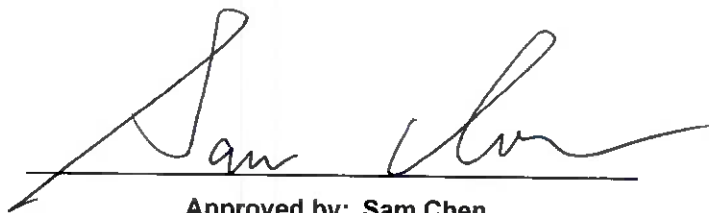

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	12
1.3 Testing Location Information	12
1.4 Measurement Uncertainty	13
2 Test Configuration of EUT.....	14
2.1 Test Channel Mode	14
2.2 The Worst Case Measurement Configuration	16
2.3 EUT Operation during Test	17
2.4 Accessories	18
2.5 Support Equipment.....	18
2.6 Test Setup Diagram	20
3 Transmitter Test Result	25
3.1 AC Power-line Conducted Emissions	25
3.2 Emission Bandwidth	27
3.3 Maximum Output Power	28
3.4 Power Spectral Density	31
3.5 Unwanted Emissions.....	34
4 Test Equipment and Calibration Data	39
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Radiated Emission Co-location	
Appendix G. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Output Power	PASS	-
3.4	15.407(a)	Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen**Report Producer: Wendy Pan**



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80), be (EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]
5470-5725	EHT 240	5610	122 [1]



Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz 5.25-5.35GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	4TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	4TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	4TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	4TX
	802.11 ac VHT80, 802.11 ax HEW80, 802.11 be EHT80	80	4TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	4TX
5.15-5.35GHz	802.11 ac VHT160, 802.11 ax HEW160, 802.11 be EHT160	160	4TX
	802.11 ac VHT160-BF, 802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	4TX



Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	4TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	4TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	4TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	4TX
	802.11 ac VHT80, 802.11 ax HEW80, 802.11 be EHT80	80	4TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	4TX
	802.11 ac VHT160, 802.11 ax HEW160, 802.11 be EHT160	160	4TX
	802.11 ac VHT160-BF, 802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	4TX
	EHT240	240	4TX
	EHT240-BF	240	4TX

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	4TX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	4TX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	4TX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	4TX
	802.11 ac VHT80, 802.11 ax HEW80, 802.11 be EHT80	80	4TX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	4TX

Note:

- ♦ 11a, HT20, HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80, VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80, HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80, EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Antenna Information**

Ant.	Port				Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth					
1	2	1	-	-	AOT	ANT-M2458-CBT04	METAL PIFA	I-PEX	Note 1
2	1	2	-	-	AOT	ANT-M2458-CBT02	METAL PIFA	I-PEX	
3	-	3	-	-	AOT	ANT-M5158-CBT05	METAL PIFA	I-PEX	
4	-	4	-	1	AOT	ANT-M2458-CBT03	METAL PIFA	I-PEX	
5	-	-	1	-	AOT	ANT-M5172-CBT06	METAL PIFA	I-PEX	
6	-	-	2	-	AOT	ANT-M5172-CBT07	METAL PIFA	I-PEX	

Note 1:

Ant.	Antenna Gain (dBi)									
	WLAN 2.4GHz	WLAN 5GHz				WLAN 6GHz				Bluetooth
		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8	
1	3.20	3.48	3.77	3.72	3.38	-	-	-	-	-
2	4.00	5.09	4.99	4.83	3.60	-	-	-	-	-
3	-	3.36	3.37	4.71	4.49	-	-	-	-	-
4	-	3.82	3.59	4.42	3.20	-	-	-	-	3.5
5	-	-	-	-	-	4.50	4.50	4.30	4.10	-
6	-	-	-	-	-	4.30	4.50	4.50	4.50	-

Item	Directional Gain (dBi)			
	WLAN 5GHz			
	UNII 1	UNII 2A	UNII 2C	UNII 3
4T1S	6.75	6.90	6.96	6.24

Note 2: The above information was declared by the manufacturer, with the exception of the WLAN 5GHz antenna gain and directional gain.

Note 3: WLAN 5GHz Maximum Directional Gain following KDB662911 D03.

Note 4: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left(\sum_{k=1}^{N_{ant}} g_{j,k} \right)^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left(\sum_{k=1}^{N_{ant}} g_{j,k} \right)^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left(\sum_{k=1}^{N_{ant}} g_{j,k} \right)^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ant}} \left(\sum_{k=1}^{N_{ant}} g_{j,k} \right)^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,2) = 10^{G3/20} ; NSS1(g1,2) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where ;

$$2.4G \ G1 = 4 \text{ dBi} ; G2 = 3.2 \text{ dBi} ; DG = 6.62 \text{ dBi}$$

<For 2.4GHz function>

For IEEE 802.11b/g/n/VHT/ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For 5GHz function>

For IEEE 802.11a/n/ac/ax/be (4TX/4RX):

Port 1 ~ Port 4 can be used as transmitting/receiving antenna.

Port 1 ~ Port 4 could transmit/receive simultaneously.

<For 6GHz function>

For IEEE 802.11ax/be (2TX/2RX):

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

<For Bluetooth function> (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

Port 1 could transmit/receive simultaneously.

**1.1.3 Mode Test Duty Cycle**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.99	0.04	7.963m	10Hz (DC>=0.98)
802.11be EHT20-BF_Nss 1,(M0)	0.973	0.12	5.128m	200
802.11be EHT40-BF_Nss 1,(M0)	0.969	0.14	5.308m	200
802.11be EHT80-BF_Nss 1,(M0)	0.979	0.09	5.331m	200
802.11be EHT160-BF_Nss 1,(M0)	0.96	0.18	5.376m	200
EHT240-BF_Nss 1,(M0)	0.932	0.31	1.985m	1k

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

1.1.4 EUT Operational Condition

EUT Power Type	From PoE		
Beamforming Function	☒	With beamforming	☐ Without beamforming
	The product has beamforming function for 11n/VHT/ax/be in 2.4GHz, n/ac/ax/be in 5GHz and ax/be in 6GHz.		
Weather Band	☒	With 5600~5650MHz	☐ Without 5600~5650MHz
Function	☐	Outdoor P2M	☒ Indoor P2M
	☐	Fixed P2P	☐ Client
	☒	Point-to-multipoint	☐ Point-to-point
TPC Function	☒	With TPC	☐ Without TPC
Channel Puncturing Function	☐	Supported Static Puncturing	
	☐	Supported Dynamic Puncturing (Reduce BW)	
	☒	Unsupported	
Support RU	☒	Full RU	☐ Partial RU
Test Software Version	QRCT 4.0.00185.1, DOS [ver 6.1.7601]		

Note: The above information was declared by manufacturer.

1.1.5 Table for EUT Support Function

Function	Support
AP	WLAN 2.4GHz, 5GHz UNII 1~3, 6GHz UNII 5~8 and Bluetooth
Mesh	WLAN 5GHz UNII 1~3 and 6GHz UNII 5~8

Note 1: Form above table list, only AP mode was tested and recorded in this test.

Note 2: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D03 v01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH01-CB	Serway Lee	19.8~20.3 / 62~67	Jan. 19, 2026~ Feb. 03, 2026
Radiated <1GHz	10CH01-CB	Richard Pai	23~24 / 56~57	Jan. 16, 2026
Radiated >1GHz	03CH01-CB	Paul Hu	21.3~22.3 / 58~61	Jan. 09, 2026~ Feb. 07, 2026
	03CH06-CB		21.4~22.6 / 57~61	
Radiated Co-Location	03CH04-CB	Lan Hu	21.4~22.6 / 57~61	Feb. 26, 2026
AC Conduction	CO01-CB	Scott Tseng	22~23 / 53~54	Dec. 30, 2025



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.9 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Mode
802.11a_Nss1,(6Mbps)_4TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
5180MHz
5200MHz
5240MHz
5260MHz
5300MHz
5320MHz
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
5190MHz
5230MHz
5270MHz
5310MHz
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11be EHT80-BF_Nss1,(MCS0)_4TX



5210MHz
5290MHz
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz
802.11be EHT160-BF_Nss1,(MCS0)_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
5570MHz
EHT240,BF_240MHz_Nss1,(MCS0)_4TX
5610MHz Straddle 5.47-5.725GHz
5610MHz Straddle 5.725-5.85GHz

Note:

- ♦ EHT20 / EHT40 / EHT80 / EHT160 covers HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ The EUT supports non-beamforming and beamforming modes. After evaluating, the beamforming mode was selected to test.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT + PoE

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Output Power Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link After evaluating, the worst case was found at Z axis. So the measurement will follow this same test configuration.
1	EUT in Z axis + PoE
Operating Mode > 1GHz	CTX After evaluating, the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	After evaluating, the worst case was found at Y axis. So the measurement will follow this same test configuration.
1	EUT in Y axis WLAN 2.4GHz+ WLAN 5GHz
2	EUT in Y axis Bluetooth + WLAN 5GHz
For operating mode 1 is the worst case and it was record in this test report.	
Refer to Appendix F for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	WLAN 2.4GHz + WLAN 5GHz + WLAN 6GHz + Bluetooth
Refer to Sporton Test Report No.: FA5D3013 for Co-location RF Exposure Evaluation.	

Note: The PoE below are for measurement only, would not be marketed.

The PoE information as below:

Support Unit	Brand	Model Name
PoE	Delta	ADH-65AR P

2.3 EUT Operation during Test

For CTX Mode:

non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

beamforming mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS [ver 6.1.7601].
3. Executed "Lantest.exe" to link with the remote workstation to transmit and receive packet by Device and transmit duty cycle no less than 98%.

For Normal Link Mode:

During the test, the EUT operation to normal function.



2.4 Accessories

Wall-mounted*1

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Delta	ADH-65AR P	N/A
B	PoE PC	ASUS	S300TA	TX2-RTL8821CE
C	5G NB	Lenovo	X260	N/A
D	2.4G NB	Lenovo	X260	N/A
E	6G Device	INTEL	BE200	PD9BE200NG
F	6G NB	DELL	E7240	N/A
G	Smart phone	Redmi	M1810F6LH	2AFZZ-RMSF6LG

For Radiated (above 1GHz other tests):

Non-beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Delta	ADH-65AR P	N/A
B	Notebook	DELL	E4300	N/A

Beamforming mode:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE	Delta	ADH-65AR P	N/A
B	NB	DELL	E4300	N/A
C	Client	ALTA LABS	AP7-Pro	2A8MT-AP7PRO
D	NB	DELL	E4300	N/A

For Radiated (above 1GHz co-location):

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	10G PC	Genuine	H7916	N/A
B	PoE	Delta	ADH-65AR P	N/A
C	2.4G NB	DELL	E4300	N/A
D	5G NB	DELL	E4300	N/A


**For RF Conducted:****Non-beamforming mode:**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
C	PoE	Delta	ADH-65AR P	N/A

Beamforming mode:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	Client	ALTA LABS	AP7-Pro	2A8MT-AP7PRO
C	PoE	Delta	ADH-65AR P	N/A
D	NB	DELL	E4300	N/A


2.6 Test Setup Diagram

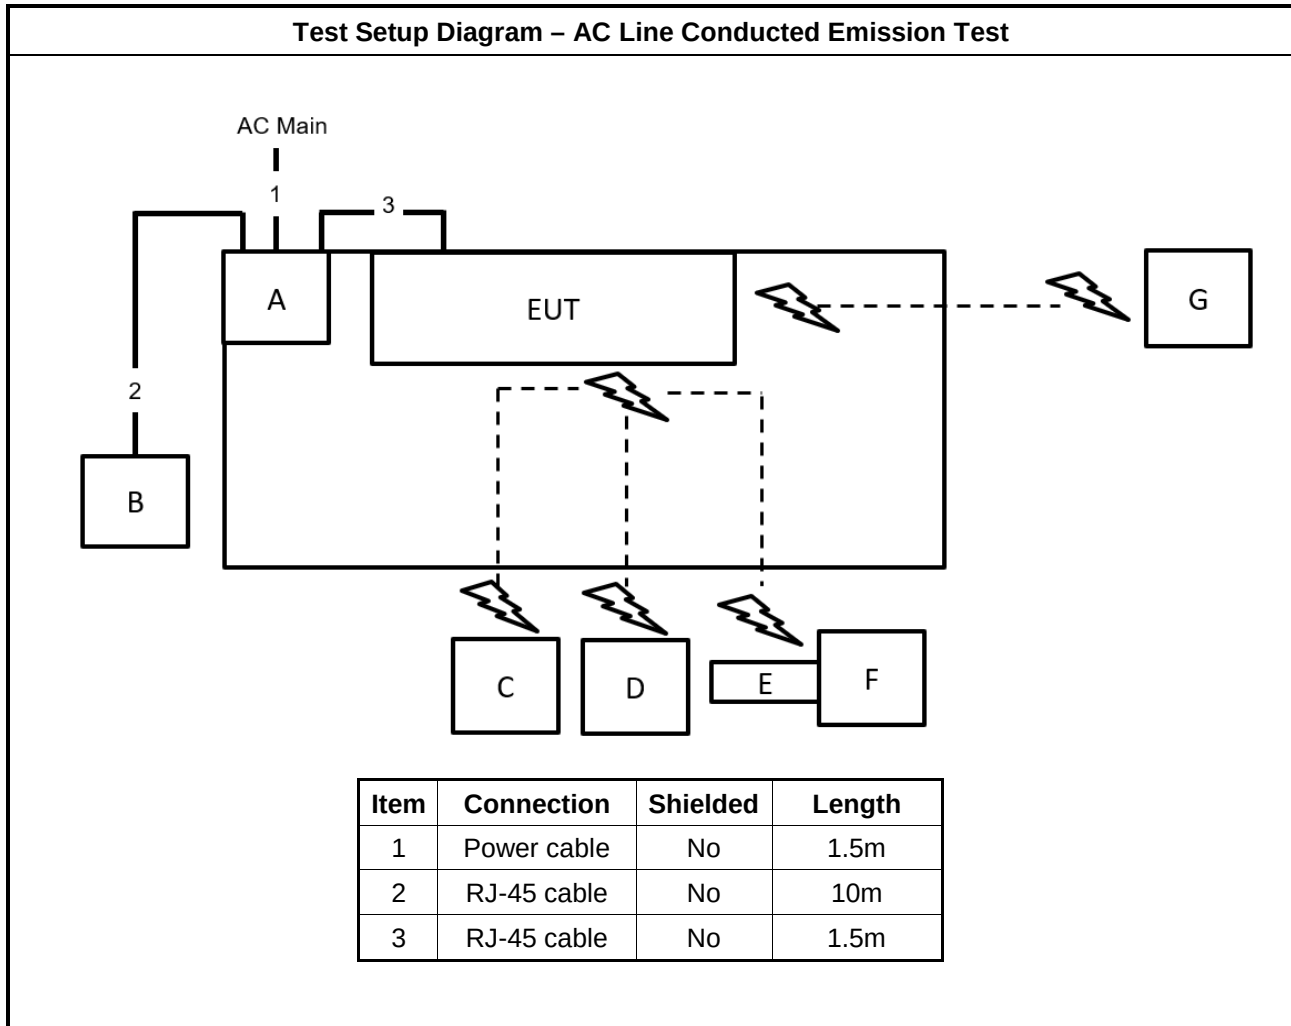

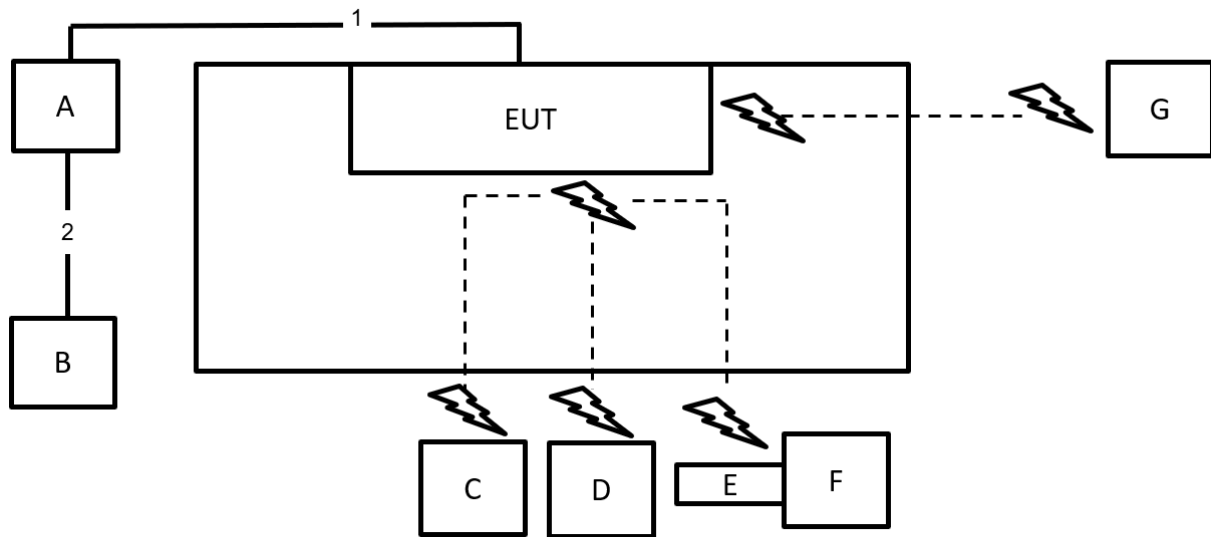
Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	3m

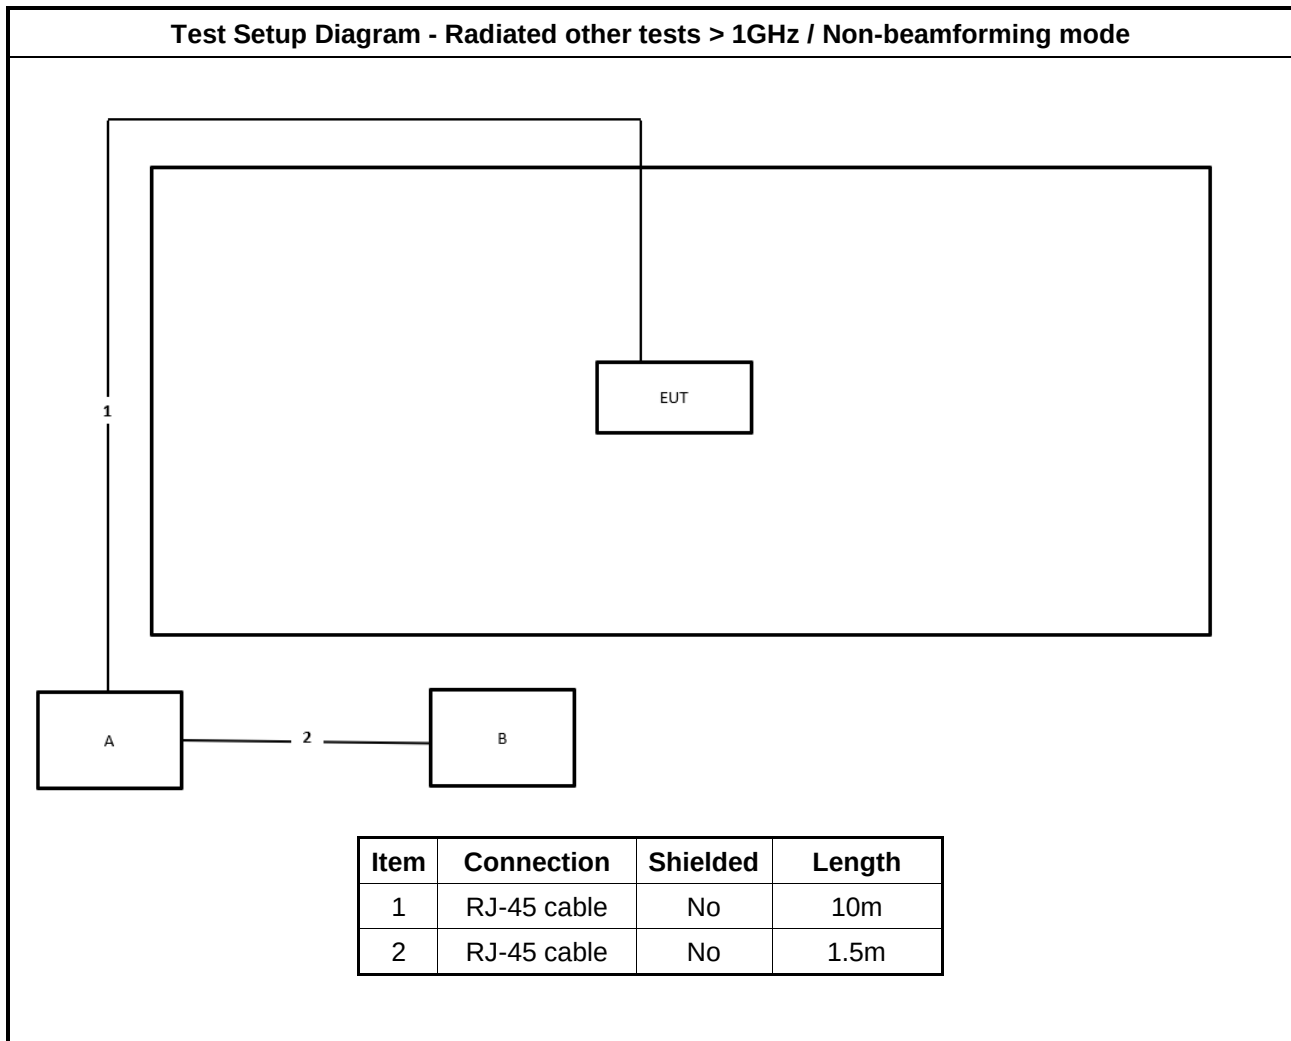Test Setup Diagram - Radiated other tests > 1GHz / Non-beamforming mode

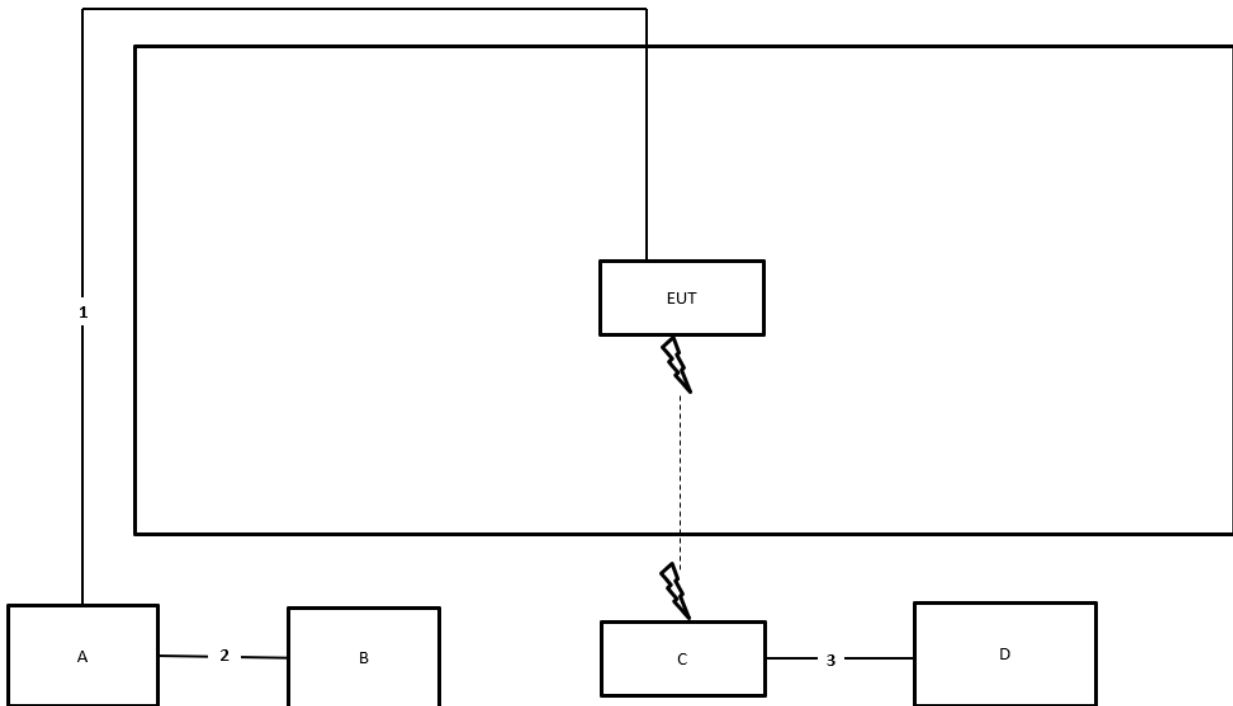
Test Setup Diagram - Radiated other tests > 1GHz / Beamforming mode


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	1.5m

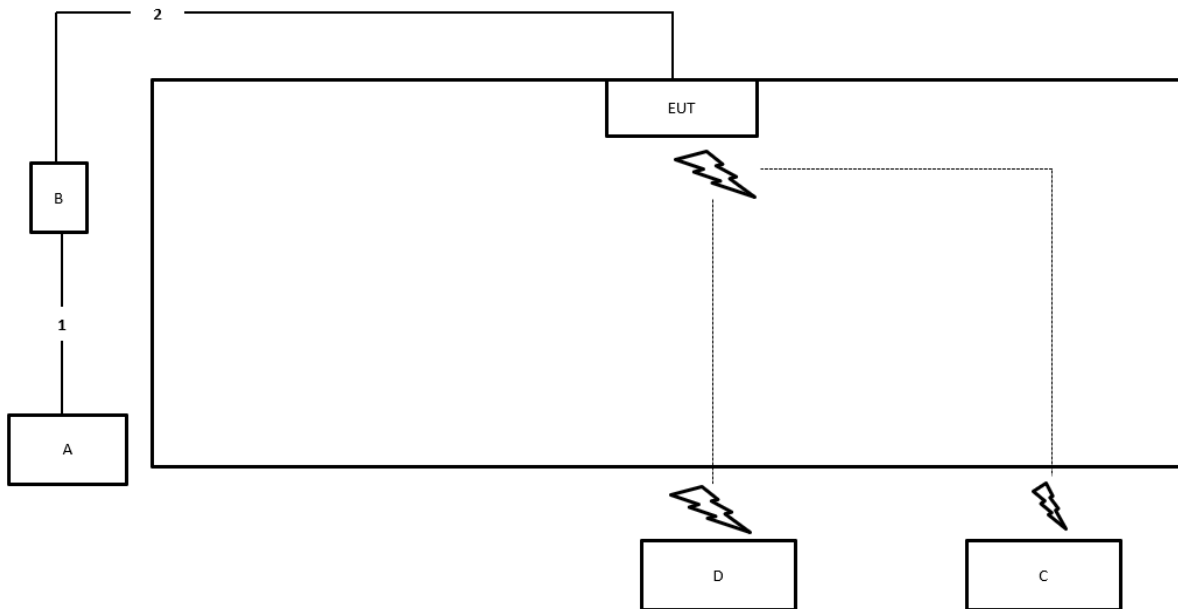Test Setup Diagram - Radiated Co-Location Test


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1.5m
2	RJ-45 cable	No	10m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

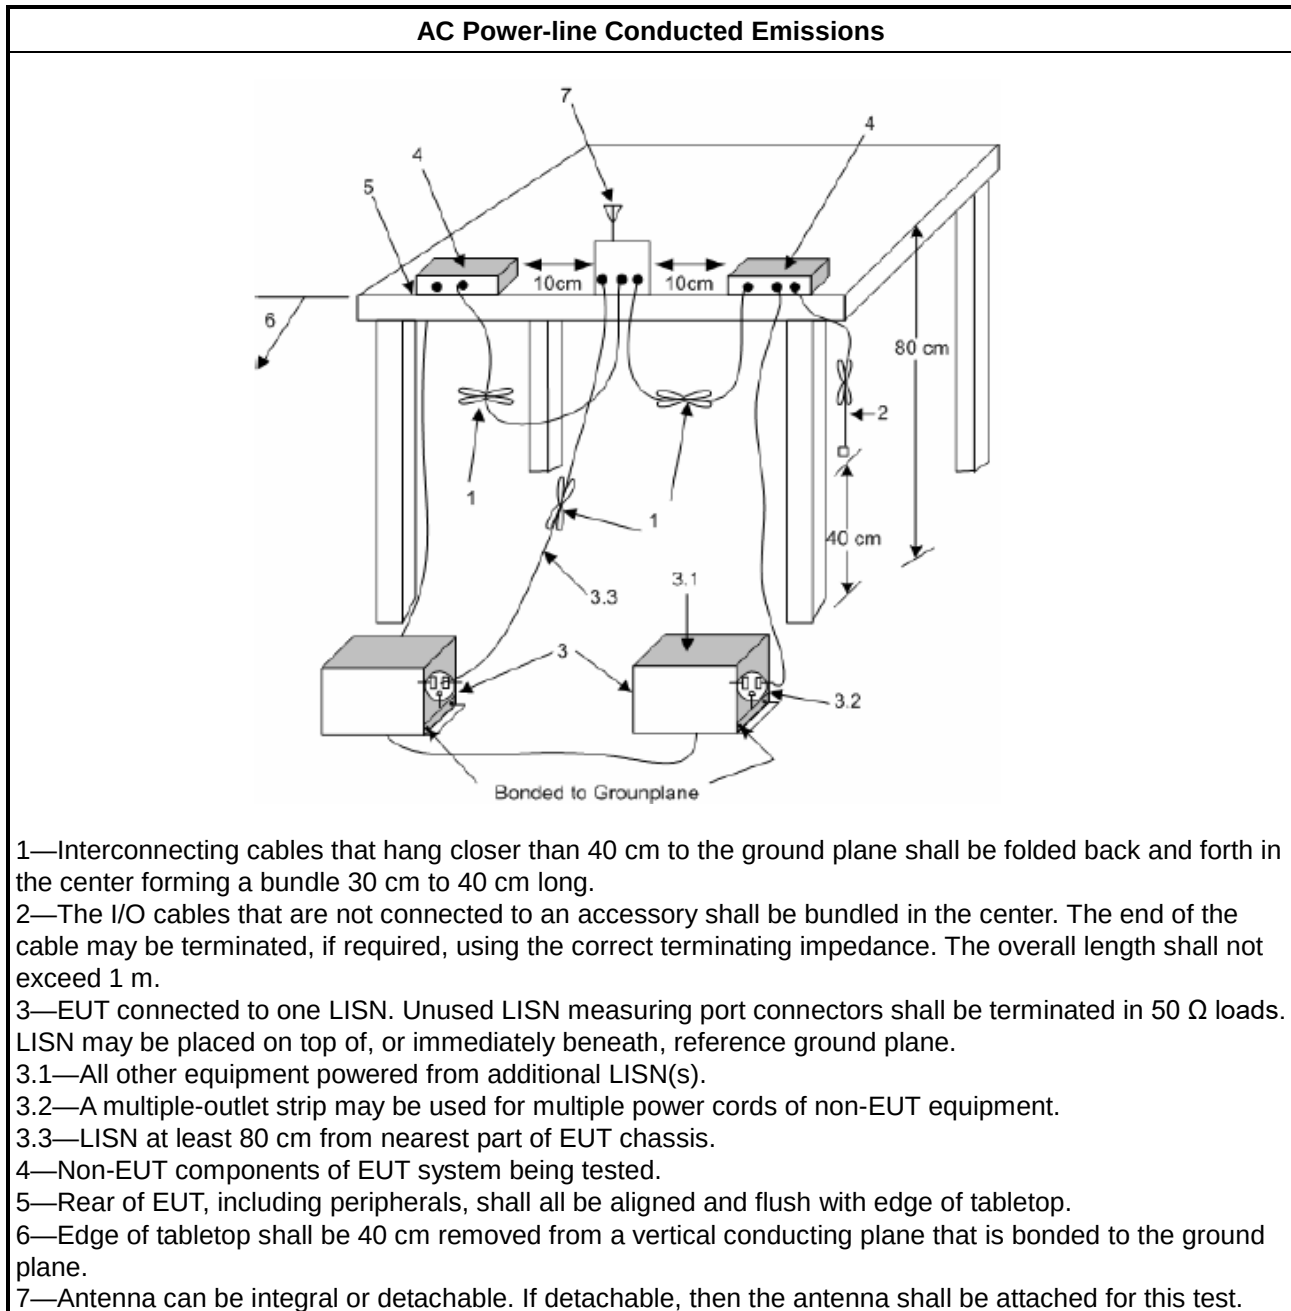

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth $\geq 500\text{kHz}$.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq 500\text{kHz}$.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

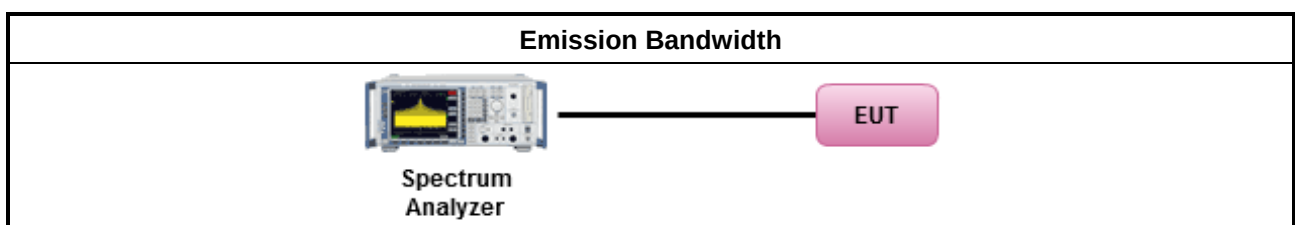

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Output Power

3.3.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	▪ Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] ▪ Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ ▪ Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. ▪ Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. ▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band:	
	▪ For other devices: The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. ▪ Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.25-5.35 GHz band:	
	▪ For other devices: The maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz ▪ Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. ▪ Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
☐ For the 5.47-5.725 GHz band:	



☐	- The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10 B$, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
☐	For the 5.725-5.85 GHz band:
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
Maximum Output Power	
☐	Average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
☐	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

For straddle channel

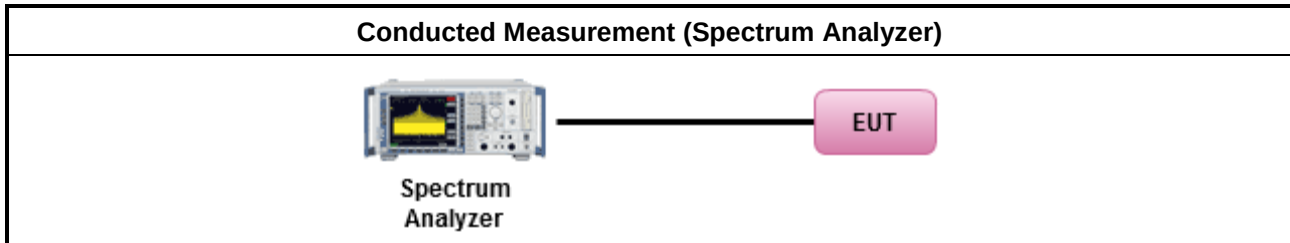

For Other tests

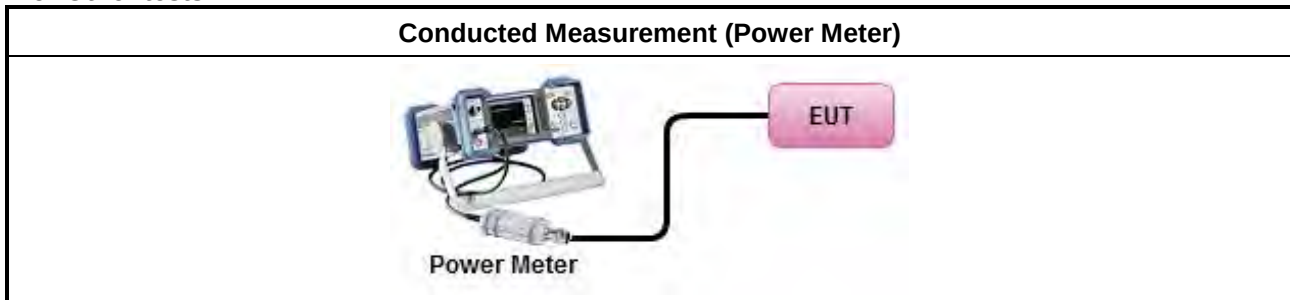

3.3.5 Test Result of Maximum Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	- Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. - Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 (θ-8) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 (θ-40) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐ For the 5.725-5.85 GHz band:	
	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle ≥ 98% or external video / power trigger]
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed) duty cycle < 98% and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐ For radiated measurement.	
- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	

Test Method	
	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

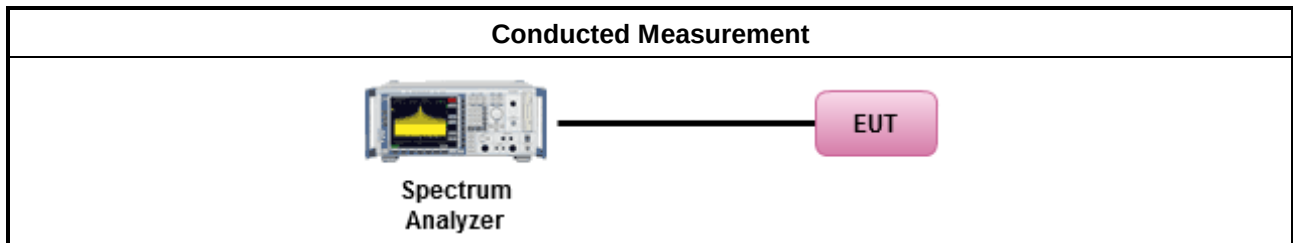

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).




3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.


3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

3.5.4 Test Setup

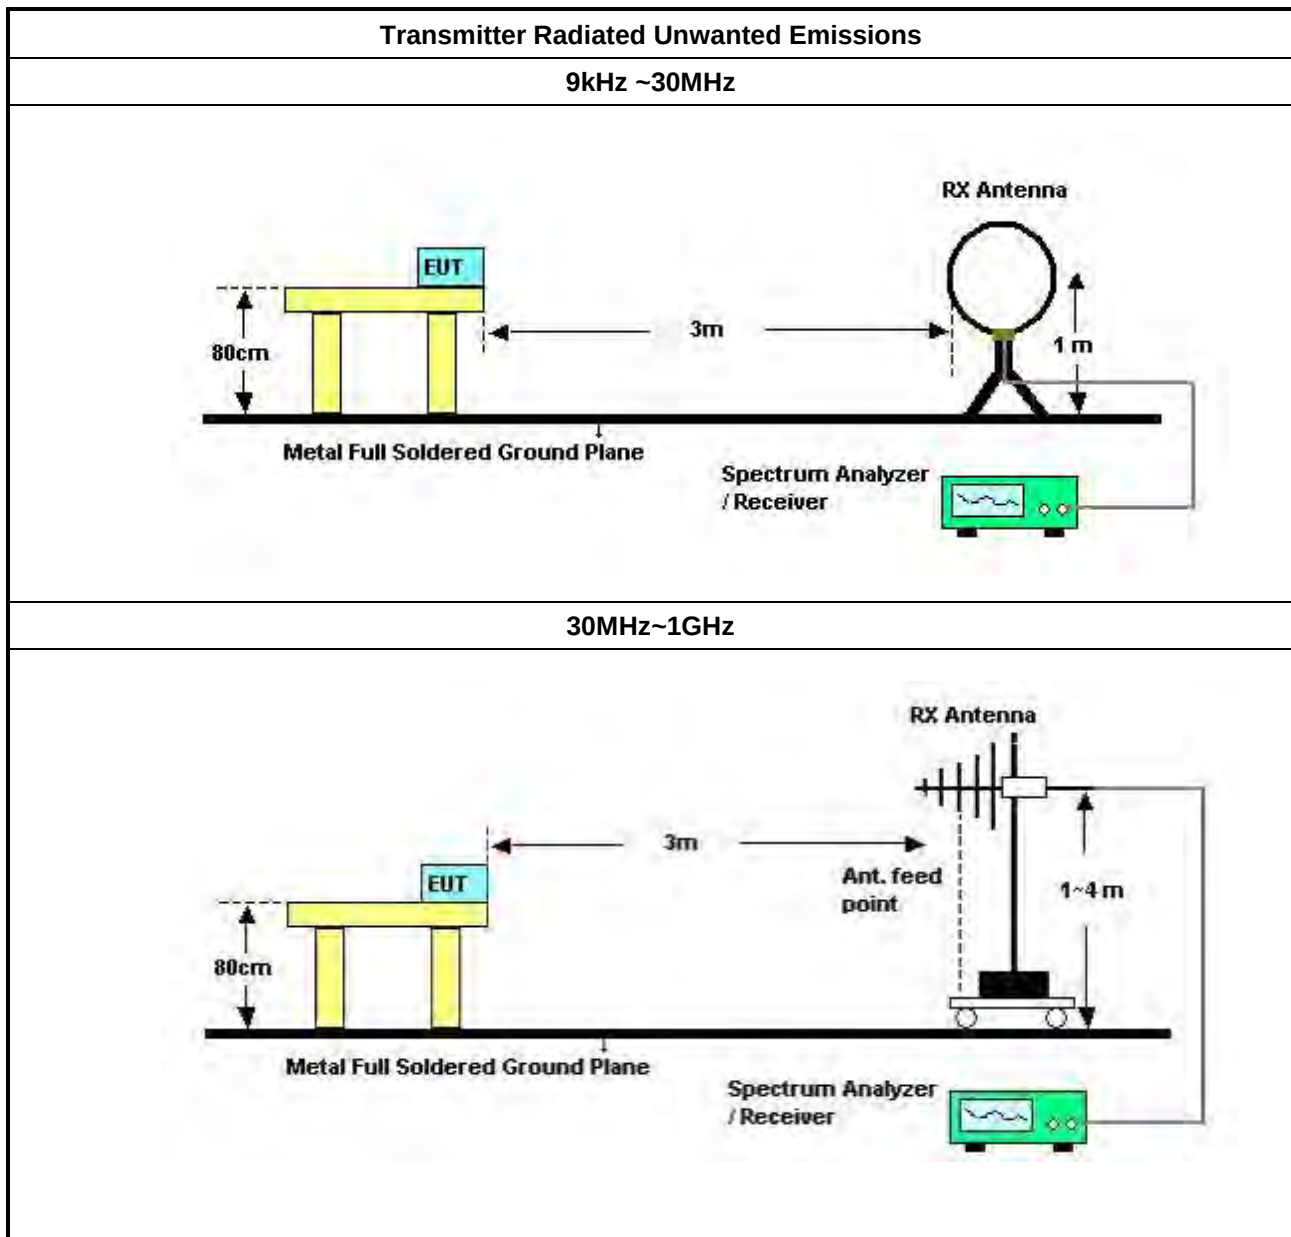

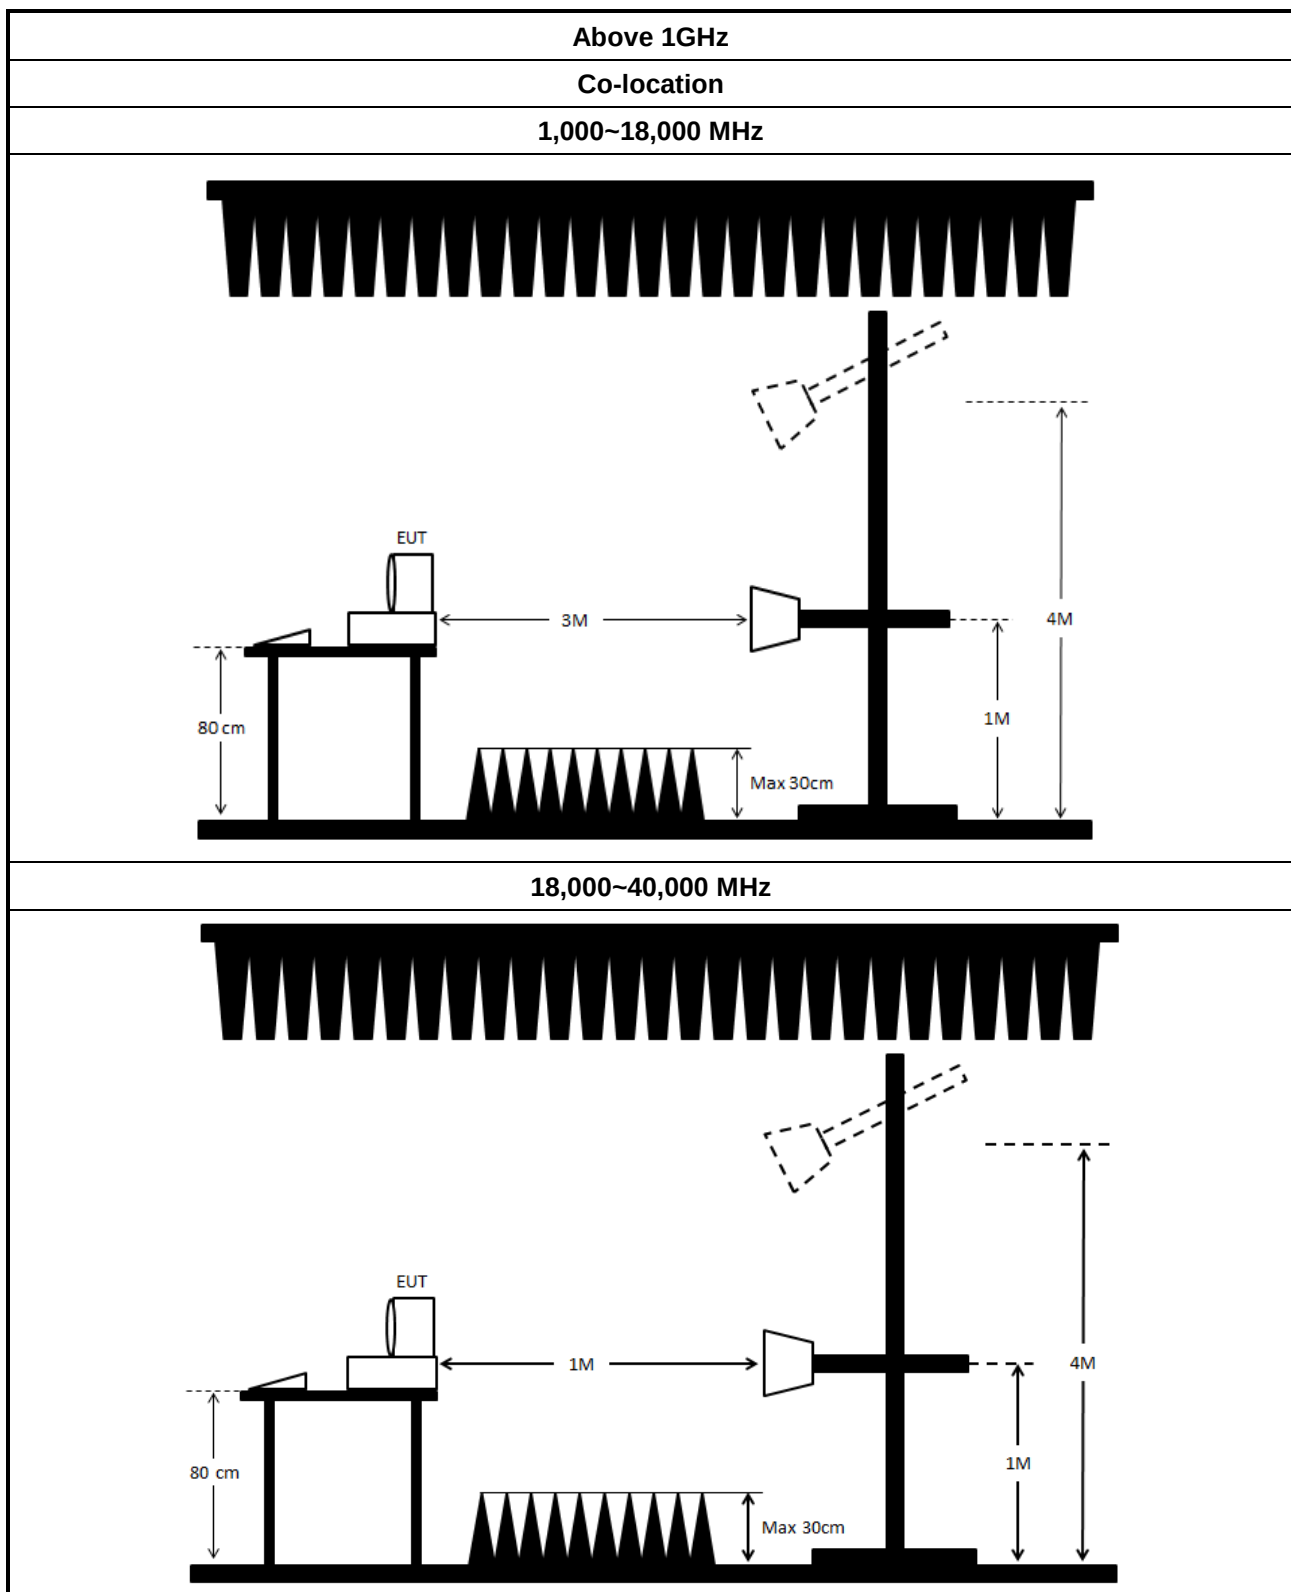

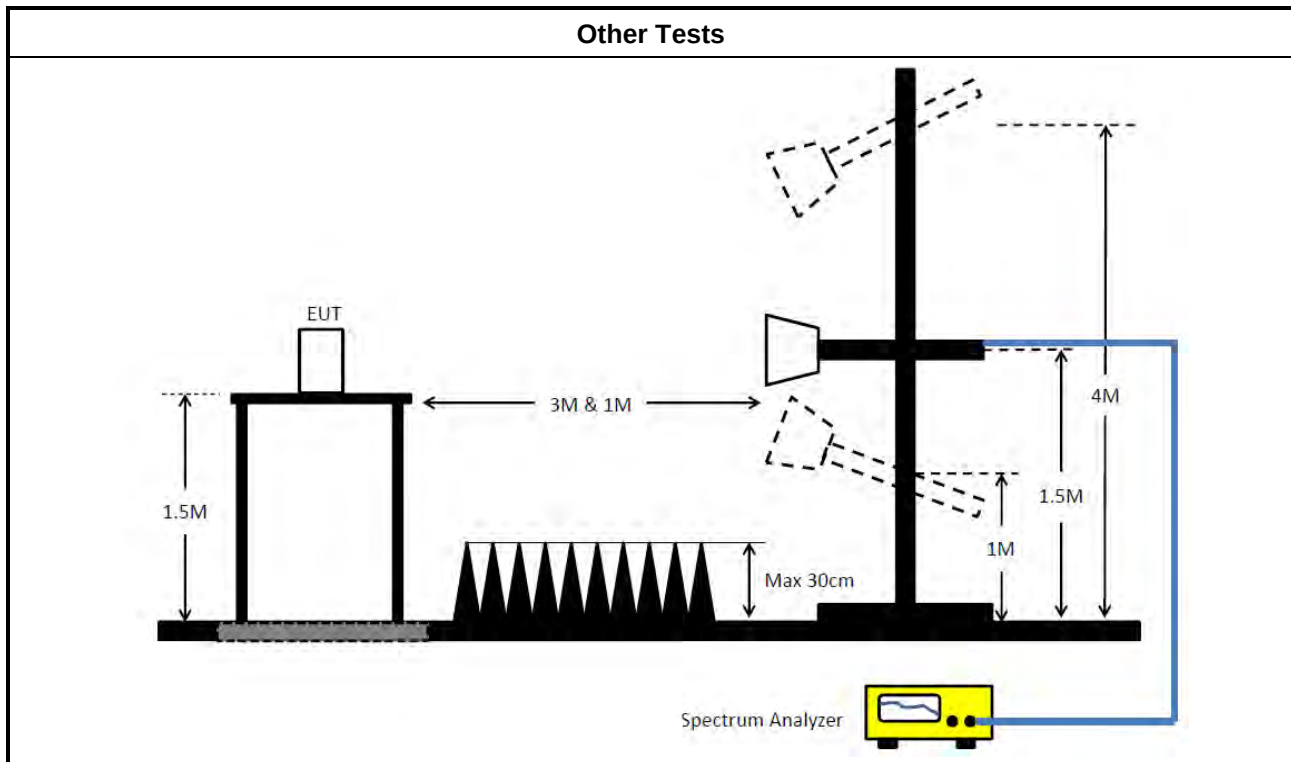

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	May 10, 2025	May 09, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 14, 2026	Jan. 13, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 08, 2025	Mar. 07, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESR7	103076	9 kHz ~ 7GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (10CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Radiation (10CH01-CB)
High Cable	TITAN	T318E	High cable01	30MHz ~ 18GHz	Feb. 04, 2025	Feb. 03, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCI	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 08, 2026	Jan. 07, 2027	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2025	Dec. 11, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH5265	20240911-1	1~ 26.5GHz	Sep. 18, 2025	Sep. 17, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH04-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120D-01816	1GHz~18GHz	Dec. 31, 2025	Dec. 30, 2026	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 16, 2025	Jan. 15, 2026	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 13, 2026	Jan. 12, 2027	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 24, 2025	Mar. 23, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2025	May 26, 2026	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1~18 GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Jul. 04, 2025	Jul. 03, 2026	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	MY45100745	50MHz~18GHz	Jul. 04, 2025	Jul. 03, 2026	Conducted (TH01-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115G Hz	N.C.R.	N.C.R.	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	154.5k	48.33	65.75	-17.42	Neutral

Mode 1

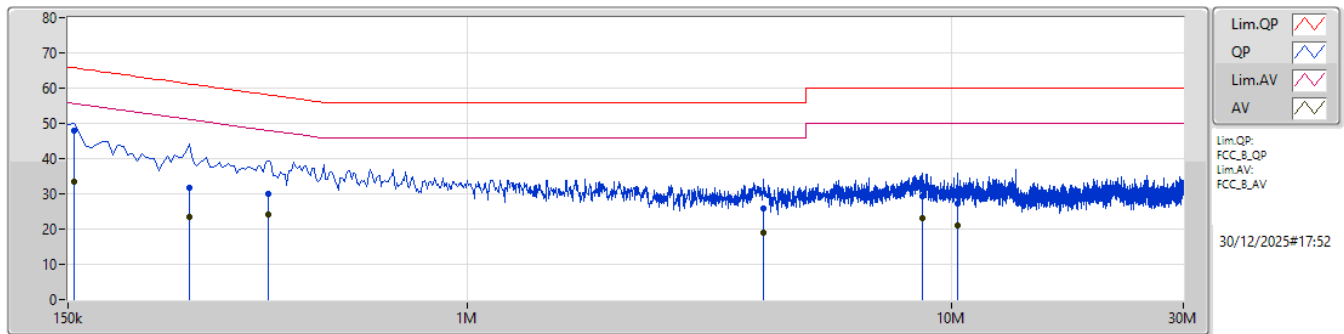

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)				
QP	154.5k	47.95	65.75	-17.80	10.00	Line	"Worst"	37.95	0.05	0.09	-	9.86				
AV	154.5k	33.43	55.75	-22.32	10.00	Line	-	23.43	0.05	0.09	-	9.86				
QP	267k	31.80	61.20	-29.40	9.97	Line	-	21.83	0.06	0.09	-	9.82				
AV	267k	23.45	51.20	-27.75	9.97	Line	-	13.48	0.06	0.09	-	9.82				
QP	388.5k	29.93	58.10	-28.17	10.06	Line	-	19.87	0.05	0.12	-	9.89				
AV	388.5k	24.25	48.10	-23.85	10.06	Line	-	14.19	0.05	0.12	-	9.89				
QP	4.083M	25.73	56.00	-30.27	10.04	Line	-	15.69	0.13	0.14	-	9.77				
AV	4.083M	19.01	46.00	-26.99	10.04	Line	-	8.97	0.13	0.14	-	9.77				
QP	8.7M	29.43	60.00	-30.57	10.52	Line	-	18.91	0.21	0.25	-	10.06				
AV	8.7M	22.95	50.00	-27.05	10.52	Line	-	12.43	0.21	0.25	-	10.06				
QP	10.271M	27.38	60.00	-32.62	10.64	Line	-	16.74	0.23	0.28	-	10.13				
AV	10.271M	21.02	50.00	-28.98	10.64	Line	-	10.38	0.23	0.28	-	10.13				

Mode 1

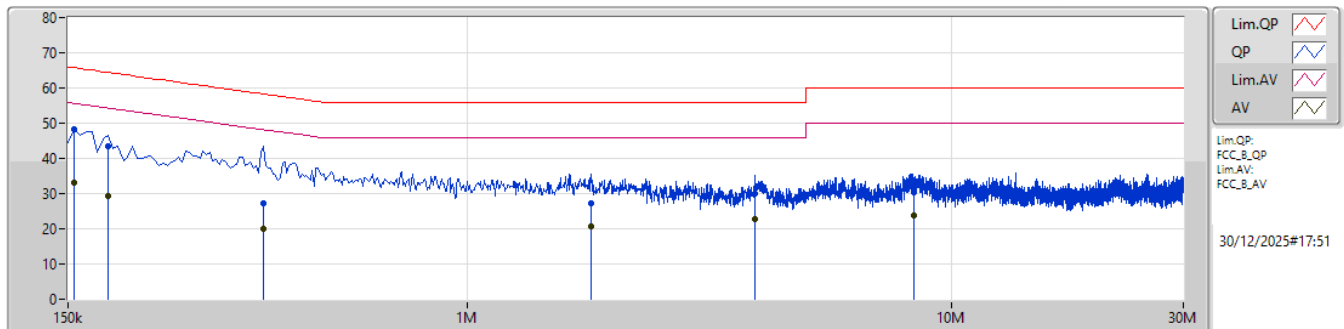

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	PA (dB)	AT (dB)				
QP	154.5k	48.33	65.75	-17.42	10.03	Neutral	"Worst"	38.30	0.08	0.09	-	9.86				
AV	154.5k	32.98	55.75	-22.77	10.03	Neutral	-	22.95	0.08	0.09	-	9.86				
QP	181.5k	43.50	64.41	-20.91	9.95	Neutral	-	33.55	0.08	0.07	-	9.80				
AV	181.5k	29.23	54.41	-25.18	9.95	Neutral	-	19.28	0.08	0.07	-	9.80				
QP	379.5k	27.35	58.29	-30.94	10.09	Neutral	-	17.26	0.08	0.12	-	9.89				
AV	379.5k	19.90	48.29	-28.39	10.09	Neutral	-	9.81	0.08	0.12	-	9.89				
QP	1.797M	27.37	56.00	-28.63	10.01	Neutral	-	17.36	0.11	0.14	-	9.76				
AV	1.797M	20.63	46.00	-25.37	10.01	Neutral	-	10.62	0.11	0.14	-	9.76				
QP	3.93M	29.83	56.00	-26.17	10.06	Neutral	-	19.77	0.16	0.14	-	9.76				
AV	3.93M	22.84	46.00	-23.16	10.06	Neutral	-	12.78	0.16	0.14	-	9.76				
QP	8.318M	30.29	60.00	-29.71	10.52	Neutral	-	19.77	0.24	0.24	-	10.04				
AV	8.318M	23.89	50.00	-26.11	10.52	Neutral	-	13.37	0.24	0.24	-	10.04				

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	22.385M	16.78M	16M8D1D	21.89M	16.716M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.77M	19.104M	19M1D1D	21.615M	19.027M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	44.44M	38.119M	38M1D1D	42.57M	37.972M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	87.78M	77.864M	77M9D1D	84.7M	77.592M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	84.24M	77.983M	78M0D1D	80.88M	77.347M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	22.33M	16.813M	16M8D1D	21.725M	16.728M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.77M	19.093M	19M1D1D	21.67M	19.044M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	44.33M	38.11M	38M1D1D	42.24M	38.041M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	87.12M	77.846M	77M8D1D	84.04M	77.625M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	85.12M	77.716M	77M7D1D	83.84M	77.608M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	22.715M	16.793M	16M8D1D	15.885M	13.486M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.825M	19.107M	19M1D1D	16.095M	14.539M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	44.44M	38.081M	38M1D1D	36.05M	33.884M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	87.34M	77.789M	77M8D1D	77.4M	73.388M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	170.72M	157.687M	158MD1D	163.24M	156.217M
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	242.52M	231.727M	232MD1D	239.7M	231.598M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.39M	16.84M	16M8D1D	3.1M	4.231M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.14M	19.126M	19M1D1D	4.44M	4.565M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	38.17M	38.102M	38M1D1D	4.04M	4.419M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	75.9M	77.56M	77M6D1D	3.94M	6.55M
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	4.08M	13.029M	13M0D1D	3.88M	12.365M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	21.89M	16.778M	22.385M	16.738M	22.11M	16.744M	22.22M	16.745M
5200MHz	Pass	Inf	22.11M	16.78M	21.945M	16.778M	21.945M	16.747M	22M	16.716M
5240MHz	Pass	Inf	22.275M	16.778M	22.275M	16.749M	22.11M	16.743M	21.89M	16.753M
5260MHz	Pass	Inf	22.165M	16.803M	21.725M	16.772M	21.89M	16.813M	22.055M	16.788M
5300MHz	Pass	Inf	22.275M	16.744M	21.945M	16.771M	22.165M	16.772M	22.33M	16.74M
5320MHz	Pass	Inf	22.165M	16.749M	22.055M	16.728M	22.275M	16.753M	21.89M	16.747M
5500MHz	Pass	Inf	22.055M	16.77M	21.835M	16.736M	21.615M	16.745M	21.78M	16.741M
5580MHz	Pass	Inf	22.055M	16.793M	21.835M	16.726M	22.715M	16.793M	21.945M	16.747M
5700MHz	Pass	Inf	22.33M	16.781M	21.835M	16.776M	21.835M	16.76M	22.33M	16.725M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.095M	13.497M	15.885M	13.496M	16.155M	13.486M	16.125M	13.51M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.22M	4.292M	3.1M	4.231M	3.12M	4.27M	3.22M	4.263M
5745MHz	Pass	500k	16.335M	16.77M	16.335M	16.763M	16.335M	16.791M	16.335M	16.737M
5785MHz	Pass	500k	16.335M	16.763M	16.335M	16.723M	16.335M	16.797M	16.39M	16.777M
5825MHz	Pass	500k	16.335M	16.795M	16.335M	16.84M	16.335M	16.782M	16.39M	16.809M
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	22.275M	19.097M	21.67M	19.032M	22M	19.047M	22M	19.104M
5200MHz	Pass	Inf	22.165M	19.075M	22.605M	19.027M	21.89M	19.094M	21.615M	19.04M
5240MHz	Pass	Inf	21.67M	19.08M	22.77M	19.095M	22.275M	19.083M	22.44M	19.079M
5260MHz	Pass	Inf	22.55M	19.051M	22.715M	19.091M	21.67M	19.06M	22.66M	19.053M
5300MHz	Pass	Inf	21.835M	19.089M	22.275M	19.071M	22.22M	19.093M	22.495M	19.087M
5320MHz	Pass	Inf	21.78M	19.051M	22.22M	19.053M	22.055M	19.044M	22.77M	19.081M
5500MHz	Pass	Inf	21.615M	19.064M	22M	19.093M	22M	19.107M	22.55M	19.087M
5580MHz	Pass	Inf	22.275M	19.044M	21.945M	19.05M	21.505M	19.077M	22.825M	19.057M
5700MHz	Pass	Inf	21.945M	19.073M	22.33M	19.062M	22.165M	19.036M	22.55M	19.087M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.095M	14.539M	16.29M	14.571M	16.305M	14.545M	16.365M	14.585M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.44M	4.606M	4.6M	4.596M	4.5M	4.565M	4.5M	4.607M
5745MHz	Pass	500k	18.81M	19.082M	18.975M	19.075M	19.14M	19.126M	18.975M	19.053M
5785MHz	Pass	500k	18.81M	19.069M	18.7M	19.035M	18.92M	19.075M	18.975M	19.083M
5825MHz	Pass	500k	19.03M	19.099M	19.085M	19.123M	18.92M	19.061M	19.03M	19.092M
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	43.89M	38M	43.34M	38.044M	43.23M	37.972M	43.23M	38.025M
5230MHz	Pass	Inf	44.44M	38.014M	42.57M	38.072M	44.44M	38.062M	42.68M	38.119M
5270MHz	Pass	Inf	44.33M	38.1M	42.24M	38.059M	42.68M	38.041M	43.34M	38.083M
5310MHz	Pass	Inf	43.56M	38.058M	43.45M	38.082M	42.57M	38.11M	42.79M	38.043M
5510MHz	Pass	Inf	43.45M	38.064M	44.33M	38.049M	43.34M	38.001M	42.57M	38.001M
5550MHz	Pass	Inf	43.89M	37.978M	43.45M	38.073M	44.44M	38.025M	42.79M	38.01M
5670MHz	Pass	Inf	43.23M	38.013M	42.68M	38.045M	43.34M	38.052M	42.57M	38.081M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	36.68M	33.999M	36.05M	33.884M	36.155M	33.892M	36.855M	33.903M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.06M	4.425M	4.04M	4.545M	4.08M	4.419M	4.04M	4.431M
5755MHz	Pass	500k	38.06M	38.082M	38.06M	38.082M	37.95M	38.029M	38.17M	38.102M
5795MHz	Pass	500k	37.73M	38.078M	38.06M	37.969M	38.17M	38.071M	36.85M	38.029M
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	84.7M	77.795M	86.9M	77.808M	87.78M	77.592M	87.56M	77.864M
5290MHz	Pass	Inf	85.8M	77.846M	84.04M	77.625M	84.48M	77.764M	87.12M	77.685M
5530MHz	Pass	Inf	84.7M	77.624M	87.34M	77.478M	86.9M	77.789M	87.12M	77.671M
5610MHz	Pass	Inf	84.04M	77.341M	85.14M	77.413M	84.26M	77.679M	86.46M	77.436M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	77.4M	73.582M	78.225M	73.388M	78.75M	73.481M	78.75M	73.628M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.02M	6.556M	4.08M	6.708M	4.06M	6.737M	3.94M	6.55M
5775MHz	Pass	500k	61.38M	77.424M	75.9M	77.496M	74.14M	77.56M	60.06M	77.382M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.36M	77.379M	80.88M	77.983M	84.24M	77.436M	81.76M	77.347M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	83.84M	77.716M	84.16M	77.608M	84.32M	77.681M	85.12M	77.677M
5570MHz	Pass	Inf	163.24M	156.217M	170.72M	157.133M	168.52M	157.687M	163.24M	156.542M
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
5610MHz Straddle 5.47-5.725GHz	Pass	Inf	242.52M	231.682M	239.7M	231.598M	241.345M	231.712M	241.345M	231.727M
5610MHz Straddle 5.725-5.85GHz	Pass	500k	4.02M	12.365M	3.88M	12.657M	4.08M	12.414M	4.06M	13.029M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band



Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5180MHz

19/01/2026

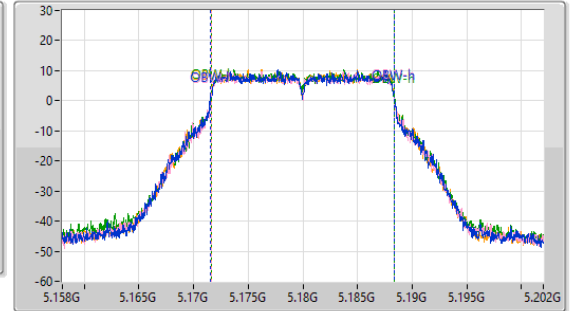
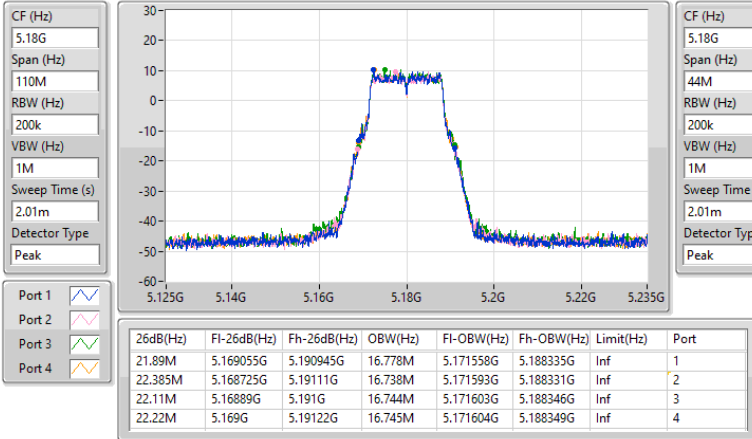


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5200MHz

19/01/2026

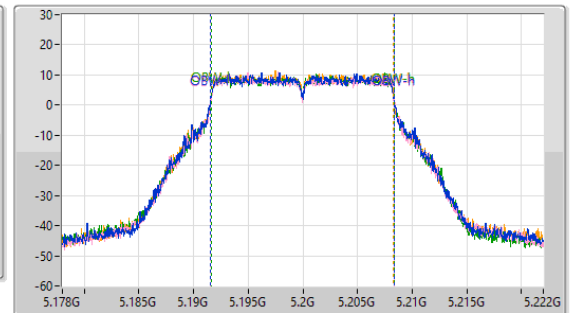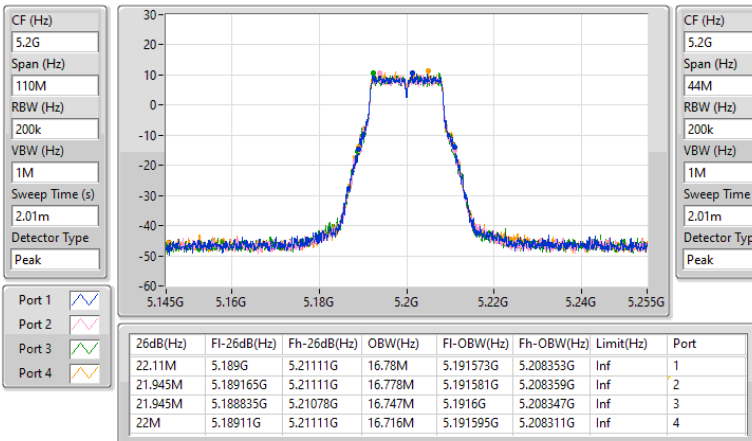


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5240MHz

27/01/2026

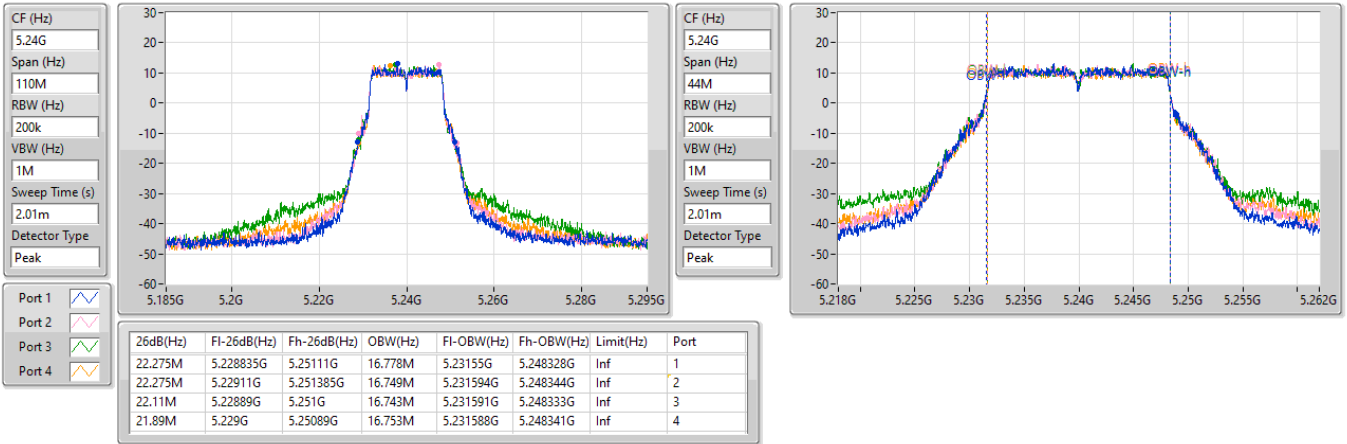

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5260MHz

23/01/2026

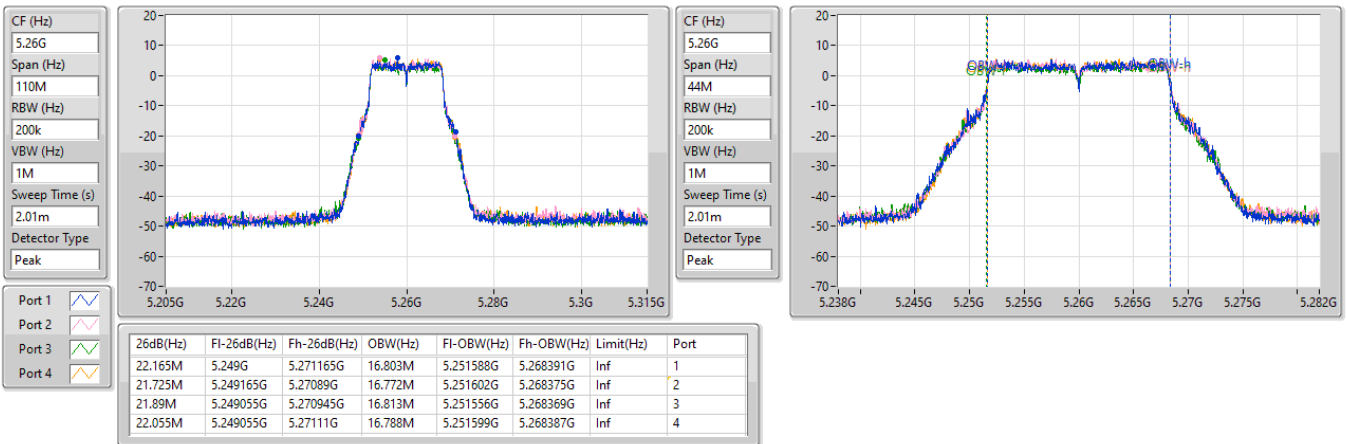


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5300MHz

23/01/2026

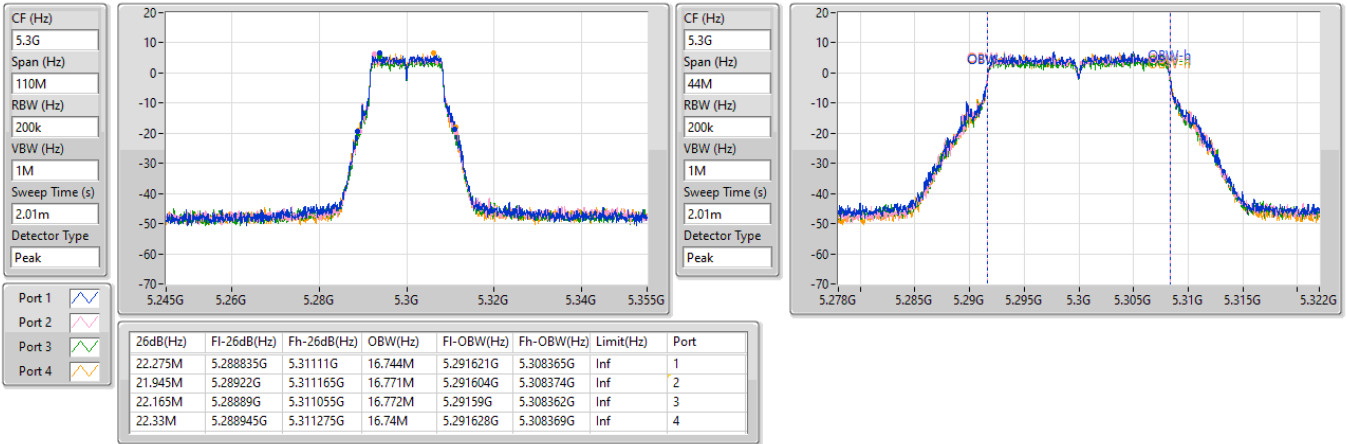
5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5320MHz

23/01/2026

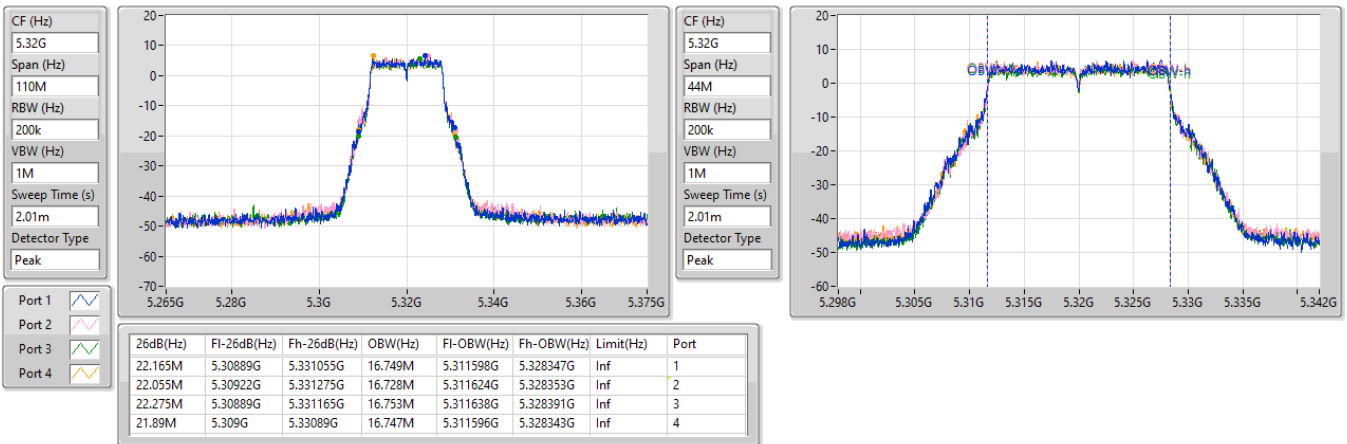


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5500MHz

27/01/2026

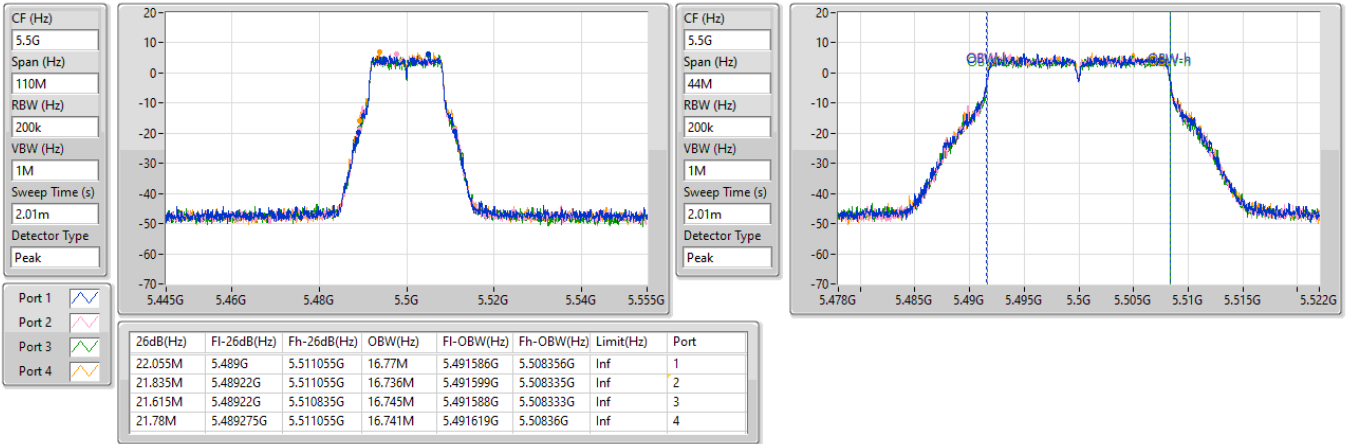


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5580MHz

27/01/2026

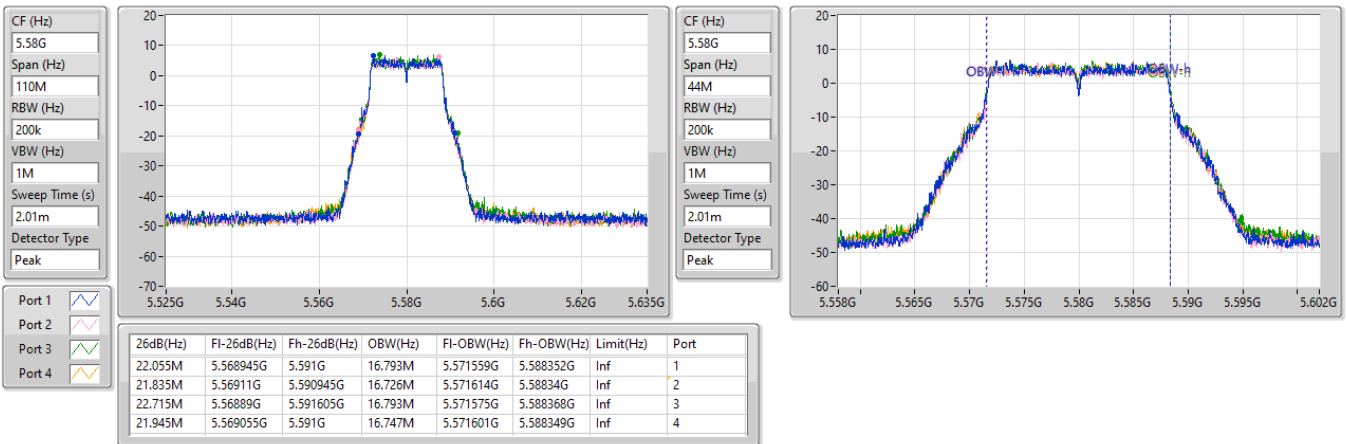


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5700MHz

27/01/2026

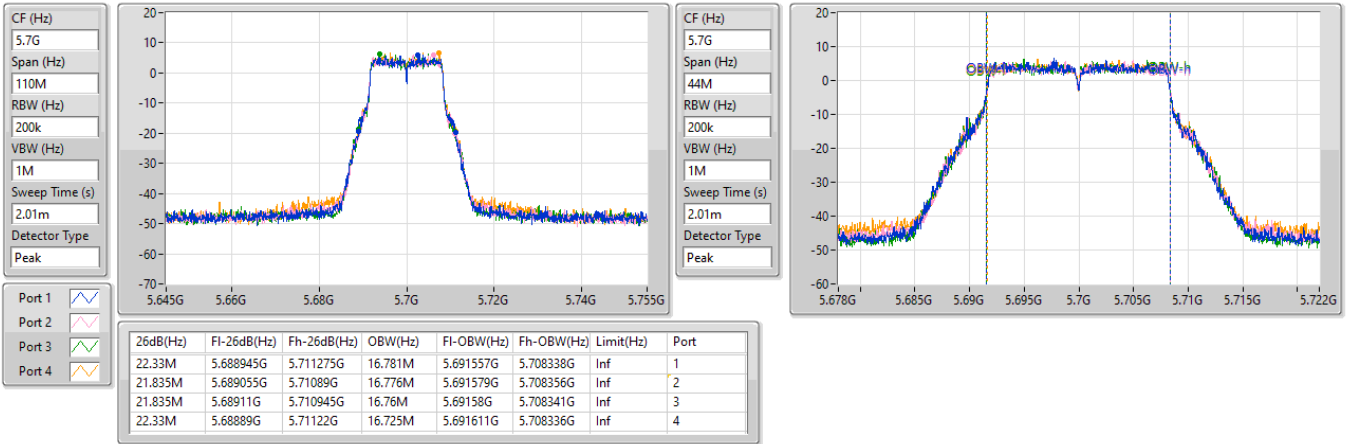


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW


5720MHz Straddle 5.47-5.725GHz

27/01/2026

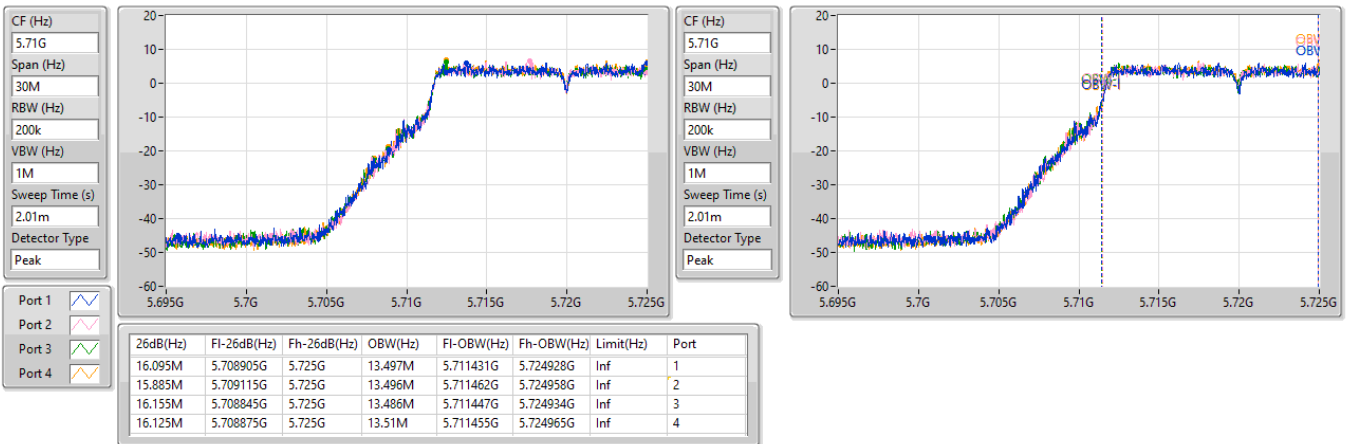


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5720MHz Straddle 5.725-5.85GHz

27/01/2026

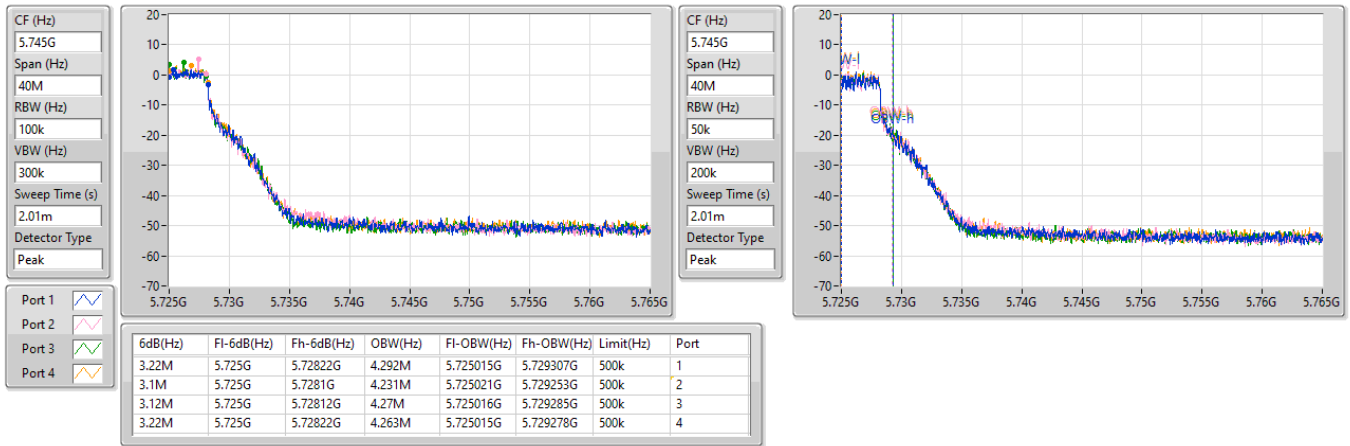

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5720MHz Straddle 5.725-5.85GHz

27/01/2026

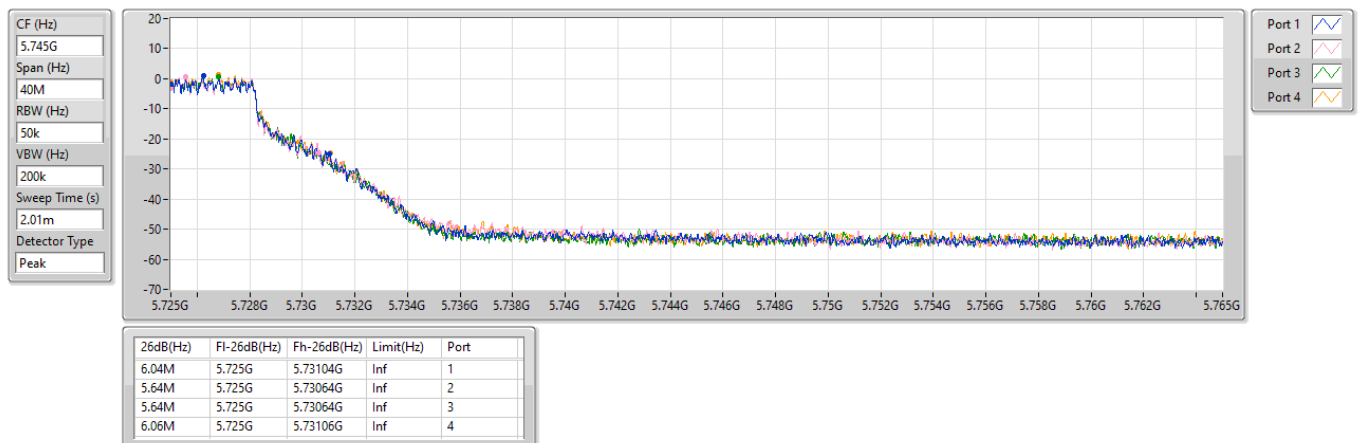


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5745MHz

19/01/2026

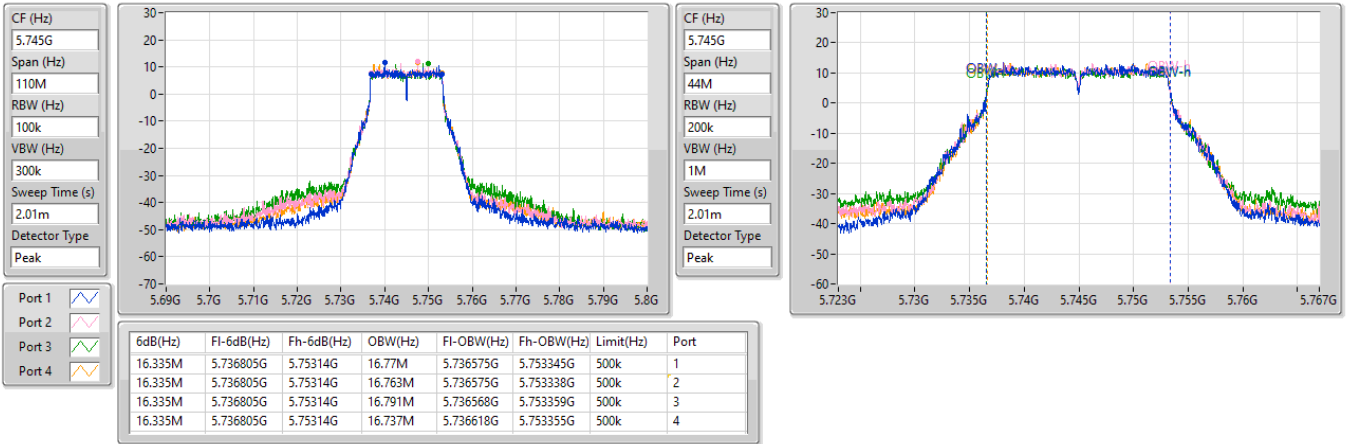

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5745MHz

19/01/2026

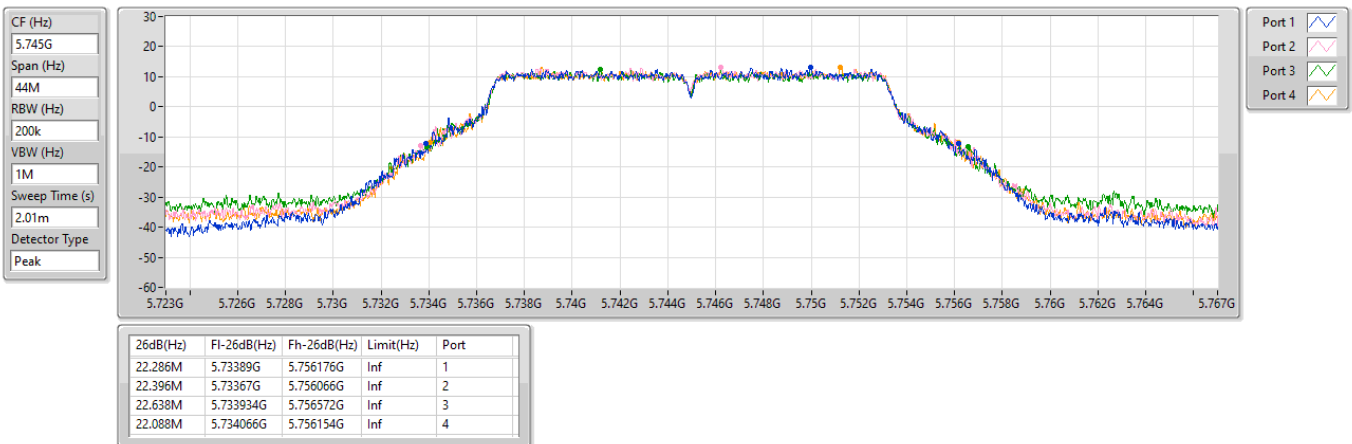


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5785MHz

19/01/2026

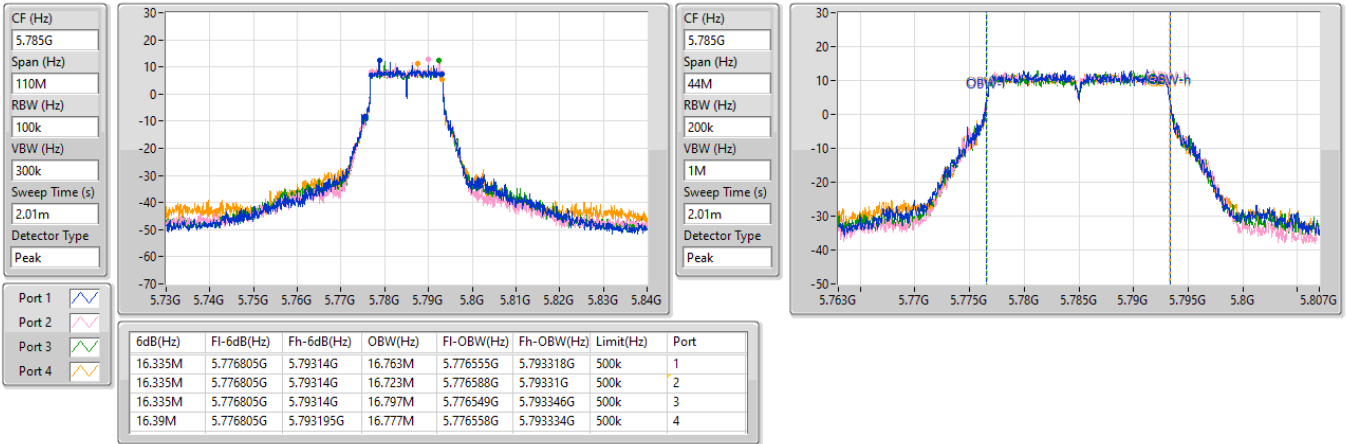
5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX
EBW
5785MHz

19/01/2026

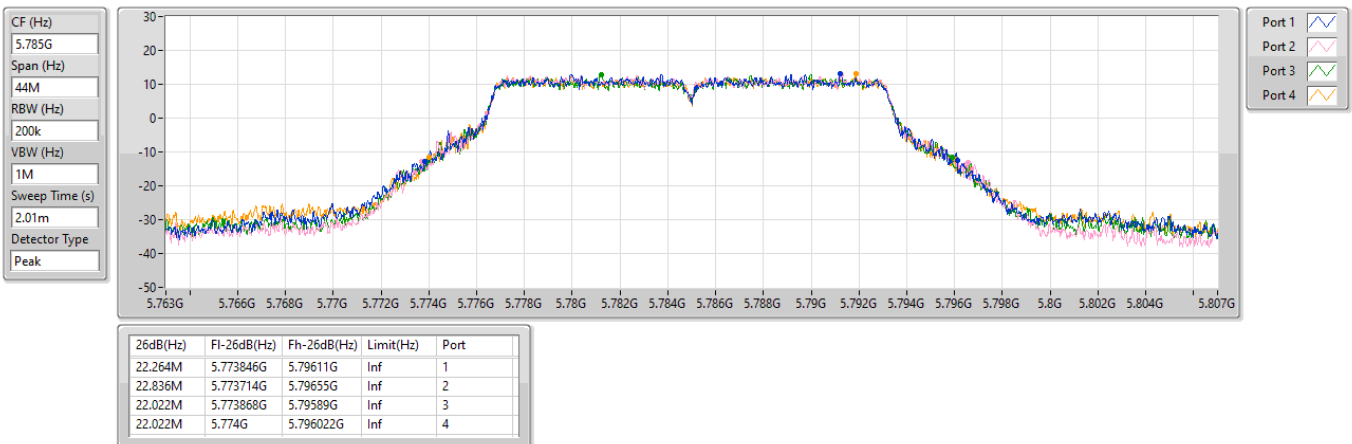


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5825MHz

19/01/2026

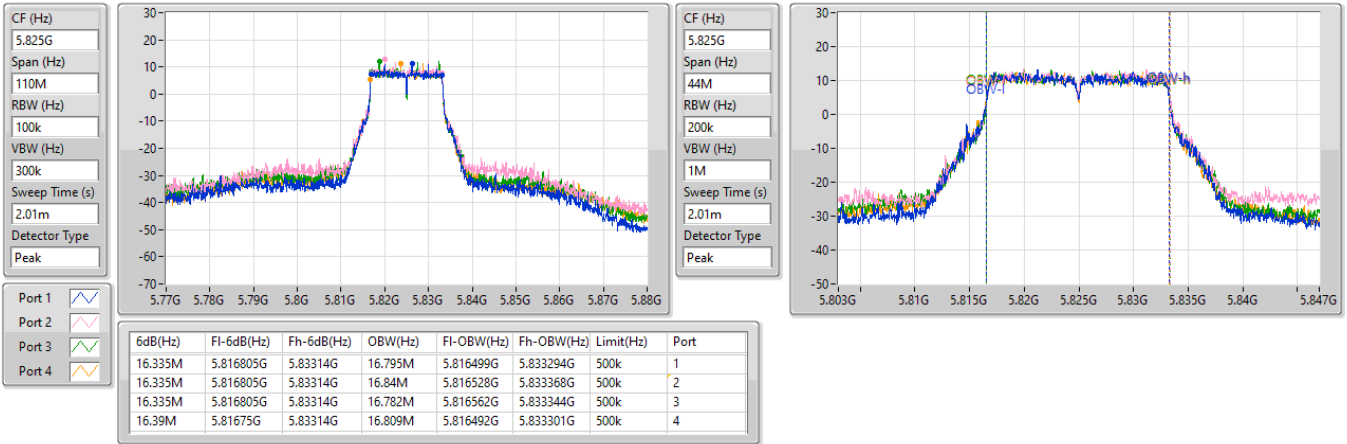


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5825MHz

19/01/2026


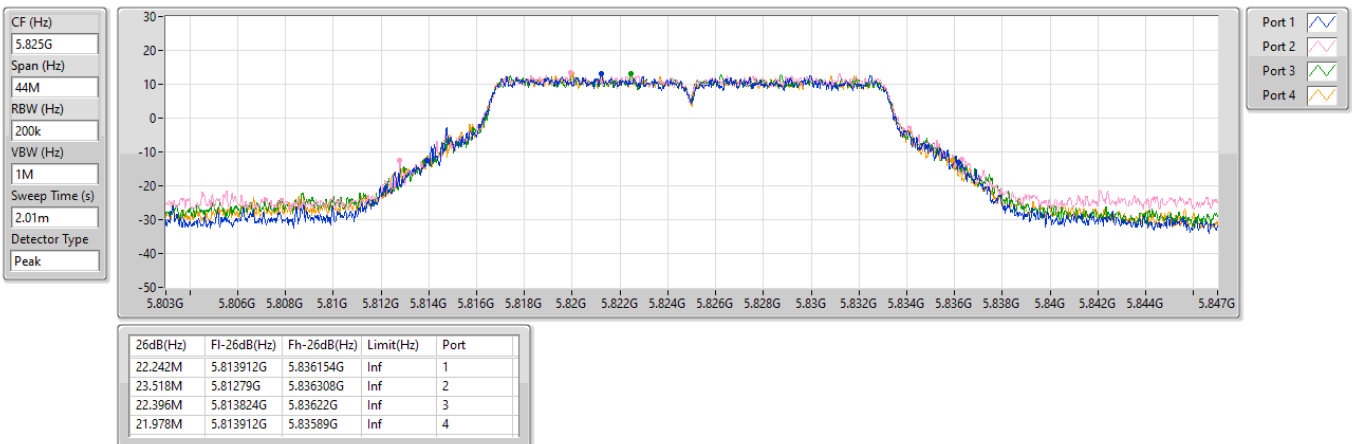


5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5180MHz

19/01/2026

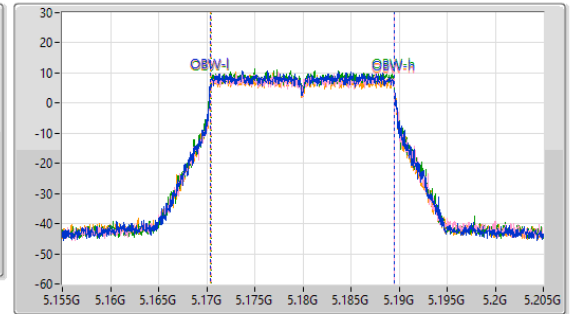
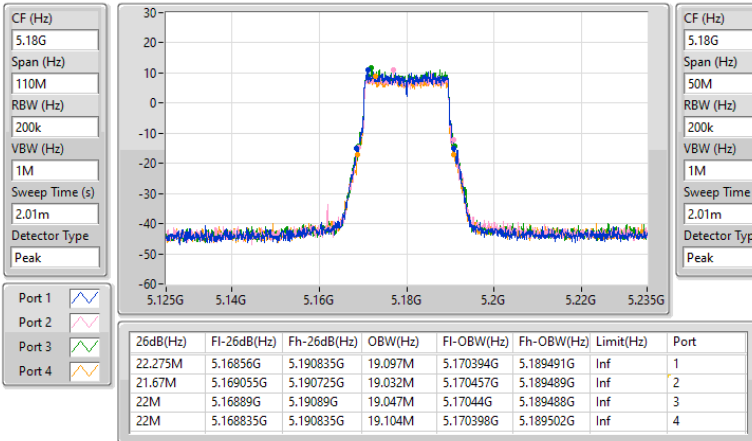


5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW


5200MHz

19/01/2026

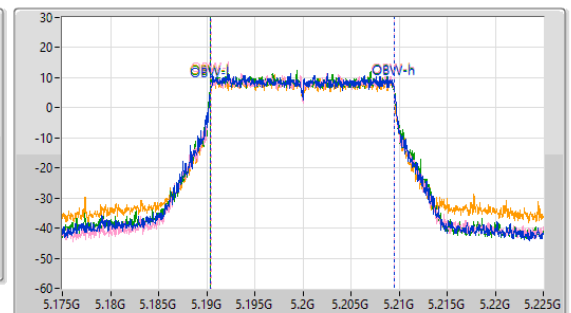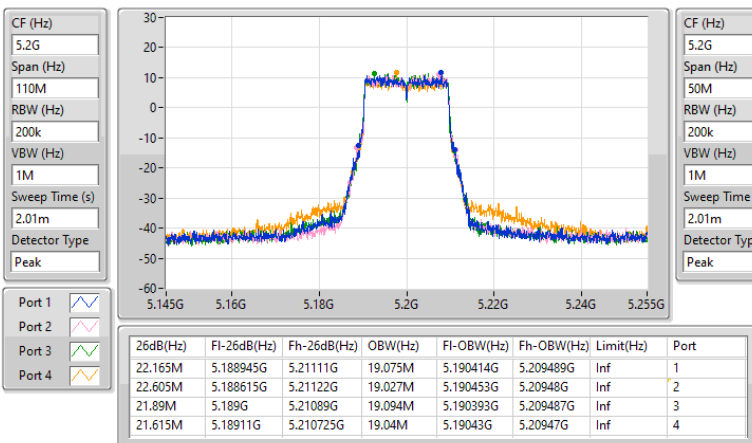


5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5240MHz

19/01/2026

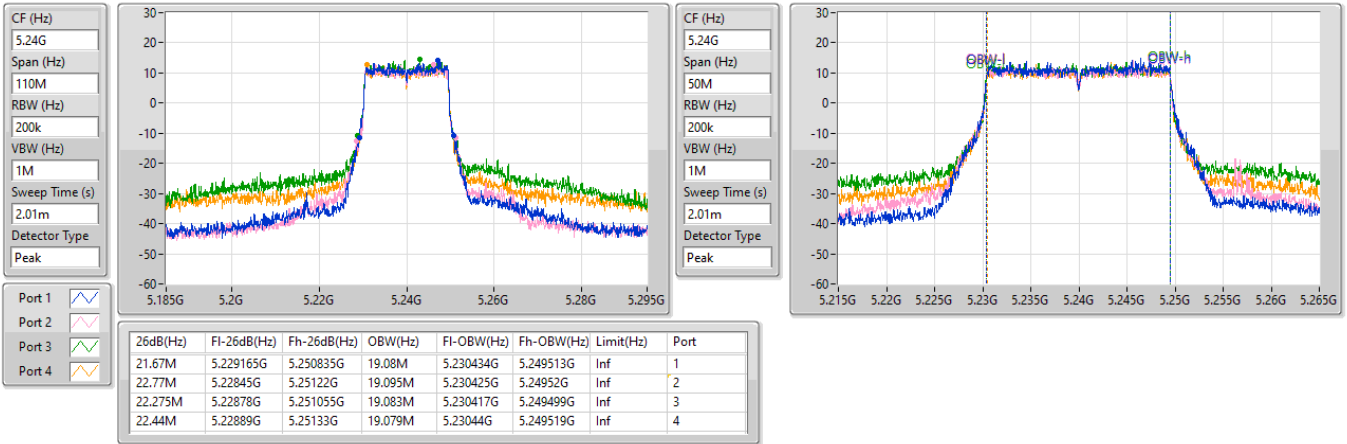
5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5260MHz

23/01/2026


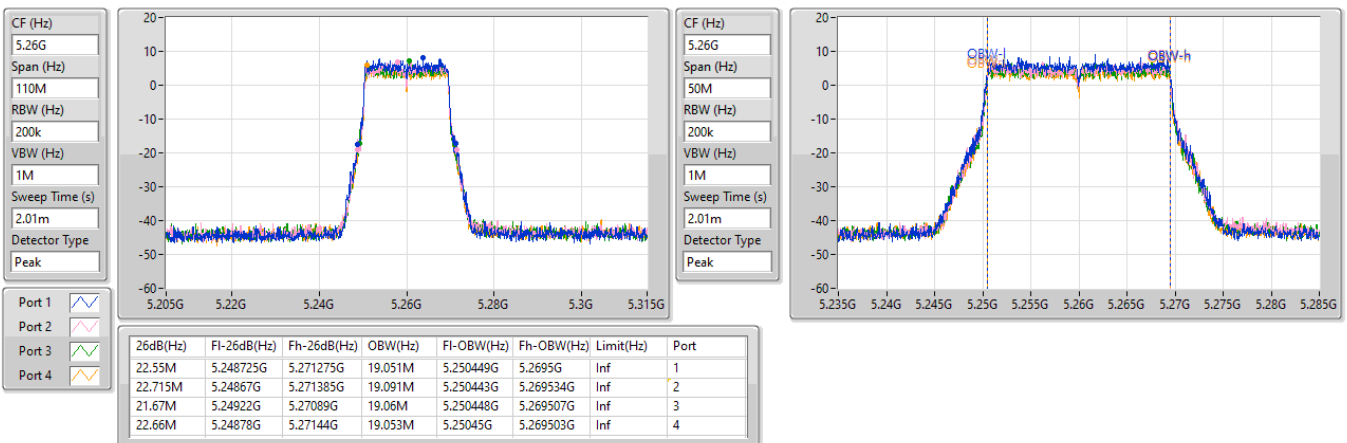


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5300MHz

23/01/2026

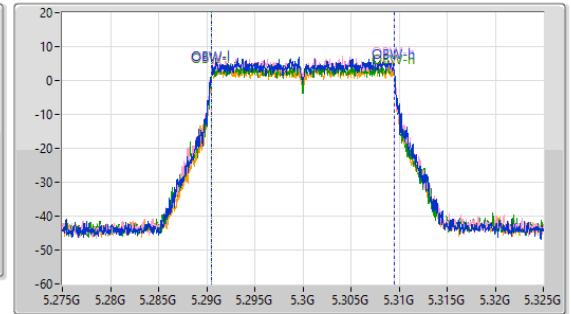
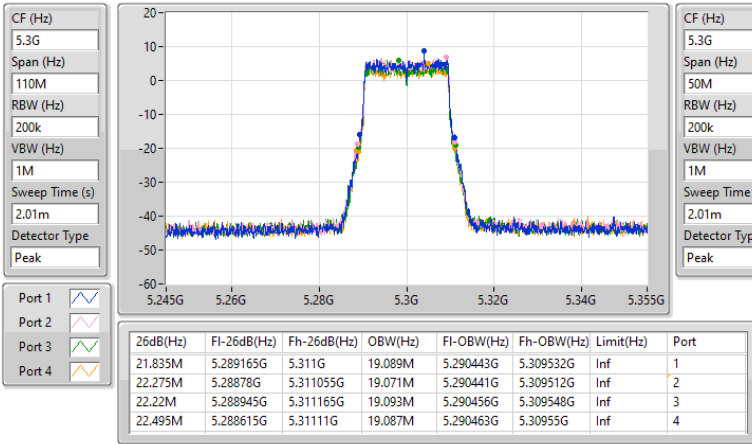


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5320MHz

23/01/2026

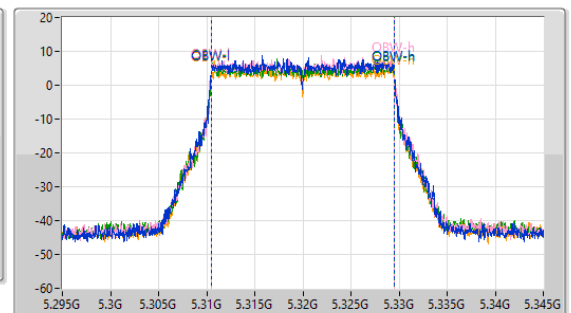
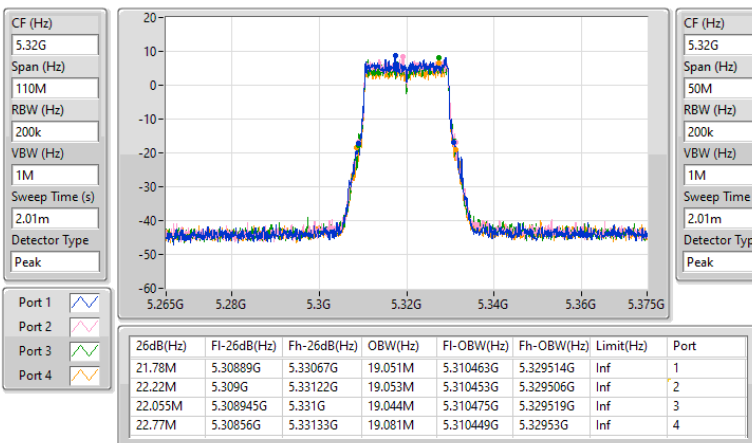


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5500MHz

27/01/2026

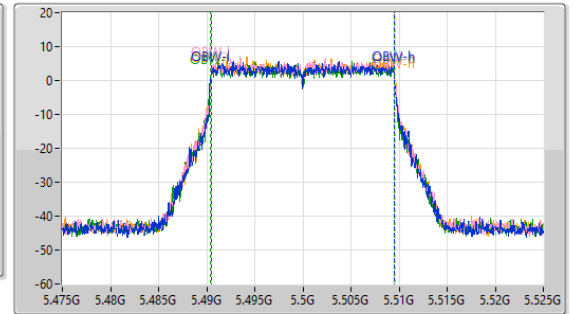
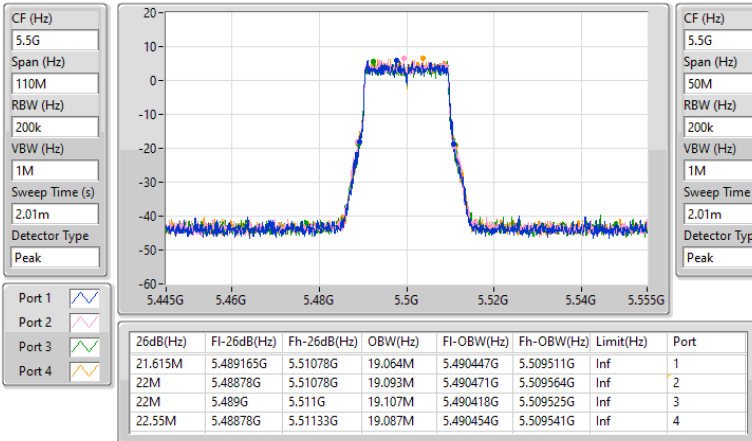


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW



5580MHz

27/01/2026

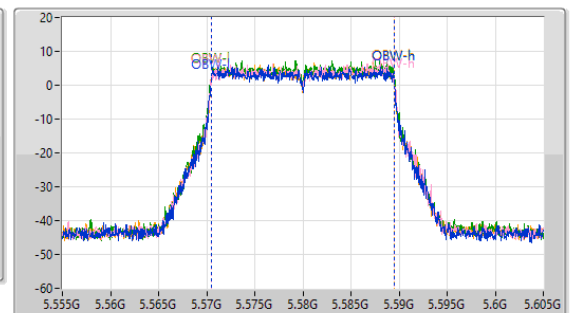
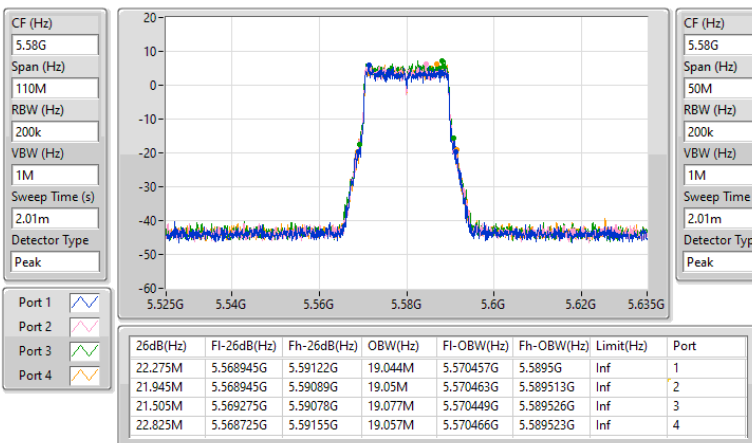


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5700MHz

27/01/2026

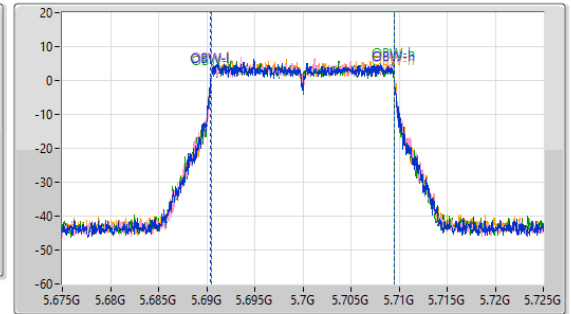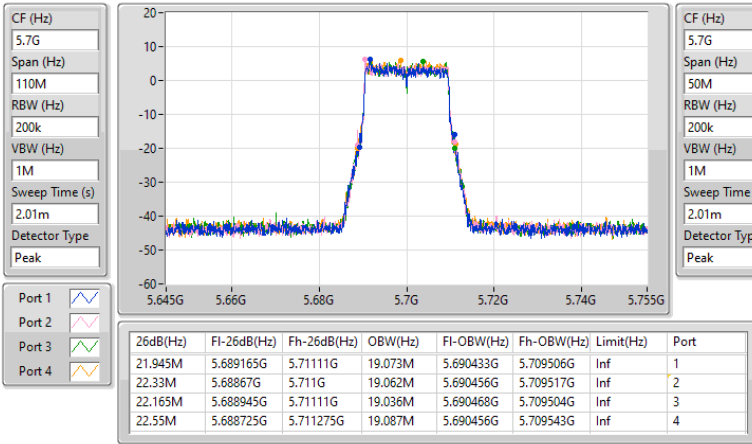

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5720MHz Straddle 5.47-5.725GHz

27/01/2026

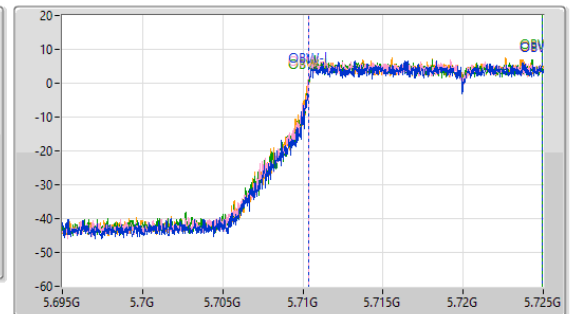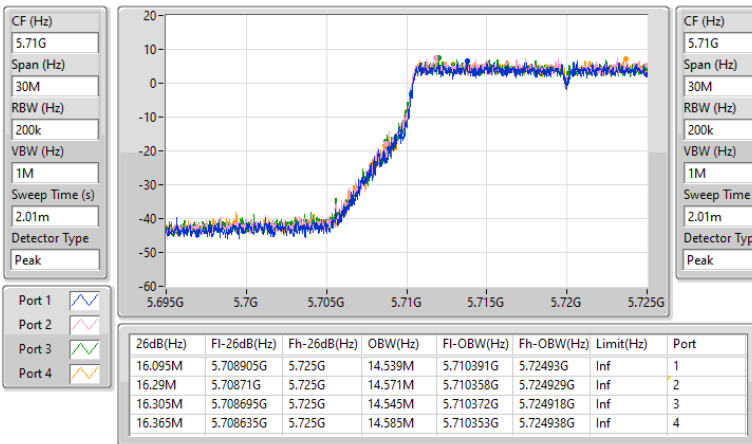


5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5720MHz Straddle 5.725-5.85GHz

27/01/2026

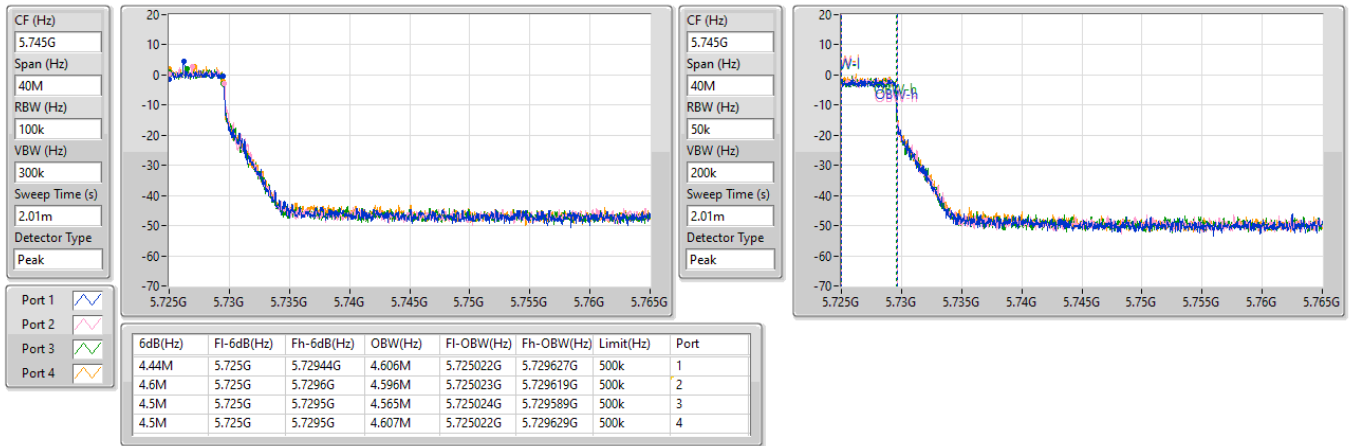

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5720MHz Straddle 5.725-5.85GHz

27/01/2026

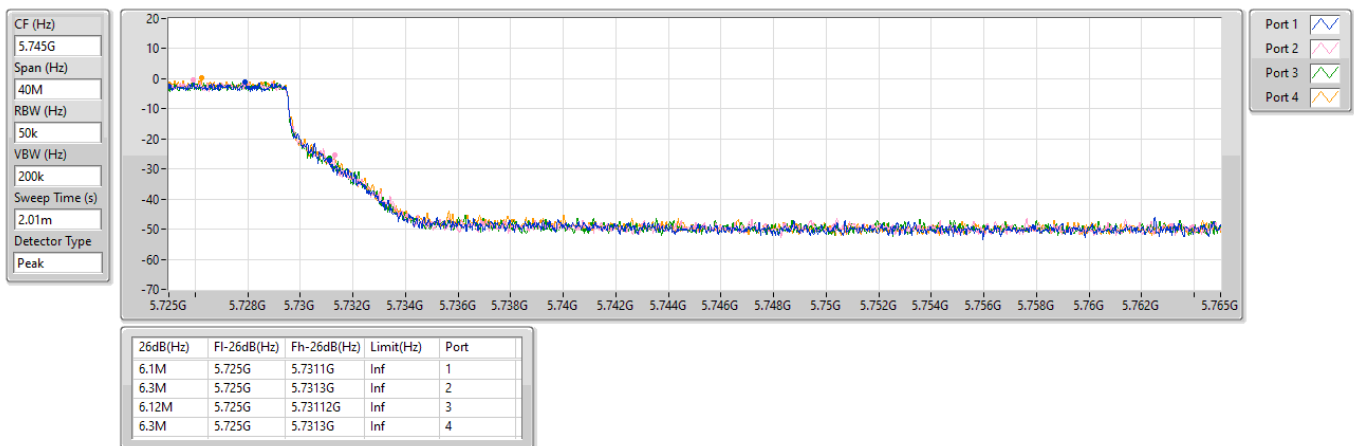

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5745MHz

19/01/2026

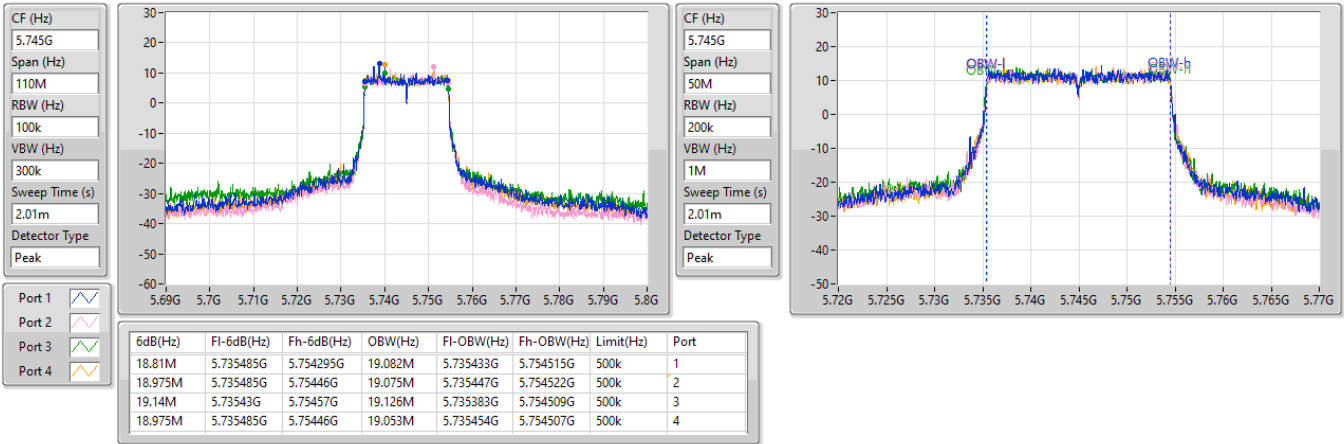
5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX
EBW
5745MHz

19/01/2026




5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5785MHz

19/01/2026

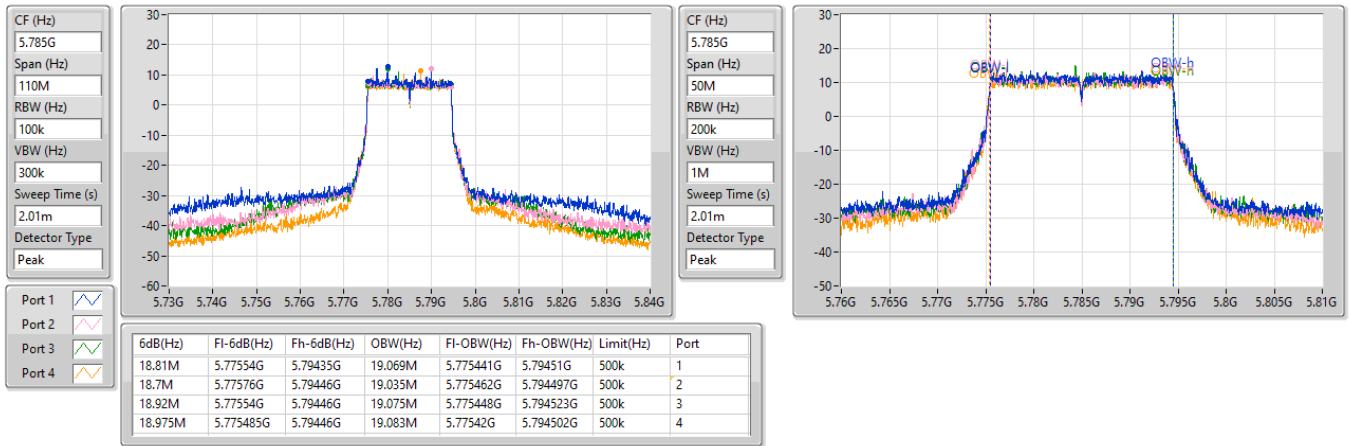

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5785MHz

19/01/2026




5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5825MHz

19/01/2026

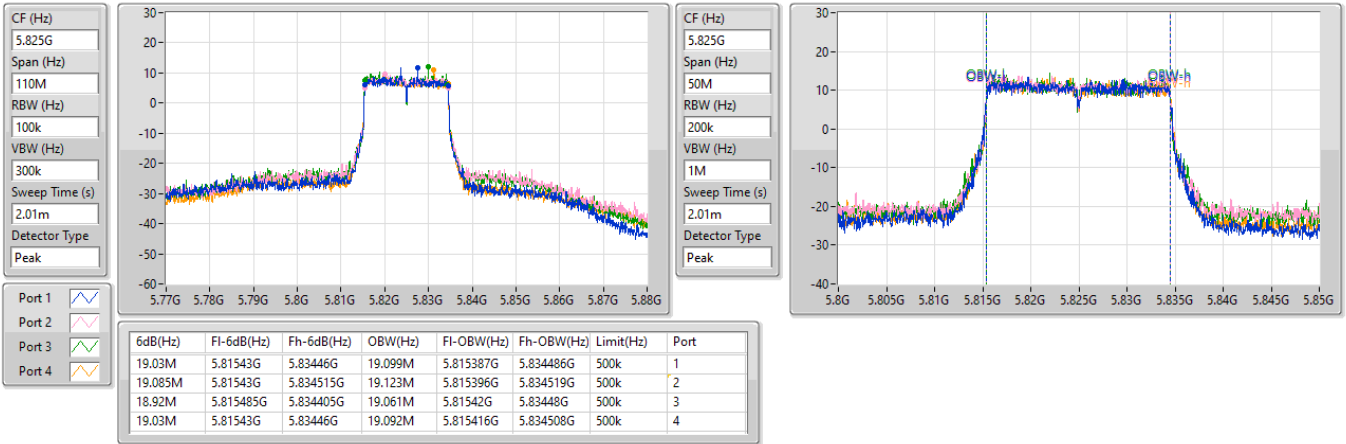

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

EBW

5825MHz

19/01/2026





5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5190MHz

19/01/2026

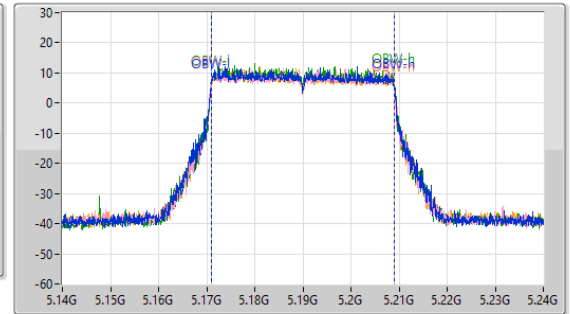
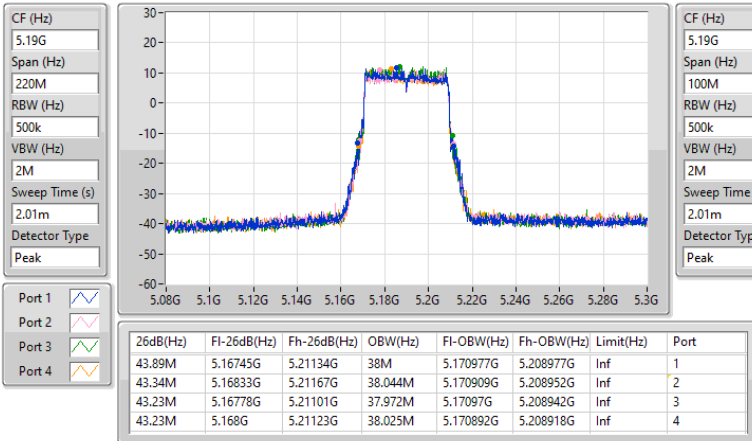


5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW



5230MHz

19/01/2026

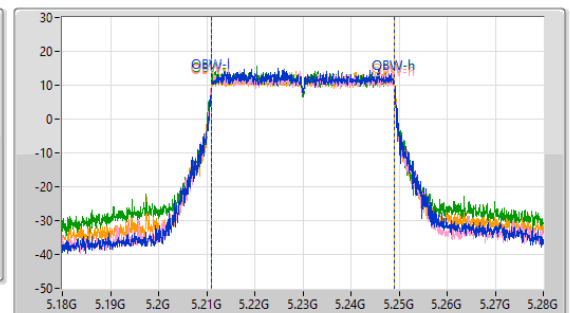
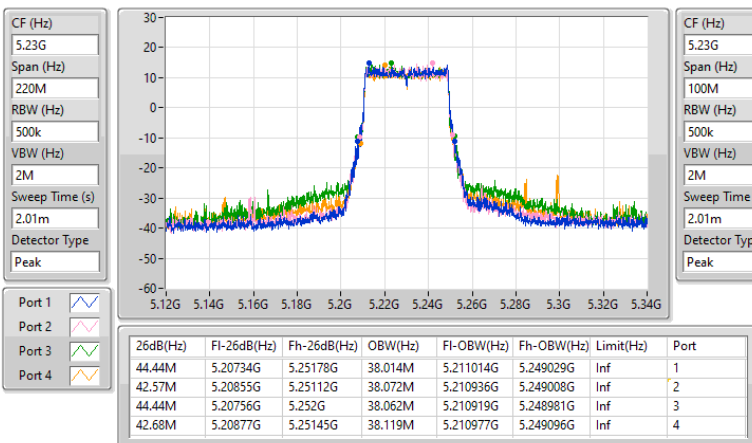


5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
5270MHz

26/01/2026

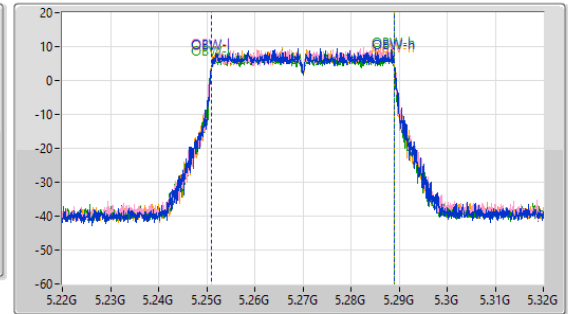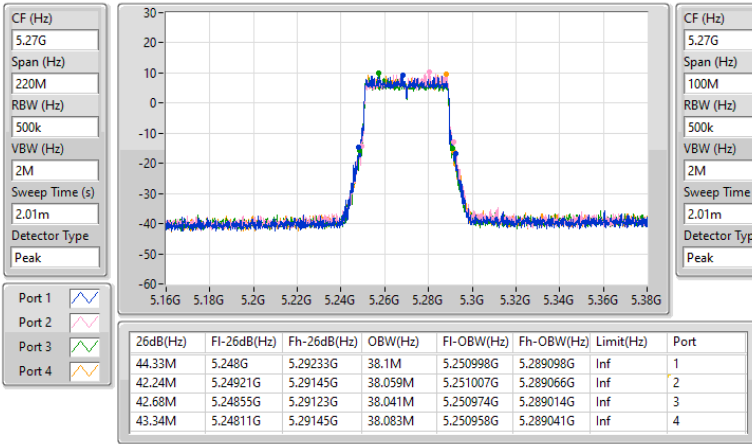
5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
5310MHz

26/01/2026

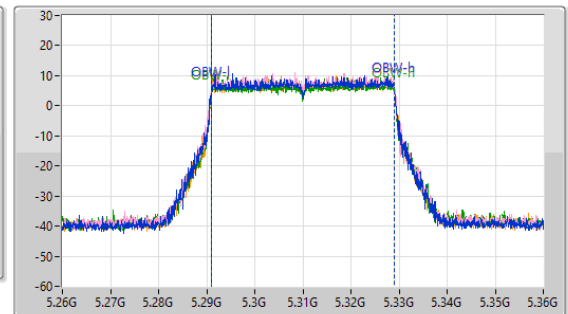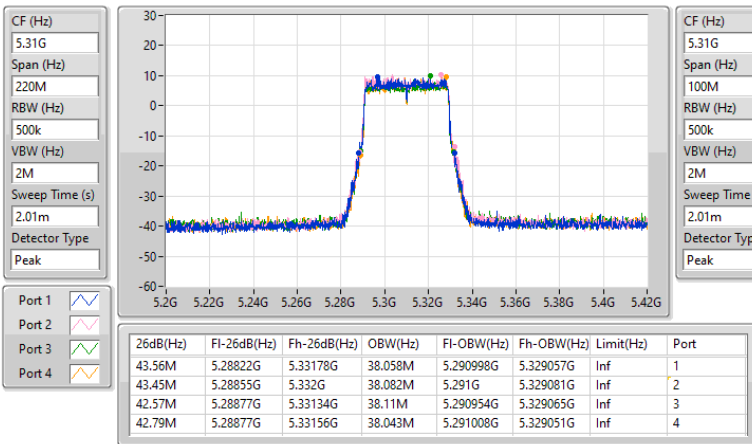


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5510MHz

27/01/2026

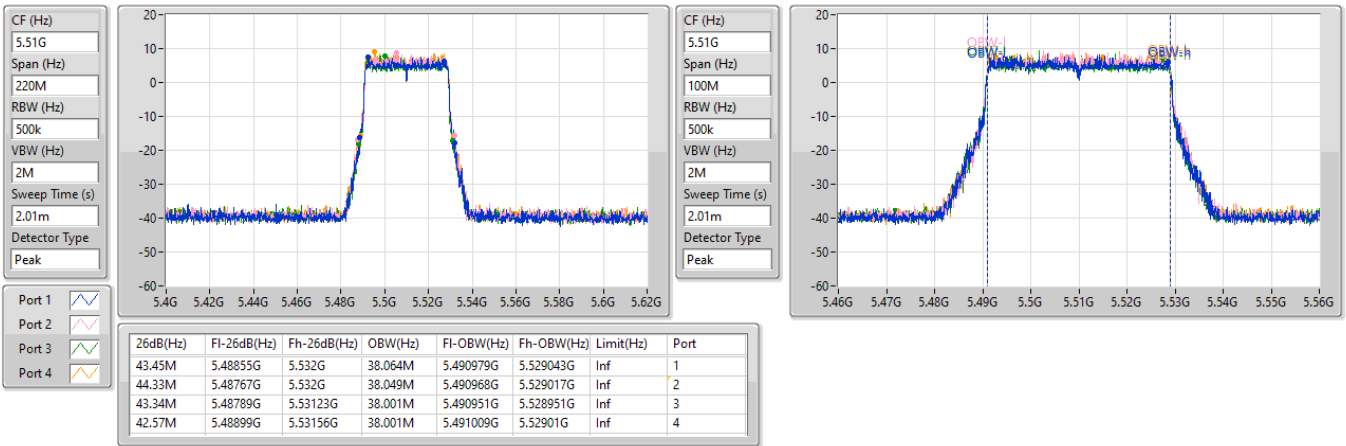


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5550MHz

27/01/2026


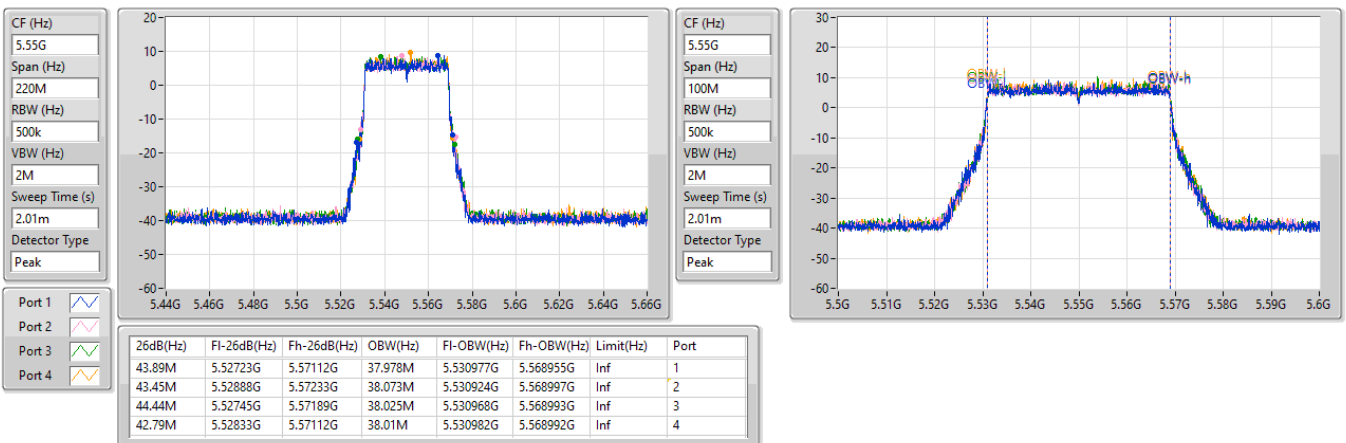


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5670MHz

27/01/2026

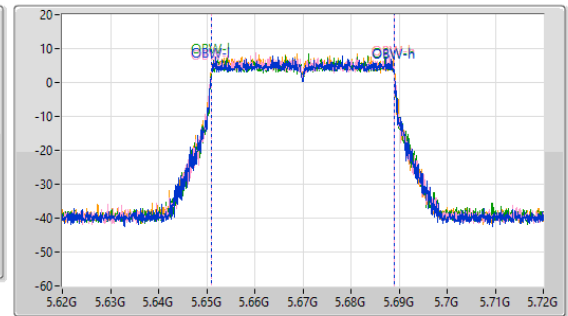
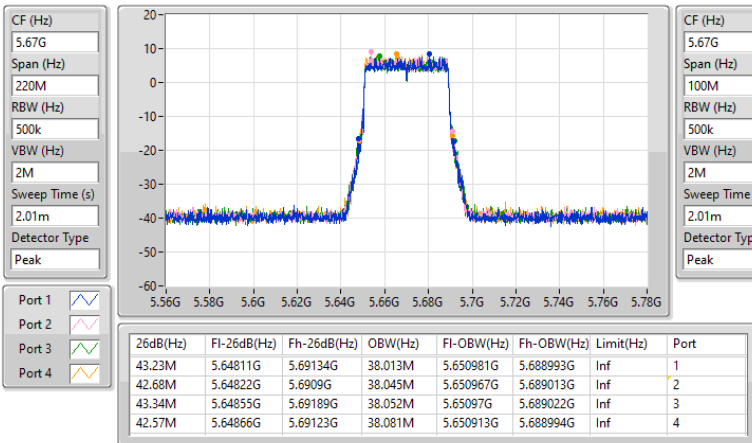


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW


5710MHz Straddle 5.47-5.725GHz

27/01/2026

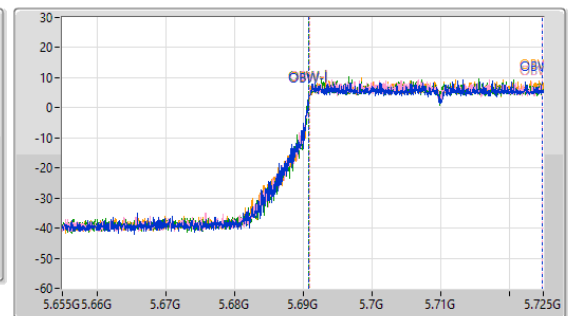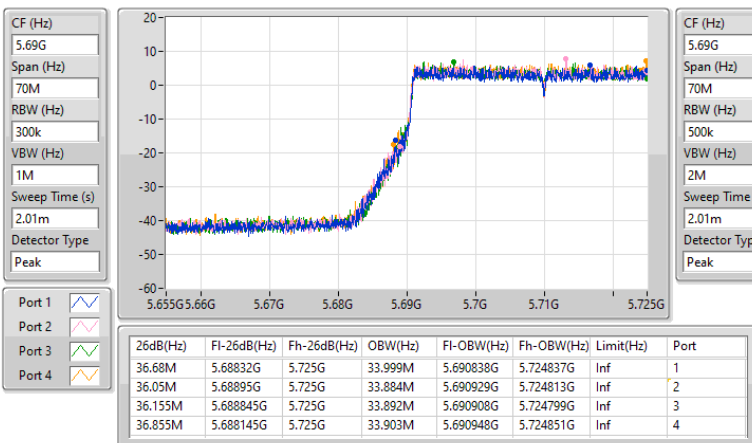


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
5710MHz Straddle 5.725-5.85GHz

27/01/2026

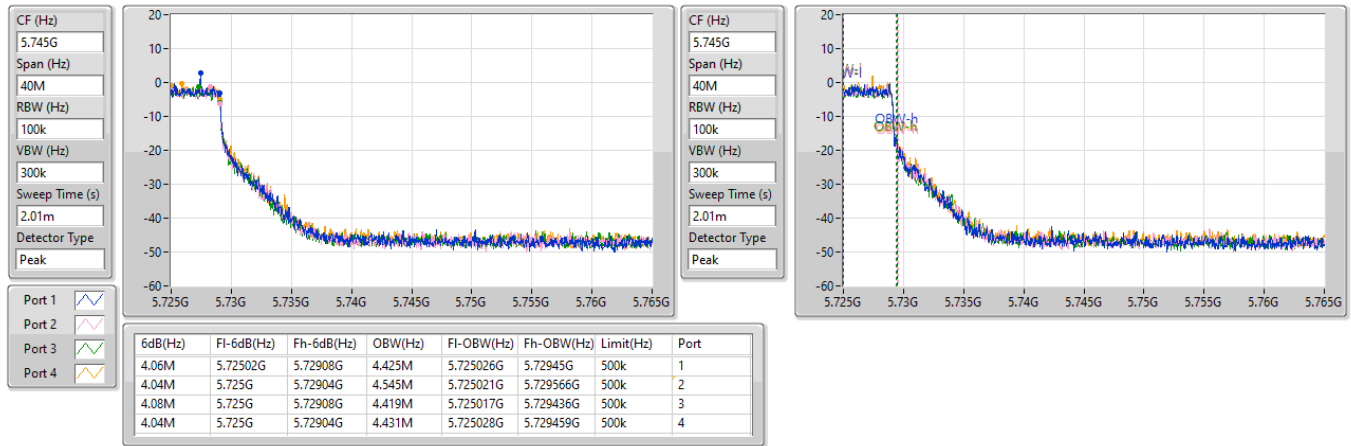
5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX
EBW
5710MHz Straddle 5.725-5.85GHz

27/01/2026

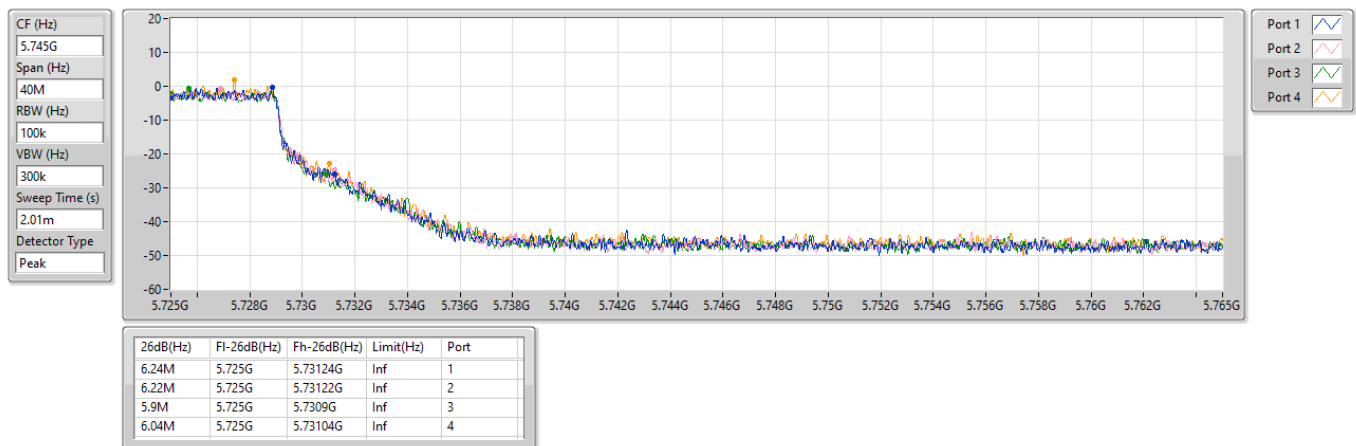


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5755MHz

19/01/2026

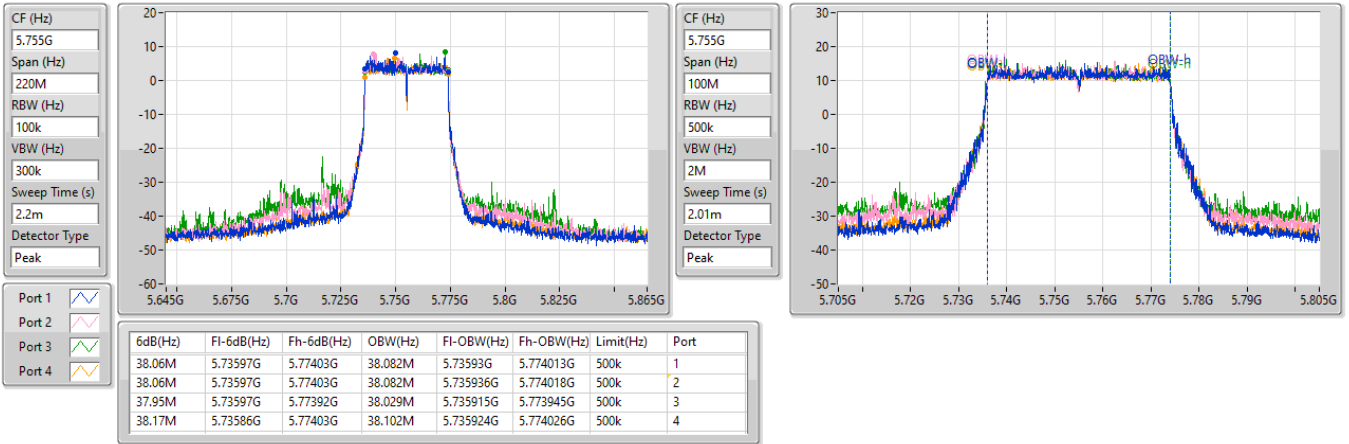


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5755MHz

19/01/2026

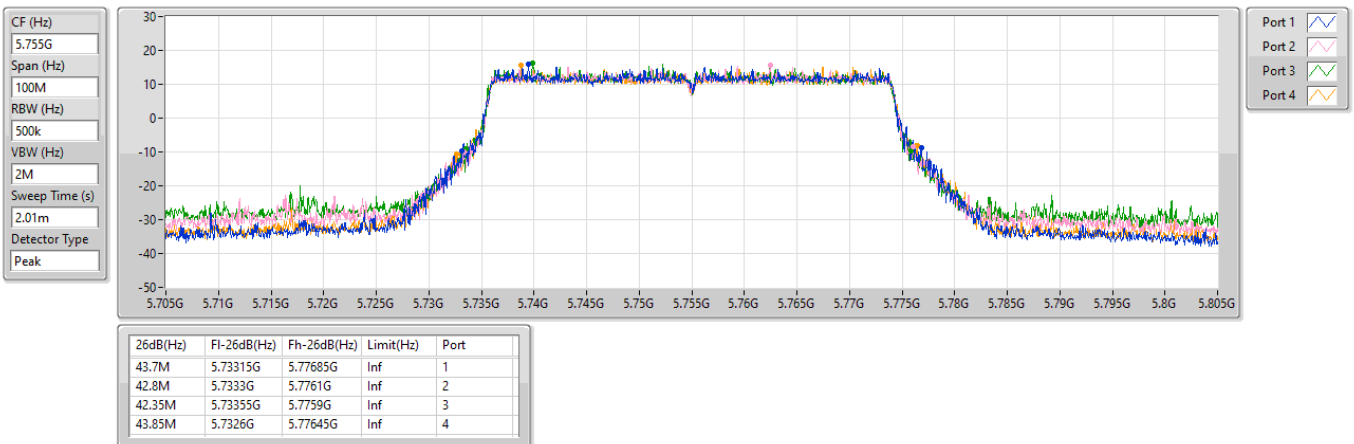


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5795MHz

19/01/2026

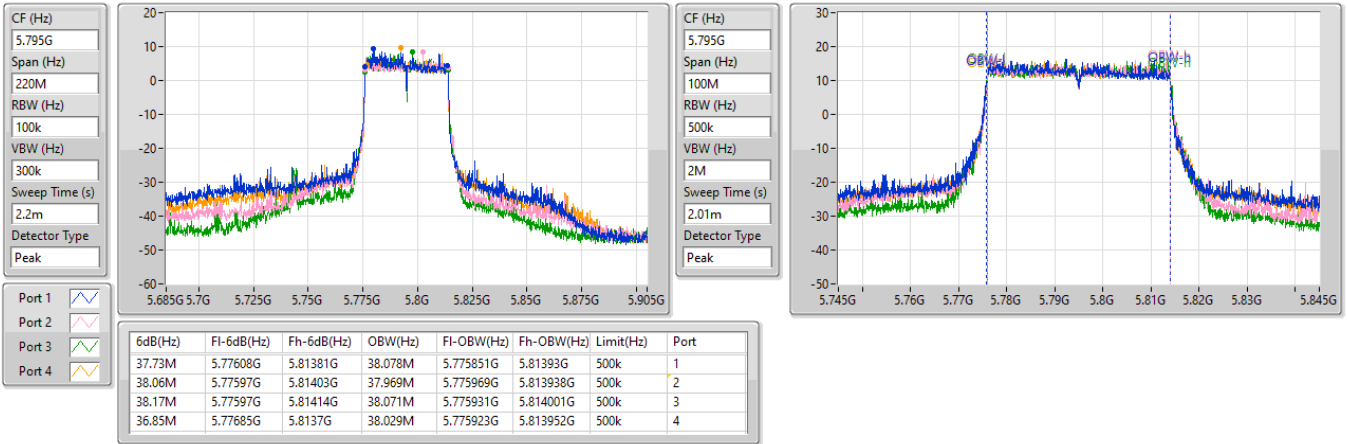


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

EBW

5795MHz

19/01/2026


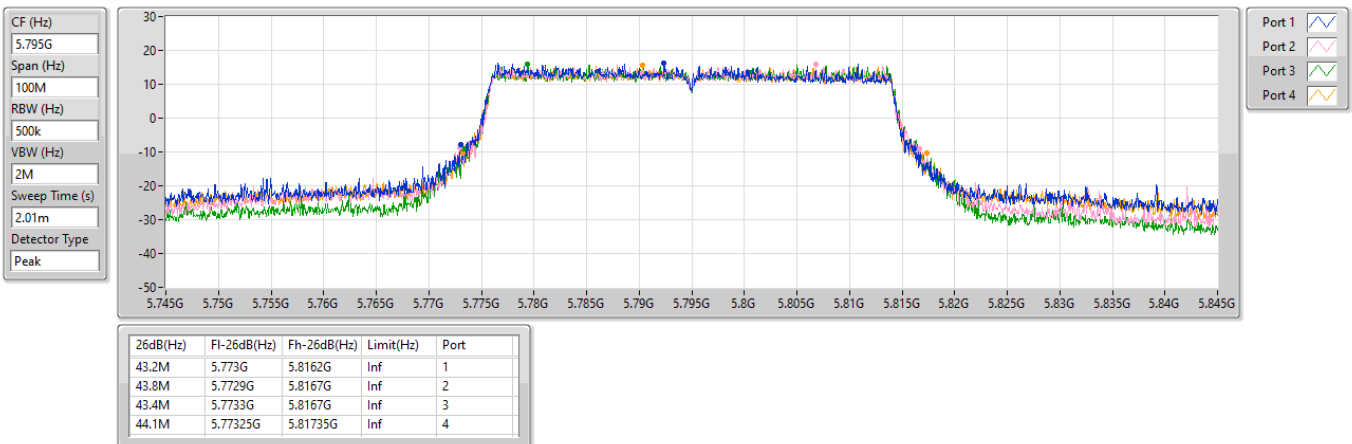


5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5210MHz

19/01/2026

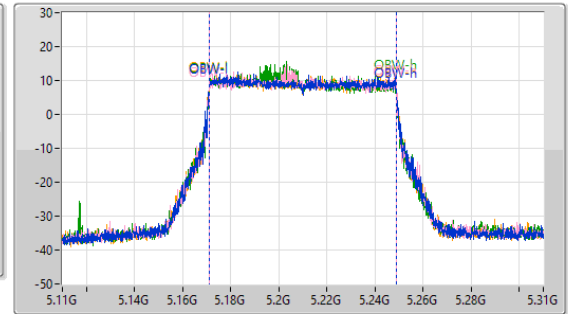
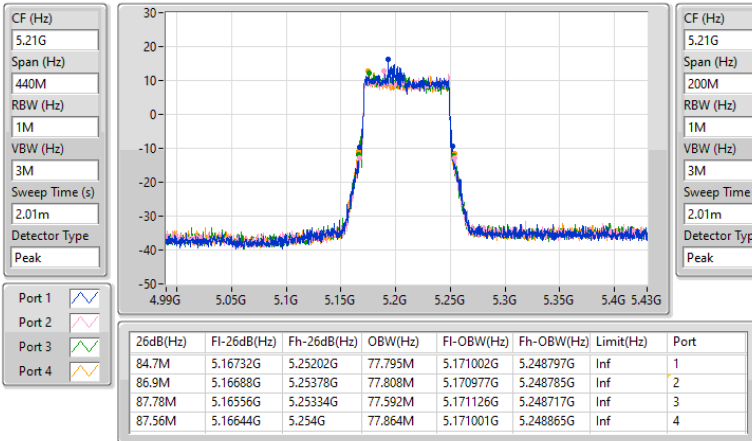


5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5290MHz

26/01/2026

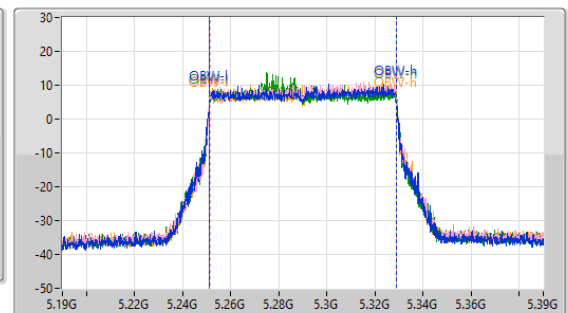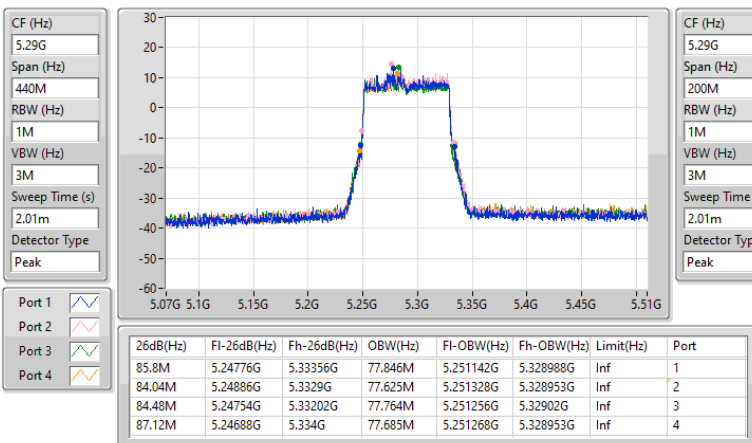


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5530MHz

19/01/2026

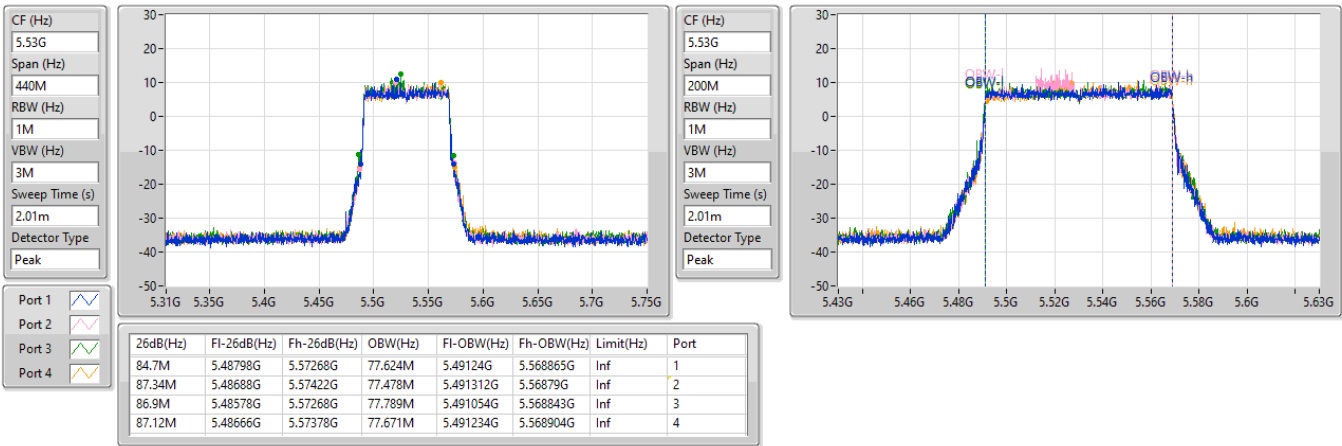


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5610MHz

19/01/2026

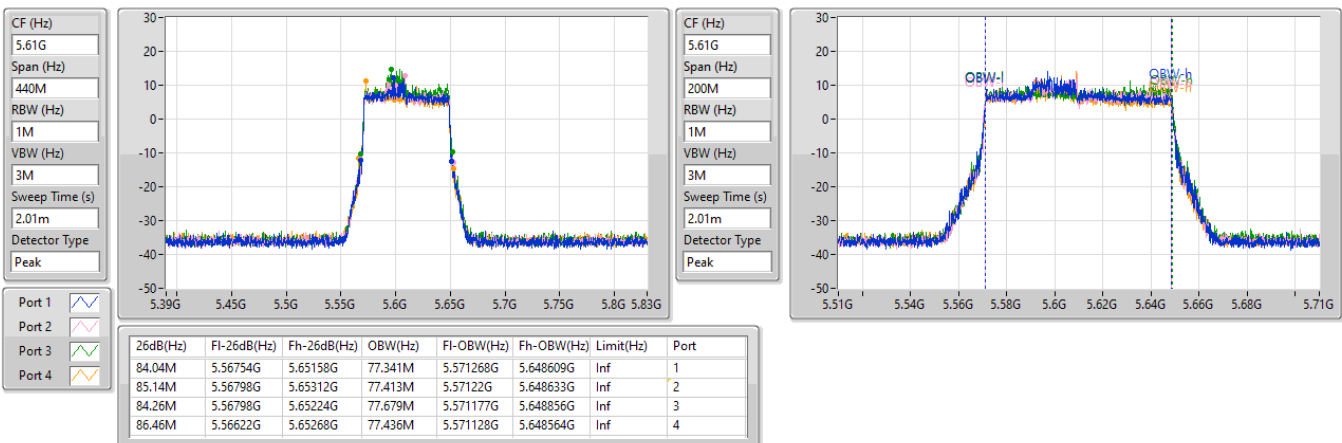


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.47-5.725GHz

27/01/2026

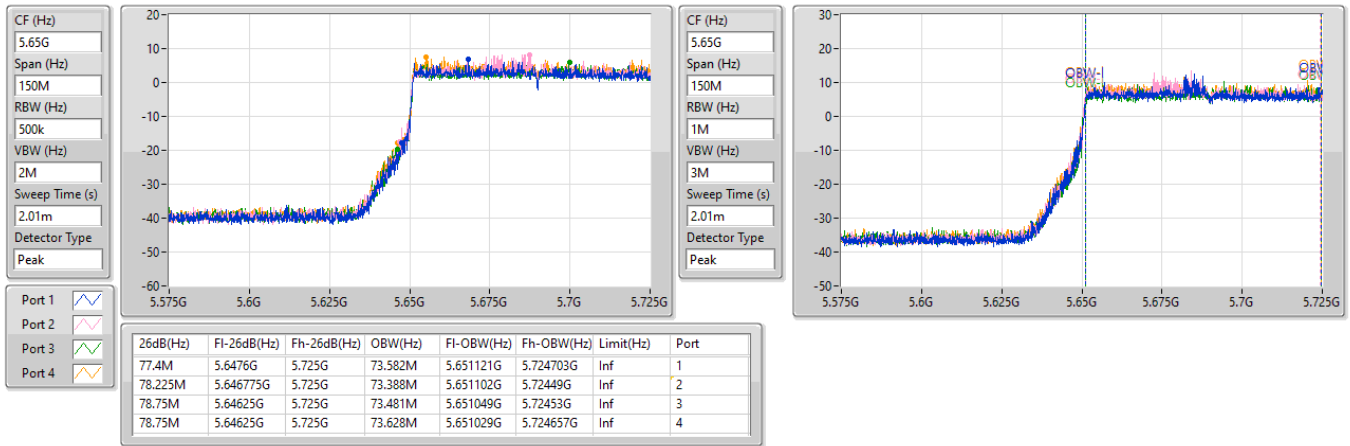


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW


5690MHz Straddle 5.725-5.85GHz

27/01/2026

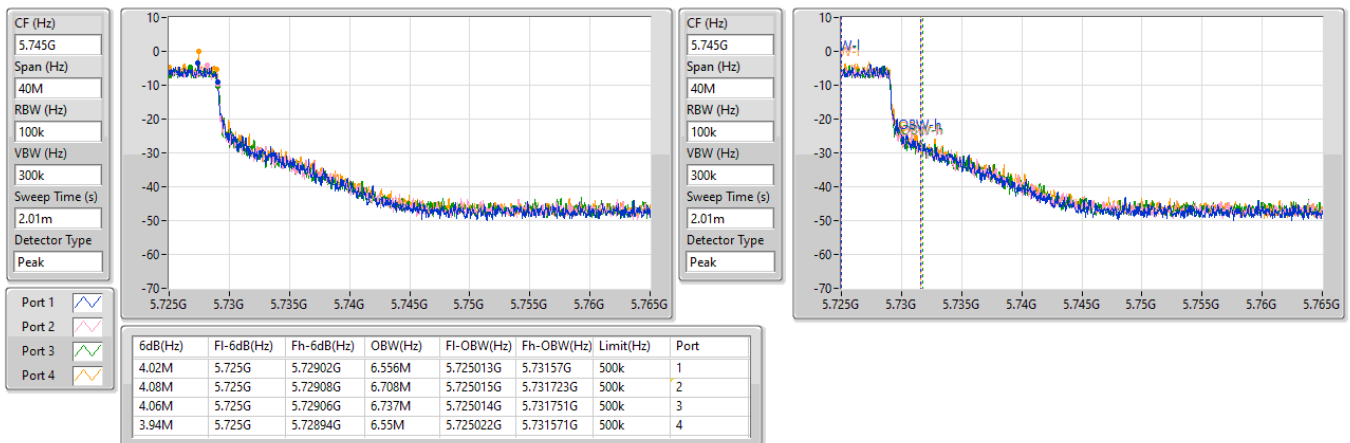


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX
EBW
5690MHz Straddle 5.725-5.85GHz

27/01/2026

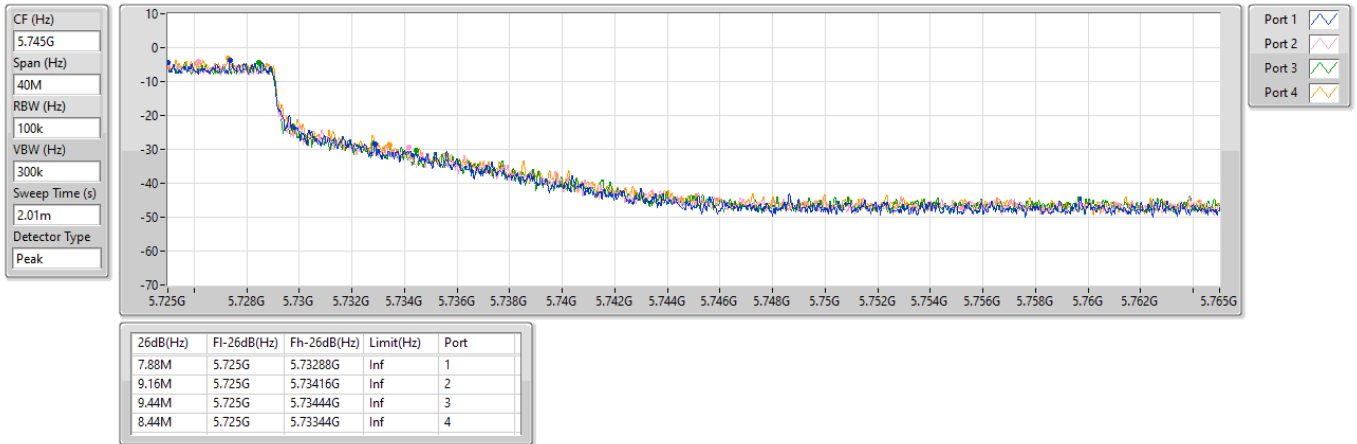
5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX
EBW
5775MHz

19/01/2026

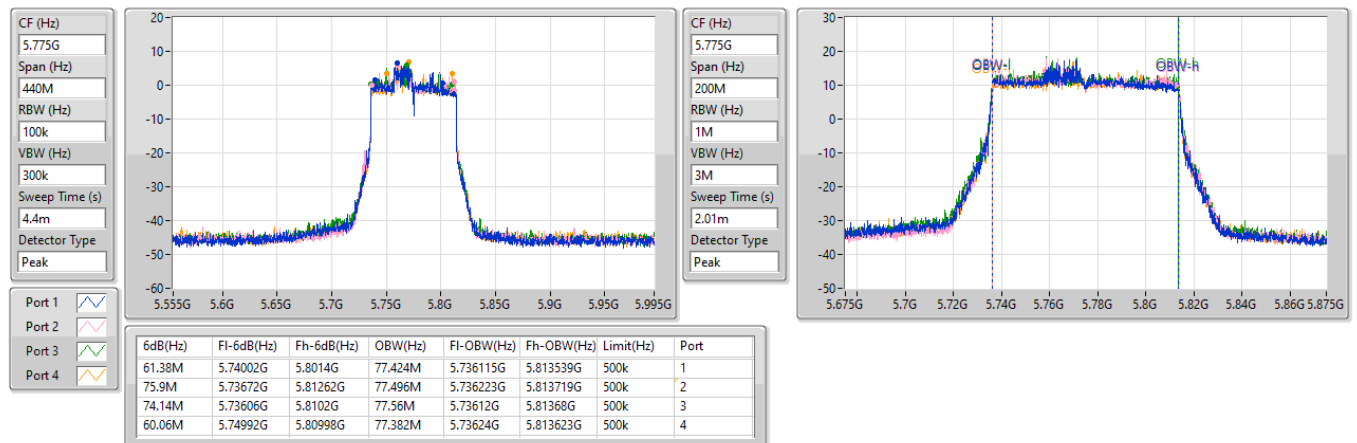


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

5775MHz

19/01/2026

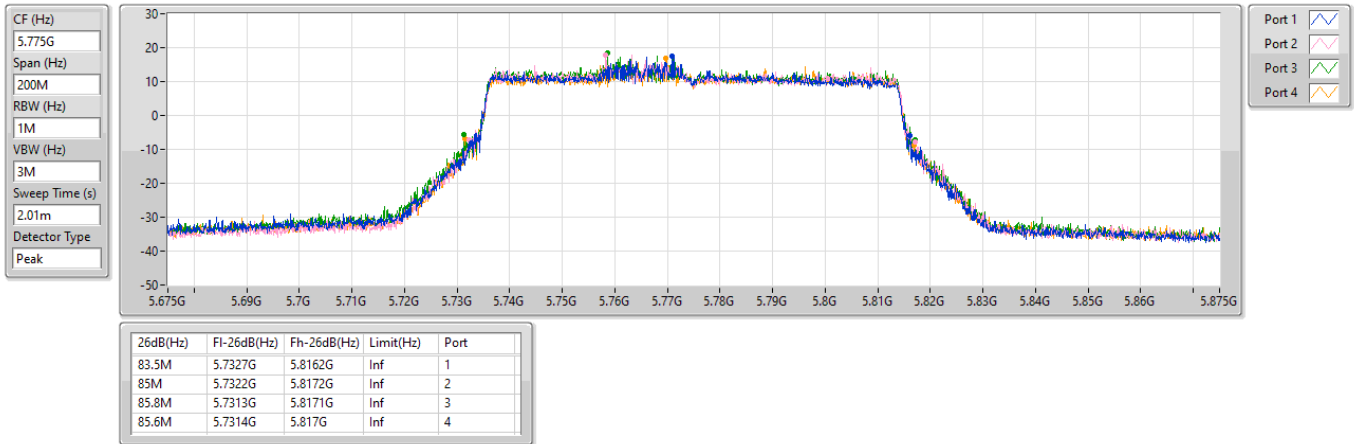


5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.15-5.25GHz

19/01/2026

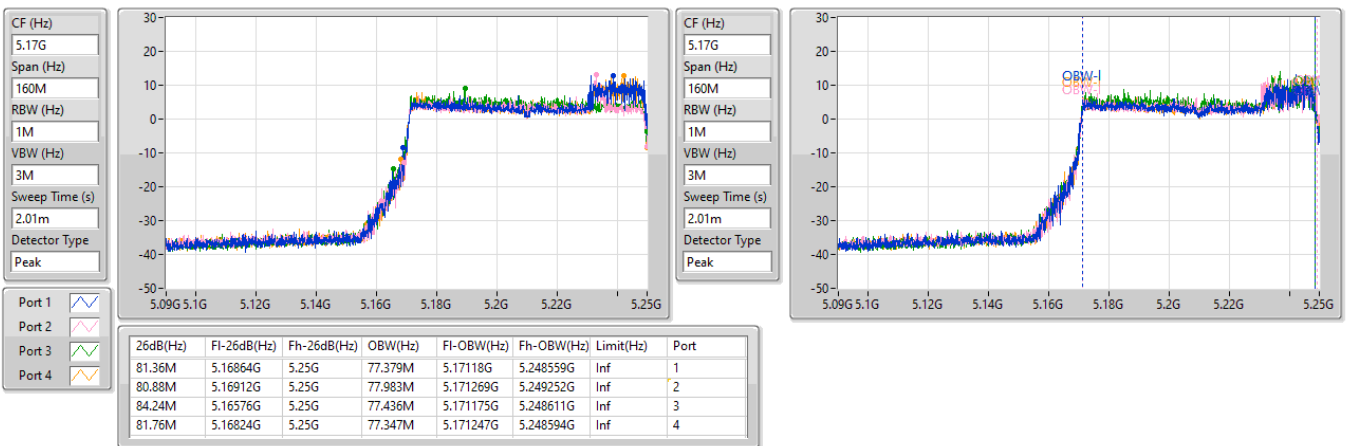


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.25-5.35GHz

27/01/2026

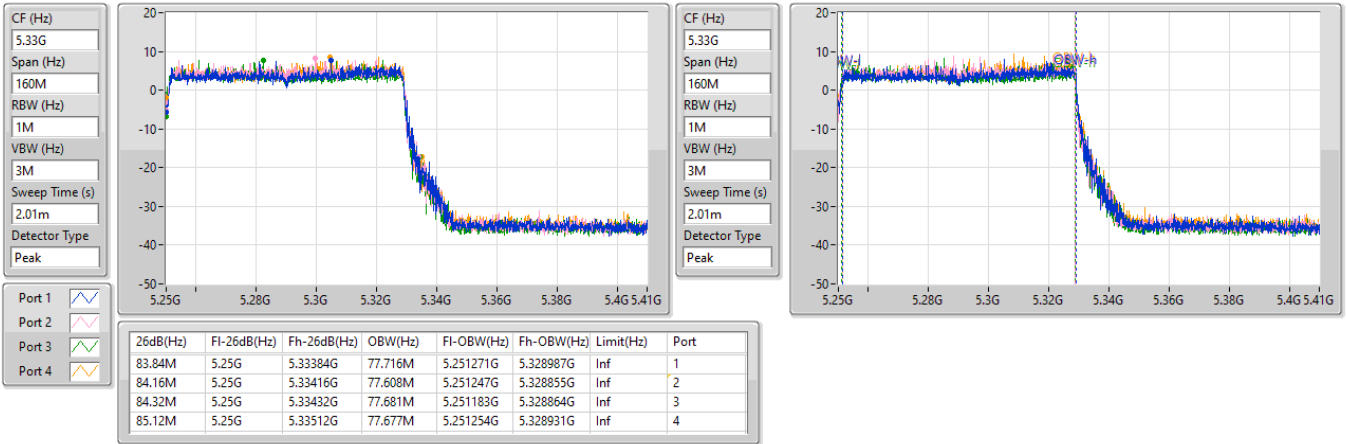


5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

5570MHz

19/01/2026

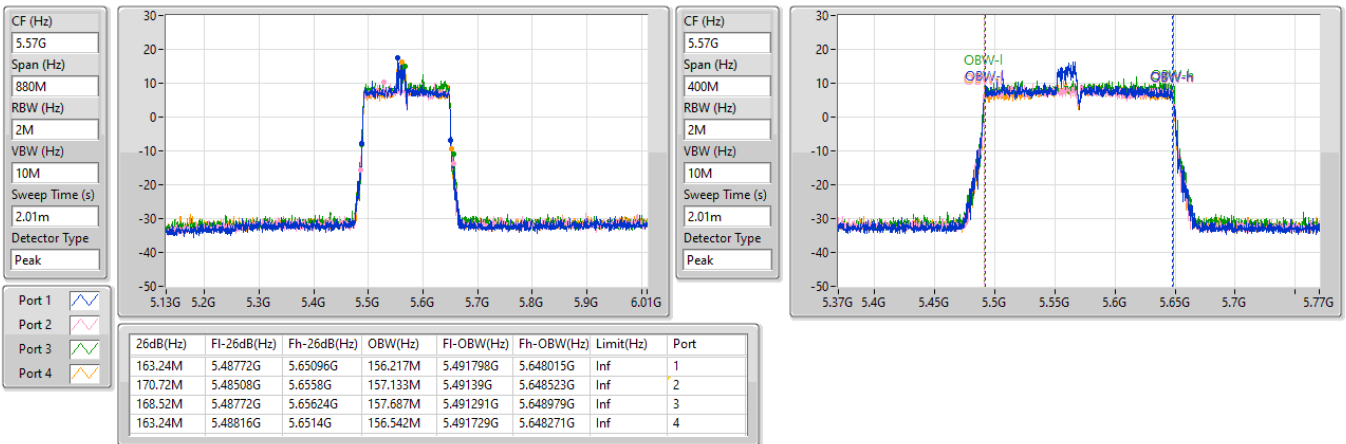


5.47-5.725GHz_EHT240,BF_240MHz_Nss1,(MCS0)_4TX

EBW

5610MHz Straddle 5.47-5.725GHz

19/01/2026

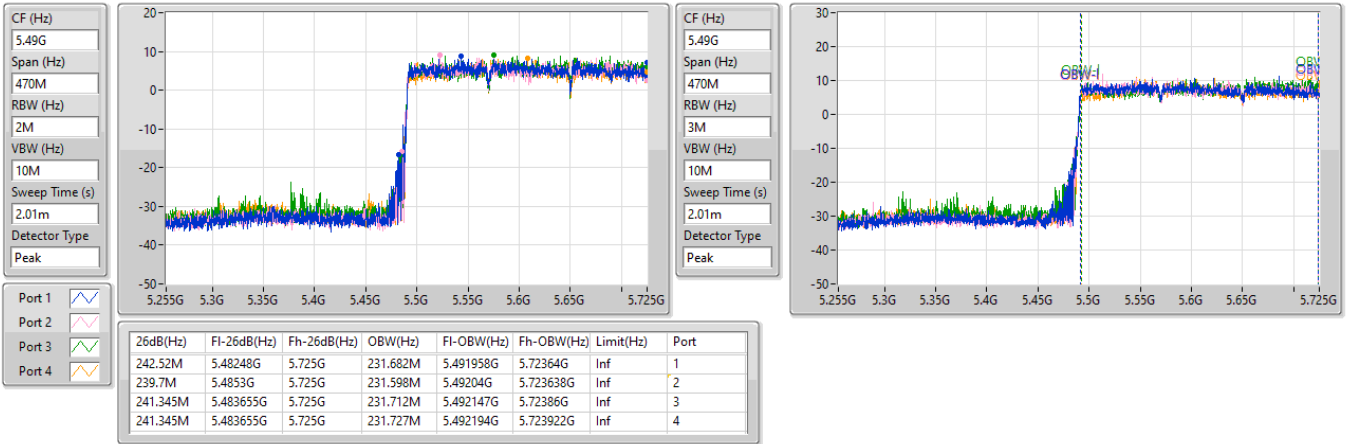


5.725-5.85GHz_EHT240,BF_240MHz_Nss1,(MCS0)_4TX

EBW

5610MHz Straddle 5.725-5.85GHz

19/01/2026

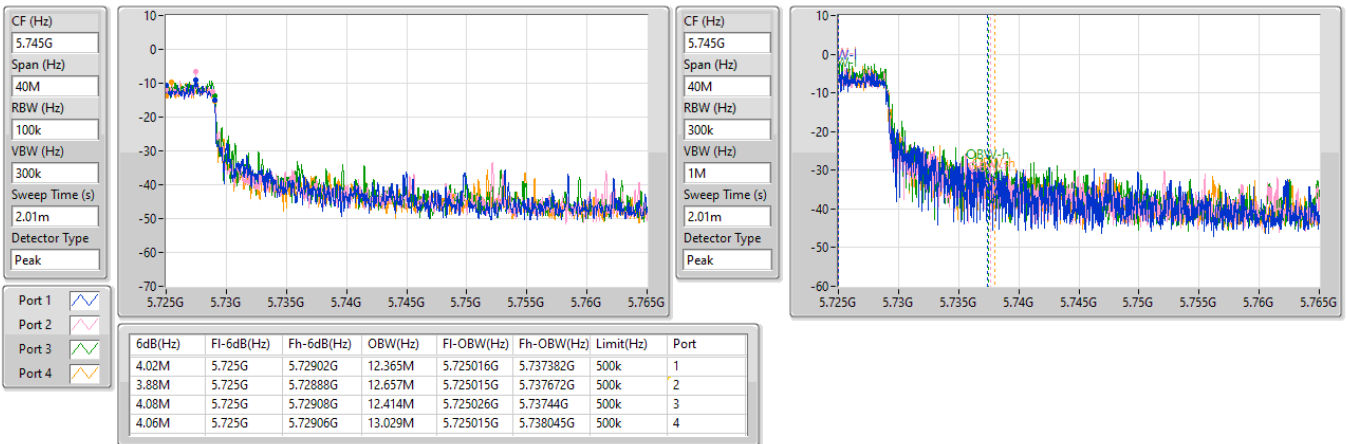


5.725-5.85GHz_EHT240,BF_240MHz_Nss1,(MCS0)_4TX

EBW

5610MHz Straddle 5.725-5.85GHz

19/01/2026

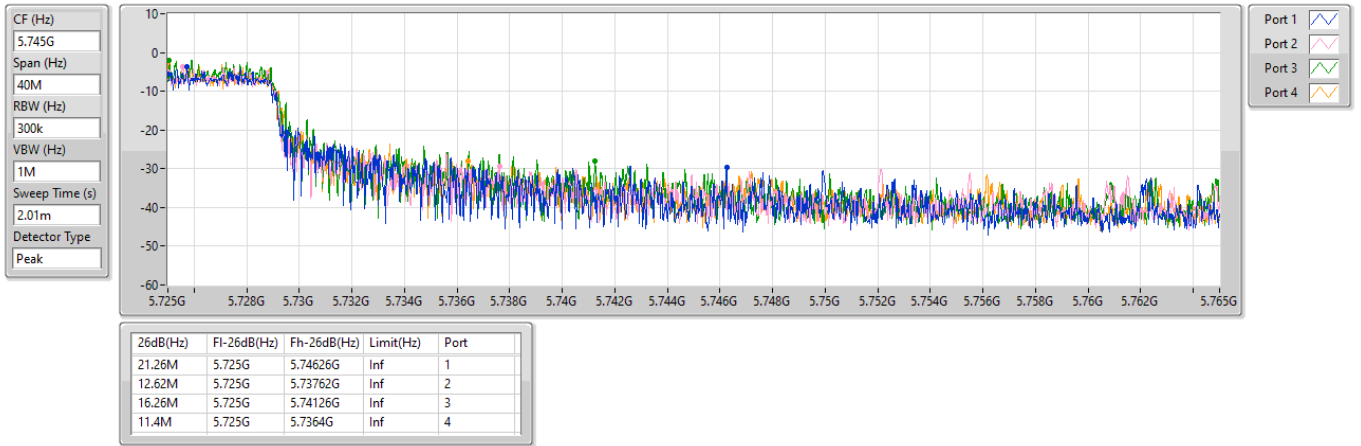

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	29.24	0.83946
802.11be EHT20-BF_Nss1,(MCS0)_4TX	28.81	0.76033
802.11be EHT40-BF_Nss1,(MCS0)_4TX	28.41	0.69343
802.11be EHT80-BF_Nss1,(MCS0)_4TX	25.52	0.35645
802.11be EHT160-BF_Nss1,(MCS0)_4TX	21.93	0.15596
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	23.21	0.20941
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.86	0.19320
802.11be EHT40-BF_Nss1,(MCS0)_4TX	23.04	0.20137
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.02	0.20045
802.11be EHT160-BF_Nss1,(MCS0)_4TX	21.84	0.15276
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	23.15	0.20654
802.11be EHT20-BF_Nss1,(MCS0)_4TX	22.95	0.19724
802.11be EHT40-BF_Nss1,(MCS0)_4TX	22.88	0.19409
802.11be EHT80-BF_Nss1,(MCS0)_4TX	22.92	0.19588
802.11be EHT160-BF_Nss1,(MCS0)_4TX	22.89	0.19454
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	22.94	0.19679
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	29.92	0.98175
802.11be EHT20-BF_Nss1,(MCS0)_4TX	29.65	0.92257
802.11be EHT40-BF_Nss1,(MCS0)_4TX	29.68	0.92897
802.11be EHT80-BF_Nss1,(MCS0)_4TX	27.58	0.57280
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	5.17	0.00329

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	5.09	20.42	20.39	20.86	20.88	26.66	30.00
5200MHz	Pass	5.09	21.42	21.17	21.23	21.76	27.42	30.00
5240MHz	Pass	5.09	23.31	23.13	23.37	23.04	29.24	30.00
5260MHz	Pass	4.99	17.06	17.18	17.04	17.27	23.16	23.98
5300MHz	Pass	4.99	17.43	17.25	16.58	17.17	23.14	23.98
5320MHz	Pass	4.99	17.33	17.39	16.84	17.19	23.21	23.98
5500MHz	Pass	4.83	16.95	17.06	16.52	17.28	22.98	23.98
5580MHz	Pass	4.83	16.98	16.76	17.43	17.31	23.15	23.98
5700MHz	Pass	4.83	16.83	16.77	16.95	17.11	22.94	23.98
5720MHz Straddle 5.47-5.725GHz	Pass	4.83	15.6	15.62	15.71	16.15	21.80	23.01
5720MHz Straddle 5.725-5.85GHz	Pass	4.49	9.54	9.55	9.63	10.22	15.76	30.00
5745MHz	Pass	4.49	23.55	23.93	23.51	23.74	29.71	30.00
5785MHz	Pass	4.49	23.79	23.97	23.66	23.85	29.84	30.00
5825MHz	Pass	4.49	23.64	24.28	23.78	23.89	29.92	30.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.75	20.96	20.38	21.21	20.16	26.72	29.25
5200MHz	Pass	6.75	21.45	21.57	21.74	20.93	27.45	29.25
5240MHz	Pass	6.75	22.63	22.78	22.93	22.81	28.81	29.25
5260MHz	Pass	6.90	17.17	16.92	16.34	16.28	22.71	23.08
5300MHz	Pass	6.90	17.02	17.15	16.65	16.51	22.86	23.08
5320MHz	Pass	6.90	17.23	17.18	16.38	16.32	22.82	23.08
5500MHz	Pass	6.96	16.52	17.03	16.29	17.35	22.84	23.02
5580MHz	Pass	6.96	16.45	16.82	17.32	17.08	22.95	23.02
5700MHz	Pass	6.96	16.34	16.71	16.52	16.87	22.64	23.02
5720MHz Straddle 5.47-5.725GHz	Pass	6.96	15.61	16.11	16.1	16.03	21.99	22.11
5720MHz Straddle 5.725-5.85GHz	Pass	6.24	10.7	11.09	10.78	11.46	17.04	29.76
5745MHz	Pass	6.24	22.91	23.09	22.24	23.05	28.86	29.76
5785MHz	Pass	6.24	24.01	23.52	23.66	23.31	29.65	29.76
5825MHz	Pass	6.24	22.63	23.24	23.12	22.65	28.94	29.76
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.75	19.73	19.58	20.34	19.46	25.81	29.25
5230MHz	Pass	6.75	22.53	22.21	22.55	22.24	28.41	29.25
5270MHz	Pass	6.90	16.74	16.91	16.34	16.65	22.69	23.08
5310MHz	Pass	6.90	17.11	17.49	16.65	16.76	23.04	23.08
5510MHz	Pass	6.96	16.59	16.95	16.48	17.12	22.81	23.02
5550MHz	Pass	6.96	16.73	16.64	16.87	17.18	22.88	23.02
5670MHz	Pass	6.96	16.46	16.53	16.31	16.74	22.53	23.02
5710MHz Straddle 5.47-5.725GHz	Pass	6.96	16.45	16.86	16.59	16.96	22.74	23.02
5710MHz Straddle 5.725-5.85GHz	Pass	6.24	7.33	7.16	7.05	7.97	13.41	29.76
5755MHz	Pass	6.24	22.92	22.81	23.12	22.65	28.90	29.76
5795MHz	Pass	6.24	23.84	23.51	23.74	23.54	29.68	29.76
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.75	19.72	19.45	19.57	19.24	25.52	29.25
5290MHz	Pass	6.90	17.13	17.42	16.59	16.83	23.02	23.08
5530MHz	Pass	6.96	16.54	16.87	16.76	16.68	22.73	23.02
5610MHz	Pass	6.96	16.32	16.24	16.96	16.07	22.43	23.02
5690MHz Straddle 5.47-5.725GHz	Pass	6.96	16.64	16.81	16.45	17.62	22.92	23.02
5690MHz Straddle 5.725-5.85GHz	Pass	6.24	3.72	3.72	3.6	4.73	9.99	29.76
5775MHz	Pass	6.24	21.48	21.52	22.02	21.17	27.58	29.76
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.75	16.07	15.4	16.14	15.98	21.93	29.25
5250MHz Straddle 5.25-5.35GHz	Pass	6.90	16.48	15.67	14.91	16.05	21.84	23.08
5570MHz	Pass	6.96	16.78	16.85	17.27	16.53	22.89	23.02
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-



Average Power

Appendix C


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
5610MHz Straddle 5.47-5.725GHz	Pass	6.96	16.68	16.87	17.03	17.08	22.94	23.02
5610MHz Straddle 5.725-5.85GHz	Pass	6.24	-0.98	-1.2	-0.23	-1.06	5.17	29.76

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

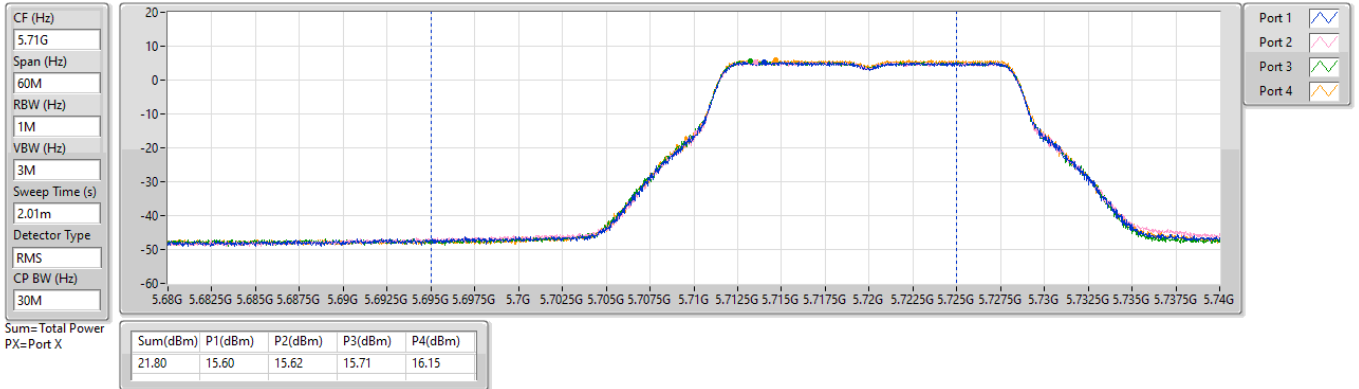

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

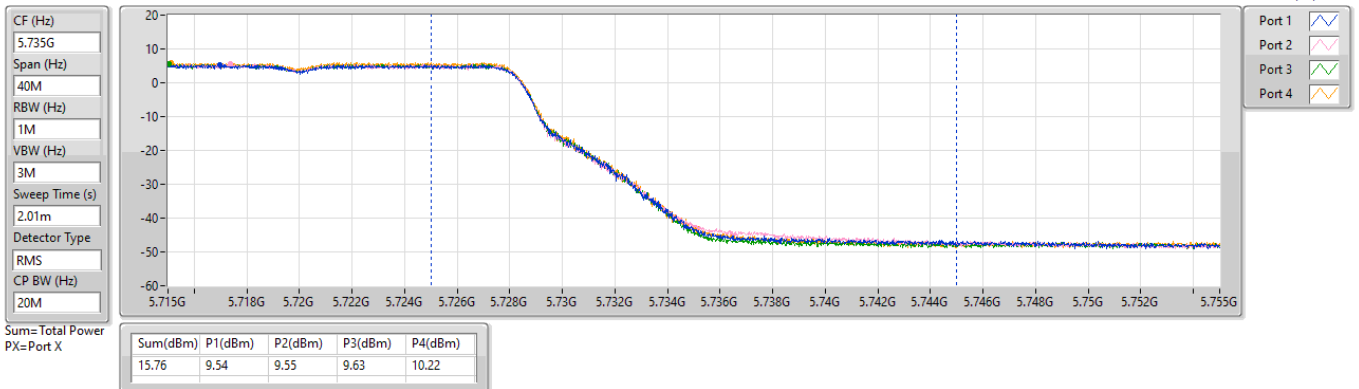

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

AV Power


5720MHz Straddle 5.47-5.725GHz_TX

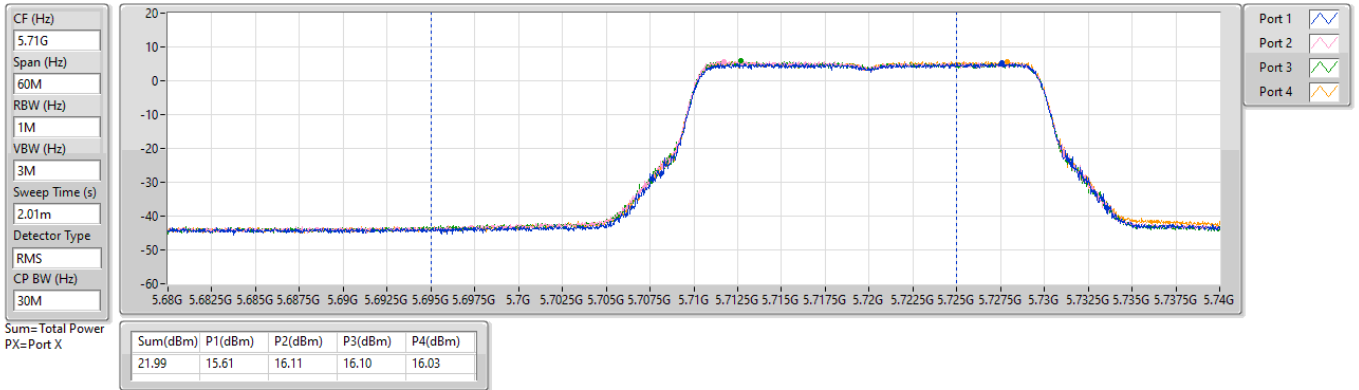

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

AV Power


5720MHz Straddle 5.725-5.85GHz_TX

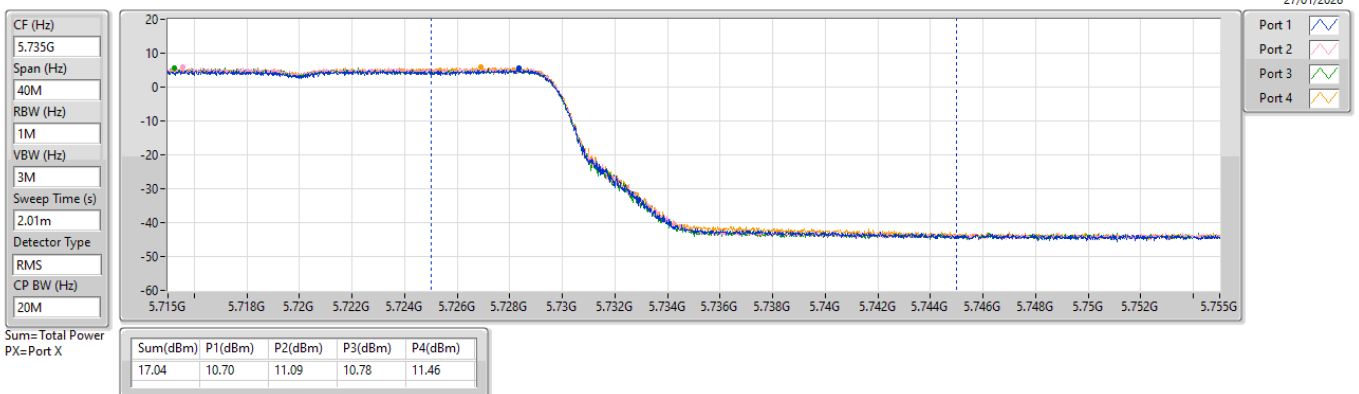

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

AV Power


5710MHz Straddle 5.47-5.725GHz_TX

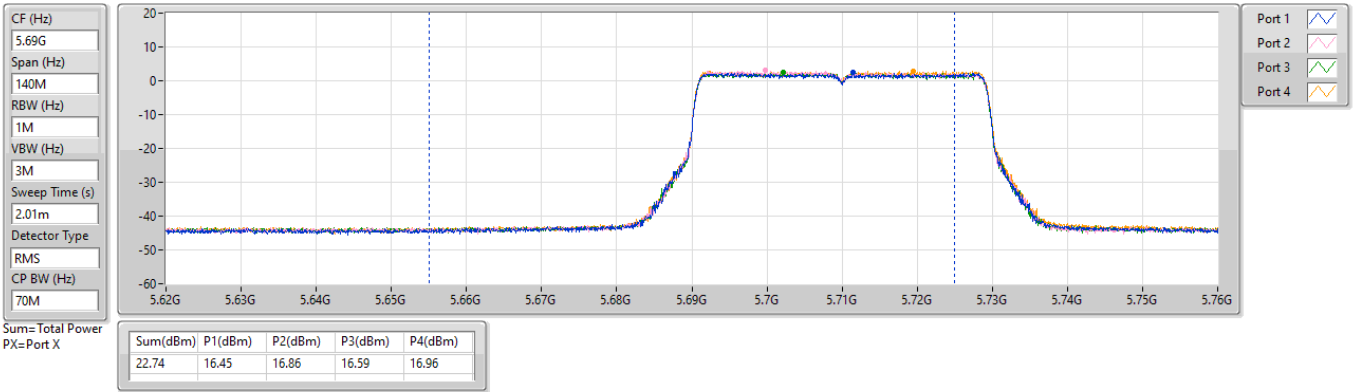

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

AV Power


5710MHz Straddle 5.725-5.85GHz_TX

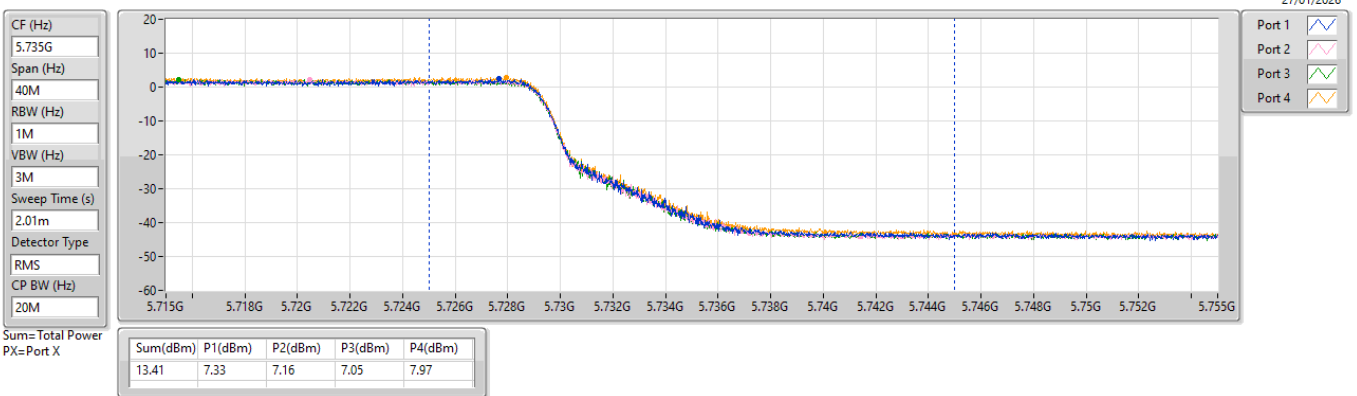

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

AV Power


5690MHz Straddle 5.47-5.725GHz_TX

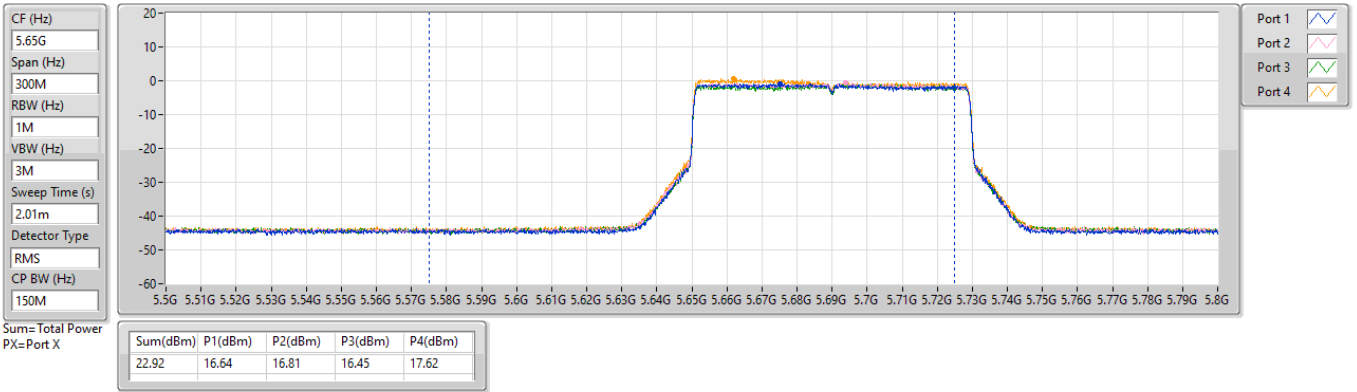

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

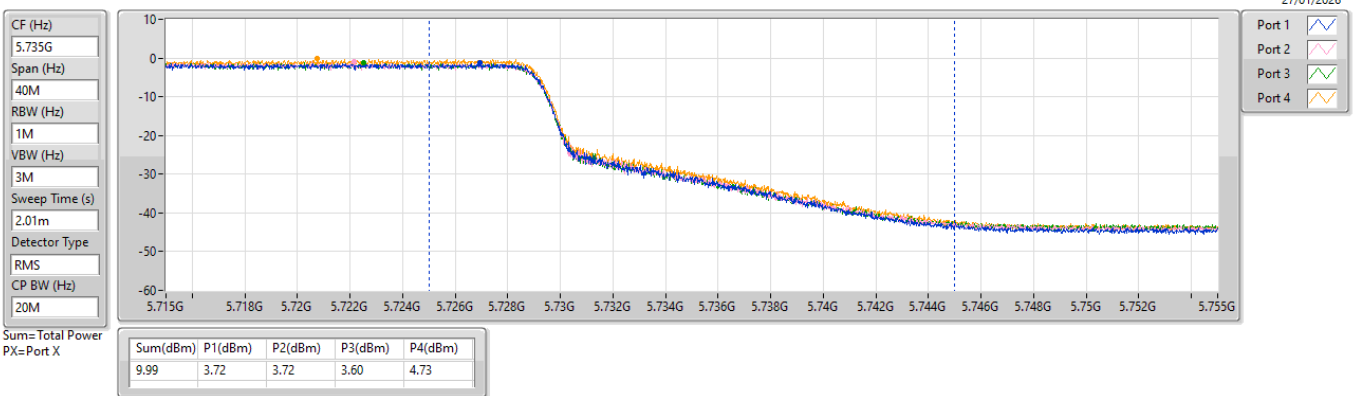


5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

27/01/2026

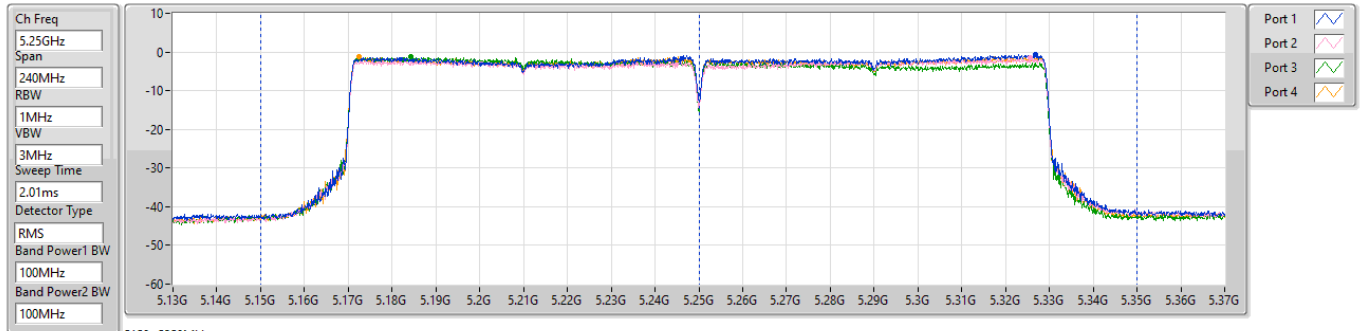

Sum= Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
21.93	16.07	15.40	16.14	15.98

5250~5350MHz


Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
21.84	16.48	15.67	14.91	16.05

5.47-5.725GHz_EHT240,BF_240MHz_Nss1,(MCS0)_4TX

AV Power


5610MHz Straddle 5.47-5.725GHz_TX

27/01/2026

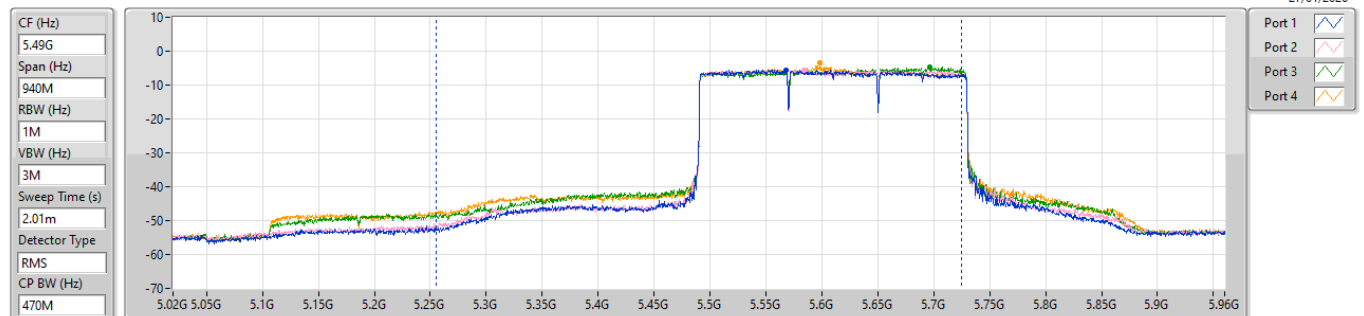

Sum= Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
22.94	16.68	16.87	17.03	17.08

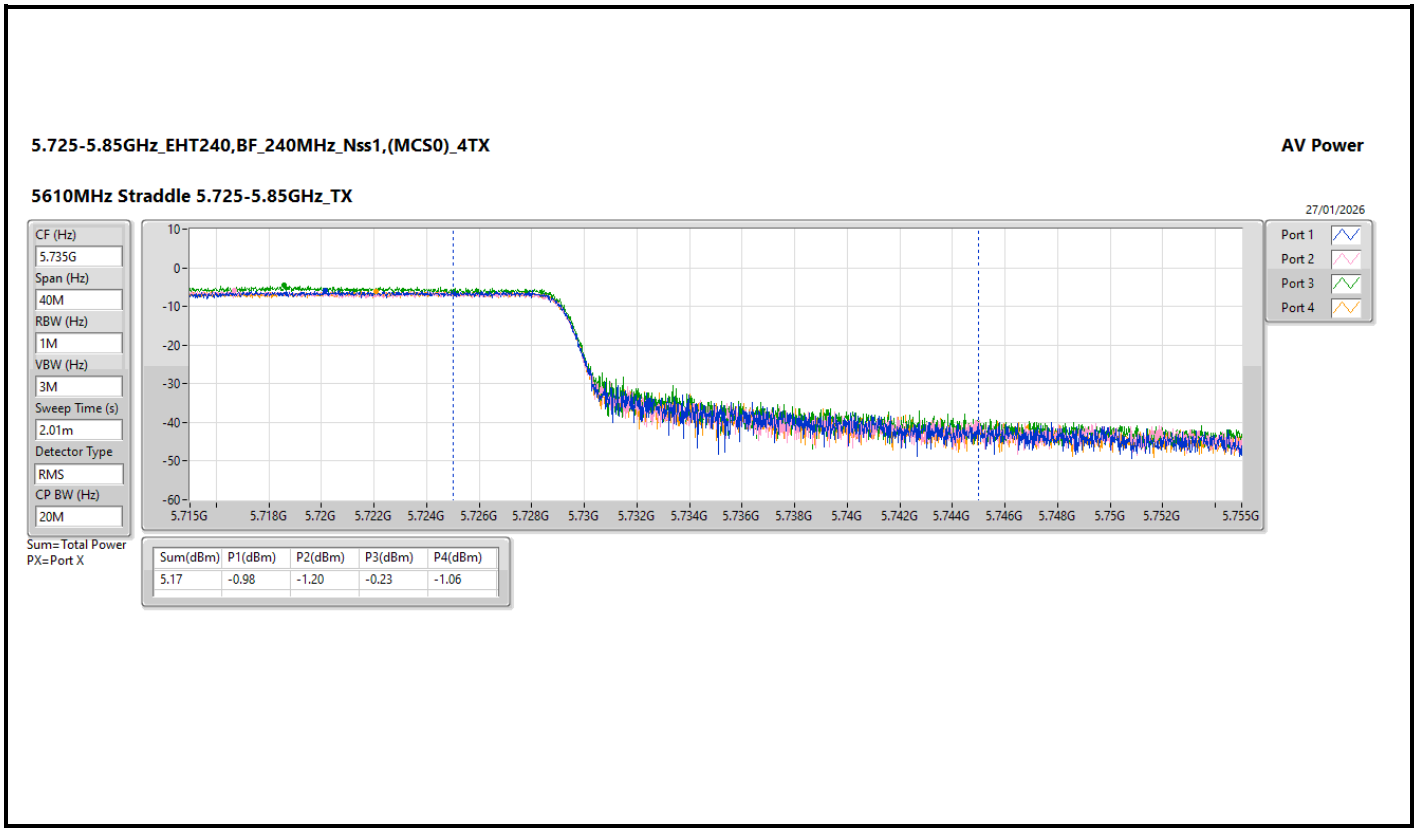

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_4TX	15.99
802.11be EHT20-BF_Nss1,(MCS0)_4TX	14.89
802.11be EHT40-BF_Nss1,(MCS0)_4TX	11.83
802.11be EHT80-BF_Nss1,(MCS0)_4TX	6.06
802.11be EHT160-BF_Nss1,(MCS0)_4TX	2.35
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_4TX	9.99
802.11be EHT20-BF_Nss1,(MCS0)_4TX	9.30
802.11be EHT40-BF_Nss1,(MCS0)_4TX	6.35
802.11be EHT80-BF_Nss1,(MCS0)_4TX	3.44
802.11be EHT160-BF_Nss1,(MCS0)_4TX	2.36
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_4TX	9.84
802.11be EHT20-BF_Nss1,(MCS0)_4TX	9.47
802.11be EHT40-BF_Nss1,(MCS0)_4TX	6.55
802.11be EHT80-BF_Nss1,(MCS0)_4TX	3.37
802.11be EHT160-BF_Nss1,(MCS0)_4TX	0.29
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	-0.57
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_4TX	15.32
802.11be EHT20-BF_Nss1,(MCS0)_4TX	14.50
802.11be EHT40-BF_Nss1,(MCS0)_4TX	11.62
802.11be EHT80-BF_Nss1,(MCS0)_4TX	6.21
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	-3.50

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.75	7.38	7.14	7.55	7.79	13.45	16.25
5200MHz	Pass	6.75	8.32	8	7.84	8.63	14.17	16.25
5240MHz	Pass	6.75	10.09	10	10.28	9.78	15.99	16.25
5260MHz	Pass	6.90	3.72	4.32	4.04	4.17	9.99	10.10
5300MHz	Pass	6.90	4.25	3.95	3.13	3.9	9.78	10.10
5320MHz	Pass	6.90	4.08	4.26	3.67	4.11	9.96	10.10
5500MHz	Pass	6.96	3.7	3.75	3.21	4.17	9.68	10.04
5580MHz	Pass	6.96	3.8	3.47	4.21	4.05	9.84	10.04
5700MHz	Pass	6.96	3.69	3.39	3.66	3.96	9.65	10.04
5720MHz Straddle 5.47-5.725GHz	Pass	6.96	3.57	3.61	3.68	4.1	9.72	10.04
5720MHz Straddle 5.725-5.85GHz	Pass	6.24	1.76	1.75	1.92	2.66	8.02	29.76
5745MHz	Pass	6.24	8.79	9.15	9.02	8.96	14.85	29.76
5785MHz	Pass	6.24	9.04	9.19	9.03	9.27	15.12	29.76
5825MHz	Pass	6.24	9	9.55	9.33	9.54	15.32	29.76
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5180MHz	Pass	6.75	7.3	6.8	7.67	6.58	13.06	16.25
5200MHz	Pass	6.75	8.21	7.74	8.19	7.38	13.83	16.25
5240MHz	Pass	6.75	8.91	8.92	9.12	8.96	14.89	16.25
5260MHz	Pass	6.90	3.2	3.3	2.72	3.08	8.99	10.10
5300MHz	Pass	6.90	3.92	3.99	2.73	2.4	9.23	10.10
5320MHz	Pass	6.90	3.42	4.05	2.93	3.02	9.30	10.10
5500MHz	Pass	6.96	2.71	3.5	2.51	3.51	9.03	10.04
5580MHz	Pass	6.96	2.75	3.16	4.03	3.36	9.27	10.04
5700MHz	Pass	6.96	2.73	2.72	2.6	3.2	8.75	10.04
5720MHz Straddle 5.47-5.725GHz	Pass	6.96	3.01	3.78	3.71	3.53	9.47	10.04
5720MHz Straddle 5.725-5.85GHz	Pass	6.24	1.64	1.94	1.67	2.26	7.82	29.76
5745MHz	Pass	6.24	7.65	7.86	7.98	7.52	13.66	29.76
5785MHz	Pass	6.24	9.07	8.34	8.64	8.17	14.50	29.76
5825MHz	Pass	6.24	7.41	8.1	8.17	7.48	13.76	29.76
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5190MHz	Pass	6.75	3.42	2.85	3.86	3.37	9.35	16.25
5230MHz	Pass	6.75	6.23	5.73	6.37	5.58	11.83	16.25
5270MHz	Pass	6.90	-0.35	0.99	-0.34	-0.05	5.89	10.10
5310MHz	Pass	6.90	0.66	1	-0.07	-0.09	6.35	10.10
5510MHz	Pass	6.96	-0.16	0.37	-0.28	0.5	5.96	10.04
5550MHz	Pass	6.96	-0.03	0.08	0.41	0.6	6.17	10.04
5670MHz	Pass	6.96	-0.51	-0.29	-0.6	0.27	5.63	10.04
5710MHz Straddle 5.47-5.725GHz	Pass	6.96	0.32	0.68	0.51	0.82	6.55	10.04
5710MHz Straddle 5.725-5.85GHz	Pass	6.24	-1.26	-1.46	-1.62	-0.7	4.68	29.76
5755MHz	Pass	6.24	4.73	4.7	5.08	4.55	10.70	29.76
5795MHz	Pass	6.24	6.23	5.42	5.55	5.51	11.62	29.76
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5210MHz	Pass	6.75	0.38	-0.09	0.17	0.28	6.06	16.25
5290MHz	Pass	6.90	-2.39	-1.77	-3.14	-2.8	3.44	10.10
5530MHz	Pass	6.96	-2.42	-2.33	-2.56	-2.43	3.29	10.04
5610MHz	Pass	6.96	-2.61	-2.74	-1.92	-3.1	3.17	10.04
5690MHz Straddle 5.47-5.725GHz	Pass	6.96	-2.68	-2.75	-2.95	-1.59	3.37	10.04
5690MHz Straddle 5.725-5.85GHz	Pass	6.24	-4.91	-4.98	-5.05	-3.91	1.22	29.76
5775MHz	Pass	6.24	0.33	0.44	1.16	-0.42	6.21	29.76
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.75	-3.35	-4.19	-3.43	-3.33	2.35	16.25
5250MHz Straddle 5.25-5.35GHz	Pass	6.90	-2.71	-3.52	-4.57	-3.47	2.36	10.10
5570MHz	Pass	6.96	-4.67	-5.84	-4.99	-5.43	0.29	10.04
EHT240,BF_240MHz_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5610MHz Straddle 5.47-5.725GHz	Pass	6.96	-6.51	-6.51	-6.11	-6.52	-0.57	10.04
5610MHz Straddle 5.725-5.85GHz	Pass	6.24	-9.64	-9.69	-8.67	-9.73	-3.50	29.76


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5180MHz

19/01/2026

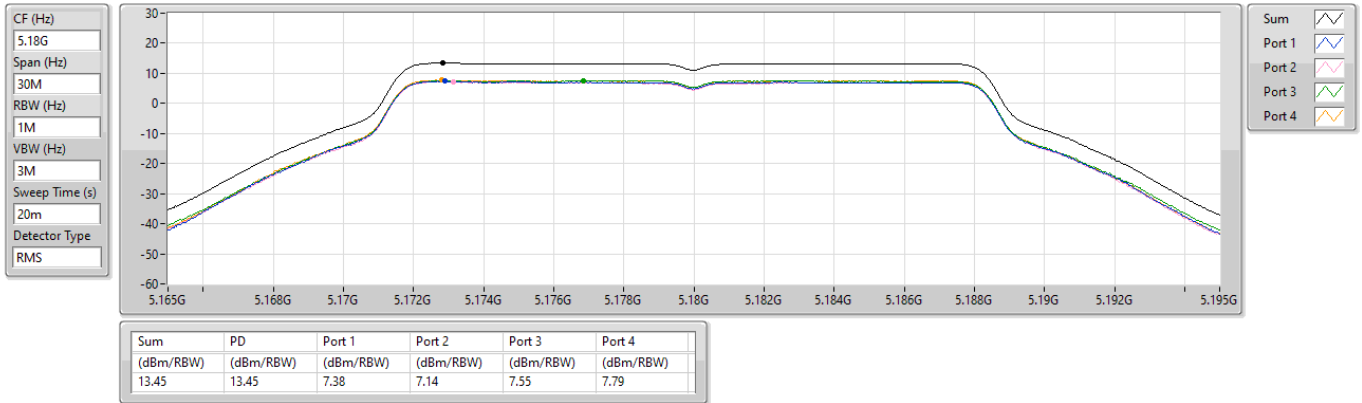


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5200MHz

19/01/2026

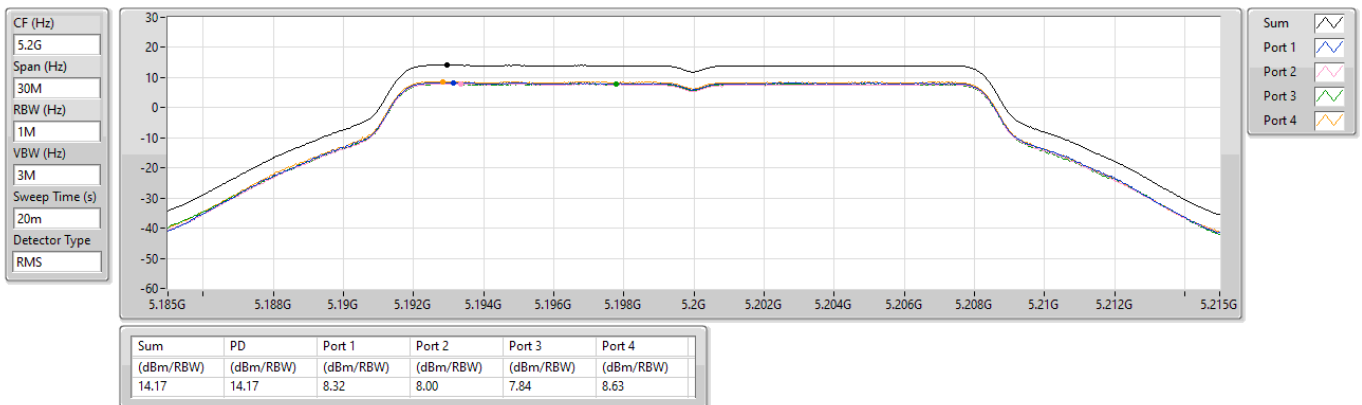


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5240MHz

27/01/2026

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

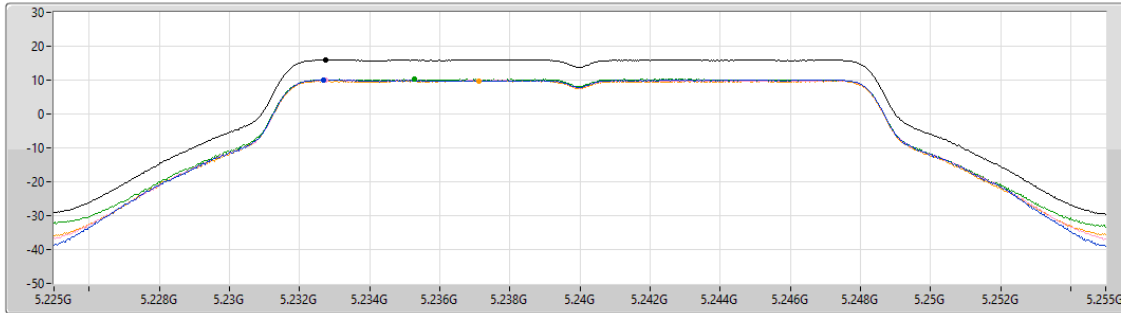

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.99	15.99	10.09	10.00	10.28	9.78


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5260MHz

27/01/2026

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

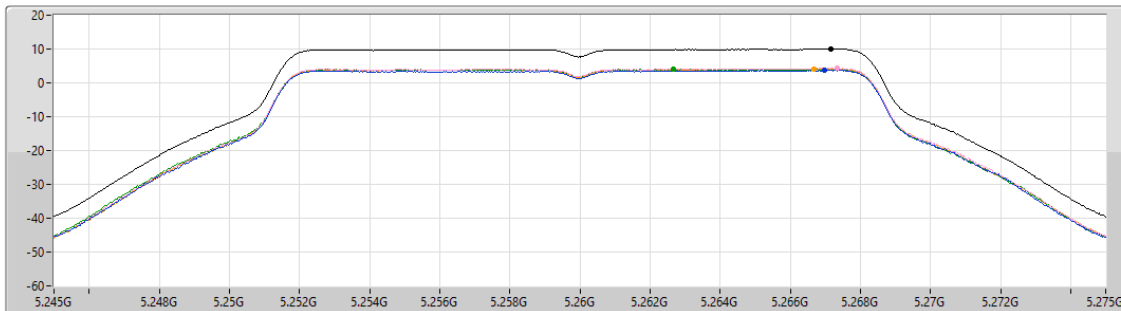

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.99	9.99	3.72	4.32	4.04	4.17


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5300MHz

23/01/2026

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

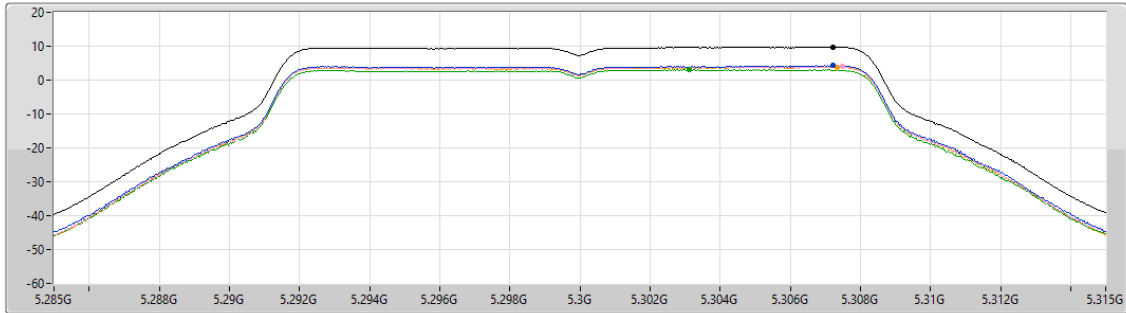

Sum	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.78	9.78	4.25	3.95	3.13


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5320MHz

23/01/2026

CF (Hz)
5.32G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

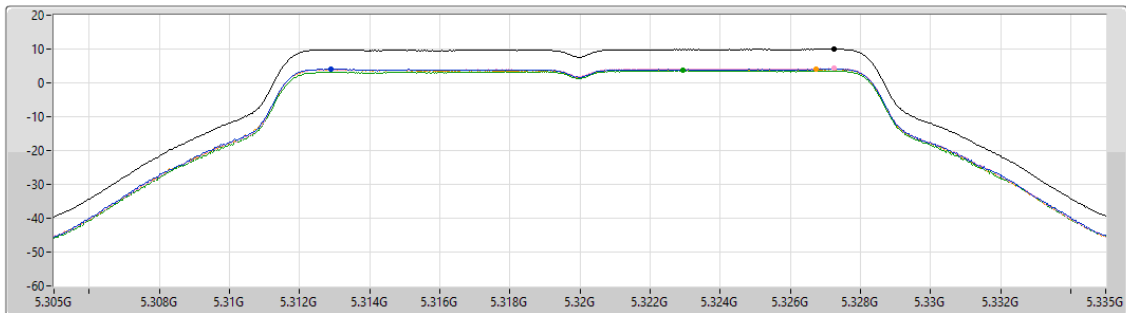

Sum	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.96	9.96	4.08	4.26	3.67


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5500MHz

27/01/2026

CF (Hz)
5.5G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

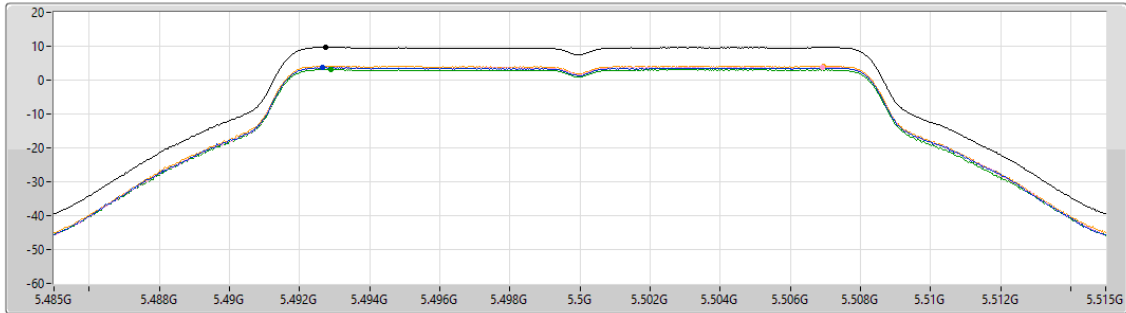

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.68	9.68	3.70	3.75	3.21	4.17


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5580MHz

27/01/2026

CF (Hz)
5.58G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

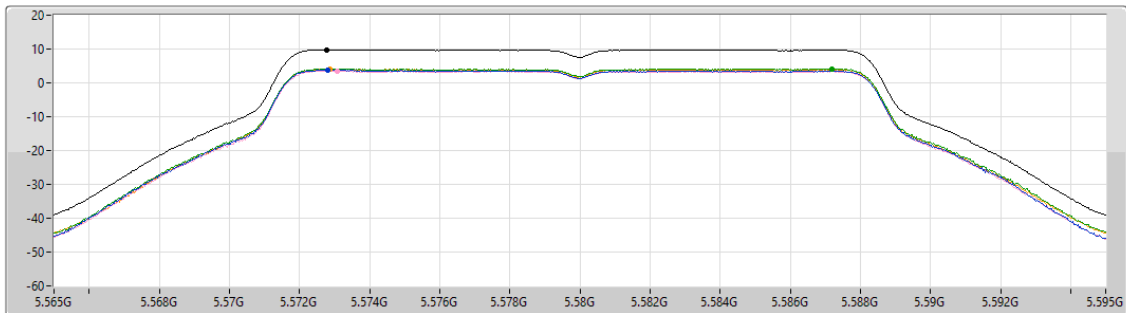

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.84	9.84	3.80	3.47	4.21	4.05

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5700MHz

27/01/2026

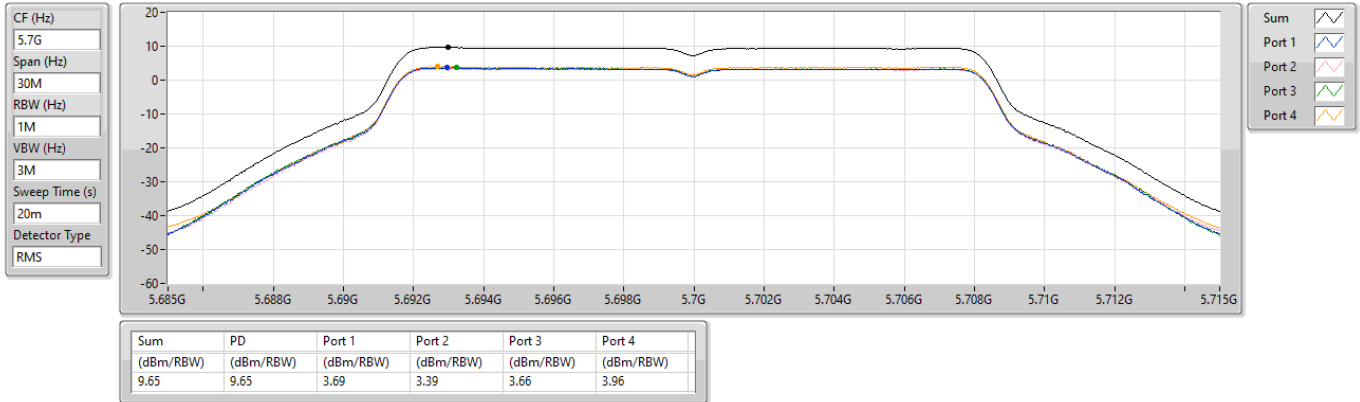


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

27/01/2026

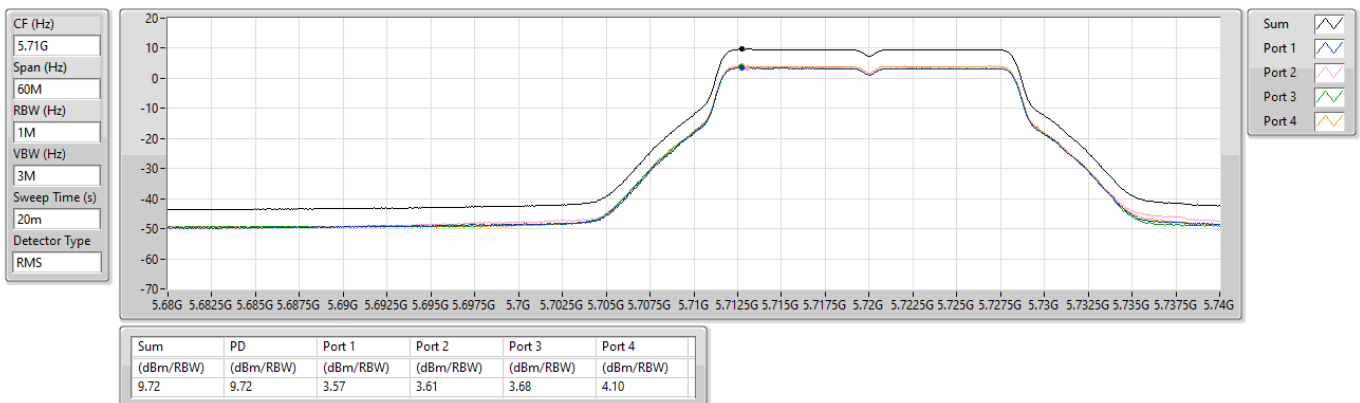


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

27/01/2026

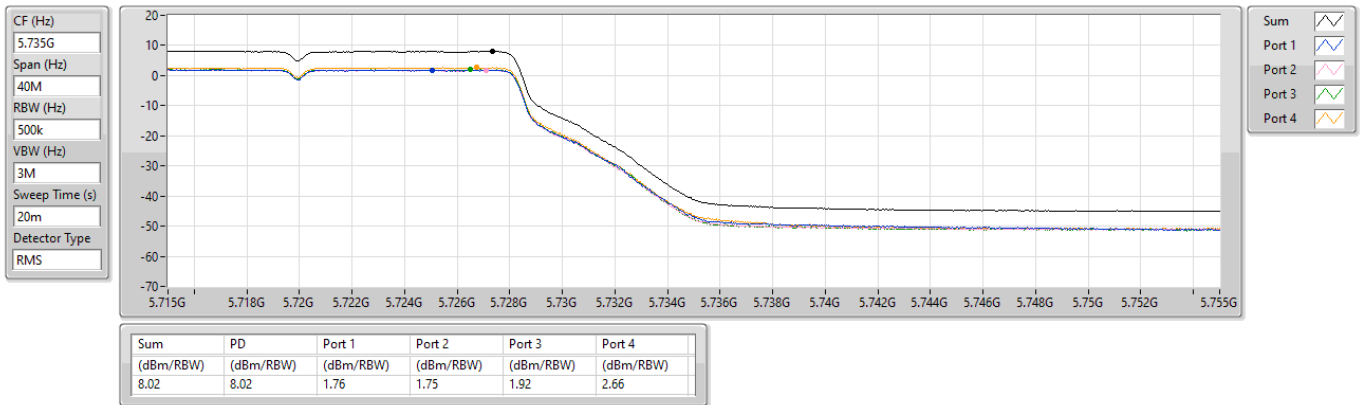


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5745MHz

19/01/2026

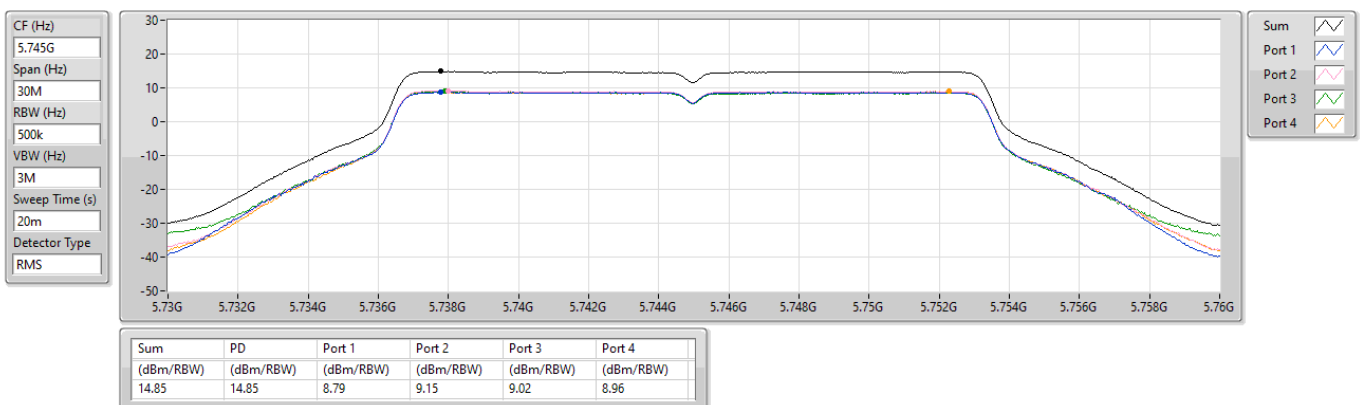


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5785MHz

19/01/2026

CF (Hz)
5.785G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

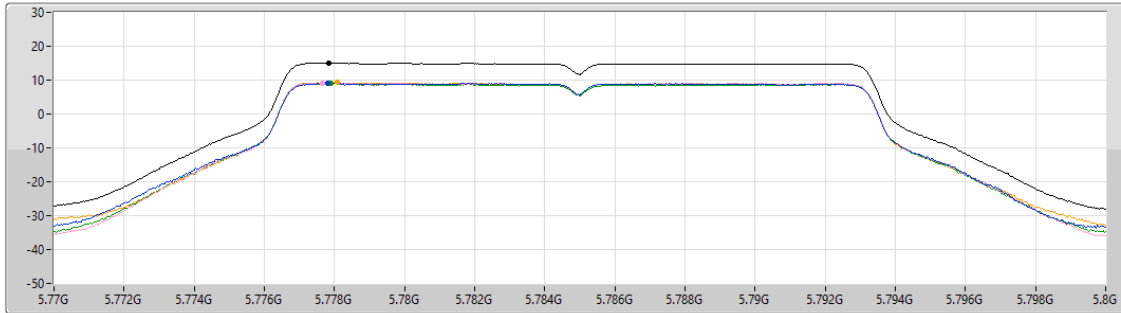

Sum
Port 1
Port 2
Port 3
Port 4


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5825MHz

19/01/2026

CF (Hz)
5.825G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

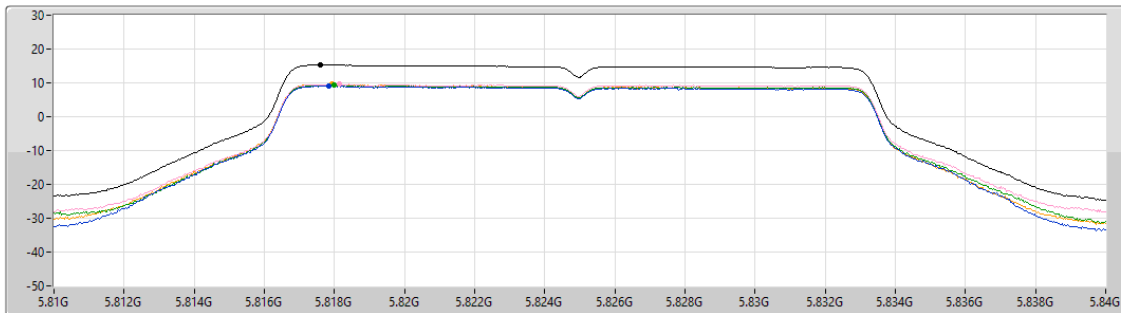


Sum
Port 1
Port 2
Port 3
Port 4

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5180MHz

19/01/2026

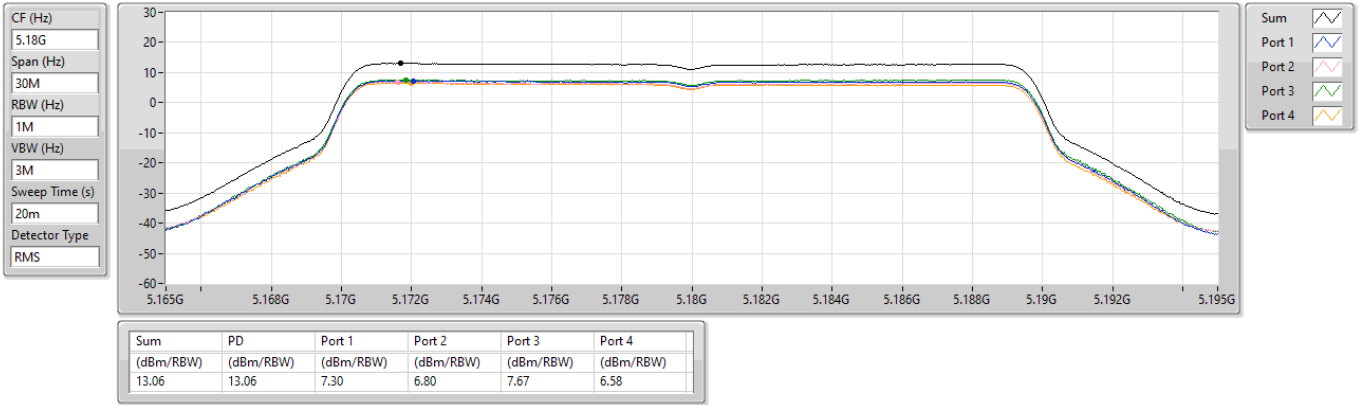


5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5200MHz

19/01/2026

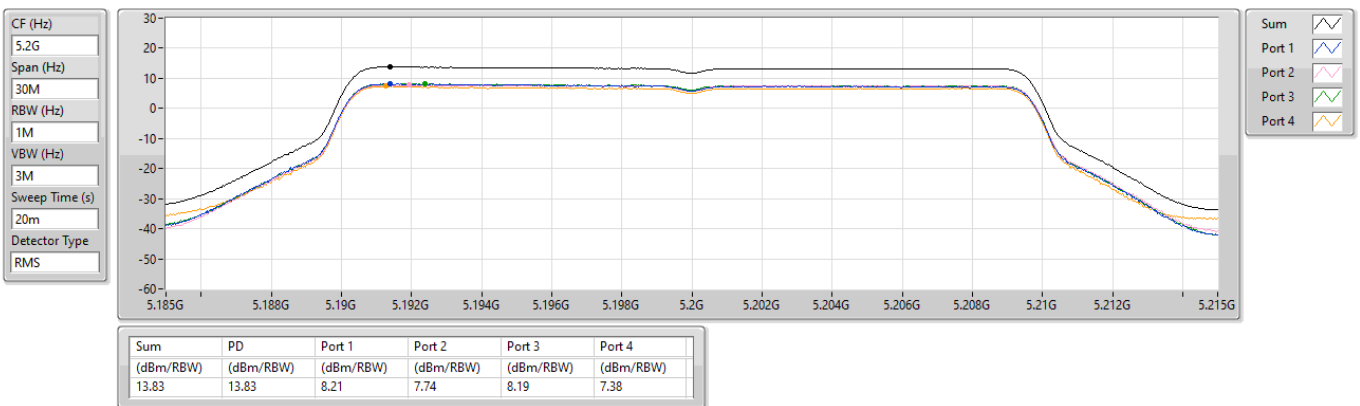


5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5240MHz

26/01/2026

CF (Hz)
5.24G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

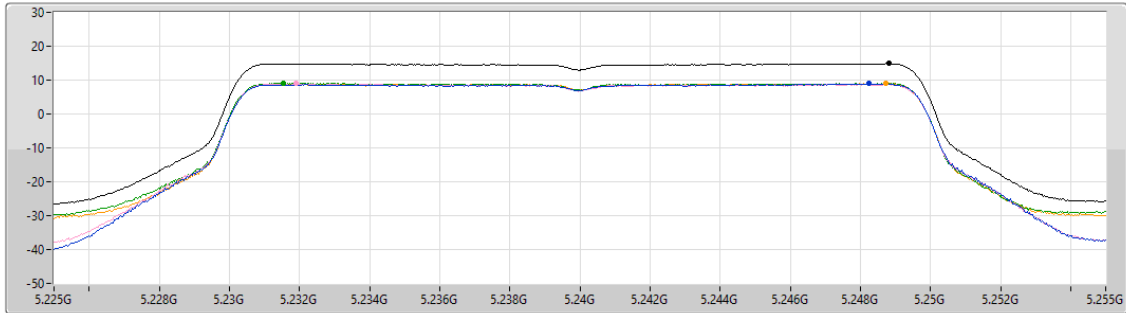

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.89	14.89	8.91	8.92	9.12	8.96


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5260MHz

26/01/2026

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

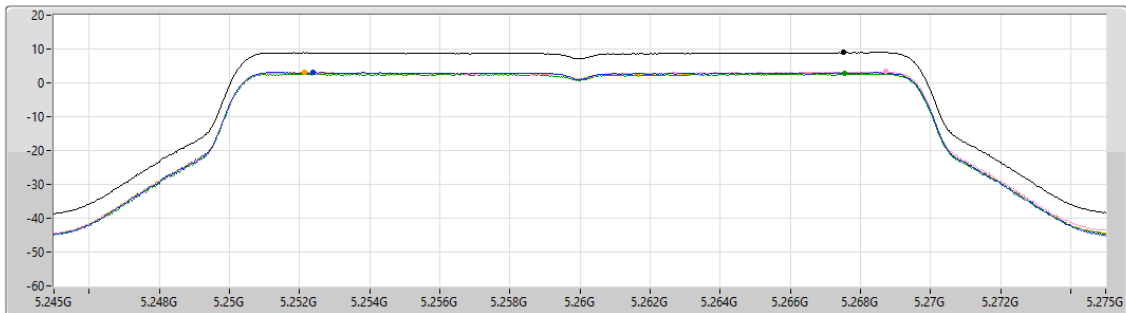


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.99	8.99	3.20	3.30	2.72	3.08

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5300MHz

23/01/2026

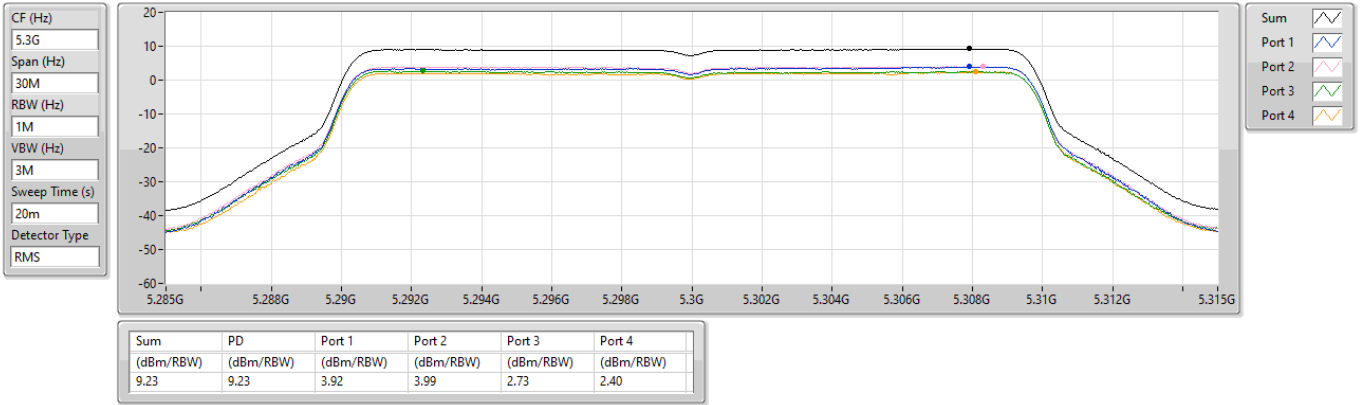


5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5320MHz

26/01/2026

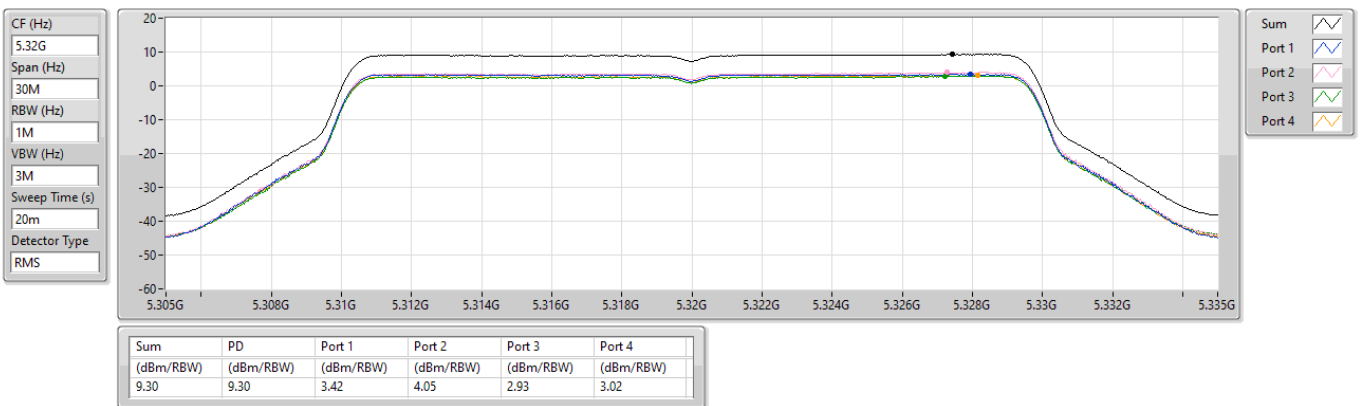


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5500MHz

27/01/2026

CF (Hz)
5.5G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

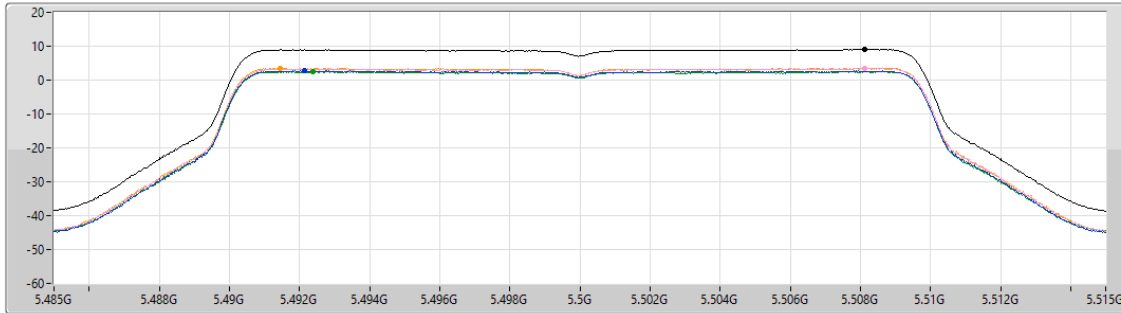

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.03	9.03	2.71	3.50	2.51	3.51


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5580MHz

27/01/2026

CF (Hz)
5.58G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

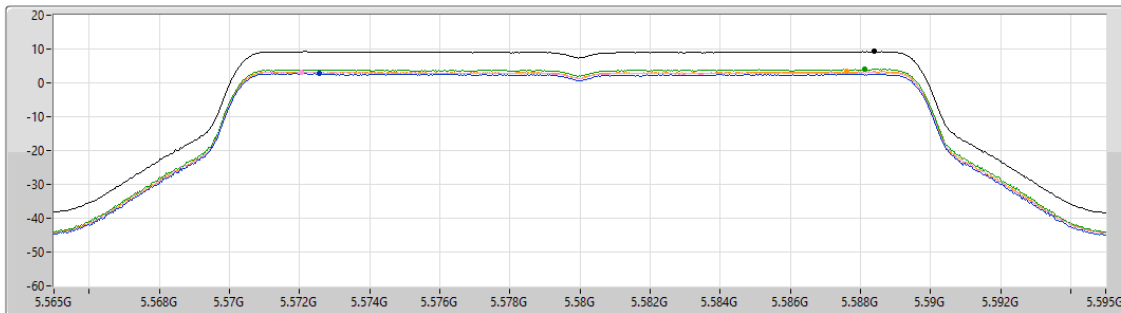

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
9.27	9.27	2.75	3.16	4.03	3.36


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5700MHz

27/01/2026

CF (Hz)
5.7G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

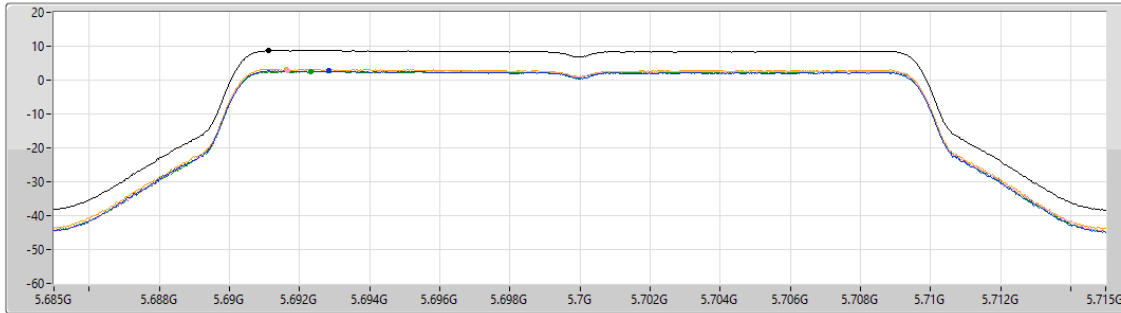

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.75	8.75	2.73	2.72	2.60	3.20


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

27/01/2026

CF (Hz)
5.71G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

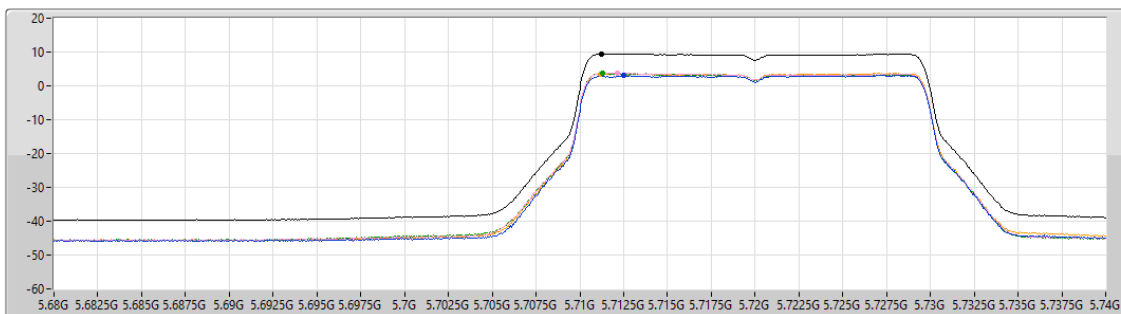


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.47	9.47	3.01	3.78	3.71	3.53

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

27/01/2026

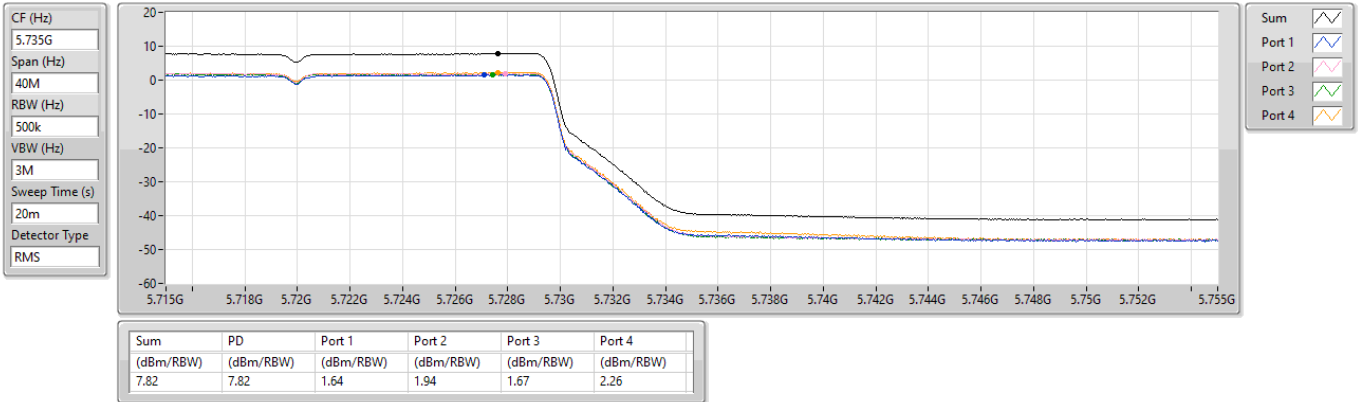


5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5745MHz

26/01/2026

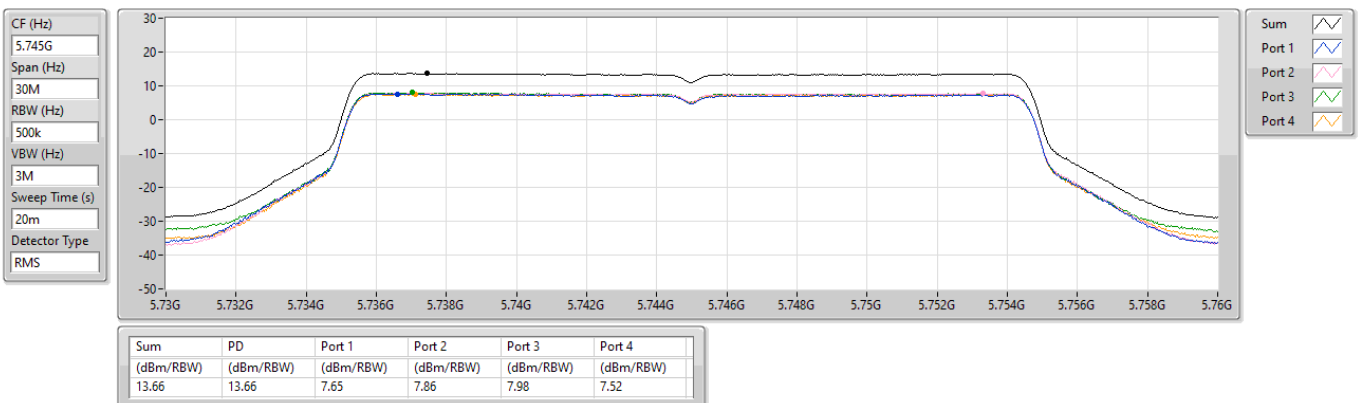


5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5785MHz

19/01/2026

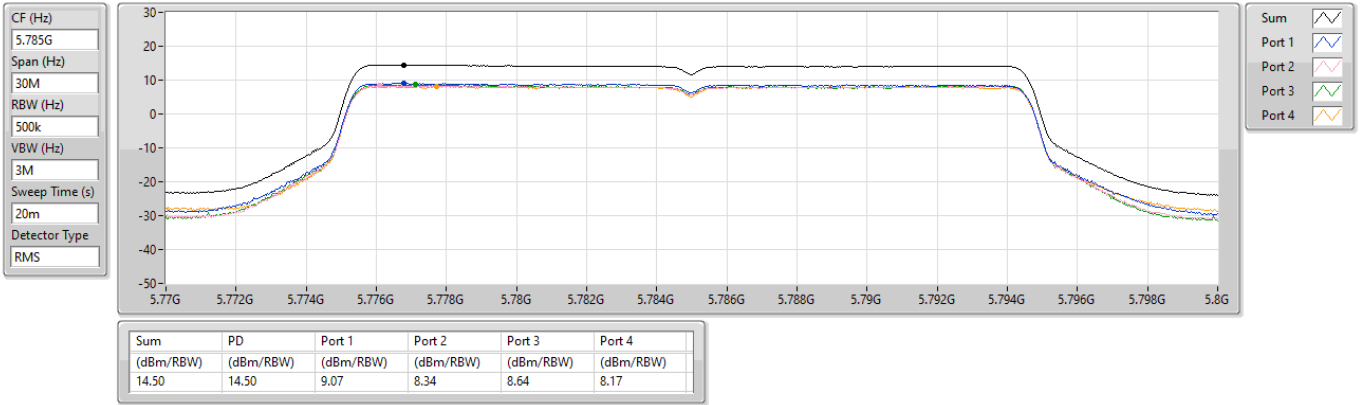


5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

5825MHz

26/01/2026

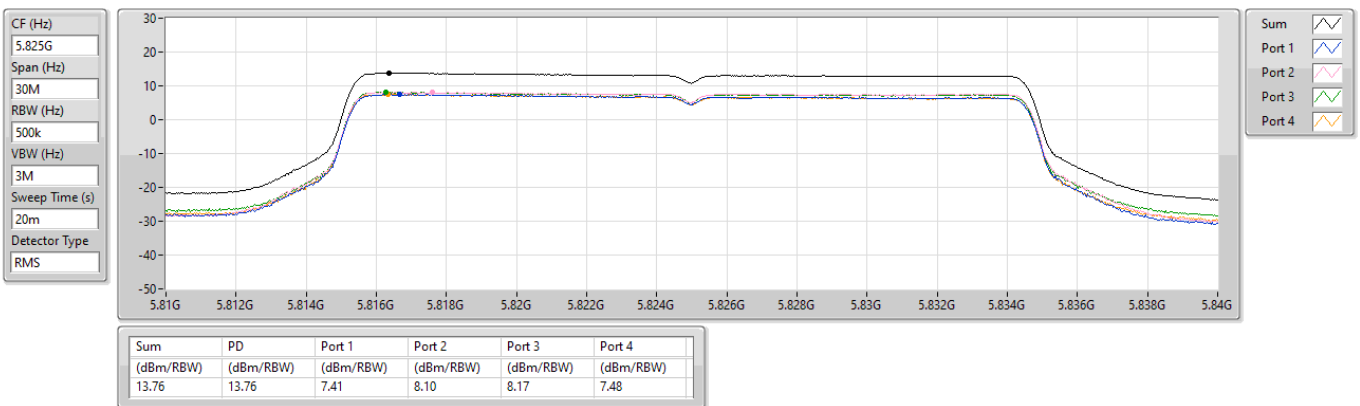


5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5190MHz

19/01/2026

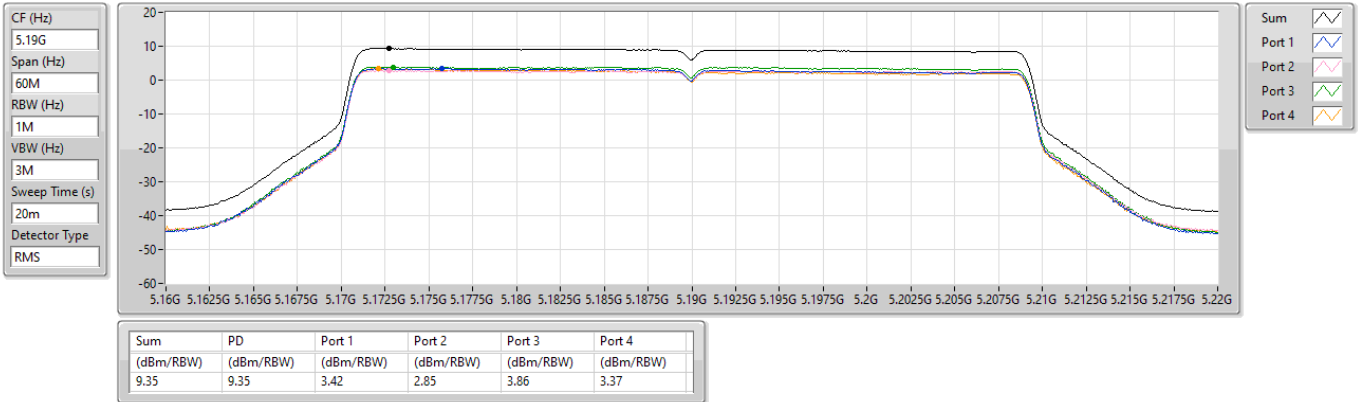


5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5230MHz

19/01/2026

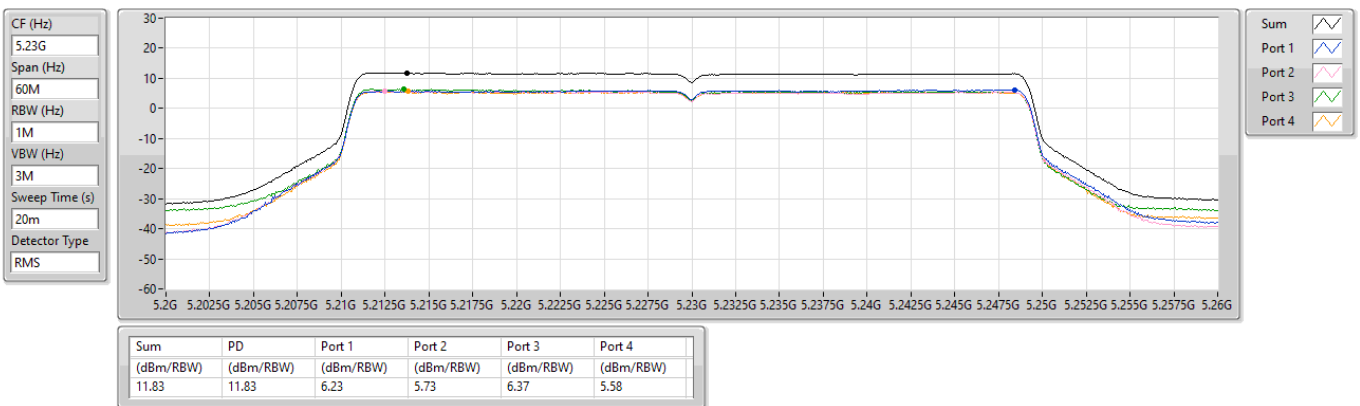


5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5270MHz

26/01/2026

CF (Hz)
5.27G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

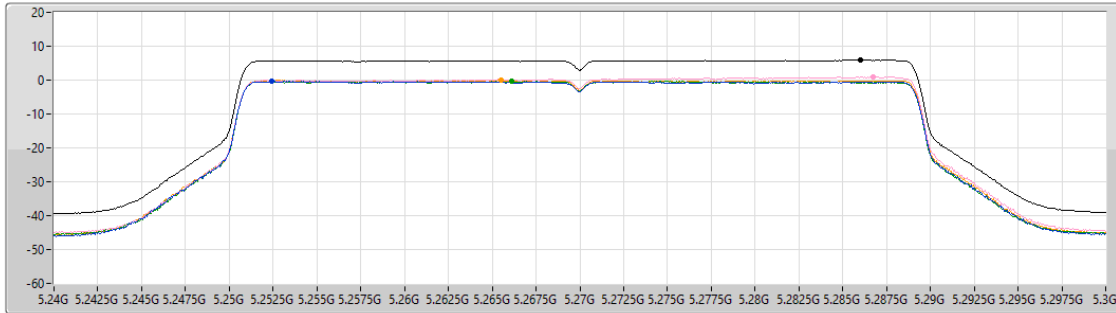

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
5.89	5.89	-0.35	0.99	-0.34	-0.05


5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5310MHz

26/01/2026

CF (Hz)
5.31G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

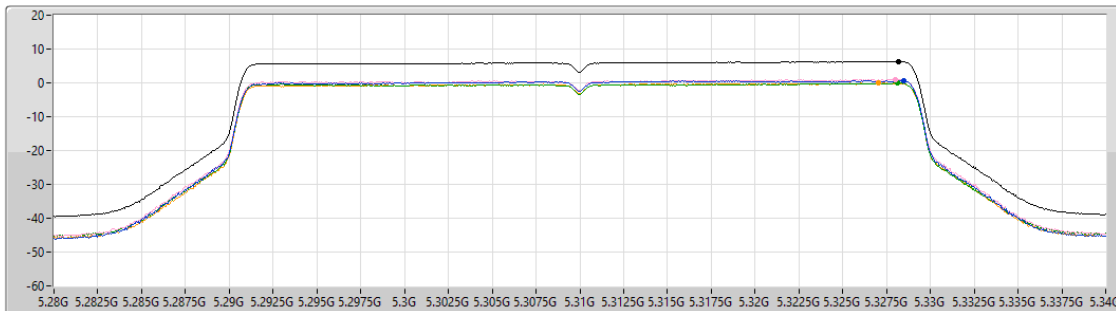


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
6.35	6.35	0.66	1.00	-0.07	-0.09

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5510MHz

27/01/2026

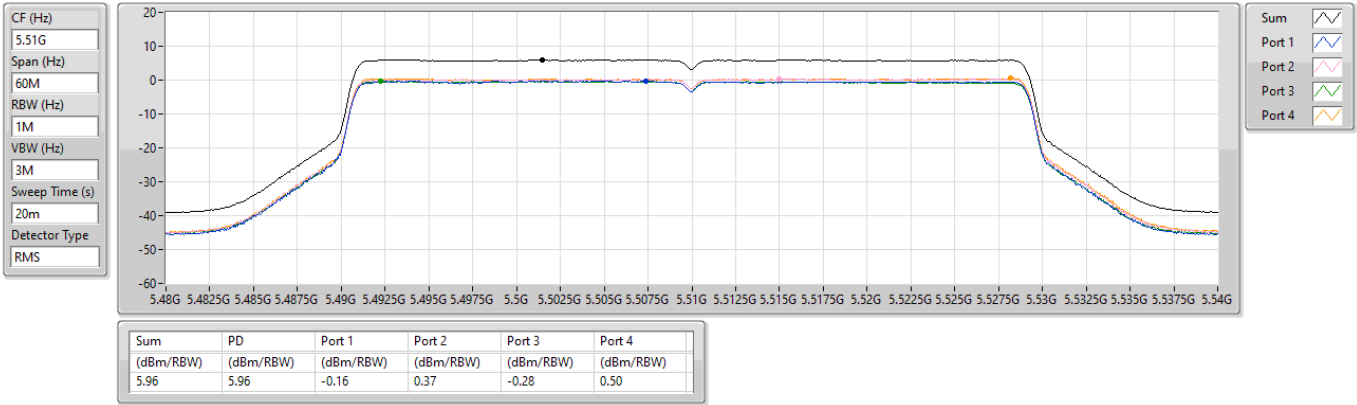


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5550MHz

27/01/2026

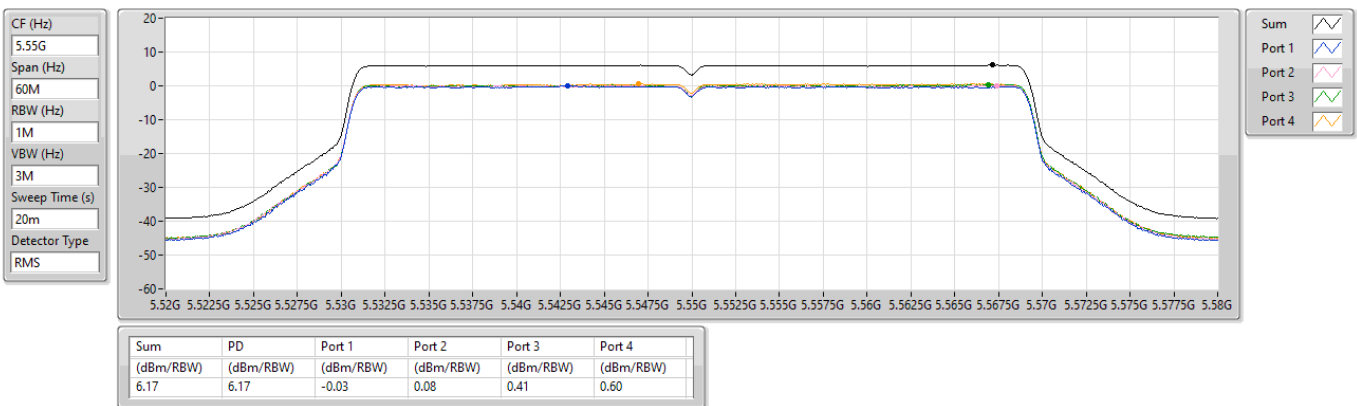


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5670MHz

27/01/2026

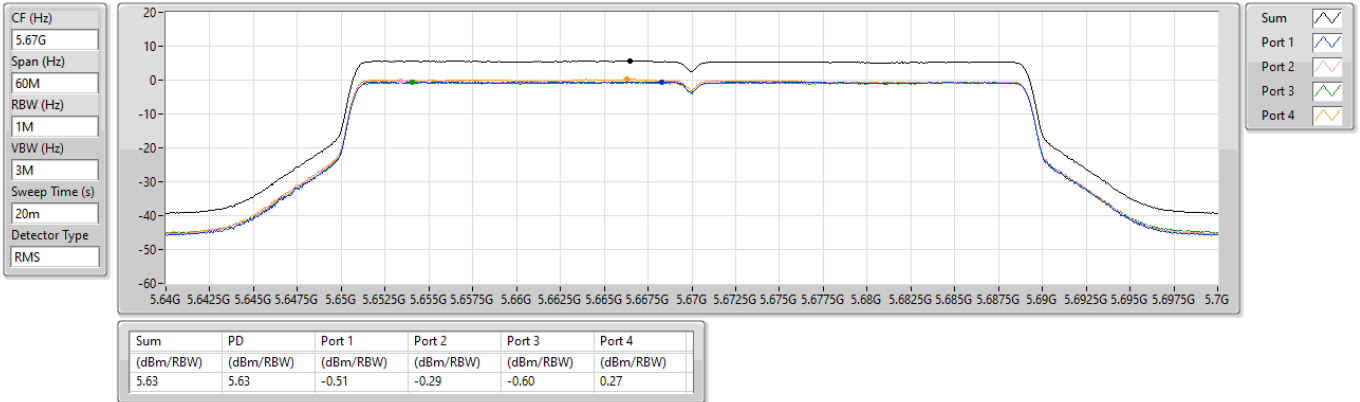


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.47-5.725GHz

27/01/2026

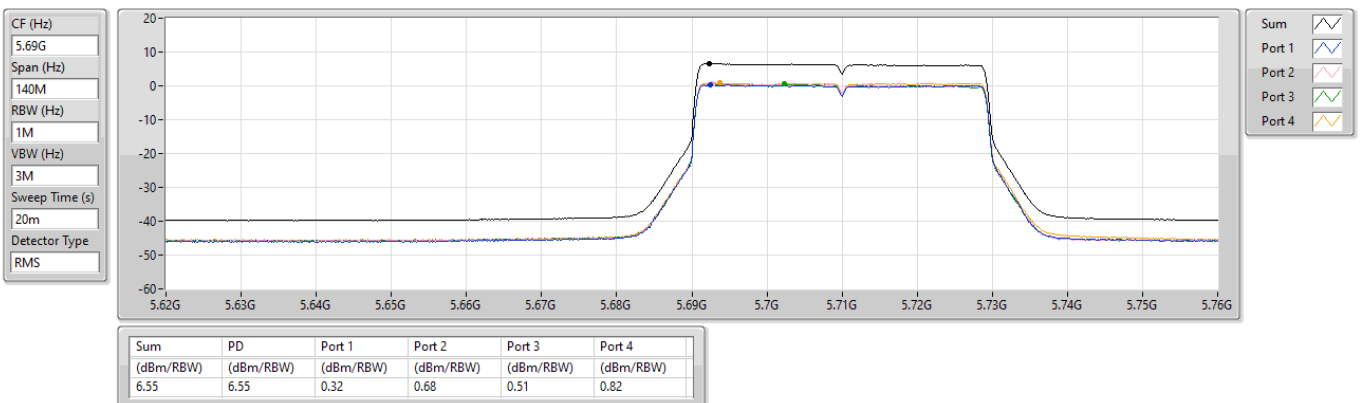


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.725-5.85GHz

27/01/2026

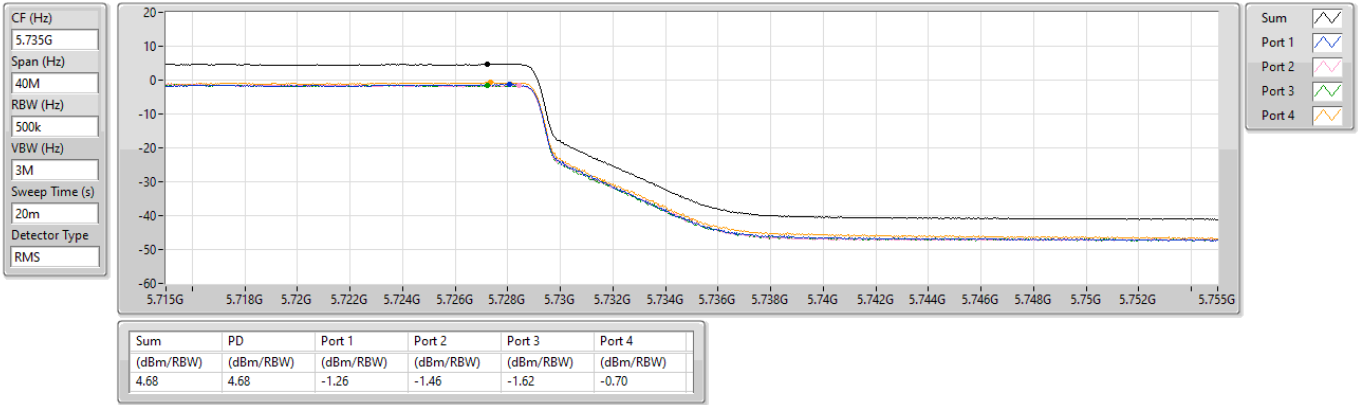


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5755MHz

19/01/2026

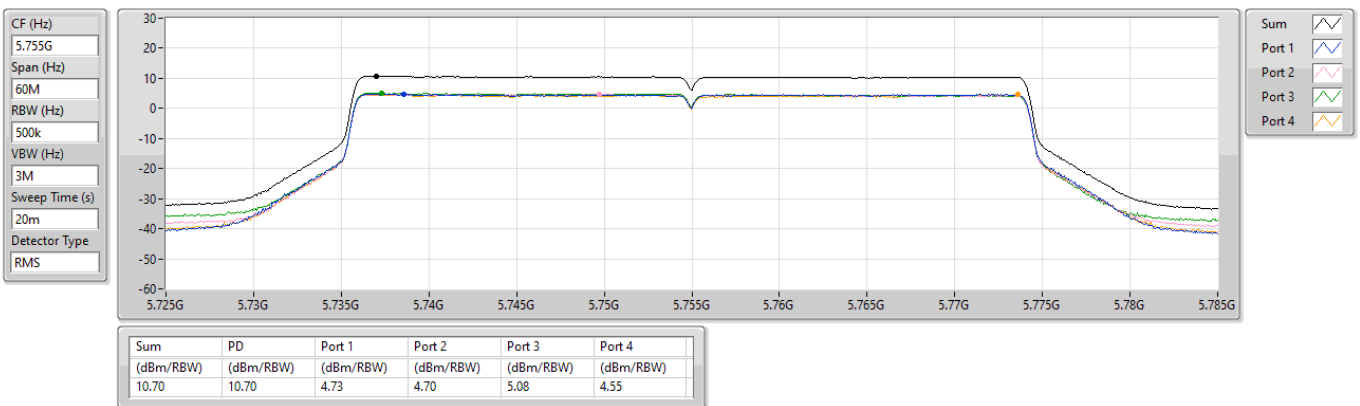


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5795MHz

19/01/2026

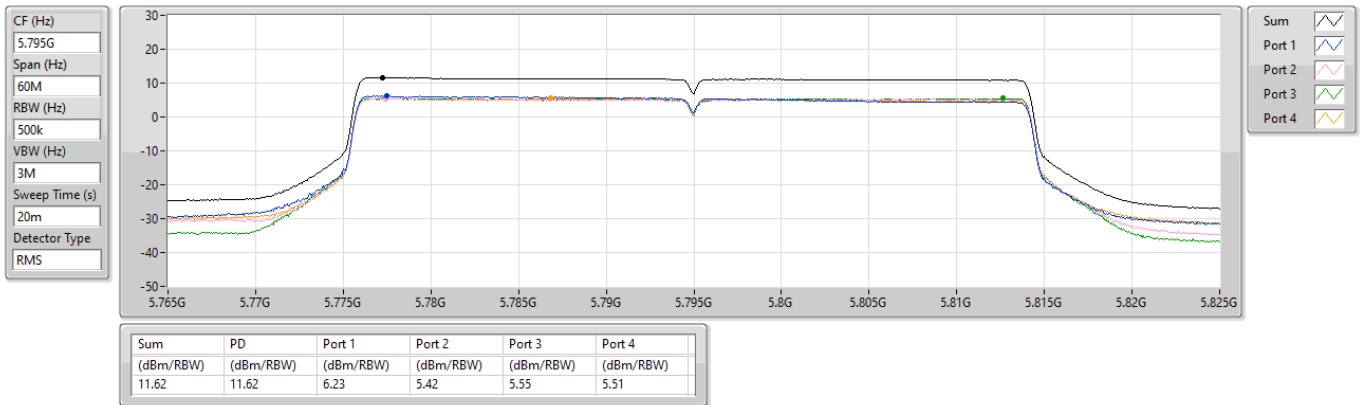


5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5210MHz

19/01/2026

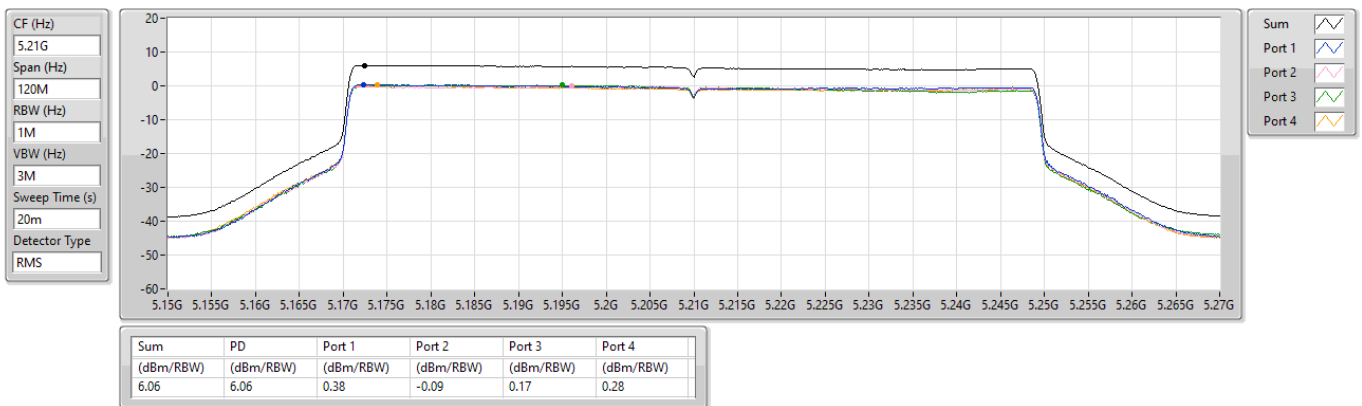


5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5290MHz

26/01/2026

CF (Hz)
5.29G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

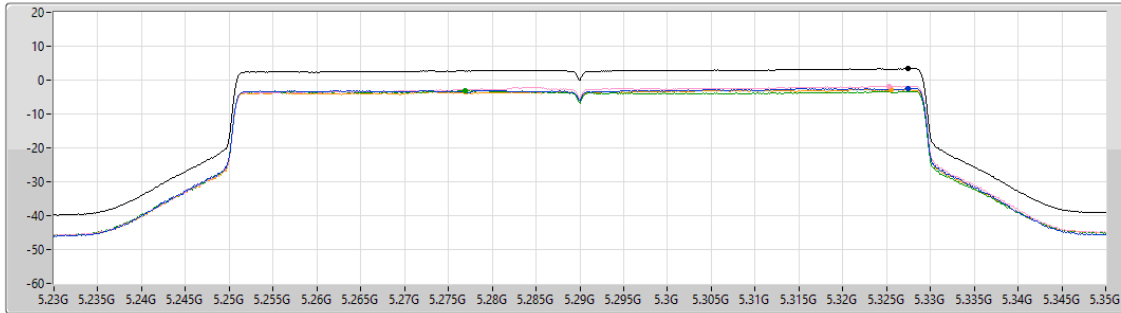

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.44	3.44	-2.39	-1.77	-3.14	-2.80


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5530MHz

26/01/2026

CF (Hz)
5.53G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20m
Detector Type
RMS

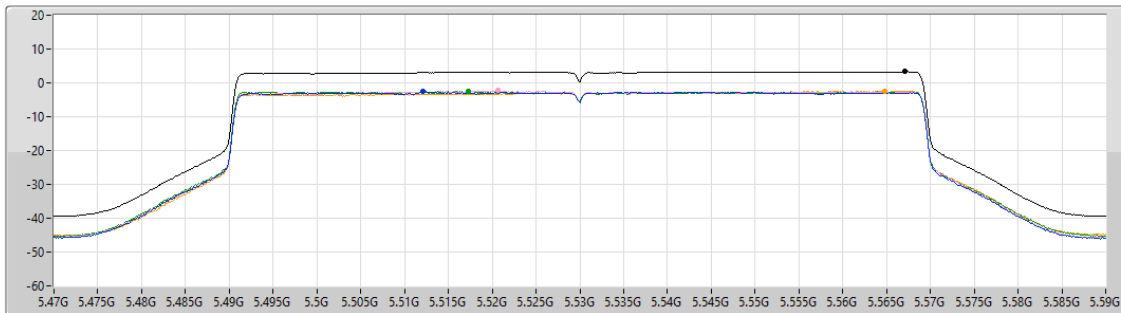


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.29	3.29	-2.42	-2.33	-2.56	-2.43

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5610MHz

26/01/2026

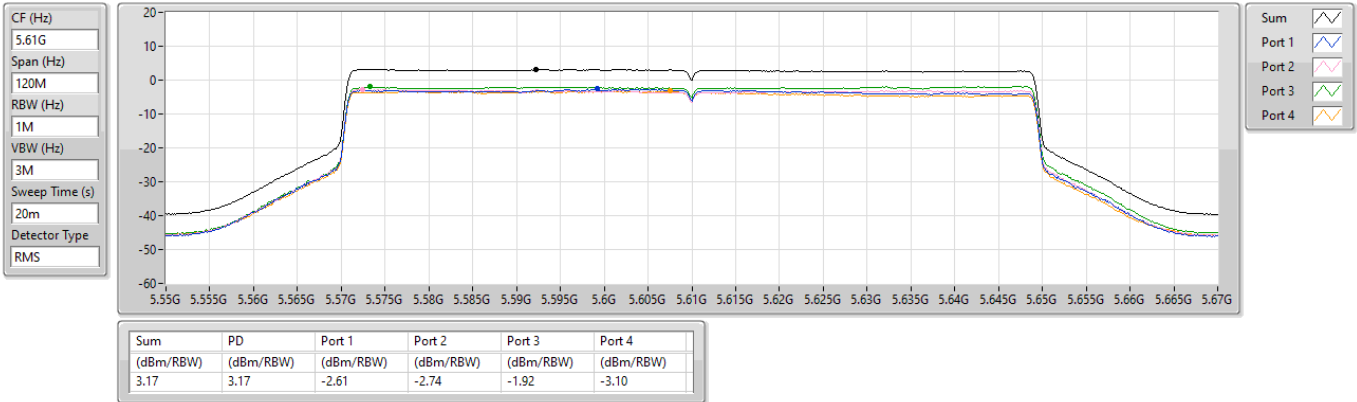


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.47-5.725GHz

27/01/2026

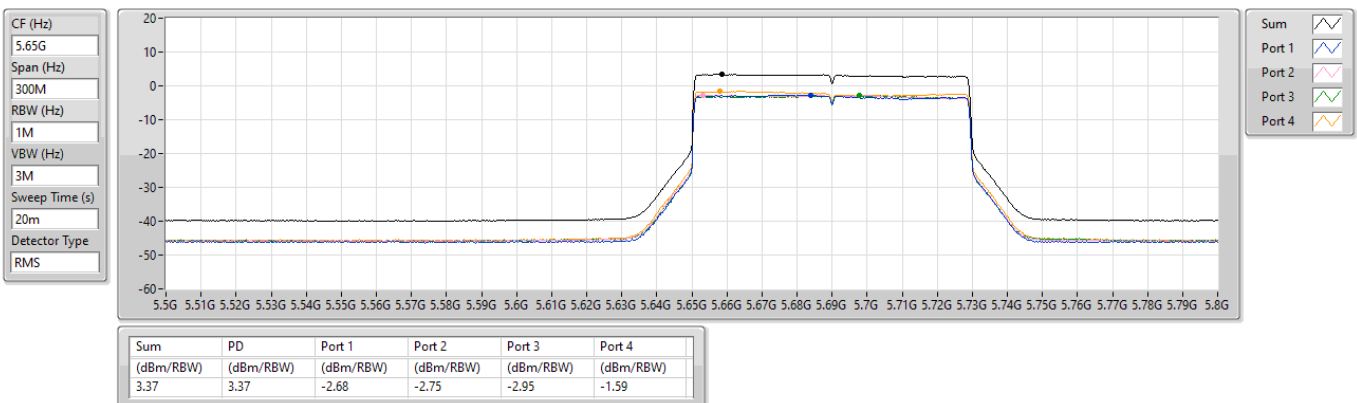


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.725-5.85GHz

27/01/2026

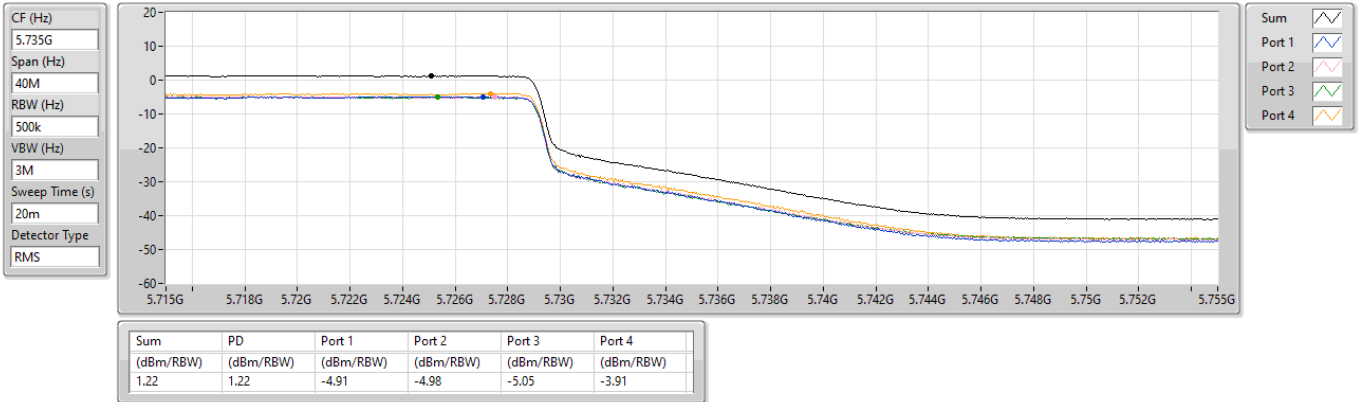


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

5775MHz

19/01/2026

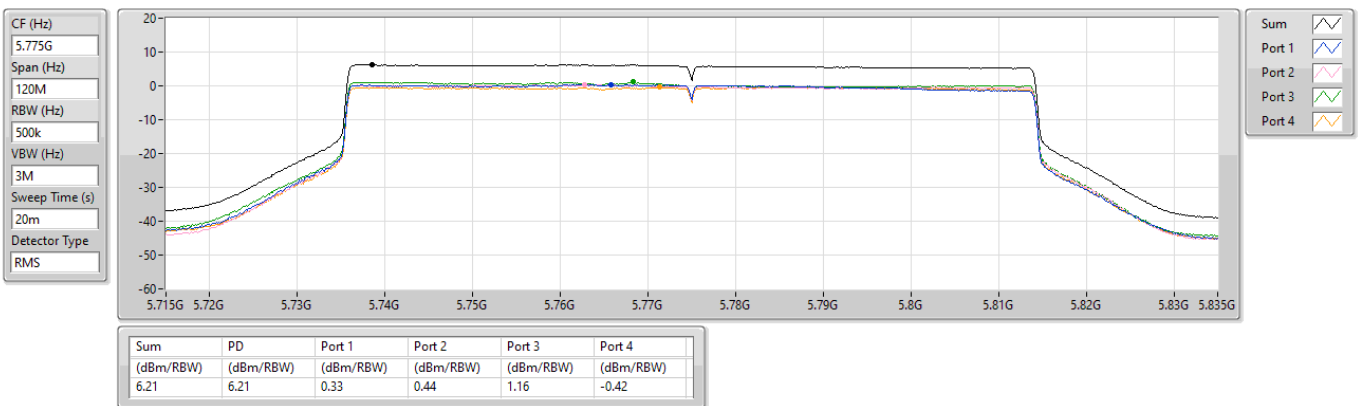


5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

27/01/2026

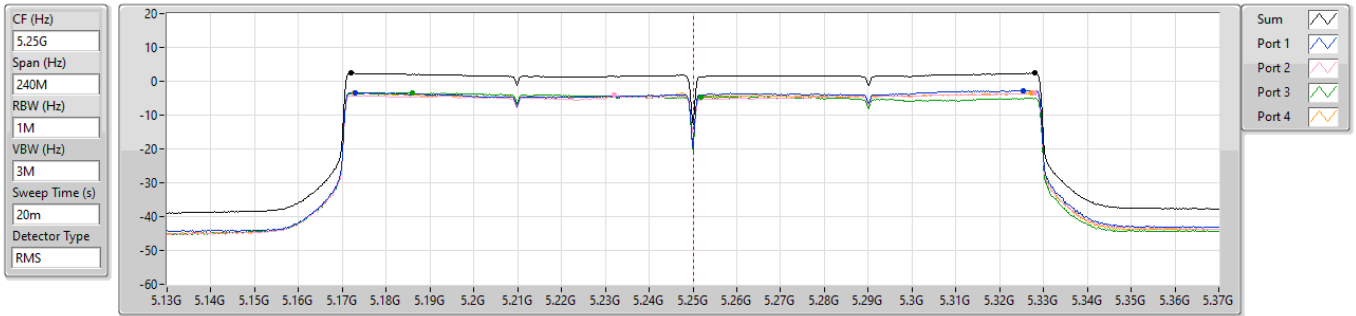

5150~5250MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.35	2.35	-3.35	-4.19	-3.43	-3.33

5250~5350MHz


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.36	2.36	-2.71	-3.52	-4.57	-3.47

5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

5570MHz

26/01/2026

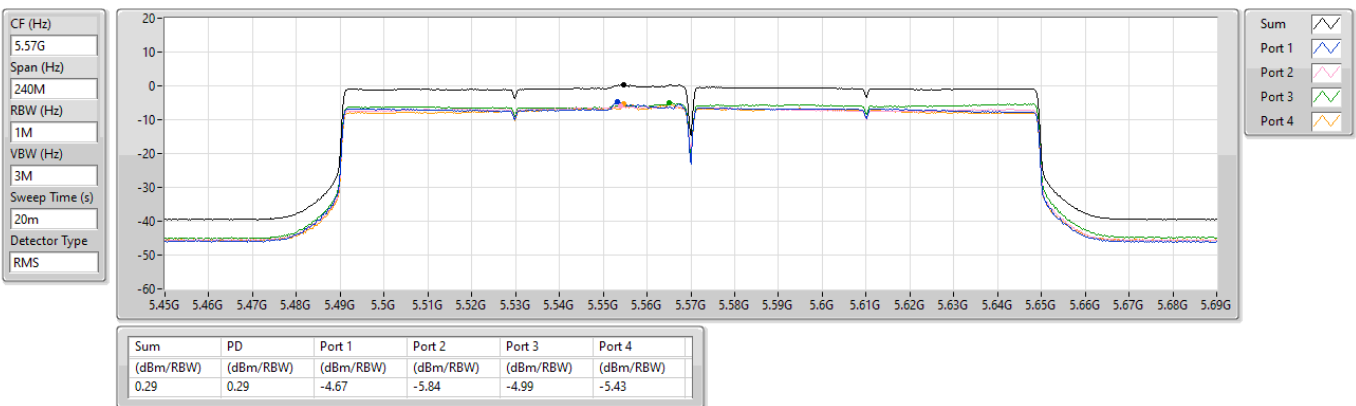


5.47-5.725GHz_EHT240,BF_240MHz_Nss1,(MCS0)_4TX

PSD

5610MHz Straddle 5.47-5.725GHz

19/01/2026

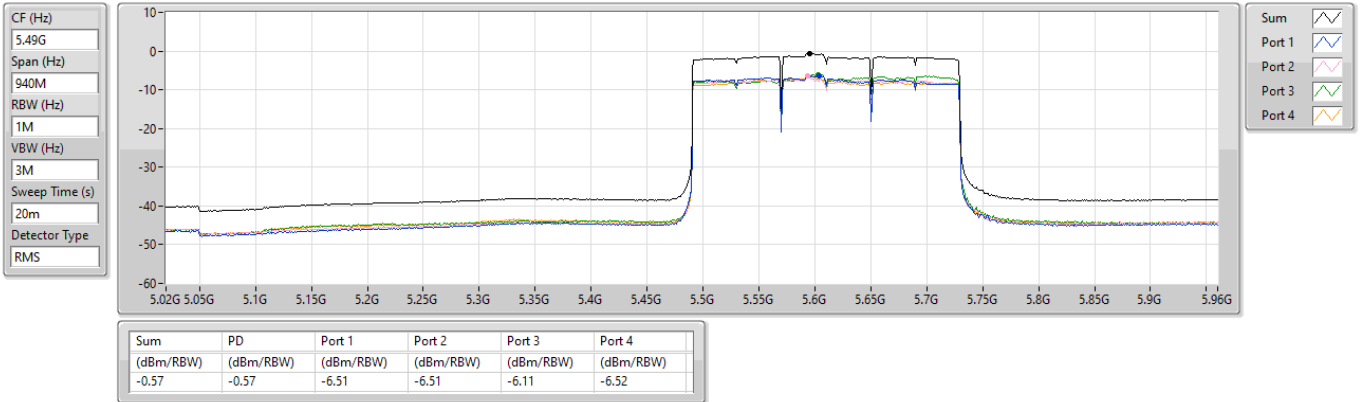


5.725-5.85GHz_EHT240,BF_240MHz_Nss1,(MCS0)_4TX

PSD

5610MHz Straddle 5.725-5.85GHz

19/01/2026

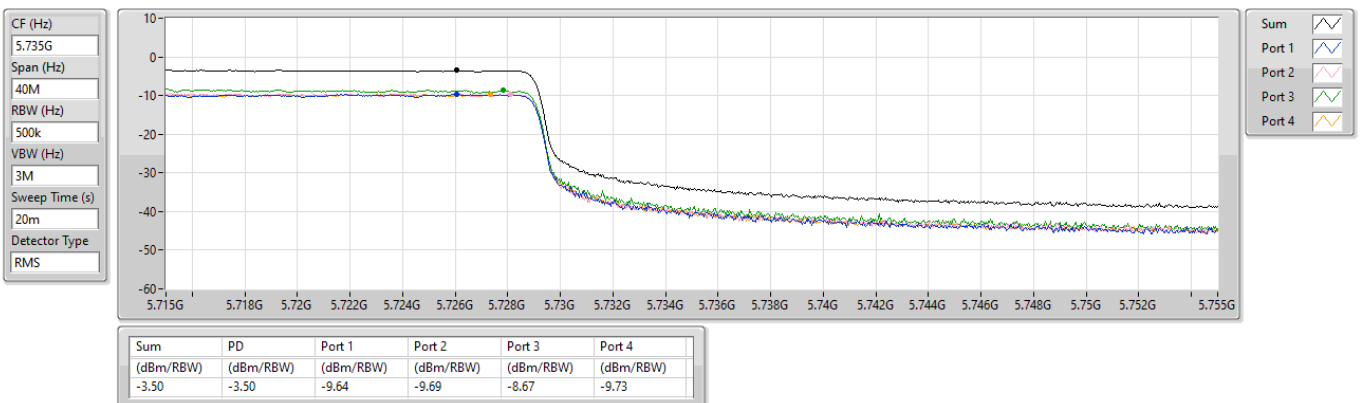




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	183.26M	39.16	43.50	-4.34	Vertical

Mode 1

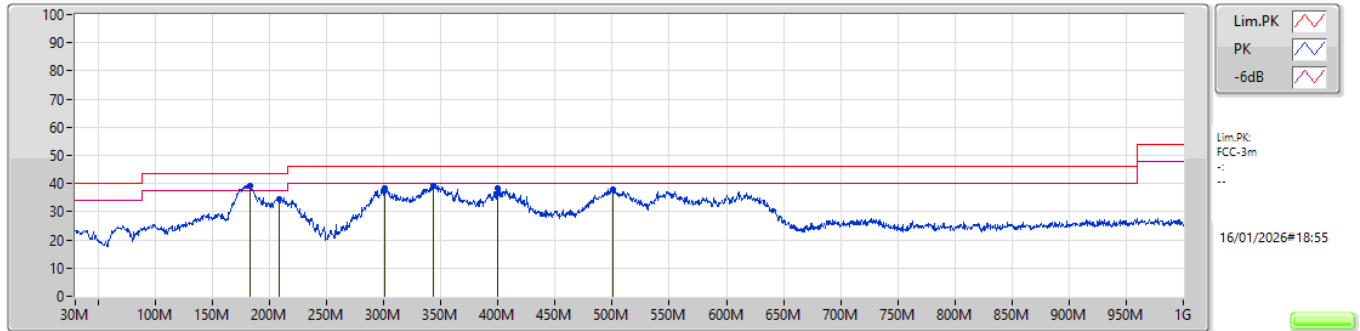

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	183.26M	39.16	43.50	-4.34	-34.86	3	Vertical	55	2.00	"Worst"	74.02	17.16	1.55	53.57		
PK	208.48M	34.49	43.50	-9.01	-36.62	3	Vertical	135	2.00	-	71.11	15.53	1.72	53.87		
PK	300.63M	38.24	46.00	-7.76	-32.26	3	Vertical	143	2.00	-	70.50	19.25	2.16	53.67		
PK	343.31M	39.17	46.00	-6.83	-31.40	3	Vertical	67	3.00	-	70.57	20.20	2.30	53.90		
PK	400.06M	38.27	46.00	-7.73	-29.70	3	Vertical	188	1.00	-	67.97	21.64	2.50	53.84		
PK	500.45M	37.90	46.00	-8.10	-27.04	3	Vertical	92	1.00	-	64.94	23.58	2.81	53.43		

Mode 1

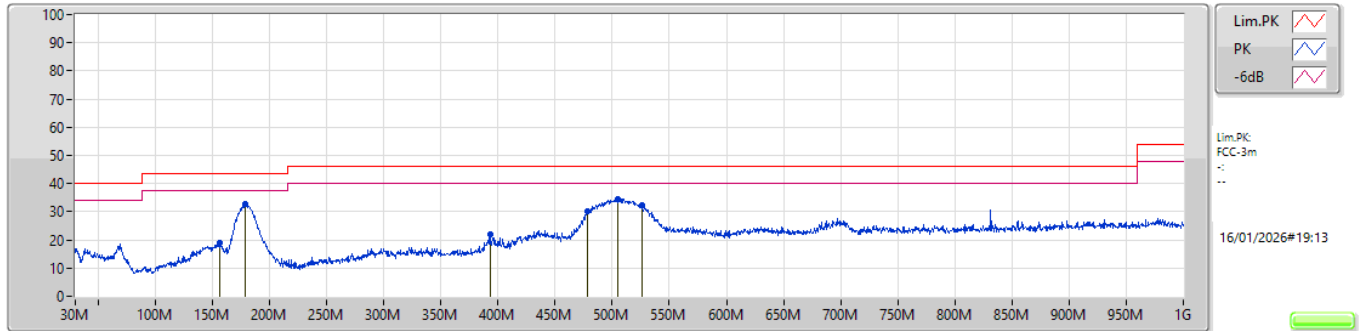

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	156.1M	18.97	43.50	-24.53	-33.04	3	Horizontal	88	1.00	-	52.01	19.21	1.48	53.73		
PK	178.9M	32.74	43.50	-10.76	-34.23	3	Horizontal	197	1.00	"Worst"	66.97	17.75	1.53	53.51		
PK	393.27M	21.82	46.00	-24.18	-29.83	3	Horizontal	143	3.00	-	51.65	21.54	2.48	53.85		
PK	478.14M	30.35	46.00	-15.65	-27.56	3	Horizontal	92	1.00	-	57.91	23.26	2.66	53.48		
PK	505.3M	34.62	46.00	-11.38	-26.80	3	Horizontal	13	1.00	-	61.42	23.75	2.84	53.39		
PK	526.16M	32.40	46.00	-13.60	-26.25	3	Horizontal	277	1.00	-	58.65	24.06	2.94	53.25		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1.(6Mbps)_4TX	Pass	AV	5.148G	53.19	54.00	-0.81	3	Vertical	341	1.80	-

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

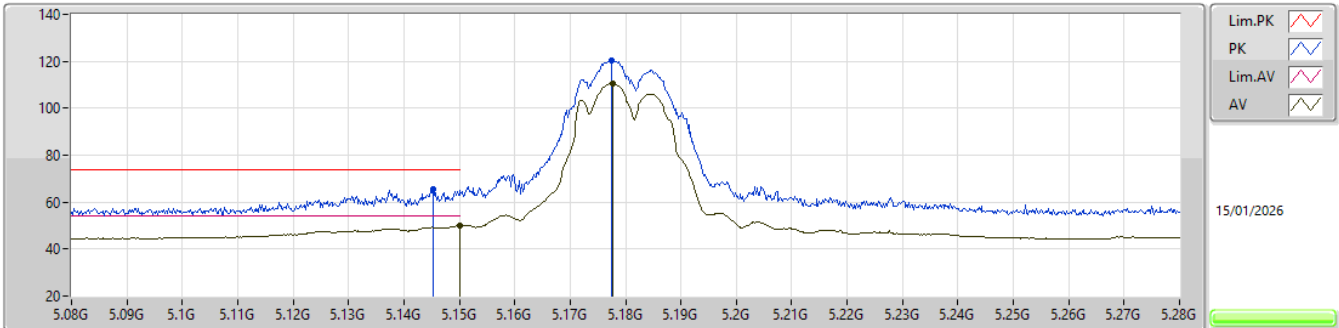


EUT_Y_4TX
Setting 21
01-C-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1452G	65.36	74.00	-8.64	56.43	3	Vertical	198	1.80	-	33.08	8.40	32.55				
AV	5.15G	50.22	54.00	-3.78	41.26	3	Vertical	198	1.80	-	33.10	8.40	32.54				
PK	5.1774G	120.37	Inf	-Inf	111.46	3	Vertical	198	1.80	-	33.05	8.40	32.54				
AV	5.1778G	110.48	Inf	-Inf	101.58	3	Vertical	198	1.80	-	33.04	8.40	32.54				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

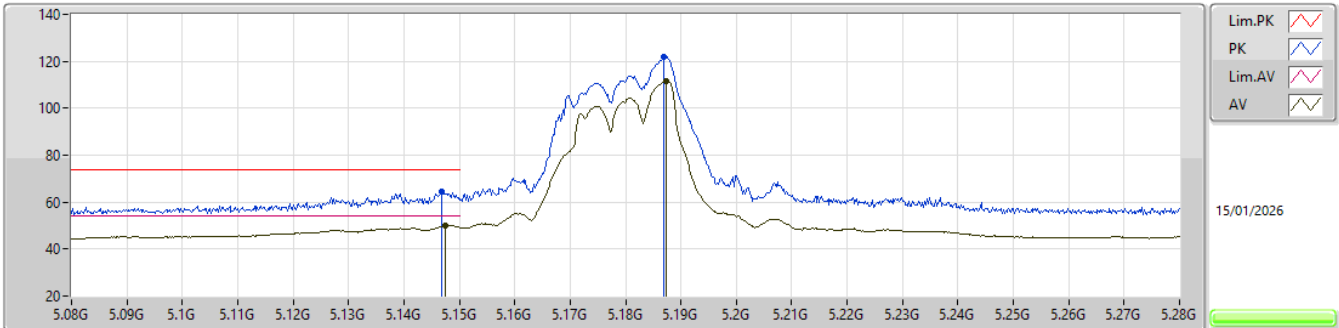


EUT_Y_4TX
Setting 21
01-C-L-4-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1468G	64.36	74.00	-9.64	55.41	3	Horizontal	248	1.79	-	33.09	8.40	32.54				
AV	5.1474G	49.83	54.00	-4.17	40.88	3	Horizontal	248	1.79	-	33.09	8.40	32.54				
PK	5.1868G	121.91	Inf	-Inf	113.01	3	Horizontal	248	1.79	-	33.03	8.41	32.54				
AV	5.1874G	111.81	Inf	-Inf	102.91	3	Horizontal	248	1.79	-	33.03	8.41	32.54				

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

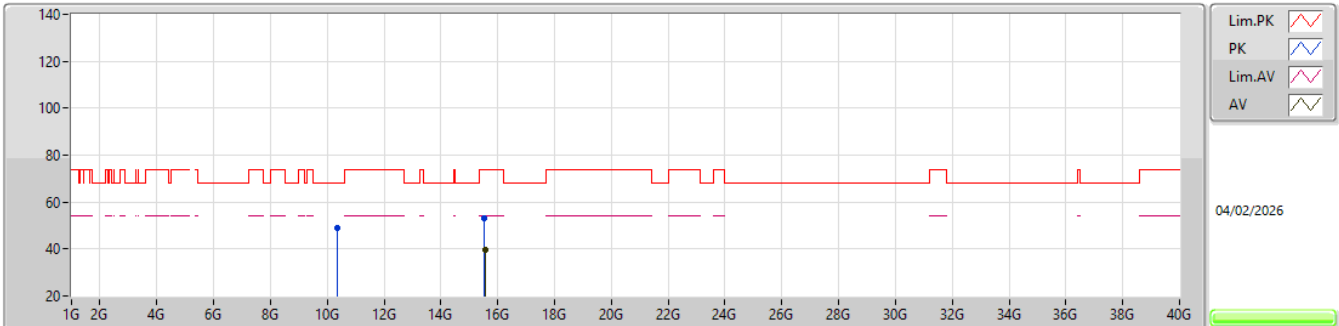


EUT_Y_4TX
Setting 21
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.35865G	48.92	68.20	-19.28	43.11	3	Vertical	279	2.63	-	38.50	12.65	45.34			
PK	15.54138G	53.17	74.00	-20.83	42.51	3	Vertical	180	2.42	-	37.92	15.70	42.96			
AV	15.54861G	39.47	54.00	-14.53	28.84	3	Vertical	180	2.42	-	37.90	15.70	42.97			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5180MHz_TX

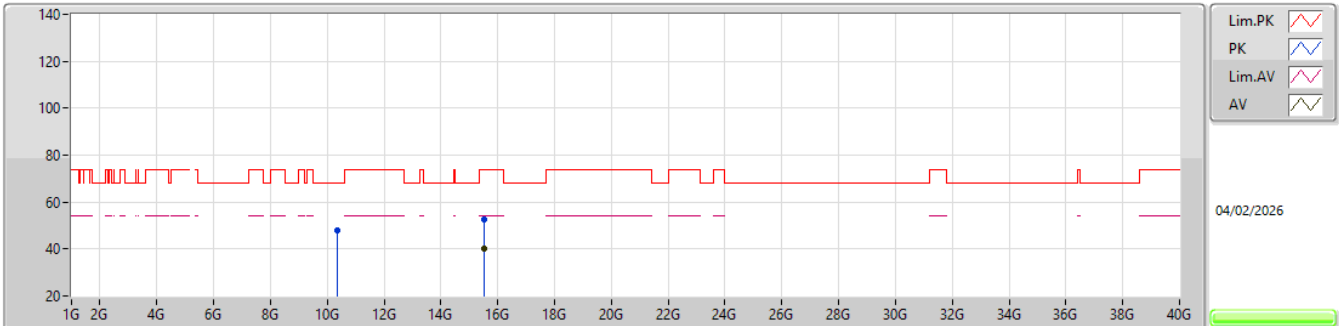


EUT_Y_4TX
Setting 21
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.34755G	47.92	68.20	-20.28	42.12	3	Horizontal	130	2.60	-	38.50	12.65	45.35			
PK	15.53133G	52.67	74.00	-21.33	41.98	3	Horizontal	178	2.40	-	37.94	15.69	42.94			
AV	15.53143G	40.13	54.00	-13.87	29.44	3	Horizontal	178	2.40	-	37.94	15.69	42.94			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

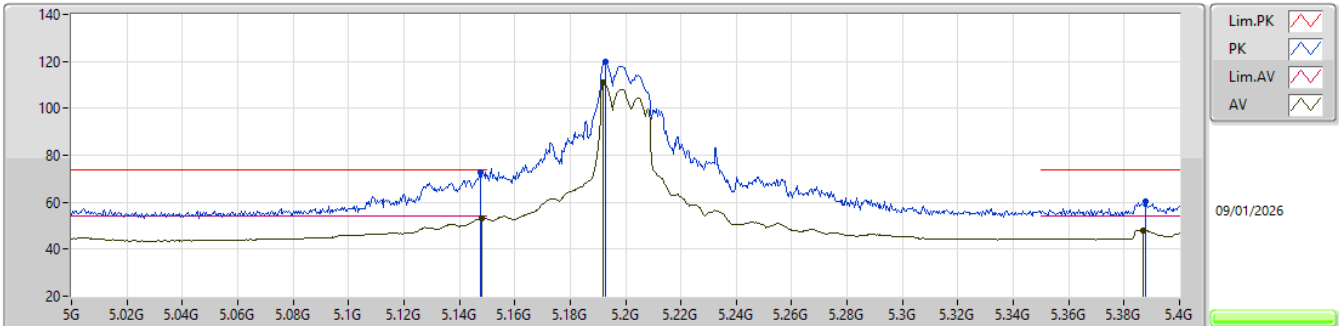


EUT_Y_4TX
Setting 22
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1476G	72.61	74.00	-1.39	63.66	3	Vertical	341	1.80	-	33.09	8.40	32.54			
AV	5.148G	53.19	54.00	-0.81	44.24	3	Vertical	341	1.80	-	33.09	8.40	32.54			
PK	5.1928G	120.00	Inf	-Inf	111.11	3	Vertical	341	1.80	-	33.01	8.41	32.53			
AV	5.192G	110.90	Inf	-Inf	102.00	3	Vertical	341	1.80	-	33.02	8.41	32.53			
PK	5.3876G	60.54	74.00	-13.46	51.90	3	Vertical	341	1.80	-	32.72	8.41	32.49			
AV	5.3868G	48.06	54.00	-5.94	39.41	3	Vertical	341	1.80	-	32.73	8.41	32.49			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

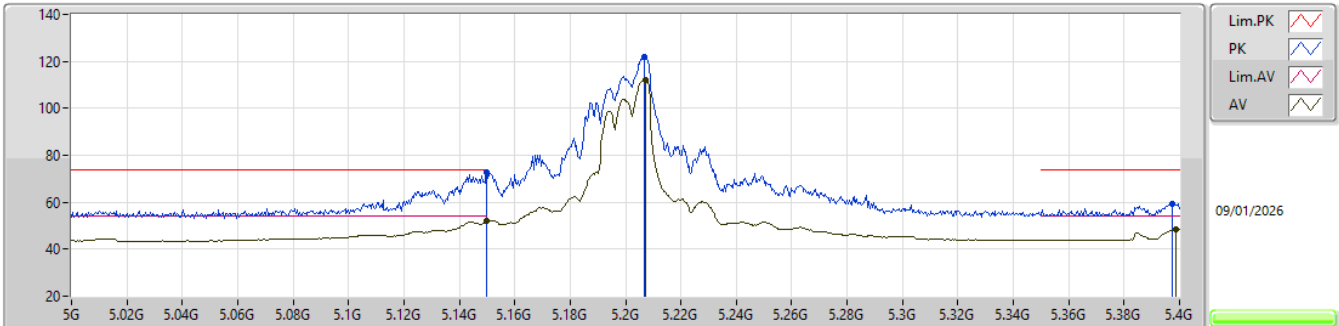


EUT_Y_4TX
Setting 22
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	72.64	74.00	-1.36	63.68	3	Horizontal	60	1.80	-	33.10	8.40	32.54			
AV	5.15G	51.85	54.00	-2.15	42.89	3	Horizontal	60	1.80	-	33.10	8.40	32.54			
PK	5.2068G	121.75	Inf	-Inf	112.88	3	Horizontal	60	1.80	-	32.99	8.41	32.53			
AV	5.2072G	112.00	Inf	-Inf	103.13	3	Horizontal	60	1.80	-	32.99	8.41	32.53			
PK	5.3972G	59.31	74.00	-14.69	50.67	3	Horizontal	60	1.80	-	32.71	8.41	32.48			
AV	5.3988G	48.47	54.00	-5.53	39.84	3	Horizontal	60	1.80	-	32.70	8.41	32.48			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

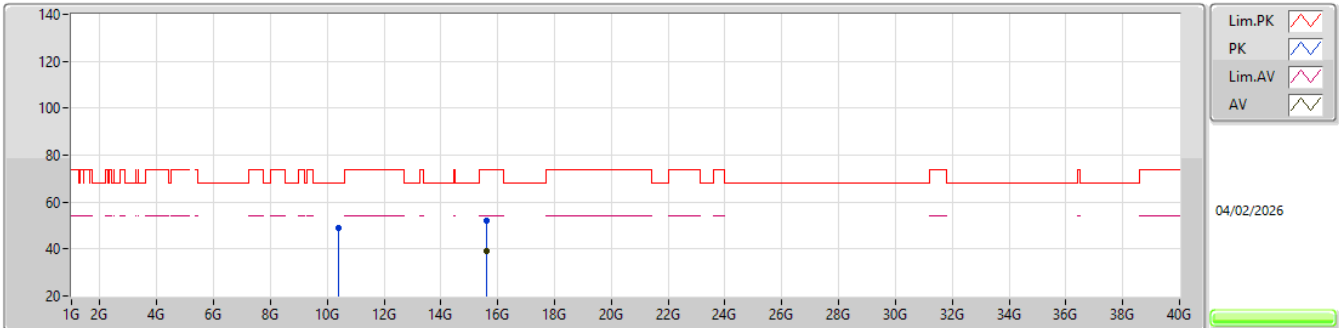


EUT_Y_4TX
Setting 22
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41137G	48.97	68.20	-19.23	43.09	3	Vertical	360	2.97	-	38.52	12.69	45.33			
PK	15.59844G	52.20	74.00	-21.80	41.63	3	Vertical	242	1.02	-	37.90	15.74	43.07			
AV	15.59251G	39.21	54.00	-14.79	28.64	3	Vertical	242	1.02	-	37.90	15.73	43.06			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5200MHz_TX

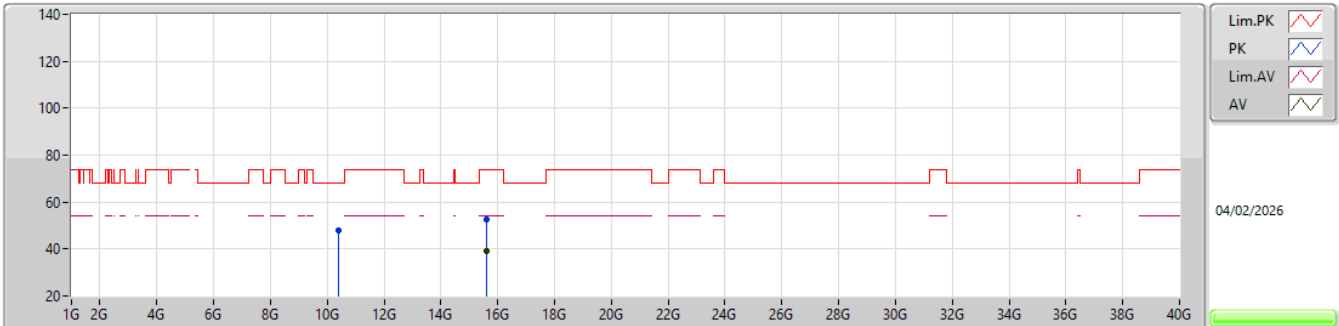


EUT_Y_4TX
Setting 22
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.38623G	48.18	68.20	-20.02	42.35	3	Horizontal	288	2.03	-	38.50	12.67	45.34			
PK	15.59043G	52.34	74.00	-21.66	41.77	3	Horizontal	319	1.34	-	37.90	15.73	43.06			
AV	15.59996G	39.24	54.00	-14.76	28.68	3	Horizontal	319	1.34	-	37.90	15.74	43.08			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

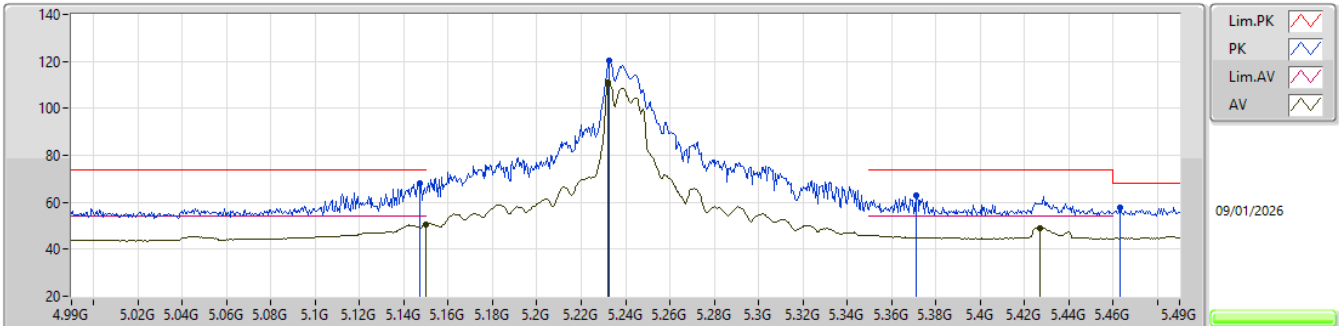


EUT_Y_4TX
Setting 24
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.147G	68.26	74.00	-5.74	59.31	3	Vertical	344	1.80	-	33.09	8.40	32.54			
AV	5.15G	50.40	54.00	-3.60	41.44	3	Vertical	344	1.80	-	33.10	8.40	32.54			
PK	5.2325G	120.22	Inf	-Inf	111.40	3	Vertical	344	1.80	-	32.93	8.41	32.52			
AV	5.232G	110.96	Inf	-Inf	102.13	3	Vertical	344	1.80	-	32.94	8.41	32.52			
PK	5.371G	63.04	74.00	-10.96	54.36	3	Vertical	344	1.80	-	32.76	8.41	32.49			
PK	5.463G	57.90	68.20	-10.30	49.15	3	Vertical	344	1.80	-	32.73	8.49	32.47			
AV	5.427G	49.22	54.00	-4.78	40.56	3	Vertical	344	1.80	-	32.70	8.44	32.48			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

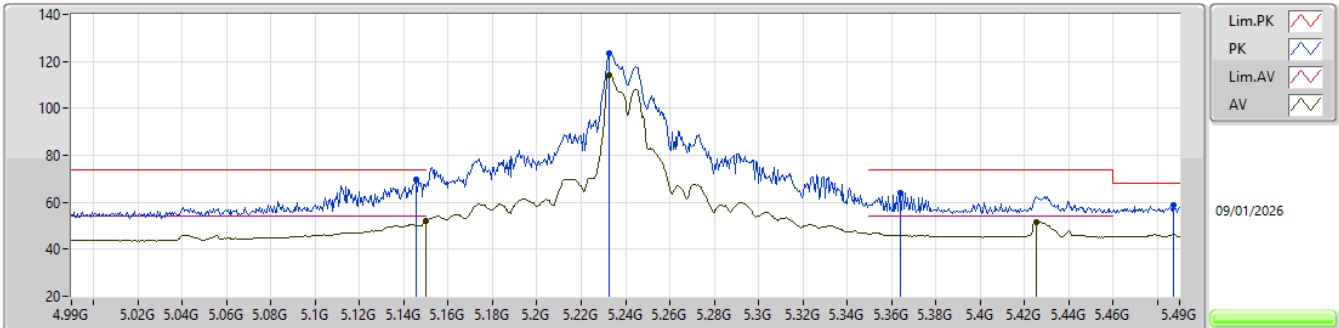


EUT_Y_4TX
Setting 24
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1455G	69.57	74.00	-4.43	60.64	3	Horizontal	58	3.00	-	33.08	8.40	32.55
AV	5.15G	51.92	54.00	-2.08	42.96	3	Horizontal	58	3.00	-	33.10	8.40	32.54
PK	5.2325G	123.56	Inf	-Inf	114.74	3	Horizontal	58	3.00	-	32.93	8.41	32.52
AV	5.2325G	114.13	Inf	-Inf	105.31	3	Horizontal	58	3.00	-	32.93	8.41	32.52
PK	5.364G	63.97	74.00	-10.03	55.28	3	Horizontal	58	3.00	-	32.77	8.41	32.49
AV	5.4255G	51.45	54.00	-2.55	42.79	3	Horizontal	58	3.00	-	32.70	8.44	32.48
PK	5.487G	58.77	68.20	-9.43	49.94	3	Horizontal	58	3.00	-	32.77	8.52	32.46

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

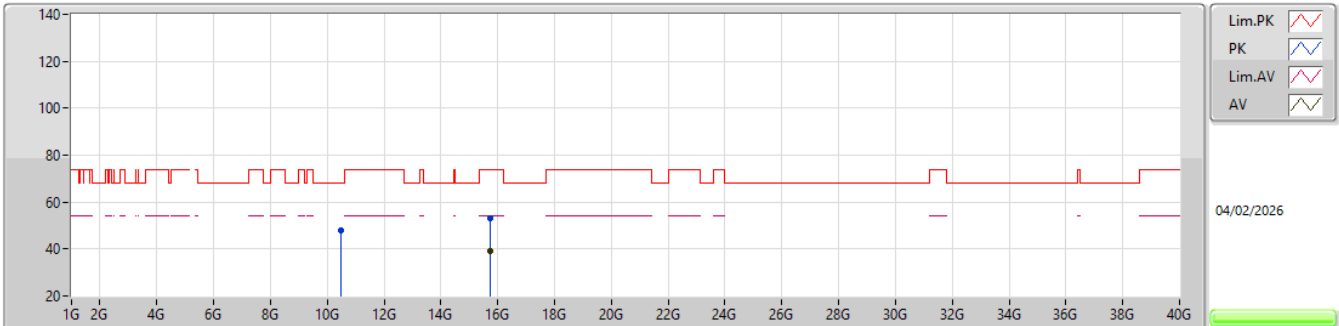


EUT_Y_4TX
Setting 24
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48006G	47.89	68.20	-20.31	41.87	3	Vertical	89	2.87	-	38.60	12.73	45.31			
PK	15.71759G	53.29	74.00	-20.71	42.94	3	Vertical	330	2.93	-	37.84	15.83	43.32			
AV	15.71838G	38.88	54.00	-15.12	28.53	3	Vertical	330	2.93	-	37.84	15.83	43.32			

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_4TX

5240MHz_TX

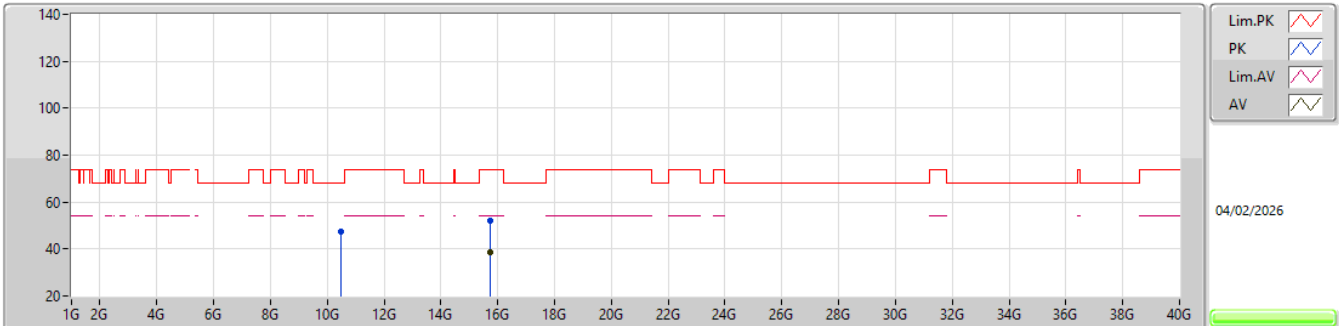


EUT_Y_4TX
Setting 24
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.48111G	47.31	68.20	-20.89	41.29	3	Horizontal	235	2.74	-	38.60	12.73	45.31			
PK	15.7194G	52.22	74.00	-21.78	41.88	3	Horizontal	209	1.07	-	37.84	15.83	43.33			
AV	15.7183G	38.75	54.00	-15.25	28.40	3	Horizontal	209	1.07	-	37.84	15.83	43.32			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

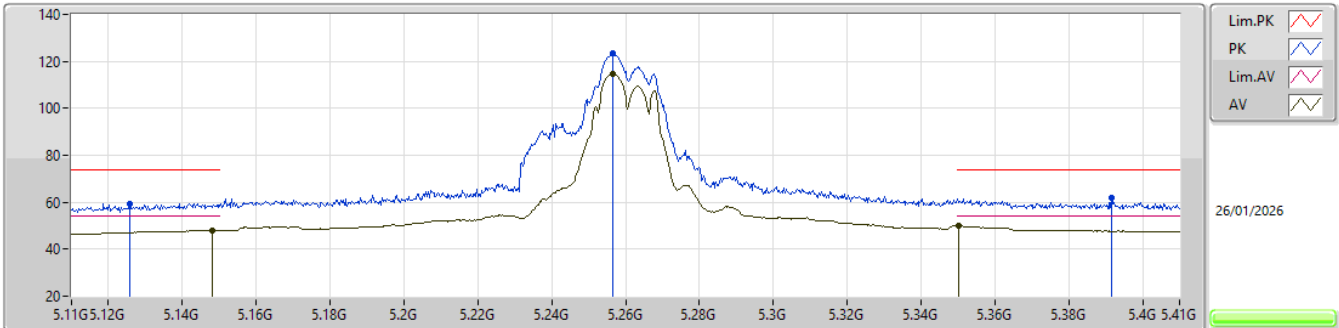


EUT_Y_4TX
Setting 24
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1259G	59.44	74.00	-14.56	54.45	3	Vertical	15	1.99	-	31.80	6.90	33.71			
AV	5.1481G	47.94	54.00	-6.06	42.86	3	Vertical	15	1.99	-	31.89	6.91	33.72			
PK	5.2564G	123.40	Inf	-Inf	118.91	3	Vertical	15	1.99	-	31.29	6.95	33.75			
AV	5.2567G	114.73	Inf	-Inf	110.24	3	Vertical	15	1.99	-	31.29	6.95	33.75			
PK	5.3917G	61.72	74.00	-12.28	57.11	3	Vertical	15	1.99	-	31.38	7.01	33.78			
AV	5.3503G	49.85	54.00	-4.15	45.33	3	Vertical	15	1.99	-	31.30	6.99	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

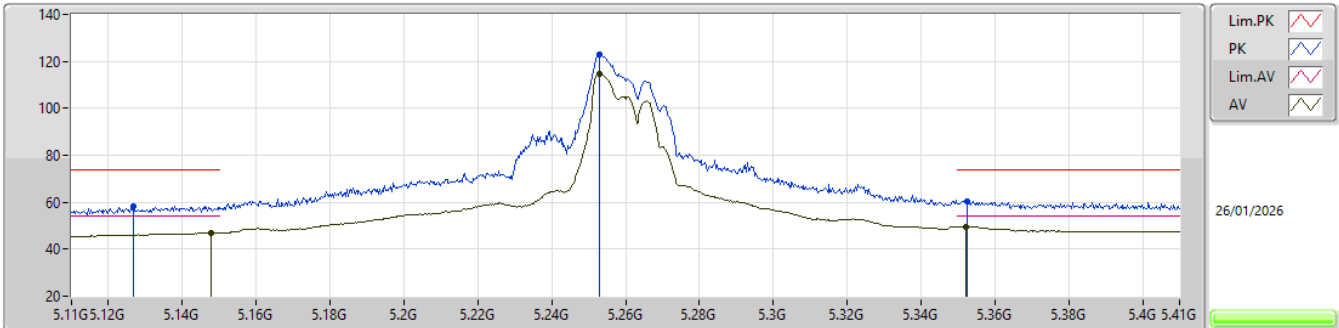


EUT Y_4TX
Setting 24
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1268G	58.31	74.00	-15.69	53.31	3	Horizontal	296	1.86	-	31.81	6.90	33.71			
AV	5.1478G	46.92	54.00	-7.08	41.84	3	Horizontal	296	1.86	-	31.89	6.91	33.72			
PK	5.2528G	123.18	Inf	-Inf	118.69	3	Horizontal	296	1.86	-	31.29	6.95	33.75			
AV	5.2528G	114.77	Inf	-Inf	110.28	3	Horizontal	296	1.86	-	31.29	6.95	33.75			
PK	5.3524G	60.60	74.00	-13.40	56.08	3	Horizontal	296	1.86	-	31.30	6.99	33.77			
AV	5.3521G	49.69	54.00	-4.31	45.17	3	Horizontal	296	1.86	-	31.30	6.99	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

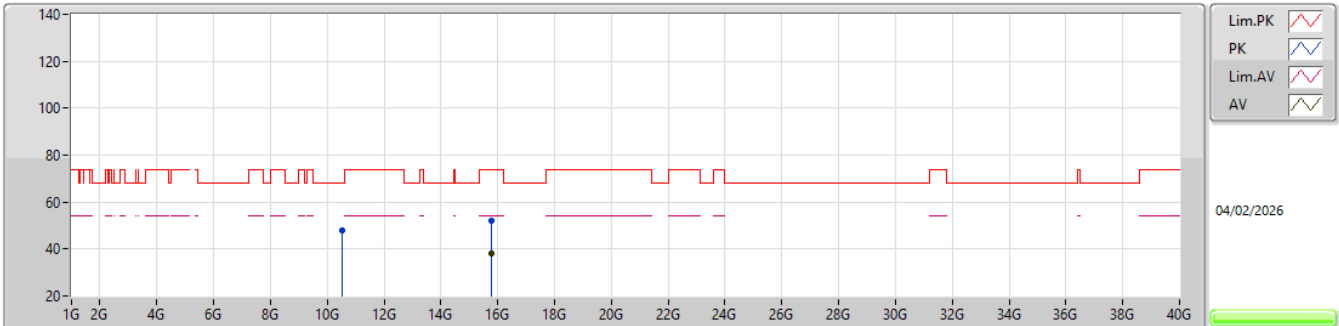


EUT_Y_4TX
Setting 24
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51654G	48.02	68.20	-20.18	42.01	3	Vertical	33	2.46	-	38.60	12.75	45.34			
PK	15.7772G	52.11	74.00	-21.89	42.01	3	Vertical	173	1.65	-	37.68	15.87	43.45			
AV	15.77719G	37.86	54.00	-16.14	27.76	3	Vertical	173	1.65	-	37.68	15.87	43.45			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

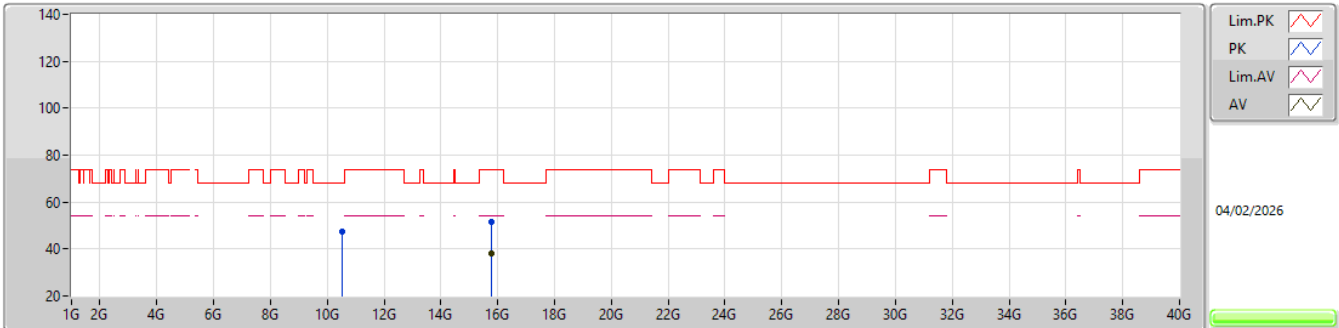


EUT_Y_4TX
Setting 24
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.51833G	47.55	68.20	-20.65	41.54	3	Horizontal	337	2.89	-	38.60	12.75	45.34			
PK	15.77809G	51.47	74.00	-22.53	41.37	3	Horizontal	133	2.27	-	37.68	15.87	43.45			
AV	15.7772G	37.90	54.00	-16.10	27.80	3	Horizontal	133	2.27	-	37.68	15.87	43.45			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

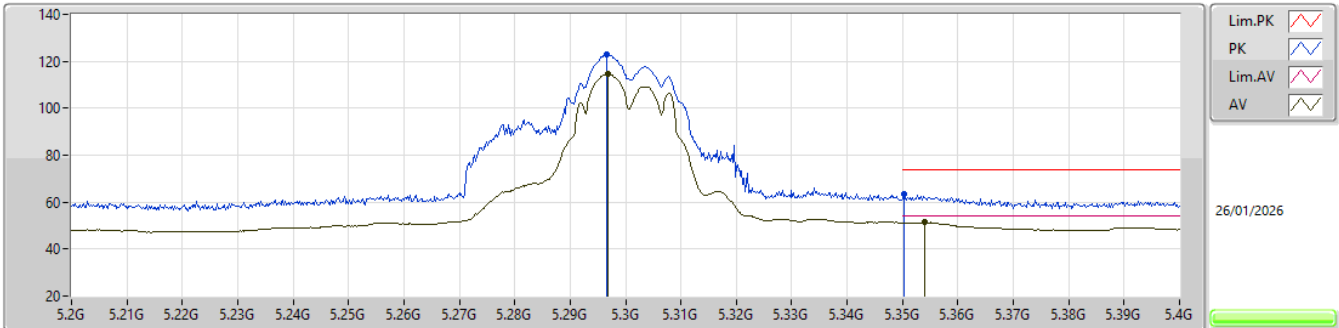


EUT_Y_4TX
Setting 23.5
06-U-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2966G	123.02	Inf	-Inf	118.60	3	Vertical	18	1.93	-	31.21	6.97	33.76				
AV	5.2968G	114.41	Inf	-Inf	109.99	3	Vertical	18	1.93	-	31.21	6.97	33.76				
PK	5.3502G	63.27	74.00	-10.73	58.75	3	Vertical	18	1.93	-	31.30	6.99	33.77				
AV	5.354G	51.42	54.00	-2.58	46.89	3	Vertical	18	1.93	-	31.31	6.99	33.77				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

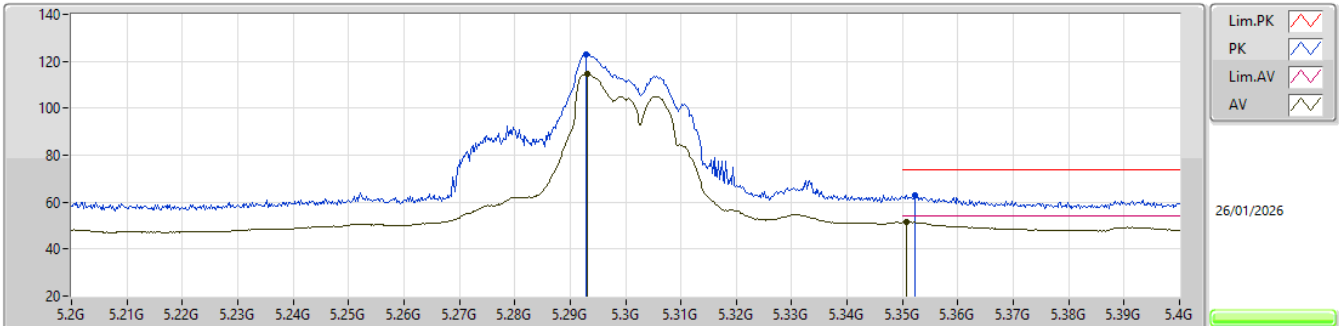


EUT_Y_4TX
Setting 23.5
06-U-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2928G	122.95	Inf	-Inf	118.53	3	Horizontal	295	1.80	-	31.21	6.97	33.76			
AV	5.293G	114.49	Inf	-Inf	110.07	3	Horizontal	295	1.80	-	31.21	6.97	33.76			
PK	5.3522G	63.17	74.00	-10.83	58.65	3	Horizontal	295	1.80	-	31.30	6.99	33.77			
AV	5.3508G	51.54	54.00	-2.46	47.02	3	Horizontal	295	1.80	-	31.30	6.99	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

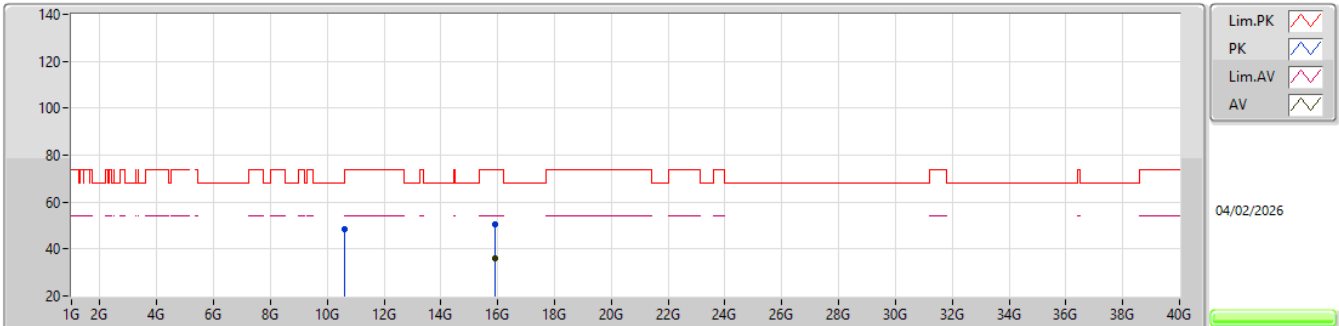


EUT_Y_4TX
Setting 23.5
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59705G	48.43	68.20	-19.77	42.14	3	Vertical	53	1.48	-	38.98	12.80	45.49			
PK	15.90248G	50.49	74.00	-23.51	40.54	3	Vertical	38	1.67	-	37.70	15.96	43.71			
AV	15.8973G	36.24	54.00	-17.76	26.30	3	Vertical	38	1.67	-	37.68	15.96	43.70			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

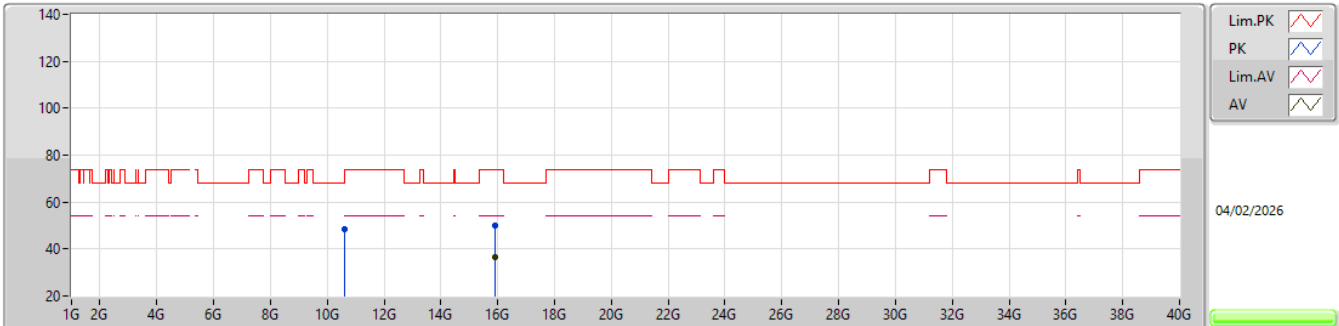


EUT_Y_4TX
Setting 23.5
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59979G	48.68	68.20	-19.52	42.38	3	Horizontal	215	2.10	-	39.00	12.80	45.50			
PK	15.90182G	49.93	74.00	-24.07	39.98	3	Horizontal	152	2.02	-	37.70	15.96	43.71			
AV	15.8974G	36.37	54.00	-17.63	26.43	3	Horizontal	152	2.02	-	37.68	15.96	43.70			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

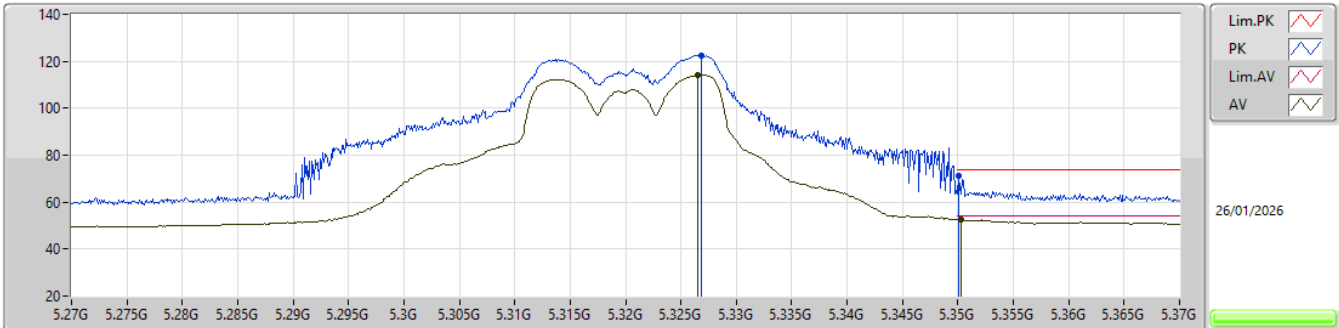


EUT_Y_4TX
Setting 23.5
06-U-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3268G	122.63	Inf	-Inf	118.16	3	Vertical	1	2.03	-	31.25	6.98	33.76			
AV	5.3265G	114.22	Inf	-Inf	109.75	3	Vertical	1	2.03	-	31.25	6.98	33.76			
PK	5.3501G	71.01	74.00	-2.99	66.49	3	Vertical	1	2.03	-	31.30	6.99	33.77			
AV	5.3503G	52.52	54.00	-1.48	48.00	3	Vertical	1	2.03	-	31.30	6.99	33.77			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

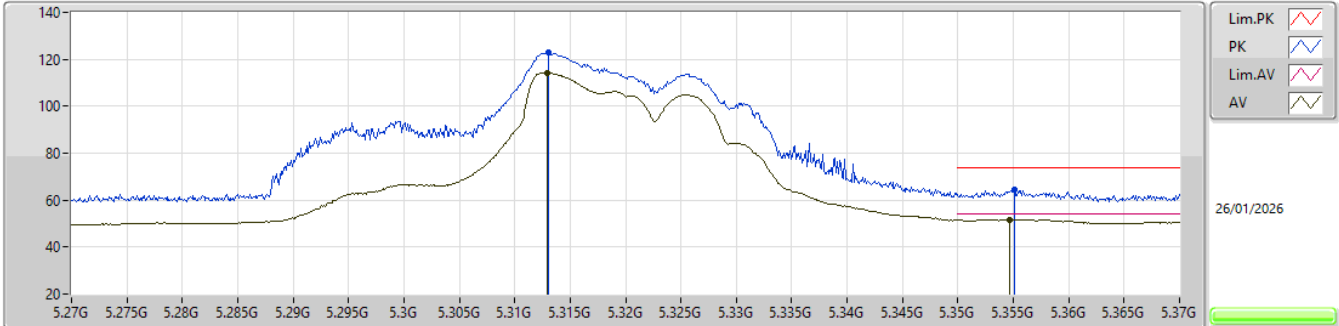


EUT_Y_4TX
Setting 23.5
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.313G	122.82	Inf	-Inf	118.37	3	Horizontal	296	1.80	-	31.23	6.98	33.76
AV	5.3129G	114.32	Inf	-Inf	109.87	3	Horizontal	296	1.80	-	31.23	6.98	33.76
PK	5.3551G	64.56	74.00	-9.44	60.03	3	Horizontal	296	1.80	-	31.31	6.99	33.77
AV	5.3547G	51.71	54.00	-2.29	47.18	3	Horizontal	296	1.80	-	31.31	6.99	33.77

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

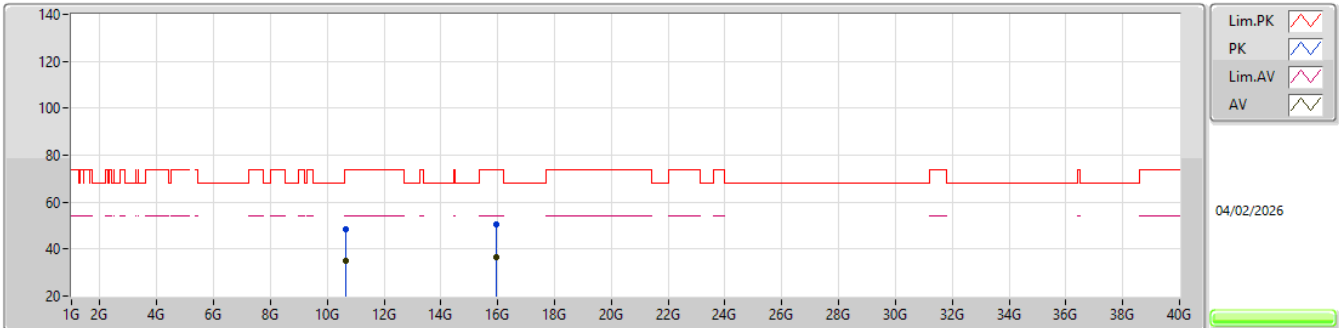


EUT_Y_4TX
Setting 23.5
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63589G	48.42	74.00	-25.58	42.10	3	Vertical	181	1.40	-	39.07	12.82	45.57			
AV	10.6386G	34.85	54.00	-19.15	28.51	3	Vertical	181	1.40	-	39.08	12.83	45.57			
PK	15.96251G	50.75	74.00	-23.25	41.01	3	Vertical	64	2.42	-	37.57	16.00	43.83			
AV	15.95564G	36.46	54.00	-17.54	26.69	3	Vertical	64	2.42	-	37.59	16.00	43.82			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

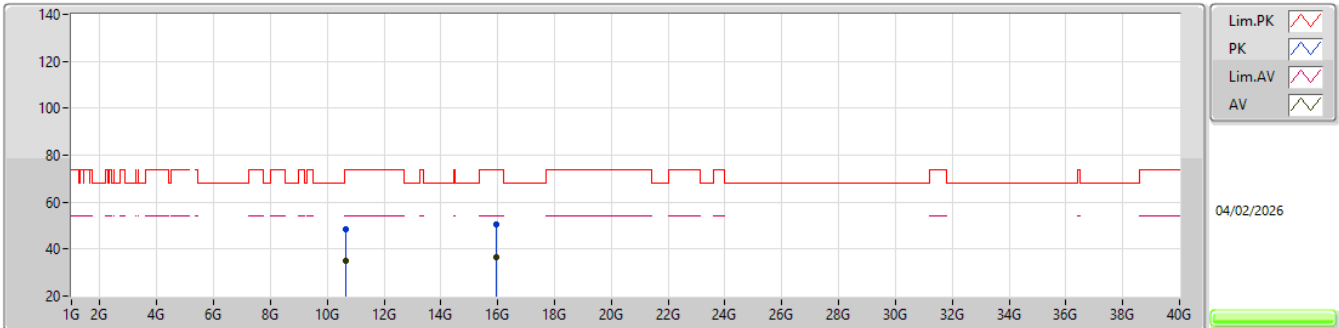


EUT_Y_4TX
Setting 23.5
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63611G	48.37	74.00	-25.63	42.05	3	Horizontal	275	2.89	-	39.07	12.82	45.57			
AV	10.63834G	34.86	54.00	-19.14	28.52	3	Horizontal	275	2.89	-	39.08	12.83	45.57			
PK	15.96499G	50.53	74.00	-23.47	40.80	3	Horizontal	329	1.60	-	37.57	16.00	43.84			
AV	15.95562G	36.43	54.00	-17.57	26.66	3	Horizontal	329	1.60	-	37.59	16.00	43.82			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

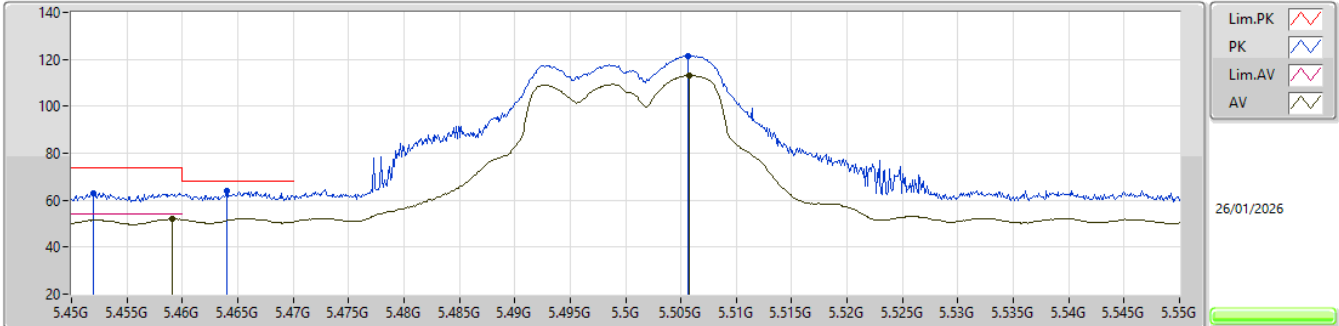


EUT_Y_4TX
Setting 22
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.452G	63.02	74.00	-10.98	58.21	3	Vertical	359	2.04	-	31.51	7.10	33.80			
PK	5.464G	63.84	68.20	-4.36	58.96	3	Vertical	359	2.04	-	31.56	7.12	33.80			
AV	5.4591G	52.02	54.00	-1.98	47.17	3	Vertical	359	2.04	-	31.54	7.11	33.80			
PK	5.5056G	121.58	Inf	-Inf	116.51	3	Vertical	359	2.04	-	31.70	7.18	33.81			
AV	5.5058G	112.98	Inf	-Inf	107.91	3	Vertical	359	2.04	-	31.70	7.18	33.81			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

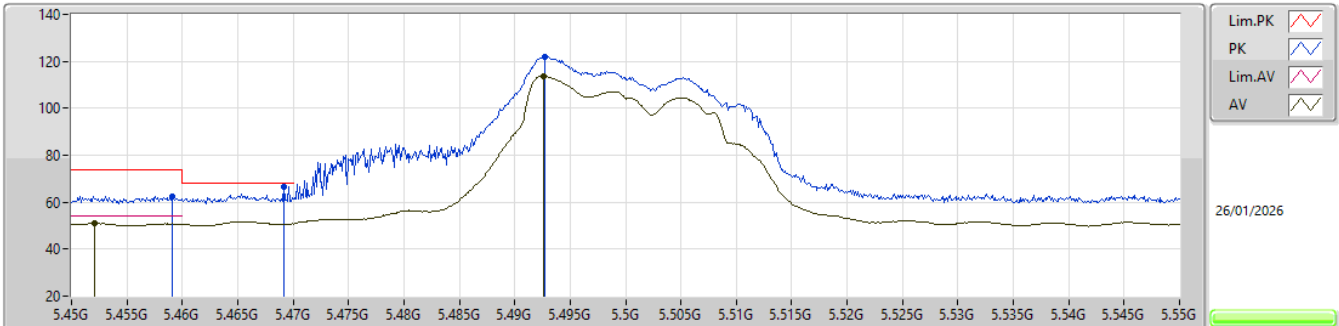


EUT_Y_4TX
Setting 22
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4591G	62.50	74.00	-11.50	57.65	3	Horizontal	294	1.76	-	31.54	7.11	33.80			
AV	5.4521G	50.89	54.00	-3.11	46.08	3	Horizontal	294	1.76	-	31.51	7.10	33.80			
PK	5.4692G	66.74	68.20	-1.46	61.84	3	Horizontal	294	1.76	-	31.58	7.12	33.80			
PK	5.4927G	121.93	Inf	-Inf	116.91	3	Horizontal	294	1.76	-	31.67	7.16	33.81			
AV	5.4926G	113.57	Inf	-Inf	108.55	3	Horizontal	294	1.76	-	31.67	7.16	33.81			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5500MHz_TX

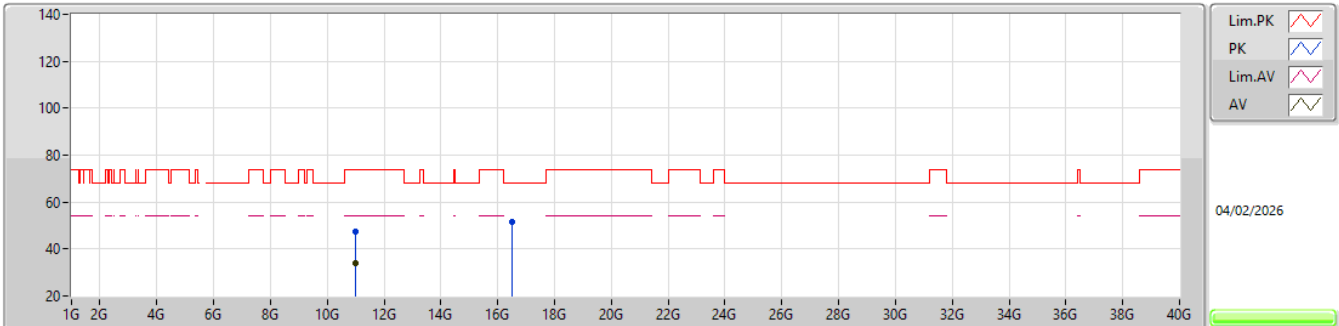EUT_Y_4TX
Setting 22
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99588G	47.27	74.00	-26.73	41.66	3	Vertical	74	1.75	-	38.80	13.05	46.24			
AV	10.99738G	33.94	54.00	-20.06	28.34	3	Vertical	74	1.75	-	38.80	13.05	46.25			
PK	16.49547G	51.41	68.20	-16.79	40.87	3	Vertical	172	1.45	-	38.60	16.48	44.54			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5500MHz_TX

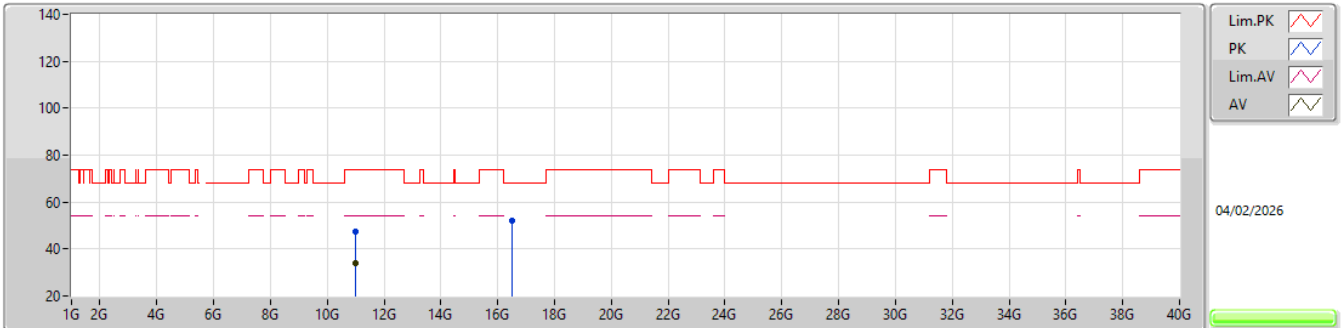


EUT_Y_4TX
Setting 22
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00431G	47.43	74.00	-26.57	41.84	3	Horizontal	222	2.31	-	38.79	13.05	46.25			
AV	10.99742G	33.99	54.00	-20.01	28.39	3	Horizontal	222	2.31	-	38.80	13.05	46.25			
PK	16.4954G	51.93	68.20	-16.27	41.39	3	Horizontal	193	1.59	-	38.60	16.48	44.54			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

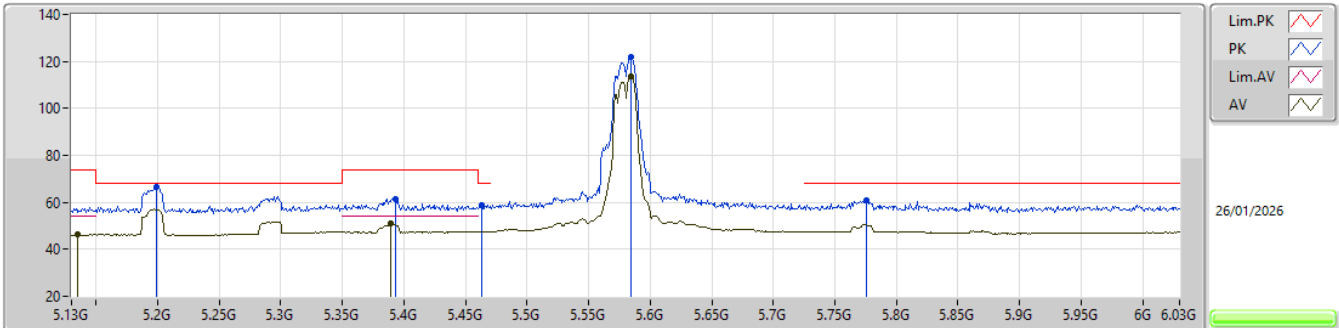


EUT_V_4TX
Setting 22.5
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1993G	66.48	68.20	-1.72	61.68	3	Vertical	350	1.98	-	31.60	6.93	33.73			
AV	5.1354G	46.32	54.00	-7.68	41.30	3	Vertical	350	1.98	-	31.84	6.90	33.72			
PK	5.3928G	61.35	74.00	-12.65	56.73	3	Vertical	350	1.98	-	31.39	7.01	33.78			
AV	5.3892G	50.80	54.00	-3.20	46.19	3	Vertical	350	1.98	-	31.38	7.01	33.78			
PK	5.463G	58.99	68.20	-9.21	54.13	3	Vertical	350	1.98	-	31.55	7.11	33.80			
PK	5.5845G	121.73	Inf	-Inf	116.59	3	Vertical	350	1.98	-	31.63	7.31	33.80			
AV	5.5845G	113.65	Inf	-Inf	108.51	3	Vertical	350	1.98	-	31.63	7.31	33.80			
PK	5.7753G	60.75	68.20	-7.45	55.18	3	Vertical	350	1.98	-	32.00	7.35	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

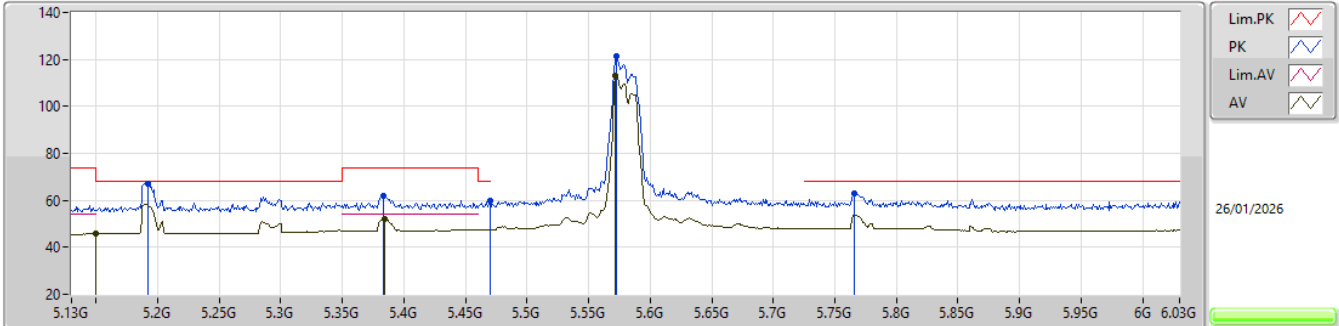


EUT_Y_4TX
Setting 22.5
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1921G	67.20	68.20	-1.00	62.35	3	Horizontal	293	1.72	-	31.65	6.93	33.73
AV	5.1498G	45.88	54.00	-8.12	40.79	3	Horizontal	293	1.72	-	31.90	6.91	33.72
PK	5.3829G	61.90	74.00	-12.10	57.31	3	Horizontal	293	1.72	-	31.37	7.00	33.78
AV	5.3847G	52.23	54.00	-1.77	47.64	3	Horizontal	293	1.72	-	31.37	7.00	33.78
PK	5.47G	59.81	68.20	-8.39	54.90	3	Horizontal	293	1.72	-	31.58	7.13	33.80
PK	5.5728G	121.33	Inf	-Inf	116.18	3	Horizontal	293	1.72	-	31.65	7.30	33.80
AV	5.5719G	113.33	Inf	-Inf	108.18	3	Horizontal	293	1.72	-	31.66	7.29	33.80
PK	5.7654G	63.05	68.20	-5.15	57.48	3	Horizontal	293	1.72	-	32.00	7.35	33.78

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5580MHz_TX

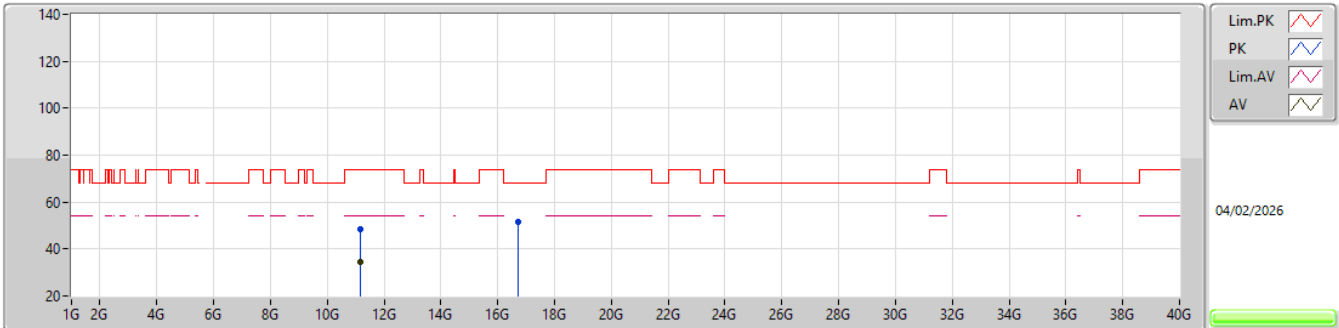EUT_Y_4TX
Setting 22.5
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15595G	48.24	74.00	-25.76	42.29	3	Vertical	127	1.22	-	38.91	13.15	46.11			
AV	11.15875G	34.53	54.00	-19.47	28.57	3	Vertical	127	1.22	-	38.92	13.15	46.11			
PK	16.73969G	51.62	68.20	-16.58	41.22	3	Vertical	92	1.58	-	38.42	16.70	44.72			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5580MHz_TX

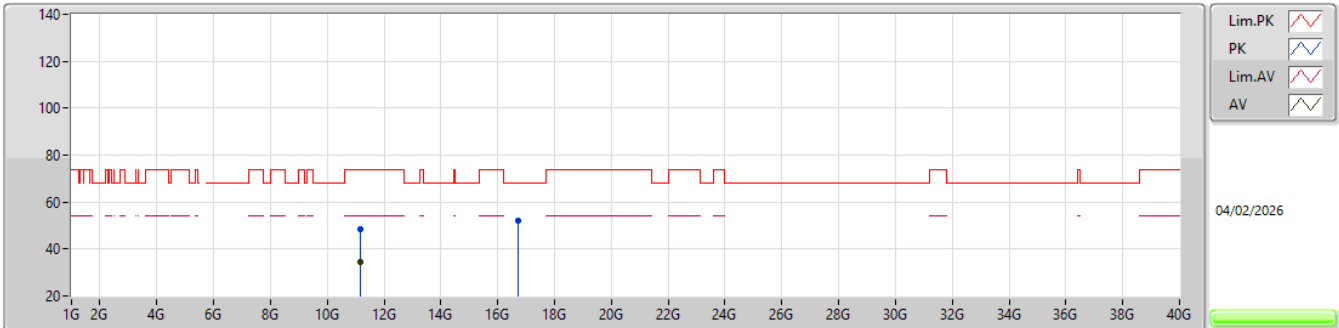


EUT_Y_4TX
Setting 22.5
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16461G	48.59	74.00	-25.41	42.61	3	Horizontal	157	1.99	-	38.93	13.15	46.10			
AV	11.15918G	34.48	54.00	-19.52	28.52	3	Horizontal	157	1.99	-	38.92	13.15	46.11			
PK	16.7388G	51.90	68.20	-16.30	41.51	3	Horizontal	335	2.11	-	38.42	16.69	44.72			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

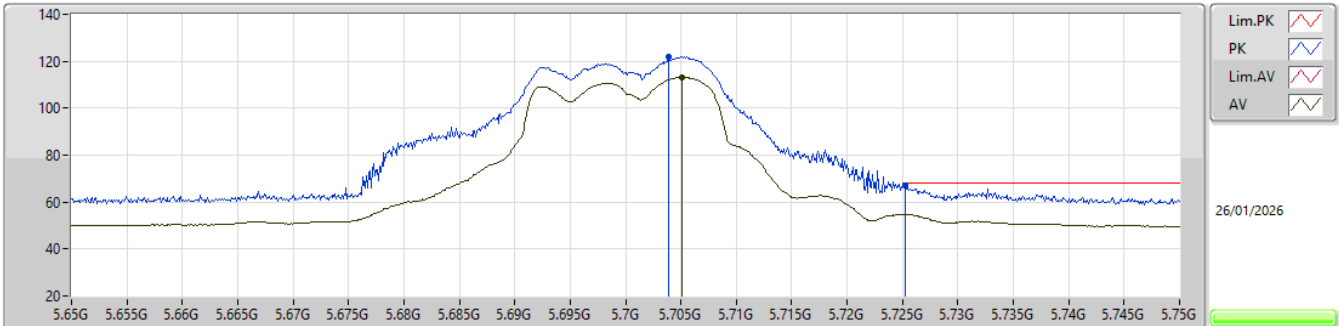


EUT_Y_4TX
Setting 23
06-U-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.7039G	121.76	Inf	-Inf	116.20	3	Vertical	357	1.93	-	32.00	7.35	33.79			
AV	5.7051G	113.28	Inf	-Inf	107.72	3	Vertical	357	1.93	-	32.00	7.35	33.79			
PK	5.7253G	66.98	68.20	-1.22	61.41	3	Vertical	357	1.93	-	32.00	7.35	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5700MHz_TX

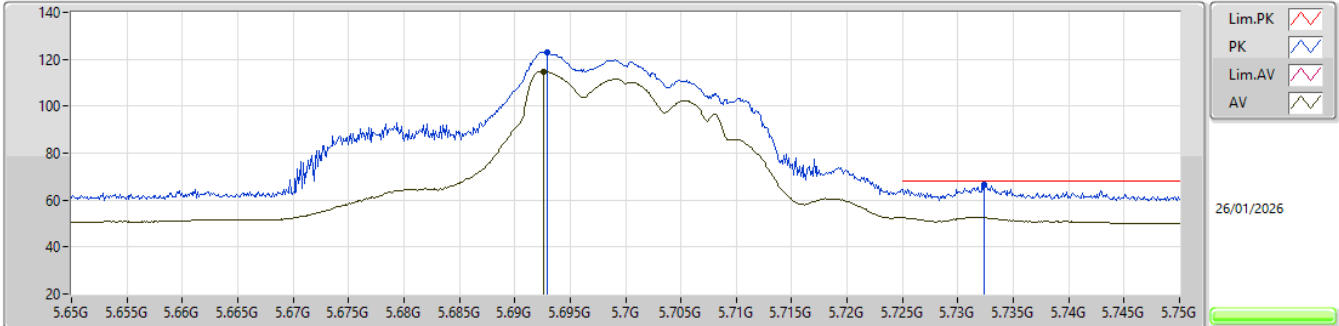


EUT_Y_4TX
Setting 23
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.6929G	123.15	Inf	-Inf	117.64	3	Horizontal	54	1.96	-	31.96	7.34	33.79			
AV	5.6926G	114.81	Inf	-Inf	109.30	3	Horizontal	54	1.96	-	31.96	7.34	33.79			
PK	5.7324G	66.73	68.20	-1.47	61.16	3	Horizontal	54	1.96	-	32.00	7.35	33.78			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5700MHz_TX

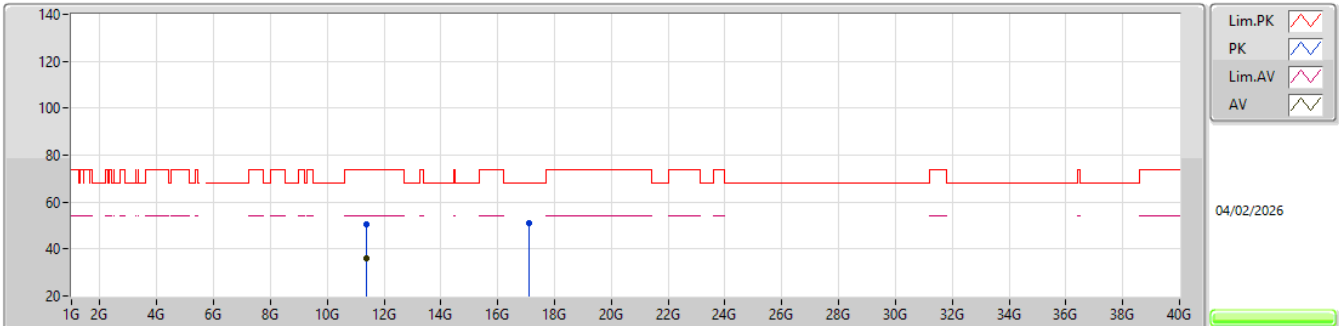EUT_Y_4TX
Setting 23
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40122G	50.49	74.00	-23.51	43.88	3	Vertical	174	1.63	-	39.20	13.30	45.89			
AV	11.40002G	36.14	54.00	-17.86	29.53	3	Vertical	174	1.63	-	39.20	13.30	45.89			
PK	17.10169G	50.98	68.20	-17.22	40.45	3	Vertical	267	1.77	-	38.50	17.02	44.99			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5700MHz_TX

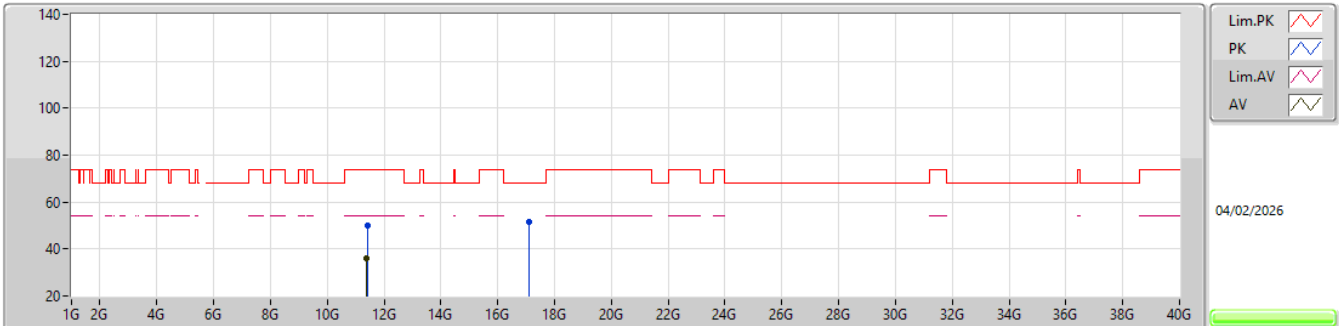EUT_Y_4TX
Setting 23
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40272G	50.17	74.00	-23.83	43.57	3	Horizontal	1	1.79	-	39.19	13.30	45.89			
AV	11.40118G	36.09	54.00	-17.91	29.48	3	Horizontal	1	1.79	-	39.20	13.30	45.89			
PK	17.1043G	51.76	68.20	-16.44	41.22	3	Horizontal	130	2.37	-	38.51	17.02	44.99			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

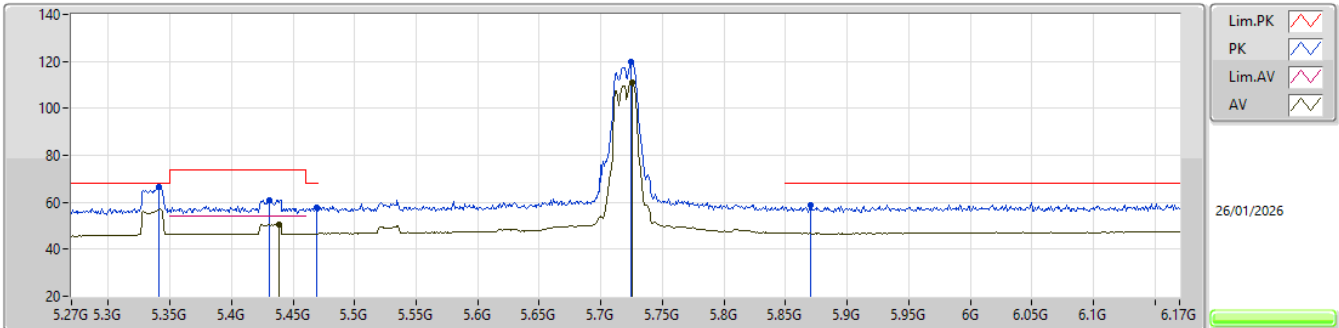


EUT_Y_4TX
Setting 21
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3411G	66.68	68.20	-1.52	62.18	3	Vertical	355	1.94	-	31.28	6.99	33.77			
PK	5.4311G	61.03	74.00	-12.97	56.30	3	Vertical	355	1.94	-	31.46	7.06	33.79			
AV	5.4383G	50.72	54.00	-3.28	45.96	3	Vertical	355	1.94	-	31.48	7.07	33.79			
PK	5.4689G	57.86	68.20	-10.34	52.96	3	Vertical	355	1.94	-	31.58	7.12	33.80			
PK	5.7245G	119.62	Inf	-Inf	114.05	3	Vertical	355	1.94	-	32.00	7.35	33.78			
AV	5.7254G	111.24	Inf	-Inf	105.67	3	Vertical	355	1.94	-	32.00	7.35	33.78			
PK	5.8703G	58.74	68.20	-9.46	52.89	3	Vertical	355	1.94	-	32.14	7.48	33.77			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

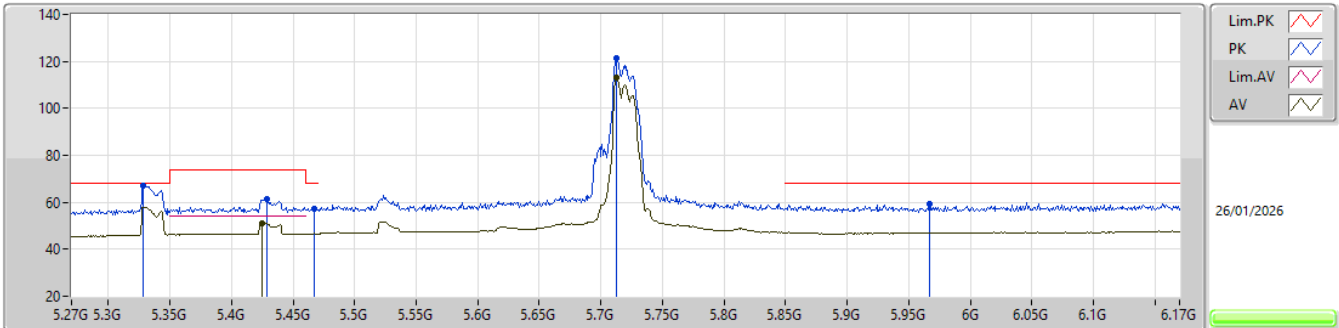


EUT_Y_4TX
Setting 21
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3285G	67.00	68.20	-1.20	62.53	3	Horizontal	58	2.08	-	31.26	6.98	33.77			
PK	5.4284G	61.62	74.00	-12.38	56.89	3	Horizontal	58	2.08	-	31.46	7.06	33.79			
AV	5.4248G	51.29	54.00	-2.71	46.58	3	Horizontal	58	2.08	-	31.45	7.05	33.79			
PK	5.4671G	57.50	68.20	-10.70	52.61	3	Horizontal	58	2.08	-	31.57	7.12	33.80			
PK	5.7128G	121.26	Inf	-Inf	115.69	3	Horizontal	58	2.08	-	32.00	7.35	33.78			
AV	5.7128G	112.91	Inf	-Inf	107.34	3	Horizontal	58	2.08	-	32.00	7.35	33.78			
PK	5.9666G	59.37	68.20	-8.83	53.14	3	Horizontal	58	2.08	-	32.33	7.65	33.75			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

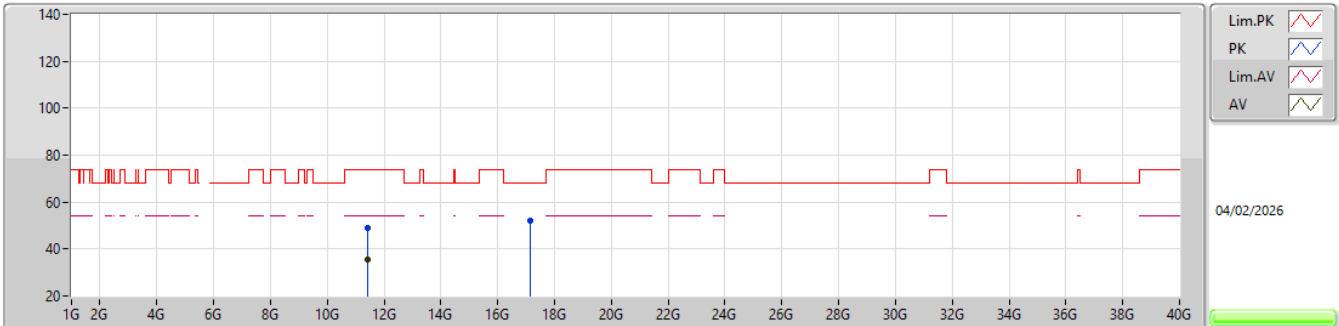EUT_Y_4TX
Setting 21
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4441G	49.14	74.00	-24.86	42.64	3	Vertical	353	2.93	-	39.02	13.33	45.85			
AV	11.44304G	35.71	54.00	-18.29	29.21	3	Vertical	353	2.93	-	39.03	13.32	45.85			
PK	17.15832G	51.84	68.20	-16.36	41.18	3	Vertical	131	2.19	-	38.63	17.07	45.04			

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

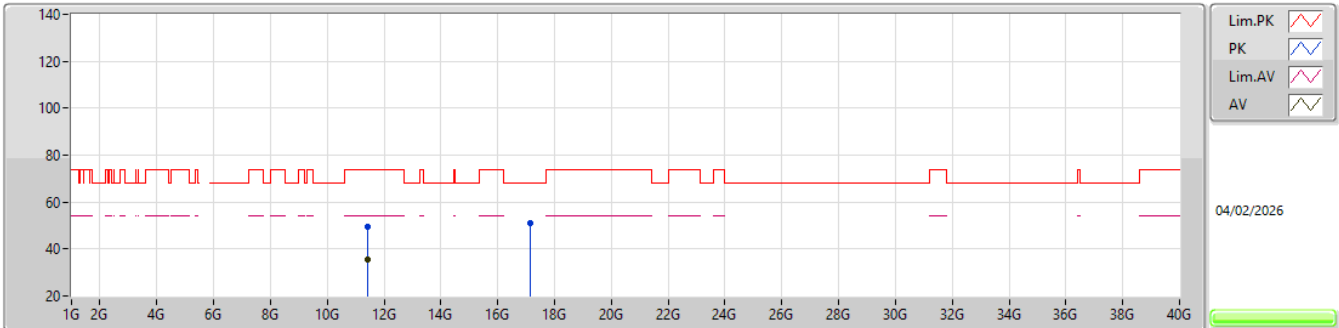EUT_Y_4TX
Setting 21
01-C-I-1

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.44196G	49.29	74.00	-24.71	42.79	3	Horizontal	3	1.51	-	39.03	13.32	45.85			
AV	11.44315G	35.75	54.00	-18.25	29.25	3	Horizontal	3	1.51	-	39.03	13.32	45.85			
PK	17.16335G	51.27	68.20	-16.93	40.58	3	Horizontal	143	1.35	-	38.65	17.08	45.04			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5745MHz_TX

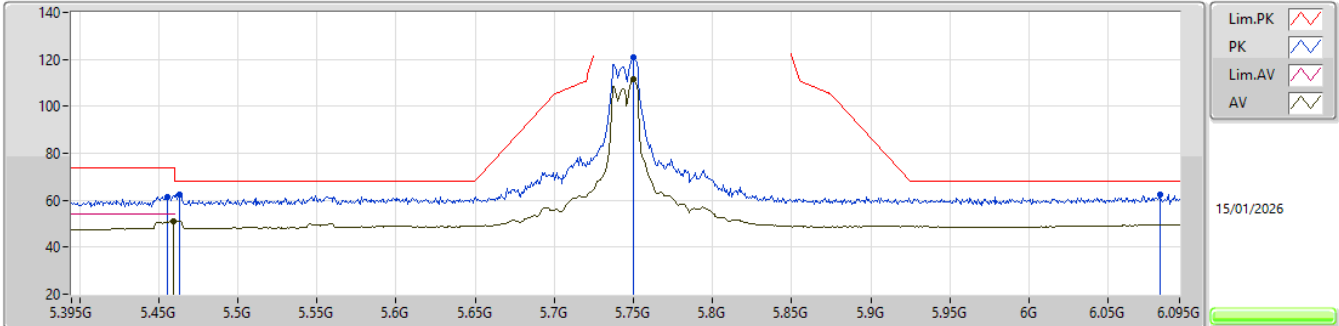


EUT Y_4TX
Setting 24
01-C-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4559G	61.63	74.00	-12.37	52.91	3	Vertical	175	1.79	-	32.71	8.48	32.47			
AV	5.4594G	51.03	54.00	-2.97	42.30	3	Vertical	175	1.79	-	32.72	8.48	32.47			
PK	5.4629G	62.40	68.20	-5.80	53.65	3	Vertical	175	1.79	-	32.73	8.49	32.47			
PK	5.7499G	120.98	Inf	-Inf	111.47	3	Vertical	175	1.79	-	33.40	8.56	32.45			
AV	5.7499G	111.30	Inf	-Inf	101.79	3	Vertical	175	1.79	-	33.40	8.56	32.45			
PK	6.0824G	62.38	68.20	-5.82	51.87	3	Vertical	175	1.79	-	34.10	8.84	32.43			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5745MHz_TX

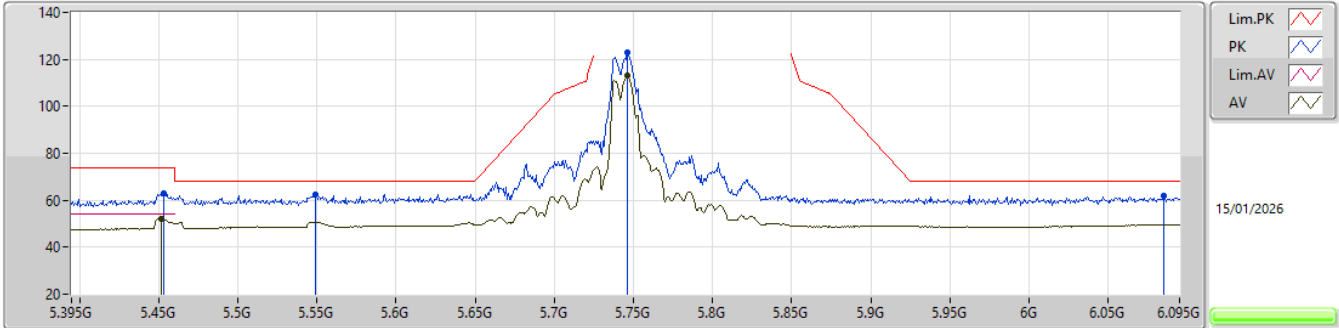


EUT_Y_4TX
Setting 24
01-C-L-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.4531G	63.18	74.00	-10.82	54.46	3	Horizontal	254	1.80	-	32.71	8.48	32.47			
AV	5.4517G	51.97	54.00	-2.03	43.27	3	Horizontal	254	1.80	-	32.70	8.47	32.47			
PK	5.549G	62.52	68.20	-5.68	53.68	3	Horizontal	254	1.80	-	32.70	8.60	32.46			
PK	5.7464G	122.77	Inf	-Inf	113.27	3	Horizontal	254	1.80	-	33.39	8.56	32.45			
AV	5.7464G	113.00	Inf	-Inf	103.50	3	Horizontal	254	1.80	-	33.39	8.56	32.45			
PK	6.0852G	61.84	68.20	-6.36	51.33	3	Horizontal	254	1.80	-	34.10	8.84	32.43			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5745MHz_TX

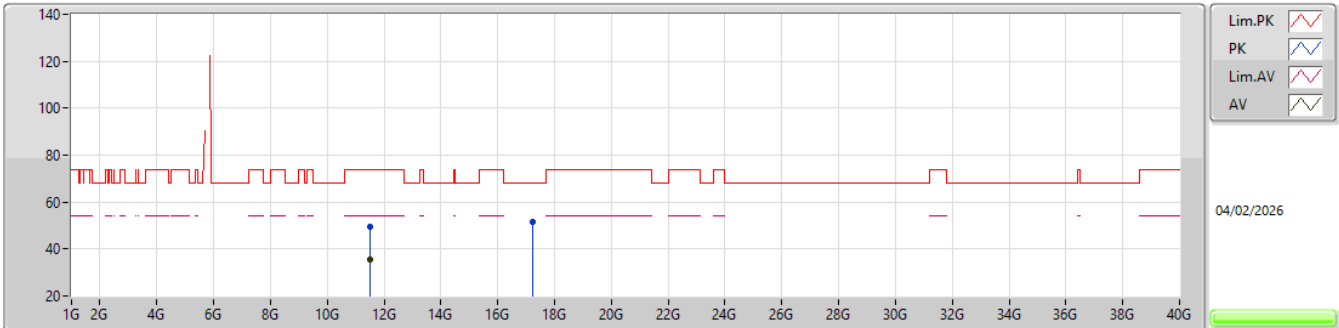EUT_Y_4TX
Setting 24
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.48861G	49.52	74.00	-24.48	42.98	3	Vertical	313	1.21	-	39.00	13.35	45.81			
AV	11.49105G	35.47	54.00	-18.53	28.93	3	Vertical	313	1.21	-	39.00	13.35	45.81			
PK	17.23448G	51.62	68.20	-16.58	40.64	3	Vertical	95	1.42	-	38.94	17.14	45.10			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5745MHz_TX

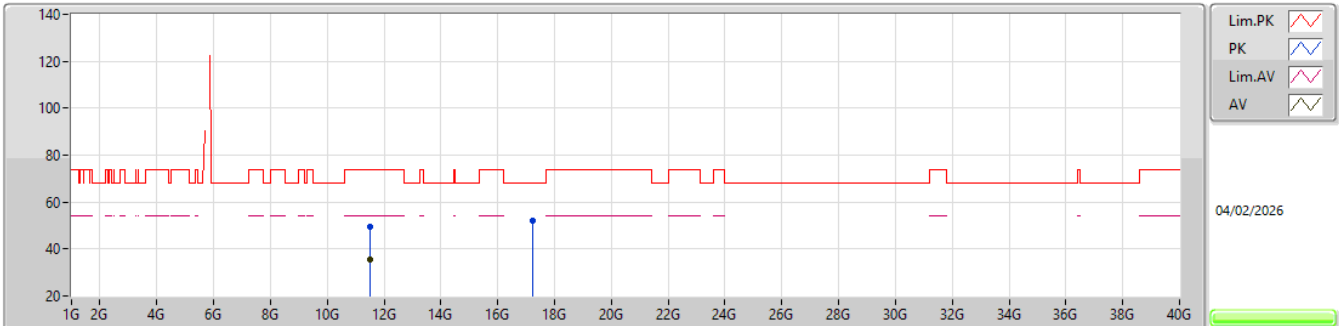EUT_Y_4TX
Setting 24
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.49125G	49.25	74.00	-24.75	42.71	3	Horizontal	27	2.95	-	39.00	13.35	45.81			
AV	11.494G	35.51	54.00	-18.49	28.96	3	Horizontal	27	2.95	-	39.00	13.36	45.81			
PK	17.23589G	52.06	68.20	-16.14	41.08	3	Horizontal	240	2.61	-	38.94	17.14	45.10			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5785MHz_TX

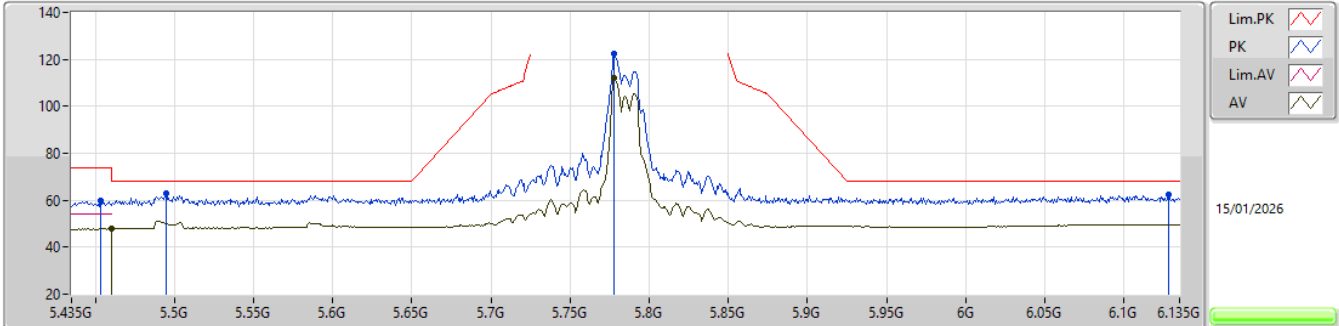


EUT_Y_4TX
Setting 24
01-C-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4532G	59.87	74.00	-14.13	51.15	3	Vertical	144	2.06	-	32.71	8.48	32.47
AV	5.46G	47.80	54.00	-6.20	39.07	3	Vertical	144	2.06	-	32.72	8.48	32.47
PK	5.4945G	62.82	68.20	-5.38	53.96	3	Vertical	144	2.06	-	32.79	8.53	32.46
PK	5.778G	122.48	Inf	-Inf	112.82	3	Vertical	144	2.06	-	33.57	8.54	32.45
AV	5.778G	112.31	Inf	-Inf	102.65	3	Vertical	144	2.06	-	33.57	8.54	32.45
PK	6.128G	62.28	68.20	-5.92	51.66	3	Vertical	144	2.06	-	34.16	8.88	32.42

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5785MHz_TX

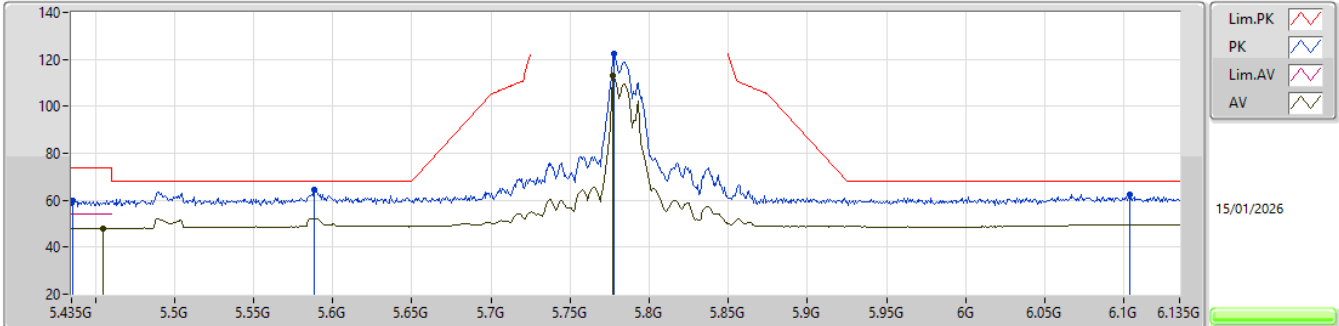


EUT_Y_4TX
Setting 24
01-C-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4357G	59.91	74.00	-14.09	51.24	3	Horizontal	234	1.80	-	32.70	8.45	32.48			
AV	5.4553G	47.90	54.00	-6.10	39.18	3	Horizontal	234	1.80	-	32.71	8.48	32.47			
PK	5.5883G	64.36	68.20	-3.84	55.47	3	Horizontal	234	1.80	-	32.70	8.65	32.46			
PK	5.778G	122.51	Inf	-Inf	112.85	3	Horizontal	234	1.80	-	33.57	8.54	32.45			
AV	5.7773G	112.90	Inf	-Inf	103.25	3	Horizontal	234	1.80	-	33.56	8.54	32.45			
PK	6.1035G	62.44	68.20	-5.76	51.90	3	Horizontal	234	1.80	-	34.11	8.86	32.43			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5785MHz_TX

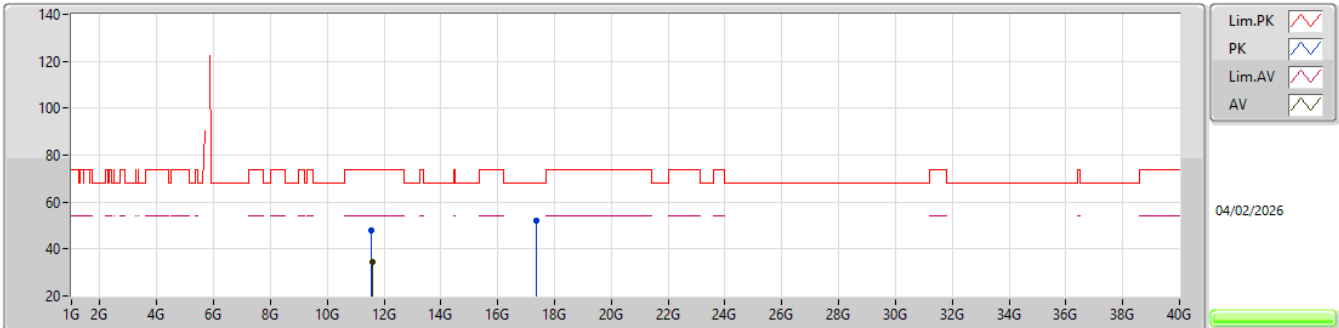EUT_Y_4TX
Setting 24
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57173G	47.95	74.00	-26.05	41.60	3	Vertical	271	2.79	-	38.77	13.40	45.82			
AV	11.57393G	34.62	54.00	-19.38	28.28	3	Vertical	271	2.79	-	38.76	13.41	45.83			
PK	17.35824G	51.92	68.20	-16.28	40.54	3	Vertical	352	2.40	-	39.33	17.25	45.20			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5785MHz_TX

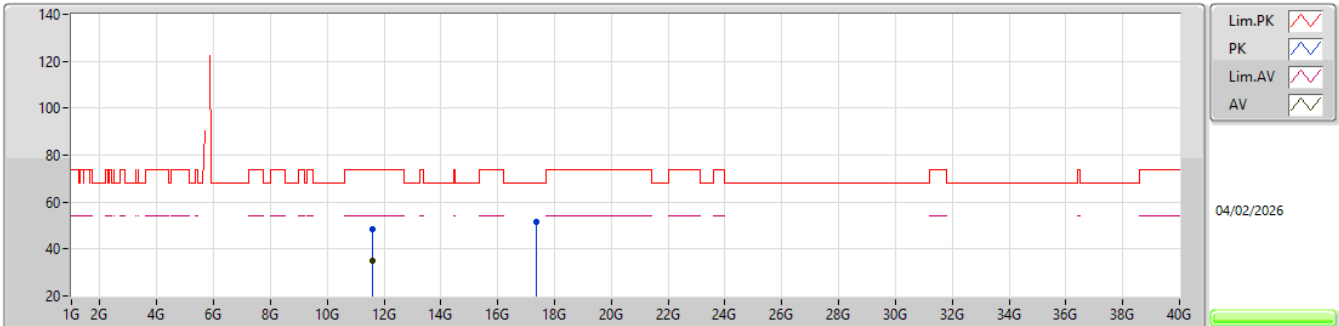EUT_Y_4TX
Setting 24
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.57462G	48.66	74.00	-25.34	42.33	3	Horizontal	32	1.66	-	38.75	13.41	45.83			
AV	11.57387G	34.99	54.00	-19.01	28.65	3	Horizontal	32	1.66	-	38.76	13.41	45.83			
PK	17.35523G	51.44	68.20	-16.76	40.06	3	Horizontal	59	3.00	-	39.32	17.25	45.19			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

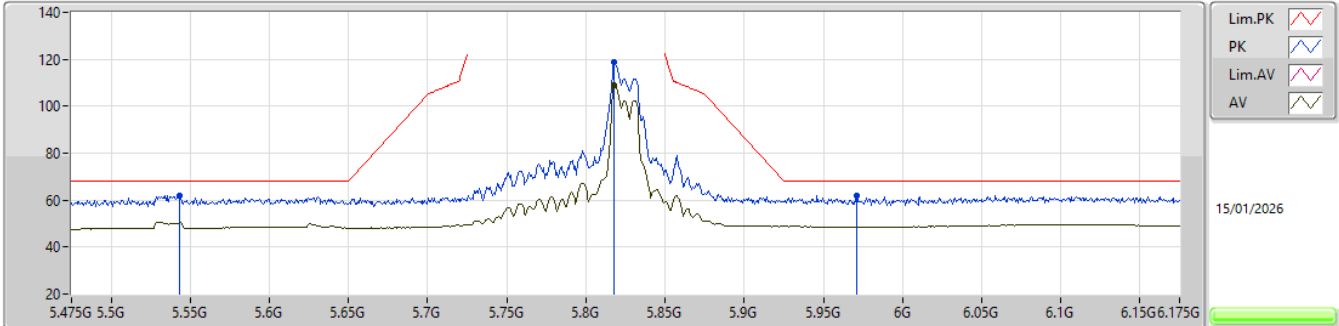


EUT_Y_4TX
Setting 24
01-C-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.5436G	62.00	68.20	-6.20	53.16	3	Vertical	147	1.79	-	32.71	8.59	32.46			
PK	5.818G	118.84	Inf	-Inf	108.98	3	Vertical	147	1.79	-	33.77	8.54	32.45			
AV	5.818G	109.12	Inf	-Inf	99.26	3	Vertical	147	1.79	-	33.77	8.54	32.45			
PK	5.9713G	61.98	68.20	-6.22	51.59	3	Vertical	147	1.79	-	34.10	8.73	32.44			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

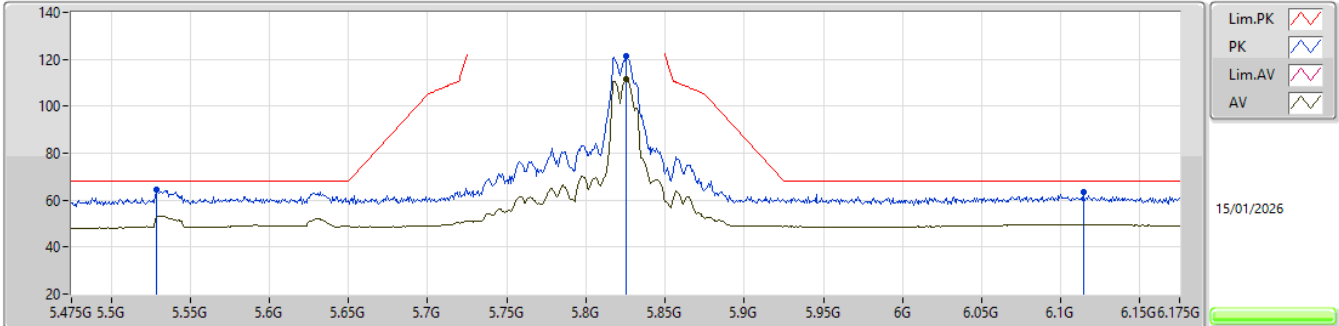


EUT_Y_4TX
Setting 24
01-C-L-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.5289G	64.34	68.20	-3.86	55.49	3	Horizontal	249	1.80	-	32.74	8.57	32.46			
PK	5.8257G	121.14	Inf	-Inf	111.24	3	Horizontal	249	1.80	-	33.80	8.55	32.45			
AV	5.8257G	111.54	Inf	-Inf	101.64	3	Horizontal	249	1.80	-	33.80	8.55	32.45			
PK	6.1141G	63.21	68.20	-4.99	52.64	3	Horizontal	249	1.80	-	34.13	8.87	32.43			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX


5825MHz_TX

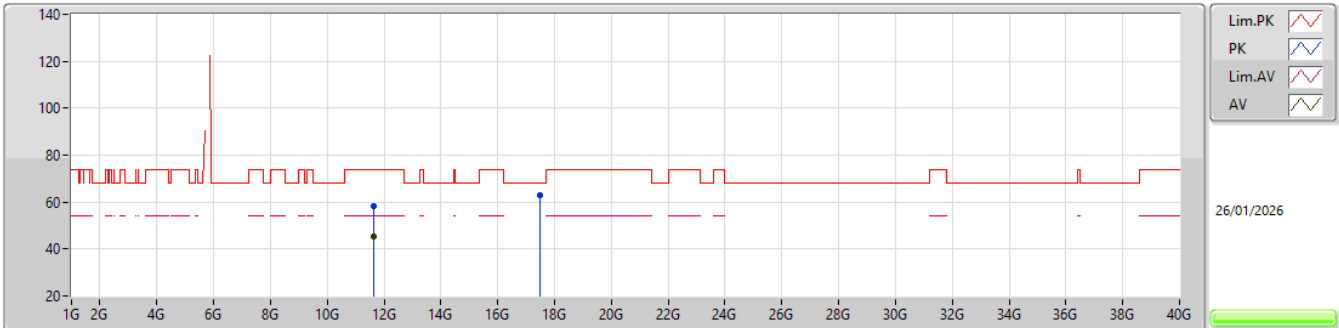EUT_Y_4TX
Setting 24
06-U-P-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.638G	58.21	74.00	-15.79	42.59	3	Vertical	347	1.79	-	39.27	11.00	34.65			
AV	11.63539G	45.20	54.00	-8.80	29.56	3	Vertical	347	1.79	-	39.29	11.00	34.65			
PK	17.48415G	62.93	68.20	-5.27	39.52	3	Vertical	171	1.80	-	42.30	14.57	33.46			

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

5825MHz_TX

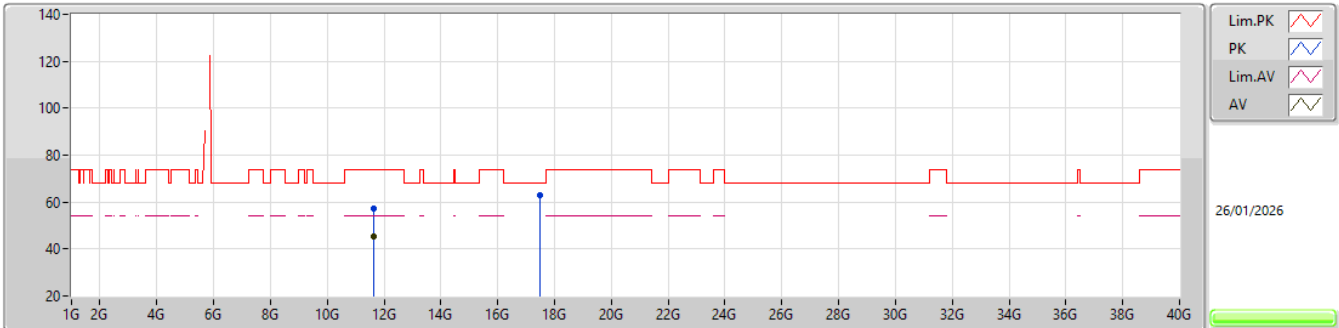


EUT_Y_4TX
Setting 24
06-U-P-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.63974G	57.39	74.00	-16.61	41.78	3	Horizontal	148	1.80	-	39.26	11.00	34.65			
AV	11.63686G	45.12	54.00	-8.88	29.49	3	Horizontal	148	1.80	-	39.28	11.00	34.65			
PK	17.4891G	63.13	68.20	-5.07	39.69	3	Horizontal	302	1.80	-	42.33	14.57	33.46			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5180MHz_TX

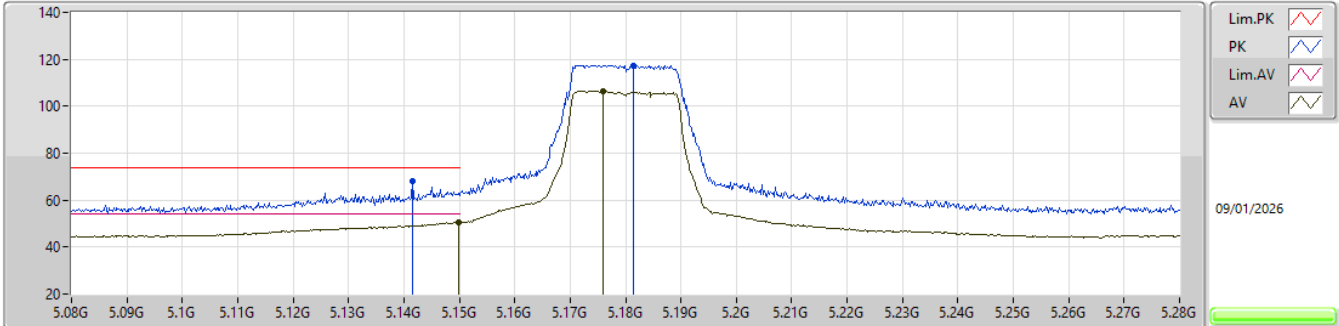


EUT_Y_4TX
Setting 27
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1416G	68.31	74.00	-5.69	59.39	3	Vertical	342	1.80	-	33.07	8.40	32.55			
AV	5.1498G	50.53	54.00	-3.47	41.57	3	Vertical	342	1.80	-	33.10	8.40	32.54			
PK	5.1814G	117.47	Inf	-Inf	108.56	3	Vertical	342	1.80	-	33.04	8.41	32.54			
AV	5.176G	106.51	Inf	-Inf	97.60	3	Vertical	342	1.80	-	33.05	8.40	32.54			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5180MHz_TX

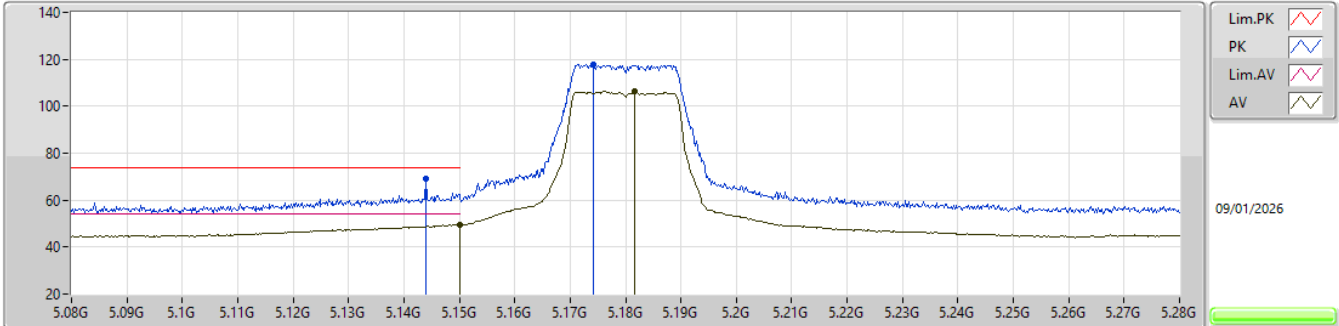


EUT_Y_4TX
Setting 27
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.144G	69.31	74.00	-4.69	60.38	3	Horizontal	72	2.92	-	33.08	8.40	32.55			
AV	5.15G	49.73	54.00	-4.27	40.77	3	Horizontal	72	2.92	-	33.10	8.40	32.54			
PK	5.1742G	117.89	Inf	-Inf	108.98	3	Horizontal	72	2.92	-	33.05	8.40	32.54			
AV	5.1816G	106.40	Inf	-Inf	97.49	3	Horizontal	72	2.92	-	33.04	8.41	32.54			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5180MHz_TX

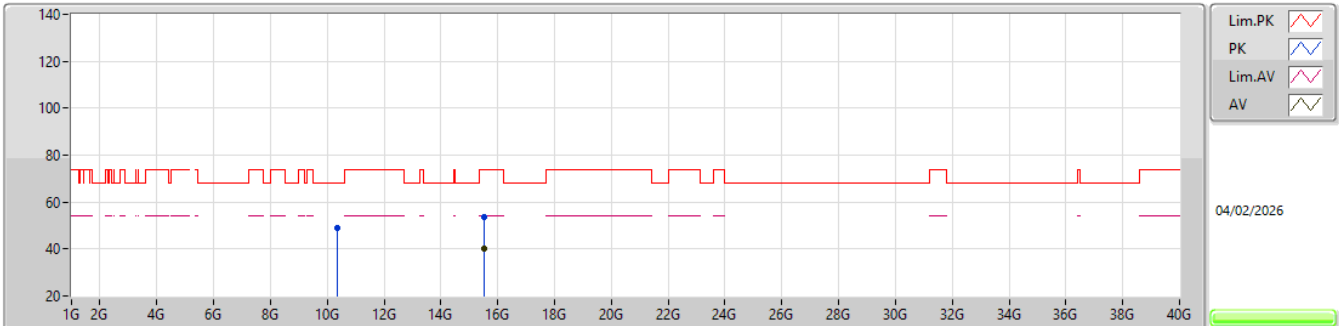


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36406G	49.08	68.20	-19.12	43.26	3	Vertical	70	1.62	-	38.50	12.66	45.34			
PK	15.53851G	53.58	74.00	-20.42	42.91	3	Vertical	347	1.98	-	37.92	15.70	42.95			
AV	15.54083G	39.96	54.00	-14.04	29.29	3	Vertical	347	1.98	-	37.92	15.70	42.95			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5180MHz_TX

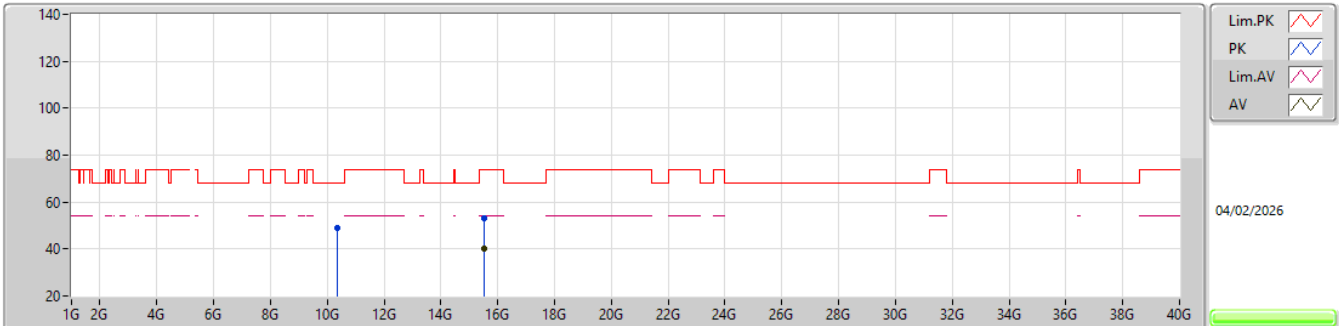


EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.36108G	48.71	68.20	-19.49	42.90	3	Horizontal	112	2.02	-	38.50	12.65	45.34			
PK	15.53725G	53.28	74.00	-20.72	42.61	3	Horizontal	234	1.13	-	37.93	15.69	42.95			
AV	15.53877G	40.00	54.00	-14.00	29.33	3	Horizontal	234	1.13	-	37.92	15.70	42.95			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5200MHz_TX

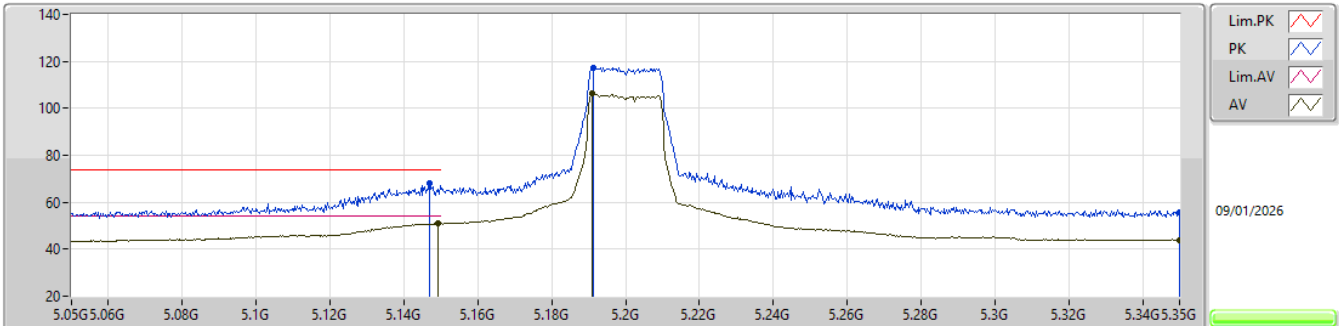EUT_Y_4TX
Setting 28
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1469G	68.09	74.00	-5.91	59.14	3	Vertical	336	1.80	-	33.09	8.40	32.54
AV	5.1493G	51.02	54.00	-2.98	42.06	3	Vertical	336	1.80	-	33.10	8.40	32.54
PK	5.1913G	117.33	Inf	-Inf	108.43	3	Vertical	336	1.80	-	33.02	8.41	32.53
AV	5.191G	106.29	Inf	-Inf	97.39	3	Vertical	336	1.80	-	33.02	8.41	32.53
PK	5.35G	55.51	74.00	-18.49	46.80	3	Vertical	336	1.80	-	32.80	8.41	32.50
AV	5.35G	43.79	54.00	-10.21	35.08	3	Vertical	336	1.80	-	32.80	8.41	32.50

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5200MHz_TX

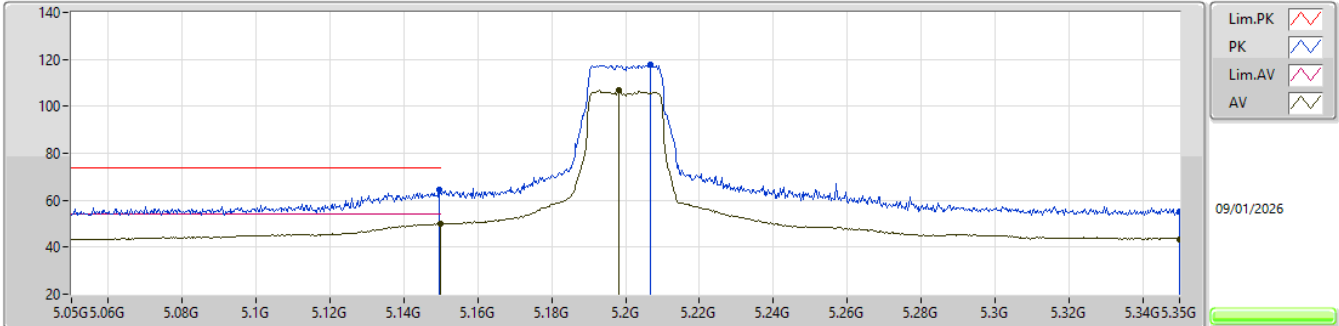


EUT_Y_4TX
Setting 28
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	64.50	74.00	-9.50	55.54	3	Horizontal	60	1.80	-	33.10	8.40	32.54			
AV	5.1499G	50.04	54.00	-3.96	41.08	3	Horizontal	60	1.80	-	33.10	8.40	32.54			
PK	5.2069G	117.77	Inf	-Inf	108.90	3	Horizontal	60	1.80	-	32.99	8.41	32.53			
AV	5.1982G	106.96	Inf	-Inf	98.08	3	Horizontal	60	1.80	-	33.00	8.41	32.53			
PK	5.35G	55.30	74.00	-18.70	46.59	3	Horizontal	60	1.80	-	32.80	8.41	32.50			
AV	5.35G	43.50	54.00	-10.50	34.79	3	Horizontal	60	1.80	-	32.80	8.41	32.50			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5200MHz_TX

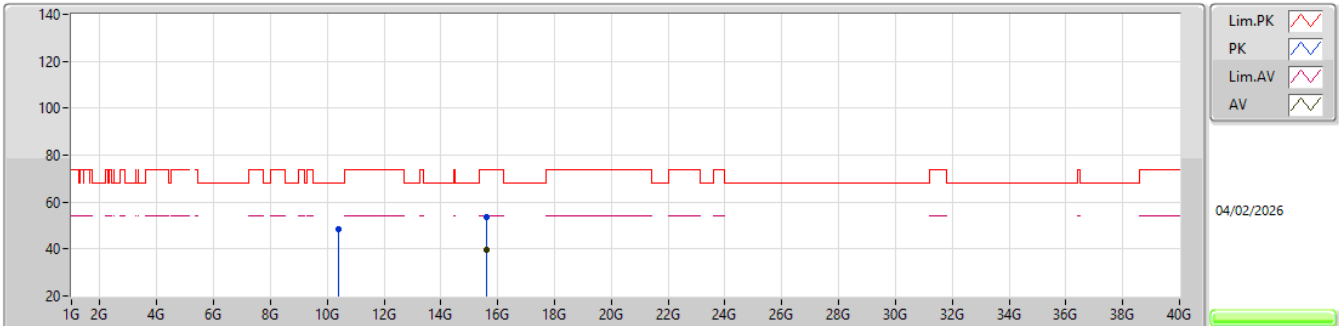


EUT_Y_4TX
Setting 28
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.39609G	48.42	68.20	-19.78	42.57	3	Vertical	83	1.46	-	38.50	12.68	45.33			
PK	15.60067G	53.53	74.00	-20.47	42.97	3	Vertical	144	1.75	-	37.90	15.74	43.08			
AV	15.60379G	39.82	54.00	-14.18	29.29	3	Vertical	144	1.75	-	37.88	15.74	43.09			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5200MHz_TX

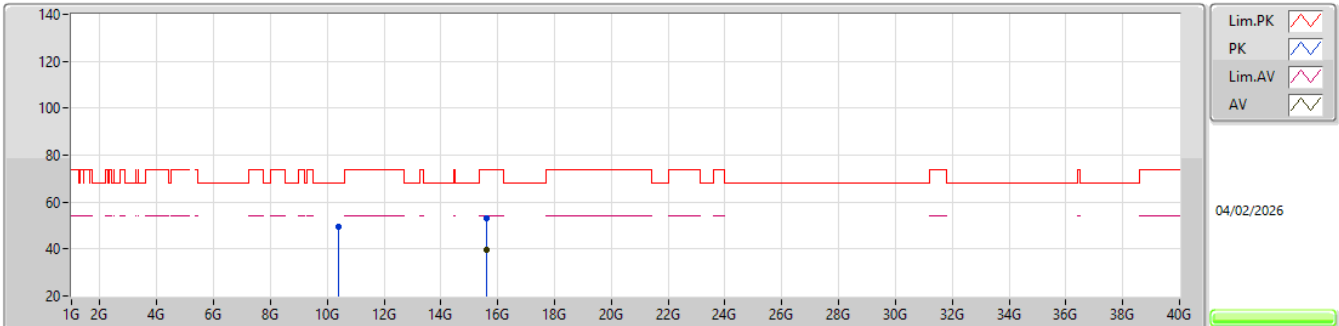


EUT_Y_4TX
Setting 28
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.40435G	49.30	68.20	-18.90	43.44	3	Horizontal	295	1.33	-	38.51	12.68	45.33			
PK	15.60312G	53.13	74.00	-20.87	42.58	3	Horizontal	287	1.58	-	37.89	15.74	43.08			
AV	15.60404G	39.77	54.00	-14.23	29.24	3	Horizontal	287	1.58	-	37.88	15.74	43.09			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5240MHz_TX

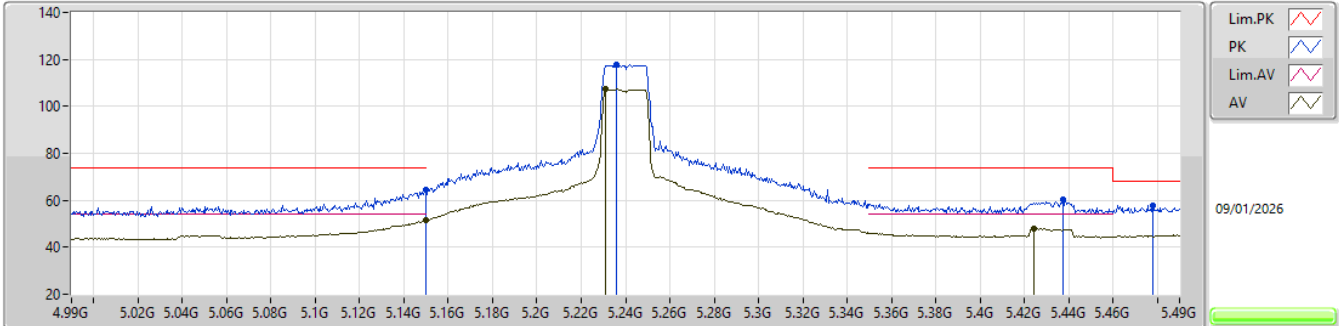


EUT_Y_4TX
Setting 30
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.15G	64.65	74.00	-9.35	55.69	3	Vertical	344	1.80	-	33.10	8.40	32.54			
AV	5.15G	51.56	54.00	-2.44	42.60	3	Vertical	344	1.80	-	33.10	8.40	32.54			
PK	5.236G	117.52	Inf	-Inf	108.70	3	Vertical	344	1.80	-	32.93	8.41	32.52			
AV	5.231G	107.36	Inf	-Inf	98.53	3	Vertical	344	1.80	-	32.94	8.41	32.52			
PK	5.4375G	60.18	74.00	-13.82	51.50	3	Vertical	344	1.80	-	32.70	8.46	32.48			
AV	5.4245G	48.02	54.00	-5.98	39.36	3	Vertical	344	1.80	-	32.70	8.44	32.48			
PK	5.478G	57.76	68.20	-10.44	48.96	3	Vertical	344	1.80	-	32.76	8.51	32.47			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5240MHz_TX

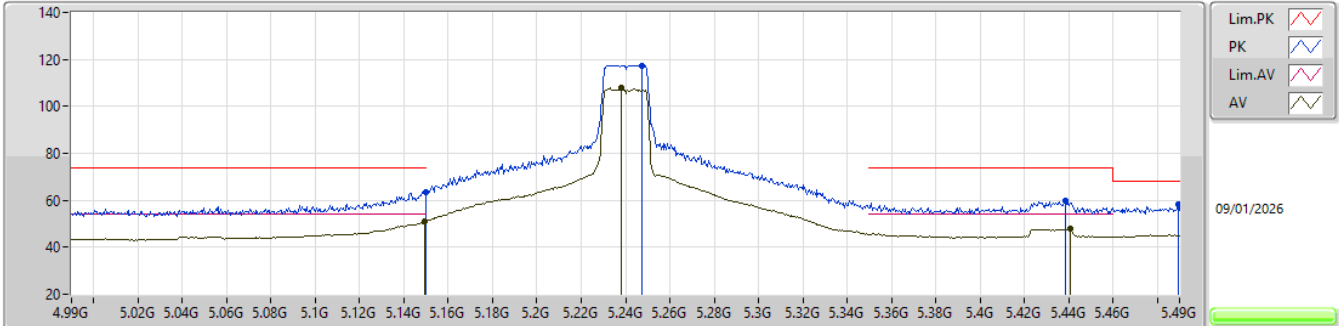


EUT_Y_4TX
Setting 30
01-C-L-4-6

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	63.56	74.00	-10.44	54.60	3	Horizontal	62	1.80	-	33.10	8.40	32.54
AV	5.1495G	51.11	54.00	-2.89	42.15	3	Horizontal	62	1.80	-	33.10	8.40	32.54
PK	5.2475G	117.44	Inf	-Inf	108.64	3	Horizontal	62	1.80	-	32.91	8.41	32.52
AV	5.238G	107.78	Inf	-Inf	98.97	3	Horizontal	62	1.80	-	32.92	8.41	32.52
PK	5.4385G	59.67	74.00	-14.33	50.98	3	Horizontal	62	1.80	-	32.70	8.46	32.47
AV	5.4405G	47.83	54.00	-6.17	39.14	3	Horizontal	62	1.80	-	32.70	8.46	32.47
PK	5.4895G	58.18	68.20	-10.02	49.34	3	Horizontal	62	1.80	-	32.78	8.52	32.46

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5240MHz_TX

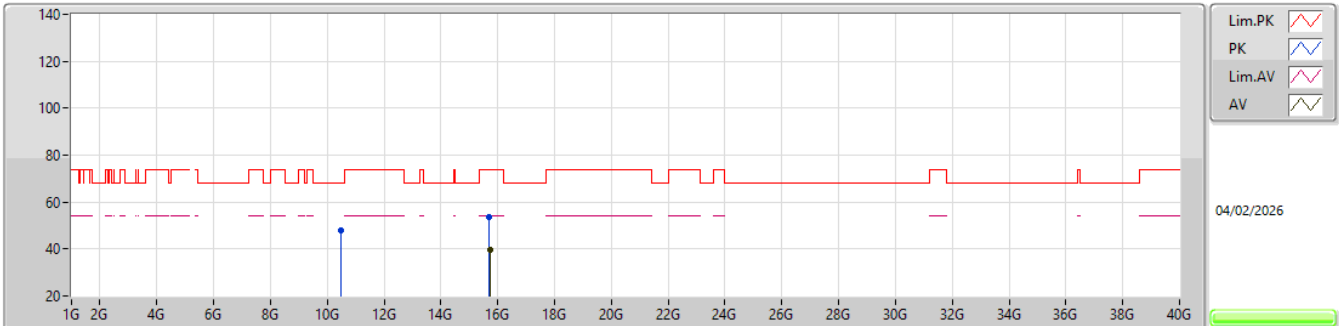


EUT_Y_4TX
Setting 30
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47996G	48.06	68.20	-20.14	42.04	3	Vertical	345	1.54	-	38.60	12.73	45.31			
PK	15.71568G	53.50	74.00	-20.50	43.17	3	Vertical	147	2.05	-	37.83	15.82	43.32			
AV	15.72149G	39.58	54.00	-14.42	29.24	3	Vertical	147	2.05	-	37.84	15.83	43.33			

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5240MHz_TX

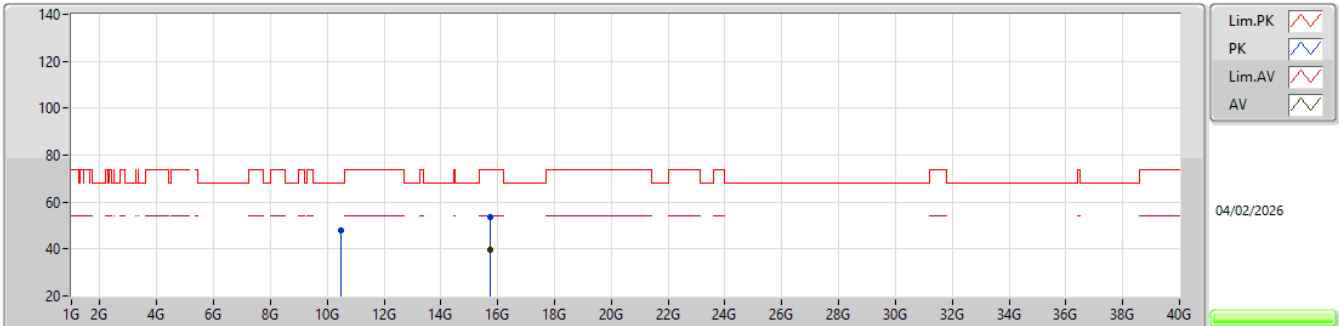


EUT_Y_4TX
Setting 30
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47758G	47.76	68.20	-20.44	41.75	3	Horizontal	15	2.84	-	38.60	12.73	45.32			
PK	15.71899G	53.65	74.00	-20.35	43.31	3	Horizontal	295	2.54	-	37.84	15.83	43.33			
AV	15.71607G	39.59	54.00	-14.41	29.26	3	Horizontal	295	2.54	-	37.83	15.82	43.32			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5260MHz_TX

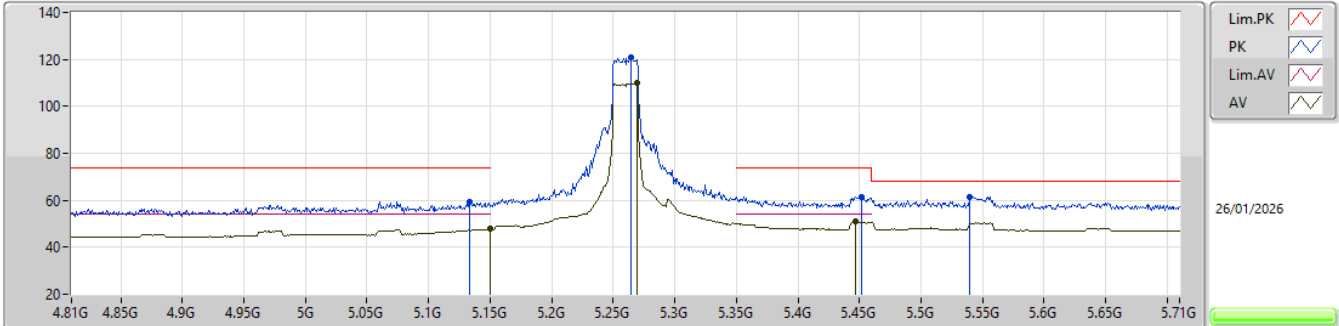


EUT_Y_4TX
Setting 30
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1331G	59.19	74.00	-14.81	54.17	3	Vertical	17	2.04	-	31.83	6.90	33.71			
AV	5.15G	47.73	54.00	-6.27	42.64	3	Vertical	17	2.04	-	31.90	6.91	33.72			
PK	5.2645G	120.74	Inf	-Inf	116.26	3	Vertical	17	2.04	-	31.27	6.96	33.75			
AV	5.269G	110.09	Inf	-Inf	105.62	3	Vertical	17	2.04	-	31.26	6.96	33.75			
PK	5.4517G	61.44	74.00	-12.56	56.63	3	Vertical	17	2.04	-	31.51	7.10	33.80			
AV	5.4472G	51.29	54.00	-2.71	46.51	3	Vertical	17	2.04	-	31.49	7.09	33.80			
PK	5.5399G	61.40	68.20	-6.80	56.27	3	Vertical	17	2.04	-	31.70	7.24	33.81			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5260MHz_TX

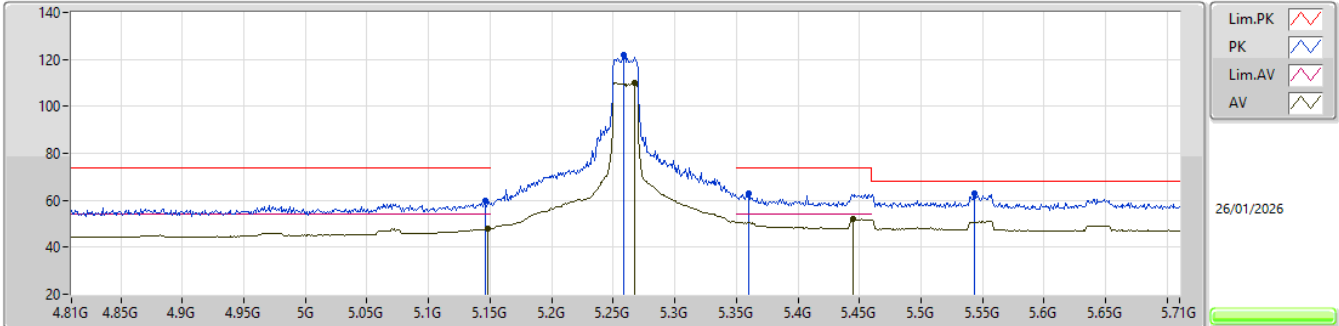


EUT_Y_4TX
Setting 30
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1457G	59.93	74.00	-14.07	54.86	3	Horizontal	294.7	2.75	-	31.88	6.91	33.72				
AV	5.1484G	47.87	54.00	-6.13	42.79	3	Horizontal	294.7	2.75	-	31.89	6.91	33.72				
PK	5.2582G	121.83	Inf	-Inf	117.35	3	Horizontal	294.7	2.75	-	31.28	6.95	33.75				
AV	5.2672G	110.21	Inf	-Inf	105.73	3	Horizontal	294.7	2.75	-	31.27	6.96	33.75				
PK	5.3599G	63.05	74.00	-10.95	58.51	3	Horizontal	294.7	2.75	-	31.32	6.99	33.77				
AV	5.4445G	51.95	54.00	-2.05	47.18	3	Horizontal	294.7	2.75	-	31.49	7.08	33.80				
PK	5.5435G	62.92	68.20	-5.28	57.77	3	Horizontal	294.7	2.75	-	31.70	7.25	33.80				

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5260MHz_TX

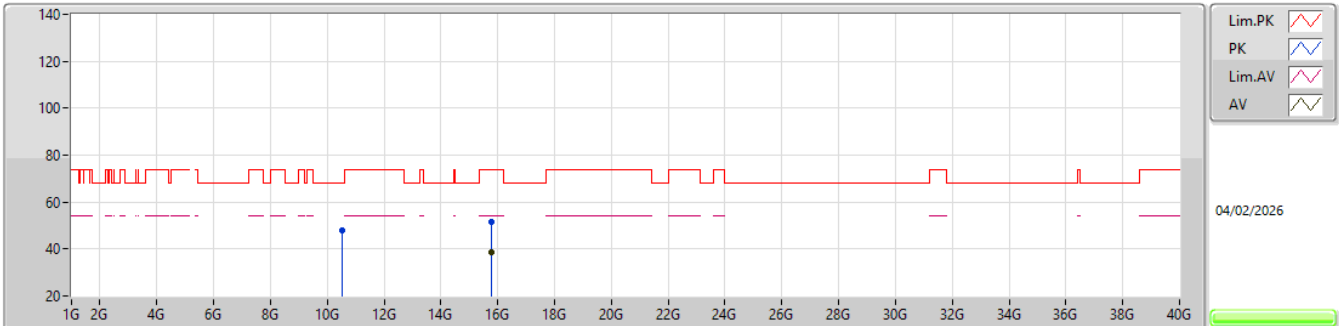


EUT_Y_4TX
Setting 30
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52383G	48.07	68.20	-20.13	42.07	3	Vertical	102	2.77	-	38.60	12.75	45.35			
PK	15.77812G	51.71	74.00	-22.29	41.61	3	Vertical	334	1.74	-	37.68	15.87	43.45			
AV	15.77752G	38.51	54.00	-15.49	28.41	3	Vertical	334	1.74	-	37.68	15.87	43.45			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5260MHz_TX

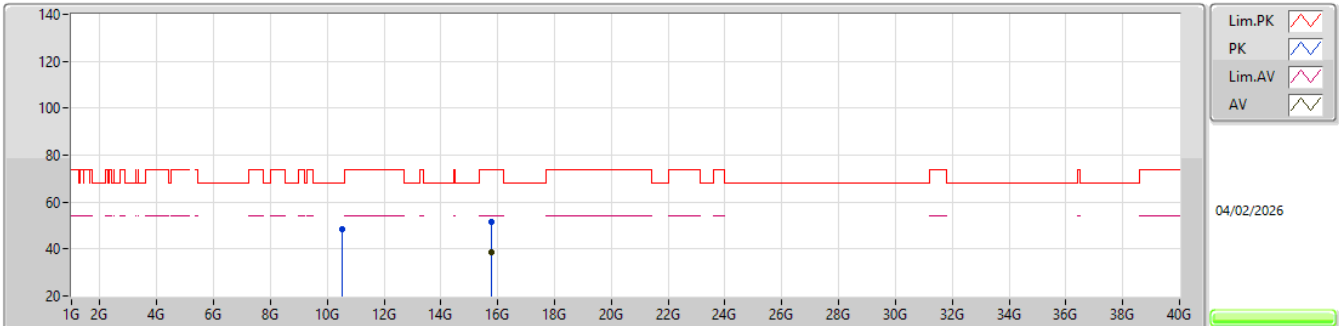EUT_Y_4TX
Setting 30
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52121G	48.42	68.20	-19.78	42.42	3	Horizontal	322	1.42	-	38.60	12.75	45.35			
PK	15.78299G	51.65	74.00	-22.35	41.60	3	Horizontal	214	1.30	-	37.64	15.87	43.46			
AV	15.77732G	38.43	54.00	-15.57	28.33	3	Horizontal	214	1.30	-	37.68	15.87	43.45			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5300MHz_TX

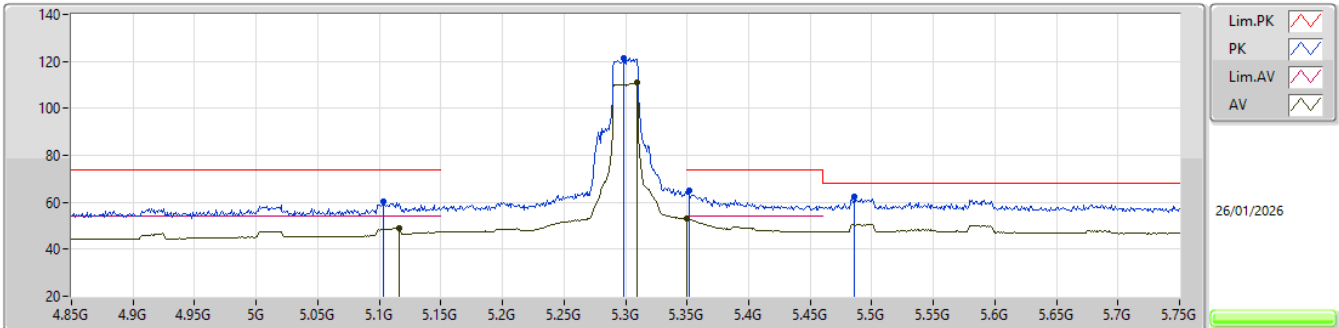


EUT_Y_4TX
Setting 30
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1029G	60.11	74.00	-13.89	55.22	3	Vertical	16	1.92	-	31.71	6.89	33.71				
AV	5.1164G	49.10	54.00	-4.90	44.15	3	Vertical	16	1.92	-	31.77	6.89	33.71				
PK	5.2982G	121.55	Inf	-Inf	117.14	3	Vertical	16	1.92	-	31.20	6.97	33.76				
AV	5.309G	110.89	Inf	-Inf	106.46	3	Vertical	16	1.92	-	31.22	6.97	33.76				
PK	5.3513G	64.87	74.00	-9.13	60.35	3	Vertical	16	1.92	-	31.30	6.99	33.77				
AV	5.35G	52.98	54.00	-1.02	48.46	3	Vertical	16	1.92	-	31.30	6.99	33.77				
PK	5.4863G	62.24	68.20	-5.96	57.25	3	Vertical	16	1.92	-	31.65	7.15	33.81				

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5300MHz_TX

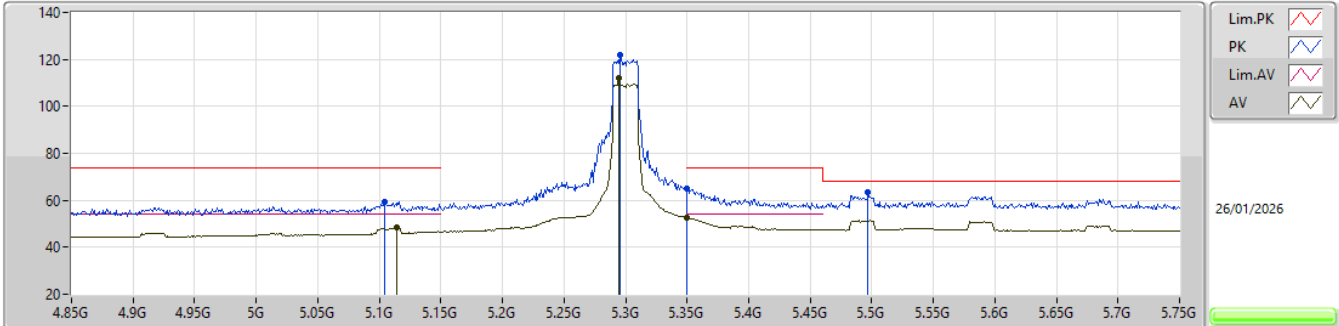


EUT_Y_4TX
Setting 30
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1047G	59.16	74.00	-14.84	54.26	3	Horizontal	305	1.92	-	31.72	6.89	33.71			
AV	5.1146G	48.28	54.00	-5.72	43.34	3	Horizontal	305	1.92	-	31.76	6.89	33.71			
PK	5.2955G	121.77	Inf	-Inf	117.35	3	Horizontal	305	1.92	-	31.21	6.97	33.76			
AV	5.2946G	111.95	Inf	-Inf	107.53	3	Horizontal	305	1.92	-	31.21	6.97	33.76			
PK	5.35G	65.13	74.00	-8.87	60.61	3	Horizontal	305	1.92	-	31.30	6.99	33.77			
AV	5.35G	52.44	54.00	-1.56	47.92	3	Horizontal	305	1.92	-	31.30	6.99	33.77			
PK	5.4971G	63.31	68.20	-4.89	58.26	3	Horizontal	305	1.92	-	31.69	7.17	33.81			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5300MHz_TX

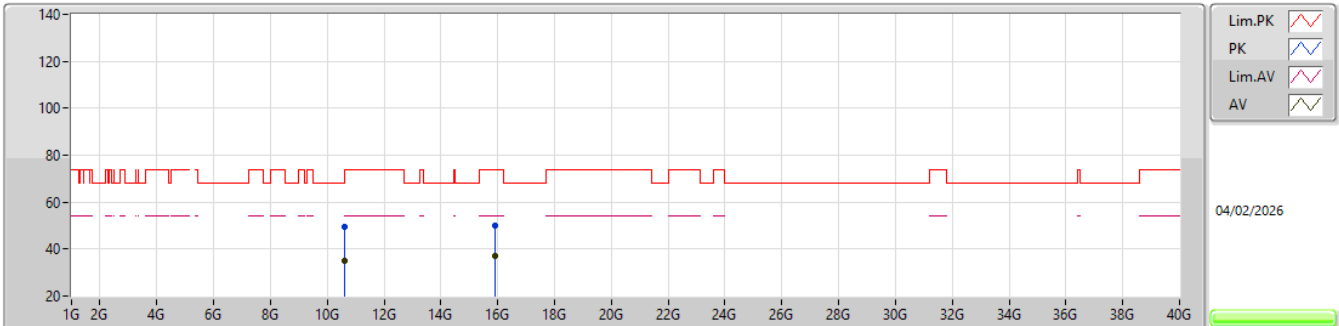


EUT_Y_4TX
Setting 30
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60247G	49.24	74.00	-24.76	42.94	3	Vertical	215	2.39	-	39.00	12.80	45.50			
AV	10.60494G	35.23	54.00	-18.77	28.92	3	Vertical	215	2.39	-	39.01	12.81	45.51			
PK	15.90081G	50.25	74.00	-23.75	40.29	3	Vertical	10	2.44	-	37.70	15.96	43.70			
AV	15.90043G	37.10	54.00	-16.90	27.14	3	Vertical	10	2.44	-	37.70	15.96	43.70			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5300MHz_TX

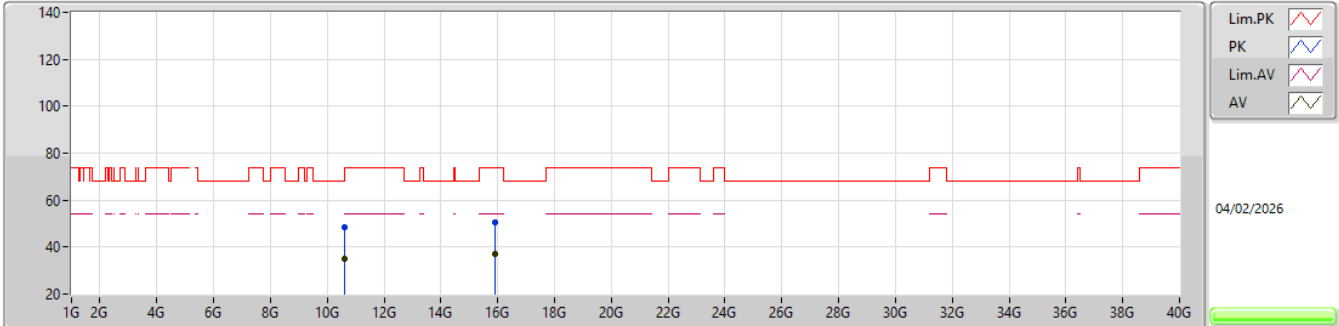


EUT_Y_4TX
Setting 30
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60218G	48.19	74.00	-25.81	41.89	3	Horizontal	142	2.83	-	39.00	12.80	45.50			
AV	10.60294G	35.21	54.00	-18.79	28.90	3	Horizontal	142	2.83	-	39.01	12.80	45.50			
PK	15.89788G	50.70	74.00	-23.30	40.75	3	Horizontal	92	1.92	-	37.69	15.96	43.70			
AV	15.89755G	37.04	54.00	-16.96	27.09	3	Horizontal	92	1.92	-	37.69	15.96	43.70			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5320MHz_TX

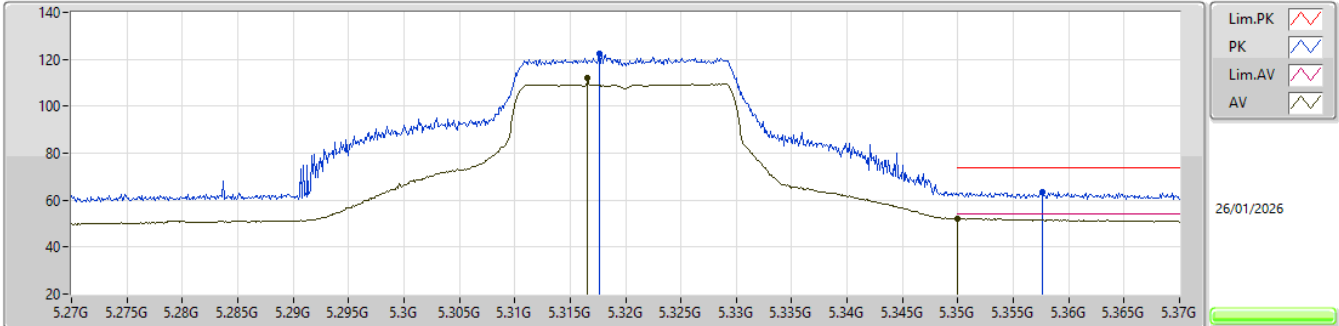


EUT_Y_4TX
Setting 29
06-U-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3176G	122.33	Inf	-Inf	117.87	3	Vertical	20	2.00	-	31.24	6.98	33.76			
AV	5.3166G	112.08	Inf	-Inf	107.63	3	Vertical	20	2.00	-	31.23	6.98	33.76			
PK	5.3576G	63.47	74.00	-10.53	58.93	3	Vertical	20	2.00	-	31.32	6.99	33.77			
AV	5.35G	52.27	54.00	-1.73	47.75	3	Vertical	20	2.00	-	31.30	6.99	33.77			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5320MHz_TX

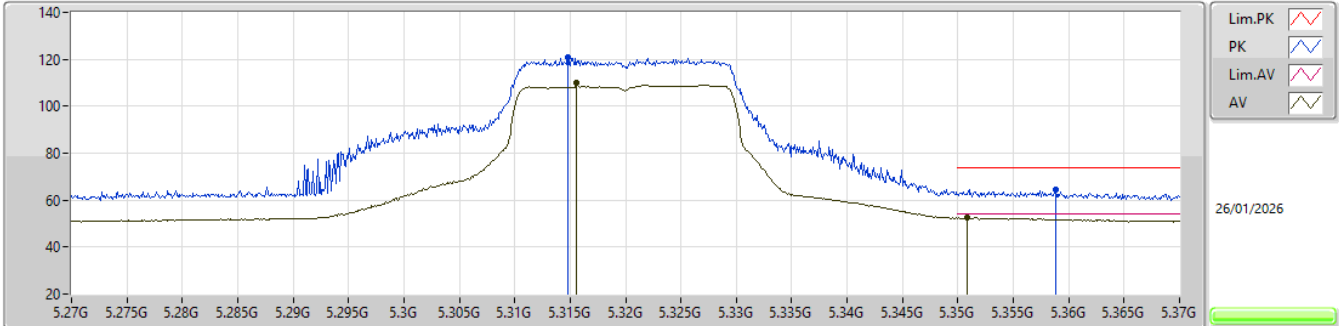


EUT_Y_4TX
Setting 29
06-U-P-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3148G	120.79	Inf	-Inf	116.34	3	Horizontal	305	1.80	-	31.23	6.98	33.76			
AV	5.3156G	110.10	Inf	-Inf	105.65	3	Horizontal	305	1.80	-	31.23	6.98	33.76			
PK	5.3588G	64.41	74.00	-9.59	59.87	3	Horizontal	305	1.80	-	31.32	6.99	33.77			
AV	5.3508G	52.44	54.00	-1.56	47.92	3	Horizontal	305	1.80	-	31.30	6.99	33.77			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5320MHz_TX

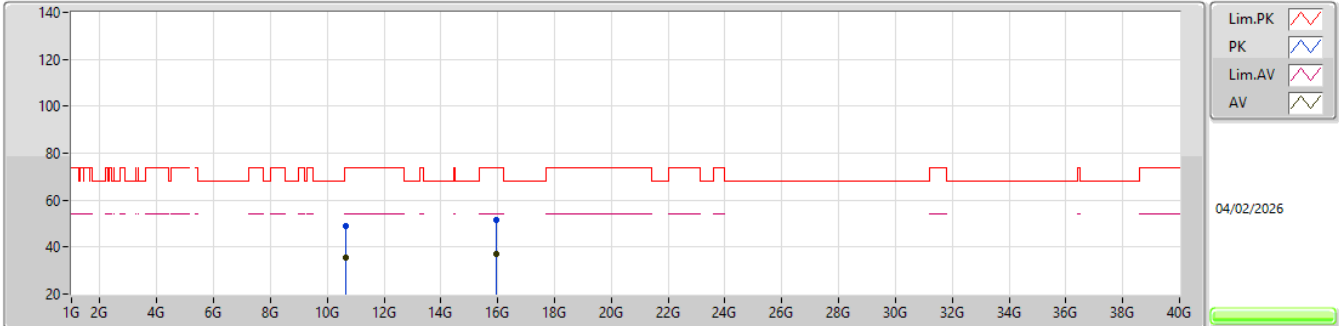


EUT_Y_4TX
Setting 29
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64345G	49.07	74.00	-24.93	42.73	3	Vertical	325	2.11	-	39.09	12.83	45.58			
AV	10.63918G	35.69	54.00	-18.31	29.35	3	Vertical	325	2.11	-	39.08	12.83	45.57			
PK	15.95851G	51.32	74.00	-22.68	41.56	3	Vertical	42	2.32	-	37.58	16.00	43.82			
AV	15.95603G	37.12	54.00	-16.88	27.35	3	Vertical	42	2.32	-	37.59	16.00	43.82			

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5320MHz_TX

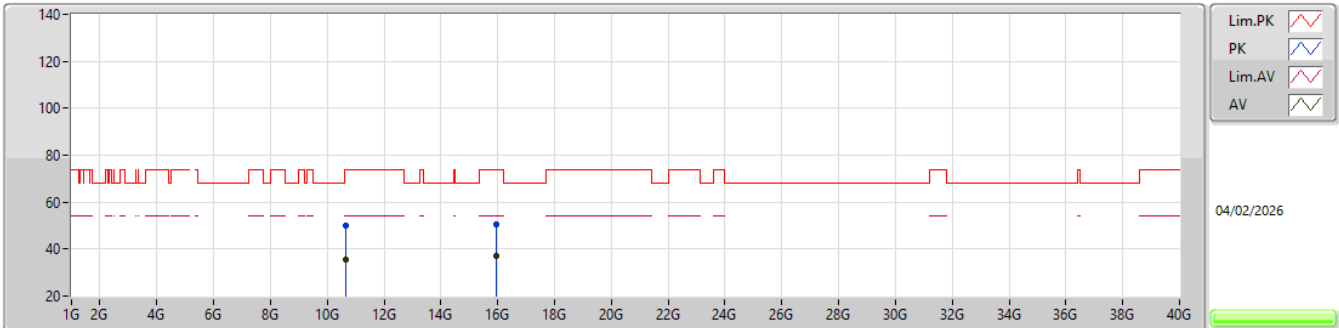


EUT_Y_4TX
Setting 29
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.63836G	50.06	74.00	-23.94	43.72	3	Horizontal	187	2.95	-	39.08	12.83	45.57			
AV	10.64106G	35.68	54.00	-18.32	29.35	3	Horizontal	187	2.95	-	39.08	12.83	45.58			
PK	15.9591G	50.50	74.00	-23.50	40.74	3	Horizontal	205	2.19	-	37.58	16.00	43.82			
AV	15.95628G	37.10	54.00	-16.90	27.33	3	Horizontal	205	2.19	-	37.59	16.00	43.82			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5500MHz_TX

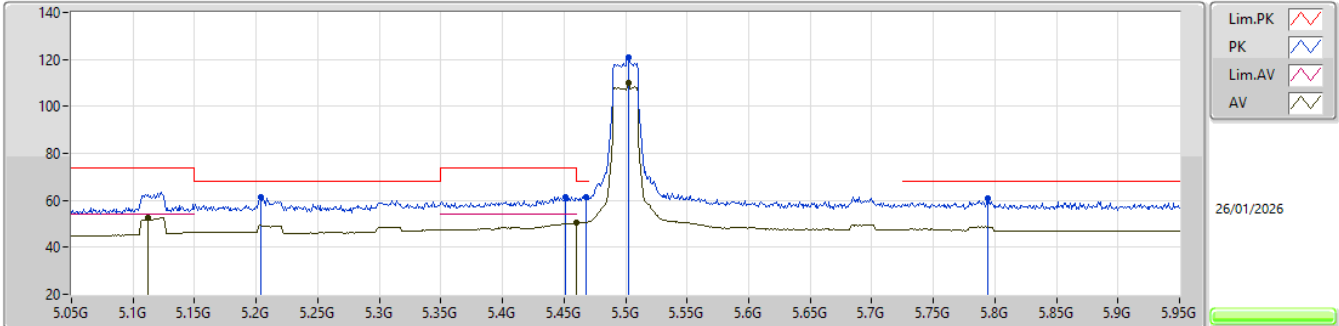


EUT_V_4TX
Setting 28
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2039G	61.15	68.20	-7.05	56.37	3	Vertical	12	2.72	-	31.58	6.93	33.73			
AV	5.1121G	52.76	54.00	-1.24	47.83	3	Vertical	12	2.72	-	31.75	6.89	33.71			
PK	5.4514G	61.53	74.00	-12.47	56.73	3	Vertical	12	2.72	-	31.51	7.09	33.80			
PK	5.4676G	61.62	68.20	-6.58	56.73	3	Vertical	12	2.72	-	31.57	7.12	33.80			
AV	5.46G	50.45	54.00	-3.55	45.60	3	Vertical	12	2.72	-	31.54	7.11	33.80			
PK	5.5027G	120.73	Inf	-Inf	115.66	3	Vertical	12	2.72	-	31.70	7.18	33.81			
AV	5.5027G	109.78	Inf	-Inf	104.71	3	Vertical	12	2.72	-	31.70	7.18	33.81			
PK	5.7943G	61.05	68.20	-7.15	55.47	3	Vertical	12	2.72	-	32.00	7.35	33.77			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5500MHz_TX

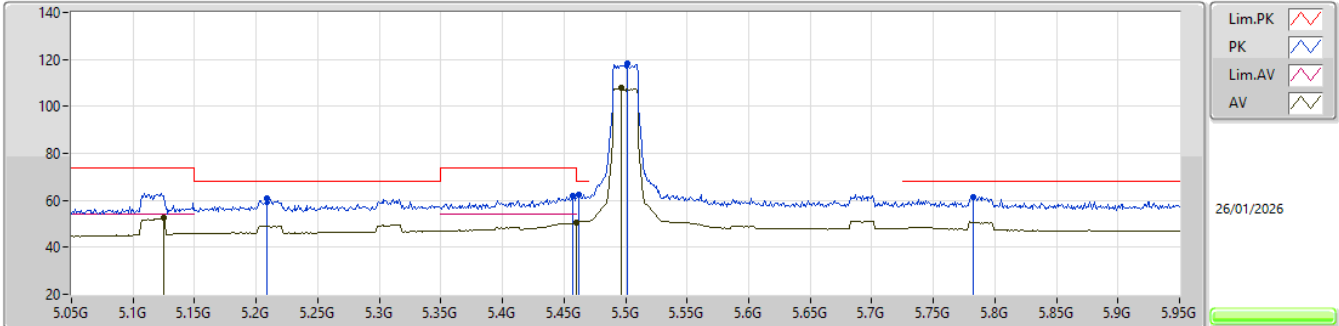


EUT_V_4TX
Setting 28
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2084G	60.71	68.20	-7.49	55.96	3	Horizontal	293	1.97	-	31.55	6.93	33.73
AV	5.1247G	52.54	54.00	-1.46	47.55	3	Horizontal	293	1.97	-	31.80	6.90	33.71
PK	5.4568G	61.98	74.00	-12.02	57.15	3	Horizontal	293	1.97	-	31.53	7.10	33.80
PK	5.4622G	62.41	68.20	-5.79	57.55	3	Horizontal	293	1.97	-	31.55	7.11	33.80
AV	5.46G	50.47	54.00	-3.53	45.62	3	Horizontal	293	1.97	-	31.54	7.11	33.80
PK	5.5018G	118.52	Inf	-Inf	113.45	3	Horizontal	293	1.97	-	31.70	7.18	33.81
AV	5.4964G	107.78	Inf	-Inf	102.73	3	Horizontal	293	1.97	-	31.69	7.17	33.81
PK	5.7826G	61.52	68.20	-6.68	55.95	3	Horizontal	293	1.97	-	32.00	7.35	33.78

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5500MHz_TX

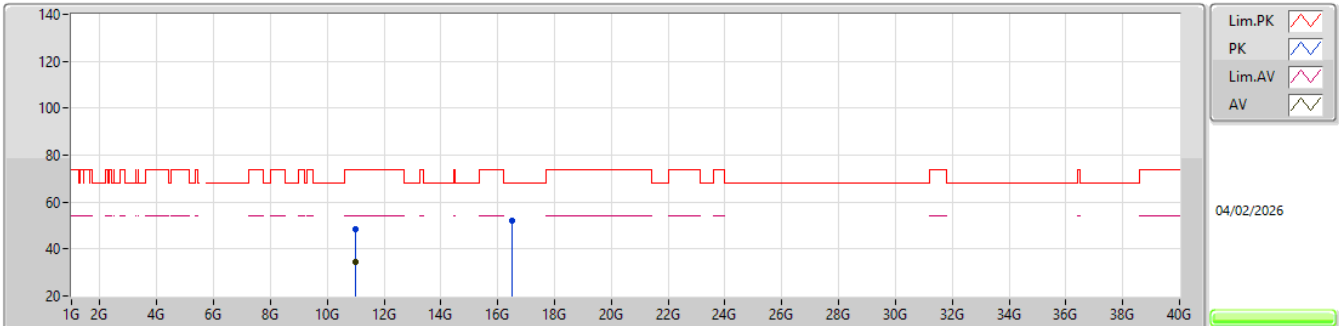


EUT_Y_4TX
Setting 28
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.00302G	48.28	74.00	-25.72	42.69	3	Vertical	304	2.02	-	38.79	13.05	46.25			
AV	10.99816G	34.54	54.00	-19.46	28.94	3	Vertical	304	2.02	-	38.80	13.05	46.25			
PK	16.49528G	52.12	68.20	-16.08	41.58	3	Vertical	19	2.93	-	38.60	16.48	44.54			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5500MHz_TX

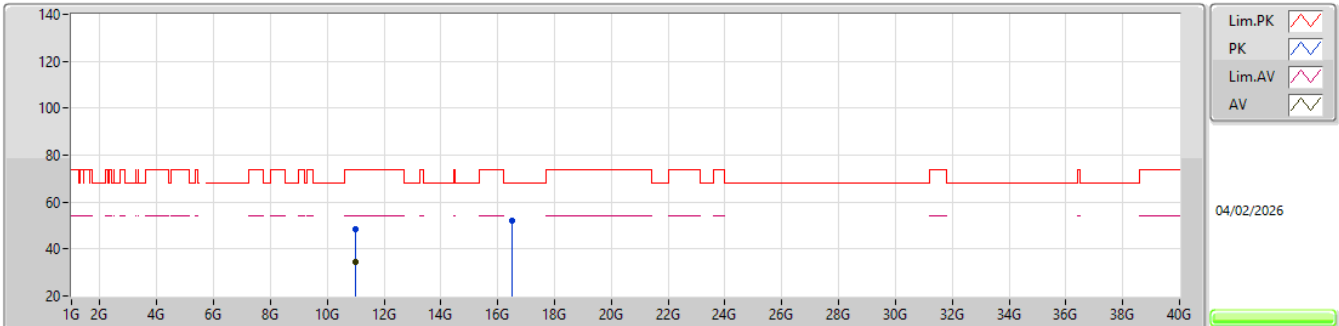EUT_Y_4TX
Setting 28
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.99558G	48.49	74.00	-25.51	42.88	3	Horizontal	148	1.17	-	38.80	13.05	46.24			
AV	10.99509G	34.65	54.00	-19.35	29.04	3	Horizontal	148	1.17	-	38.80	13.05	46.24			
PK	16.49619G	52.13	68.20	-16.07	41.60	3	Horizontal	41	1.71	-	38.60	16.48	44.55			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5580MHz_TX

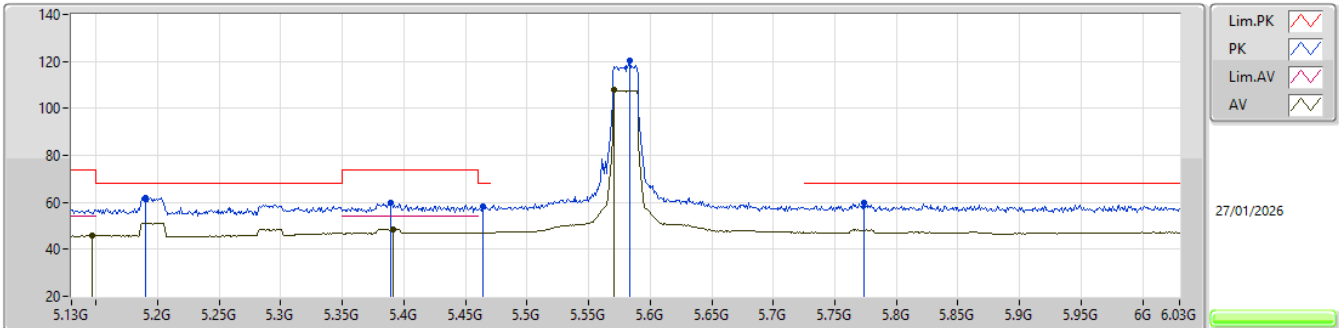


EUT_Y_4TX
Setting 28
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1903G	62.04	68.20	-6.16	57.18	3	Vertical	17.9	2.63	-	31.66	6.93	33.73
AV	5.1471G	45.81	54.00	-8.19	40.73	3	Vertical	17.9	2.63	-	31.89	6.91	33.72
PK	5.3892G	59.66	74.00	-14.34	55.05	3	Vertical	17.9	2.63	-	31.38	7.01	33.78
AV	5.391G	48.51	54.00	-5.49	43.90	3	Vertical	17.9	2.63	-	31.38	7.01	33.78
PK	5.4639G	58.12	68.20	-10.08	53.24	3	Vertical	17.9	2.63	-	31.56	7.12	33.80
PK	5.5836G	120.41	Inf	-Inf	115.27	3	Vertical	17.9	2.63	-	31.63	7.31	33.80
AV	5.571G	107.73	Inf	-Inf	102.58	3	Vertical	17.9	2.63	-	31.66	7.29	33.80
PK	5.7735G	59.74	68.20	-8.46	54.17	3	Vertical	17.9	2.63	-	32.00	7.35	33.78

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5580MHz_TX

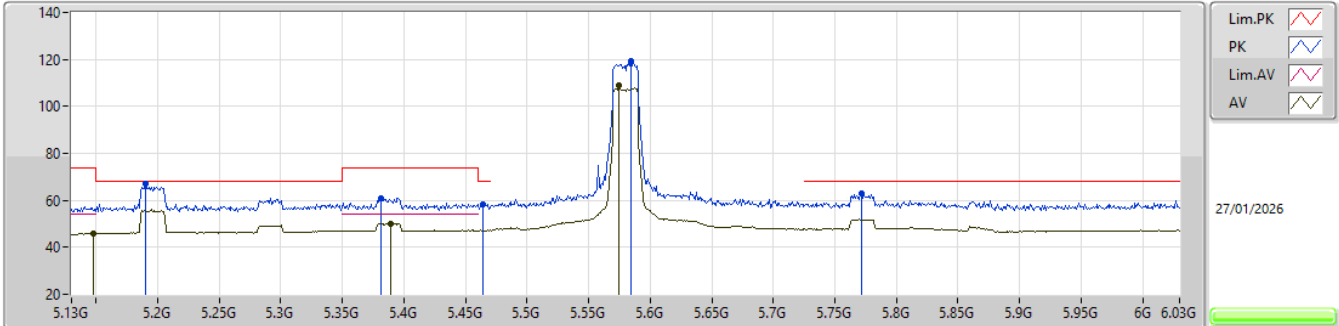


EUT_V_4TX
Setting 28
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1903G	67.00	68.20	-1.20	62.14	3	Horizontal	305	1.79	-	31.66	6.93	33.73
AV	5.148G	45.96	54.00	-8.04	40.88	3	Horizontal	305	1.79	-	31.89	6.91	33.72
PK	5.3811G	61.10	74.00	-12.90	56.52	3	Horizontal	305	1.79	-	31.36	7.00	33.78
AV	5.3892G	49.96	54.00	-4.04	45.35	3	Horizontal	305	1.79	-	31.38	7.01	33.78
PK	5.4639G	58.37	68.20	-9.83	53.49	3	Horizontal	305	1.79	-	31.56	7.12	33.80
PK	5.5845G	119.38	Inf	-Inf	114.24	3	Horizontal	305	1.79	-	31.63	7.31	33.80
AV	5.5746G	108.72	Inf	-Inf	103.57	3	Horizontal	305	1.79	-	31.65	7.30	33.80
PK	5.7717G	63.13	68.20	-5.07	57.56	3	Horizontal	305	1.79	-	32.00	7.35	33.78

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5580MHz_TX

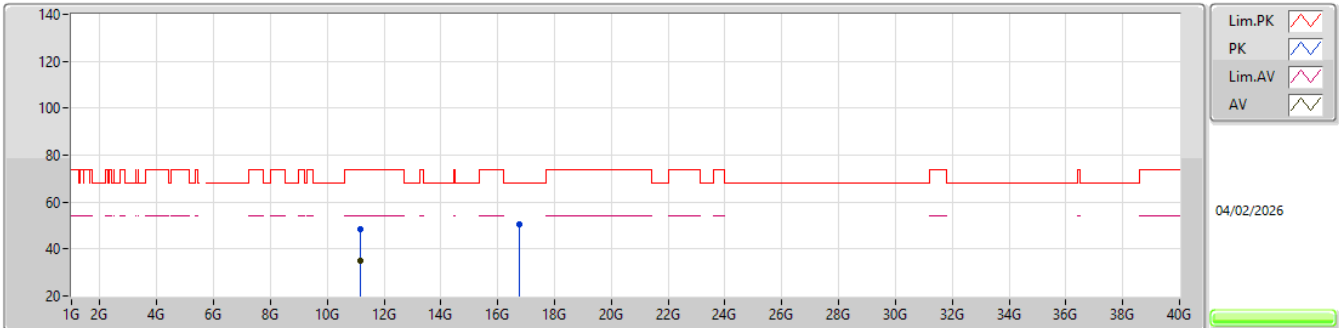


EUT_Y_4TX
Setting 28
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.15975G	48.63	74.00	-25.37	42.67	3	Vertical	230	1.00	-	38.92	13.15	46.11			
AV	11.16076G	35.07	54.00	-18.93	29.11	3	Vertical	230	1.00	-	38.92	13.15	46.11			
PK	16.74202G	50.51	68.20	-17.69	40.11	3	Vertical	227	2.94	-	38.42	16.70	44.72			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5580MHz_TX

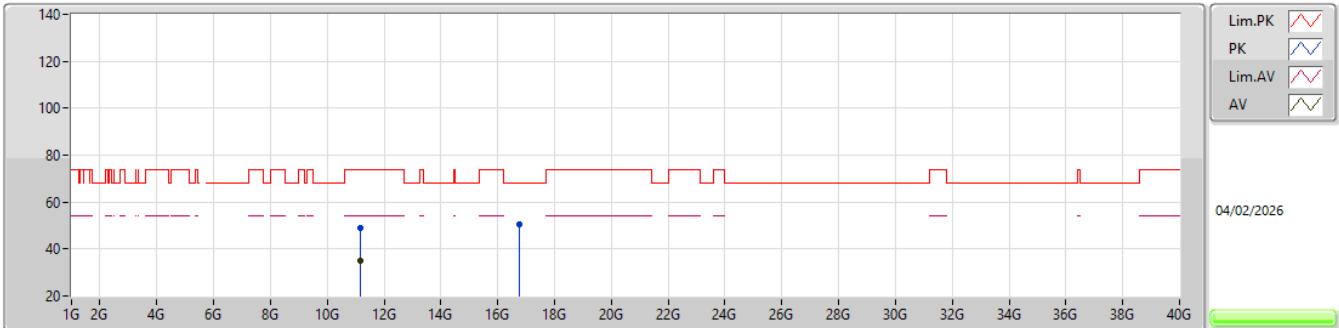EUT_Y_4TX
Setting 28
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.16136G	48.79	74.00	-25.21	42.82	3	Horizontal	225	1.95	-	38.92	13.15	46.10			
AV	11.15611G	35.18	54.00	-18.82	29.23	3	Horizontal	225	1.95	-	38.91	13.15	46.11			
PK	16.74429G	50.75	68.20	-17.45	40.37	3	Horizontal	323	1.85	-	38.41	16.70	44.73			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5700MHz_TX

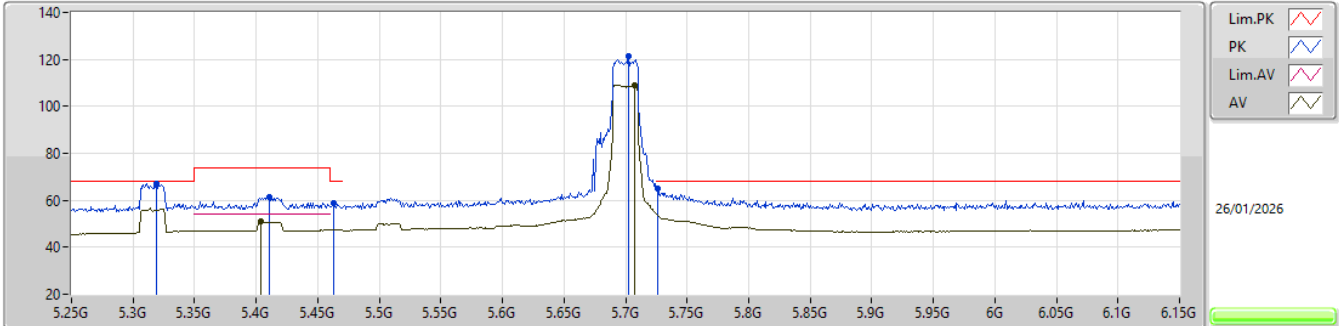


EUT_Y_4TX
Setting 29
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3193G	67.11	68.20	-1.09	62.65	3	Vertical	14	2.36	-	31.24	6.98	33.76
PK	5.4111G	61.61	74.00	-12.39	56.95	3	Vertical	14	2.36	-	31.42	7.03	33.79
AV	5.4039G	50.83	54.00	-3.17	46.19	3	Vertical	14	2.36	-	31.41	7.02	33.79
PK	5.4633G	58.94	68.20	-9.26	54.08	3	Vertical	14	2.36	-	31.55	7.11	33.80
PK	5.7027G	121.42	Inf	-Inf	115.86	3	Vertical	14	2.36	-	32.00	7.35	33.79
AV	5.7072G	108.79	Inf	-Inf	103.23	3	Vertical	14	2.36	-	32.00	7.35	33.79
PK	5.7261G	64.78	68.20	-3.42	59.21	3	Vertical	14	2.36	-	32.00	7.35	33.78

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5700MHz_TX

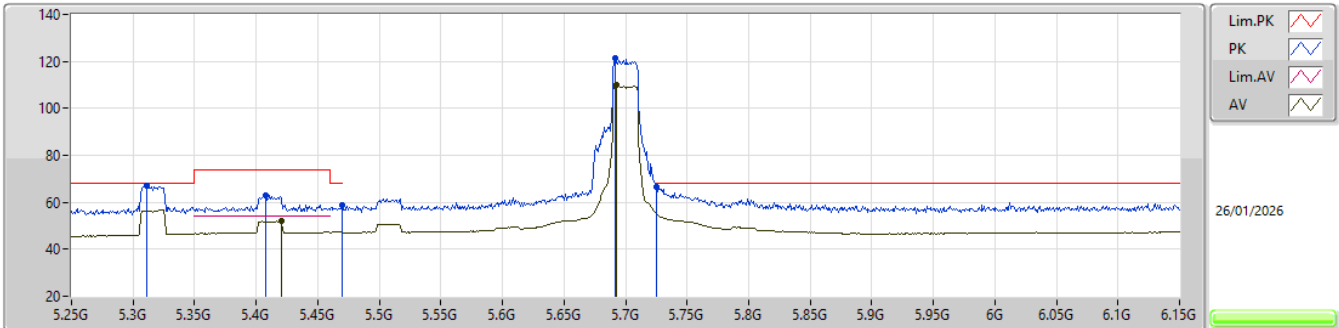


EUT_Y_4TX
Setting 29
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3112G	66.98	68.20	-1.22	62.55	3	Horizontal	300	2.30	-	31.22	6.97	33.76				
PK	5.4075G	63.12	74.00	-10.88	58.48	3	Horizontal	300	2.30	-	31.41	7.02	33.79				
AV	5.4201G	51.89	54.00	-2.11	47.20	3	Horizontal	300	2.30	-	31.44	7.04	33.79				
PK	5.47G	58.79	68.20	-9.41	53.88	3	Horizontal	300	2.30	-	31.58	7.13	33.80				
PK	5.6919G	121.14	Inf	-Inf	115.64	3	Horizontal	300	2.30	-	31.95	7.34	33.79				
AV	5.6928G	110.05	Inf	-Inf	104.54	3	Horizontal	300	2.30	-	31.96	7.34	33.79				
PK	5.7252G	66.41	68.20	-1.79	60.84	3	Horizontal	300	2.30	-	32.00	7.35	33.78				

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5700MHz_TX

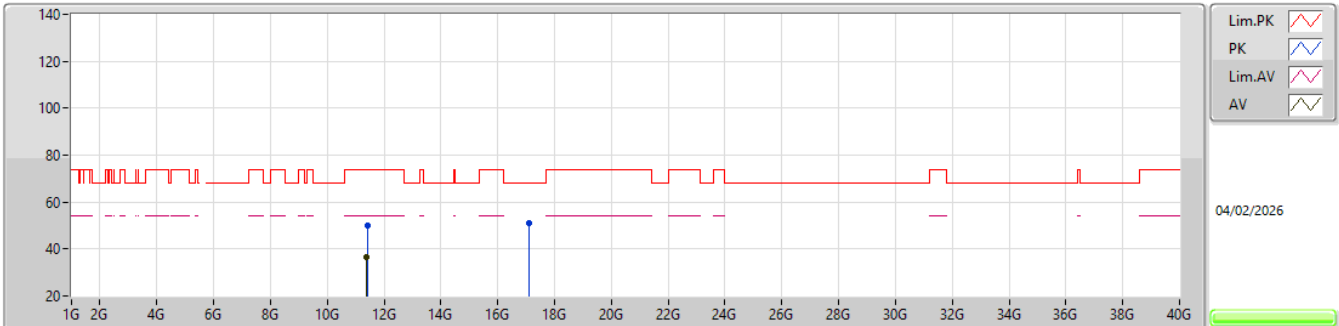EUT_Y_4TX
Setting 29
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40159G	50.03	74.00	-23.97	43.43	3	Vertical	250	1.06	-	39.19	13.30	45.89			
AV	11.4003G	36.66	54.00	-17.34	30.05	3	Vertical	250	1.06	-	39.20	13.30	45.89			
PK	17.10155G	50.85	68.20	-17.35	40.32	3	Vertical	264	1.81	-	38.50	17.02	44.99			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5700MHz_TX

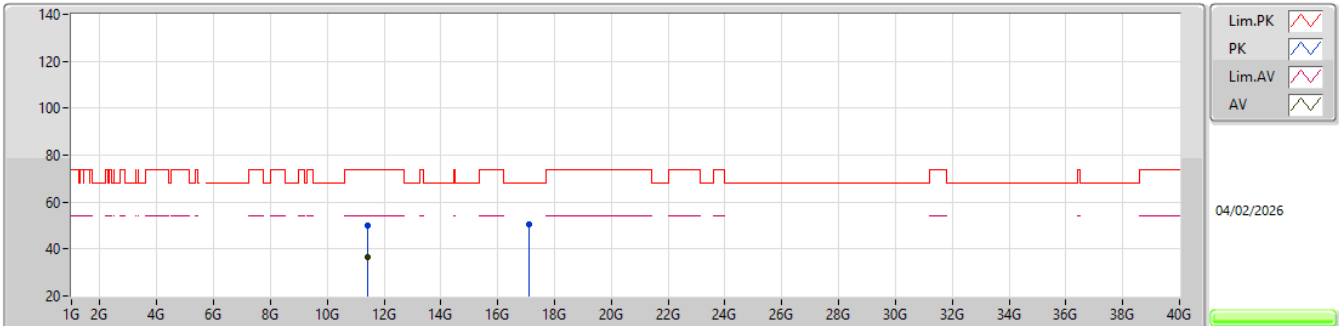EUT_Y_4TX
Setting 29
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40205G	50.06	74.00	-23.94	43.46	3	Horizontal	288	2.74	-	39.19	13.30	45.89			
AV	11.4043G	36.72	54.00	-17.28	30.13	3	Horizontal	288	2.74	-	39.18	13.30	45.89			
PK	17.09806G	50.63	68.20	-17.57	40.10	3	Horizontal	22	1.67	-	38.50	17.02	44.99			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

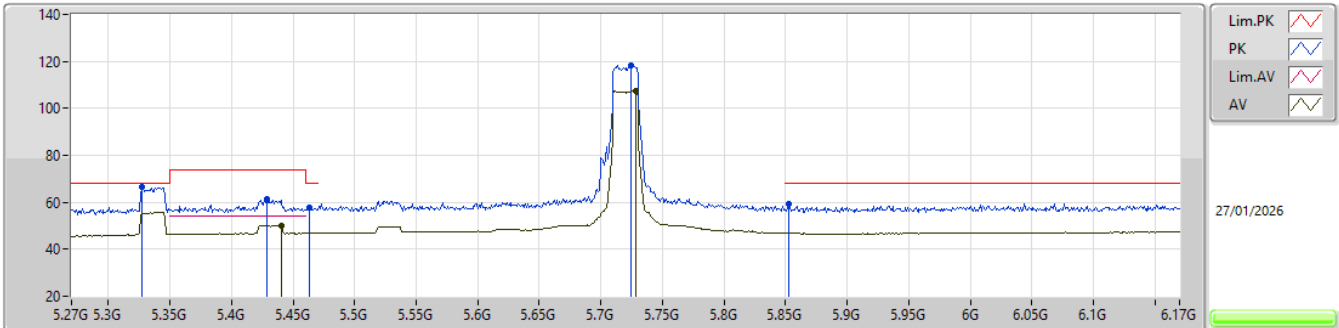


EUT_Y_4TX
Setting 27
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3276G	66.51	68.20	-1.69	62.04	3	Vertical	360	2.38	-	31.26	6.98	33.77			
PK	5.4284G	61.14	74.00	-12.86	56.41	3	Vertical	360	2.38	-	31.46	7.06	33.79			
AV	5.4401G	50.21	54.00	-3.79	45.44	3	Vertical	360	2.38	-	31.48	7.08	33.79			
PK	5.4635G	57.93	68.20	-10.27	53.07	3	Vertical	360	2.38	-	31.55	7.11	33.80			
PK	5.7245G	118.48	Inf	-Inf	112.91	3	Vertical	360	2.38	-	32.00	7.35	33.78			
AV	5.7281G	107.61	Inf	-Inf	102.04	3	Vertical	360	2.38	-	32.00	7.35	33.78			
PK	5.8523G	59.09	68.20	-9.11	53.32	3	Vertical	360	2.38	-	32.10	7.44	33.77			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5720MHz Straddle 5.47-5.725GHz_TX

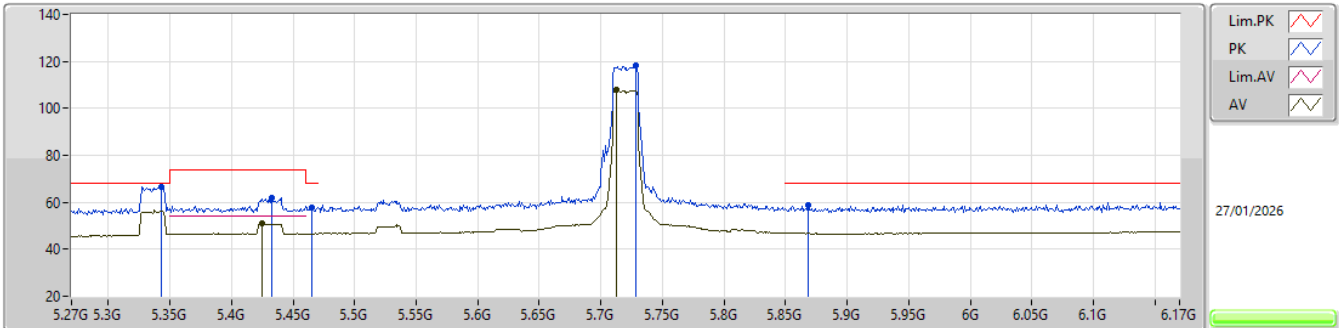


EUT_Y_4TX
Setting 27
06-U-P-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3429G	66.75	68.20	-1.45	62.24	3	Horizontal	303	2.39	-	31.29	6.99	33.77			
PK	5.4329G	61.93	74.00	-12.07	57.19	3	Horizontal	303	2.39	-	31.47	7.06	33.79			
AV	5.4248G	50.88	54.00	-3.12	46.17	3	Horizontal	303	2.39	-	31.45	7.05	33.79			
PK	5.4653G	57.72	68.20	-10.48	52.84	3	Horizontal	303	2.39	-	31.56	7.12	33.80			
PK	5.7281G	118.03	Inf	-Inf	112.46	3	Horizontal	303	2.39	-	32.00	7.35	33.78			
AV	5.7128G	108.09	Inf	-Inf	102.52	3	Horizontal	303	2.39	-	32.00	7.35	33.78			
PK	5.8685G	58.72	68.20	-9.48	52.88	3	Horizontal	303	2.39	-	32.14	7.47	33.77			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

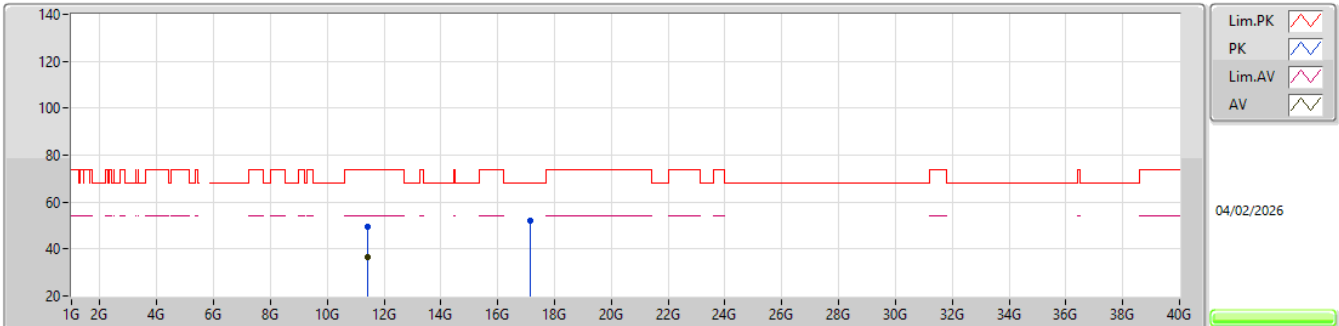EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43986G	49.69	74.00	-24.31	43.18	3	Vertical	27	2.52	-	39.04	13.32	45.85			
AV	11.44372G	36.41	54.00	-17.59	29.90	3	Vertical	27	2.52	-	39.03	13.33	45.85			
PK	17.16457G	51.88	68.20	-16.32	41.18	3	Vertical	164	1.10	-	38.66	17.08	45.04			

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX


5720MHz Straddle 5.47-5.725GHz_TX

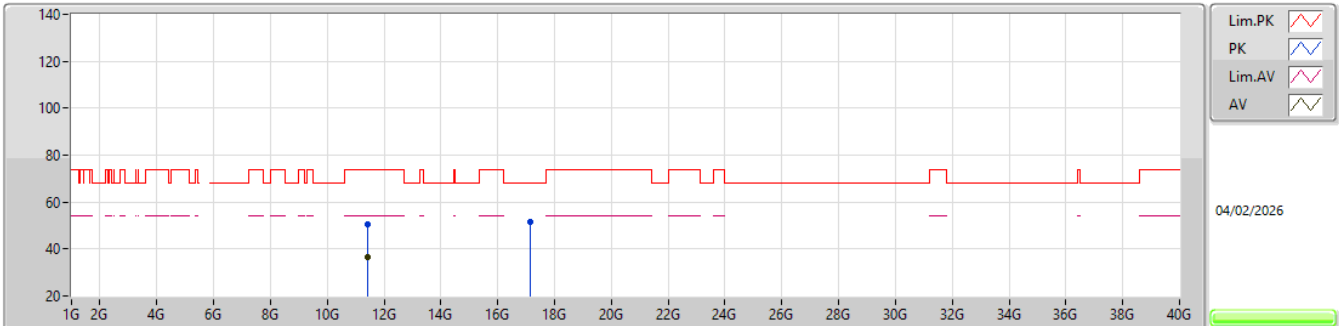EUT_Y_4TX
Setting 27
01-C-I-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.44381G	50.60	74.00	-23.40	44.10	3	Horizontal	220	1.84	-	39.02	13.33	45.85			
AV	11.4417G	36.36	54.00	-17.64	29.86	3	Horizontal	220	1.84	-	39.03	13.32	45.85			
PK	17.15709G	51.63	68.20	-16.57	40.97	3	Horizontal	75	2.52	-	38.63	17.07	45.04			

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

5745MHz_TX

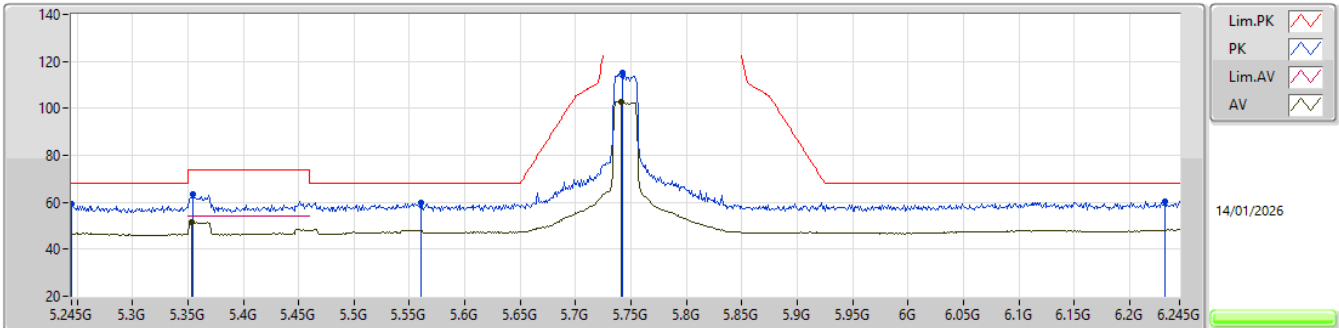EUT_Y_4TX
Setting 30
01-C-L-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.245G	59.35	68.20	-8.85	50.55	3	Vertical	360	1.03	-	32.91	8.41	32.52			
PK	5.354G	63.30	74.00	-10.70	54.60	3	Vertical	360	1.03	-	32.79	8.41	32.50			
AV	5.353G	51.63	54.00	-2.37	42.93	3	Vertical	360	1.03	-	32.79	8.41	32.50			
PK	5.56G	59.71	68.20	-8.49	50.86	3	Vertical	360	1.03	-	32.70	8.61	32.46			
PK	5.742G	115.12	Inf	-Inf	105.64	3	Vertical	360	1.03	-	33.37	8.56	32.45			
AV	5.741G	102.90	Inf	-Inf	93.43	3	Vertical	360	1.03	-	33.36	8.56	32.45			
PK	6.232G	60.47	68.20	-7.73	49.57	3	Vertical	360	1.03	-	34.26	9.05	32.41			