



# 承 认 书

## SPECIFICATION FOR APPROVAL

客户名称 Customer Name: 深圳市鑫华邦科技有限公司

产品型号 Product Model: V3

客户料号 Customer P/N :

鑫恒阳料号 XINHENG YANG P/N: XHY-V3. 0054-WF2. 4/5G-V1. 0  
XHY-V3. 0054-WIFI/BT-V1. 0

产品规格 SPECIFICATIONS: 频段: WIFI 2. 4G+5. 8G

制作日期 Production date: 2023. 08. 15

封样版本 Sample Version: V1. 0

| 鑫恒阳 (XINHENG YANG) |          |          |
|--------------------|----------|----------|
| 编制 (FICTION)       | 品质 (DQE) | 研发 (R&D) |
|                    |          |          |
| 客户 (Customer)      |          |          |
| 采 购 (PUR)          | 品质 (QC)  | 研发 (R&D) |
|                    |          |          |

生产厂商: 深圳市鑫恒阳科技有限公司

深圳地址: 深圳市南山区西丽创盛路 1 号康和盛大厦 7A

电 话: 0755-83600916 邮箱: xinhengyang1116@163.com

网 址: <https://www.xhy-2008.com>



## 目录 Index

|    |                                         |         |
|----|-----------------------------------------|---------|
| 一、 | 封面 (Cover)                              | -----1  |
| 二、 | 目录 (Index)                              | -----2  |
| 三、 | 变更履历 (Change history)                   | -----3  |
| 四、 | 基本参数 (The basic parameters)             | -----4  |
| 五、 | 测试设备 (TestEquipment & Conditions)       | -----5  |
| 六、 | 性能测试报告 (Test Report)                    | -----6  |
| 七、 | 工程图纸 (Product Drawing)                  | -----10 |
| 八、 | ROHS                                    | -----11 |
| 九、 | 产品包装说明 (Product packaging instructions) | -----11 |



三、变更履历 (Change history)

| Number | Effective date | Change record   |
|--------|----------------|-----------------|
| V1.0   | 2023.8.15      | Initial release |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |
|        |                |                 |



#### 四、基本参数 (The basic parameters)

| A. Electrical Characteristics            |                                                             |
|------------------------------------------|-------------------------------------------------------------|
| Frequency                                | 2400MHZ~2500MHZ<br>5150MHZ~5850MHZ                          |
| VSWR                                     | <2.50                                                       |
| Avg Efficiency                           | 2.4G>40%    5G>33%                                          |
| Impedance                                | 50 ± 15 Ohm                                                 |
| Polarization                             | Linear                                                      |
| B. Material & Mechanical Characteristics |                                                             |
| Material of Radiator                     | FPC            black                                        |
| Cable Type                               | Φ    WIFI1: 0.81MM*106MM±2MM<br>Φ    WIFI2: 0.81MM*74MM±2MM |
| Connector Type                           | Four Generation                                             |
| Dimension                                | WIFI1: 32MM*13.60MM±0.2MM<br>WIFI2: 32MM*13.60MM±0.2MM      |
| C. Environmental                         |                                                             |
| Operation Temperature                    | - 20 °C ~ + 60 °C                                           |
| Storage Temperature                      | - 30 °C ~ + 70 °C                                           |


## 五、测试设备 Introduction:

Microwave darkroom and no reflection chamber, absorbing short wave darkroom dark room. Microwave darkroom by electromagnetic shielding room, filtering and isolation, grounding device, the ventilation duct, indoor distribution system, monitoring system, ceiling wave material part. It is based on the wave absorbing material as the lining of the shield room, it can absorb the most of the electromagnetic energy into the six wall is a better simulation of the free space conditions.

The main working principle of microwave anechoic chamber is according to the electromagnetic wave in the medium from the low magnetic guide magnetic direction of propagation rules, absorbing materials to guide the electromagnetic wave using high permeability, through resonance, a substantial absorption of electromagnetic wave radiation energy, by coupling the electromagnetic energy into heat energy.

### main performance :



Frequency range:400MHz ~ 6GHz ceiling reflected wave loss materials: 400MHz ~ 6GHz is equal to or more than 15dB (microwave absorbing material by composite wave absorbing materials, namely tapered containing carbon sponge suction wave material paste in ferrite).

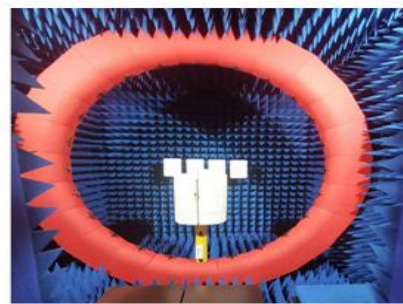

## 六、性能测试报告 (Test Report)


Those specifications were specially defined for V3 model.

### 1. Antenna position:

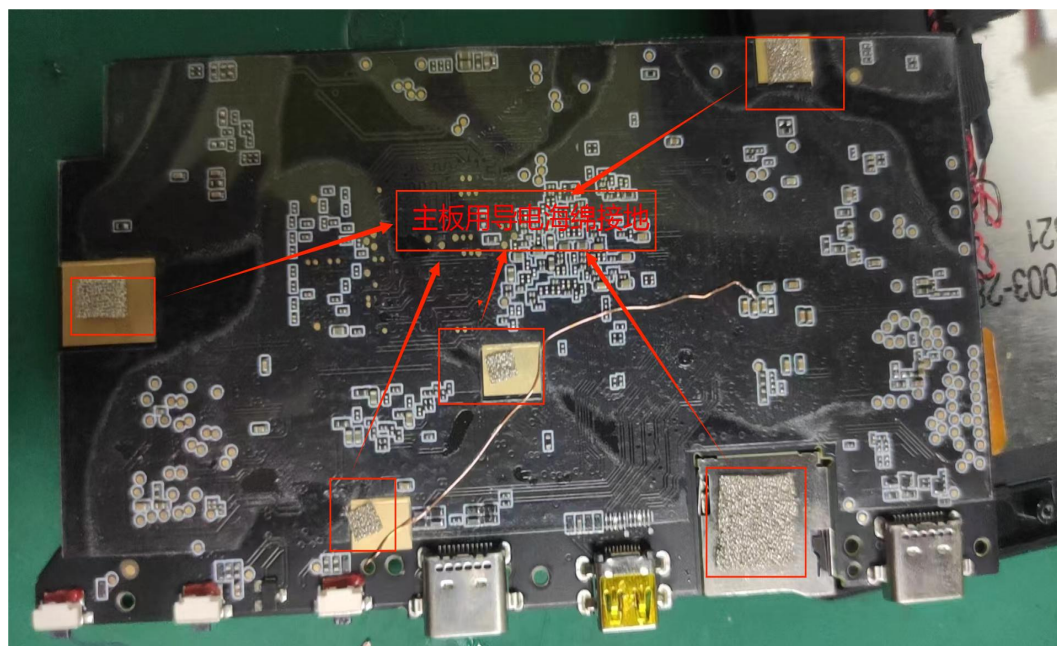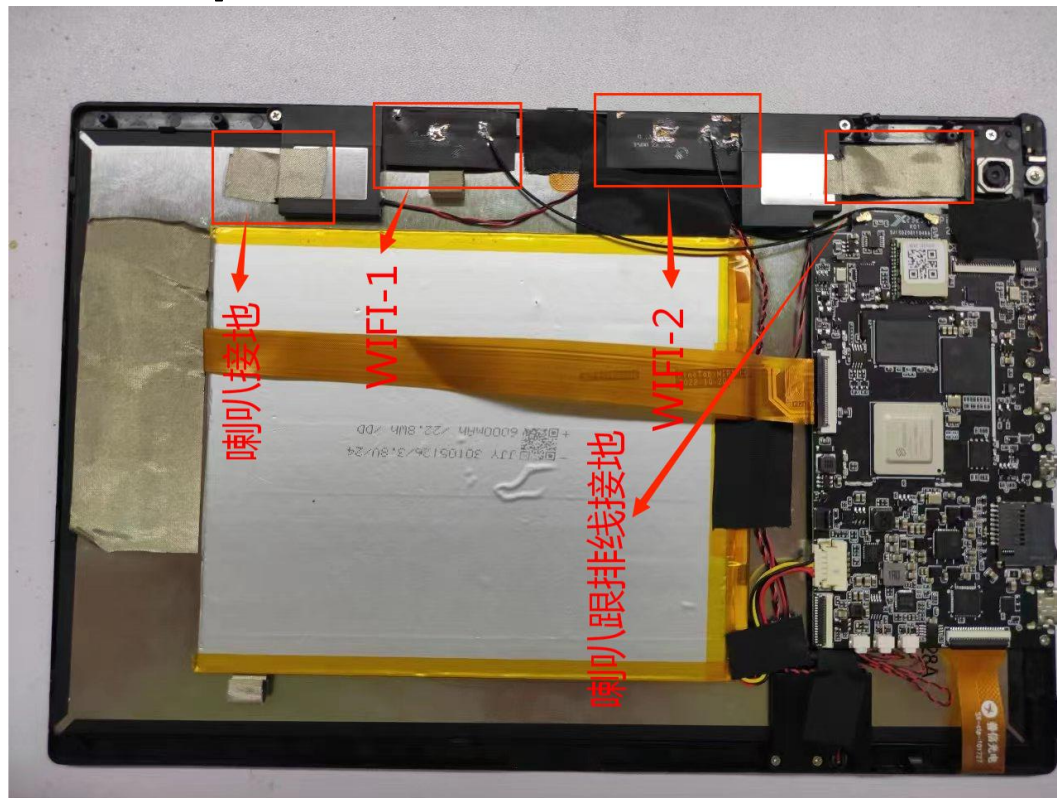

## 2. Antenna passive field pattern and passive efficiency gain table:


WIFI-1-2.4G:

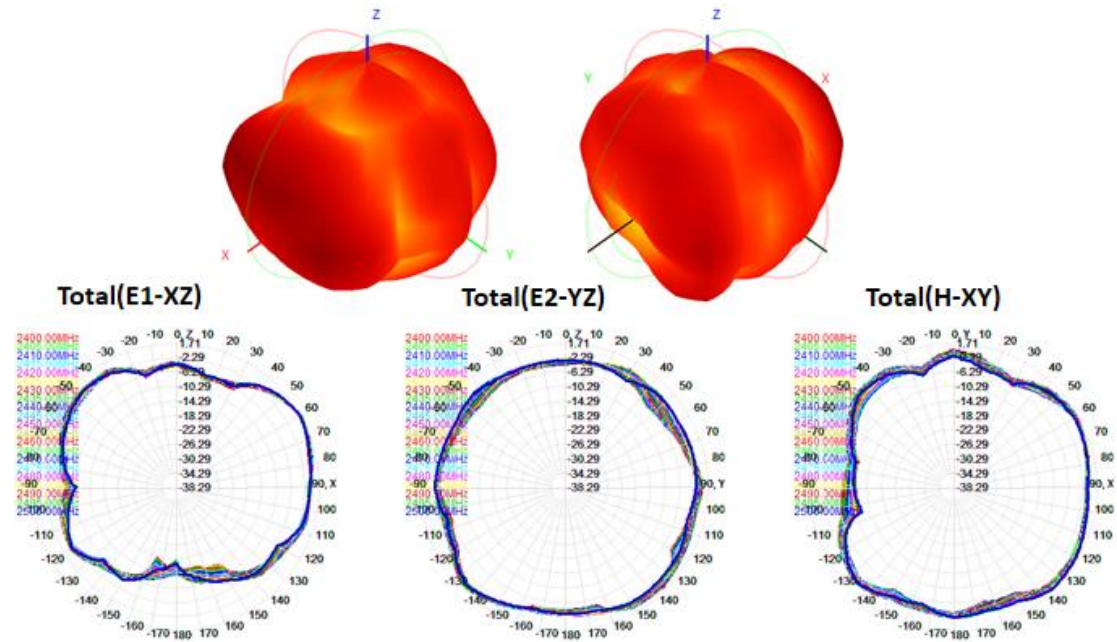

| Frequency ID | Frequency (MHz) | Gain (dBi) | Efficiency (%) |
|--------------|-----------------|------------|----------------|
| 1            | 2400.0          | 1.59       | 48.49          |
| 2            | 2405.0          | 1.64       | 49.00          |
| 3            | 2410.0          | 1.69       | 49.00          |
| 4            | 2415.0          | 1.71       | 49.65          |
| 5            | 2420.0          | 1.68       | 50.84          |
| 6            | 2425.0          | 1.57       | 51.54          |
| 7            | 2430.0          | 1.59       | 51.83          |
| 8            | 2435.0          | 1.60       | 52.28          |
| 9            | 2440.0          | 1.72       | 53.54          |
| 10           | 2445.0          | 1.82       | 54.06          |
| 11           | 2450.0          | 1.86       | 54.04          |

|    |        |      |       |
|----|--------|------|-------|
| 12 | 2455.0 | 2.01 | 54.67 |
| 13 | 2460.0 | 2.04 | 54.91 |
| 14 | 2465.0 | 2.11 | 55.20 |
| 15 | 2470.0 | 2.15 | 55.35 |
| 16 | 2475.0 | 2.08 | 55.22 |
| 17 | 2480.0 | 1.98 | 54.80 |
| 18 | 2485.0 | 1.91 | 54.60 |
| 19 | 2490.0 | 2.09 | 55.31 |
| 20 | 2495.0 | 2.15 | 55.19 |
| 21 | 2500.0 | 2.17 | 54.17 |

WIFI-1-5G:

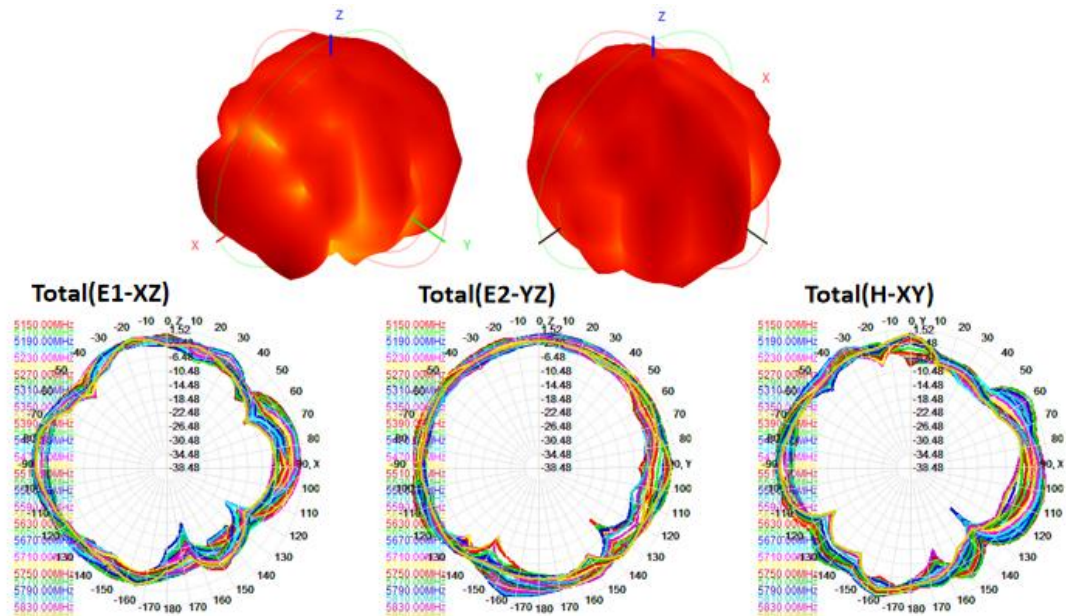

| Frequency ID | Frequency (MHz) | Gain (dBi) | Efficiency (%) |
|--------------|-----------------|------------|----------------|
| 1            | 5150.0          | 0.23       | 40.59          |
| 2            | 5170.0          | 0.30       | 38.36          |
| 3            | 5190.0          | 0.57       | 38.71          |




# 深圳市鑫恒阳科技有限公司

Shenzhen XINHENGYANG Technology Co., Ltd

|    |        |      |       |
|----|--------|------|-------|
| 4  | 5210.0 | 0.16 | 41.05 |
| 5  | 5230.0 | 0.33 | 43.27 |
| 6  | 5250.0 | 0.31 | 44.88 |
| 7  | 5270.0 | 0.52 | 46.85 |
| 8  | 5290.0 | 0.50 | 44.48 |
| 9  | 5310.0 | 0.39 | 38.94 |
| 10 | 5330.0 | 0.23 | 35.30 |
| 11 | 5350.0 | 0.22 | 34.82 |
| 12 | 5370.0 | 0.52 | 37.46 |
| 13 | 5390.0 | 0.67 | 40.53 |
| 14 | 5410.0 | 0.21 | 42.70 |
| 15 | 5430.0 | 0.40 | 45.71 |
| 16 | 5450.0 | 0.63 | 45.33 |
| 17 | 5470.0 | 0.65 | 41.63 |
| 18 | 5490.0 | 0.86 | 38.44 |
| 19 | 5510.0 | 0.77 | 37.68 |
| 20 | 5530.0 | 0.86 | 38.02 |
| 21 | 5550.0 | 0.66 | 38.81 |
| 22 | 5570.0 | 0.42 | 40.22 |
| 23 | 5590.0 | 0.53 | 41.27 |
| 24 | 5610.0 | 0.63 | 41.65 |
| 25 | 5630.0 | 0.59 | 40.55 |
| 26 | 5650.0 | 0.52 | 39.21 |
| 27 | 5670.0 | 0.29 | 38.45 |
| 28 | 5690.0 | 0.03 | 38.04 |
| 29 | 5710.0 | 0.04 | 38.14 |
| 30 | 5730.0 | 0.17 | 38.88 |
| 31 | 5750.0 | 0.14 | 39.03 |

|    |        |      |       |
|----|--------|------|-------|
| 32 | 5770.0 | 0.26 | 38.95 |
| 33 | 5790.0 | 0.49 | 37.11 |
| 34 | 5810.0 | 0.67 | 35.62 |
| 35 | 5830.0 | 0.68 | 33.80 |
| 36 | 5850.0 | 0.44 | 33.97 |


WIFI-2-2.4G:

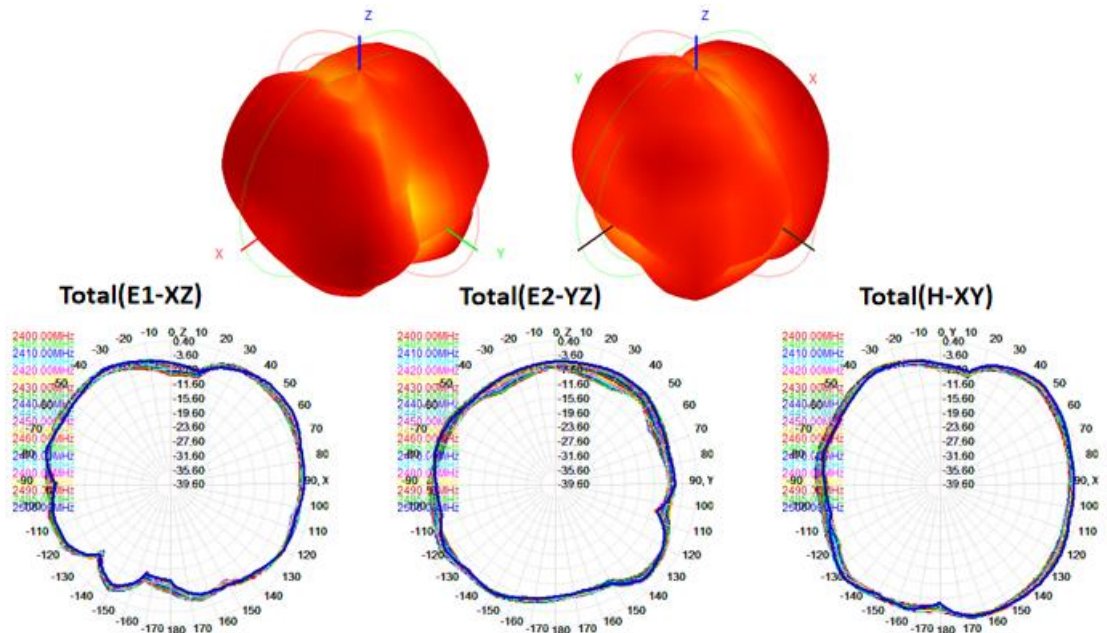

| Frequency ID | Frequency (MHz) | Gain (dBi) | Efficiency (%) |
|--------------|-----------------|------------|----------------|
| 1            | 2400.0          | -0.20      | 41.20          |
| 2            | 2405.0          | -0.13      | 42.06          |
| 3            | 2410.0          | -0.20      | 42.44          |
| 4            | 2415.0          | -0.26      | 43.07          |
| 5            | 2420.0          | -0.08      | 44.15          |
| 6            | 2425.0          | 0.06       | 44.73          |
| 7            | 2430.0          | 0.06       | 44.63          |
| 8            | 2435.0          | 0.04       | 44.92          |

|    |        |      |       |
|----|--------|------|-------|
| 9  | 2440.0 | 0.13 | 45.88 |
| 10 | 2445.0 | 0.38 | 46.20 |
| 11 | 2450.0 | 0.51 | 46.09 |
| 12 | 2455.0 | 0.68 | 46.36 |
| 13 | 2460.0 | 0.82 | 46.59 |
| 14 | 2465.0 | 0.85 | 46.82 |
| 15 | 2470.0 | 0.92 | 47.08 |
| 16 | 2475.0 | 0.98 | 47.47 |
| 17 | 2480.0 | 1.04 | 47.50 |
| 18 | 2485.0 | 1.13 | 47.96 |
| 19 | 2490.0 | 1.25 | 48.98 |
| 20 | 2495.0 | 1.32 | 49.18 |
| 21 | 2500.0 | 1.24 | 48.72 |

WIFI-2-5G:

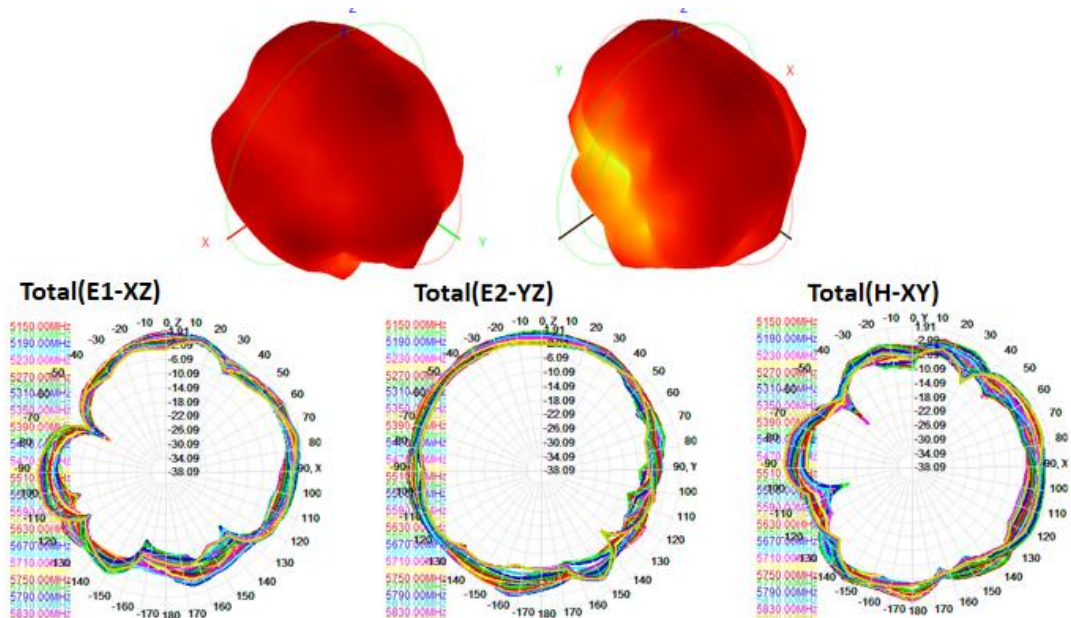

| Frequency ID | Frequency (MHz) | Gain (dBi) | Efficiency (%) |
|--------------|-----------------|------------|----------------|
| 1            | 5150.0          | 0.50       | 39.51          |



# 深圳市鑫恒阳科技有限公司

Shenzhen XINHENG YANG Technology Co., Ltd

|    |        |      |       |
|----|--------|------|-------|
| 2  | 5170.0 | 0.33 | 38.32 |
| 3  | 5190.0 | 0.25 | 39.45 |
| 4  | 5210.0 | 0.34 | 42.71 |
| 5  | 5230.0 | 0.54 | 45.88 |
| 6  | 5250.0 | 0.60 | 48.81 |
| 7  | 5270.0 | 0.75 | 51.58 |
| 8  | 5290.0 | 0.20 | 47.89 |
| 9  | 5310.0 | 0.52 | 41.78 |
| 10 | 5330.0 | 0.51 | 37.87 |
| 11 | 5350.0 | 0.73 | 36.72 |
| 12 | 5370.0 | 0.69 | 39.13 |
| 13 | 5390.0 | 0.58 | 42.23 |
| 14 | 5410.0 | 0.41 | 43.26 |
| 15 | 5430.0 | 0.94 | 44.85 |
| 16 | 5450.0 | 0.68 | 42.76 |
| 17 | 5470.0 | 0.60 | 38.28 |
| 18 | 5490.0 | 0.24 | 36.08 |
| 19 | 5510.0 | 0.28 | 35.79 |
| 20 | 5530.0 | 0.24 | 36.80 |
| 21 | 5550.0 | 0.11 | 39.12 |
| 22 | 5570.0 | 0.22 | 41.79 |
| 23 | 5590.0 | 0.33 | 43.11 |
| 24 | 5610.0 | 0.54 | 43.01 |
| 25 | 5630.0 | 0.52 | 41.71 |
| 26 | 5650.0 | 0.60 | 40.18 |
| 27 | 5670.0 | 0.68 | 39.36 |
| 28 | 5690.0 | 0.51 | 38.77 |
| 29 | 5710.0 | 0.54 | 38.56 |



# 深圳市鑫恒阳科技有限公司

Shenzhen XINHENG YANG Technology Co., Ltd

|    |        |      |       |
|----|--------|------|-------|
| 30 | 5730.0 | 0.55 | 38.79 |
| 31 | 5750.0 | 0.35 | 38.98 |
| 32 | 5770.0 | 0.29 | 39.46 |
| 33 | 5790.0 | 0.36 | 37.23 |
| 34 | 5810.0 | 0.33 | 35.16 |
| 35 | 5830.0 | 0.21 | 33.11 |
| 36 | 5850.0 | 0.01 | 34.00 |



## 3. OTA:

WIFI2.4G+5.8G:

| Test Condition |         | Free Space |           |
|----------------|---------|------------|-----------|
| band           | Channel | TRP (dBm)  | TIS (dBm) |
| 802.11A 54Mbps | 149     | 传导没校准      |           |
|                | 157     |            |           |
|                | 165     |            |           |
| 802.11B 11Mbps | 1       | 17.35      | -86.51    |
|                | 6       | 17.66      | -88.62    |
|                | 11      | 17.25      | -85.87    |
| 802.11G 54Mbps | 1       | 17.28      | -74.96    |
|                | 6       | 17.55      | -74.78    |
|                | 11      | 16.77      | -73.03    |
| 802.11N MCS7   | 1       | 16.77      | -66.12    |
|                | 6       | 16.85      | -71.11    |
|                | 11      | 16.58      | -69.66    |

802.11A 54Mbps 传导功率为-3.59dBm,  
 802.11AC VHT40MHz MCS9 传导功率为-4.04dBm,  
 802.11AX VHT80MHz MCS11 传导功率为-3.31dBm。

## 七、 工程图纸 (Product Drawing)

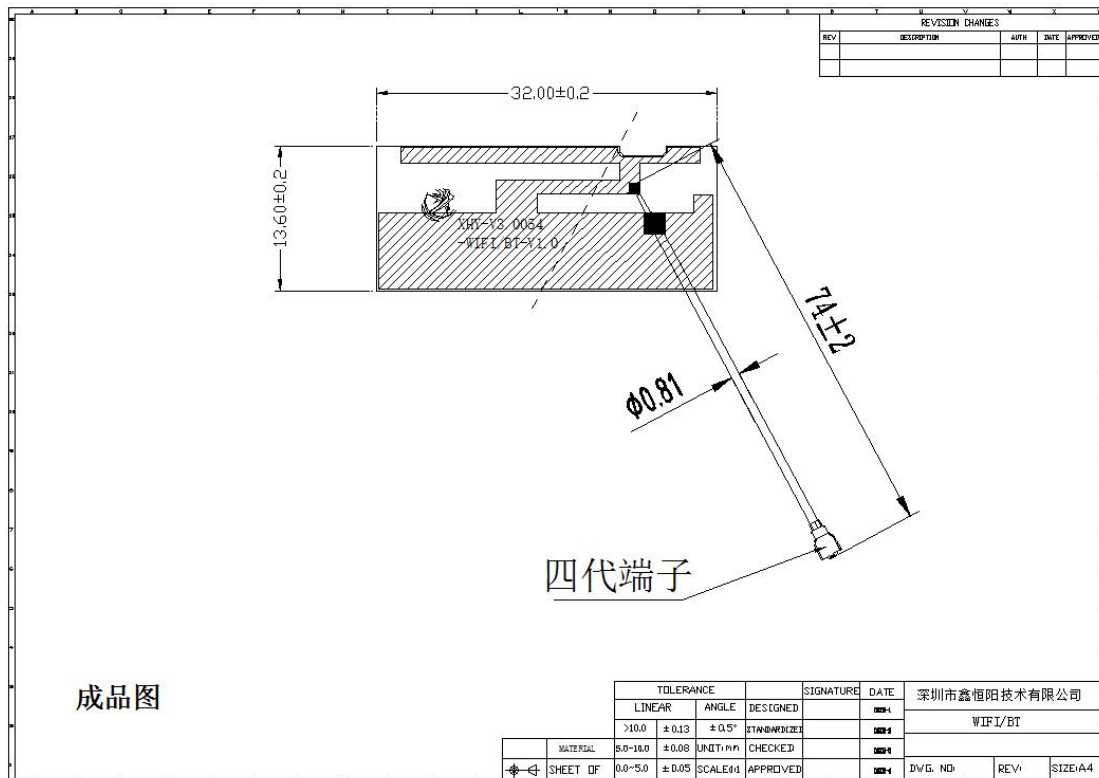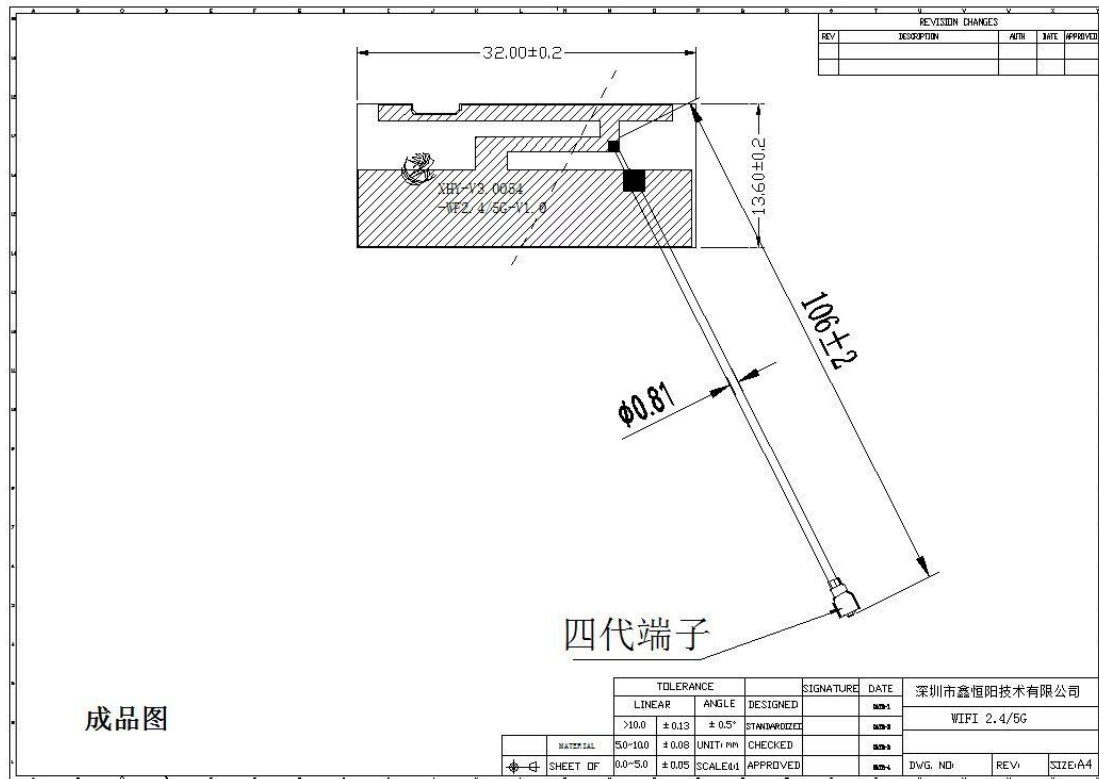



## 八、 ROHS

Antenna XHY-V3. 0054-WF2. 4/5G-V1. 0 and  
XHY-V3. 0054-WIFI/BT-V1. 0 meets ROHS requirements.

## 九、 Product packaging instructions

- A. packing should meet the moistureproof, vibration, pressure and mildew proof, etc.
- B. the smallest packing unit logo must have the manufacturer trademarks, product model, name, code and quantity.
- C. in the attached packing list, certificate of approval, and the factory inspection report.

\*\*\*\*\*END\*\*\*\*\*