Appendix E

RF Test Data for 5.8G WIFI (Conducted Measurement)

Product Name: Edge2 Maker Kit

Test Model: Edge2 Basic

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Wunder Wu
Supervised by:	Li Huan

E.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant0	15.66	>=0.5	Pass
NVNT	a	5785	Ant0	15.082	>=0.5	Pass
NVNT	a	5825	Ant0	14.113	>=0.5	Pass
NVNT	n20	5745	Ant0	13.9	>=0.5	Pass
NVNT	n20	5785	Ant0	13.77	>=0.5	Pass
NVNT	n20	5825	Ant0	15.094	>=0.5	Pass
NVNT	n40	5755	Ant0	33.778	>=0.5	Pass
NVNT	n40	5795	Ant0	28.855	>=0.5	Pass
NVNT	ac20	5745	Ant0	15.1	>=0.5	Pass
NVNT	ac20	5785	Ant0	12.857	>=0.5	Pass
NVNT	ac20	5825	Ant0	15.05	>=0.5	Pass
NVNT	ac40	5755	Ant0	35.045	>=0.5	Pass
NVNT	ac40	5795	Ant0	32.558	>=0.5	Pass
NVNT	ac80	5775	Ant0	75.098	>=0.5	Pass
NVNT	ax20	5745	Ant0	17.546	>=0.5	Pass
NVNT	ax20	5785	Ant0	16.991	>=0.5	Pass
NVNT	ax20	5825	Ant0	16.981	>=0.5	Pass
NVNT	ax40	5755	Ant0	35.101	>=0.5	Pass
NVNT	ax40	5795	Ant0	33.902	>=0.5	Pass
NVNT	ax80	5775	Ant0	74.953	>=0.5	Pass

Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant0

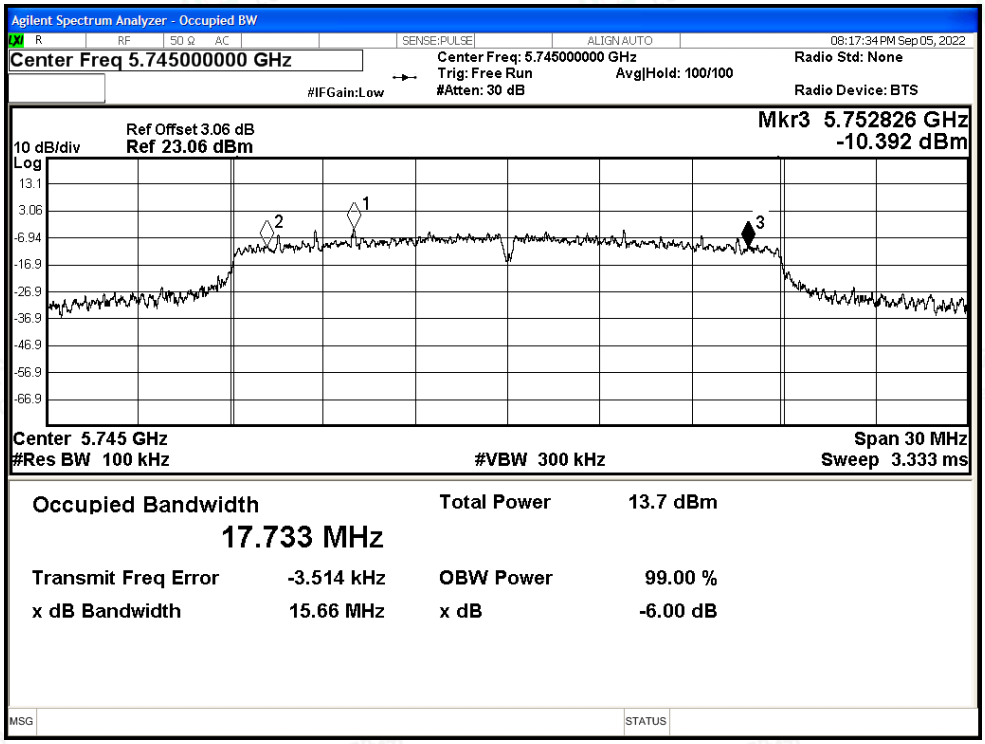

-6dB Bandwidth NVNT a 5785MHz Ant0

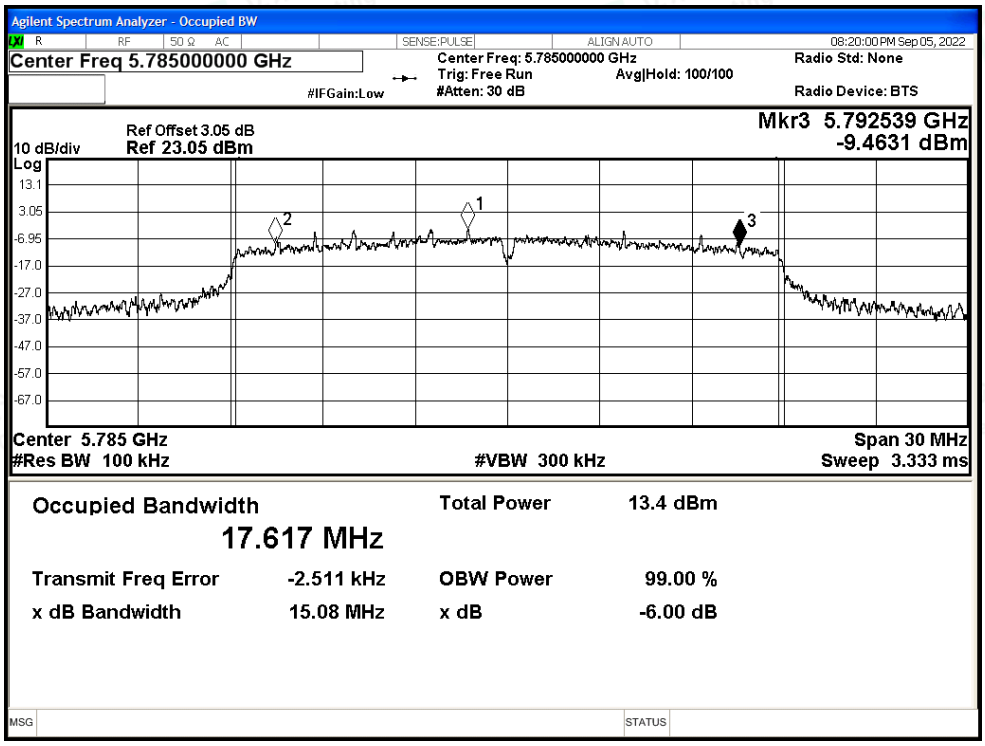

-6dB Bandwidth NVNT a 5825MHz Ant0

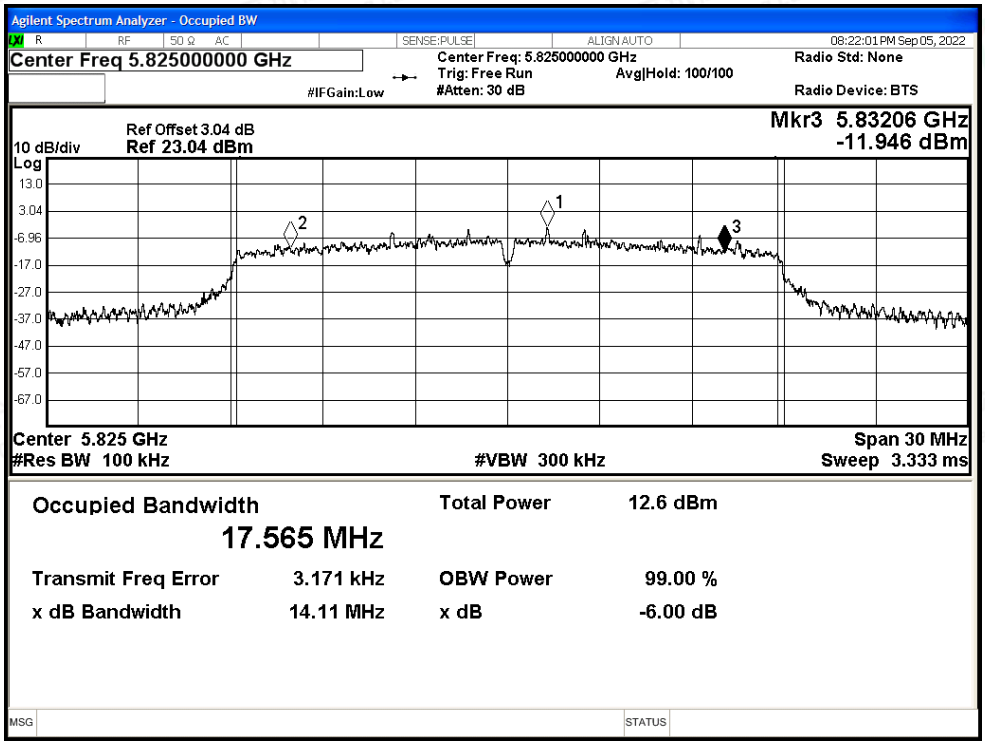

-6dB Bandwidth NVNT n20 5745MHz Ant0

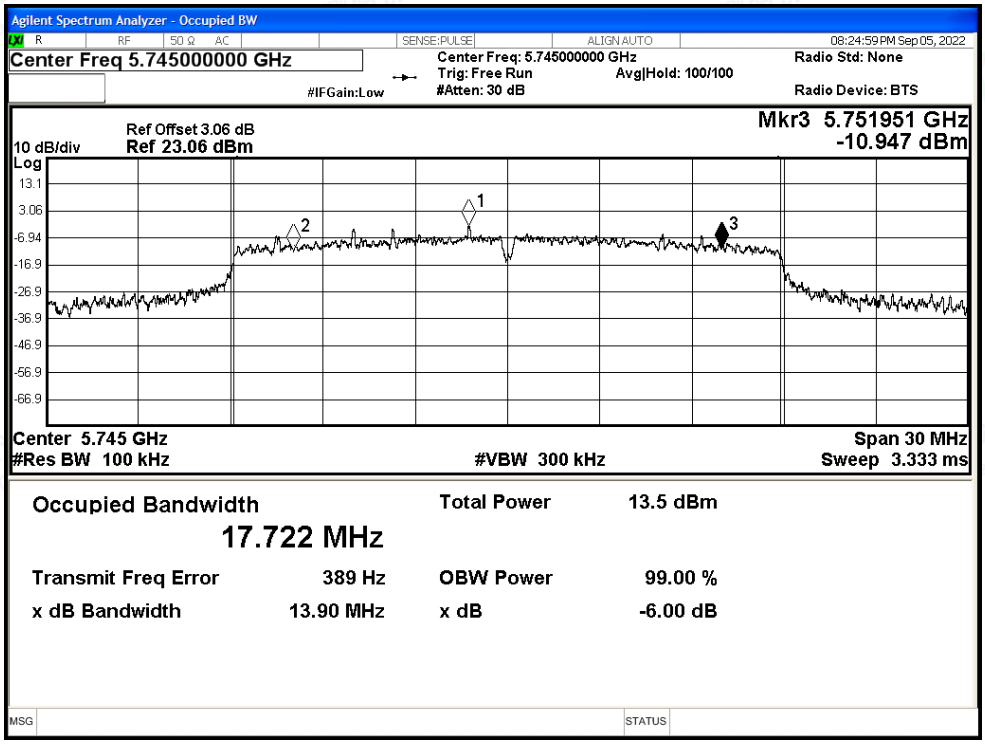

-6dB Bandwidth NVNT n20 5785MHz Ant0

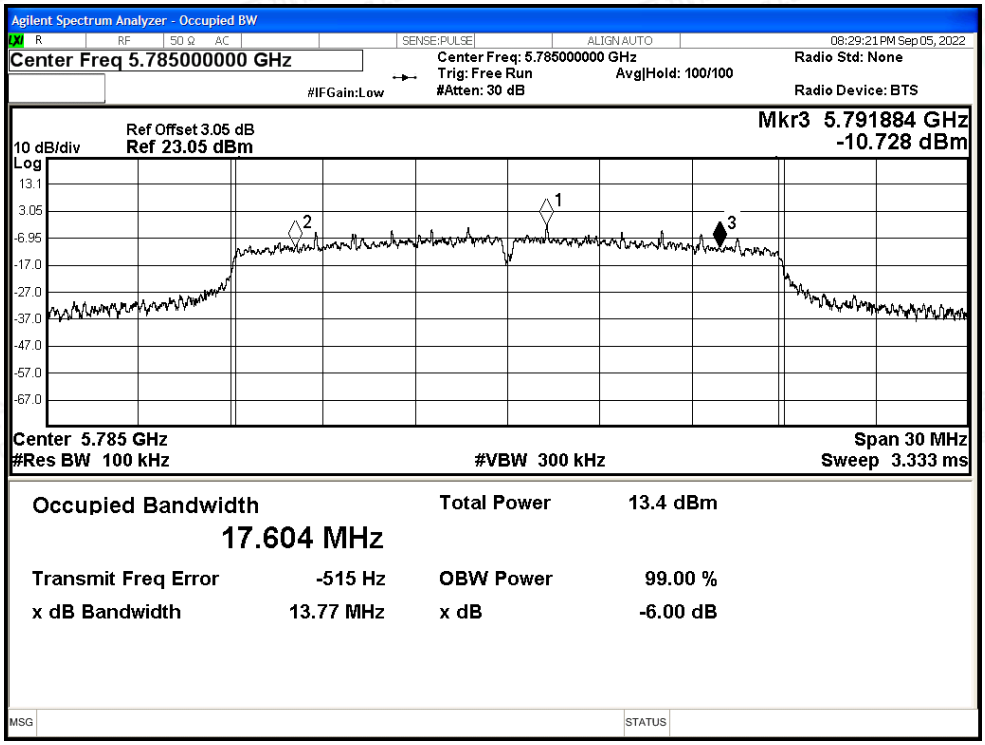

-6dB Bandwidth NVNT n20 5825MHz Ant0

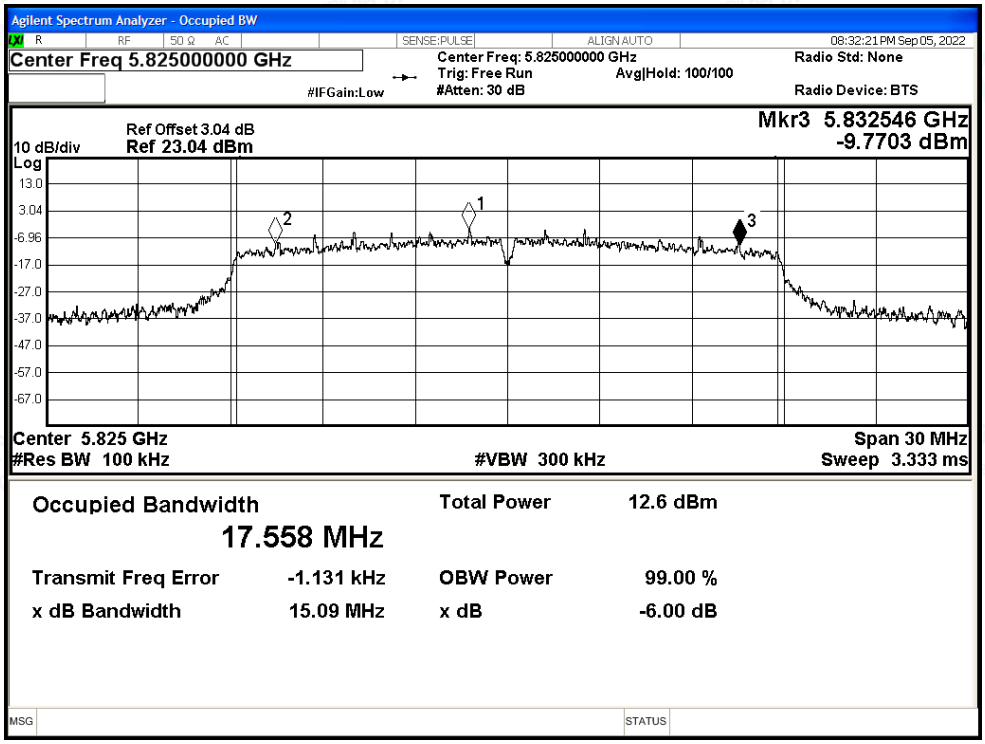

-6dB Bandwidth NVNT n40 5755MHz Ant0

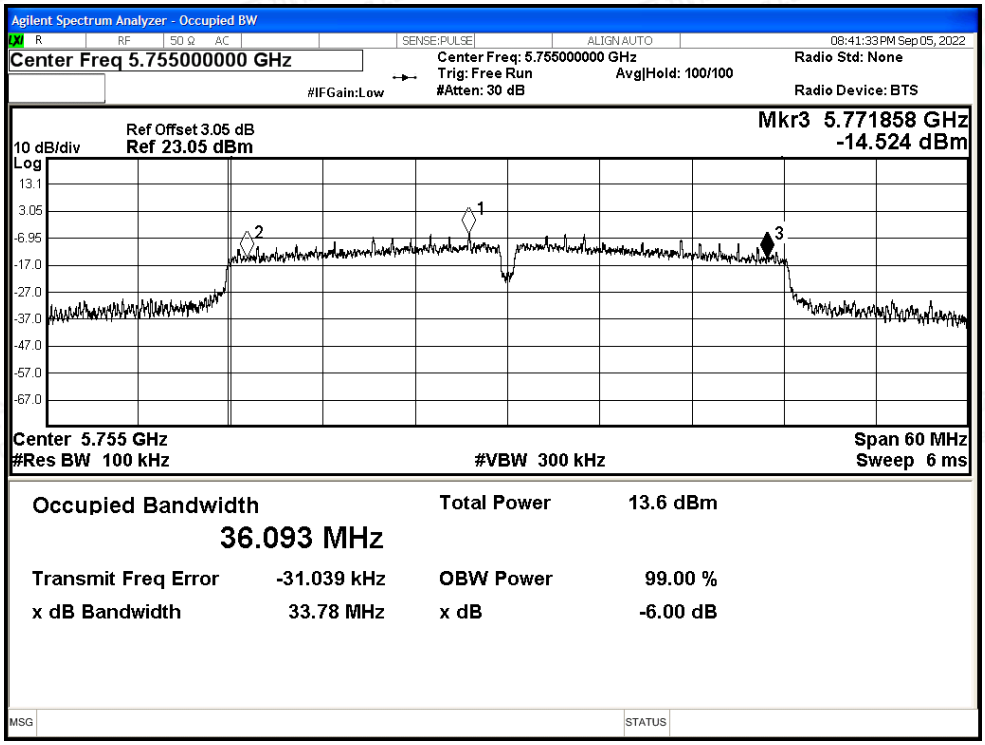

-6dB Bandwidth NVNT n40 5795MHz Ant0

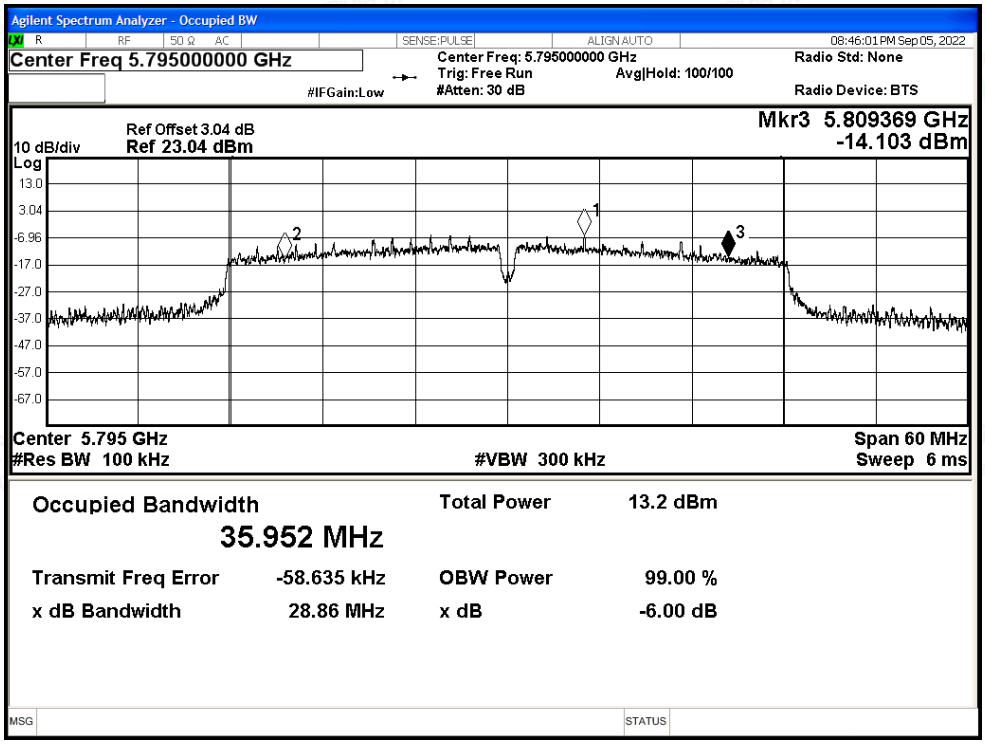

-6dB Bandwidth NVNT ac20 5745MHz Ant0

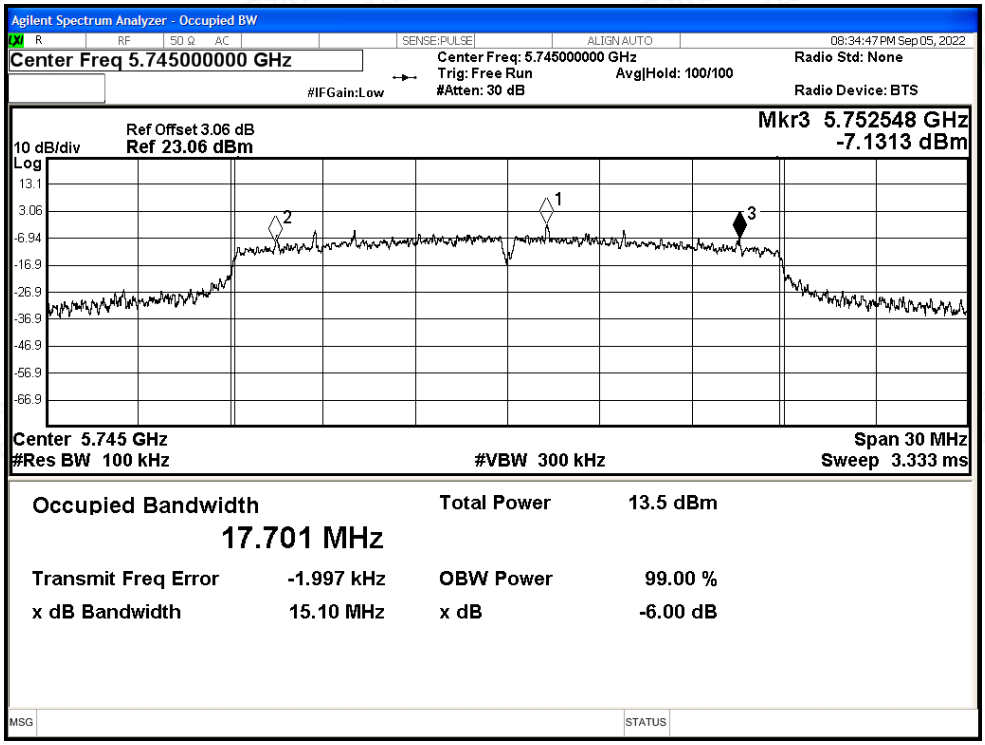

-6dB Bandwidth NVNT ac20 5785MHz Ant0

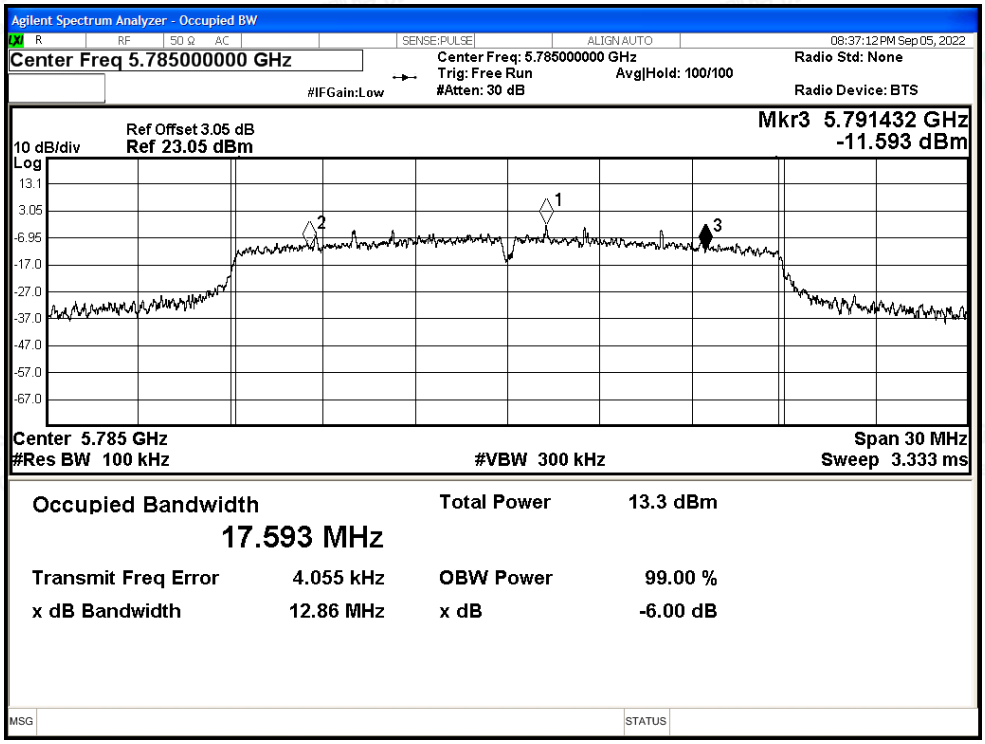

-6dB Bandwidth NVNT ac20 5825MHz Ant0

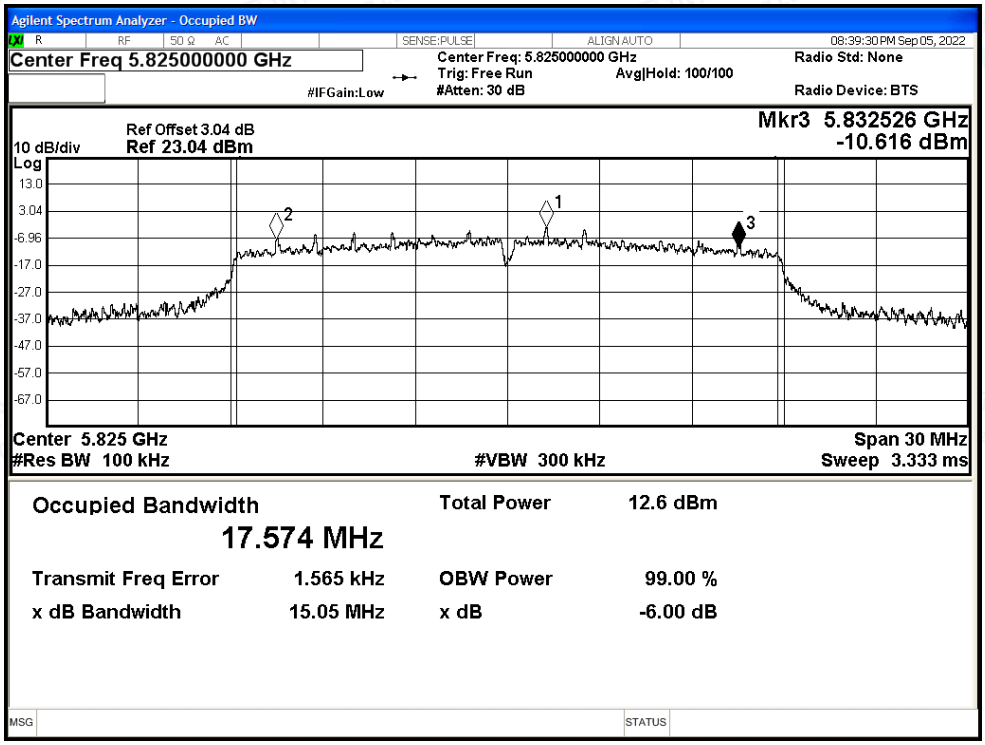

-6dB Bandwidth NVNT ac40 5755MHz Ant0

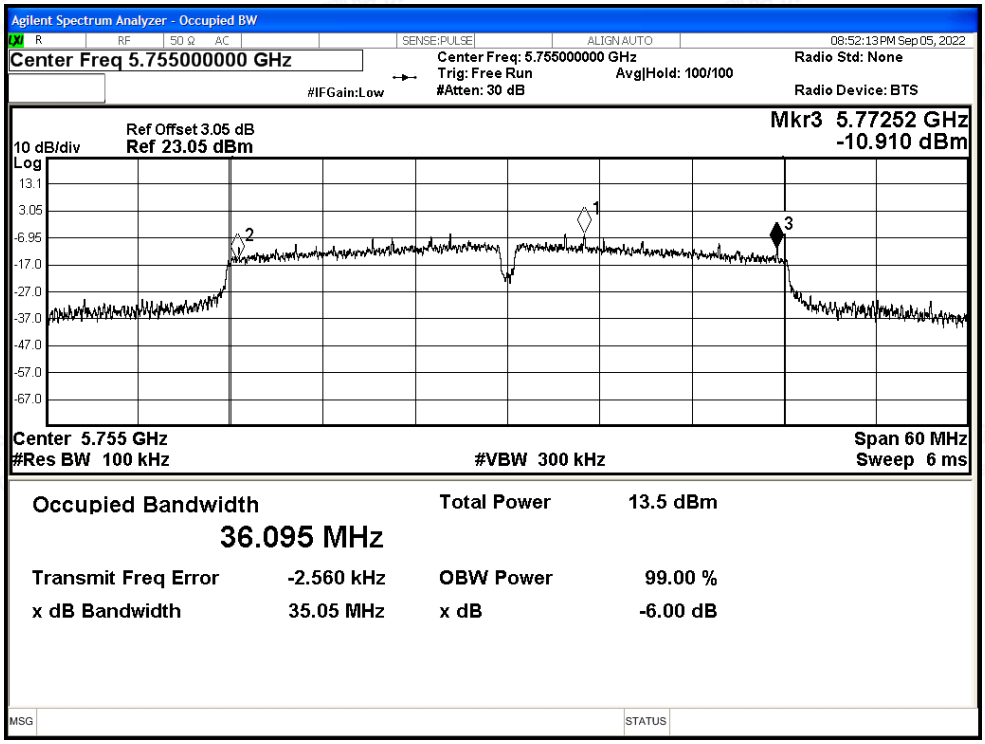

-6dB Bandwidth NVNT ac40 5795MHz Ant0

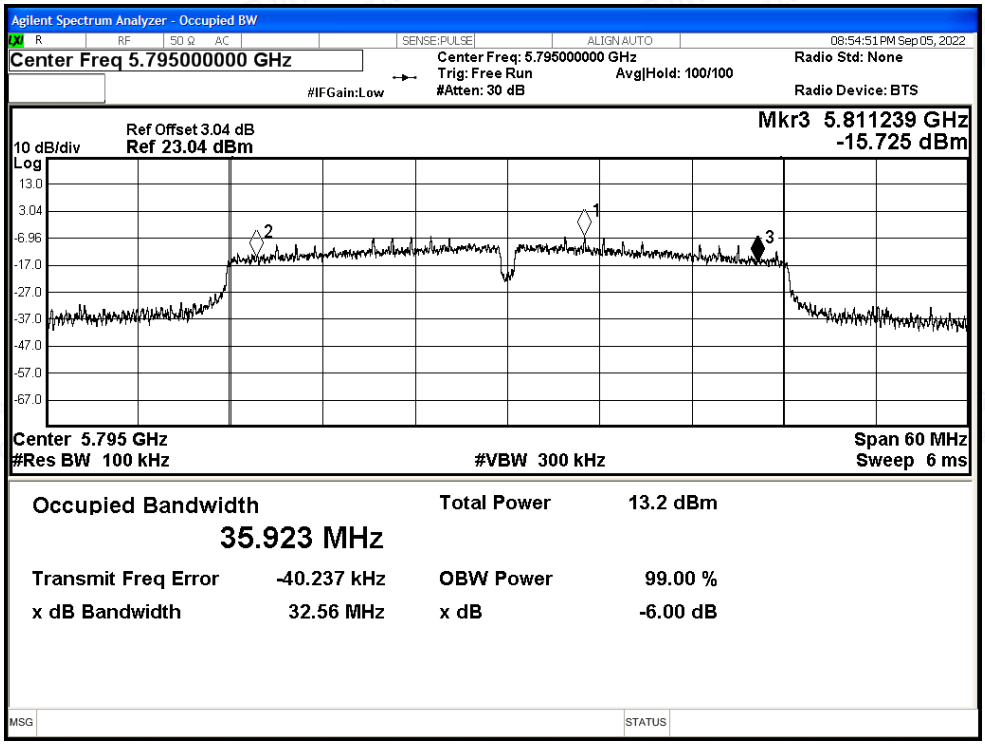

-6dB Bandwidth NVNT ac80 5775MHz Ant0

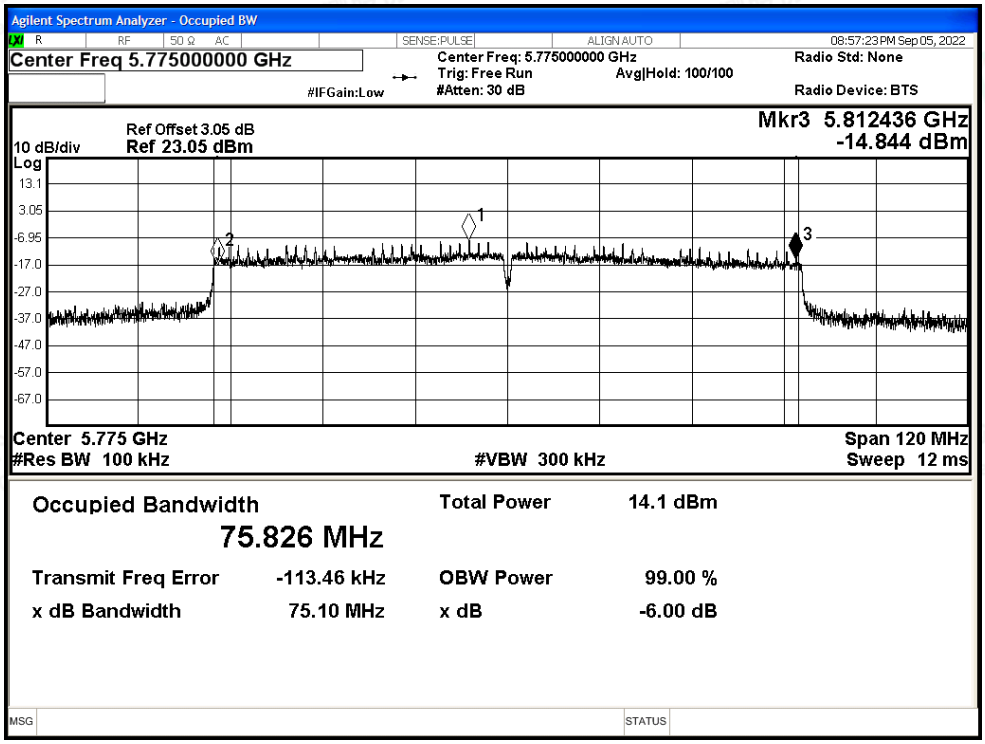

-6dB Bandwidth NVNT ax20 5745MHz Ant0

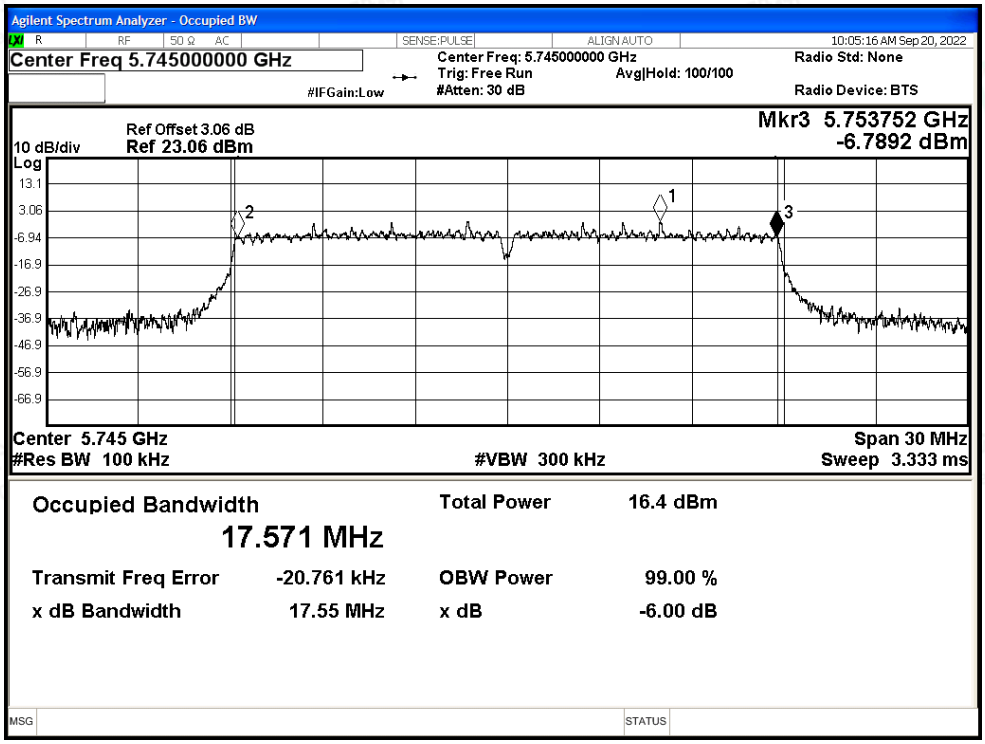

-6dB Bandwidth NVNT ax20 5785MHz Ant0

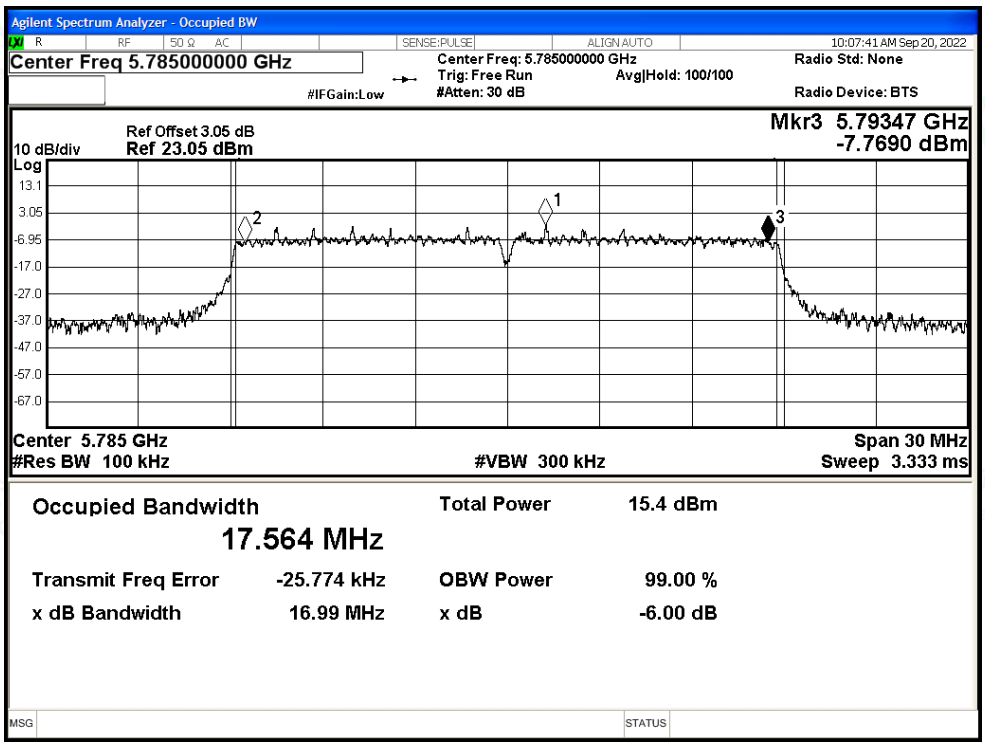

-6dB Bandwidth NVNT ax20 5825MHz Ant0

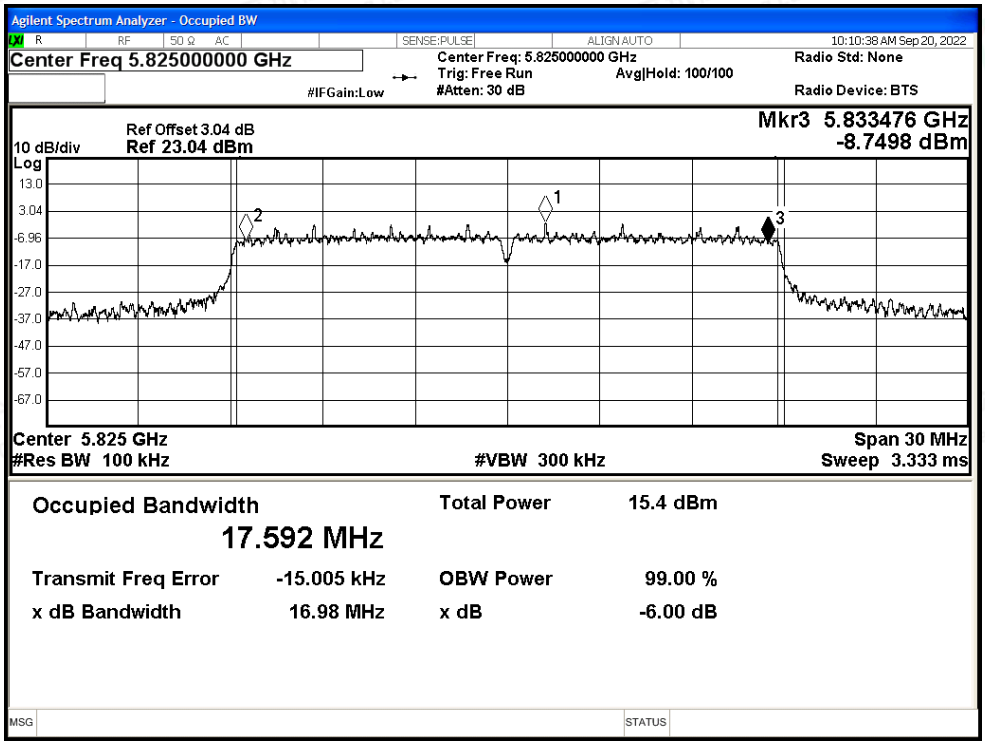

-6dB Bandwidth NVNT ax40 5755MHz Ant0

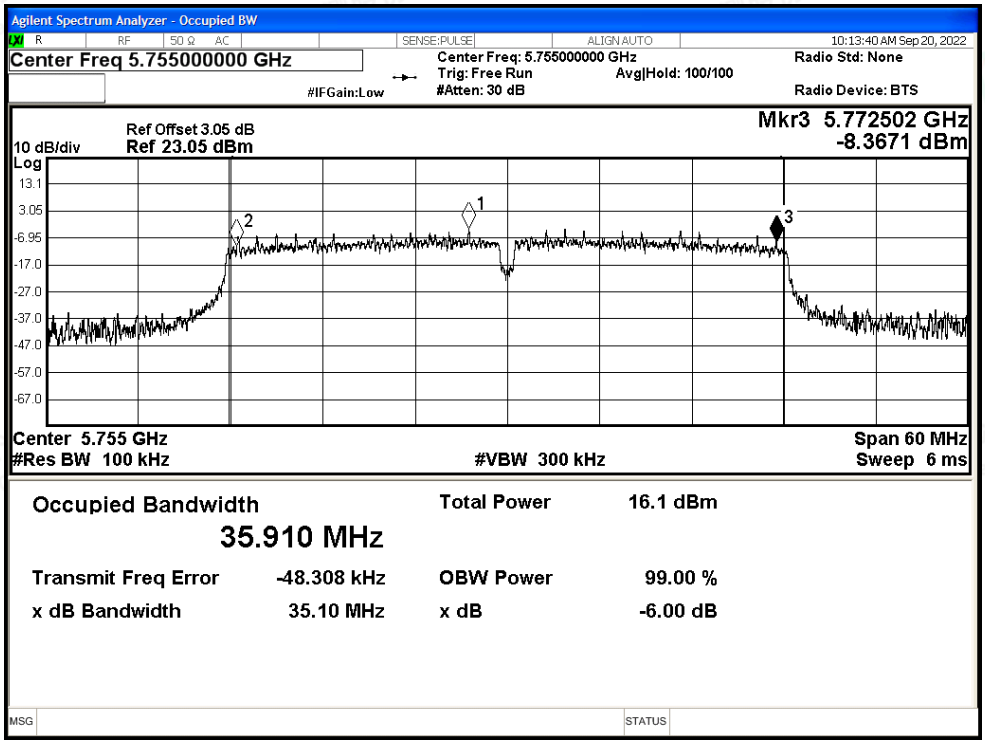

-6dB Bandwidth NVNT ax40 5795MHz Ant0

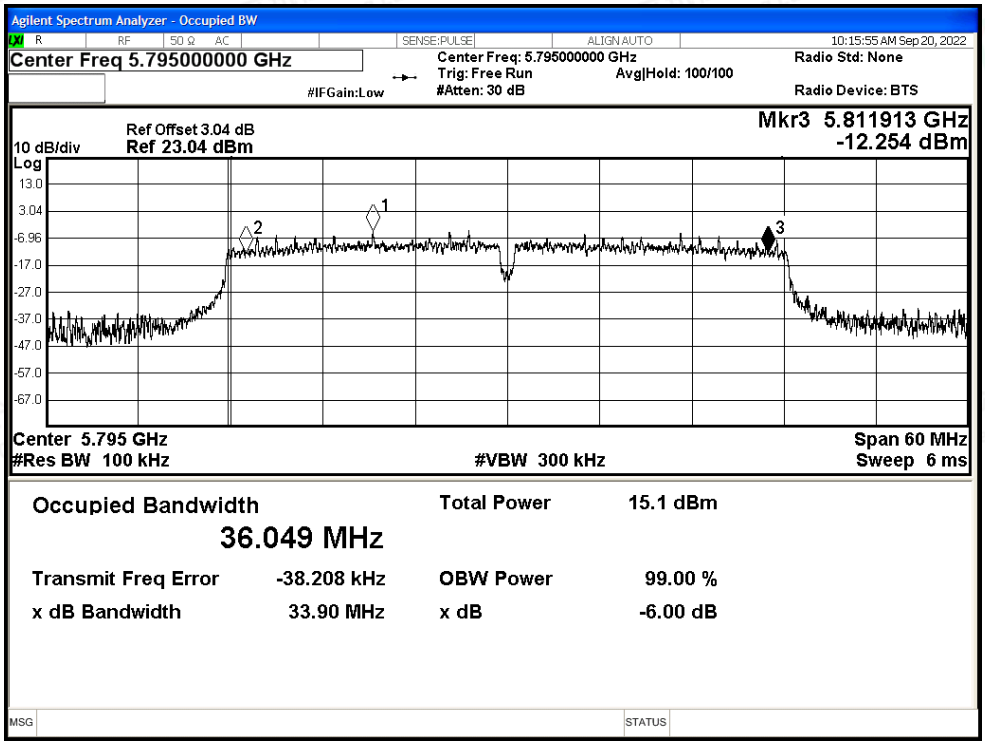

-6dB Bandwidth NVNT ax80 5775MHz Ant0

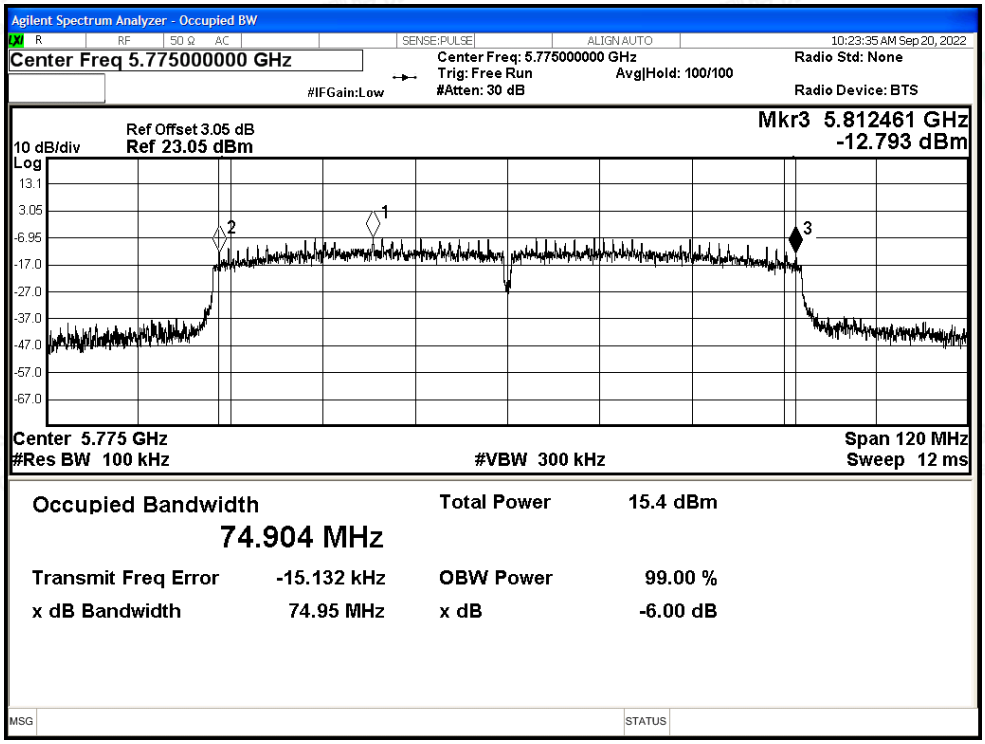

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.133	>=0.5	Pass
NVNT	a	5785	Ant1	15.037	>=0.5	Pass
NVNT	a	5825	Ant1	13.102	>=0.5	Pass
NVNT	n20	5745	Ant1	15.367	>=0.5	Pass
NVNT	n20	5785	Ant1	15.077	>=0.5	Pass
NVNT	n20	5825	Ant1	15.022	>=0.5	Pass
NVNT	n40	5755	Ant1	33.808	>=0.5	Pass
NVNT	n40	5795	Ant1	35.072	>=0.5	Pass
NVNT	ac20	5745	Ant1	13.805	>=0.5	Pass
NVNT	ac20	5785	Ant1	14.978	>=0.5	Pass
NVNT	ac20	5825	Ant1	15.033	>=0.5	Pass
NVNT	ac40	5755	Ant1	32.558	>=0.5	Pass
NVNT	ac40	5795	Ant1	33.866	>=0.5	Pass
NVNT	ac80	5775	Ant1	75.404	>=0.5	Pass
NVNT	ax20	5745	Ant1	17.01	>=0.5	Pass
NVNT	ax20	5785	Ant1	16.924	>=0.5	Pass
NVNT	ax20	5825	Ant1	17.314	>=0.5	Pass
NVNT	ax40	5755	Ant1	35.138	>=0.5	Pass
NVNT	ax40	5795	Ant1	35.124	>=0.5	Pass
NVNT	ax80	5775	Ant1	75.07	>=0.5	Pass

Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

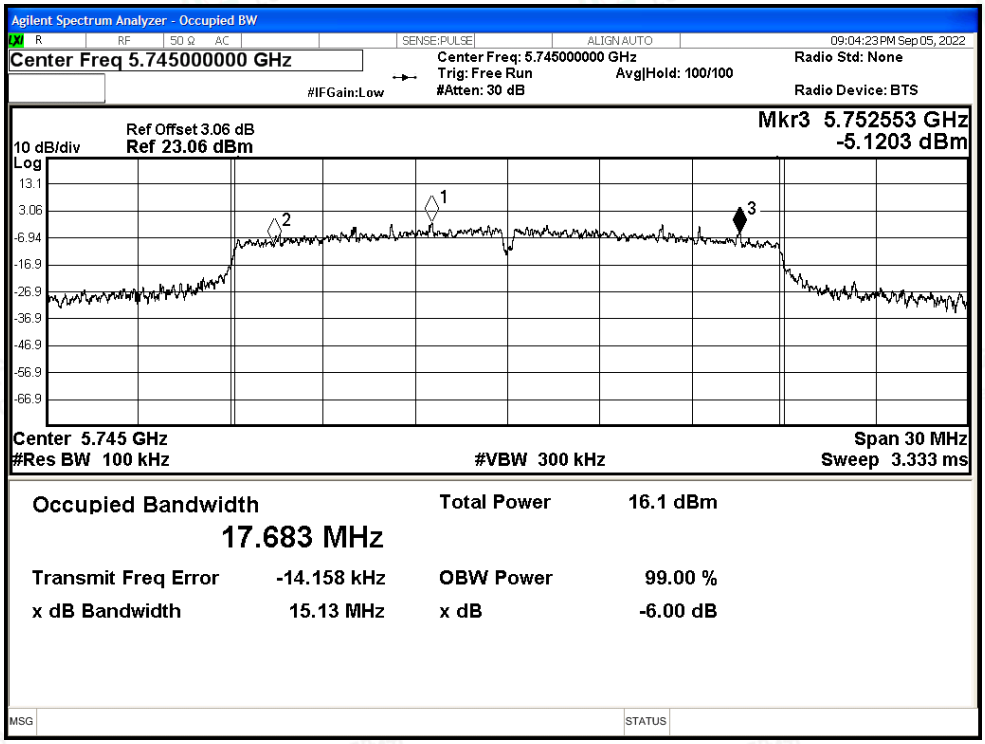

-6dB Bandwidth NVNT a 5785MHz Ant1

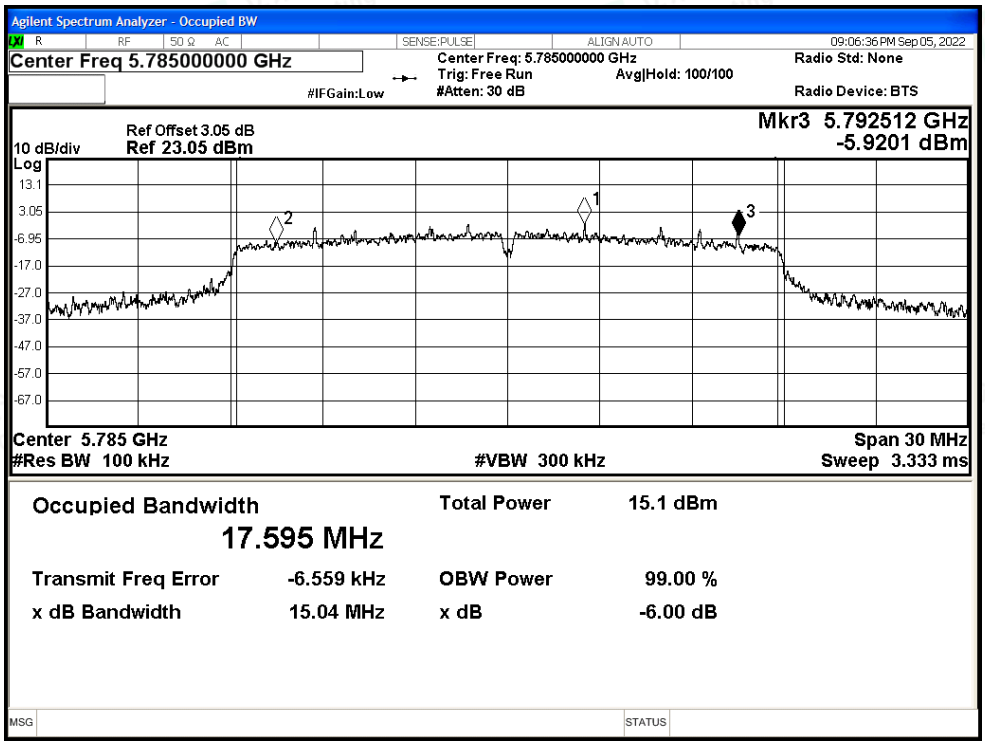

-6dB Bandwidth NVNT a 5825MHz Ant1

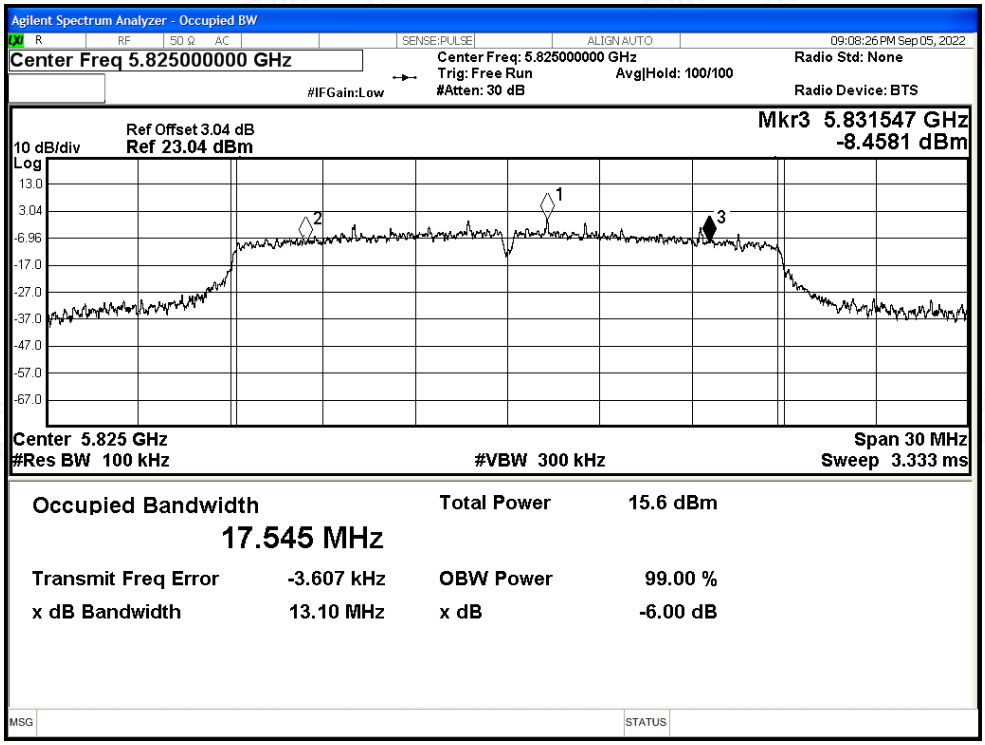

-6dB Bandwidth NVNT n20 5745MHz Ant1

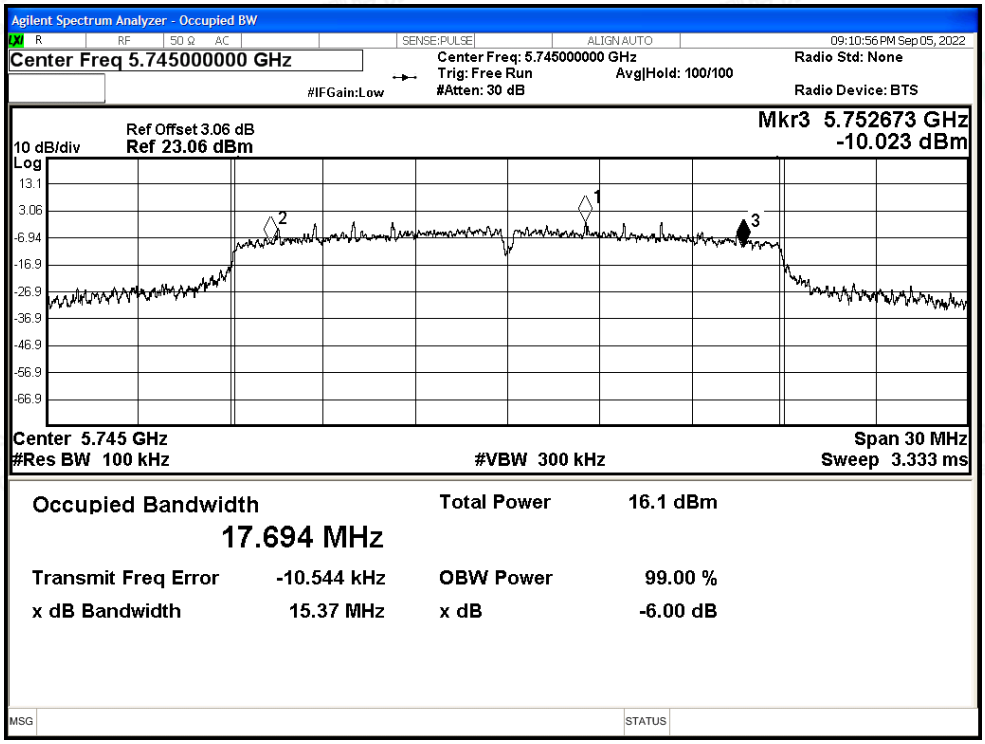

-6dB Bandwidth NVNT n20 5785MHz Ant1

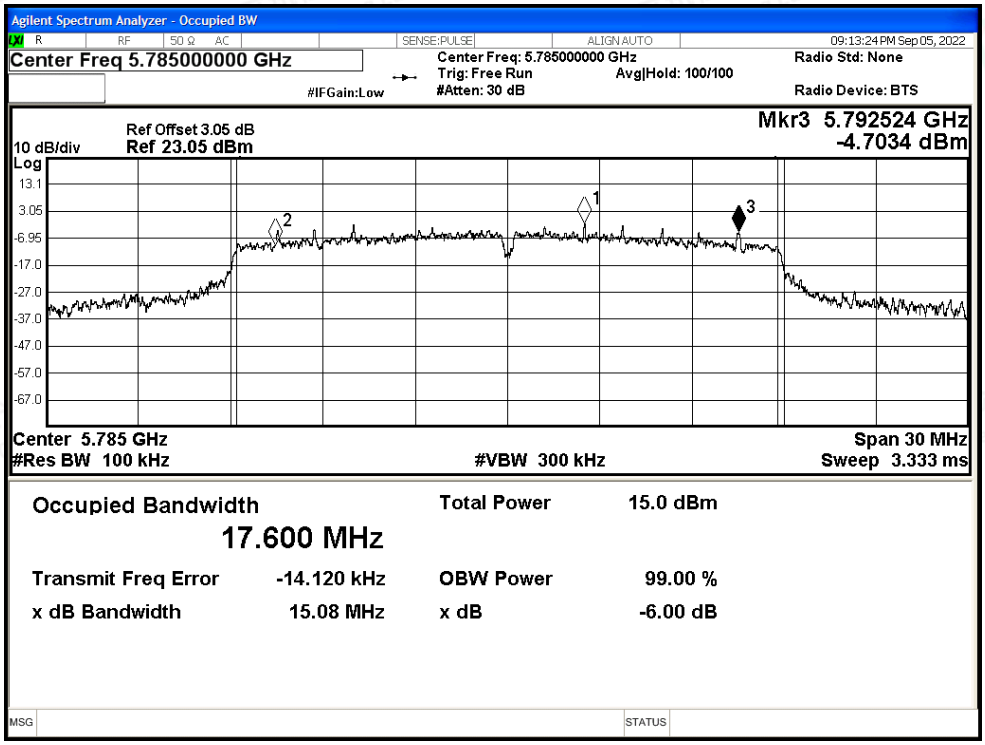

-6dB Bandwidth NVNT n20 5825MHz Ant1

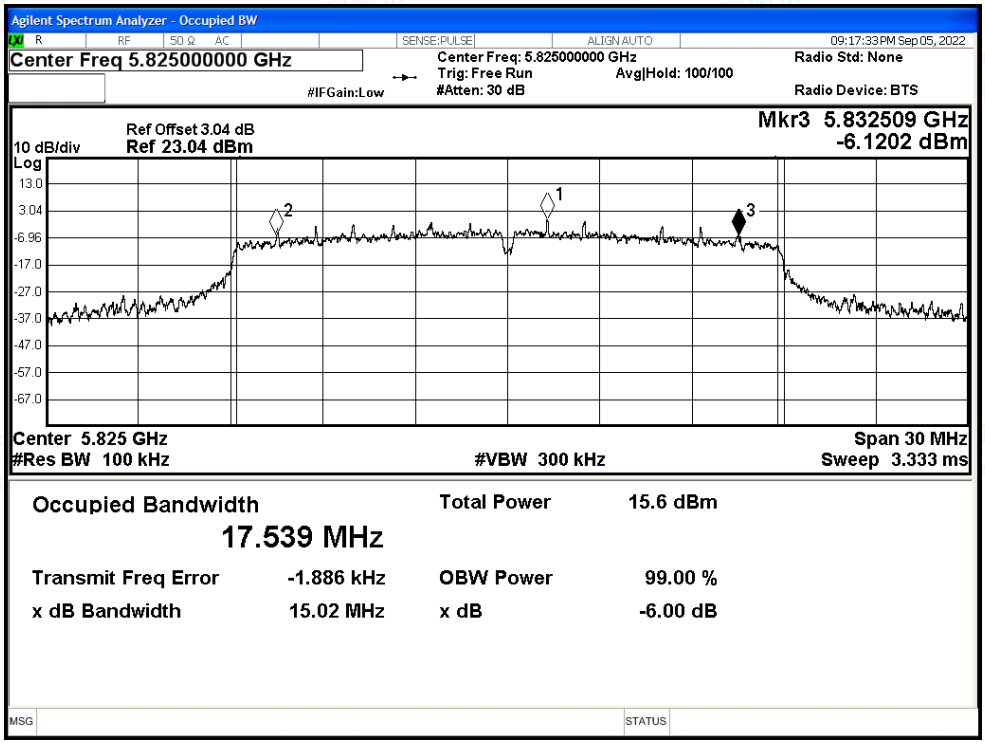

-6dB Bandwidth NVNT n40 5755MHz Ant1

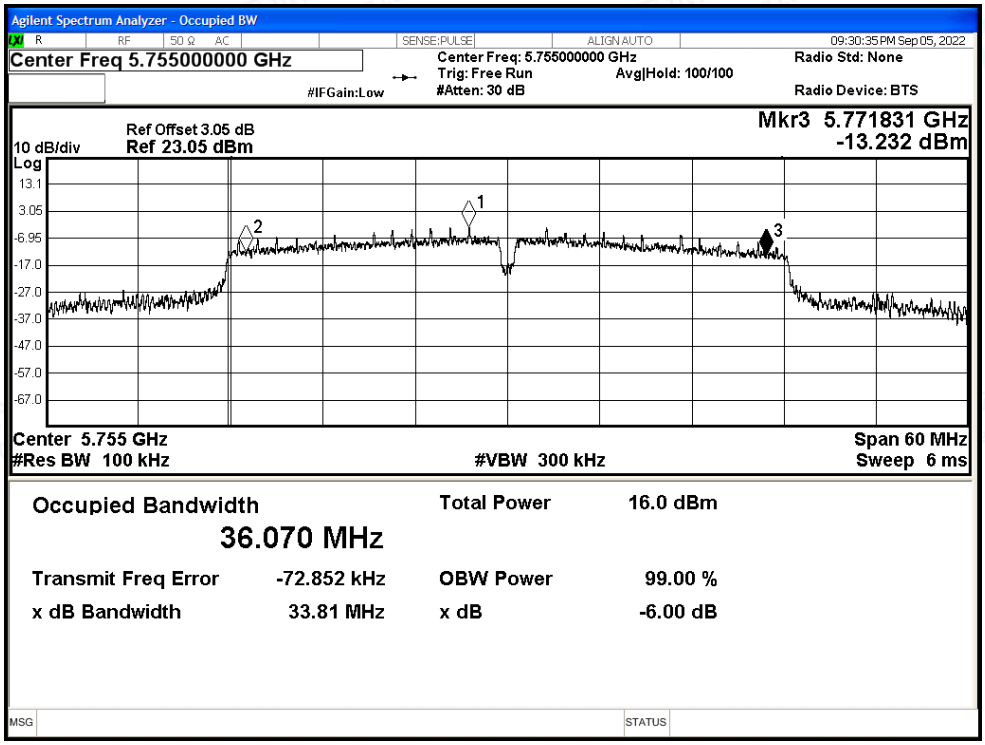

-6dB Bandwidth NVNT n40 5795MHz Ant1

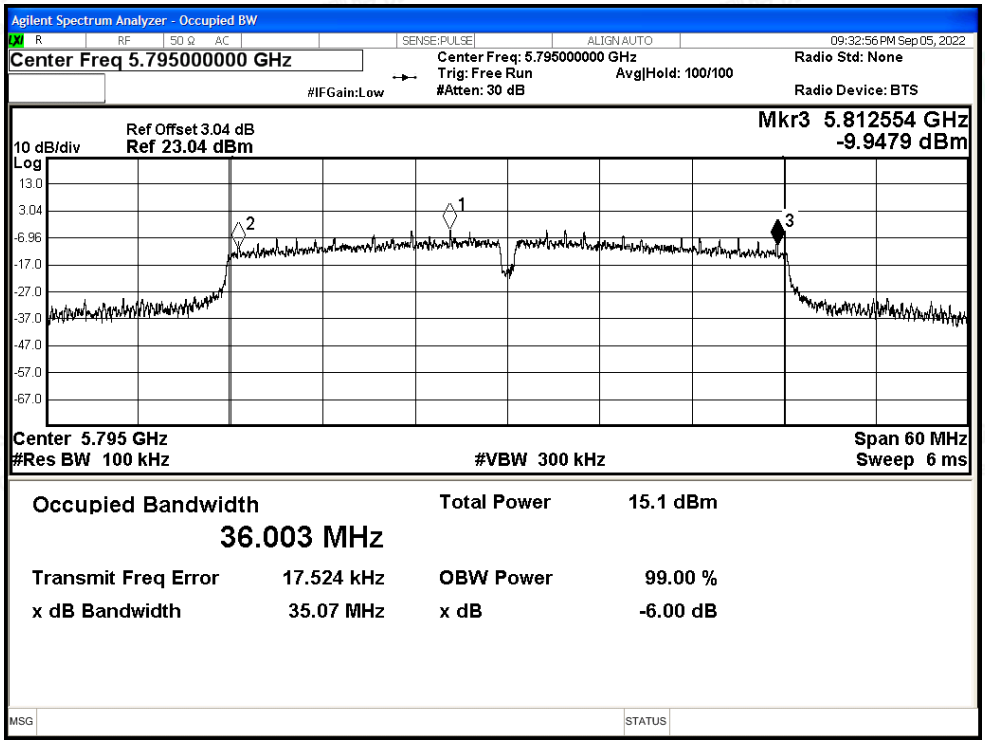

-6dB Bandwidth NVNT ac20 5745MHz Ant1

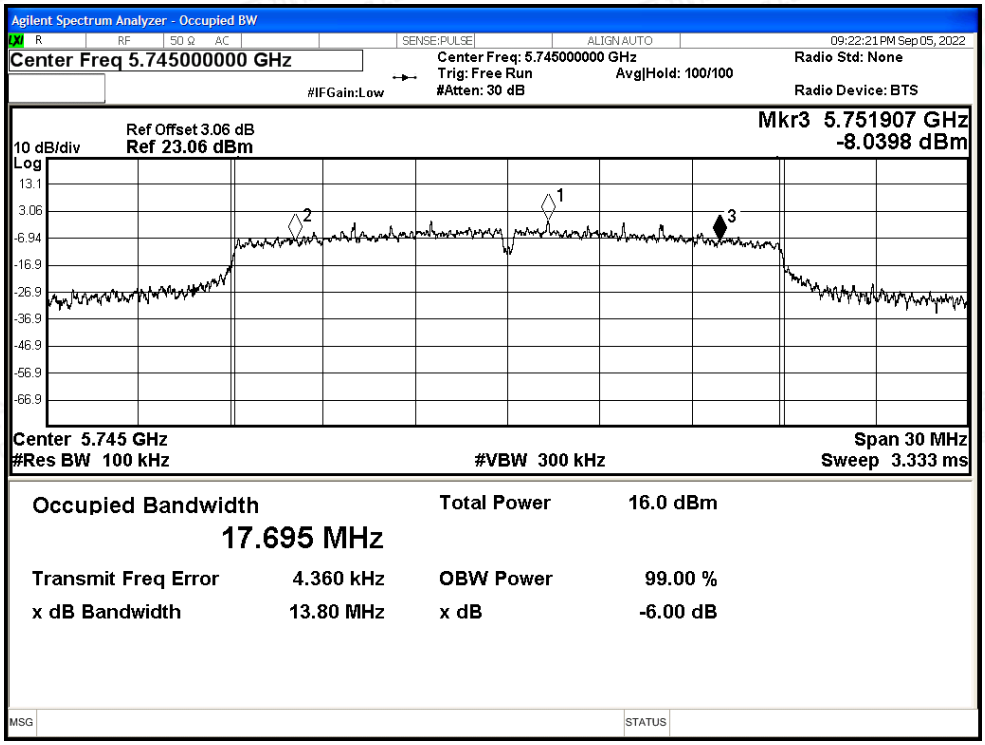

-6dB Bandwidth NVNT ac20 5785MHz Ant1

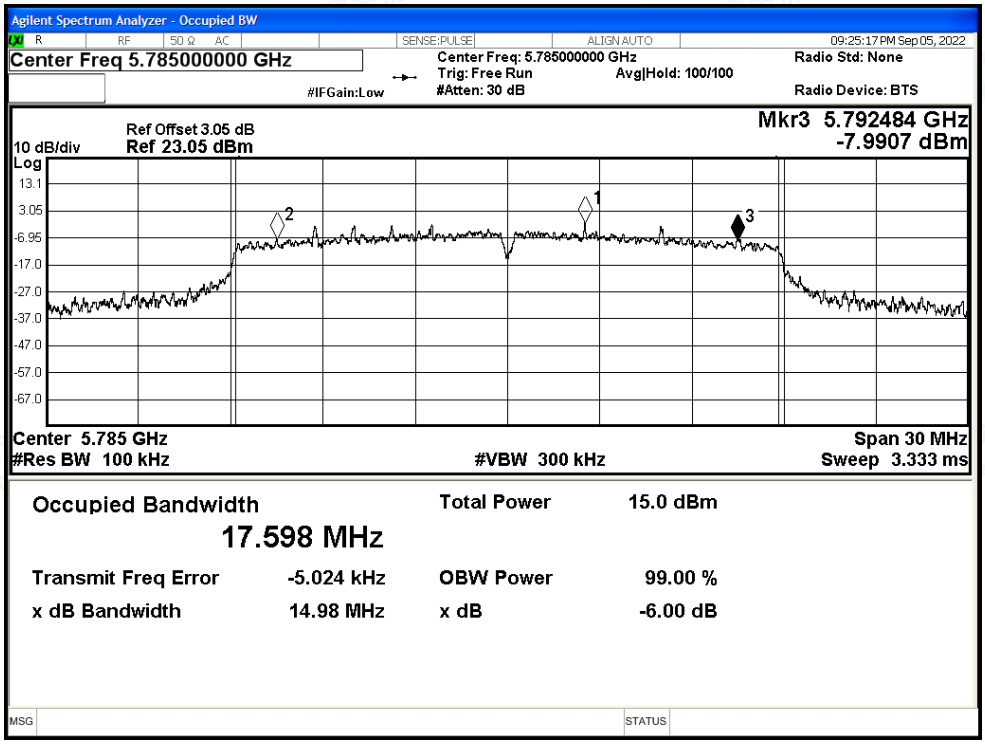

-6dB Bandwidth NVNT ac20 5825MHz Ant1

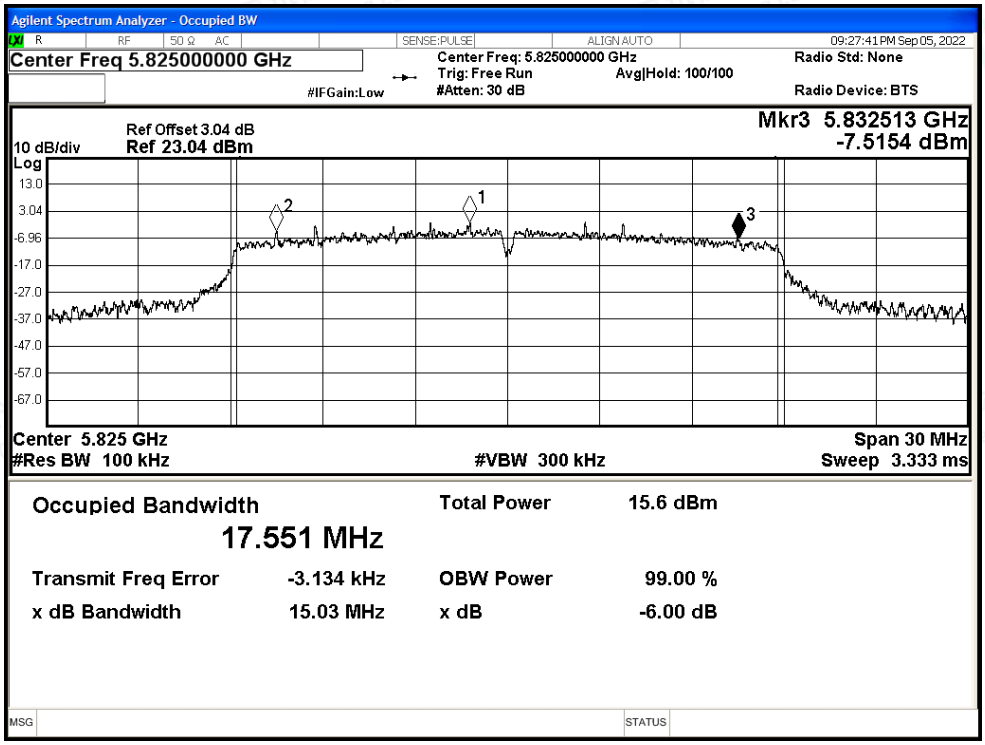

-6dB Bandwidth NVNT ac40 5755MHz Ant1

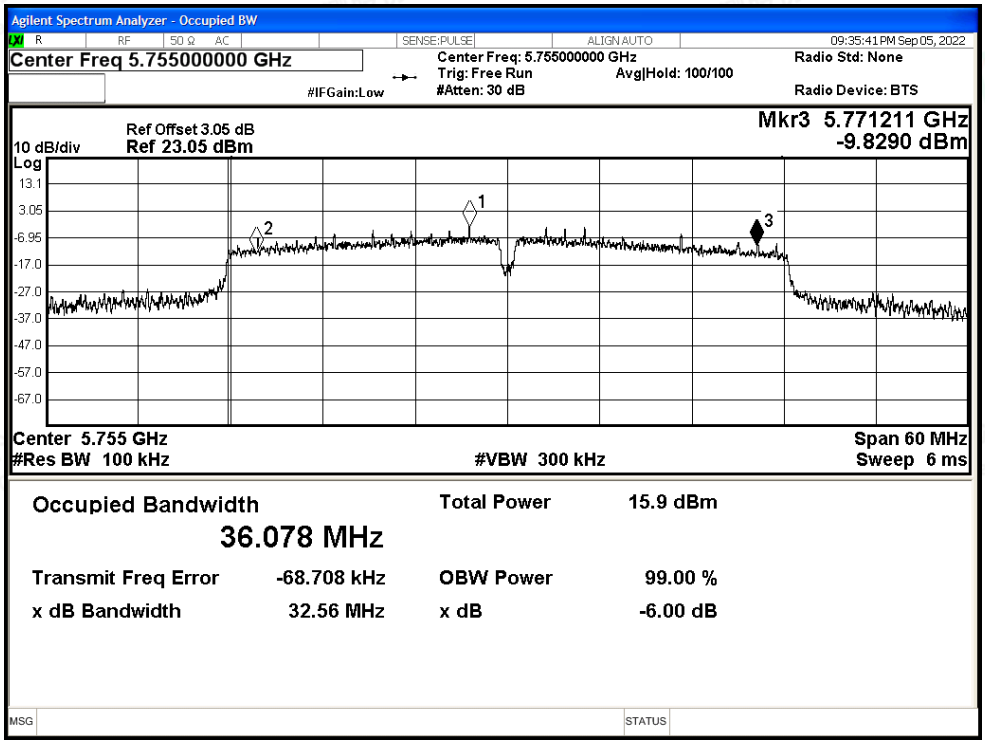

-6dB Bandwidth NVNT ac40 5795MHz Ant1

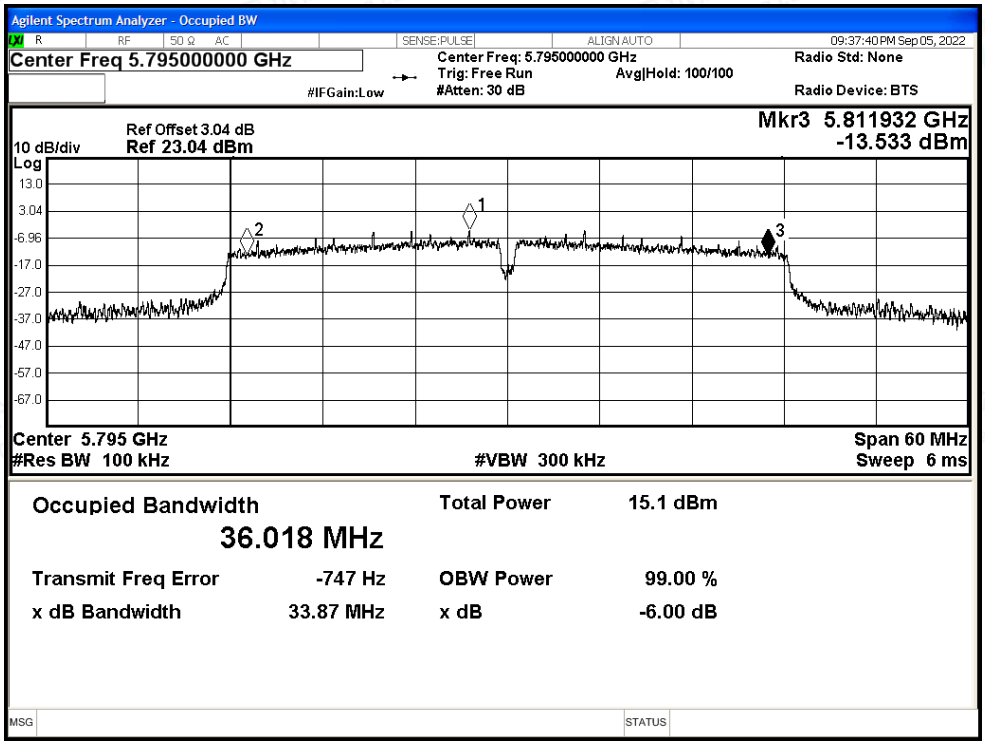

-6dB Bandwidth NVNT ac80 5775MHz Ant1

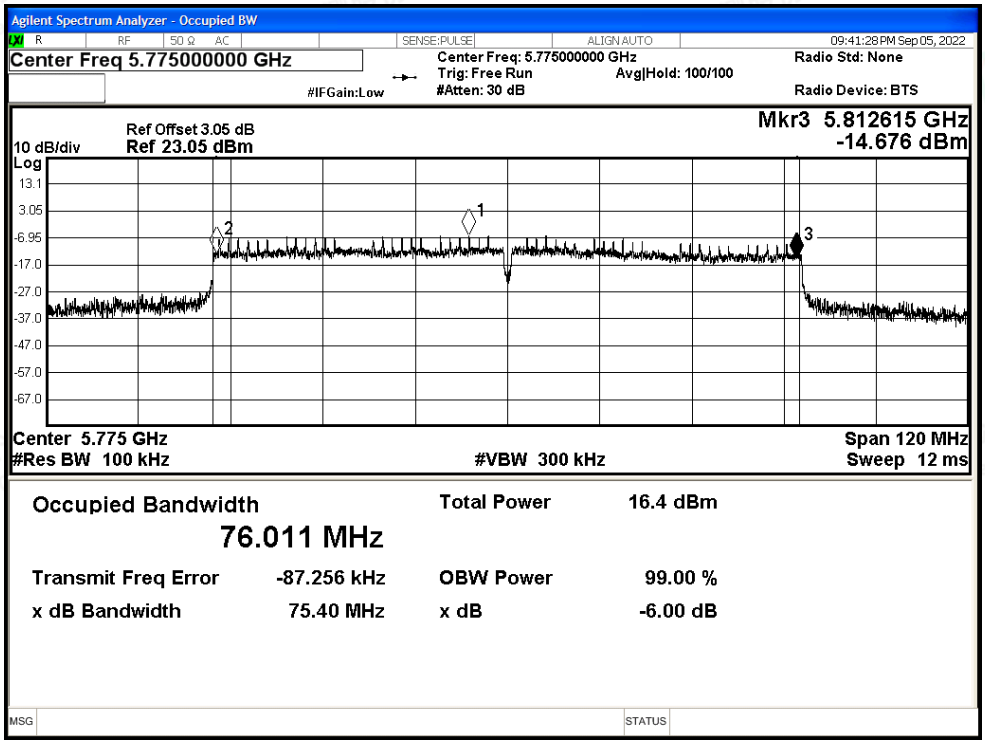

-6dB Bandwidth NVNT ax20 5745MHz Ant1

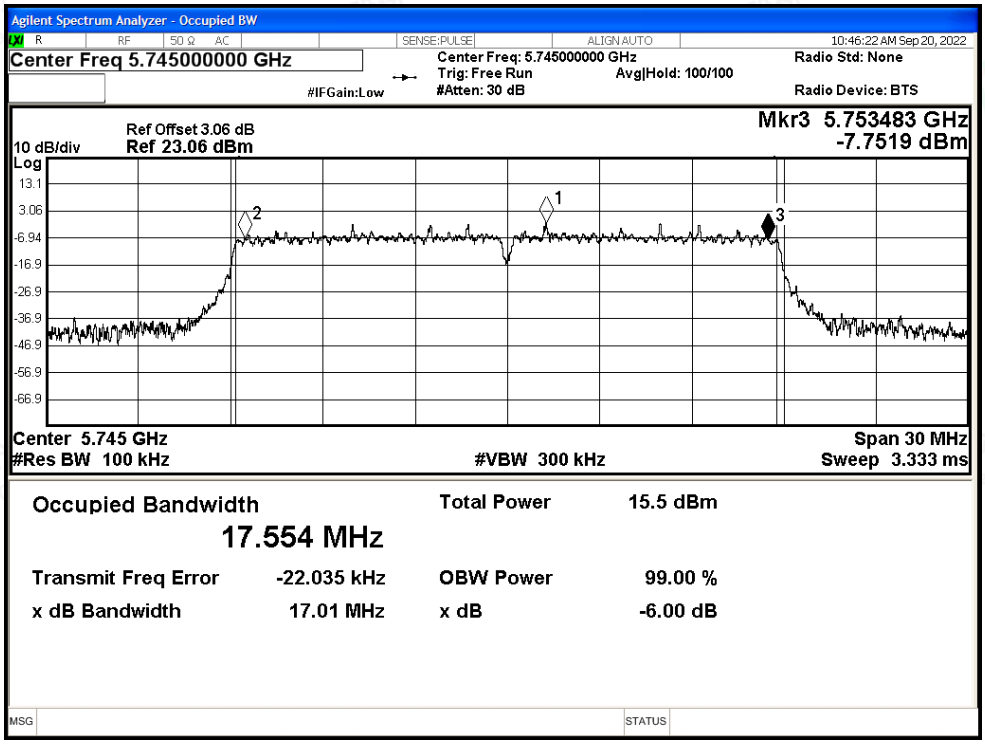

-6dB Bandwidth NVNT ax20 5785MHz Ant1

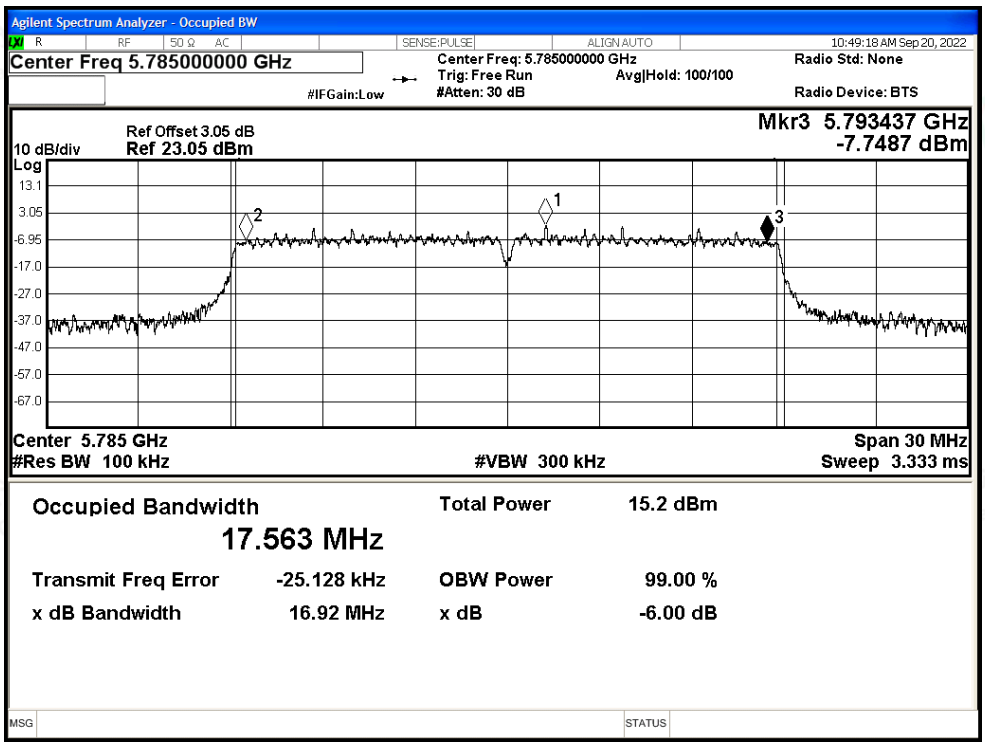

-6dB Bandwidth NVNT ax20 5825MHz Ant1

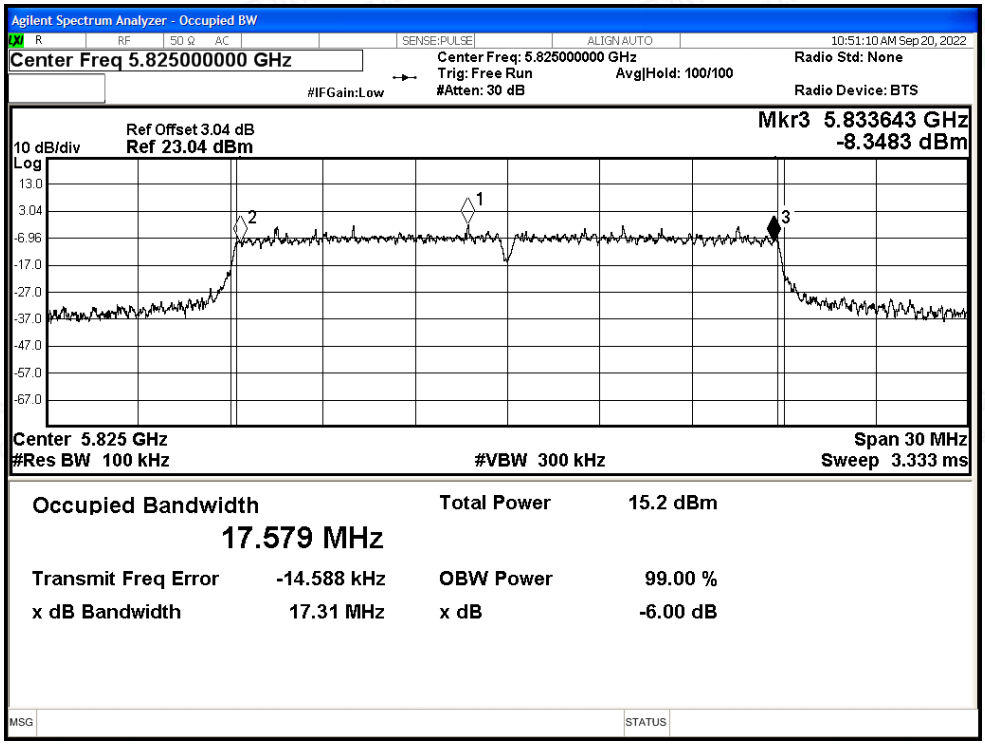

-6dB Bandwidth NVNT ax40 5755MHz Ant1

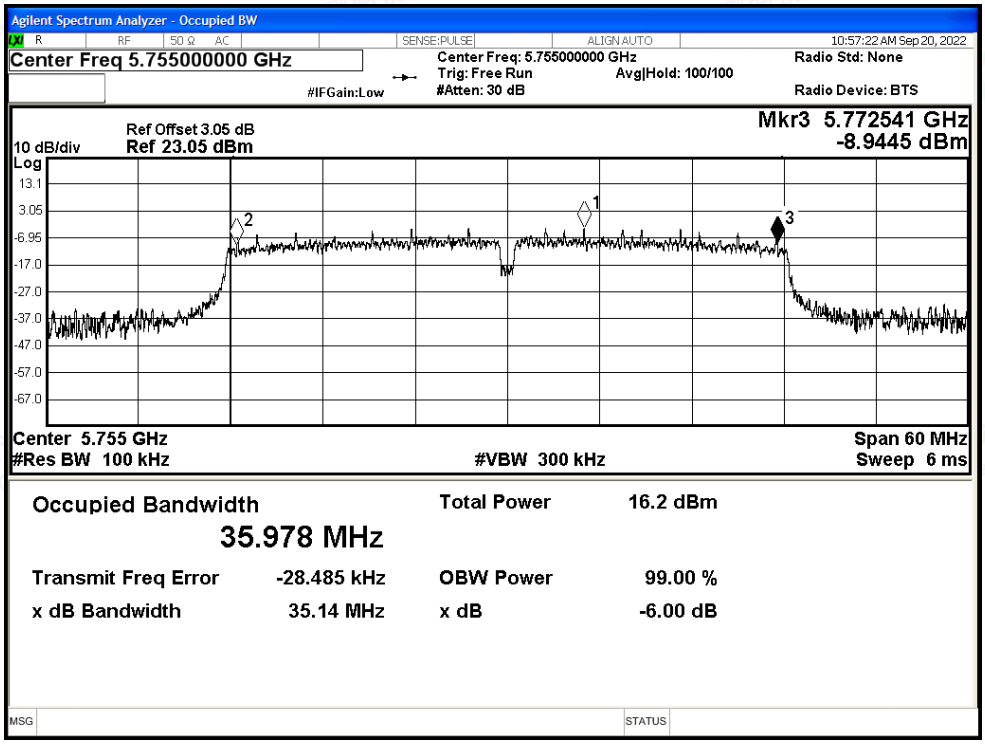

-6dB Bandwidth NVNT ax40 5795MHz Ant1

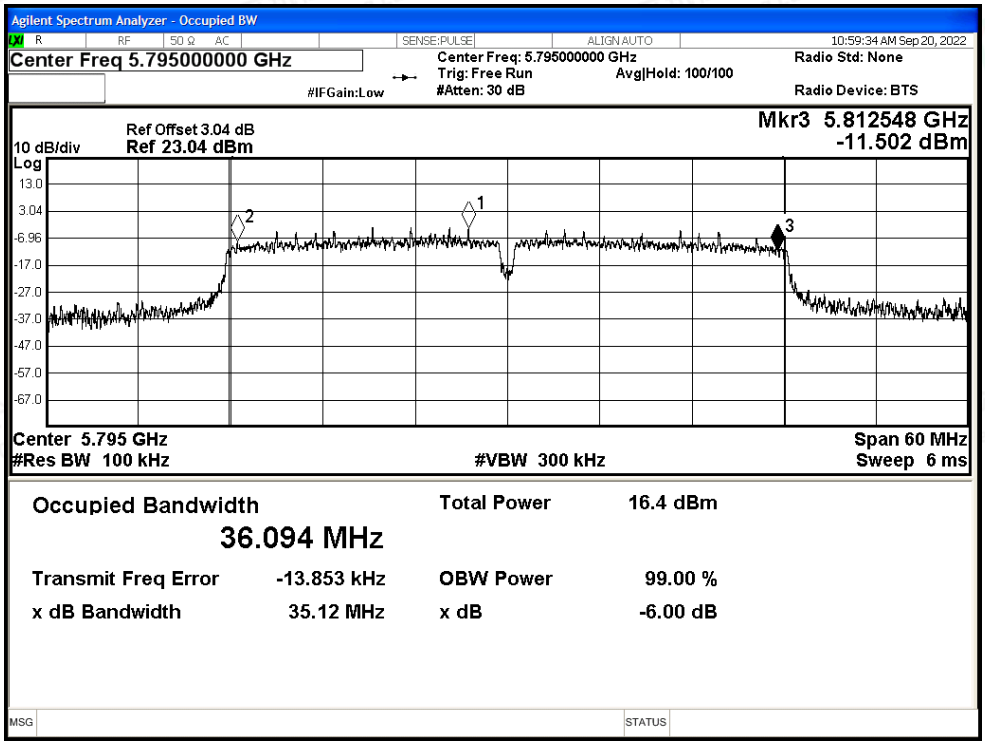

-6dB Bandwidth NVNT ax80 5775MHz Ant1

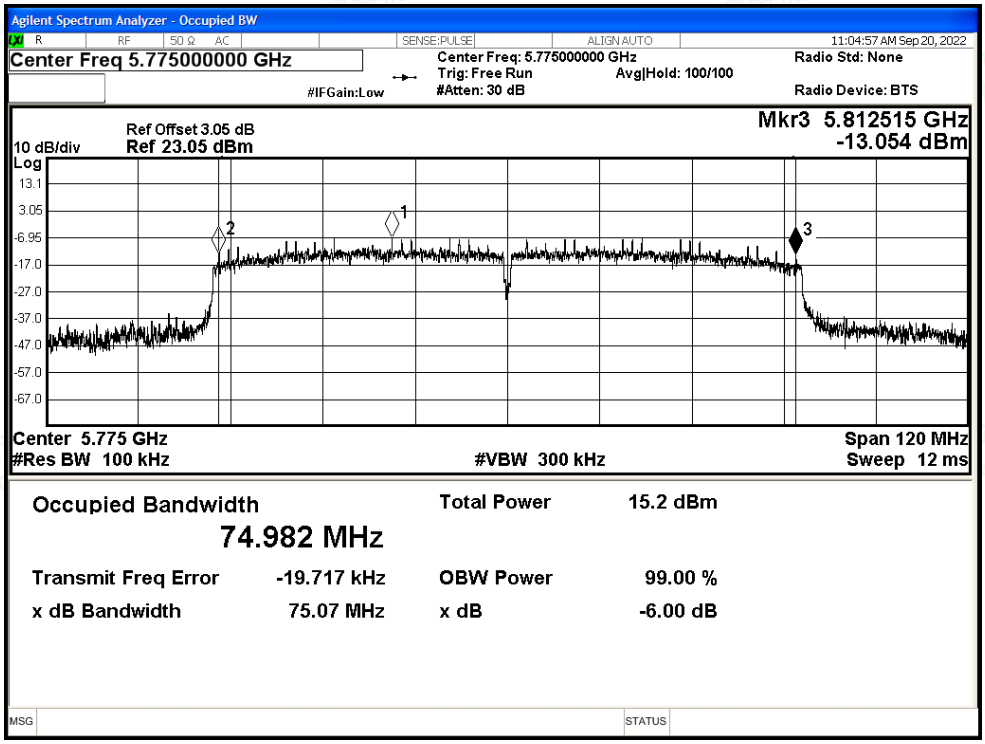

E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant0	7.75	0.14	7.89	30	Pass
NVNT	a	5785	Ant0	7.44	0.14	7.58	30	Pass
NVNT	a	5825	Ant0	6.63	0.13	6.76	30	Pass
NVNT	n20	5745	Ant0	7.62	0.14	7.76	30	Pass
NVNT	n20	5785	Ant0	7.34	0.15	7.49	30	Pass
NVNT	n20	5825	Ant0	6.54	0.14	6.68	30	Pass
NVNT	n40	5755	Ant0	7.18	0.28	7.46	30	Pass
NVNT	n40	5795	Ant0	6.79	0.28	7.07	30	Pass
NVNT	ac20	5745	Ant0	7.55	0.14	7.69	30	Pass
NVNT	ac20	5785	Ant0	7.32	0.14	7.46	30	Pass
NVNT	ac20	5825	Ant0	6.51	0.14	6.65	30	Pass
NVNT	ac40	5755	Ant0	7.14	0.27	7.41	30	Pass
NVNT	ac40	5795	Ant0	6.81	0.27	7.08	30	Pass
NVNT	ac80	5775	Ant0	6.8	0.53	7.33	30	Pass
NVNT	ax20	5745	Ant0	8.64	0.14	8.78	30	Pass
NVNT	ax20	5785	Ant0	7.69	0.14	7.83	30	Pass
NVNT	ax20	5825	Ant0	7.96	0.14	8.1	30	Pass
NVNT	ax40	5755	Ant0	6.84	0.28	7.12	30	Pass
NVNT	ax40	5795	Ant0	9.1	0.28	9.38	30	Pass
NVNT	ax80	5775	Ant0	9.43	0.54	9.97	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	10.17	0.14	10.31	30	Pass
NVNT	a	5785	Ant1	9.16	0.13	9.29	30	Pass
NVNT	a	5825	Ant1	9.69	0.13	9.82	30	Pass
NVNT	n20	5745	Ant1	10.11	0.15	10.26	30	Pass
NVNT	n20	5785	Ant1	9.09	0.15	9.24	30	Pass
NVNT	n20	5825	Ant1	9.62	0.15	9.77	30	Pass
NVNT	n40	5755	Ant1	9.46	0.28	9.74	30	Pass
NVNT	n40	5795	Ant1	8.73	0.28	9.01	30	Pass
NVNT	ac20	5745	Ant1	10.12	0.14	10.26	30	Pass
NVNT	ac20	5785	Ant1	9.10	0.15	9.25	30	Pass
NVNT	ac20	5825	Ant1	9.8	0.14	9.94	30	Pass
NVNT	ac40	5755	Ant1	9.48	0.28	9.76	30	Pass
NVNT	ac40	5795	Ant1	8.74	0.28	9.02	30	Pass
NVNT	ac80	5775	Ant1	9.11	0.53	9.64	30	Pass
NVNT	ax20	5745	Ant1	7.92	0.14	8.06	30	Pass
NVNT	ax20	5785	Ant1	9.00	0.14	9.14	30	Pass
NVNT	ax20	5825	Ant1	9.97	0.15	10.12	30	Pass
NVNT	ax40	5755	Ant1	9.54	0.28	9.82	30	Pass
NVNT	ax40	5795	Ant1	7.29	0.28	7.57	30	Pass
NVNT	ax80	5775	Ant1	9.07	0.55	9.62	30	Pass

MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+Ant1		
NVNT	n20	5745	7.76	10.26	12.20	30	Pass
NVNT	n20	5785	7.49	9.24	11.46	30	Pass
NVNT	n20	5825	6.68	9.77	11.50	30	Pass
NVNT	n40	5755	7.46	9.74	11.76	30	Pass
NVNT	n40	5795	7.07	9.01	11.16	30	Pass
NVNT	ac20	5745	7.69	10.26	12.17	30	Pass
NVNT	ac20	5785	7.46	9.25	11.46	30	Pass
NVNT	ac20	5825	6.65	9.94	11.61	30	Pass
NVNT	ac40	5755	7.41	9.76	11.75	30	Pass
NVNT	ac40	5795	7.08	9.02	11.17	30	Pass
NVNT	ac80	5775	7.33	9.64	11.65	30	Pass
NVNT	ax20	5745	8.78	8.06	11.45	30	Pass
NVNT	ax20	5785	7.83	9.14	11.54	30	Pass
NVNT	ax20	5825	8.1	10.12	12.24	30	Pass
NVNT	ax40	5755	7.12	9.82	11.69	30	Pass
NVNT	ax40	5795	9.38	7.57	11.58	30	Pass
NVNT	ax80	5775	9.97	9.62	12.81	30	Pass

E.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant0	-7.6	0.14	-7.46	30	Pass
NVNT	a	5785	Ant0	-7.77	0.14	-7.63	30	Pass
NVNT	a	5825	Ant0	-7.82	0.13	-7.69	30	Pass
NVNT	n20	5745	Ant0	-7.13	0.14	-6.99	30	Pass
NVNT	n20	5785	Ant0	-7.27	0.15	-7.12	30	Pass
NVNT	n20	5825	Ant0	-8.7	0.14	-8.56	30	Pass
NVNT	n40	5755	Ant0	-11.37	0.28	-11.09	30	Pass
NVNT	n40	5795	Ant0	-11.89	0.28	-11.61	30	Pass
NVNT	ac20	5745	Ant0	-7.79	0.14	-7.65	30	Pass
NVNT	ac20	5785	Ant0	-7.12	0.14	-6.98	30	Pass
NVNT	ac20	5825	Ant0	-8.71	0.14	-8.57	30	Pass
NVNT	ac40	5755	Ant0	-11.63	0.27	-11.36	30	Pass
NVNT	ac40	5795	Ant0	-12.05	0.27	-11.78	30	Pass
NVNT	ac80	5775	Ant0	-16.34	0.53	-15.81	30	Pass
NVNT	ax20	5745	Ant0	-22.1	0.14	-21.96	30	Pass
NVNT	ax20	5785	Ant0	-25.15	0.14	-25.01	30	Pass
NVNT	ax20	5825	Ant0	-19.85	0.14	-19.71	30	Pass
NVNT	ax40	5755	Ant0	-30.68	0.28	-30.4	30	Pass
NVNT	ax40	5795	Ant0	-34.2	0.28	-33.92	30	Pass
NVNT	ax80	5775	Ant0	-40.69	0.54	-40.15	30	Pass

Test Graphs

PSD NVNT a 5745MHz Ant0

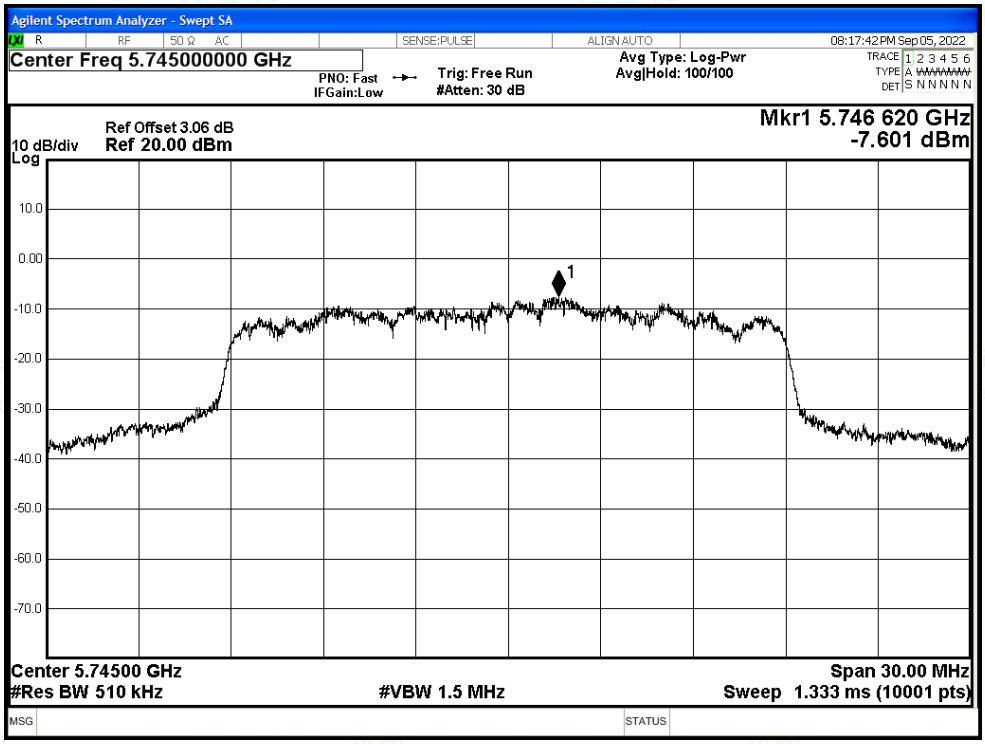

PSD NVNT a 5785MHz Ant0

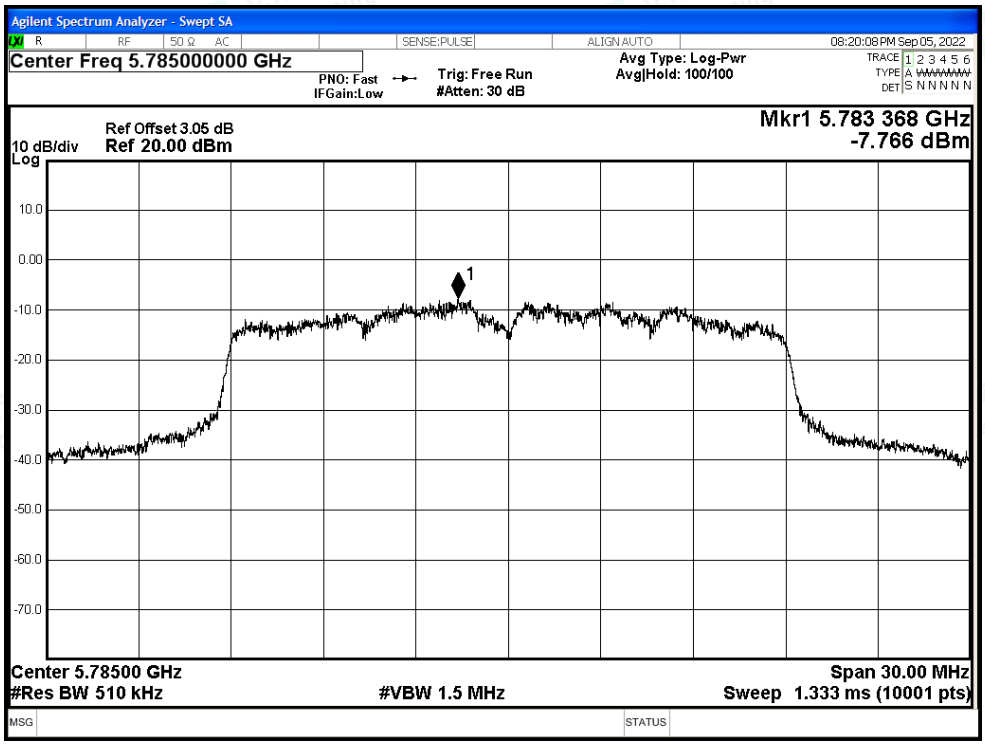

PSD NVNT a 5825MHz Ant0

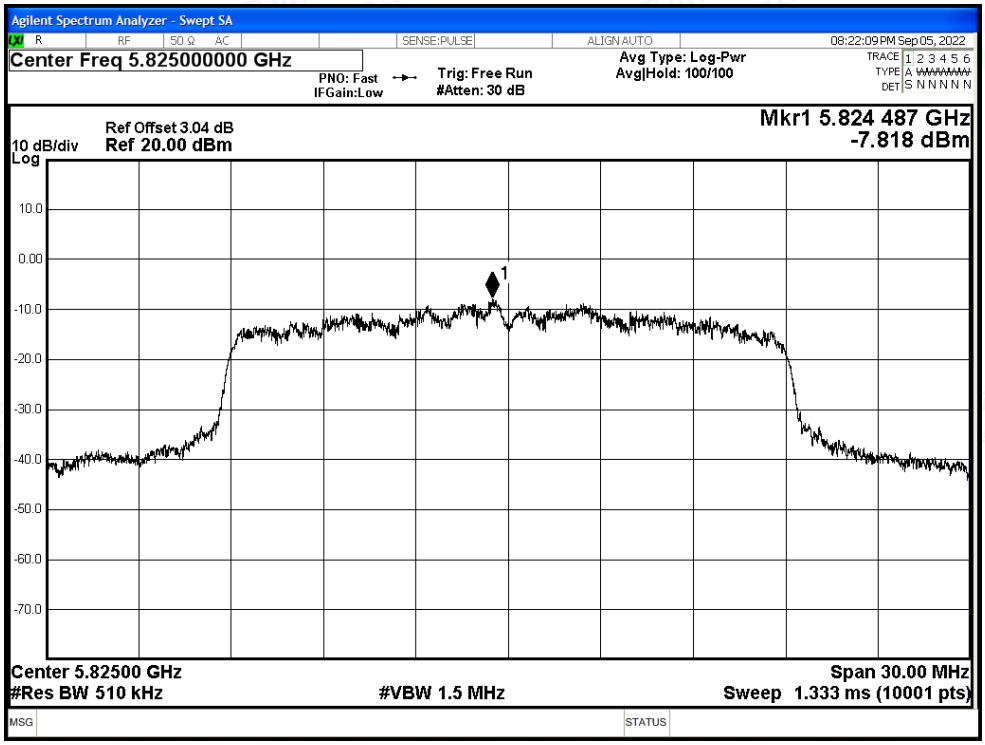

PSD NVNT n20 5745MHz Ant0

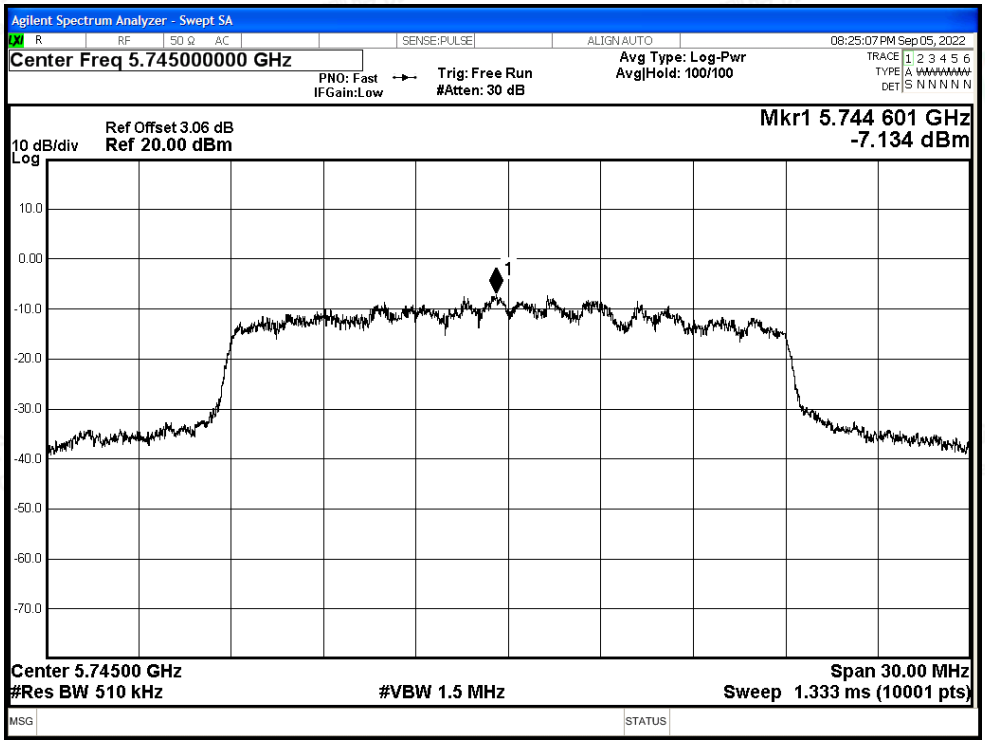

P7SD NVNT n20 5785MHz Ant0

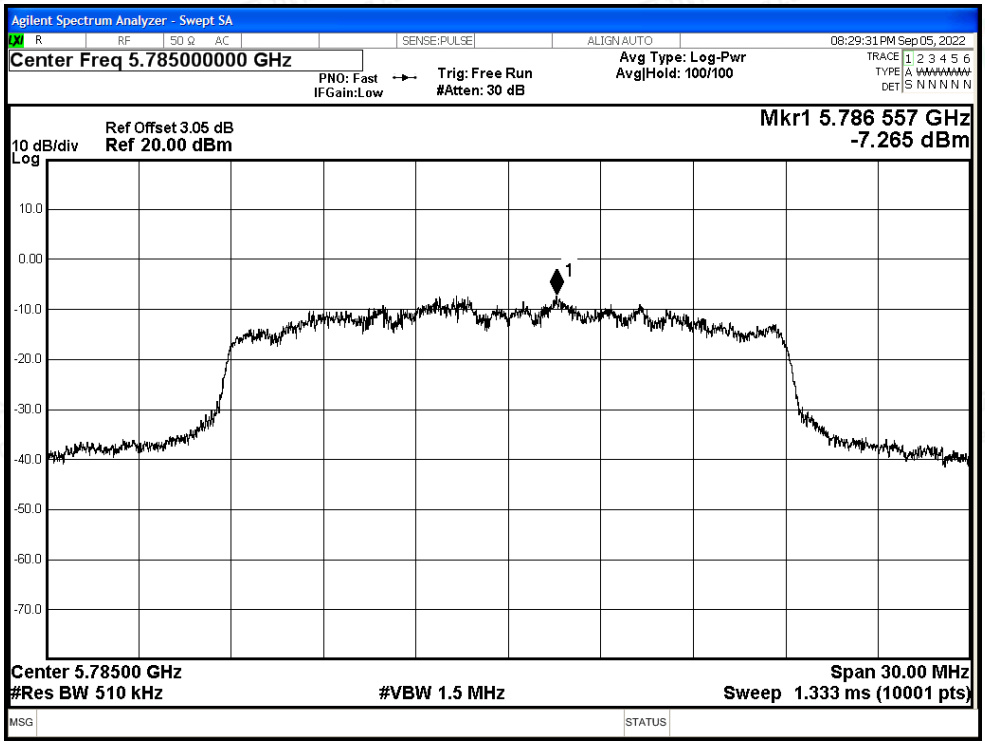

PSD NVNT n20 5825MHz Ant0

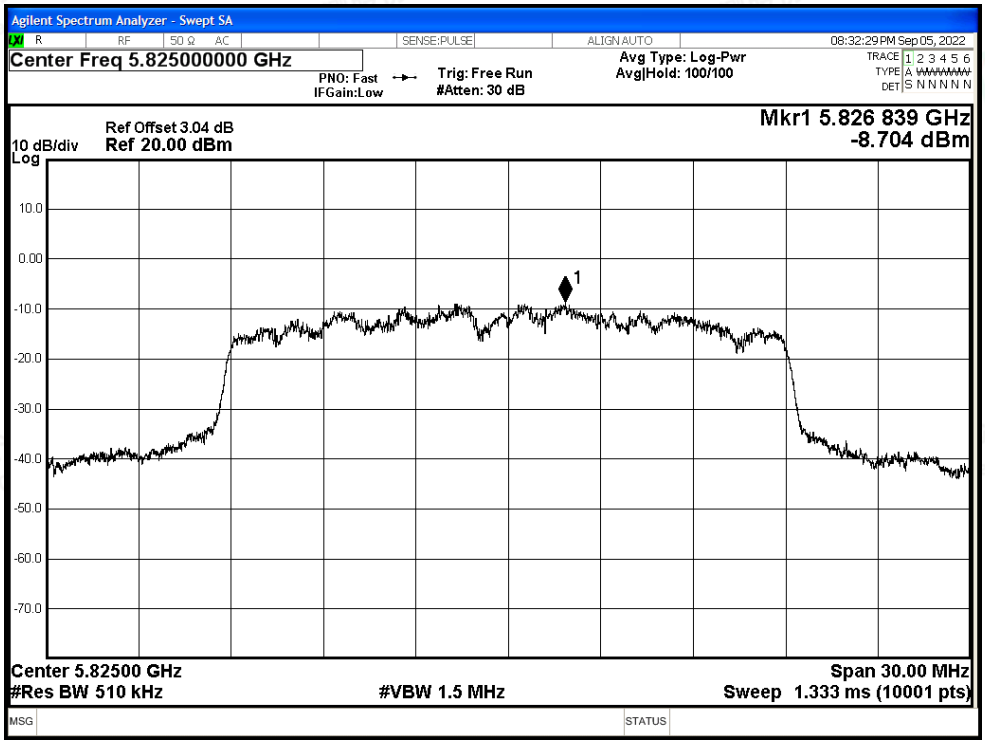

PSD NVNT n40 5755MHz Ant0

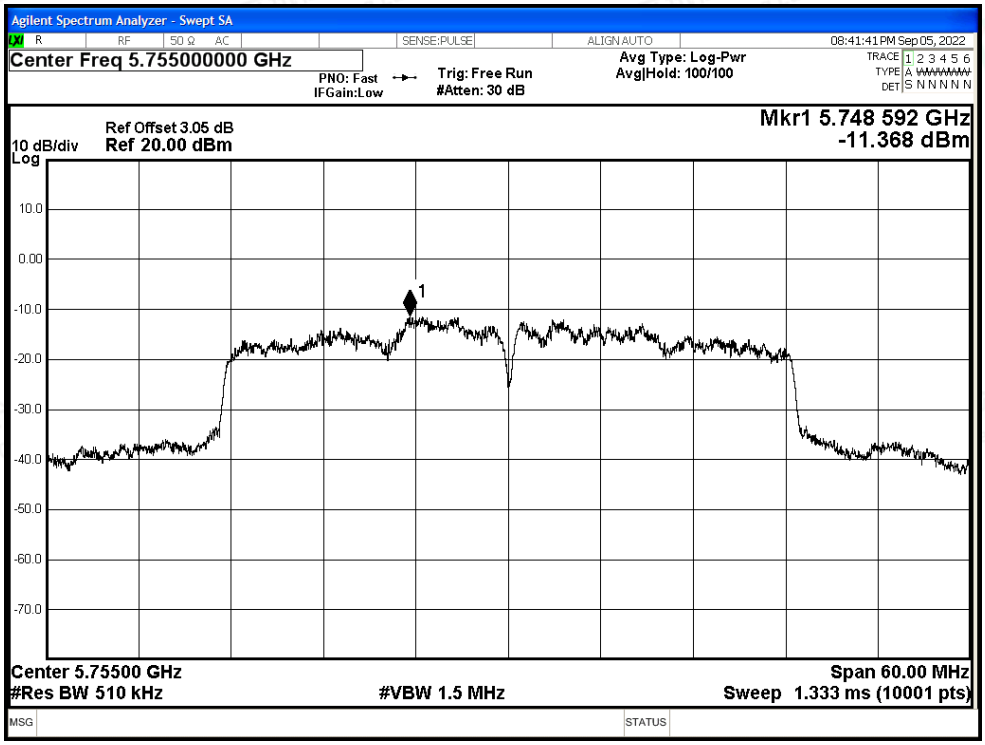

PSD NVNT n40 5795MHz Ant0

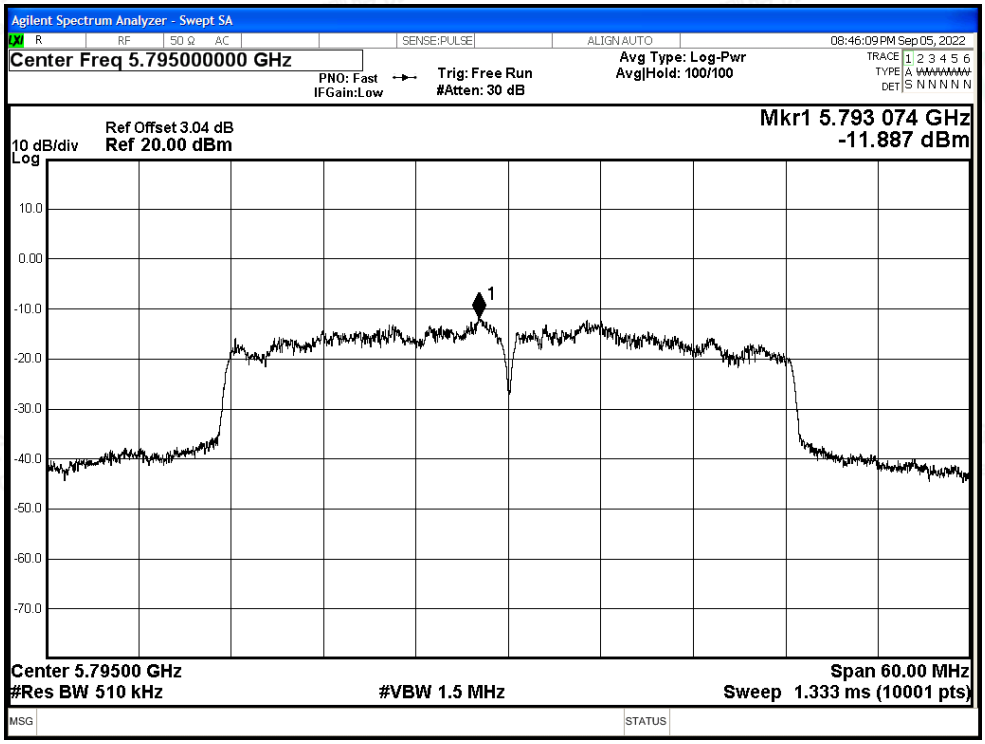

PSD NVNT ac20 5745MHz Ant0

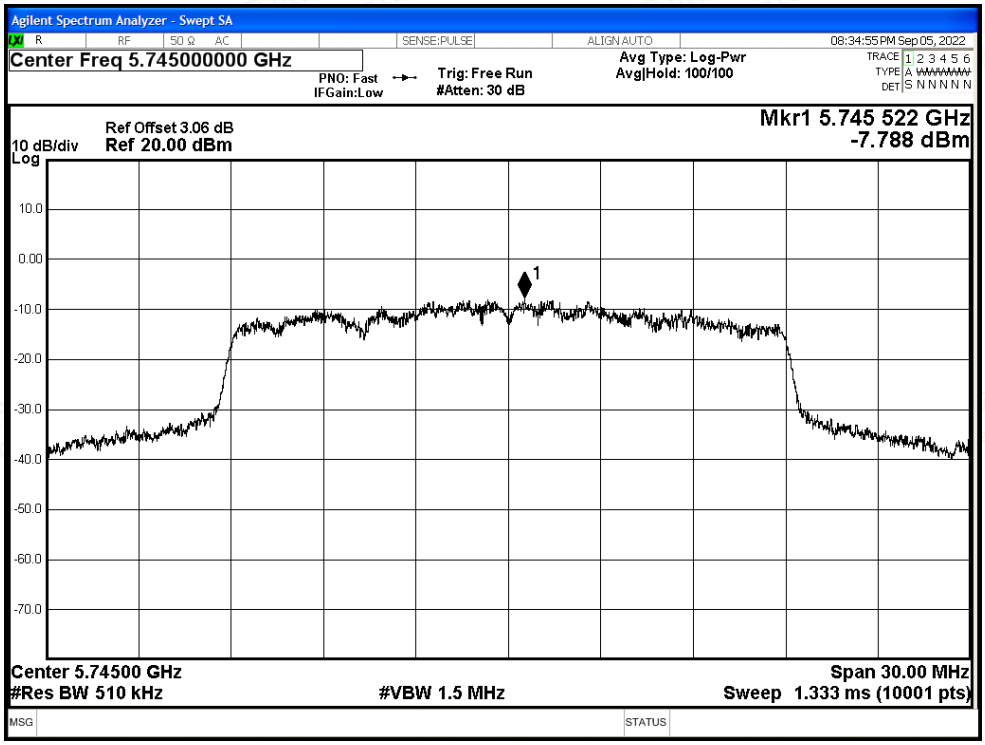

PSD NVNT ac20 5785MHz Ant0

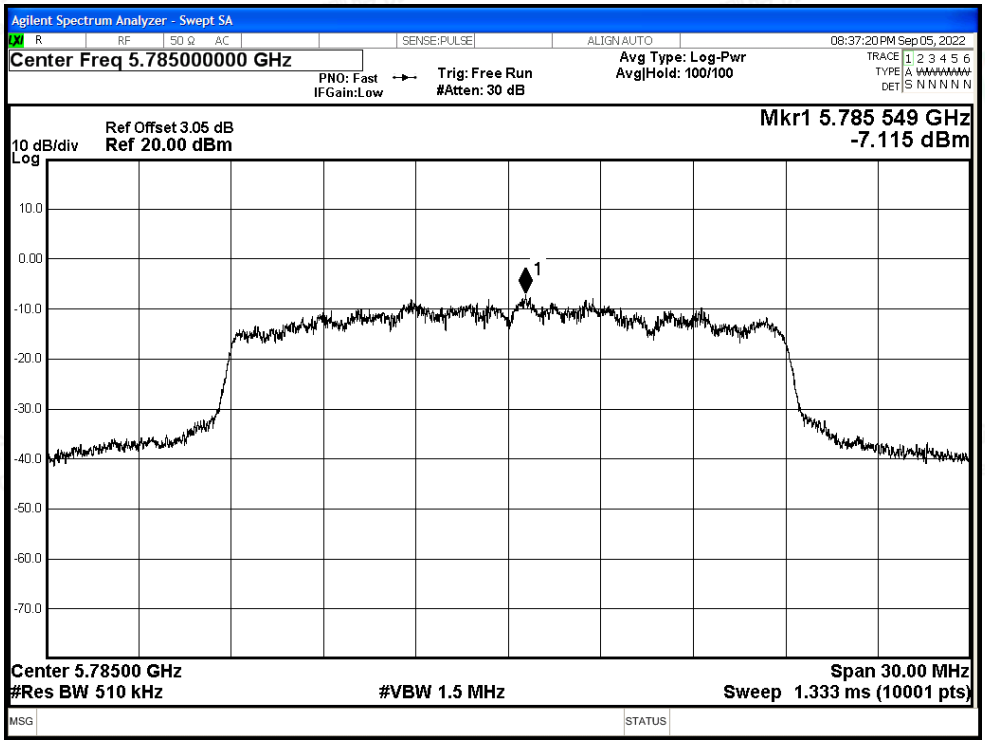

PSD NVNT ac20 5825MHz Ant0

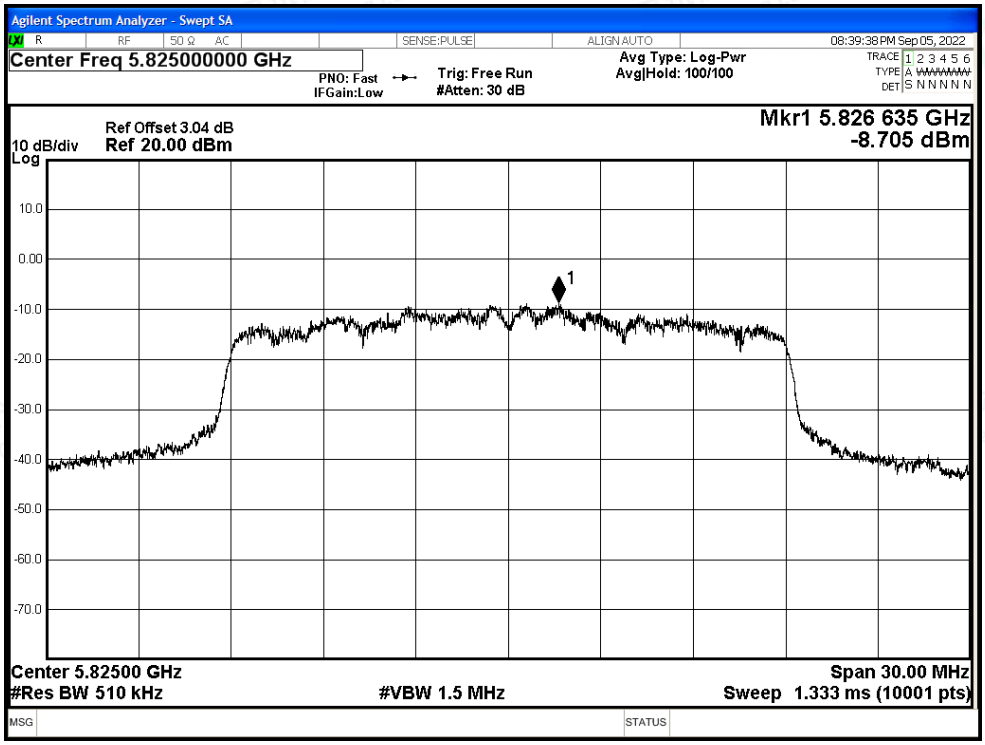

PSD NVNT ac40 5755MHz Ant0

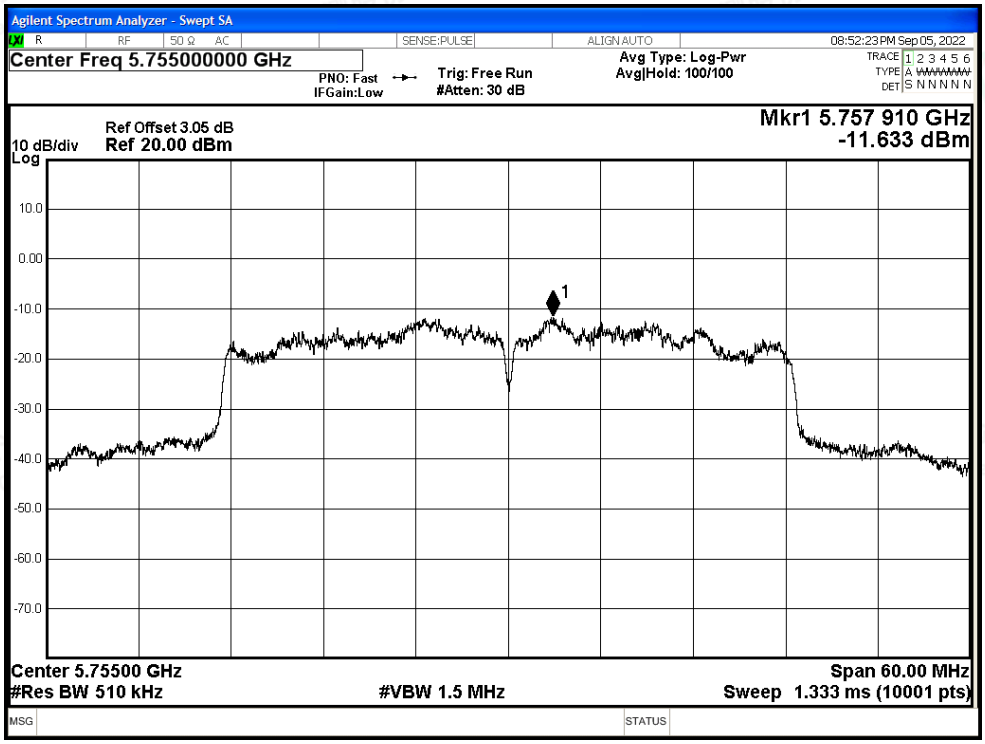

PSD NVNT ac40 5795MHz Ant0

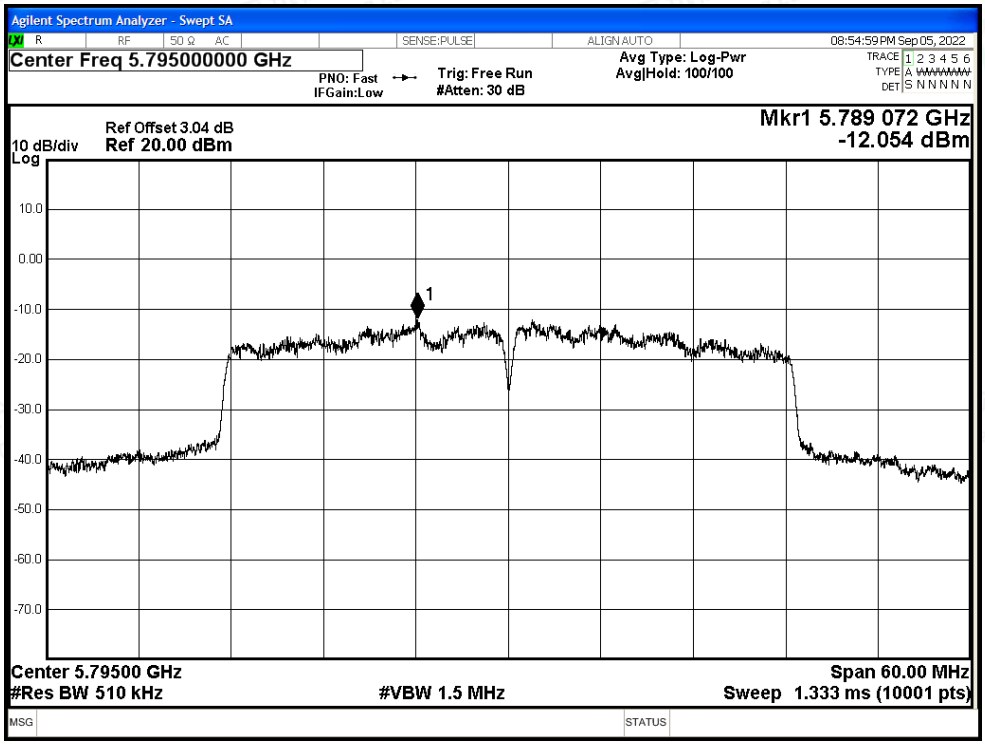

PSD NVNT ac80 5775MHz Ant0

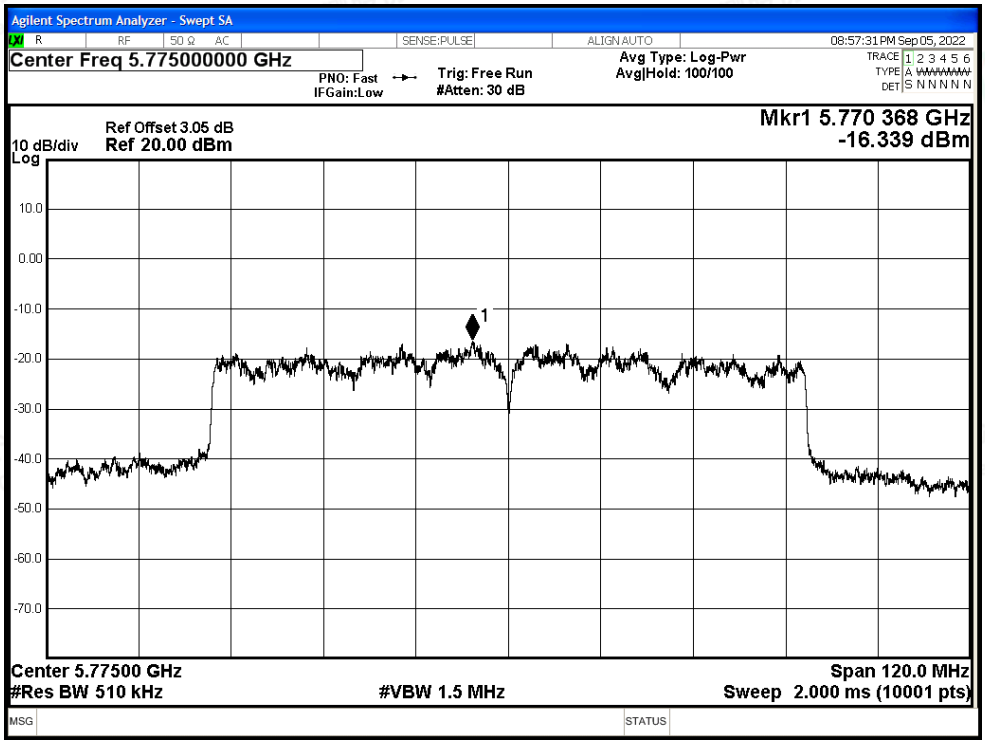

PSD NVNT ax20 5745MHz Ant0

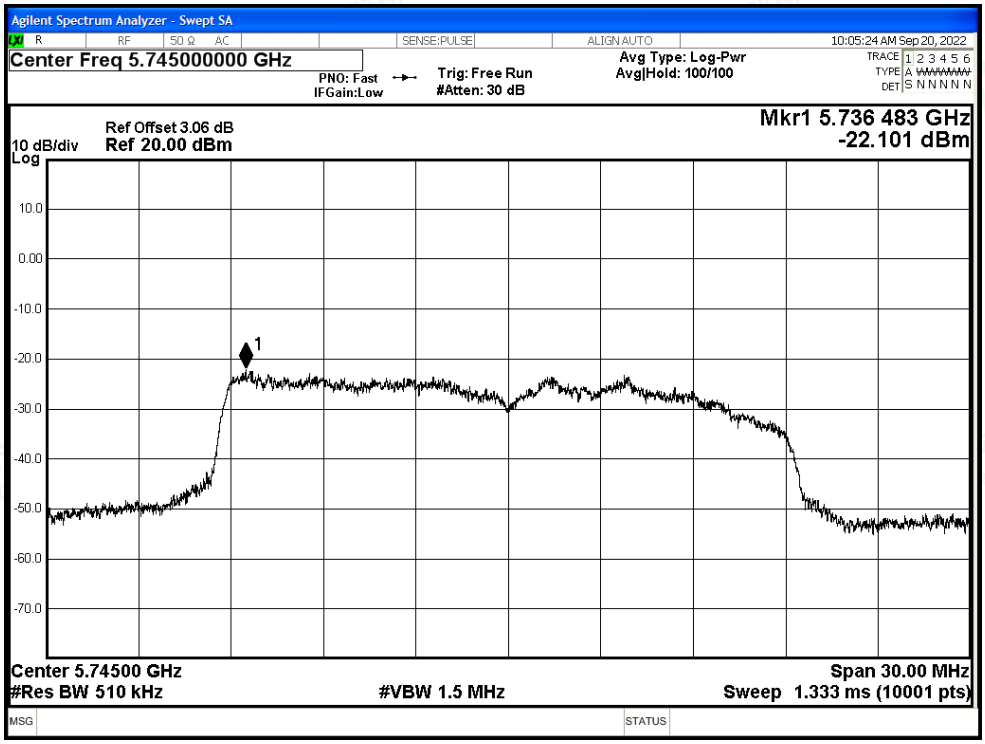

PSD NVNT ax20 5785MHz Ant0

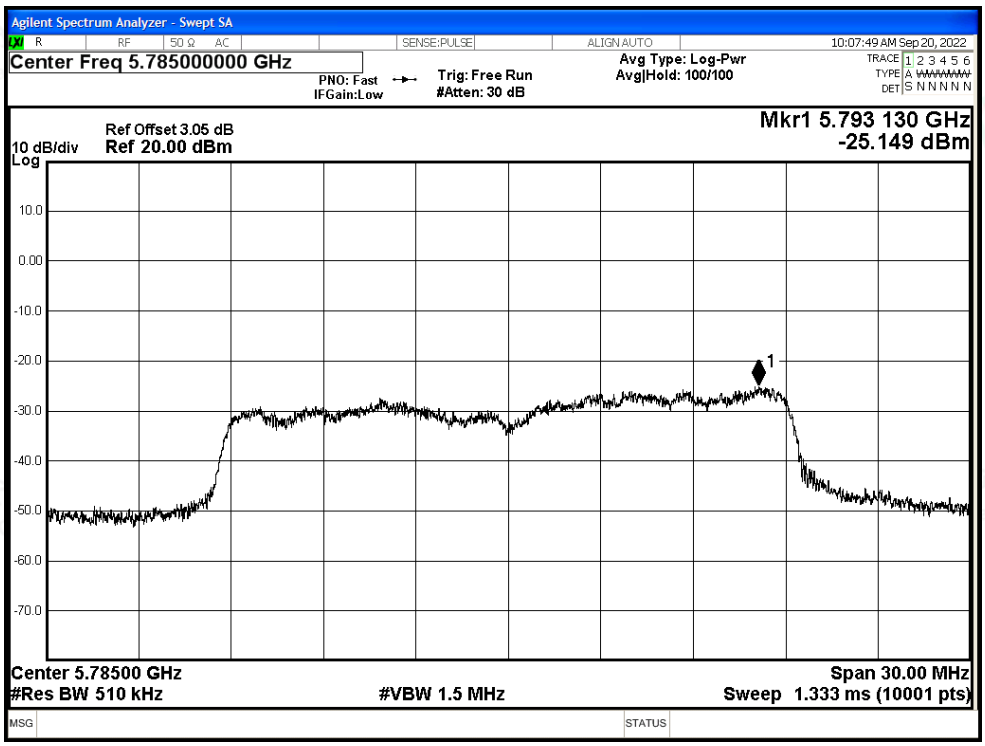

PSD NVNT ax20 5825MHz Ant0

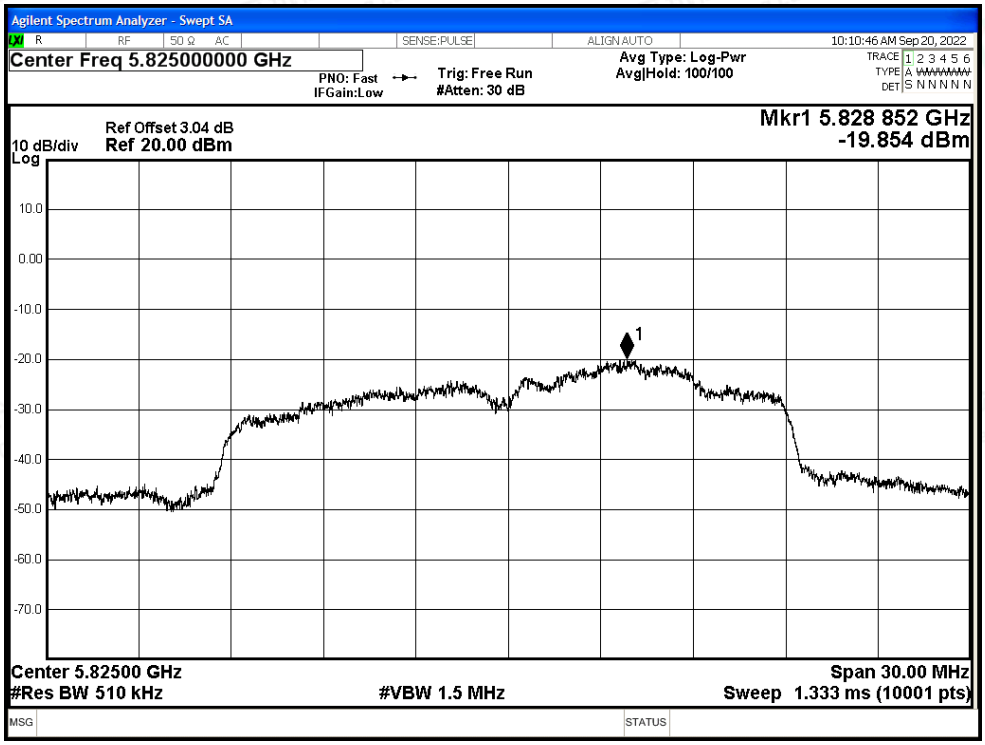

PSD NVNT ax40 5755MHz Ant0

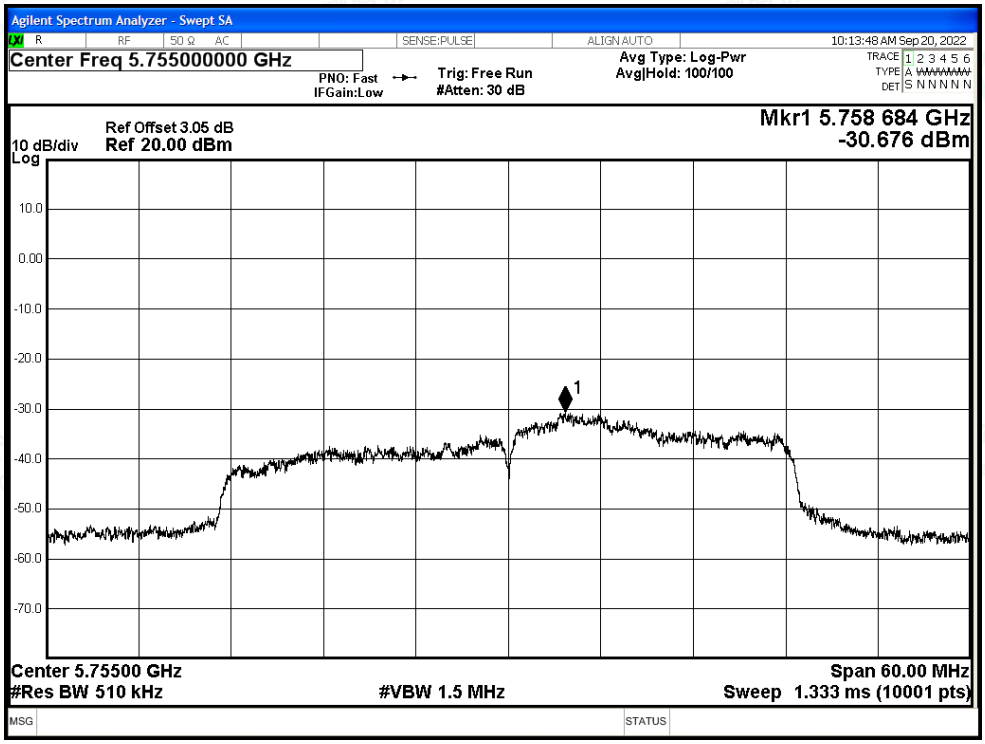

PSD NVNT ax40 5795MHz Ant0

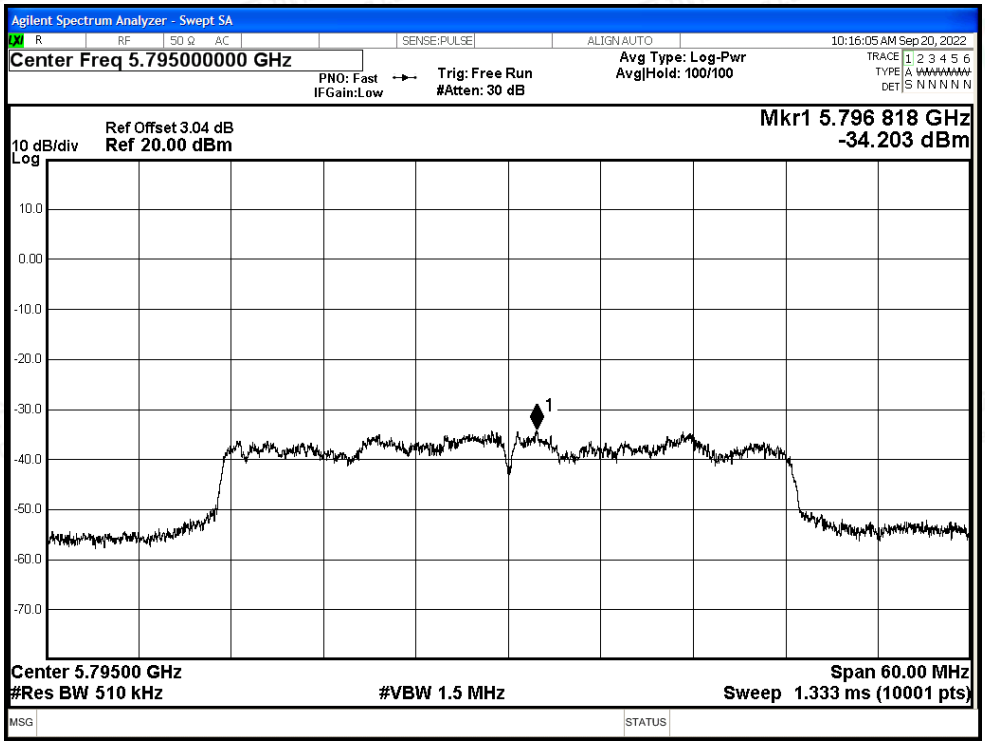

PSD NVNT ax80 5775MHz Ant0

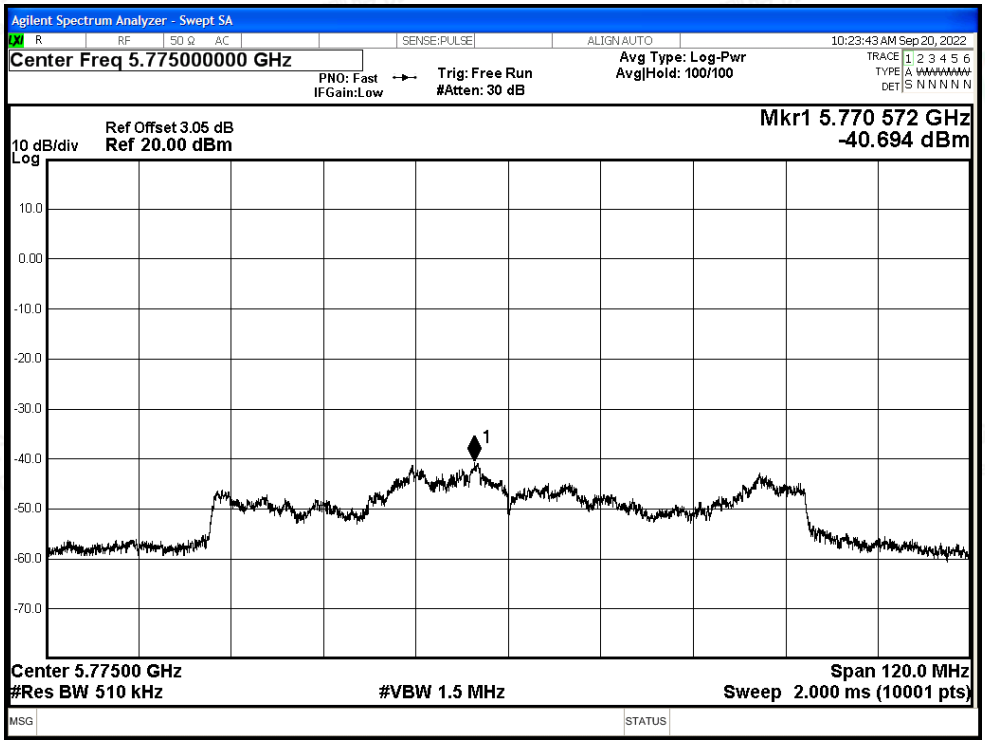

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-4.54	0.14	-4.40	30	Pass
NVNT	a	5785	Ant1	-5.83	0.13	-5.70	30	Pass
NVNT	a	5825	Ant1	-4.68	0.13	-4.55	30	Pass
NVNT	n20	5745	Ant1	-4.52	0.15	-4.37	30	Pass
NVNT	n20	5785	Ant1	-6.02	0.15	-5.87	30	Pass
NVNT	n20	5825	Ant1	-4.45	0.15	-4.3	30	Pass
NVNT	n40	5755	Ant1	-9.43	0.28	-9.15	30	Pass
NVNT	n40	5795	Ant1	-9.91	0.28	-9.63	30	Pass
NVNT	ac20	5745	Ant1	-4.98	0.14	-4.84	30	Pass
NVNT	ac20	5785	Ant1	-6.04	0.15	-5.89	30	Pass
NVNT	ac20	5825	Ant1	-5.07	0.14	-4.93	30	Pass
NVNT	ac40	5755	Ant1	-9.52	0.28	-9.24	30	Pass
NVNT	ac40	5795	Ant1	-8.87	0.28	-8.59	30	Pass
NVNT	ac80	5775	Ant1	-13.76	0.53	-13.23	30	Pass
NVNT	ax20	5745	Ant1	-20.81	0.14	-20.67	30	Pass
NVNT	ax20	5785	Ant1	-23.92	0.14	-23.78	30	Pass
NVNT	ax20	5825	Ant1	-23.21	0.15	-23.06	30	Pass
NVNT	ax40	5755	Ant1	-31.37	0.28	-31.09	30	Pass
NVNT	ax40	5795	Ant1	-31.46	0.28	-31.18	30	Pass
NVNT	ax80	5775	Ant1	-39.37	0.55	-38.82	30	Pass

MIMO

Test Mode	Channel	Frequency (MHz)	Ant 0 Power Density (dBm/500KHz)	Ant 1 Power Density (dBm/500KHz)	MIMO Power Density (dBm/500KHz)	Report Power Density (dBm/500KHz)	Verdict
n20	149	5745	-6.99	-4.37	-2.48	≤30	Pass
	157	5785	-7.12	-5.87	-3.44		Pass
	165	5825	-8.56	-4.3	-2.92		Pass
n40	151	5755	-11.09	-9.15	-7.00	≤30	Pass
	159	5795	-11.61	-9.63	-7.50		Pass
ac20	149	5745	-7.65	-4.84	-3.01	≤30	Pass
	157	5785	-6.98	-5.89	-3.39		Pass
	165	5825	-8.57	-4.93	-3.37		Pass
ac40	151	5755	-11.36	-9.24	-7.16	≤30	Pass
	159	5795	-11.78	-8.59	-6.89		Pass
ac80	155	5775	-15.81	-13.23	-11.32	≤30	Pass
ax20	149	5745	-21.96	-20.67	-18.26	≤30	Pass
	157	5785	-25.01	-23.78	-21.34		Pass
	165	5825	-19.71	-23.06	-18.06		Pass
ax40	151	5755	-30.4	-31.09	-27.72	≤30	Pass
	159	5795	-33.92	-31.18	-29.33		Pass
ax80	155	5775	-40.15	-38.82	-36.42	≤30	Pass

Note：1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

Test Graphs

PSD NVNT a 5745MHz Ant1

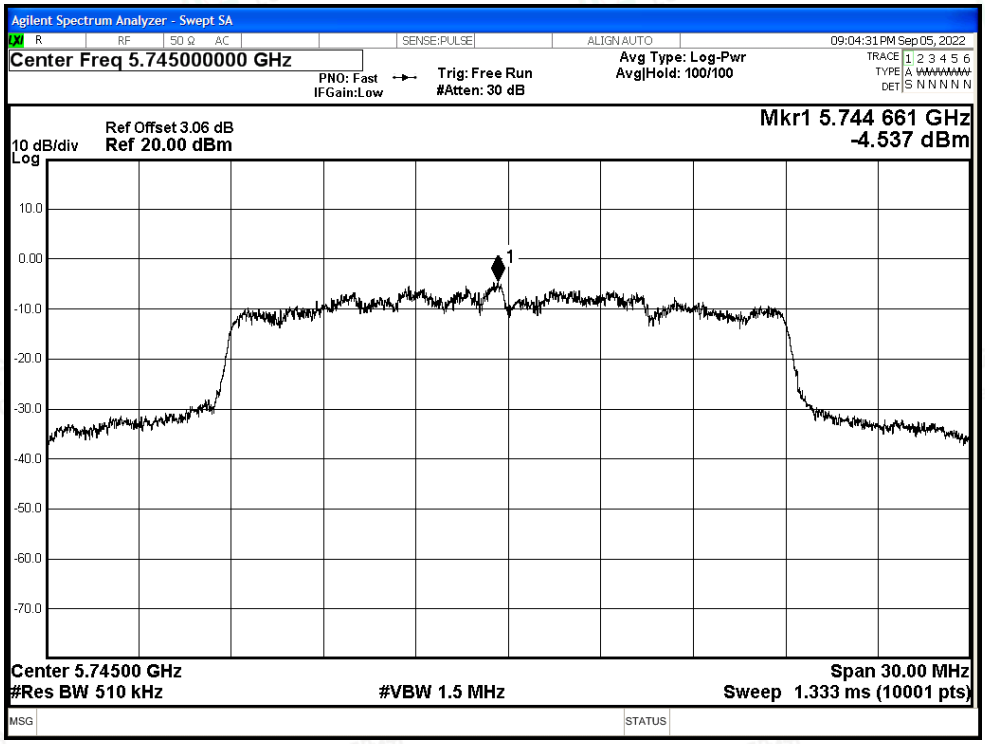

PSD NVNT a 5785MHz Ant1

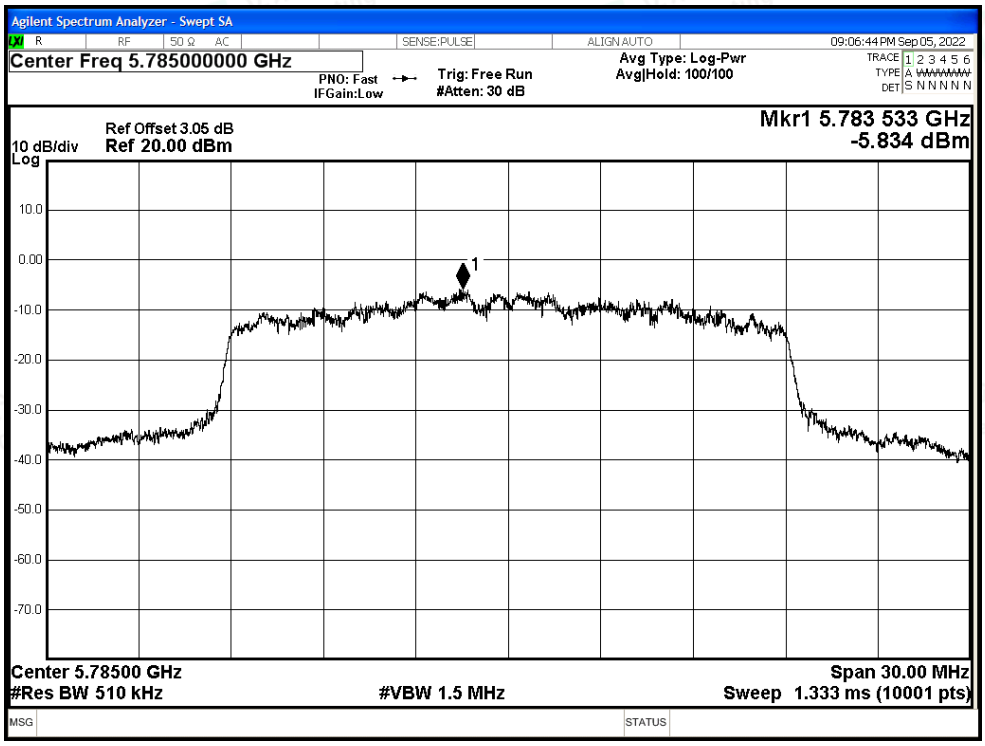

PSD NVNT a 5825MHz Ant1

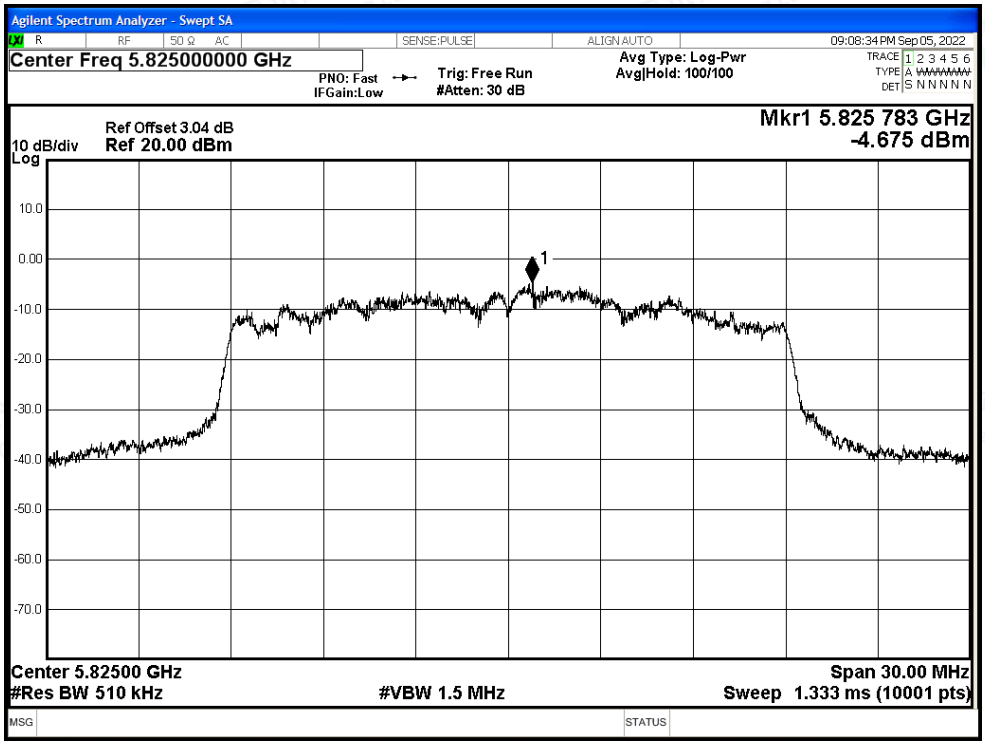

PSD NVNT n20 5745MHz Ant1

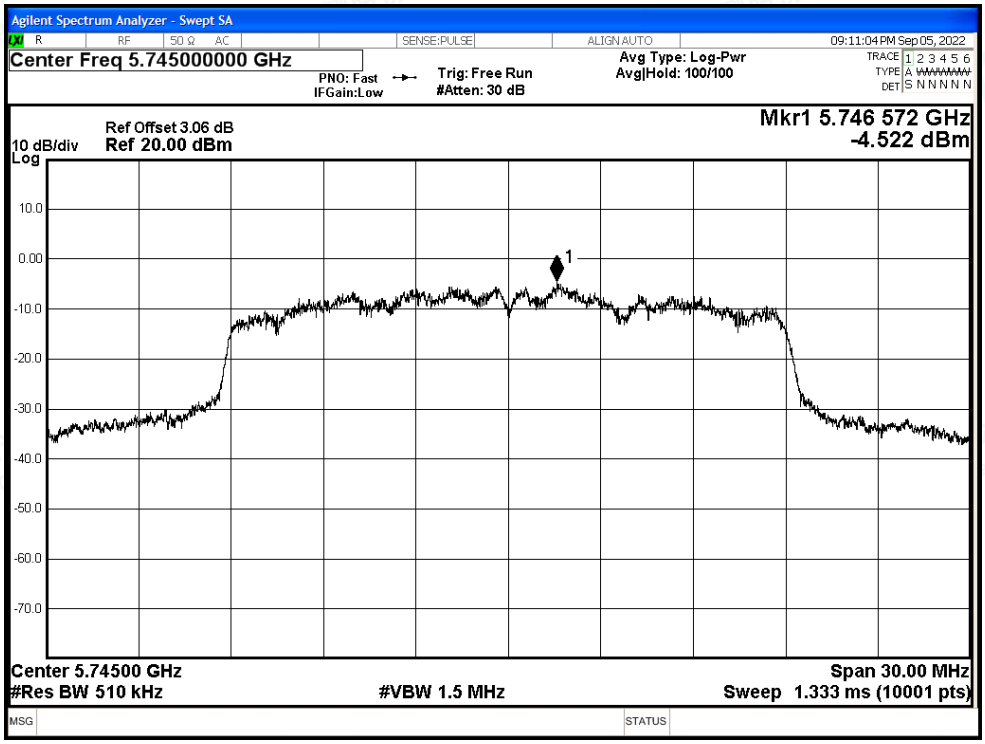

PSD NVNT n20 5785MHz Ant1

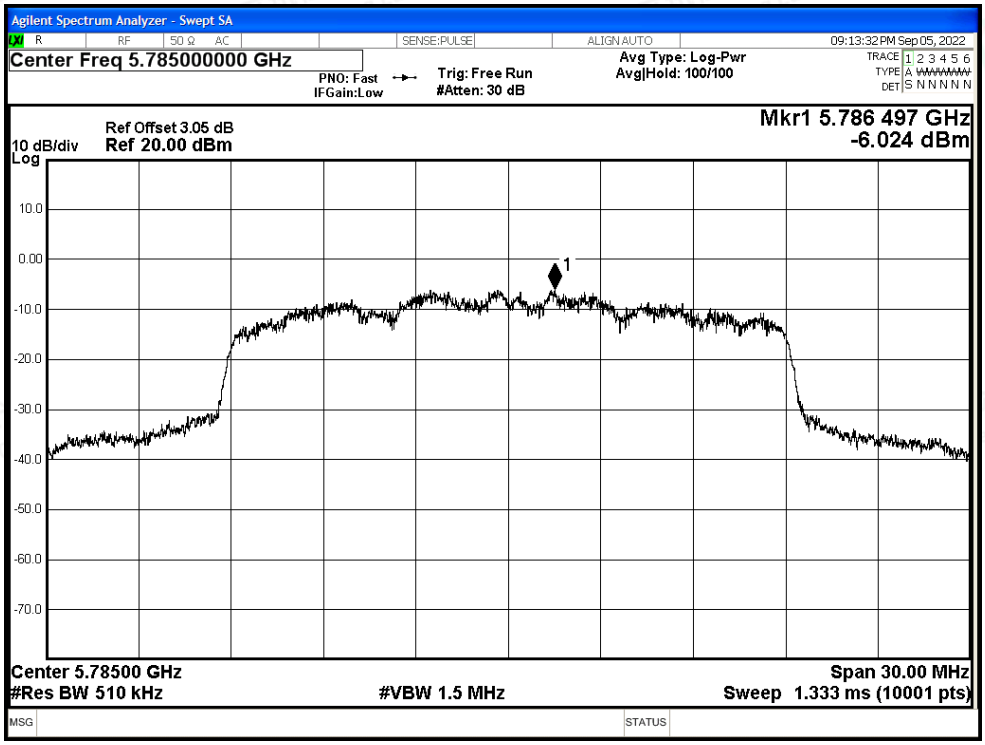

PSD NVNT n20 5825MHz Ant1

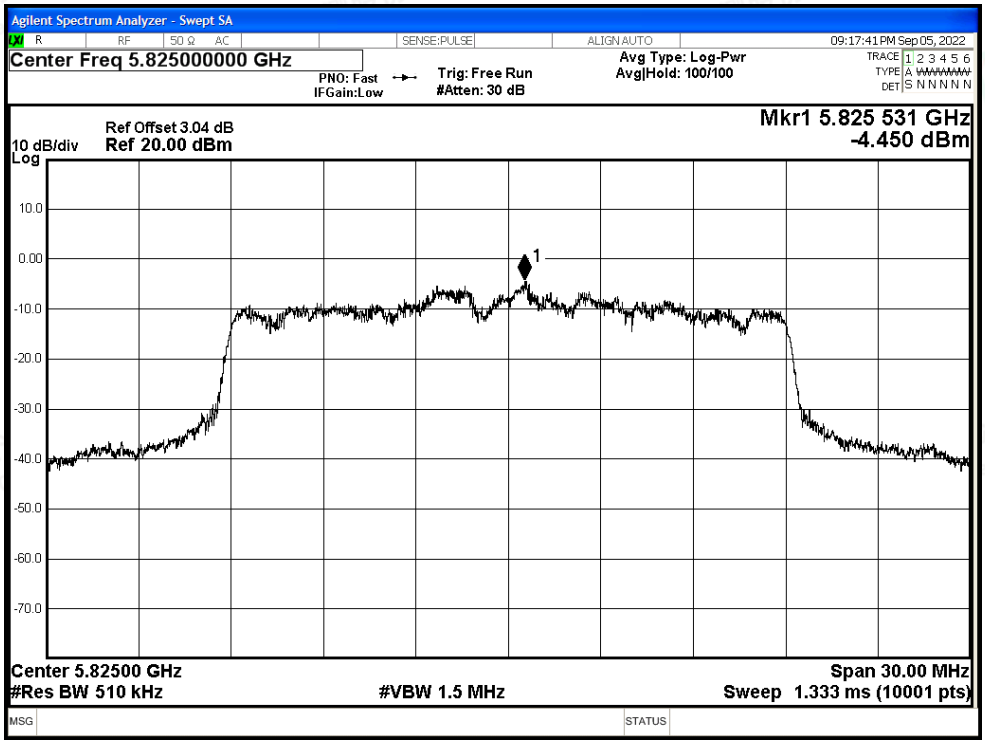

PSD NVNT n40 5755MHz Ant1

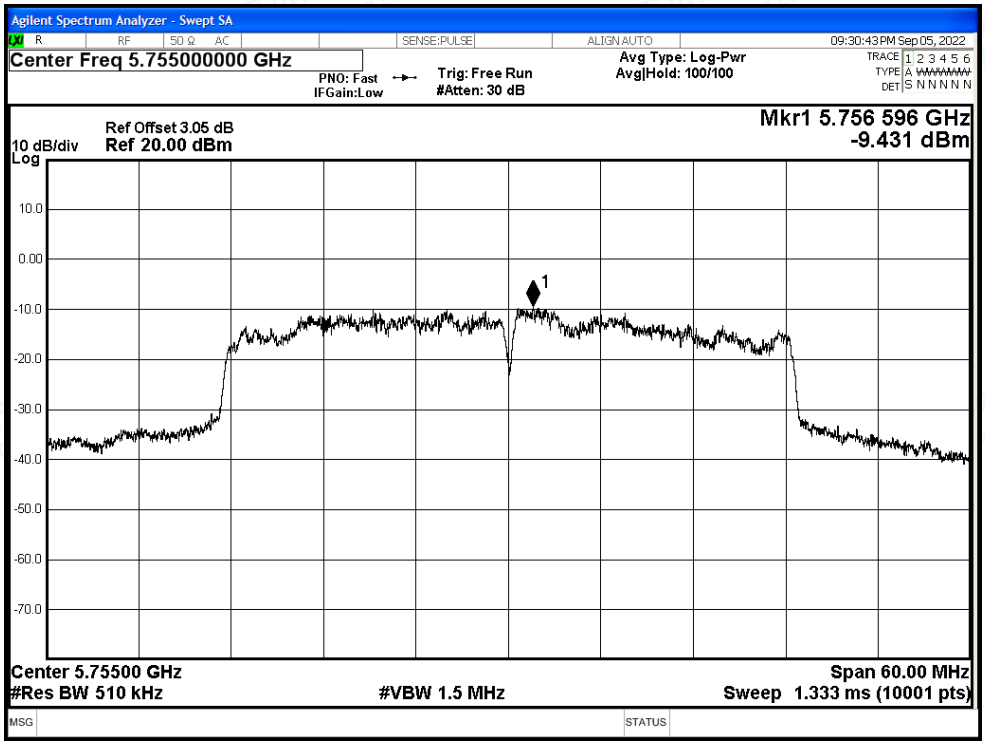

PSD NVNT n40 5795MHz Ant1

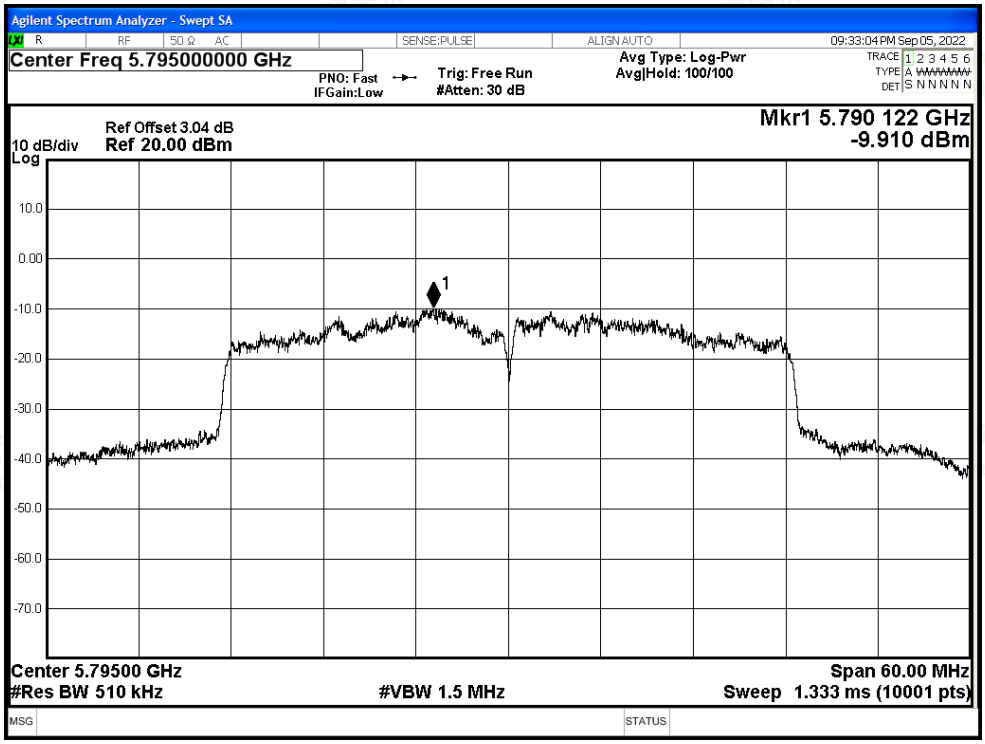

PSD NVNT ac20 5745MHz Ant1

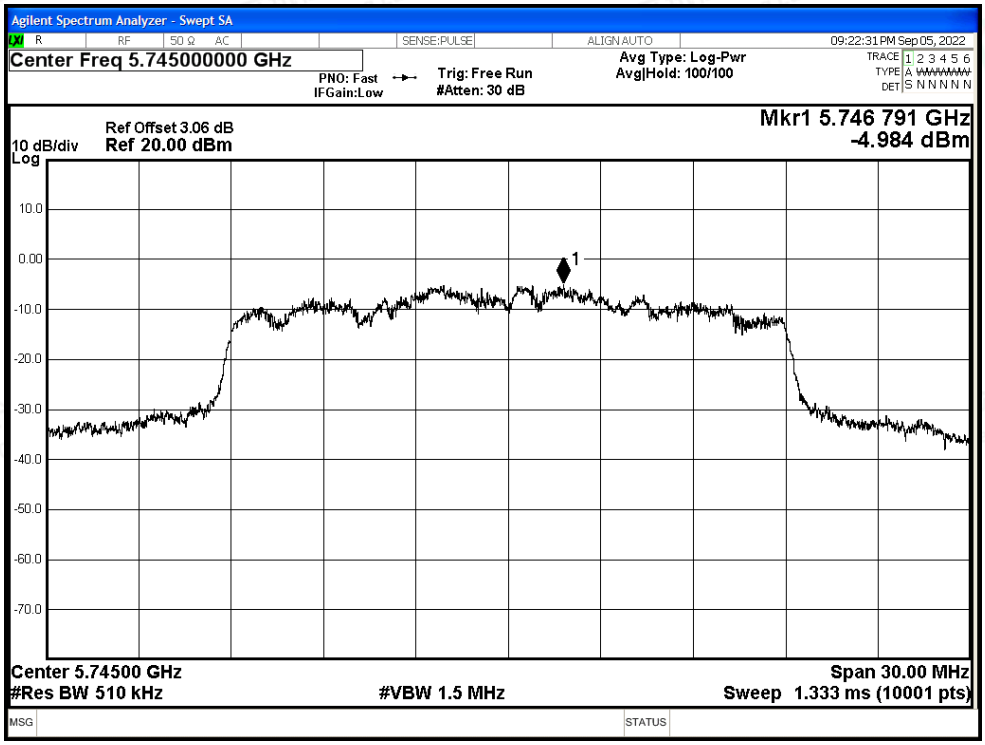

PSD NVNT ac20 5785MHz Ant1

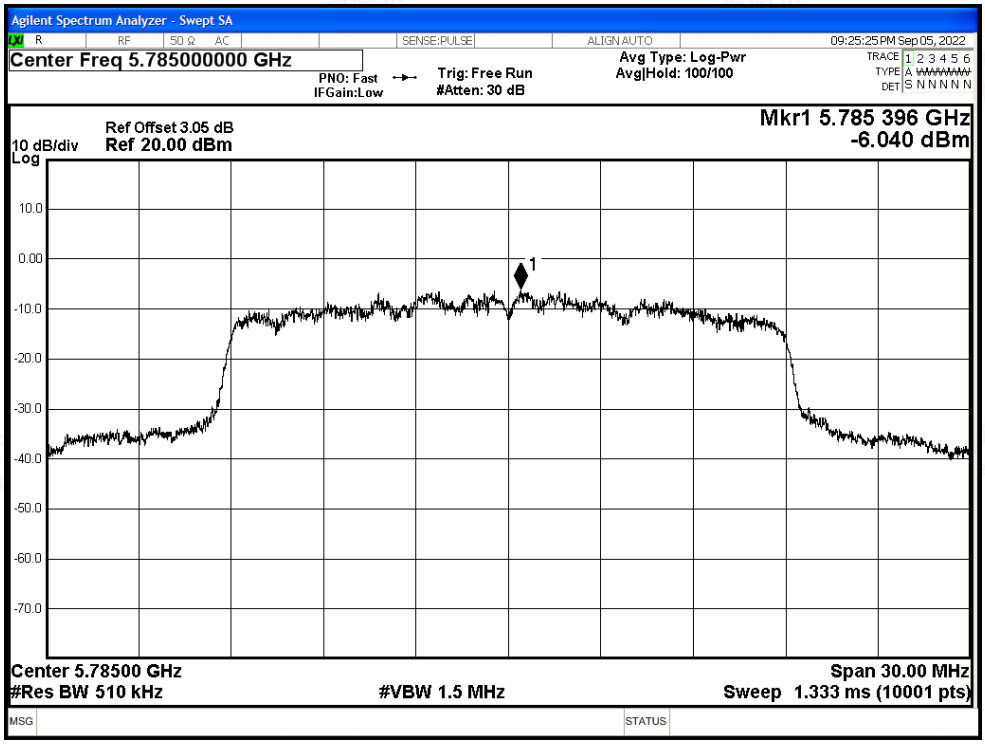

PSD NVNT ac20 5825MHz Ant1

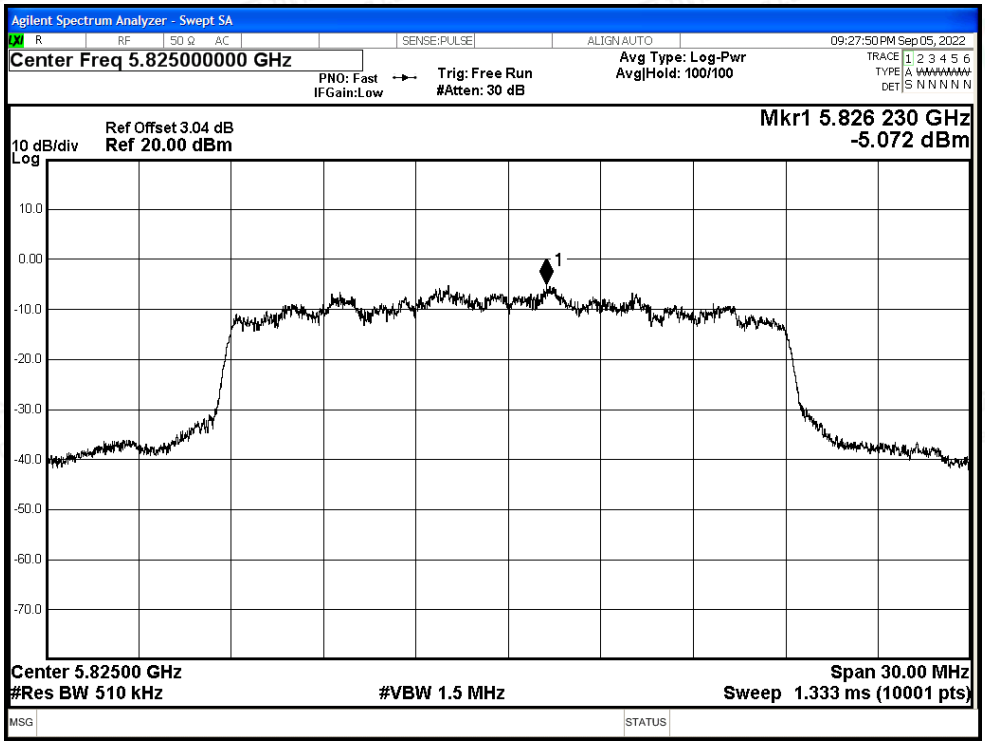

PSD NVNT ac40 5755MHz Ant1

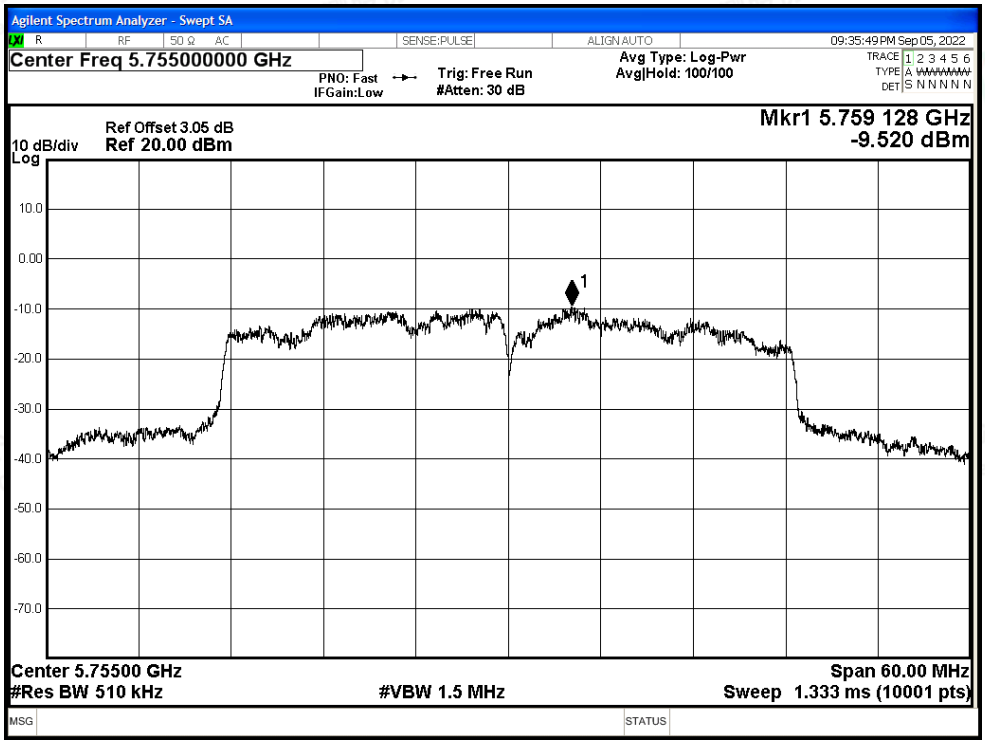

PSD NVNT ac40 5795MHz Ant1

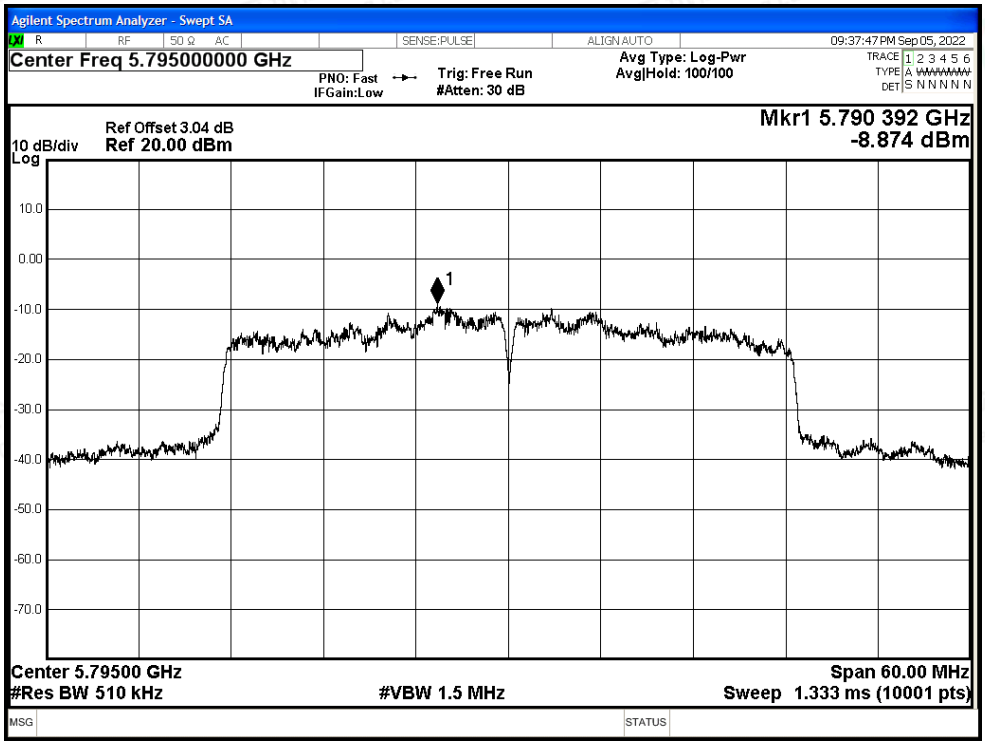

PSD NVNT ac80 5775MHz Ant1

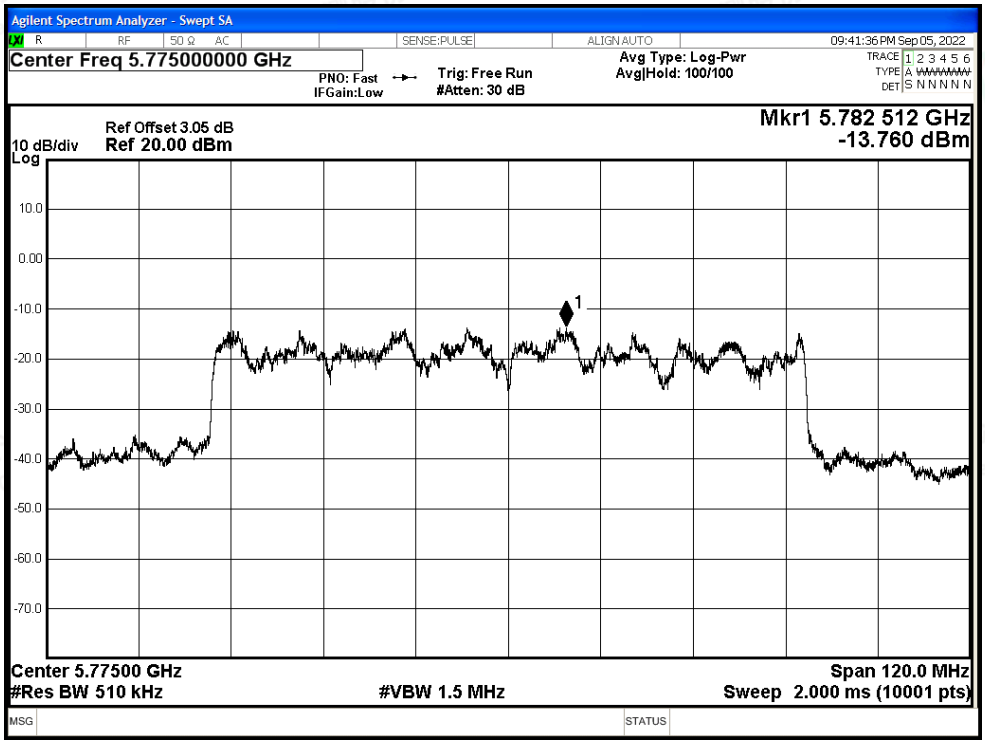

PSD NVNT ax20 5745MHz Ant1

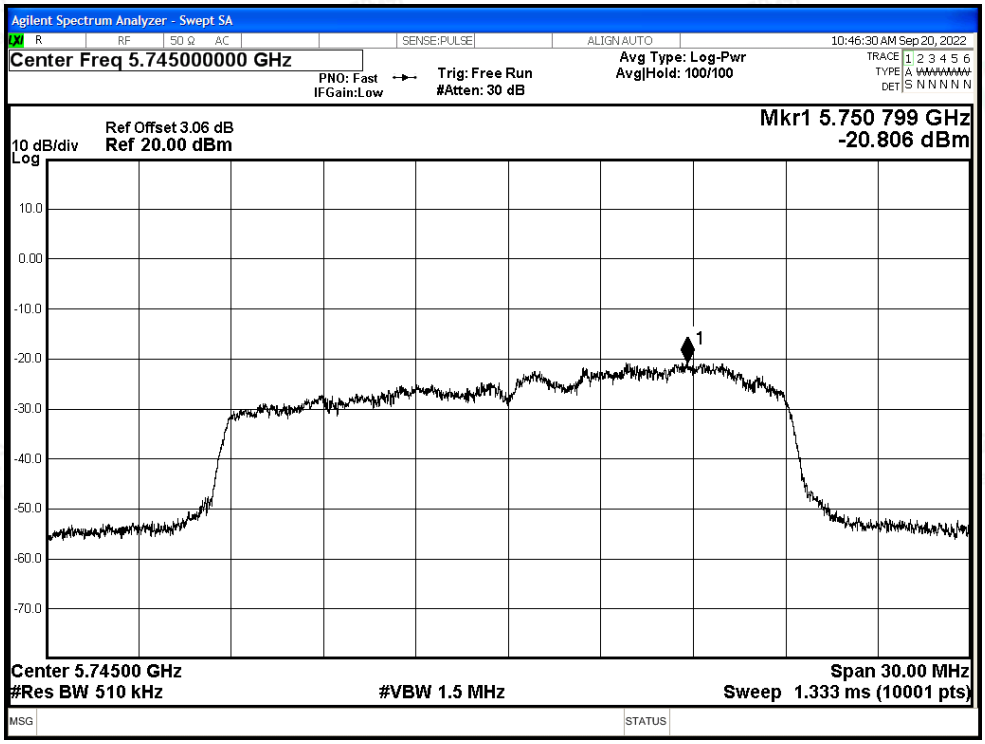

PSD NVNT ax20 5785MHz Ant1

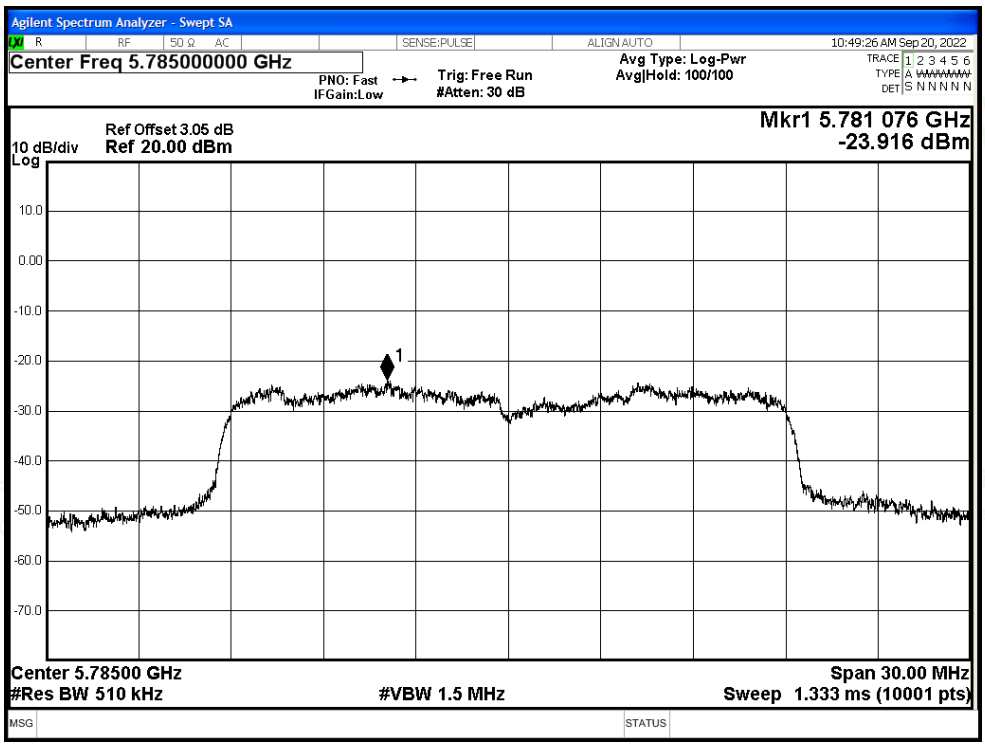

PSD NVNT ax20 5825MHz Ant1

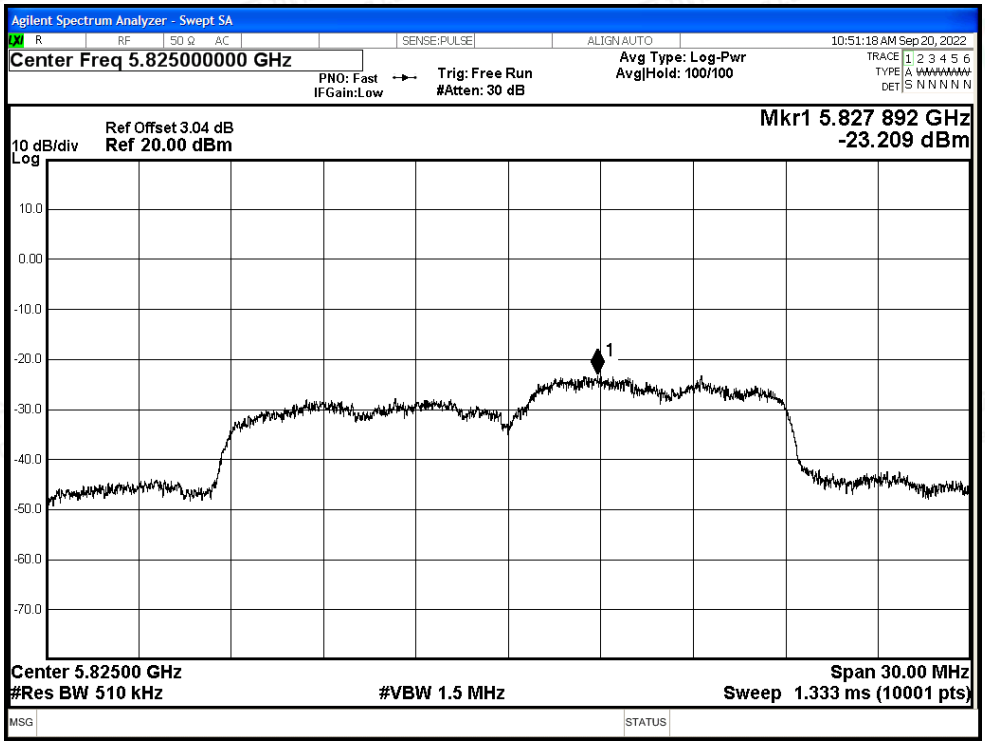

PSD NVNT ax40 5755MHz Ant1

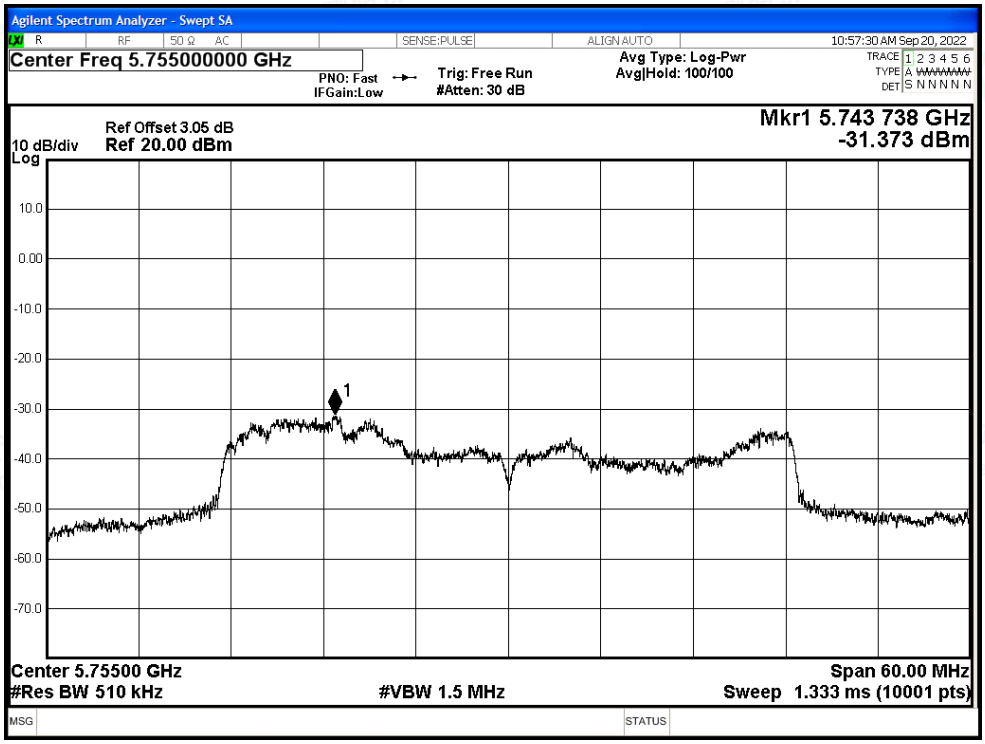

PSD NVNT ax40 5795MHz Ant1

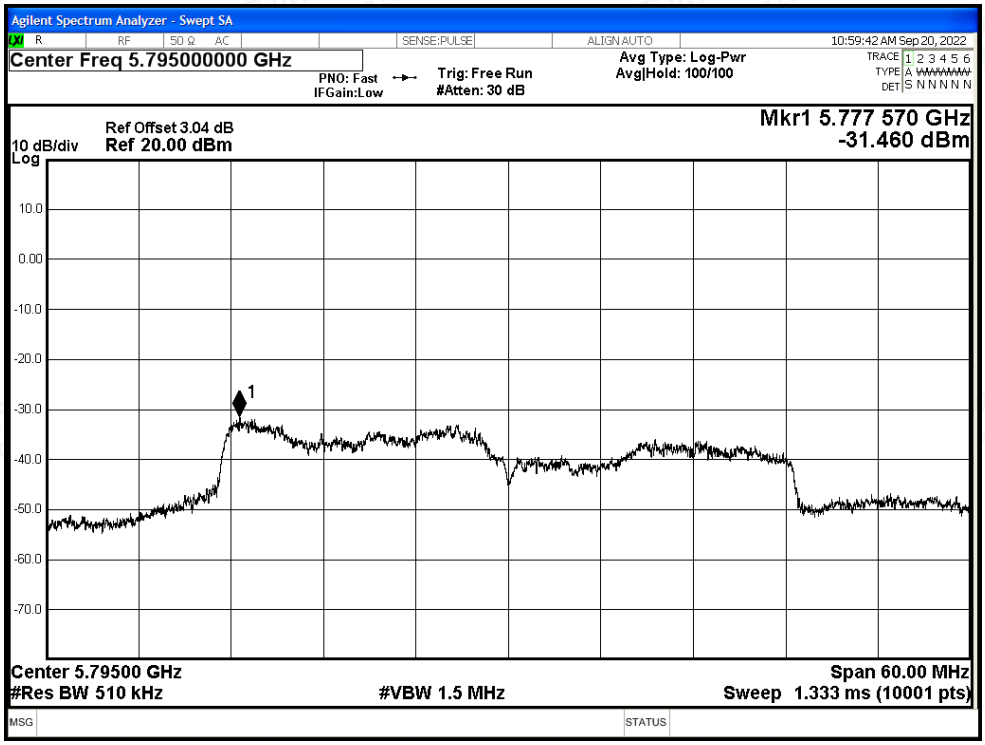

PSD NVNT ax80 5775MHz Ant1

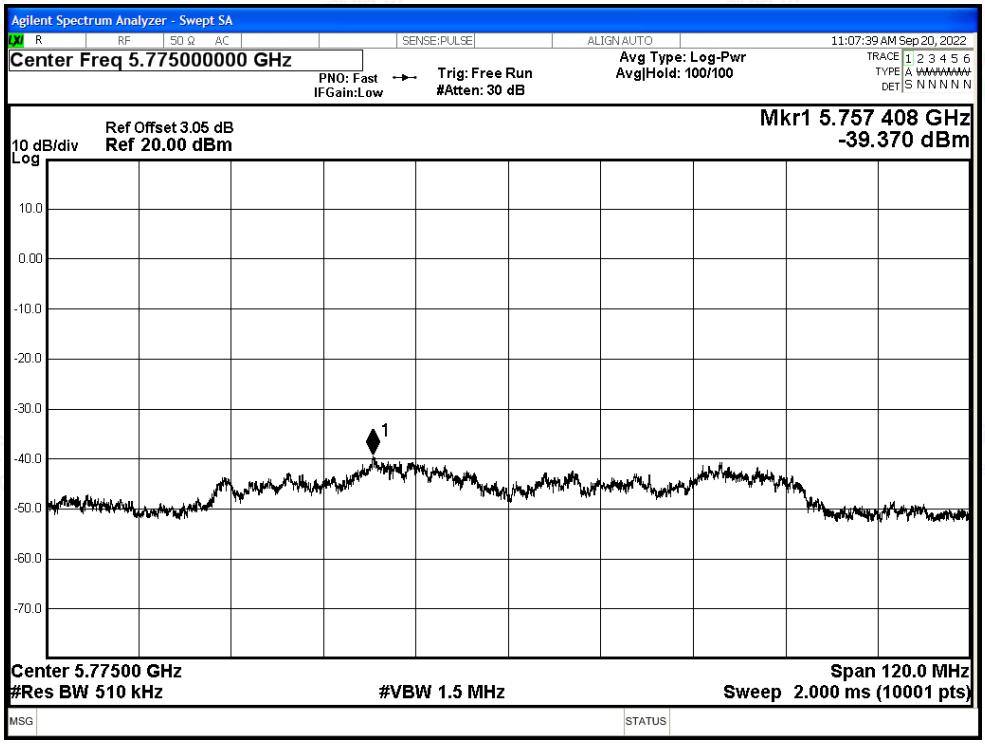

E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5745	Ant0	5650	-47.62	2	-45.62	Peak	-27	Pass
NVNT	a	5745	Ant0	5650	-58.26	2	-56.26	Average	-27	Pass
NVNT	a	5745	Ant0	5700	-48.47	2	-46.47	Peak	10	Pass
NVNT	a	5745	Ant0	5700	-57.54	2	-55.54	Average	10	Pass
NVNT	a	5745	Ant0	5720	-33.12	2	-31.12	Peak	15.6	Pass
NVNT	a	5745	Ant0	5720	-48.98	2	-46.98	Average	15.6	Pass
NVNT	a	5745	Ant0	5725	-22.54	2	-20.54	Peak	27	Pass
NVNT	a	5745	Ant0	5725	-39.7	2	-37.7	Average	27	Pass
NVNT	a	5825	Ant0	5850	-42.96	2	-40.96	Peak	27	Pass
NVNT	a	5825	Ant0	5850	-54.11	2	-52.11	Average	27	Pass
NVNT	a	5825	Ant0	5855	-48.18	2	-46.18	Peak	15.6	Pass
NVNT	a	5825	Ant0	5855	-57.31	2	-55.31	Average	15.6	Pass
NVNT	a	5825	Ant0	5875	-49.1	2	-47.1	Peak	10	Pass
NVNT	a	5825	Ant0	5875	-58.57	2	-56.57	Average	10	Pass
NVNT	a	5825	Ant0	5925	-49.25	2	-47.25	Peak	-27	Pass
NVNT	a	5825	Ant0	5925	-58.7	2	-56.7	Average	-27	Pass
NVNT	n20	5745	Ant0	5650	-50.31	2	-48.31	Peak	-27	Pass
NVNT	n20	5745	Ant0	5650	-58.18	2	-56.18	Average	-27	Pass
NVNT	n20	5745	Ant0	5700	-48.15	2	-46.15	Peak	10	Pass
NVNT	n20	5745	Ant0	5700	-57.47	2	-55.47	Average	10	Pass
NVNT	n20	5745	Ant0	5720	-36.27	2	-34.27	Peak	15.6	Pass
NVNT	n20	5745	Ant0	5720	-49.45	2	-47.45	Average	15.6	Pass
NVNT	n20	5745	Ant0	5725	-26.03	2	-24.03	Peak	27	Pass
NVNT	n20	5745	Ant0	5725	-40.09	2	-38.09	Average	27	Pass
NVNT	n20	5825	Ant0	5850	-40.17	2	-38.17	Peak	27	Pass
NVNT	n20	5825	Ant0	5850	-54.39	2	-52.39	Average	27	Pass
NVNT	n20	5825	Ant0	5855	-48.24	2	-46.24	Peak	15.6	Pass
NVNT	n20	5825	Ant0	5855	-57.26	2	-55.26	Average	15.6	Pass
NVNT	n20	5825	Ant0	5875	-49.16	2	-47.16	Peak	10	Pass
NVNT	n20	5825	Ant0	5875	-58.52	2	-56.52	Average	10	Pass
NVNT	n20	5825	Ant0	5925	-49.57	2	-47.57	Peak	-27	Pass
NVNT	n20	5825	Ant0	5925	-58.46	2	-56.46	Average	-27	Pass
NVNT	n40	5755	Ant0	5650	-48.45	2	-46.45	Peak	-27	Pass
NVNT	n40	5755	Ant0	5650	-58.04	2	-56.04	Average	-27	Pass
NVNT	n40	5755	Ant0	5700	-40.17	2	-38.17	Peak	10	Pass
NVNT	n40	5755	Ant0	5700	-54.25	2	-52.25	Average	10	Pass
NVNT	n40	5755	Ant0	5720	-28.09	2	-26.09	Peak	15.6	Pass

NVNT	n40	5755	Ant0	5720	-38.85	2	-36.85	Average	15.6	Pass
NVNT	n40	5755	Ant0	5725	-24.07	2	-22.07	Peak	27	Pass
NVNT	n40	5755	Ant0	5725	-35.53	2	-33.53	Average	27	Pass
NVNT	n40	5795	Ant0	5850	-47.37	2	-45.37	Peak	27	Pass
NVNT	n40	5795	Ant0	5850	-56.67	2	-54.67	Average	27	Pass
NVNT	n40	5795	Ant0	5855	-48.7	2	-46.7	Peak	15.6	Pass
NVNT	n40	5795	Ant0	5855	-57.68	2	-55.68	Average	15.6	Pass
NVNT	n40	5795	Ant0	5875	-47.97	2	-45.97	Peak	10	Pass
NVNT	n40	5795	Ant0	5875	-58.6	2	-56.6	Average	10	Pass
NVNT	n40	5795	Ant0	5925	-49.07	2	-47.07	Peak	-27	Pass
NVNT	n40	5795	Ant0	5925	-58.75	2	-56.75	Average	-27	Pass
NVNT	ac20	5745	Ant0	5650	-48.64	2	-46.64	Peak	-27	Pass
NVNT	ac20	5745	Ant0	5650	-58.21	2	-56.21	Average	-27	Pass
NVNT	ac20	5745	Ant0	5700	-49.32	2	-47.32	Peak	10	Pass
NVNT	ac20	5745	Ant0	5700	-57.71	2	-55.71	Average	10	Pass
NVNT	ac20	5745	Ant0	5720	-35.55	2	-33.55	Peak	15.6	Pass
NVNT	ac20	5745	Ant0	5720	-49.61	2	-47.61	Average	15.6	Pass
NVNT	ac20	5745	Ant0	5725	-27.55	2	-25.55	Peak	27	Pass
NVNT	ac20	5745	Ant0	5725	-40.31	2	-38.31	Average	27	Pass
NVNT	ac20	5825	Ant0	5850	-40.77	2	-38.77	Peak	27	Pass
NVNT	ac20	5825	Ant0	5850	-54.11	2	-52.11	Average	27	Pass
NVNT	ac20	5825	Ant0	5855	-46.94	2	-44.94	Peak	15.6	Pass
NVNT	ac20	5825	Ant0	5855	-57.43	2	-55.43	Average	15.6	Pass
NVNT	ac20	5825	Ant0	5875	-50	2	-48	Peak	10	Pass
NVNT	ac20	5825	Ant0	5875	-58.45	2	-56.45	Average	10	Pass
NVNT	ac20	5825	Ant0	5925	-49.82	2	-47.82	Peak	-27	Pass
NVNT	ac20	5825	Ant0	5925	-58.61	2	-56.61	Average	-27	Pass
NVNT	ac40	5755	Ant0	5650	-47.08	2	-45.08	Peak	-27	Pass
NVNT	ac40	5755	Ant0	5650	-58	2	-56	Average	-27	Pass
NVNT	ac40	5755	Ant0	5700	-44.78	2	-42.78	Peak	10	Pass
NVNT	ac40	5755	Ant0	5700	-54.21	2	-52.21	Average	10	Pass
NVNT	ac40	5755	Ant0	5720	-28.48	2	-26.48	Peak	15.6	Pass
NVNT	ac40	5755	Ant0	5720	-39.07	2	-37.07	Average	15.6	Pass
NVNT	ac40	5755	Ant0	5725	-26.58	2	-24.58	Peak	27	Pass
NVNT	ac40	5755	Ant0	5725	-35.62	2	-33.62	Average	27	Pass
NVNT	ac40	5795	Ant0	5850	-47.71	2	-45.71	Peak	27	Pass
NVNT	ac40	5795	Ant0	5850	-56.68	2	-54.68	Average	27	Pass
NVNT	ac40	5795	Ant0	5855	-47.69	2	-45.69	Peak	15.6	Pass
NVNT	ac40	5795	Ant0	5855	-57.64	2	-55.64	Average	15.6	Pass
NVNT	ac40	5795	Ant0	5875	-49.21	2	-47.21	Peak	10	Pass
NVNT	ac40	5795	Ant0	5875	-58.53	2	-56.53	Average	10	Pass

NVNT	ac40	5795	Ant0	5925	-48.94	2	-46.94	Peak	-27	Pass
NVNT	ac40	5795	Ant0	5925	-58.59	2	-56.59	Average	-27	Pass
NVNT	ac80	5775	Ant0	5650	-44.41	2	-42.41	Peak	-27	Pass
NVNT	ac80	5775	Ant0	5650	-55.35	2	-53.35	Average	-27	Pass
NVNT	ac80	5775	Ant0	5700	-30.99	2	-28.99	Peak	10	Pass
NVNT	ac80	5775	Ant0	5700	-39.89	2	-37.89	Average	10	Pass
NVNT	ac80	5775	Ant0	5720	-27.1	2	-25.1	Peak	15.6	Pass
NVNT	ac80	5775	Ant0	5720	-35.64	2	-33.64	Average	15.6	Pass
NVNT	ac80	5775	Ant0	5725	-24.69	2	-22.69	Peak	27	Pass
NVNT	ac80	5775	Ant0	5725	-34.8	2	-32.8	Average	27	Pass
NVNT	ac80	5775	Ant0	5850	-31.78	2	-29.78	Peak	27	Pass
NVNT	ac80	5775	Ant0	5850	-42.3	2	-40.3	Average	27	Pass
NVNT	ac80	5775	Ant0	5855	-32.98	2	-30.98	Peak	15.6	Pass
NVNT	ac80	5775	Ant0	5855	-44.05	2	-42.05	Average	15.6	Pass
NVNT	ac80	5775	Ant0	5875	-37.33	2	-35.33	Peak	10	Pass
NVNT	ac80	5775	Ant0	5875	-50.98	2	-48.98	Average	10	Pass
NVNT	ac80	5775	Ant0	5925	-47.83	2	-45.83	Peak	-27	Pass
NVNT	ac80	5775	Ant0	5925	-57.95	2	-55.95	Average	-27	Pass
NVNT	ax20	5745	Ant0	5650	-49.66	2	-47.66	Peak	-27	Pass
NVNT	ax20	5745	Ant0	5650	-58.81	2	-56.81	Average	-27	Pass
NVNT	ax20	5745	Ant0	5700	-48.84	2	-46.84	Peak	10	Pass
NVNT	ax20	5745	Ant0	5700	-58.09	2	-56.09	Average	10	Pass
NVNT	ax20	5745	Ant0	5720	-34.17	2	-32.17	Peak	15.6	Pass
NVNT	ax20	5745	Ant0	5720	-50.81	2	-48.81	Average	15.6	Pass
NVNT	ax20	5745	Ant0	5725	-27.63	2	-25.63	Peak	27	Pass
NVNT	ax20	5745	Ant0	5725	-47.6	2	-45.6	Average	27	Pass
NVNT	ax20	5825	Ant0	5850	-36.29	2	-34.29	Peak	27	Pass
NVNT	ax20	5825	Ant0	5850	-48.12	2	-46.12	Average	27	Pass
NVNT	ax20	5825	Ant0	5855	-40.66	2	-38.66	Peak	15.6	Pass
NVNT	ax20	5825	Ant0	5855	-52.68	2	-50.68	Average	15.6	Pass
NVNT	ax20	5825	Ant0	5875	-48.96	2	-46.96	Peak	10	Pass
NVNT	ax20	5825	Ant0	5875	-58.01	2	-56.01	Average	10	Pass
NVNT	ax20	5825	Ant0	5925	-49.54	2	-47.54	Peak	-27	Pass
NVNT	ax20	5825	Ant0	5925	-58.42	2	-56.42	Average	-27	Pass
NVNT	ax40	5755	Ant0	5650	-48.66	2	-46.66	Peak	-27	Pass
NVNT	ax40	5755	Ant0	5650	-57.89	2	-55.89	Average	-27	Pass
NVNT	ax40	5755	Ant0	5700	-42.4	2	-40.4	Peak	10	Pass
NVNT	ax40	5755	Ant0	5700	-54.63	2	-52.63	Average	10	Pass
NVNT	ax40	5755	Ant0	5720	-29.76	2	-27.76	Peak	15.6	Pass
NVNT	ax40	5755	Ant0	5720	-46.79	2	-44.79	Average	15.6	Pass
NVNT	ax40	5755	Ant0	5725	-31.04	2	-29.04	Peak	27	Pass

NVNT	ax40	5755	Ant0	5725	-45.11	2	-43.11	Average	27	Pass
NVNT	ax40	5795	Ant0	5850	-36.53	2	-34.53	Peak	27	Pass
NVNT	ax40	5795	Ant0	5850	-54.61	2	-52.61	Average	27	Pass
NVNT	ax40	5795	Ant0	5855	-41.41	2	-39.41	Peak	15.6	Pass
NVNT	ax40	5795	Ant0	5855	-55.45	2	-53.45	Average	15.6	Pass
NVNT	ax40	5795	Ant0	5875	-45.06	2	-43.06	Peak	10	Pass
NVNT	ax40	5795	Ant0	5875	-50.13	2	-48.13	Average	10	Pass
NVNT	ax40	5795	Ant0	5925	-48.71	2	-46.71	Peak	-27	Pass
NVNT	ax40	5795	Ant0	5925	-57.95	2	-55.95	Average	-27	Pass
NVNT	ax80	5775	Ant0	5850	-32.07	2	-30.07	Peak	27	Pass
NVNT	ax80	5775	Ant0	5850	-45.37	2	-43.37	Average	27	Pass
NVNT	ax80	5775	Ant0	5855	-34.33	2	-32.33	Peak	15.6	Pass
NVNT	ax80	5775	Ant0	5855	-44.99	2	-42.99	Average	15.6	Pass
NVNT	ax80	5775	Ant0	5875	-42.23	2	-40.23	Peak	10	Pass
NVNT	ax80	5775	Ant0	5875	-51.75	2	-49.75	Average	10	Pass
NVNT	ax80	5775	Ant0	5925	-48.57	2	-46.57	Peak	-27	Pass
NVNT	ax80	5775	Ant0	5925	-55.98	2	-53.98	Average	-27	Pass
NVNT	ax80	5775	Ant0	5650	-49.33	2	-47.33	Peak	-27	Pass
NVNT	ax80	5775	Ant0	5650	-57.03	2	-55.03	Average	-27	Pass
NVNT	ax80	5775	Ant0	5700	-37.48	2	-35.48	Peak	10	Pass
NVNT	ax80	5775	Ant0	5700	-48.32	2	-46.32	Average	10	Pass
NVNT	ax80	5775	Ant0	5720	-32.41	2	-30.41	Peak	15.6	Pass
NVNT	ax80	5775	Ant0	5720	-45.67	2	-43.67	Average	15.6	Pass
NVNT	ax80	5775	Ant0	5725	-23.71	2	-21.71	Peak	27	Pass
NVNT	ax80	5775	Ant0	5725	-44.58	2	-42.58	Average	27	Pass

Test Graphs

Restrict Band NVNT a 5745MHz Ant0 Peak

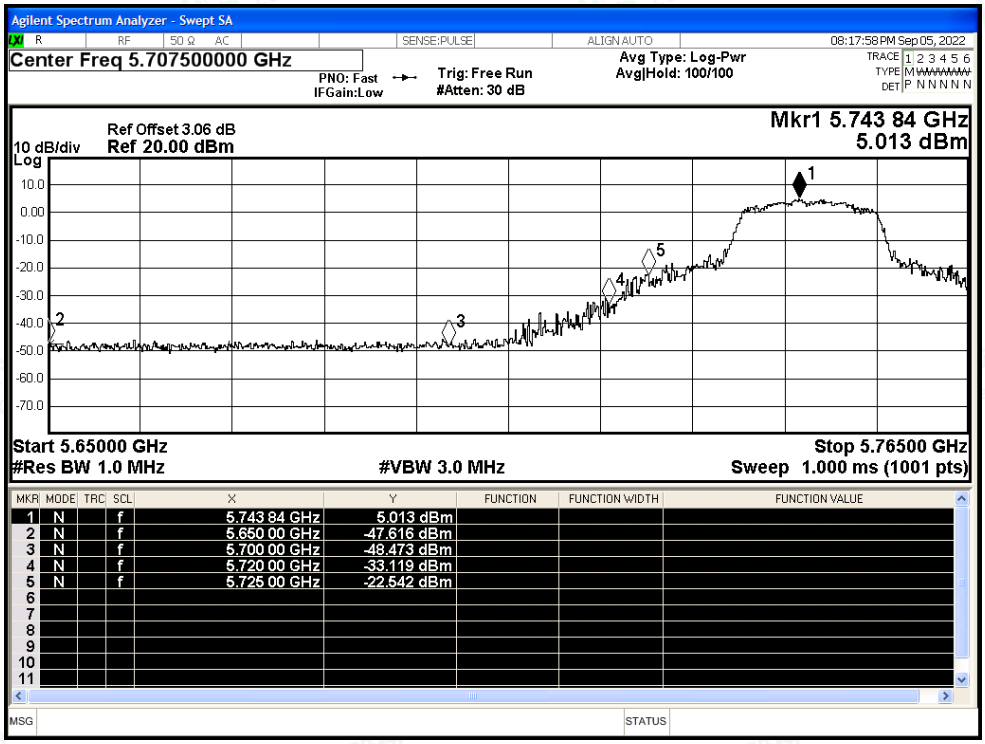

Restrict Band NVNT a 5745MHz Ant0 Average

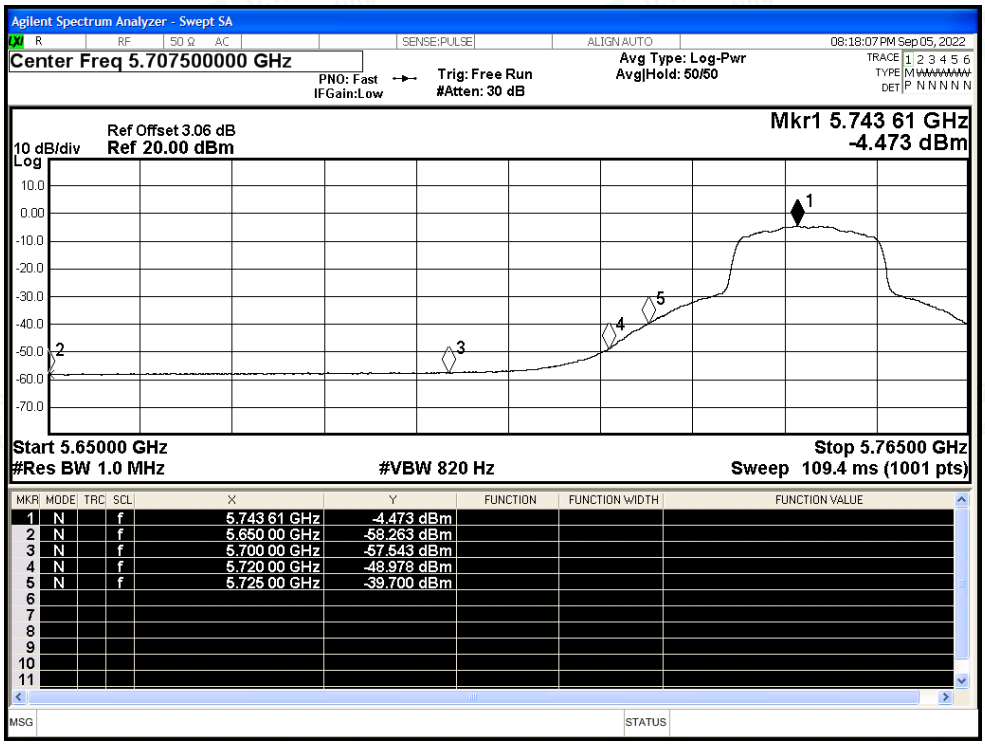

Restrict Band NVNT a 5825MHz Ant0 Peak

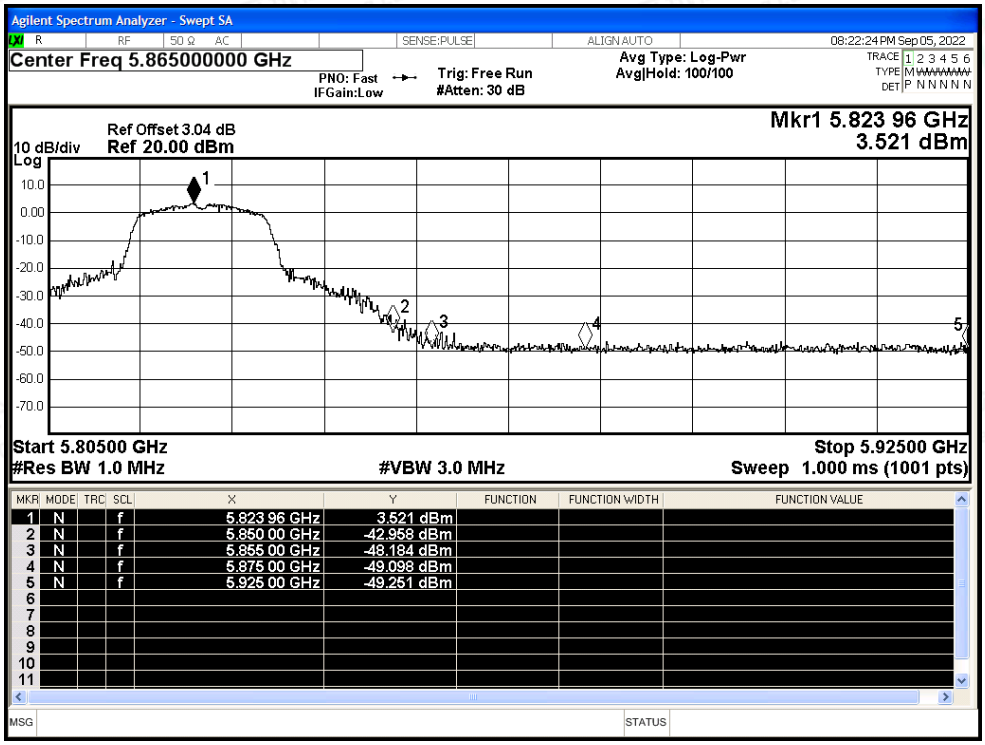

Restrict Band NVNT a 5825MHz Ant0 Average

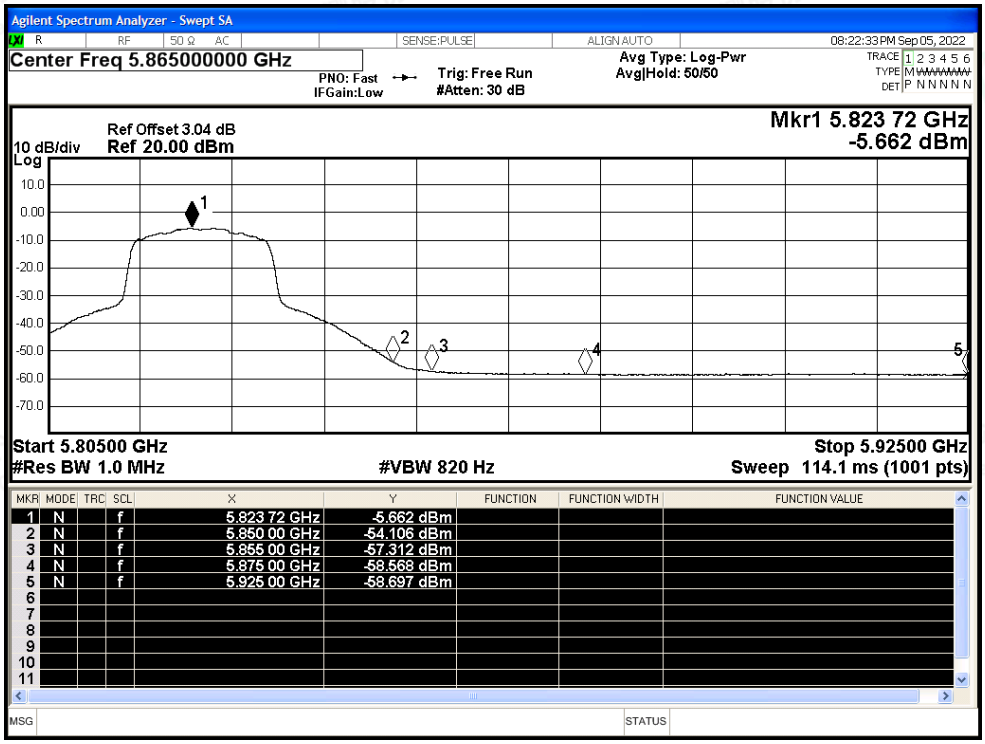

Restrict Band NVNT n20 5745MHz Ant0 Peak

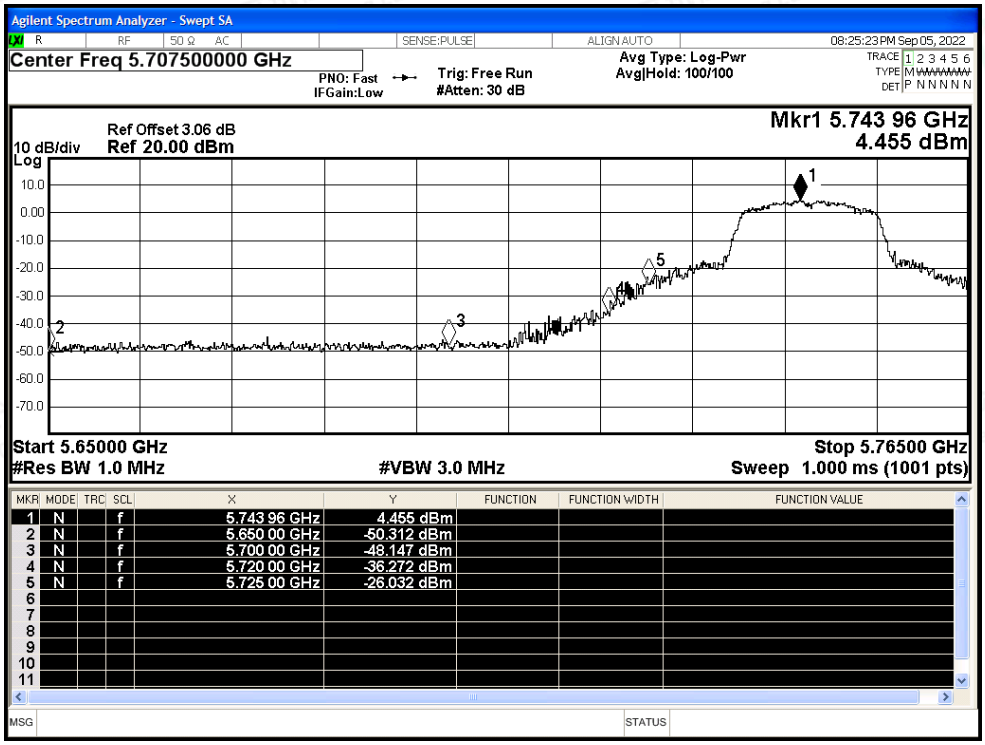

Restrict Band NVNT n20 5745MHz Ant0 Average

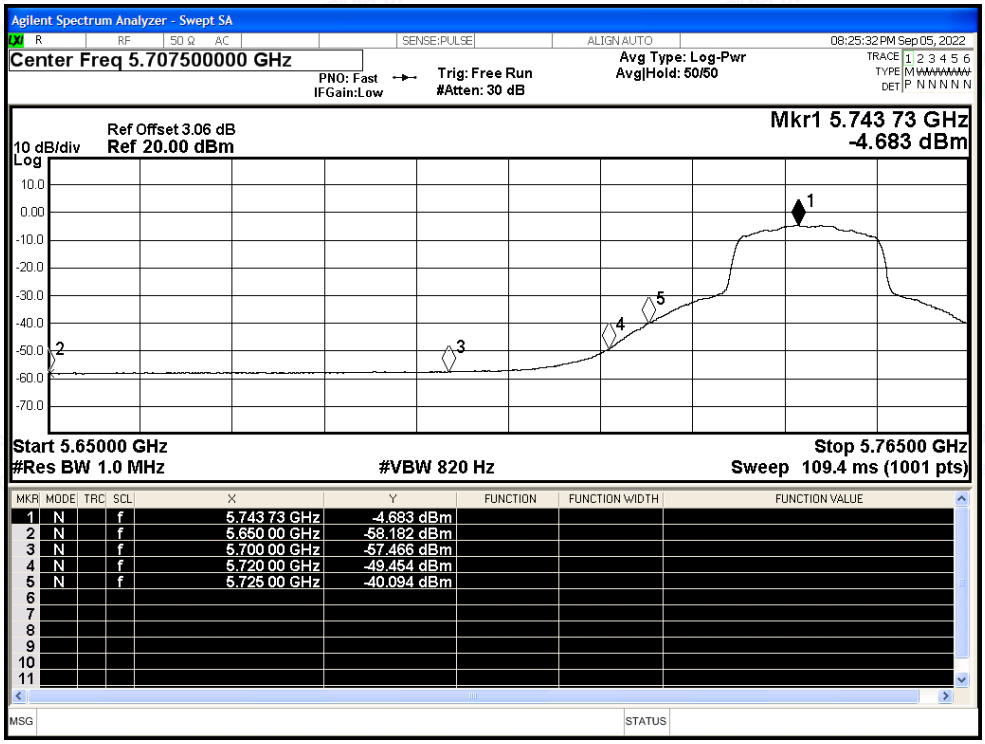

Restrict Band NVNT n20 5825MHz Ant0 Peak

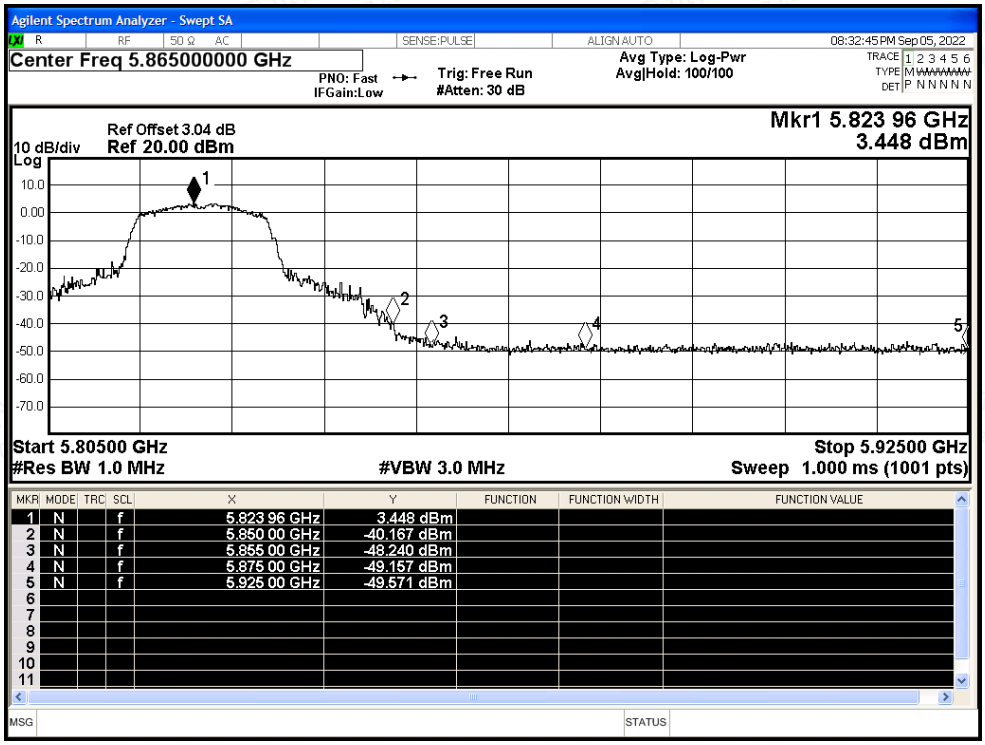

Restrict Band NVNT n20 5825MHz Ant0 Average

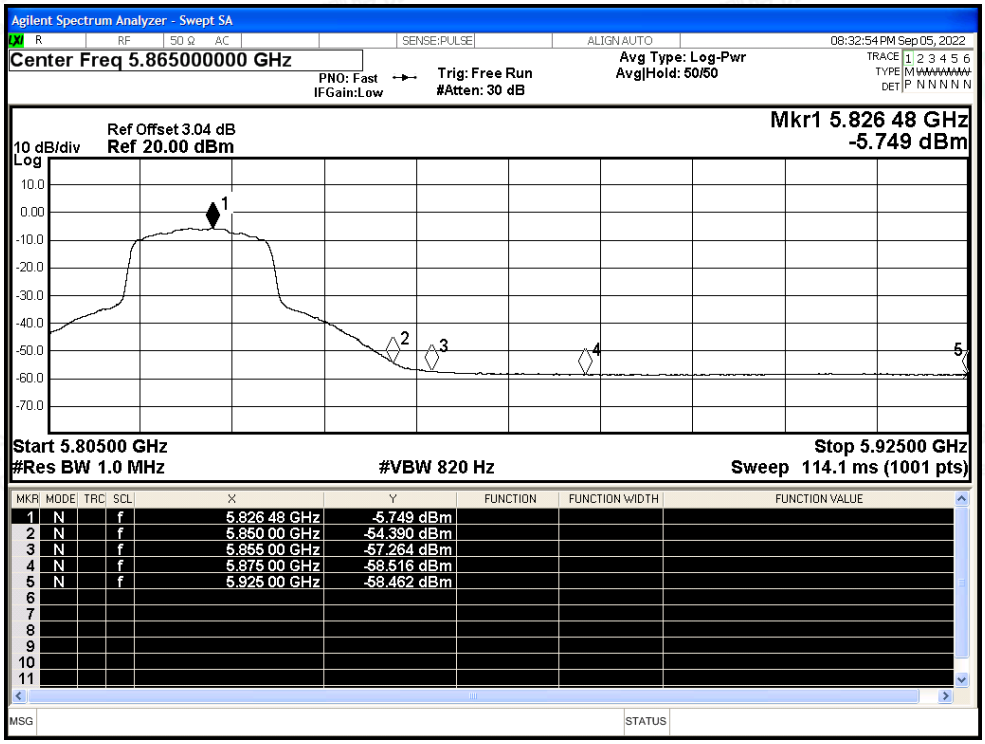

Restrict Band NVNT n40 5755MHz Ant0 Peak

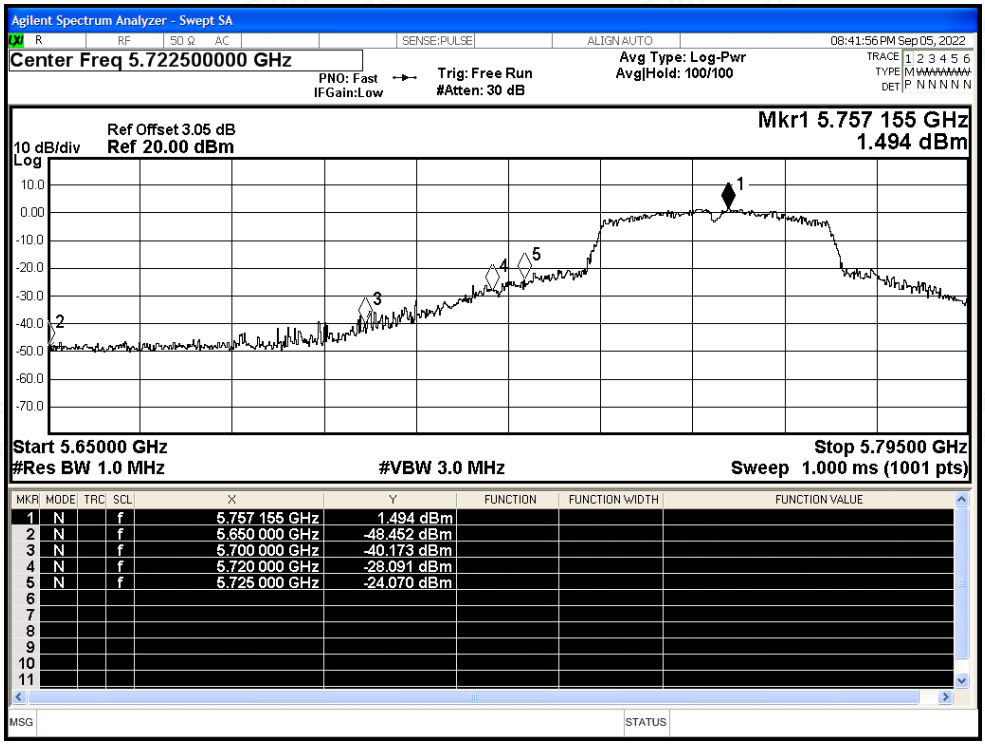

Restrict Band NVNT n40 5755MHz Ant0 Average

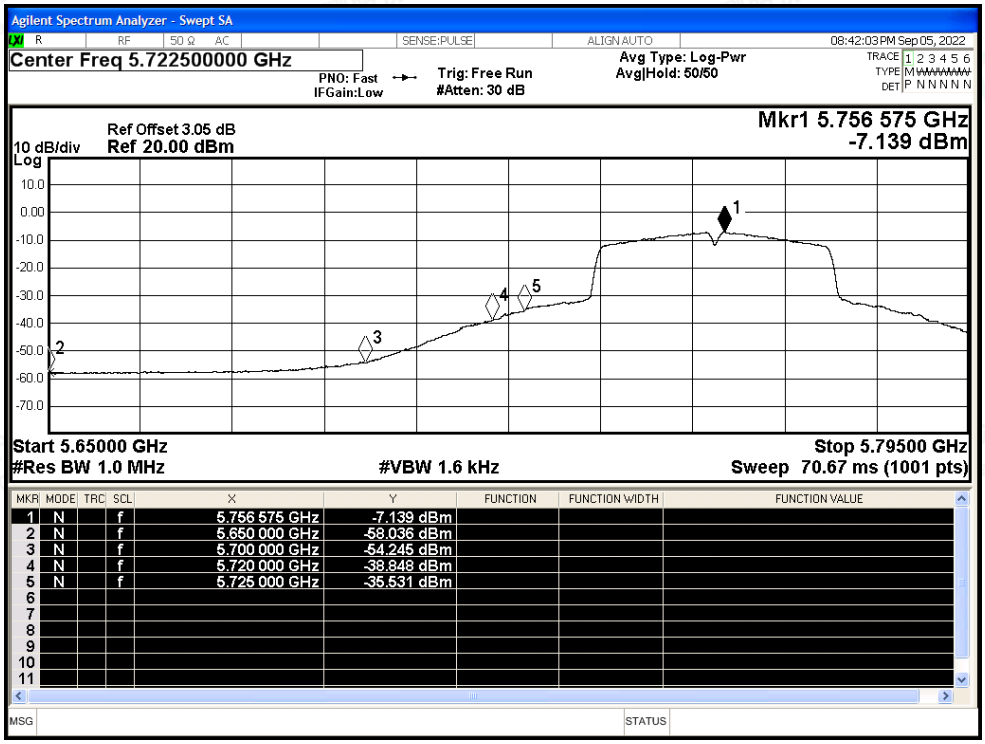

Restrict Band NVNT n40 5795MHz Ant0 Peak

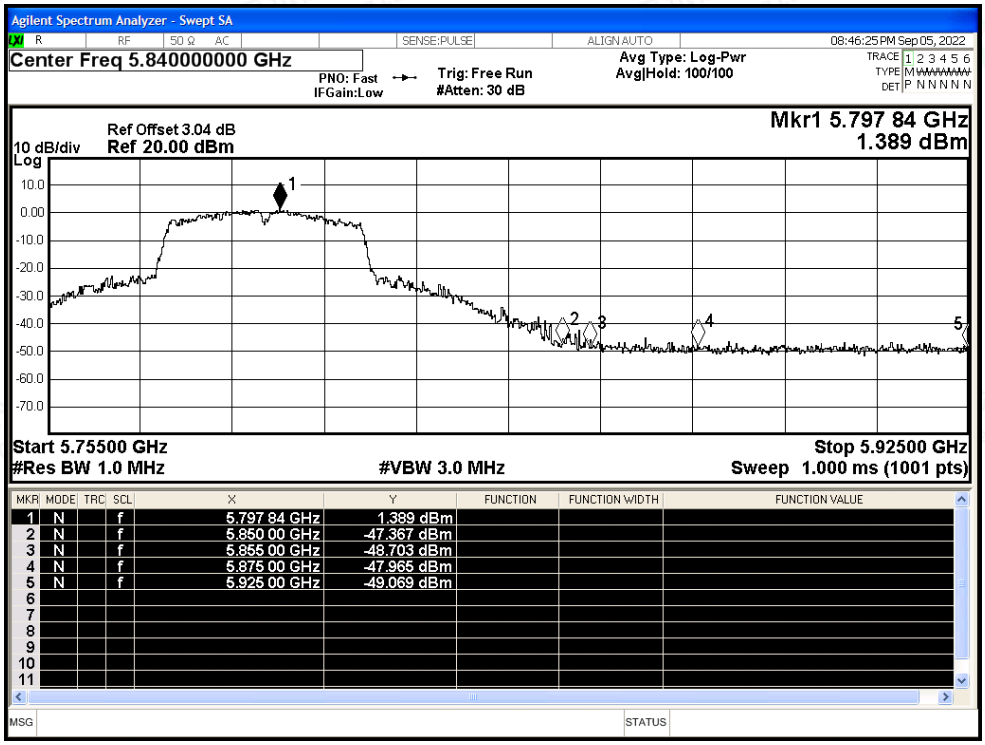

Restrict Band NVNT n40 5795MHz Ant0 Average

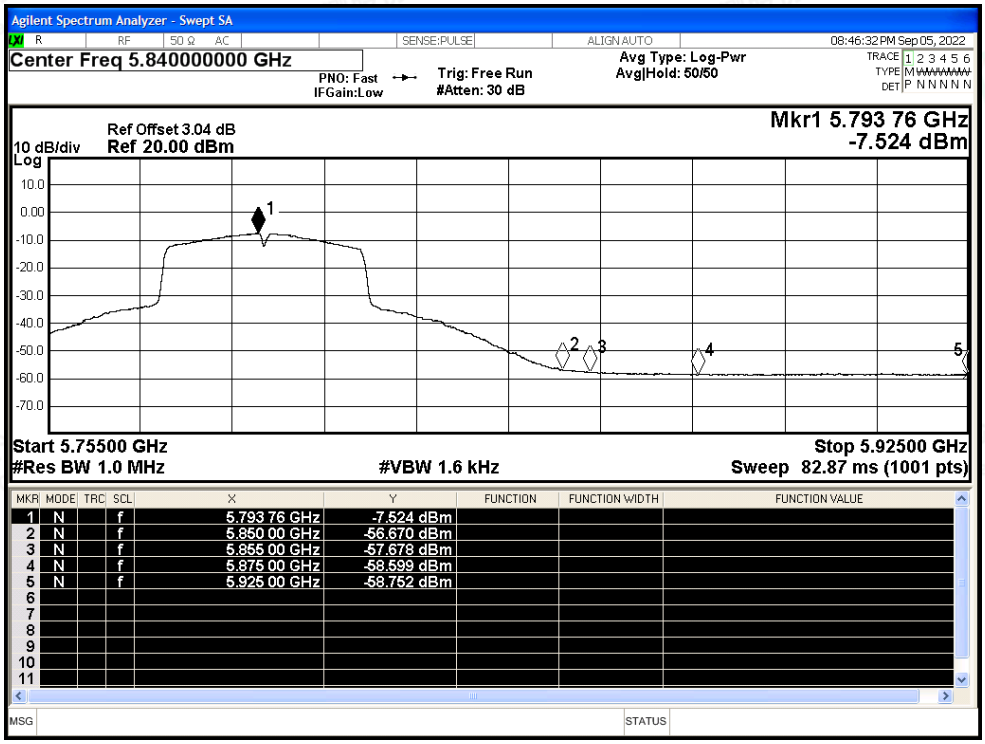

Restrict Band NVNT ac20 5745MHz Ant0 Peak

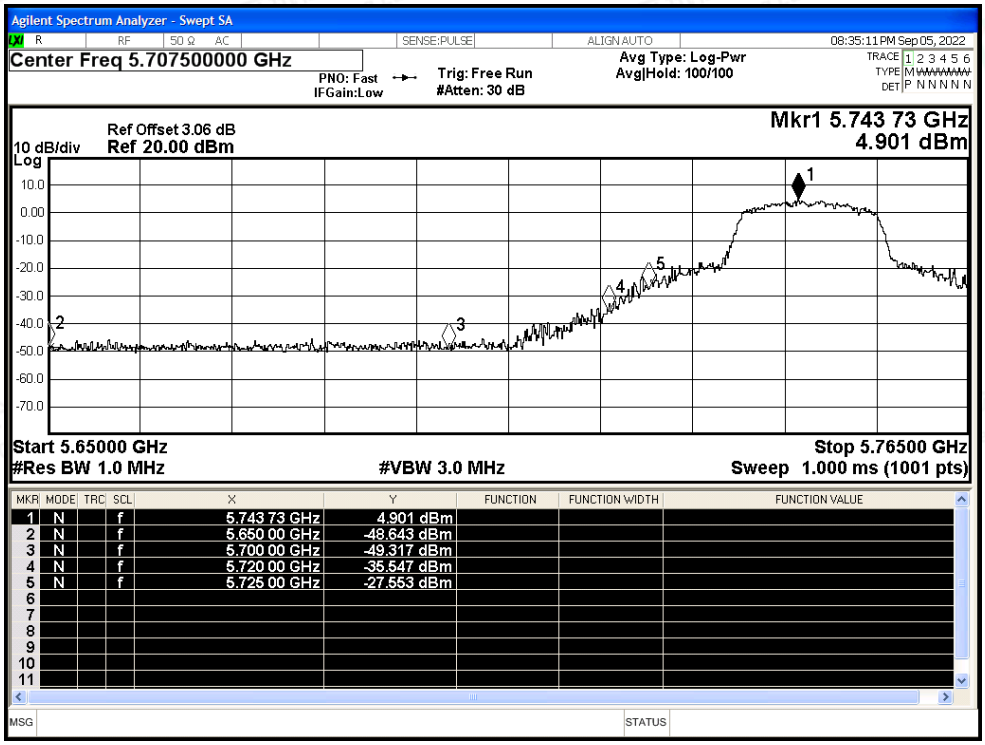

Restrict Band NVNT ac20 5745MHz Ant0 Average

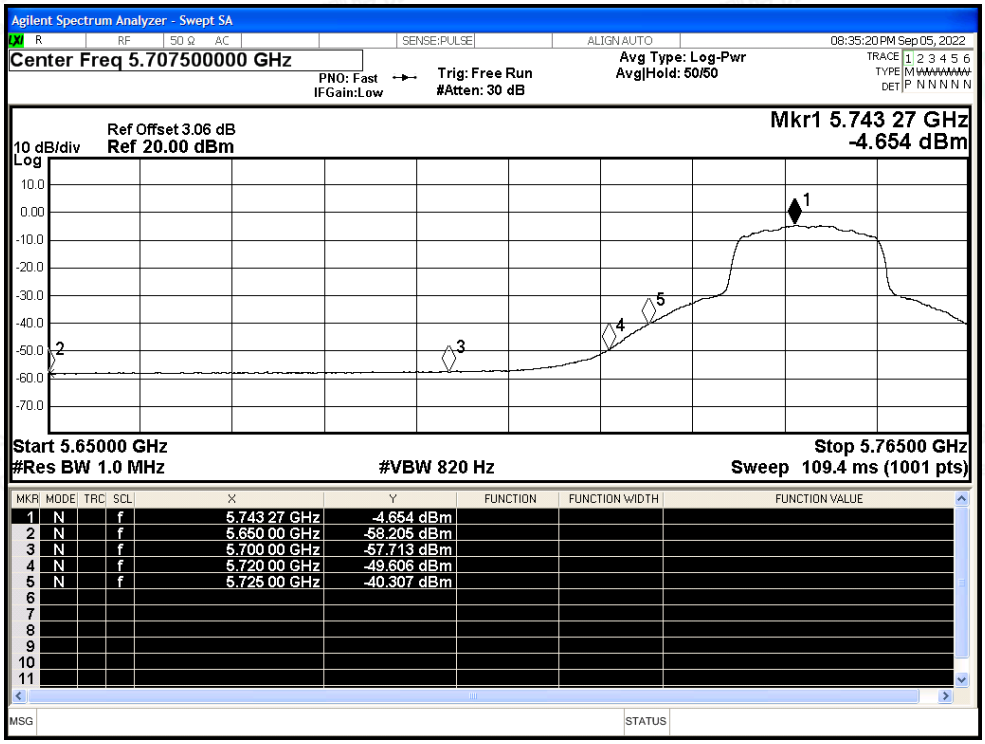

Restrict Band NVNT ac20 5825MHz Ant0 Peak

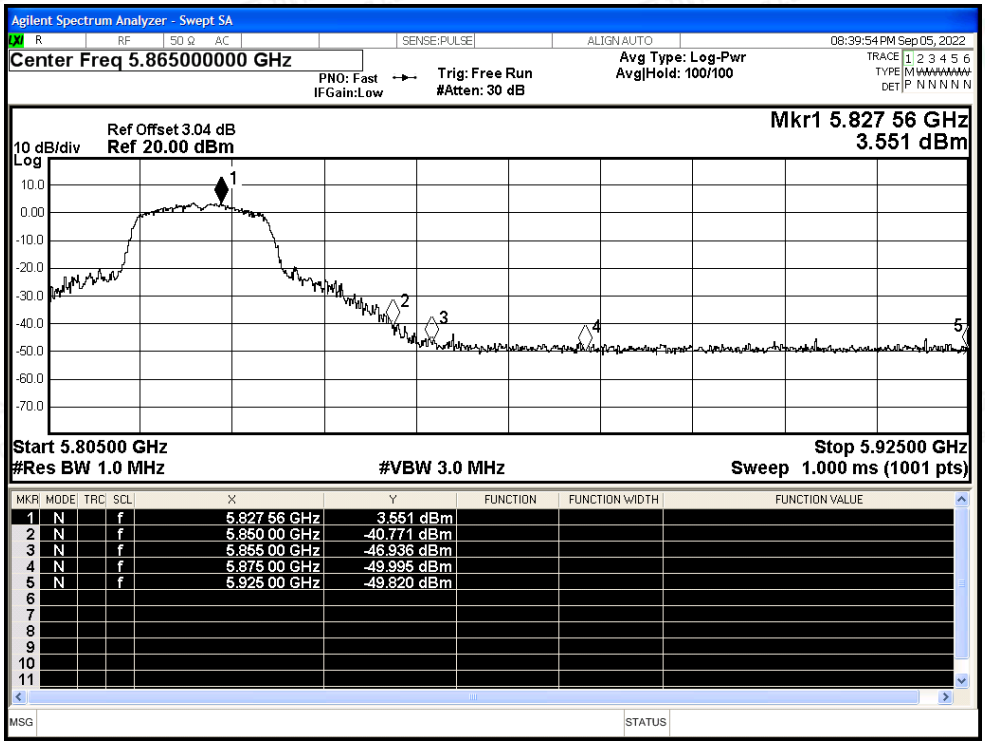

Restrict Band NVNT ac20 5825MHz Ant0 Average

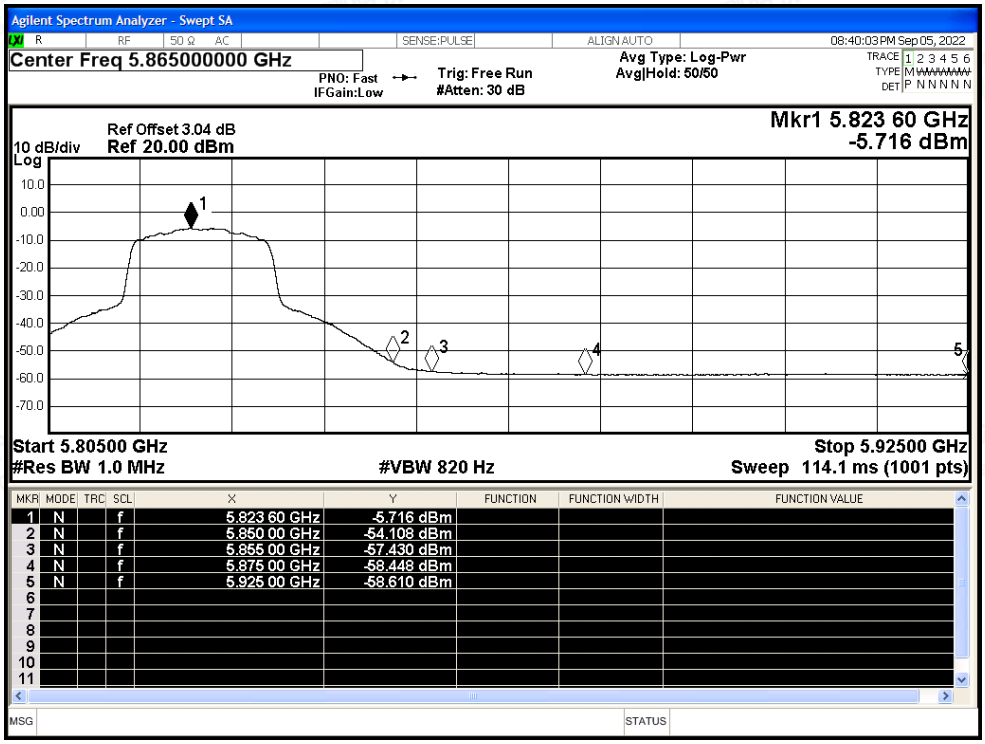

Restrict Band NVNT ac40 5755MHz Ant0 Peak

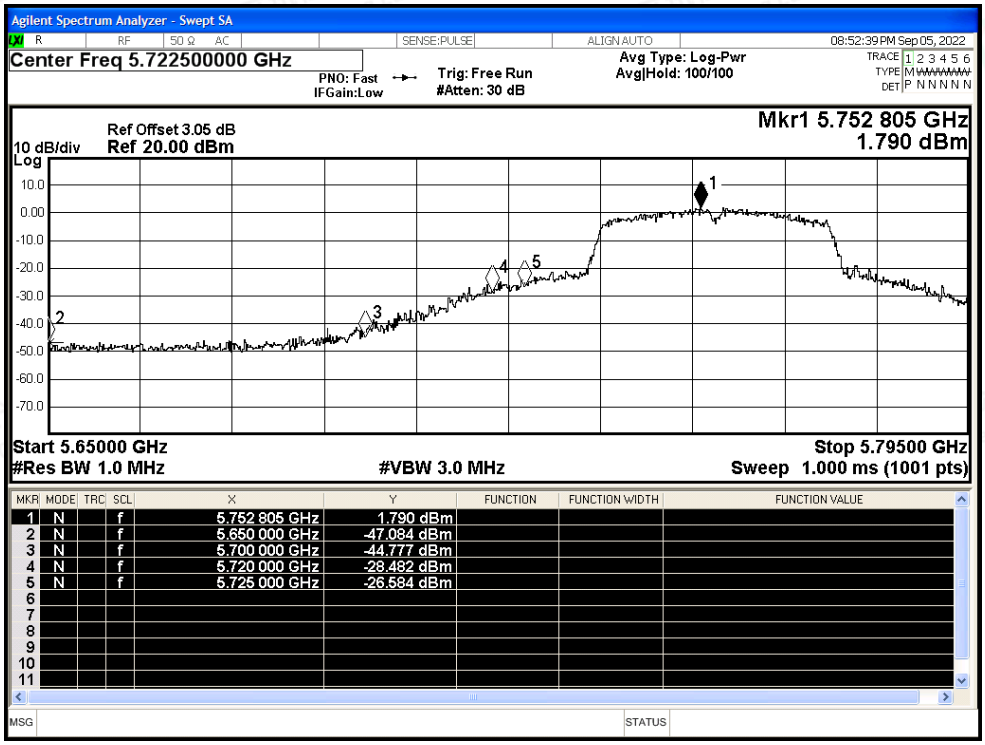

Restrict Band NVNT ac40 5755MHz Ant0 Average

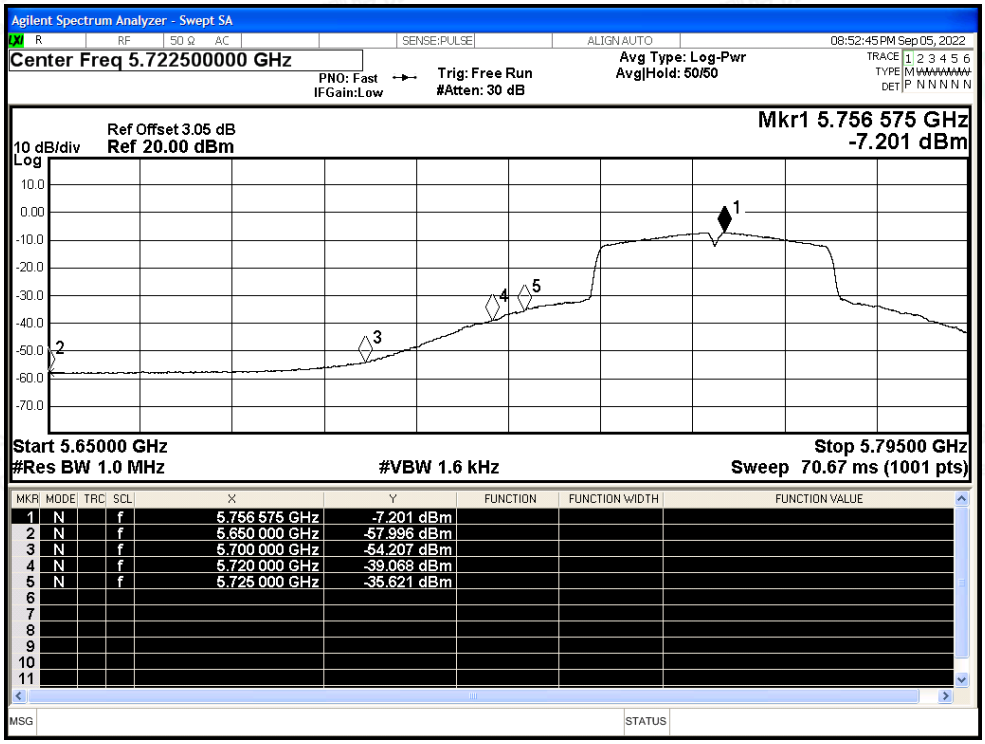

Restrict Band NVNT ac40 5795MHz Ant0 Peak

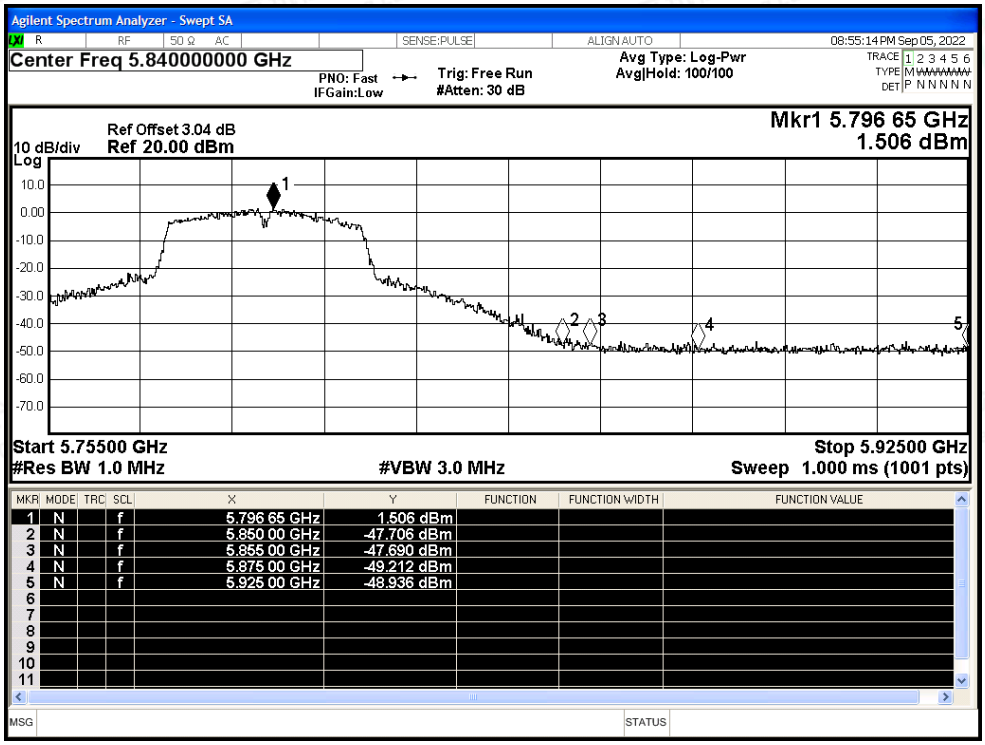

Restrict Band NVNT ac40 5795MHz Ant0 Average

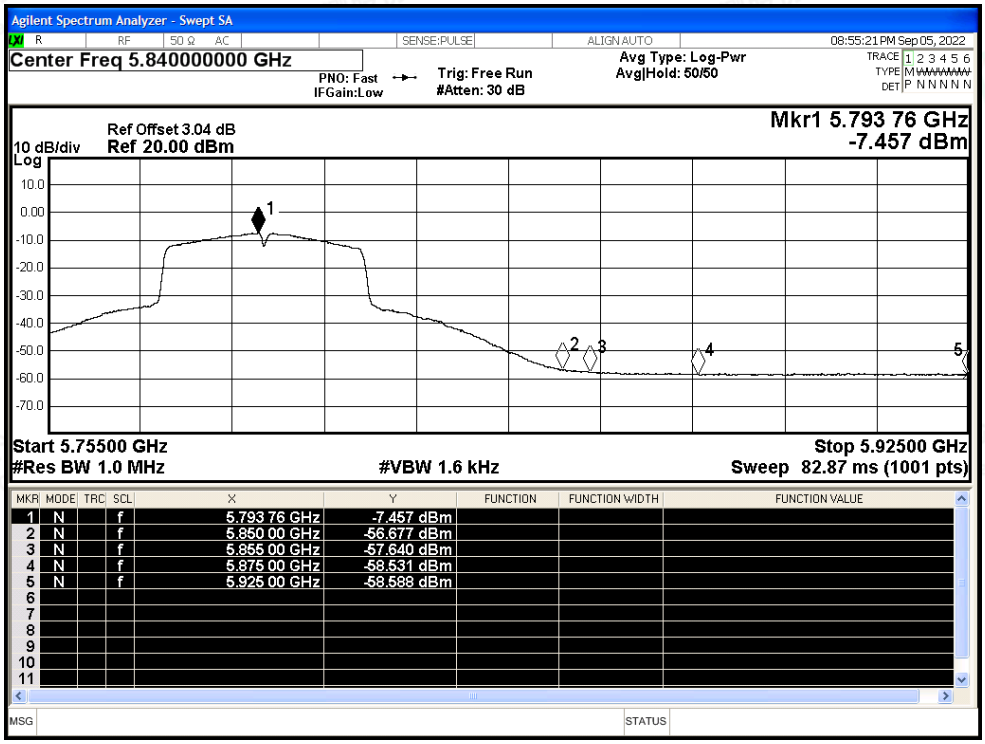

Restrict Band NVNT ac80 5775MHz Ant0 Peak

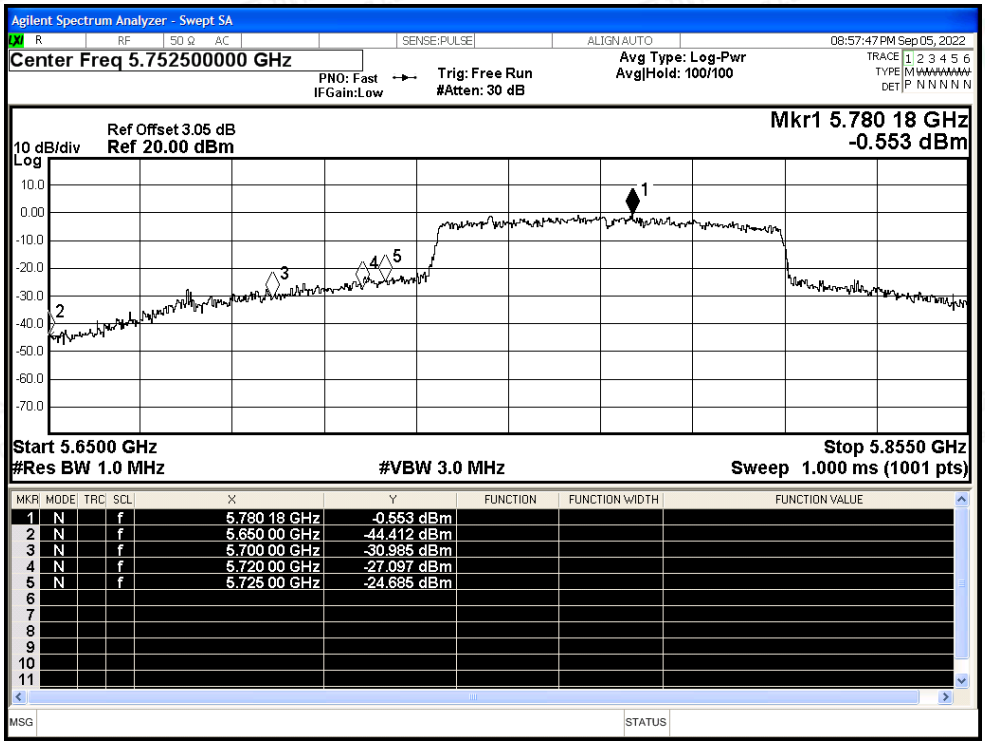

Restrict Band NVNT ac80 5775MHz Ant0 Average

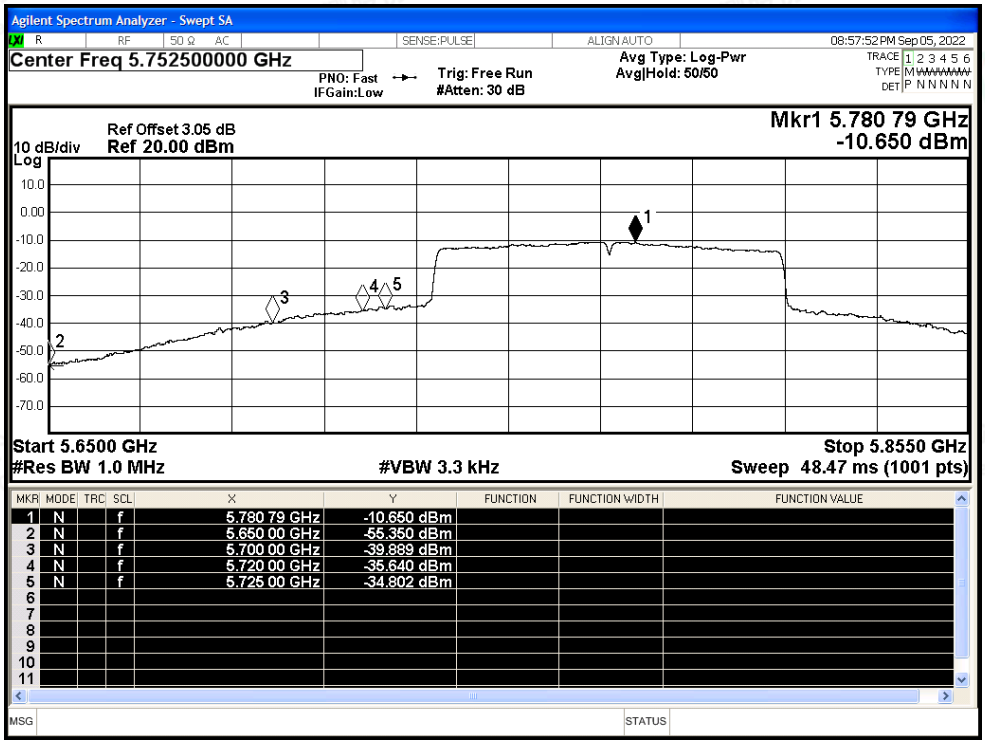

Restrict Band NVNT ac80 5775MHz Ant0 Peak

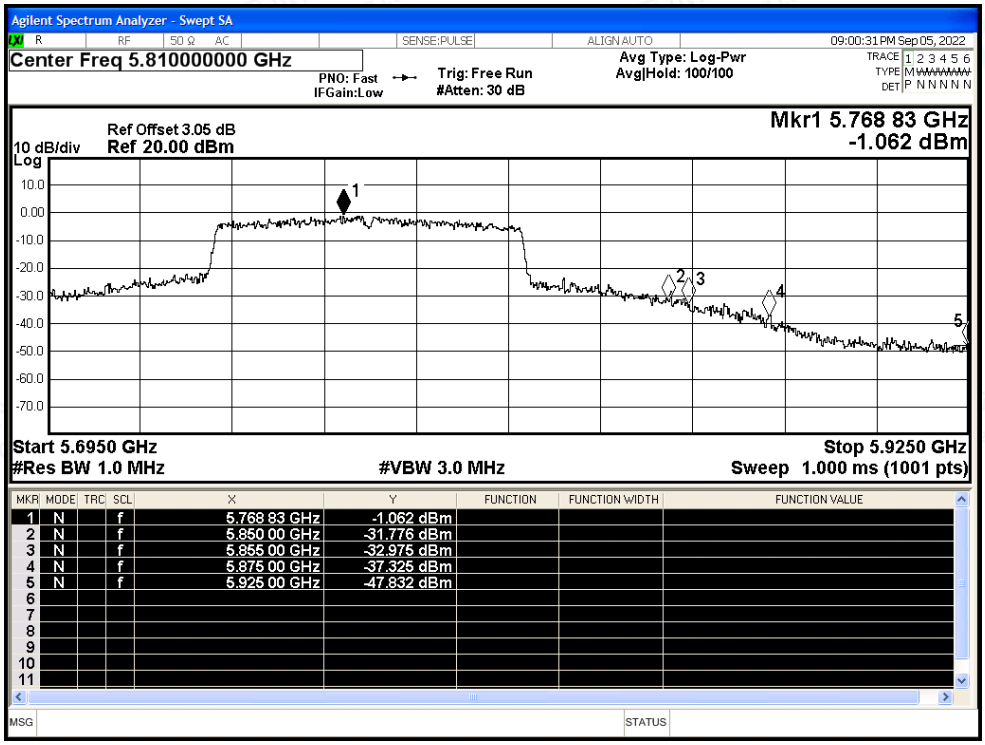

Restrict Band NVNT ac80 5775MHz Ant0 Average

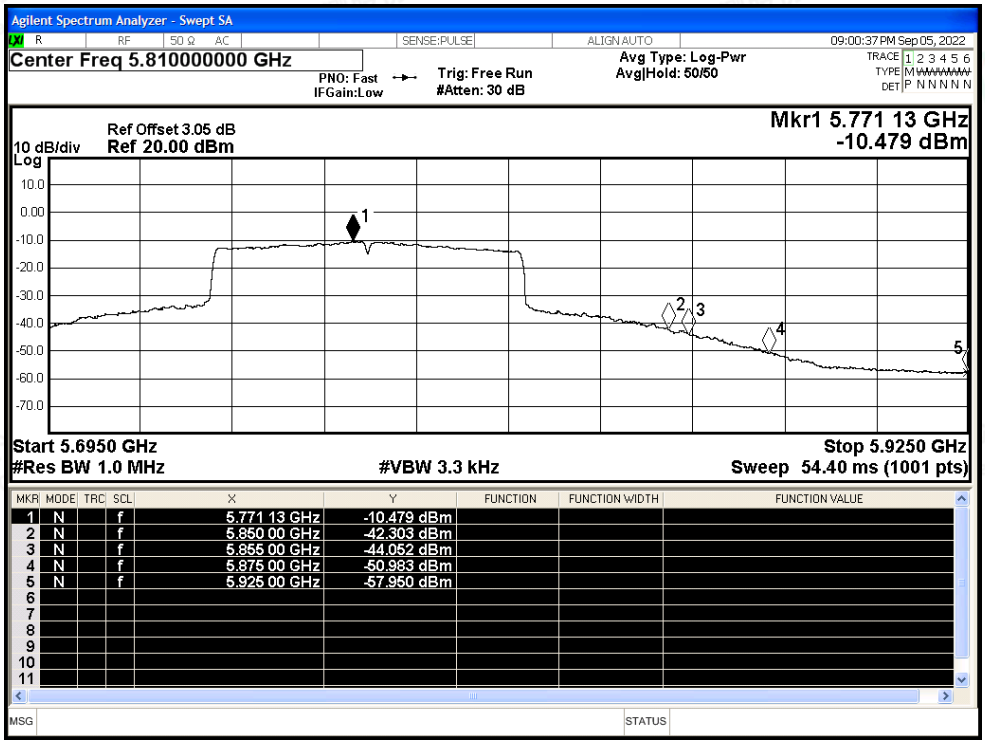

Restrict Band NVNT ax20 5745MHz Ant0 Peak

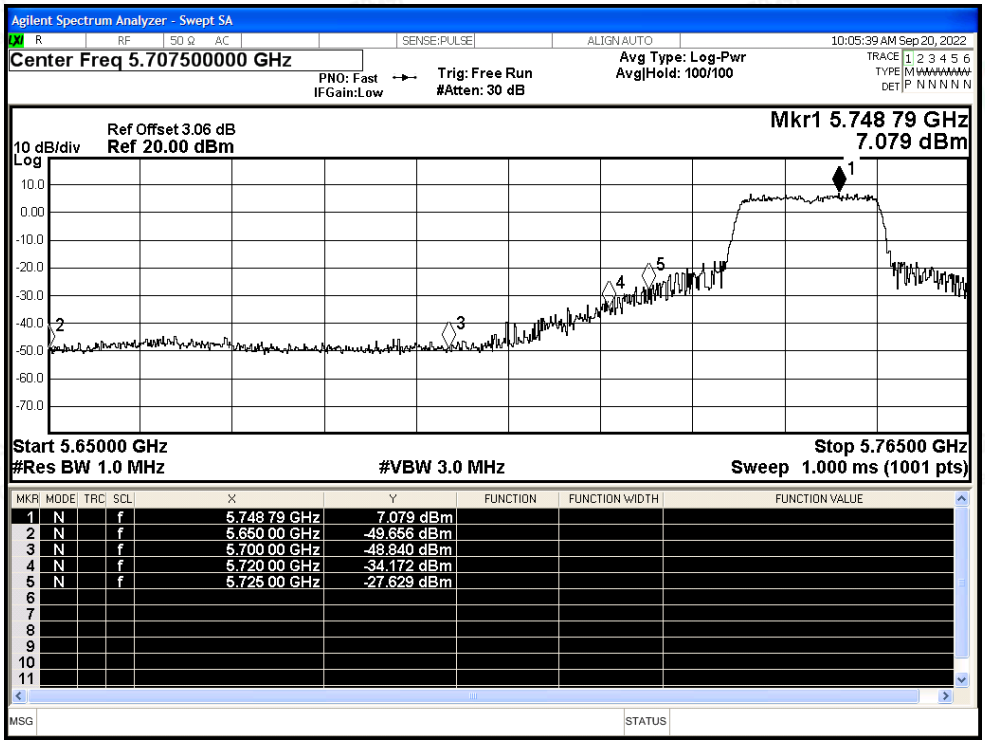

Restrict Band NVNT ax20 5745MHz Ant0 Average

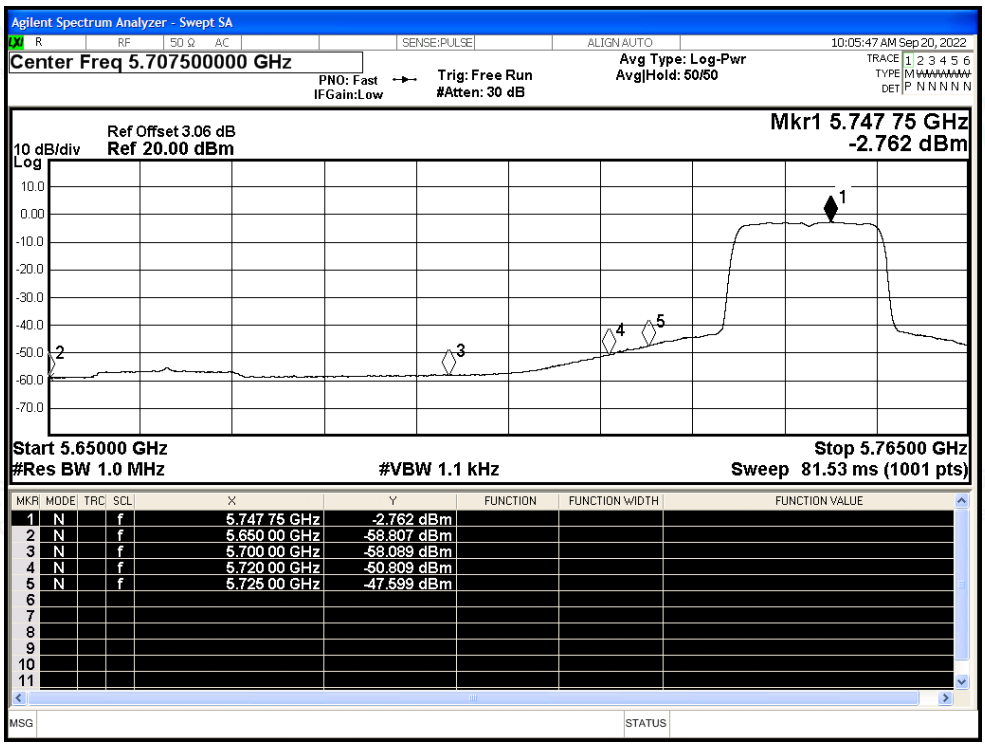

Restrict Band NVNT ax20 5825MHz Ant0 Peak

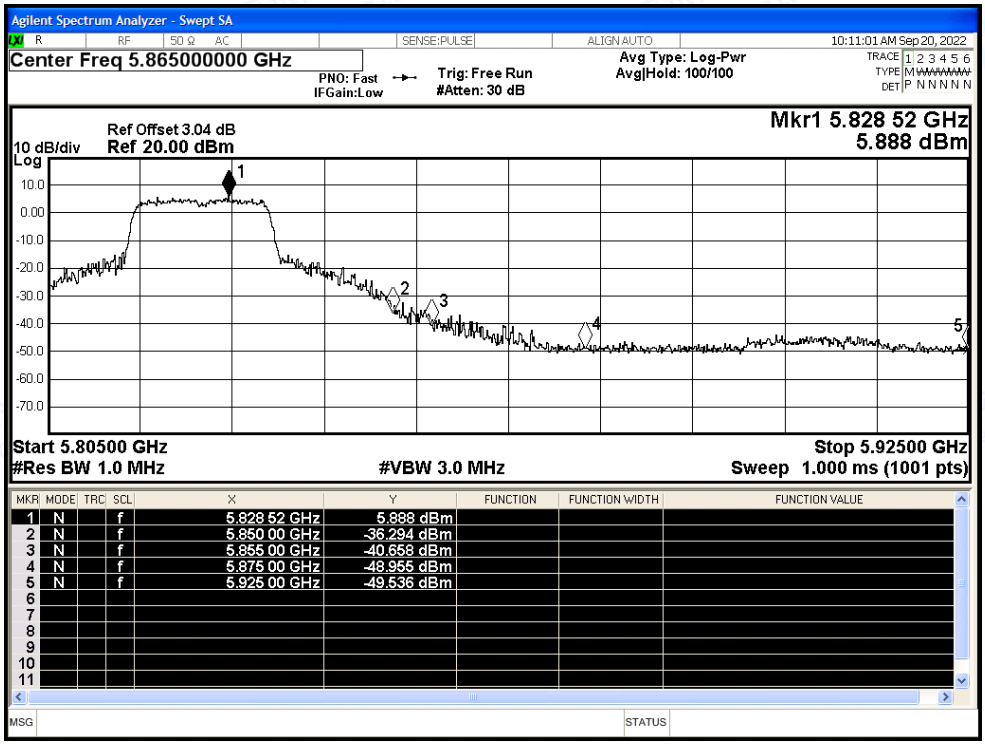

Restrict Band NVNT ax20 5825MHz Ant0 Average

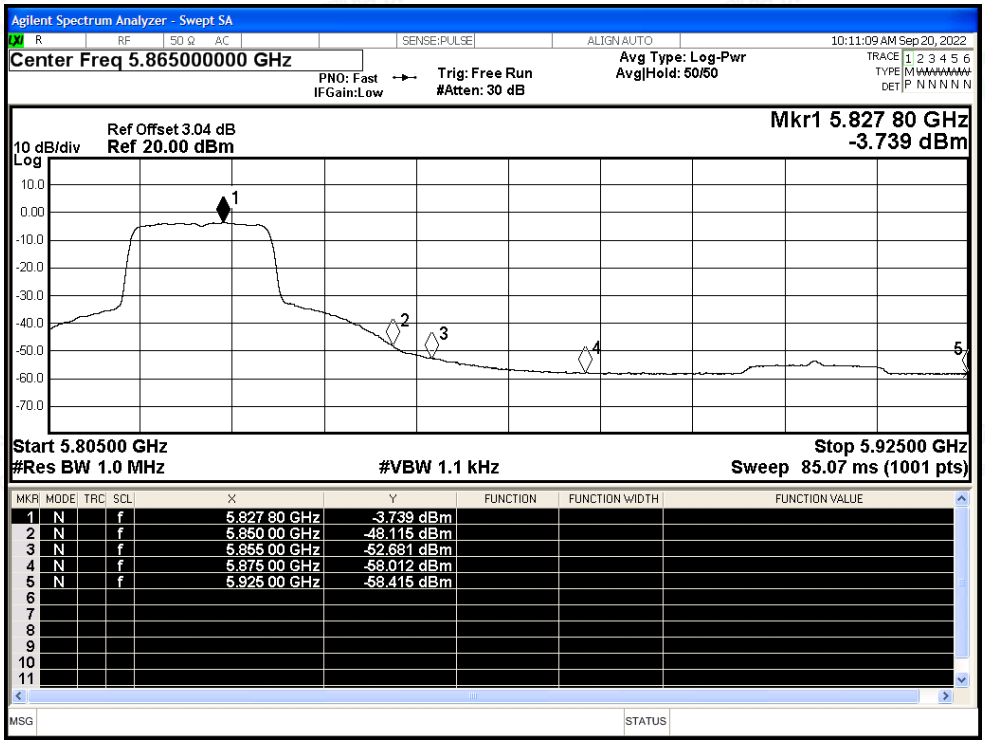

Restrict Band NVNT ax40 5755MHz Ant0 Peak

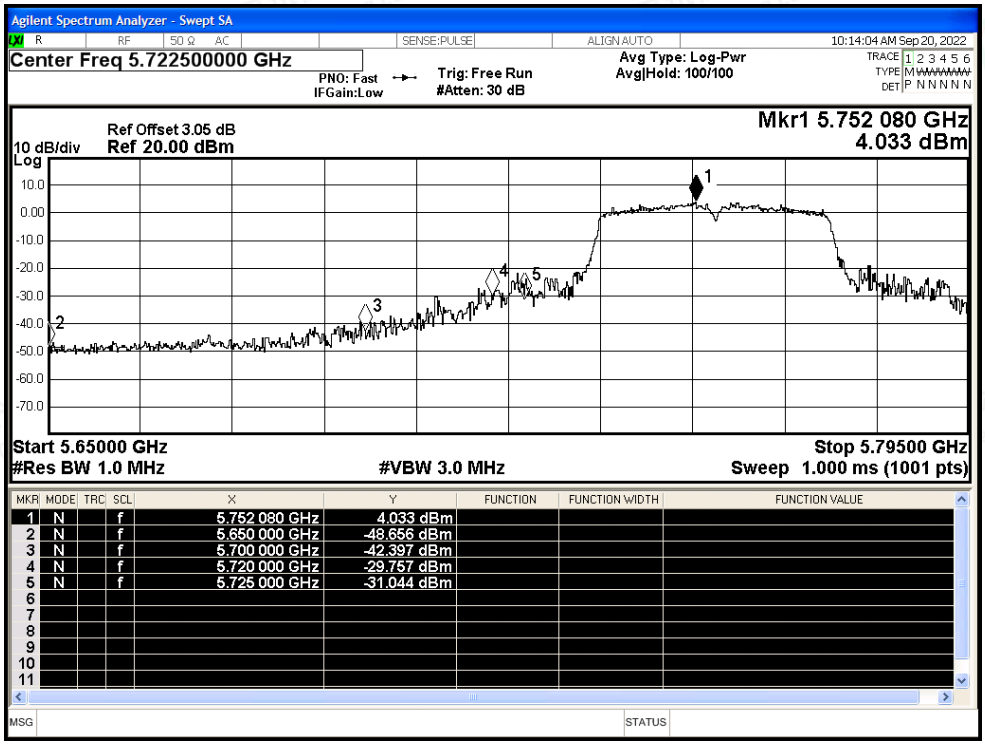

Restrict Band NVNT ax40 5755MHz Ant0 Average

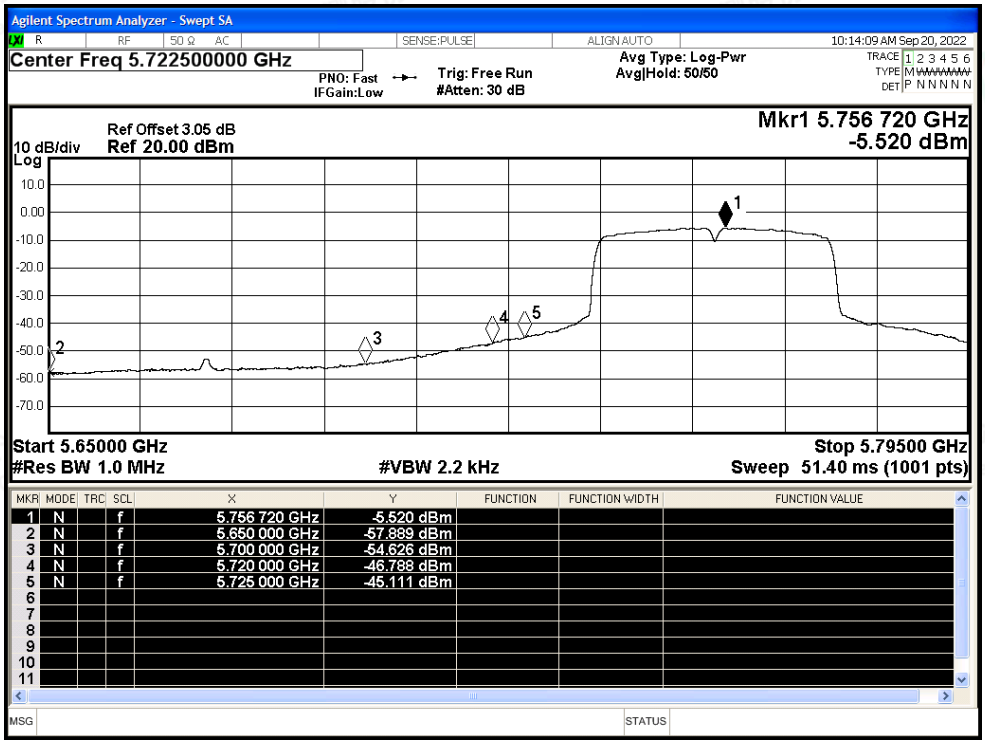

Restrict Band NVNT ax40 5795MHz Ant0 Peak

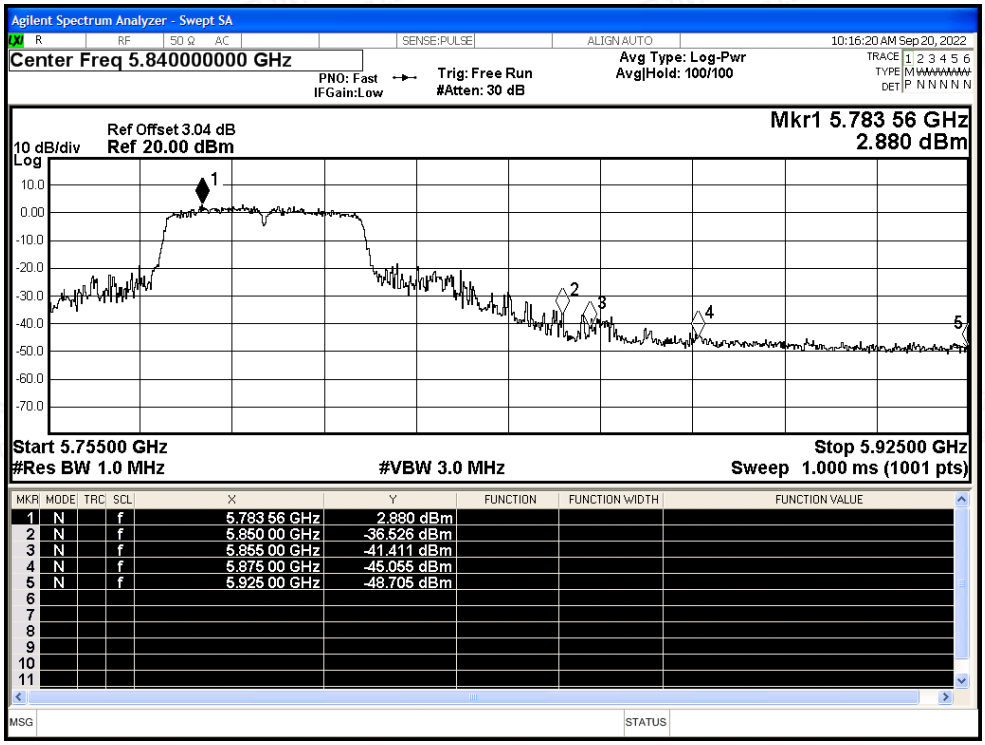

Restrict Band NVNT ax40 5795MHz Ant0 Average

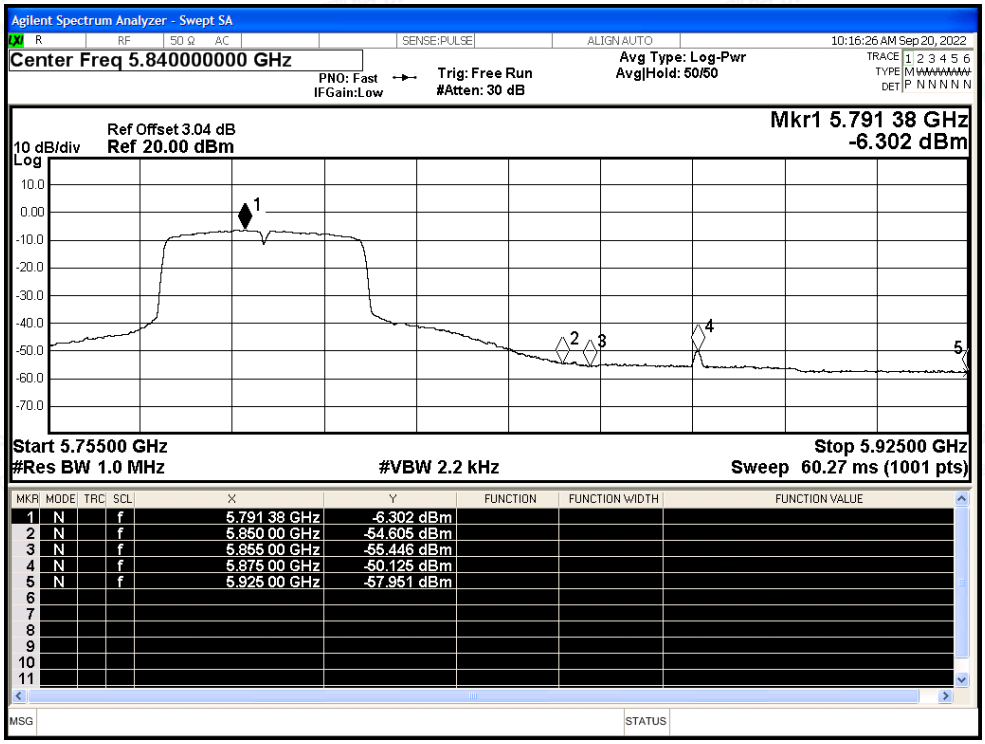

Restrict Band NVNT ax80 5775MHz Ant0 Peak

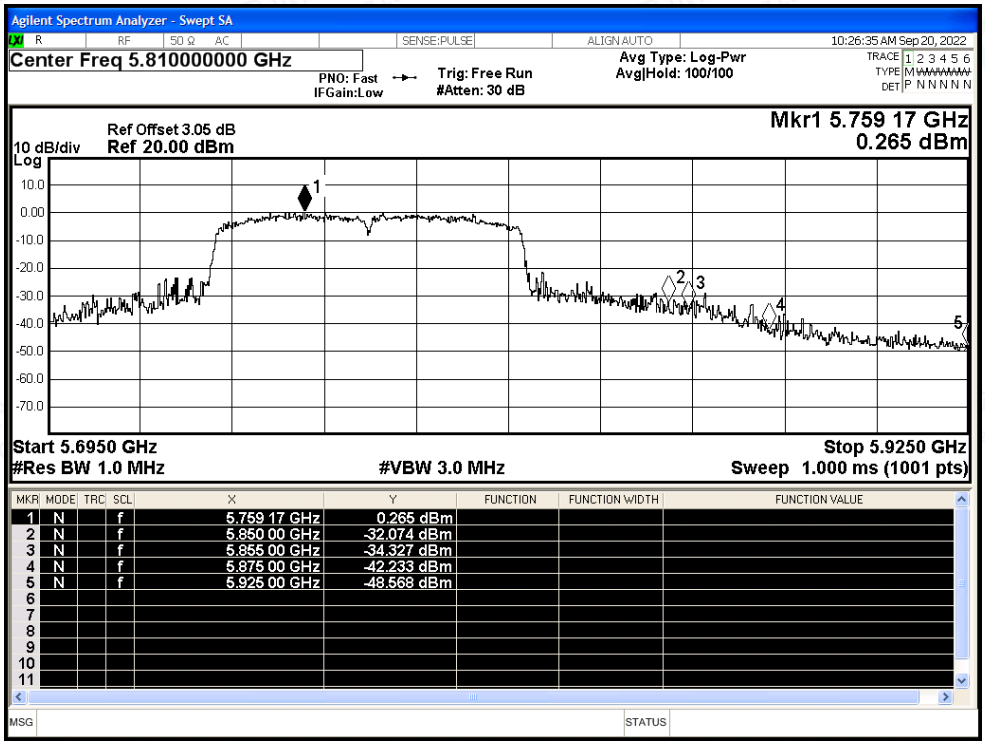

Restrict Band NVNT ax80 5775MHz Ant0 Average

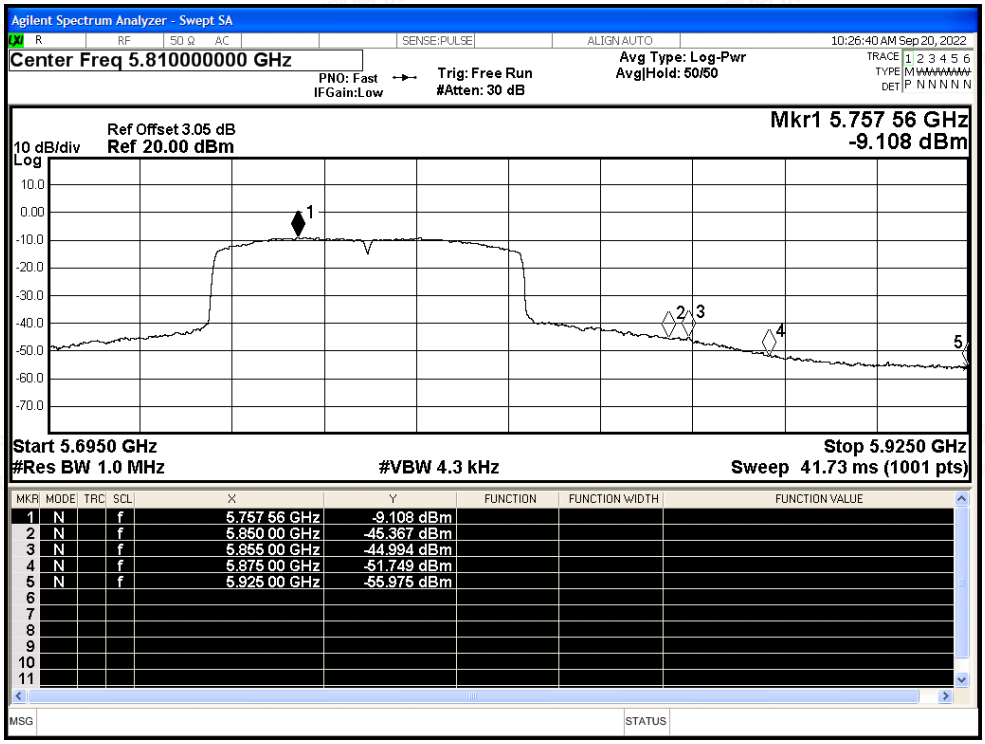

Restrict Band NVNT ax80 5775MHz Ant0 Peak

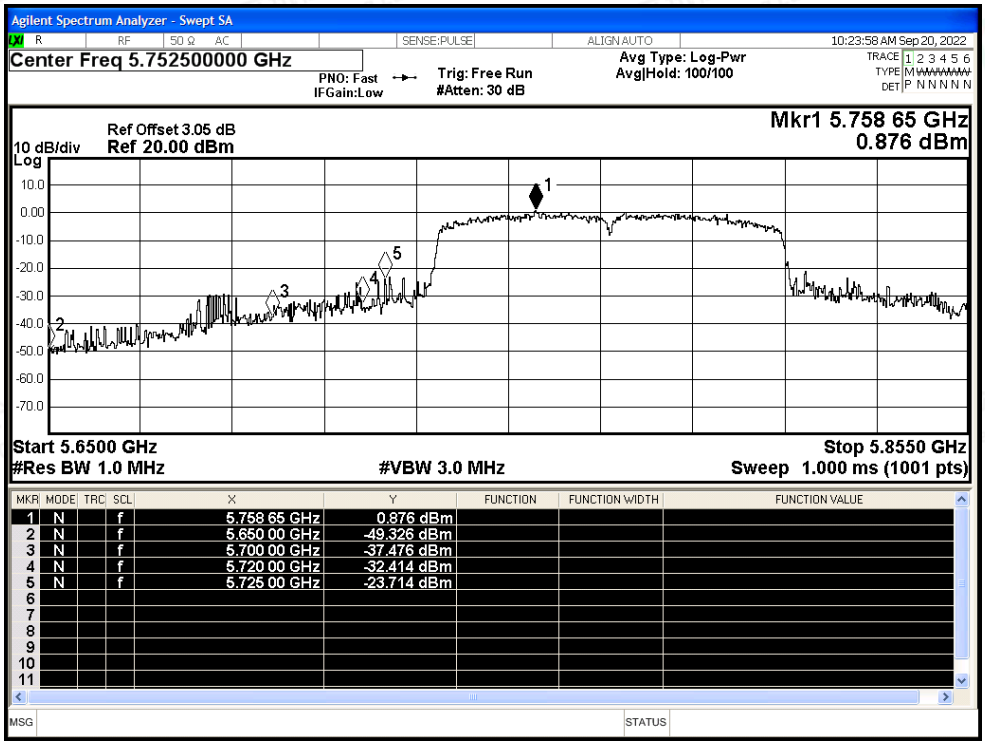

Restrict Band NVNT ax80 5775MHz Ant0 Average

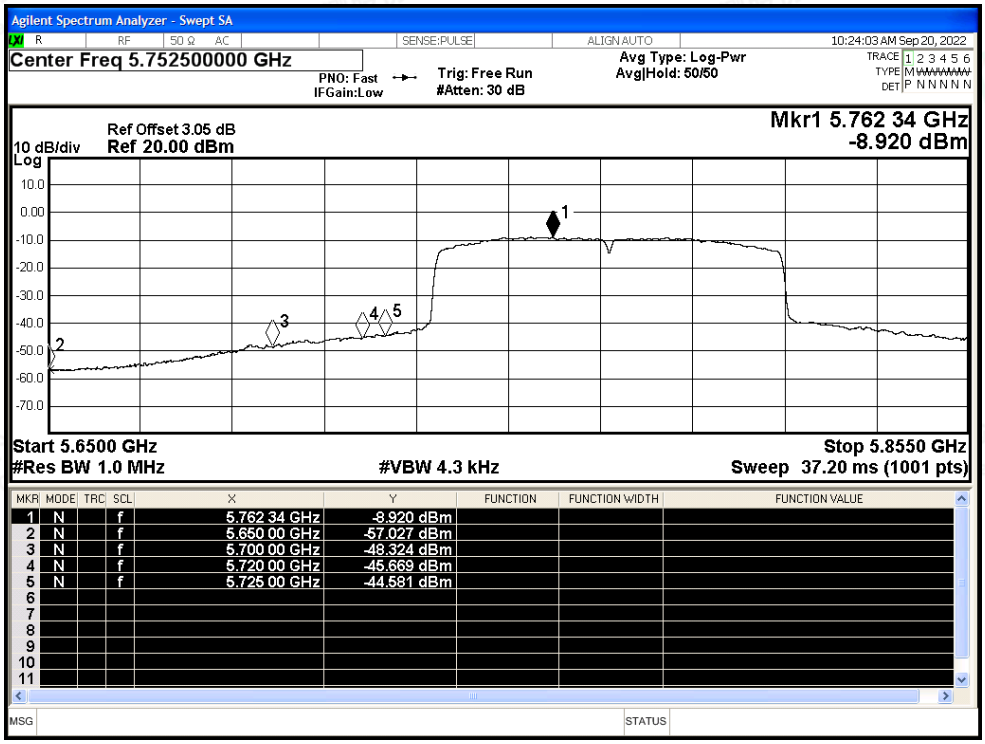

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5745	Ant1	5650	-48.74	2	-46.74	Peak	-27	Pass
NVNT	a	5745	Ant1	5650	-57.51	2	-55.51	Average	-27	Pass
NVNT	a	5745	Ant1	5700	-46.68	2	-44.68	Peak	10	Pass
NVNT	a	5745	Ant1	5700	-56.43	2	-54.43	Average	10	Pass
NVNT	a	5745	Ant1	5720	-27.91	2	-25.91	Peak	15.6	Pass
NVNT	a	5745	Ant1	5720	-46.66	2	-44.66	Average	15.6	Pass
NVNT	a	5745	Ant1	5725	-23.76	2	-21.76	Peak	27	Pass
NVNT	a	5745	Ant1	5725	-37.42	2	-35.42	Average	27	Pass
NVNT	a	5825	Ant1	5850	-41.36	2	-39.36	Peak	27	Pass
NVNT	a	5825	Ant1	5850	-51.84	2	-49.84	Average	27	Pass
NVNT	a	5825	Ant1	5855	-45.23	2	-43.23	Peak	15.6	Pass
NVNT	a	5825	Ant1	5855	-55.46	2	-53.46	Average	15.6	Pass
NVNT	a	5825	Ant1	5875	-47.92	2	-45.92	Peak	10	Pass
NVNT	a	5825	Ant1	5875	-57.06	2	-55.06	Average	10	Pass
NVNT	a	5825	Ant1	5925	-47.4	2	-45.4	Peak	-27	Pass
NVNT	a	5825	Ant1	5925	-57.79	2	-55.79	Average	-27	Pass
NVNT	n20	5745	Ant1	5650	-46.71	2	-44.71	Peak	-27	Pass
NVNT	n20	5745	Ant1	5650	-57.5	2	-55.5	Average	-27	Pass
NVNT	n20	5745	Ant1	5700	-47.68	2	-45.68	Peak	10	Pass
NVNT	n20	5745	Ant1	5700	-56.38	2	-54.38	Average	10	Pass
NVNT	n20	5745	Ant1	5720	-34.65	2	-32.65	Peak	15.6	Pass
NVNT	n20	5745	Ant1	5720	-46.69	2	-44.69	Average	15.6	Pass
NVNT	n20	5745	Ant1	5725	-22.02	2	-20.02	Peak	27	Pass
NVNT	n20	5745	Ant1	5725	-37.54	2	-35.54	Average	27	Pass
NVNT	n20	5825	Ant1	5850	-39.83	2	-37.83	Peak	27	Pass
NVNT	n20	5825	Ant1	5850	-52.06	2	-50.06	Average	27	Pass
NVNT	n20	5825	Ant1	5855	-45.16	2	-43.16	Peak	15.6	Pass
NVNT	n20	5825	Ant1	5855	-55.52	2	-53.52	Average	15.6	Pass
NVNT	n20	5825	Ant1	5875	-47.04	2	-45.04	Peak	10	Pass
NVNT	n20	5825	Ant1	5875	-57.13	2	-55.13	Average	10	Pass
NVNT	n20	5825	Ant1	5925	-47.59	2	-45.59	Peak	-27	Pass
NVNT	n20	5825	Ant1	5925	-57.65	2	-55.65	Average	-27	Pass
NVNT	n40	5755	Ant1	5650	-48.76	2	-46.76	Peak	-27	Pass
NVNT	n40	5755	Ant1	5650	-57.42	2	-55.42	Average	-27	Pass
NVNT	n40	5755	Ant1	5700	-37.15	2	-35.15	Peak	10	Pass
NVNT	n40	5755	Ant1	5700	-51.41	2	-49.41	Average	10	Pass
NVNT	n40	5755	Ant1	5720	-25.68	2	-23.68	Peak	15.6	Pass
NVNT	n40	5755	Ant1	5720	-35.9	2	-33.9	Average	15.6	Pass

NVNT	n40	5755	Ant1	5725	-23.99	2	-21.99	Peak	27	Pass
NVNT	n40	5755	Ant1	5725	-32.68	2	-30.68	Average	27	Pass
NVNT	n40	5795	Ant1	5850	-44.8	2	-42.8	Peak	27	Pass
NVNT	n40	5795	Ant1	5850	-54.61	2	-52.61	Average	27	Pass
NVNT	n40	5795	Ant1	5855	-47.03	2	-45.03	Peak	15.6	Pass
NVNT	n40	5795	Ant1	5855	-55.64	2	-53.64	Average	15.6	Pass
NVNT	n40	5795	Ant1	5875	-48.2	2	-46.2	Peak	10	Pass
NVNT	n40	5795	Ant1	5875	-57.07	2	-55.07	Average	10	Pass
NVNT	n40	5795	Ant1	5925	-48.26	2	-46.26	Peak	-27	Pass
NVNT	n40	5795	Ant1	5925	-58.08	2	-56.08	Average	-27	Pass
NVNT	ac20	5745	Ant1	5650	-47.67	2	-45.67	Peak	-27	Pass
NVNT	ac20	5745	Ant1	5650	-57.5	2	-55.5	Average	-27	Pass
NVNT	ac20	5745	Ant1	5700	-46.86	2	-44.86	Peak	10	Pass
NVNT	ac20	5745	Ant1	5700	-56.4	2	-54.4	Average	10	Pass
NVNT	ac20	5745	Ant1	5720	-33.53	2	-31.53	Peak	15.6	Pass
NVNT	ac20	5745	Ant1	5720	-46.91	2	-44.91	Average	15.6	Pass
NVNT	ac20	5745	Ant1	5725	-23.97	2	-21.97	Peak	27	Pass
NVNT	ac20	5745	Ant1	5725	-37.5	2	-35.5	Average	27	Pass
NVNT	ac20	5825	Ant1	5850	-40.24	2	-38.24	Peak	27	Pass
NVNT	ac20	5825	Ant1	5850	-51.93	2	-49.93	Average	27	Pass
NVNT	ac20	5825	Ant1	5855	-44.96	2	-42.96	Peak	15.6	Pass
NVNT	ac20	5825	Ant1	5855	-55.46	2	-53.46	Average	15.6	Pass
NVNT	ac20	5825	Ant1	5875	-46.4	2	-44.4	Peak	10	Pass
NVNT	ac20	5825	Ant1	5875	-56.88	2	-54.88	Average	10	Pass
NVNT	ac20	5825	Ant1	5925	-49.27	2	-47.27	Peak	-27	Pass
NVNT	ac20	5825	Ant1	5925	-57.61	2	-55.61	Average	-27	Pass
NVNT	ac40	5755	Ant1	5650	-47.4	2	-45.4	Peak	-27	Pass
NVNT	ac40	5755	Ant1	5650	-57.23	2	-55.23	Average	-27	Pass
NVNT	ac40	5755	Ant1	5700	-39.1	2	-37.1	Peak	10	Pass
NVNT	ac40	5755	Ant1	5700	-51.7	2	-49.7	Average	10	Pass
NVNT	ac40	5755	Ant1	5720	-25.39	2	-23.39	Peak	15.6	Pass
NVNT	ac40	5755	Ant1	5720	-35.95	2	-33.95	Average	15.6	Pass
NVNT	ac40	5755	Ant1	5725	-20.85	2	-18.85	Peak	27	Pass
NVNT	ac40	5755	Ant1	5725	-32.54	2	-30.54	Average	27	Pass
NVNT	ac40	5795	Ant1	5850	-44.44	2	-42.44	Peak	27	Pass
NVNT	ac40	5795	Ant1	5850	-54.71	2	-52.71	Average	27	Pass
NVNT	ac40	5795	Ant1	5855	-46.8	2	-44.8	Peak	15.6	Pass
NVNT	ac40	5795	Ant1	5855	-55.82	2	-53.82	Average	15.6	Pass
NVNT	ac40	5795	Ant1	5875	-48.54	2	-46.54	Peak	10	Pass
NVNT	ac40	5795	Ant1	5875	-57.08	2	-55.08	Average	10	Pass
NVNT	ac40	5795	Ant1	5925	-49.27	2	-47.27	Peak	-27	Pass

NVNT	ac40	5795	Ant1	5925	-57.93	2	-55.93	Average	-27	Pass
NVNT	ac80	5775	Ant1	5650	-43.48	2	-41.48	Peak	-27	Pass
NVNT	ac80	5775	Ant1	5650	-53.81	2	-51.81	Average	-27	Pass
NVNT	ac80	5775	Ant1	5700	-27.84	2	-25.84	Peak	10	Pass
NVNT	ac80	5775	Ant1	5700	-37.05	2	-35.05	Average	10	Pass
NVNT	ac80	5775	Ant1	5720	-23.99	2	-21.99	Peak	15.6	Pass
NVNT	ac80	5775	Ant1	5720	-32.49	2	-30.49	Average	15.6	Pass
NVNT	ac80	5775	Ant1	5725	-22.06	2	-20.06	Peak	27	Pass
NVNT	ac80	5775	Ant1	5725	-31.87	2	-29.87	Average	27	Pass
NVNT	ac80	5775	Ant1	5850	-25.14	2	-23.14	Peak	27	Pass
NVNT	ac80	5775	Ant1	5850	-38.26	2	-36.26	Average	27	Pass
NVNT	ac80	5775	Ant1	5855	-30.05	2	-28.05	Peak	15.6	Pass
NVNT	ac80	5775	Ant1	5855	-40.46	2	-38.46	Average	15.6	Pass
NVNT	ac80	5775	Ant1	5875	-35.86	2	-33.86	Peak	10	Pass
NVNT	ac80	5775	Ant1	5875	-47.84	2	-45.84	Average	10	Pass
NVNT	ac80	5775	Ant1	5925	-47.66	2	-45.66	Peak	-27	Pass
NVNT	ac80	5775	Ant1	5925	-57.09	2	-55.09	Average	-27	Pass
NVNT	ax20	5745	Ant1	5650	-50.69	2	-48.69	Peak	-27	Pass
NVNT	ax20	5745	Ant1	5650	-59.12	2	-57.12	Average	-27	Pass
NVNT	ax20	5745	Ant1	5700	-50.68	2	-48.68	Peak	10	Pass
NVNT	ax20	5745	Ant1	5700	-58.19	2	-56.19	Average	10	Pass
NVNT	ax20	5745	Ant1	5720	-38.13	2	-36.13	Peak	15.6	Pass
NVNT	ax20	5745	Ant1	5720	-52.47	2	-50.47	Average	15.6	Pass
NVNT	ax20	5745	Ant1	5725	-33.05	2	-31.05	Peak	27	Pass
NVNT	ax20	5745	Ant1	5725	-49.49	2	-47.49	Average	27	Pass
NVNT	ax20	5825	Ant1	5850	-35.16	2	-33.16	Peak	27	Pass
NVNT	ax20	5825	Ant1	5850	-48.53	2	-46.53	Average	27	Pass
NVNT	ax20	5825	Ant1	5855	-37.66	2	-35.66	Peak	15.6	Pass
NVNT	ax20	5825	Ant1	5855	-52.74	2	-50.74	Average	15.6	Pass
NVNT	ax20	5825	Ant1	5875	-48.79	2	-46.79	Peak	10	Pass
NVNT	ax20	5825	Ant1	5875	-58.17	2	-56.17	Average	10	Pass
NVNT	ax20	5825	Ant1	5925	-48.93	2	-46.93	Peak	-27	Pass
NVNT	ax20	5825	Ant1	5925	-58.31	2	-56.31	Average	-27	Pass
NVNT	ax40	5755	Ant1	5650	-48.08	2	-46.08	Peak	-27	Pass
NVNT	ax40	5755	Ant1	5650	-58.42	2	-56.42	Average	-27	Pass
NVNT	ax40	5755	Ant1	5700	-44.99	2	-42.99	Peak	10	Pass
NVNT	ax40	5755	Ant1	5700	-54.24	2	-52.24	Average	10	Pass
NVNT	ax40	5755	Ant1	5720	-28.81	2	-26.81	Peak	15.6	Pass
NVNT	ax40	5755	Ant1	5720	-45.08	2	-43.08	Average	15.6	Pass
NVNT	ax40	5755	Ant1	5725	-25.54	2	-23.54	Peak	27	Pass
NVNT	ax40	5755	Ant1	5725	-43.1	2	-41.1	Average	27	Pass

NVNT	ax40	5795	Ant1	5850	-37.84	2	-35.84	Peak	27	Pass
NVNT	ax40	5795	Ant1	5850	-50.57	2	-48.57	Average	27	Pass
NVNT	ax40	5795	Ant1	5855	-42.99	2	-40.99	Peak	15.6	Pass
NVNT	ax40	5795	Ant1	5855	-52.21	2	-50.21	Average	15.6	Pass
NVNT	ax40	5795	Ant1	5875	-43.55	2	-41.55	Peak	10	Pass
NVNT	ax40	5795	Ant1	5875	-50.58	2	-48.58	Average	10	Pass
NVNT	ax40	5795	Ant1	5925	-48.93	2	-46.93	Peak	-27	Pass
NVNT	ax40	5795	Ant1	5925	-57.7	2	-55.7	Average	-27	Pass
NVNT	ax80	5775	Ant1	5850	-33.97	2	-31.97	Peak	27	Pass
NVNT	ax80	5775	Ant1	5850	-45.41	2	-43.41	Average	27	Pass
NVNT	ax80	5775	Ant1	5855	-37.54	2	-35.54	Peak	15.6	Pass
NVNT	ax80	5775	Ant1	5855	-44.93	2	-42.93	Average	15.6	Pass
NVNT	ax80	5775	Ant1	5875	-40.27	2	-38.27	Peak	10	Pass
NVNT	ax80	5775	Ant1	5875	-51.35	2	-49.35	Average	10	Pass
NVNT	ax80	5775	Ant1	5925	-47.98	2	-45.98	Peak	-27	Pass
NVNT	ax80	5775	Ant1	5925	-55.7	2	-53.7	Average	-27	Pass
NVNT	ax80	5775	Ant1	5650	-48.69	2	-46.69	Peak	-27	Pass
NVNT	ax80	5775	Ant1	5650	-57.54	2	-55.54	Average	-27	Pass
NVNT	ax80	5775	Ant1	5700	-40.1	2	-38.1	Peak	10	Pass
NVNT	ax80	5775	Ant1	5700	-48.45	2	-46.45	Average	10	Pass
NVNT	ax80	5775	Ant1	5720	-32.69	2	-30.69	Peak	15.6	Pass
NVNT	ax80	5775	Ant1	5720	-45.1	2	-43.1	Average	15.6	Pass
NVNT	ax80	5775	Ant1	5725	-33.13	2	-31.13	Peak	27	Pass
NVNT	ax80	5775	Ant1	5725	-44.37	2	-42.37	Average	27	Pass

Test Graphs

Restrict Band NVNT a 5745MHz Ant1 Peak

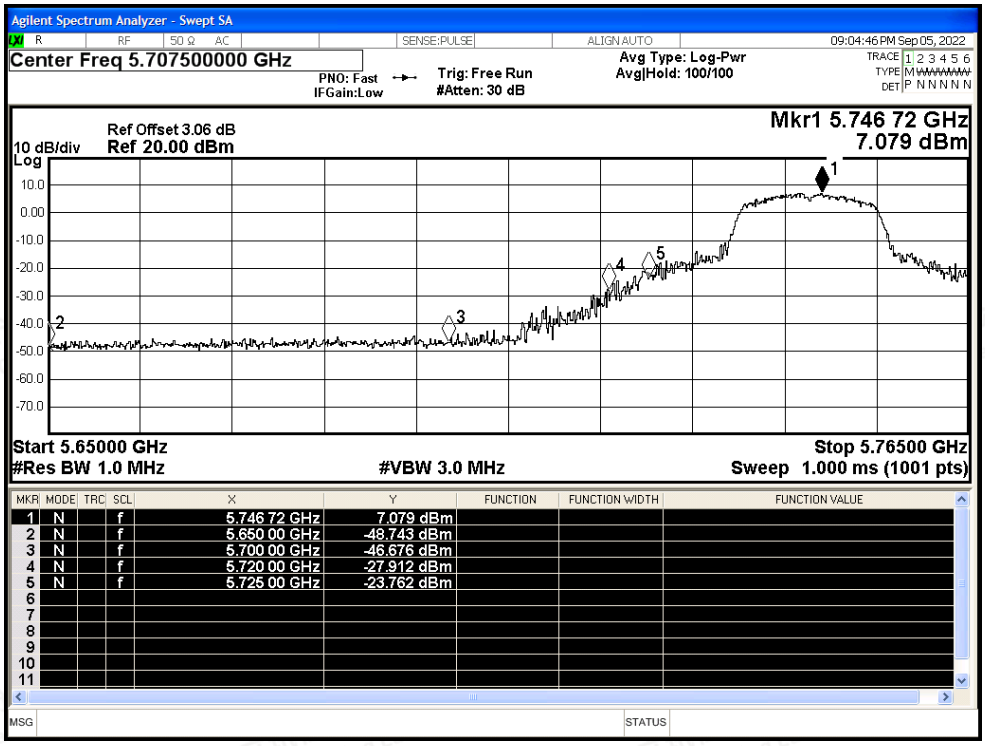

Restrict Band NVNT a 5745MHz Ant1 Average

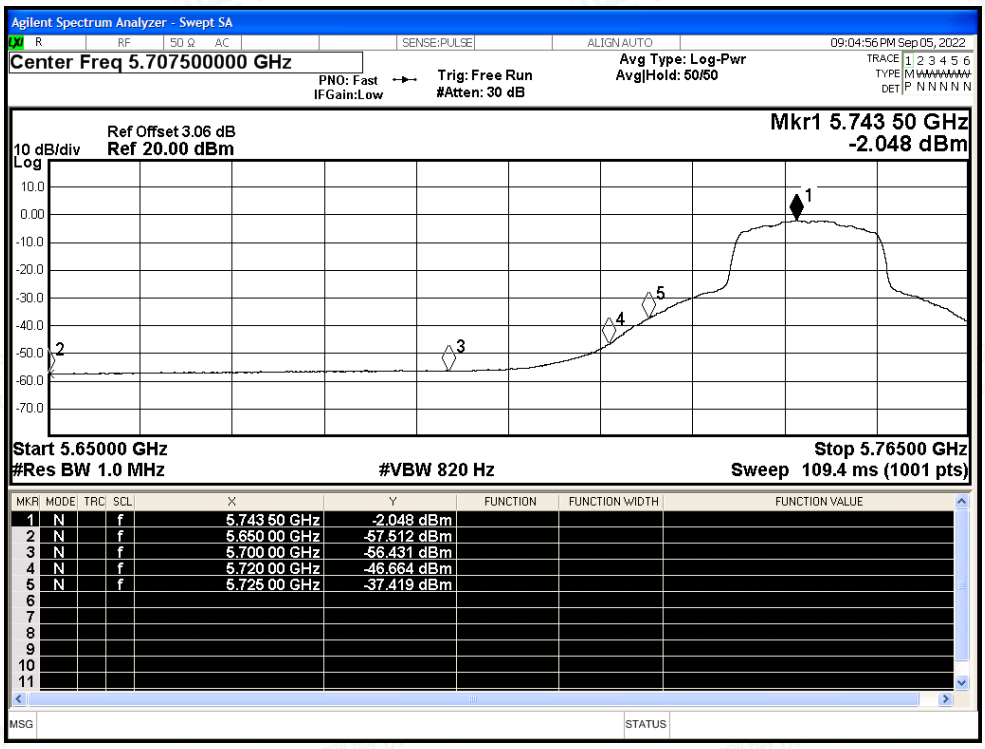

Restrict Band NVNT a 5825MHz Ant1 Peak

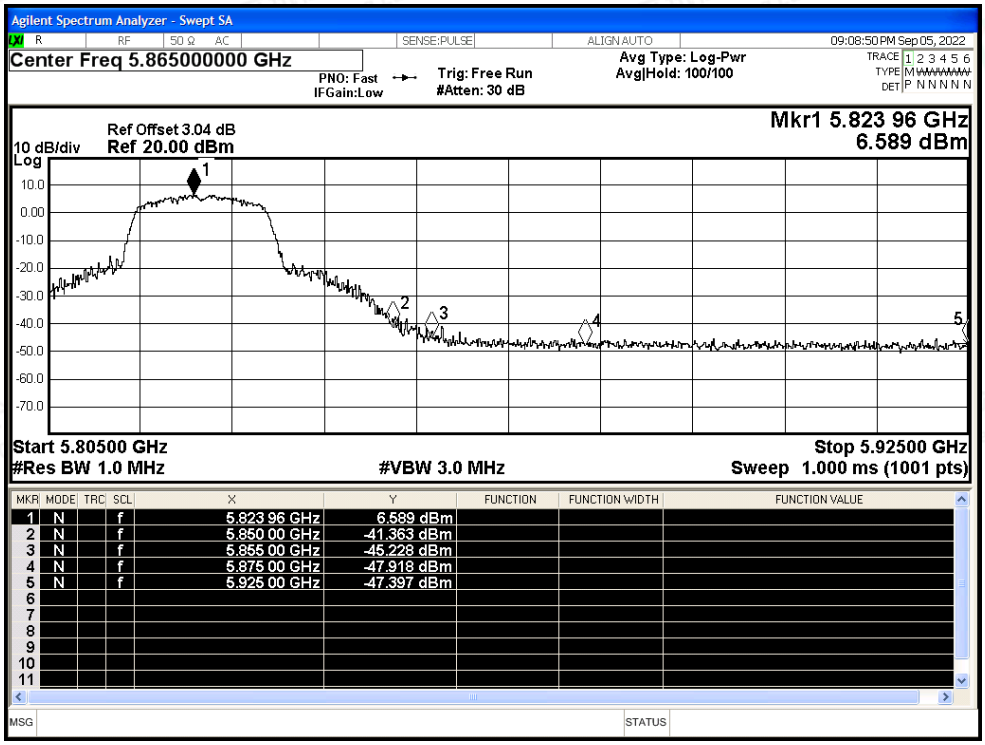
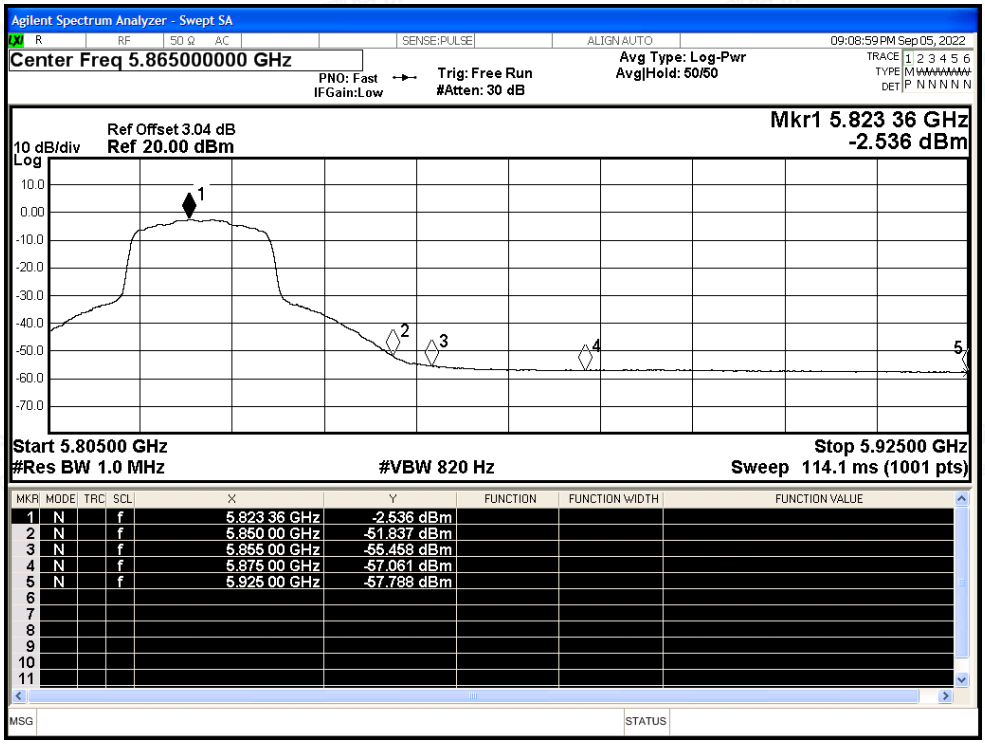
Restrict Band NVNT a 5825MHz Ant1 Average