

TEST REPORT

Product Name : Bluetooth module for LoudBoxes
Brand Mark : N/A
Model No. : Q21
FCC ID : 2A8Q5-ALMQ21LB
Report Number : BLA-EMC-202209-A8602
Date of Sample Receipt : 2022/10/3
Date of Test : 2022/10/3 to 2022/10/18
Date of Issue : 2022/10/19
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Shenzhen ALM-IoT Technology Ltd.
R303, Building 18, ZHX Innovation Industrial City, No.11 Gan Li Rd., Jihua St.,shenzhen.

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District, Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by: *charlie*

Review by: *Sueels*

Approved by: *Blue Zhong*

Date:

2022/10/19



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/10/19	Original

TABLE OF CONTENTS

1 TEST SUMMARY	6
2 GENERAL INFORMATION	7
3 GENERAL DESCRIPTION OF E.U.T.....	7
4 TEST ENVIRONMENT	8
5 TEST MODE	8
6 MEASUREMENT UNCERTAINTY	8
7 DESCRIPTION OF SUPPORT UNIT	9
8 LABORATORY LOCATION	9
9 TEST INSTRUMENTS LIST	10
10 ANTENNA REQUIREMENT	14
10.1 CONCLUSION	14
11 CONDUCTED SPURIOUS EMISSIONS	15
11.1 LIMITS	15
11.2 BLOCK DIAGRAM OF TEST SETUP	15
11.3 TEST DATA	16
12 20DB BANDWIDTH	17
12.1 BLOCK DIAGRAM OF TEST SETUP	17
12.2 TEST DATA	17
13 CONDUCTED PEAK OUTPUT POWER	18
13.1 LIMITS	18
13.2 BLOCK DIAGRAM OF TEST SETUP	18
13.3 TEST DATA	19
14 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	20
14.1 LIMITS	20
14.2 BLOCK DIAGRAM OF TEST SETUP	20
14.3 PROCEDURE	20
14.4 TEST DATA	22
15 RADIATED SPURIOUS EMISSIONS	24
15.1 LIMITS	24

15.2 BLOCK DIAGRAM OF TEST SETUP	25
15.3 PROCEDURE	25
15.4 TEST DATA	27
16 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	35
16.1 LIMITS	35
16.2 BLOCK DIAGRAM OF TEST SETUP	36
16.3 PROCEDURE	36
16.4 TEST DATA	38
17 CONDUCTED BAND EDGES MEASUREMENT	42
17.1 LIMITS	42
17.2 BLOCK DIAGRAM OF TEST SETUP	42
17.3 TEST DATA	43
18 DWELL TIME	44
18.1 LIMITS	44
18.2 BLOCK DIAGRAM OF TEST SETUP	44
18.3 TEST DATA	45
19 HOPPING CHANNEL NUMBER	46
19.1 LIMITS	46
19.2 BLOCK DIAGRAM OF TEST SETUP	46
19.3 TEST DATA	46
20 CARRIER FREQUENCIES SEPARATION	47
20.1 LIMITS	47
20.2 BLOCK DIAGRAM OF TEST SETUP	47
20.3 TEST DATA	47
21 APPENDIX	48
21.1 20dB EMISSION BANDWIDTH	48
<i>Test Graphs</i>	49
21.2 OCCUPIED CHANNEL BANDWIDTH	54
<i>Test Graphs</i>	55
21.3 MAXIMUM CONDUCTED OUTPUT POWER	60
<i>Test Graphs</i>	61
21.4 CARRIER FREQUENCY SEPARATION	66
<i>Test Graphs</i>	67

TIME OF OCCUPANCY	69
<i>Test Graphs</i>	70
21.5 NUMBER OF HOPPING CHANNELS	73
<i>Test Graphs</i>	74
21.6 BAND EDGE MEASUREMENTS	76
<i>Test Graphs</i>	77
21.7 CONDUCTED SPURIOUS EMISSION	83
<i>Test Graphs</i>	84
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	98
APPENDIX B: PHOTOGRAPHS OF EUT	错误! 未定义书签。

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass

2 GENERAL INFORMATION

Applicant	Shenzhen ALM-IoT Technology Ltd.
Address	R303, Building 18, ZHX Innovation Industrial City, No.11 Gan Li Rd., Jihua St.,shenzhen.
Manufacturer	Shenzhen ALM-IoT Technology Ltd.
Address	R303, Building 18, ZHX Innovation Industrial City, No.11 Gan Li Rd., Jihua St.,shenzhen.
Factory	Shenzhen ALM-IoT Technology Ltd.
Address	R303, Building 18, ZHX Innovation Industrial City, No.11 Gan Li Rd., Jihua St.,shenzhen.
Product Name	Bluetooth module for LoudBoxes
Test Model No.	Q21

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.0
Software Version	V1.0
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK,8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi (Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	3.85Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission, DH1,DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned Only the 8-DPSK of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2023
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2023
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2023
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2023
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2023

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2023
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2023
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2023
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2023
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2023

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2023
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2023
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2023

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2023
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2023
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2023

Test Equipment Of Dwell Time

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2023
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2023
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2023

Test Equipment Of Hopping Channel Number

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023

Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2023
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2023
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2023

Test Equipment Of Carrier Frequencies Separation

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2023
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2023
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2023

Test Equipment Of 20dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2023
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2023
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2023

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2023
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2023
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2023
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2023

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2023
LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2023
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2023
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

10 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


10.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

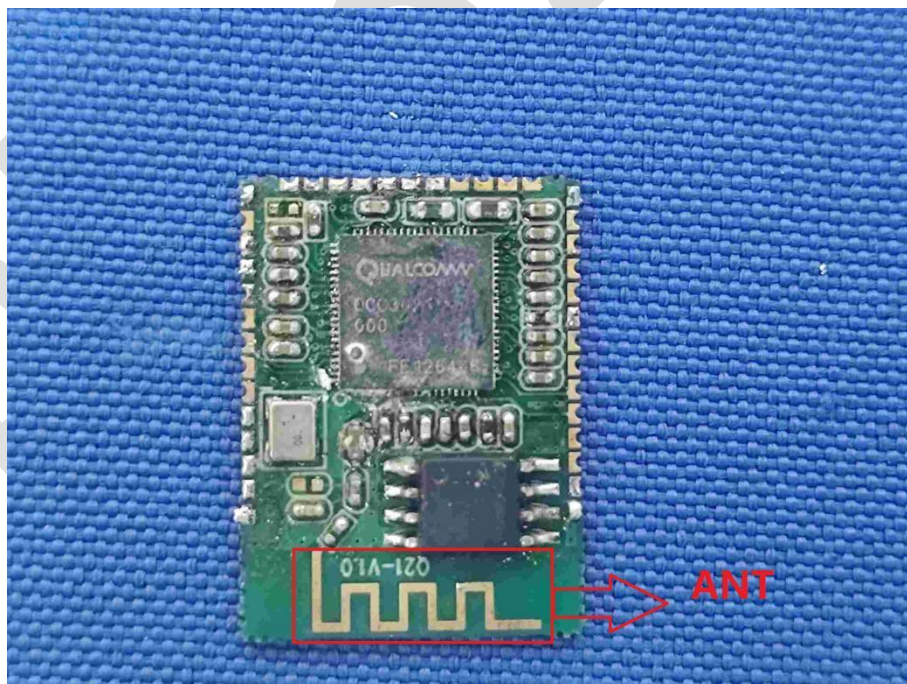


11 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

11.2 BLOCK DIAGRAM OF TEST SETUP

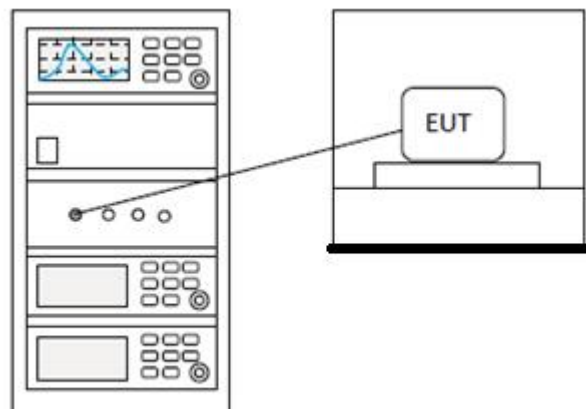

11.3 TEST DATA


Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

12 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

12.1 BLOCK DIAGRAM OF TEST SETUP

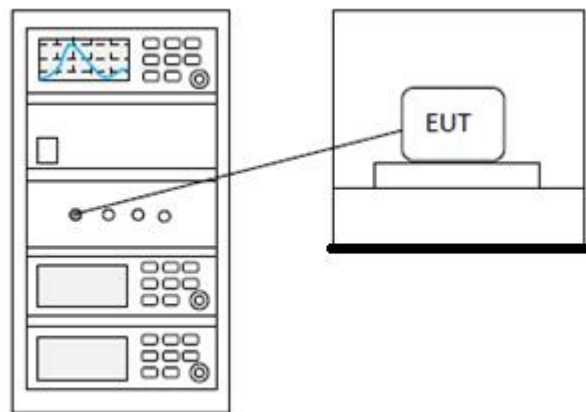

12.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


13 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

13.2 BLOCK DIAGRAM OF TEST SETUP

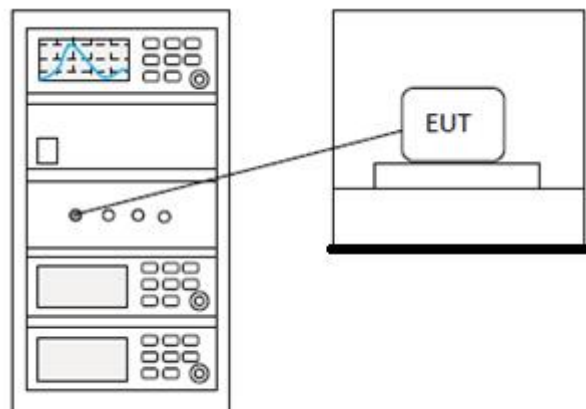

13.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

14 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

14.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

14.2 BLOCK DIAGRAM OF TEST SETUP

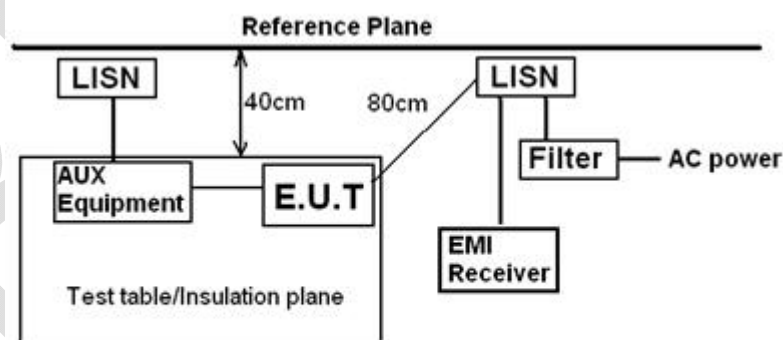

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

14.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.