

Shenzhen Yunding Communication Electronics Co., LTD

TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

APPROVAL SHEET

Wan sheng shi lian

CUSTOMER:

2.4-5GHz-Ver1.0-1.13 Gray-L70MM-RF Gen 1

DESCRIPTION:

PART NO.:

CUS PART NO.:

2024/3/18

D A T E:

Yunding signature

ENGINEERING DEPARTMENT	Q C DEPARTMENT	SALES DEPARTMENT

Customer signature

ENGINEERING DEPARTMENT	Q C DEPARTMENT	PURCHASING DEPARTMENT

TEL: 0755 23073599

✂ Approval in duplicate, please signed by your company.

Shenzhen Yunding Communication Electronics Co., LTD


TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

1.Test items and equipment

	Test items	Equipment
1. S11-parameter	1. Return Loss 2. VSWR	network analyzer: Agilent E5071B HP 8753D
2.Active test	1. Transmitting power 2. Receiving sensitivity	1. Darkroom: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2.general-purpose tester : Agilent 8960 E5515B ×2 StarPoint SP6011 Cmw500
3.Passive test	1.Gain 2.Efficiency	1. Darkroom: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. network analyzer: Agilent E5071B HP 8753D

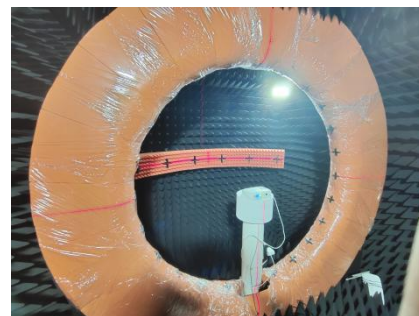

Shenzhen Yunding Communication Electronics Co., LTD


TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

2. Antenna performance

SWR

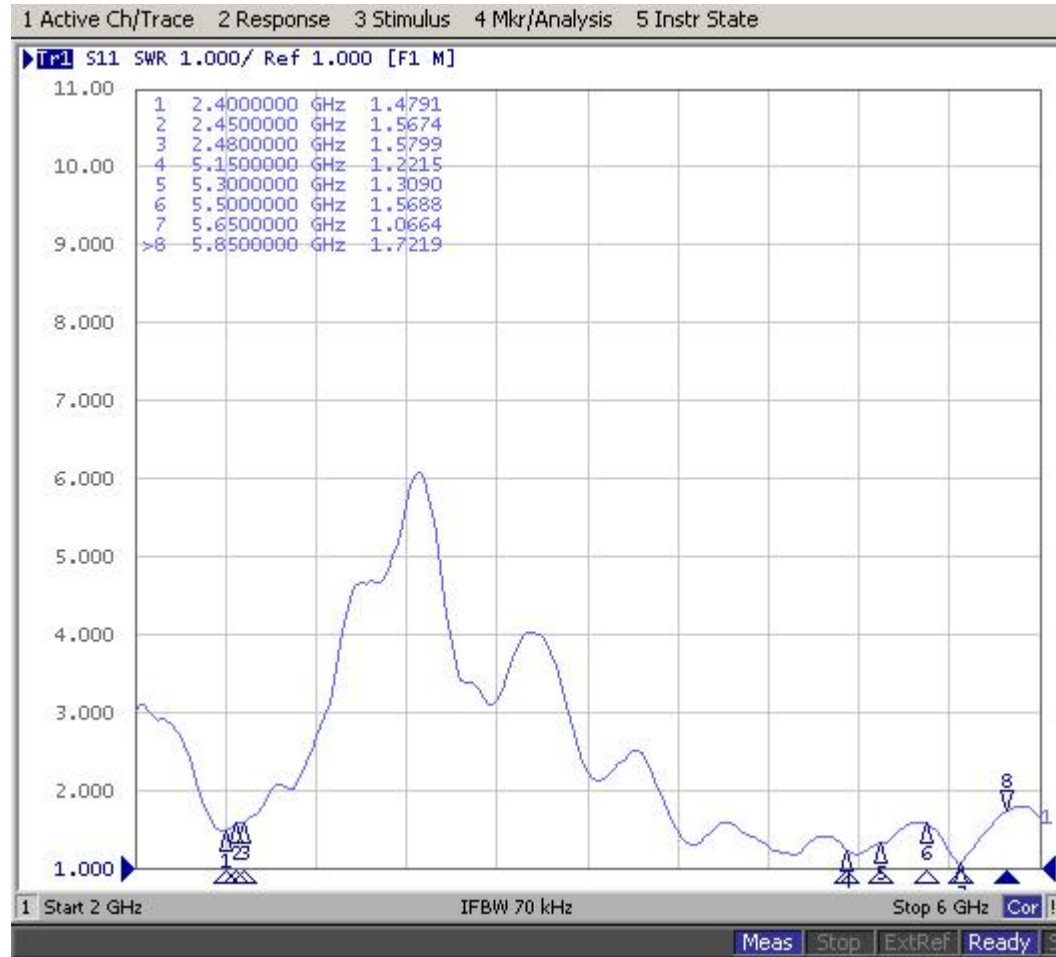

Shenzhen Yunding Communication Electronics Co., LTD

TEL: +86 0755-23073599


FAX: +86 0755-23097189

E-mail:wht0809@163.com


3. Antenna efficiency and gain

Passive Test For WIFI2.4		
Freq (MHz)	Effi (%)	Gain (dBi)
2400	52.79	0.91
2410	53.94	0.96
2420	52.11	0.9
2430	53.01	0.99
2440	57.67	1.43
2450	63.29	1.92
2460	62.3	1.88
2470	65.18	2
2480	68.5	2.1
2490	73.41	2.55
2500	71.9	2.51


2450.000MHz

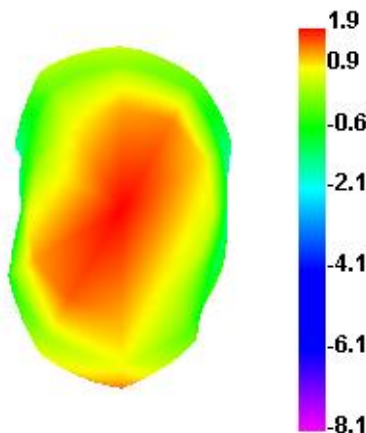


2450.000MHz H

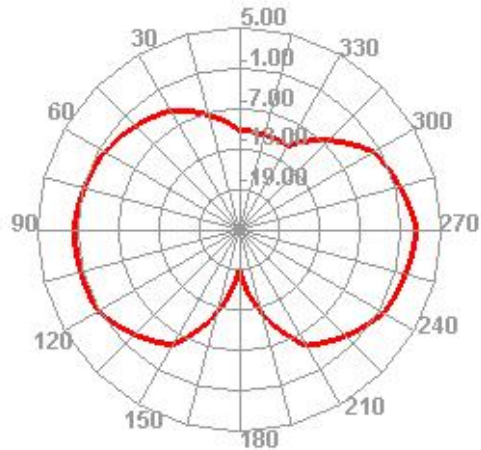

2450.000MHz E1

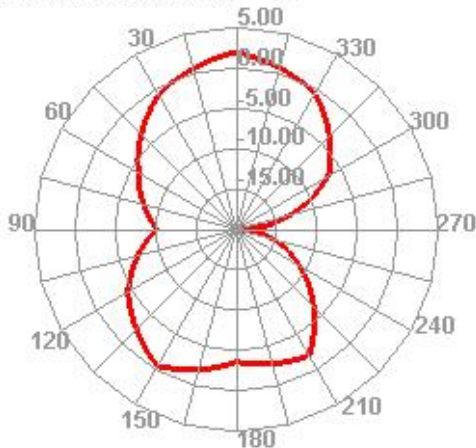

2450.000MHz E2

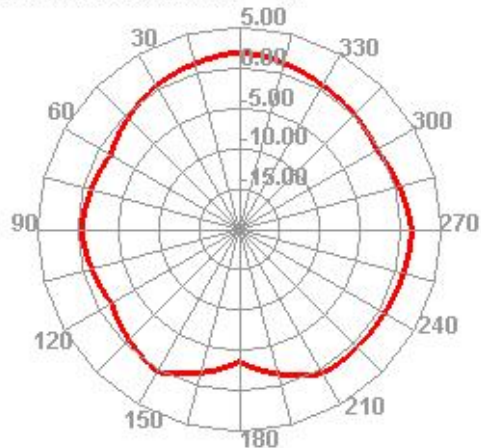

Shenzhen Yunding Communication Electronics Co., LTD


TEL: +86 0755-23073599

FAX: +86 0755-23097189


E-mail:wht0809@163.com

Passive Test For WIFI5.8		
Freq (MHz)	Effi (%)	Gain (dBi)
5150	55.49	2.56
5200	52.58	2.08
5250	50.52	1.53
5300	53.88	2.34
5350	59.16	3.2
5400	65.7	3.46
5450	57.36	2.96
5500	55.25	2.87
5550	51.22	2.4
5600	44.64	1.57
5650	44.98	1.34
5700	49.18	2.02
5750	60.24	3.43
5800	61.27	3.38
5850	53.19	2.78


5500.000MHz

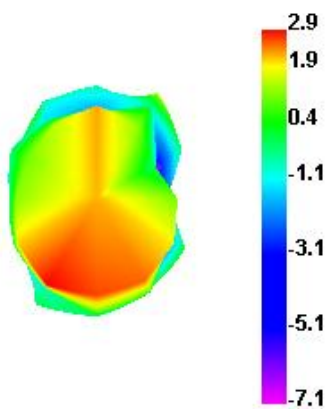


5500.000MHz H

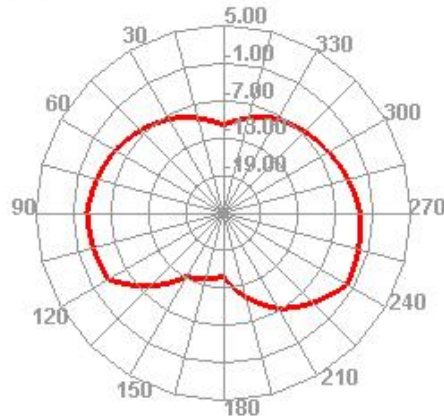

5500.000MHz E1

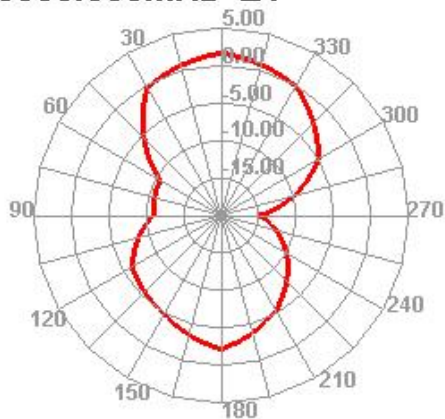

5500.000MHz E2

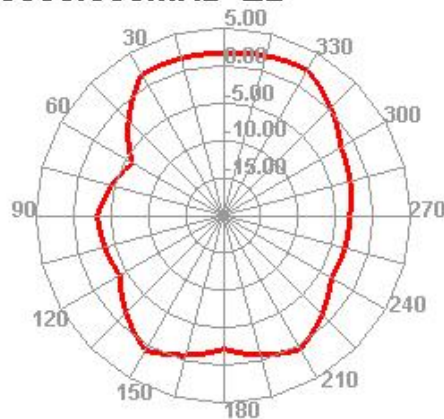


Shenzhen Yunding Communication Electronics Co., LTD

TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

4.Antenna structure diagram:

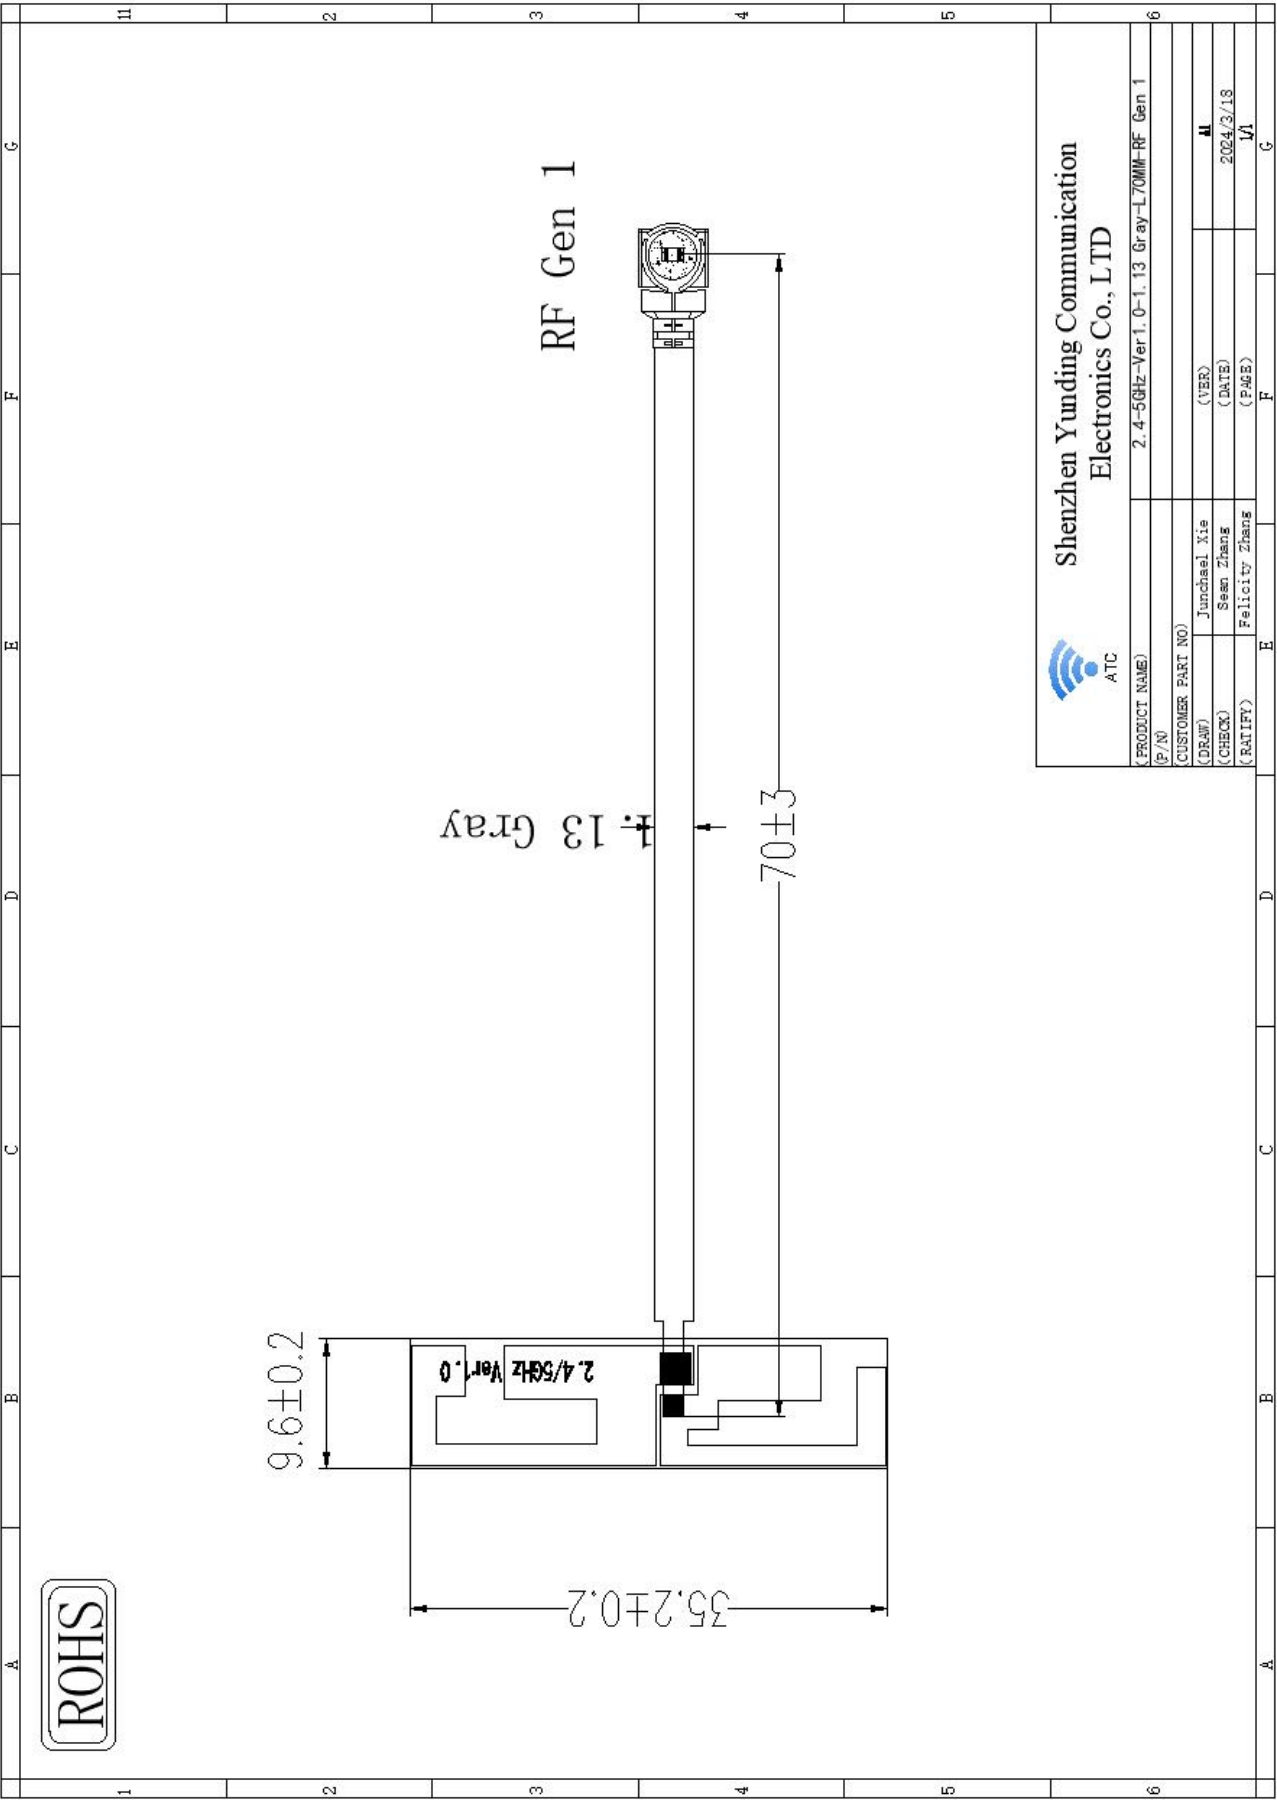

Shenzhen Yunding Communication Electronics Co., LTD

TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

Technical parameters of electrical appliances

Electrical Specifications

Frequency Range	2400~2500/5150~5850MHz
VSWR	≤2.0
Input Impedance	50 Ω
Gain	3 DBI

Mechanical Specifications

Antenna color	Grey
Input connector	IPEX 1
Antenna length	70mm
Working Temperature	-40℃~+85℃
Working Humidity	20~80%