

G6A87E Antenna Report

Table of Contents

G6A87E Antenna Report..... 1

 General Information 2

 Frequency range of operation: 2

 Antenna Types:..... 2

 Antenna Gain: 2

 Measurement Test Method: 2

General Information

This is the antenna report for device with model number G6A87E.

Frequency range of operation:

Wi-Fi Antenna:

- Wi-Fi: 2.4 to 2.482 GHz and 5.15 to 5.85 GHz BT

BT Antenna:

- Bluetooth: 2.4 to 2.48 GHz

Zigbee&LoRa Antenna:

- Zigbee: 2.4 to 2.48GHz
- Lora: 863Mhz ~930Mhz

Antenna Types:

Wi-Fi: PCB IFA antenna, BT antenna: PCB IFA antenna, Zigbee&LoRa antenna: FPC IFA antenna

Antenna Gain:

WIFI		BT		Lora		Zigbee	
2400~2483.5MHz	4dBi	2400~2480MHz	4dBi	863~930MHz	4dBi	2400~2480MHz	3.8dBi
5150~5850MHz	4dBi						

Measurement Test Method:

Solder pigtails on feeding point of antenna and measure passive antenna performance by VNA and OTA chamber system.

Test Equipment used:

VNA: Agilent E5071C

OTA chamber: Mini-chamber BST-Mini-M

Test engineer: Kevin Qin

Test date: July 11th 2023

Software for Measurement:

BST-passive

Test Set-up:

1. Set up the device on the turn table and connect the pigtails to the RF cable.
2. Measure the 3D passive performance according to the following coordinate axis.


Turntable – Phi: 0-165°, step size: 15°, clockwise rotation

Please see separate test set-up exhibit for setup photographs


2D radiated pattern

WiFi_2.4G


Phi=90 freq=2440MHz

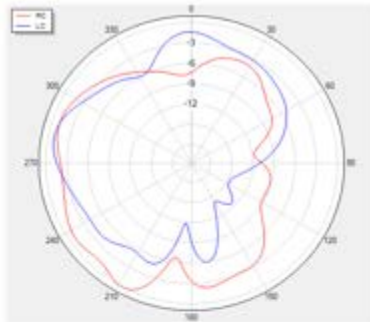


Phi=0 freq=2440MHz

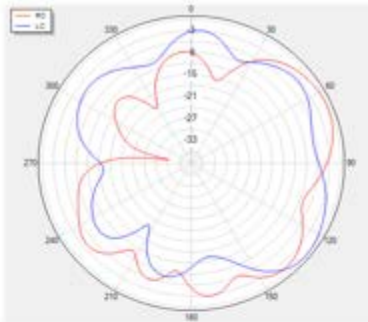


Theta=90 freq=2440MHz

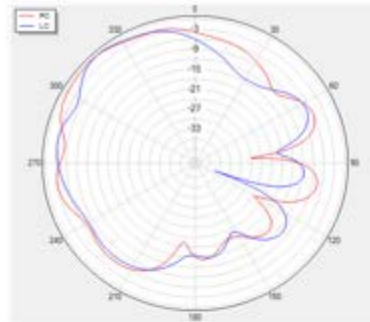


Phi=90 freq=2400MHz

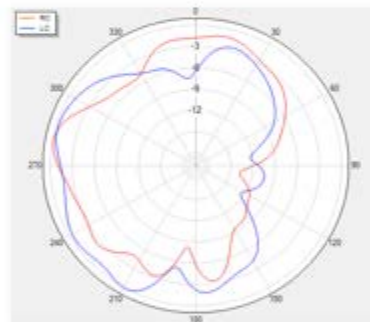


Phi=0 freq=2400MHz

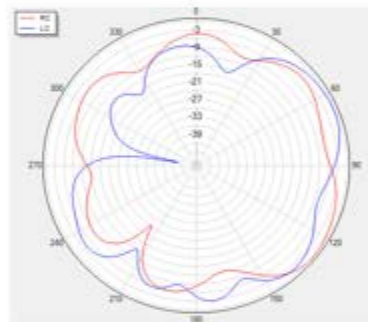


Theta=90 freq=2400MHz

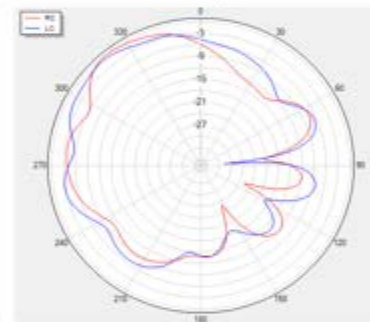


Phi=90 freq=2480MHz

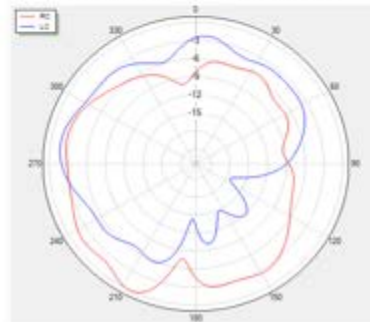

Phi=0 freq=2480MHz

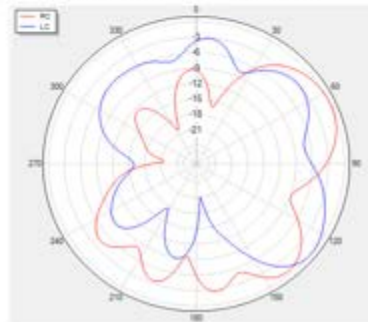


Theta=90 freq=2480MHz

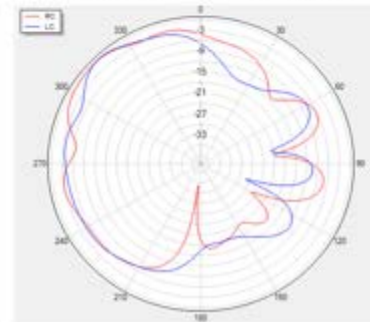


WiFi_5G


Phi=90 freq=5125MHz




Phi=0 freq=5125MHz




Theta=90 freq=5125MHz




Phi=90 freq=5500MHz




Phi=0 freq=5500MHz




Theta=90 freq=5500MHz




Phi=90 freq=5825MHz



Phi=0 freq=5825MHz




Theta=90 freq=5825MHz




BT


Phi=90 freq=2400MHz

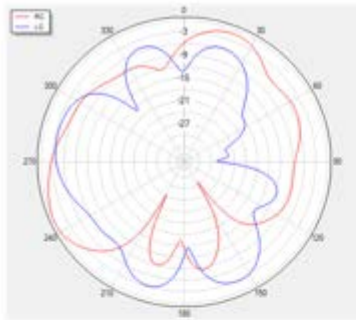


Phi=0 freq=2400MHz

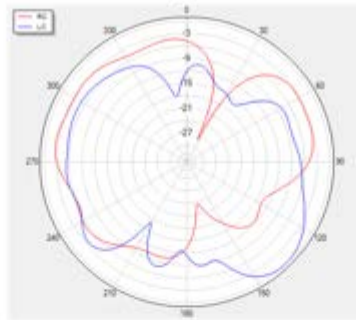


Theta=90 freq=2400MHz

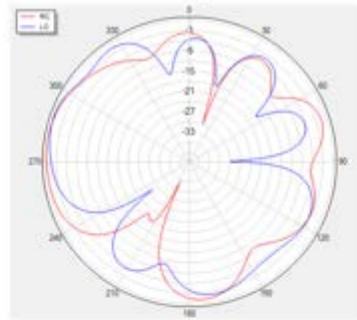


Phi=90 freq=2440MHz

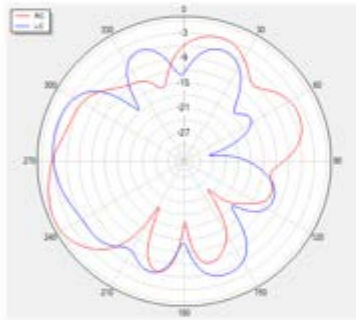


Phi=0 freq=2440MHz

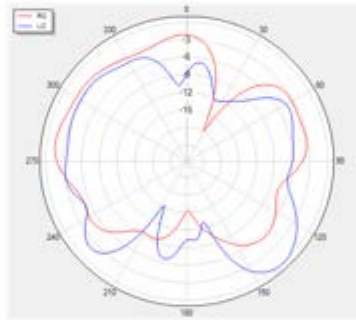


Theta=90 freq=2440MHz

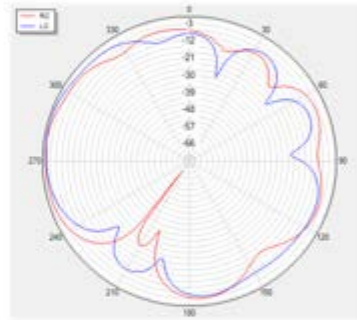


Phi=90 freq=2480MHz

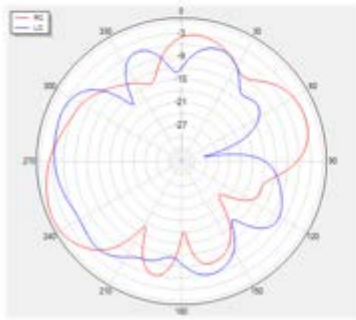

Phi=0 freq=2480MHz

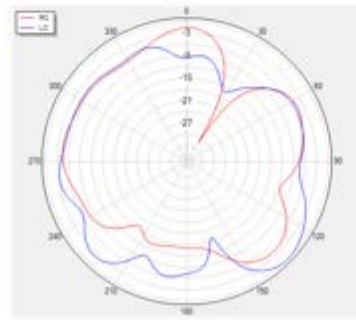


Theta=90 freq=2480MHz

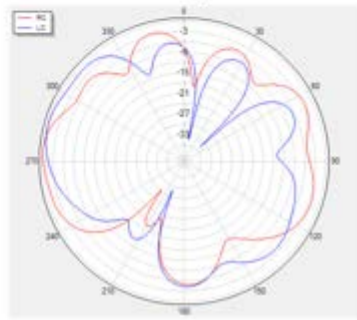


Lora


Phi=90 freq=860MHz




Phi=0 freq=860MHz




Theta=90 freq=860MHz




Phi=90 freq=900MHz




Phi=0 freq=900MHz




Theta=90 freq=900MHz




Phi=90 freq=930MHz



Phi=0 freq=930MHz




Theta=90 freq=930MHz




Zigbee


Phi=90 freq=2400MHz



Phi=0 freq=2400MHz




Theta=90 freq=2400MHz




Phi=90 freq=2440MHz




Phi=0 freq=2440MHz




Theta=90 freq=2440MHz



Phi=90 freq=2480MHz



Phi=0 freq=2480MHz



Theta=90 freq=2480MHz

