

Test Plot1#: GSM 850_Head Left Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0106 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.199 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.00885 W/kg

SAR(1 g) = 0.00832 W/kg; SAR(10 g) = 0.00781 W/kg

Maximum value of SAR (measured) = 0.00874 W/kg

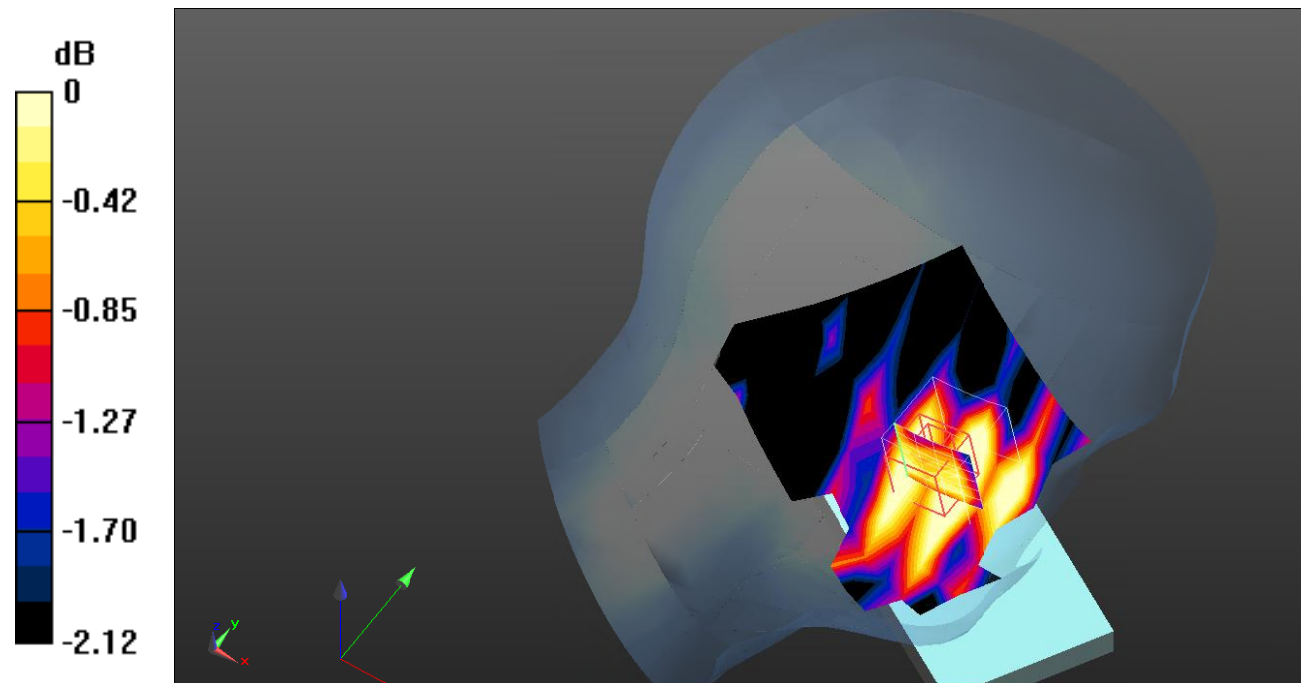

0 dB = 0.00874 W/kg = -20.58 dB dBW/kg

Test Plot2#: GSM 850_Head Left Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**


Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

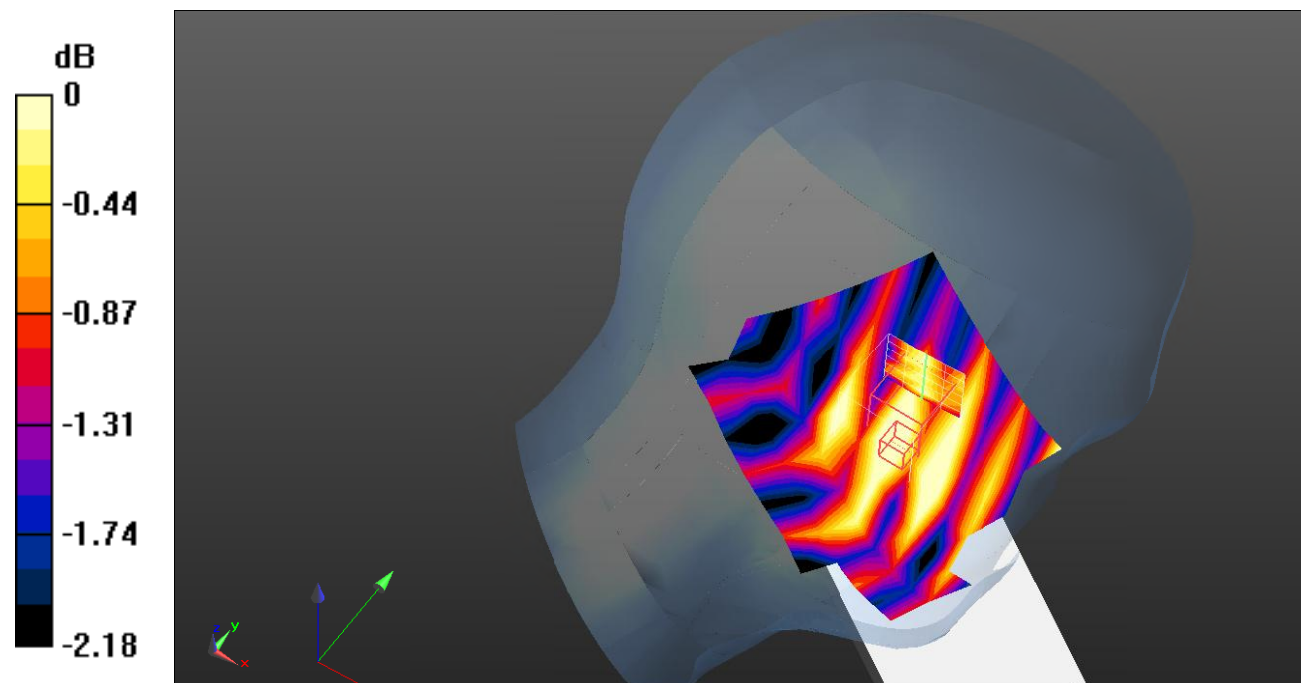Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.00854 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.379 V/m ; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.00749 W/kg **SAR(1 g) = 0.00698 W/kg ; SAR(10 g) = 0.00645 W/kg** Maximum value of SAR (measured) = 0.00736 W/kg  $0 \text{ dB} = 0.00736 \text{ W/kg} = -21.33 \text{ dB dBW/kg}$

Test Plot3#: GSM 850_Head Right Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**


Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

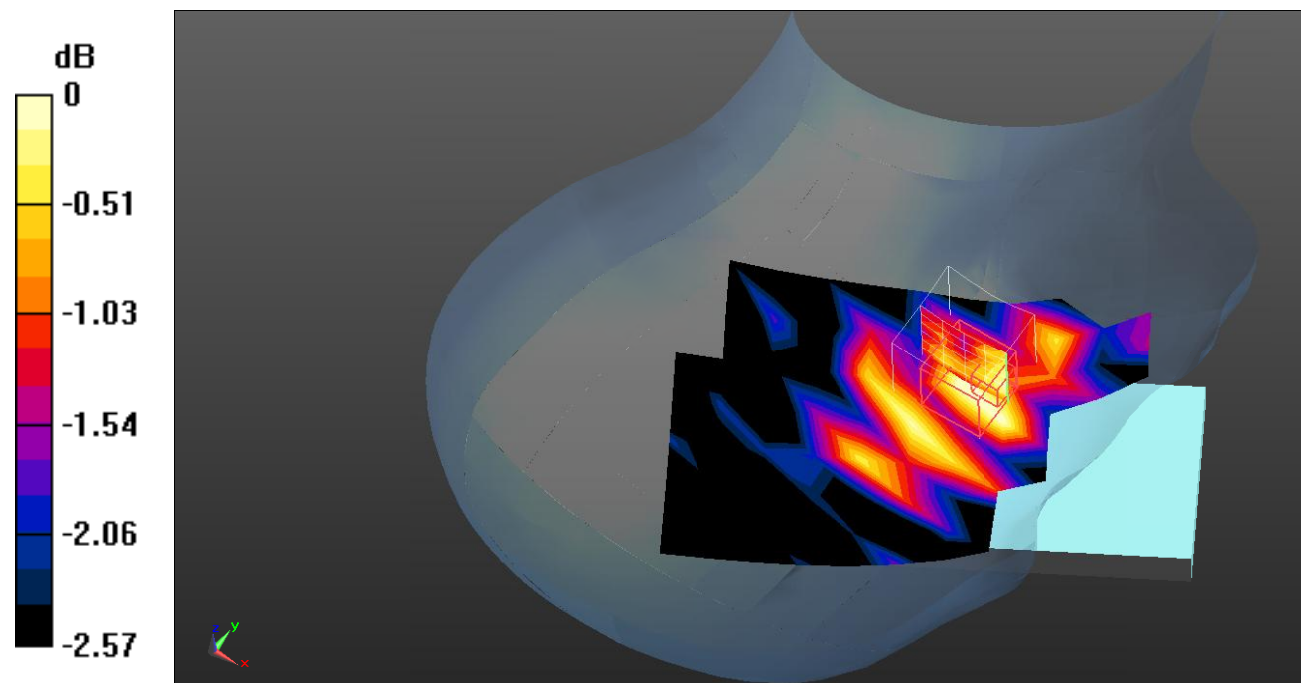Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.00968 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.458 V/m ; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.00943 W/kg **SAR(1 g) = 0.00859 W/kg ; SAR(10 g) = 0.00801 W/kg** Maximum value of SAR (measured) = 0.00943 W/kg  $0 \text{ dB} = 0.00943 \text{ W/kg} = -20.25 \text{ dB dBW/kg}$

Test Plot4#: GSM 850_Head Right Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.00867 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.474 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.00799 W/kg

SAR(1 g) = 0.00785 W/kg; SAR(10 g) = 0.00757 W/kg

Maximum value of SAR (measured) = 0.00799 W/kg

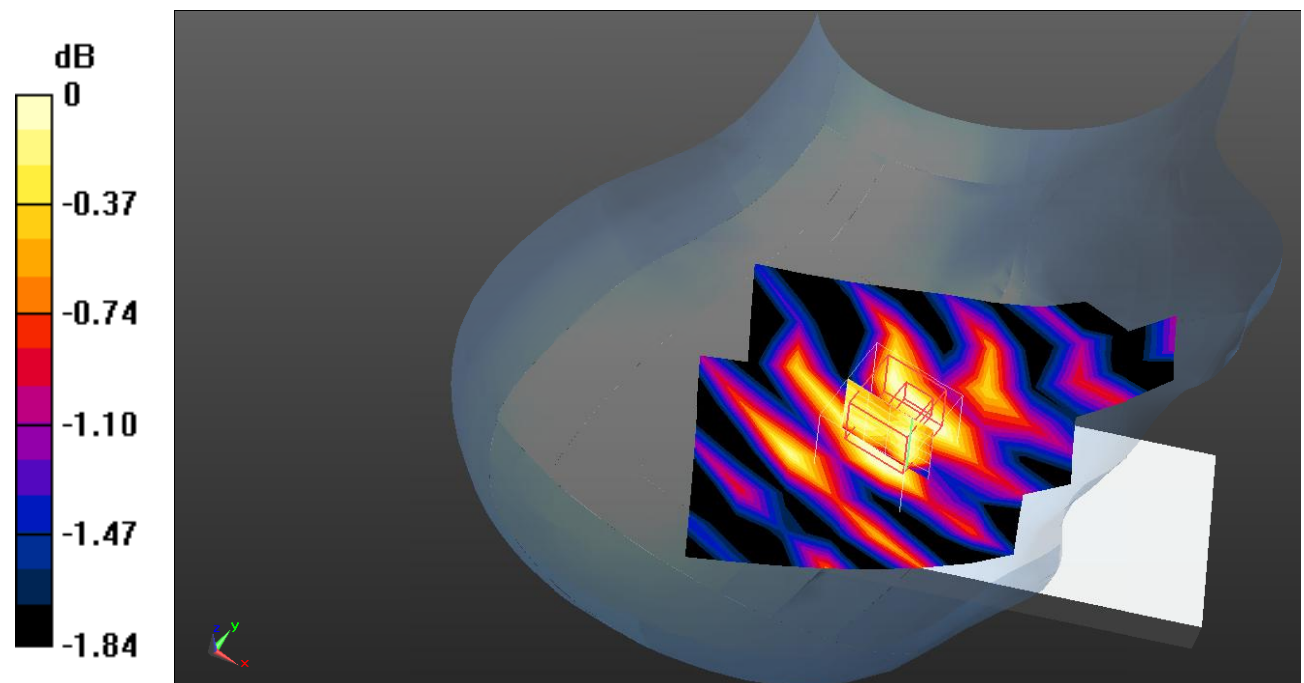

0 dB = 0.00799 W/kg = -20.97 dB dBW/kg

Test Plot5#: GSM 850_Body Worn Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0400 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.468 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0268 W/kg

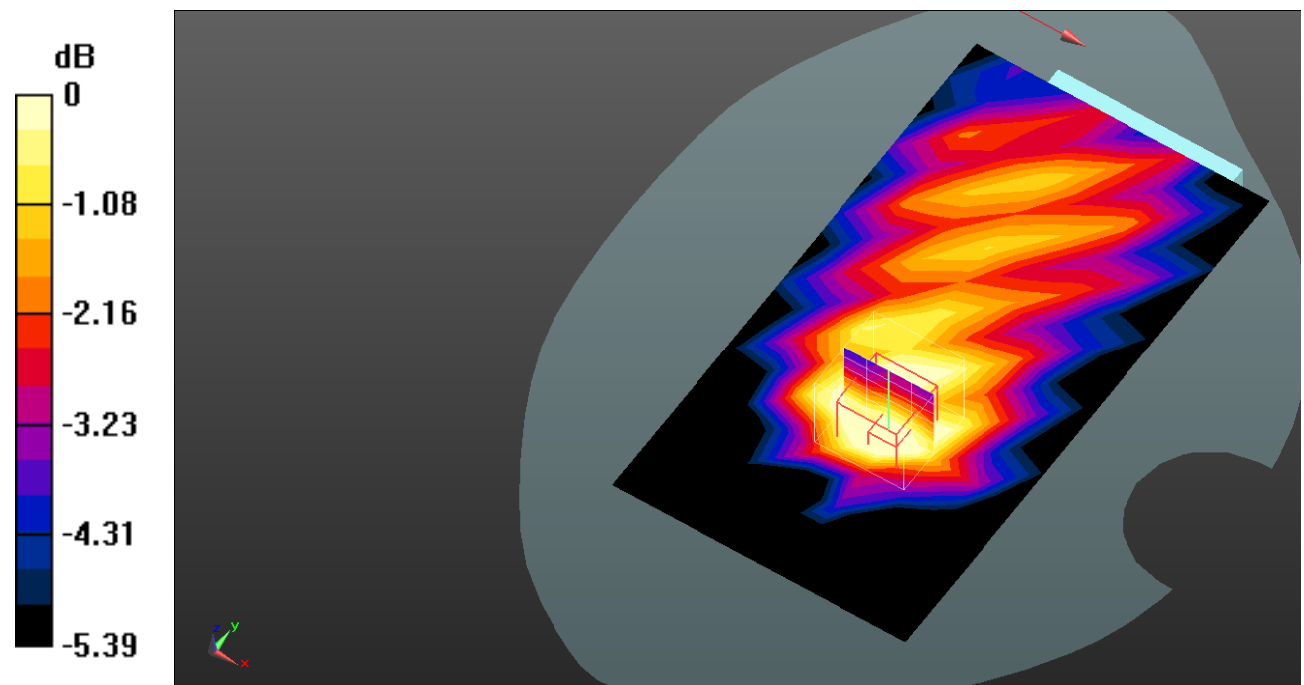

0 dB = 0.0268 W/kg = -15.72 dB dBW/kg

Test Plot6#: GSM 850_Body Front_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0156 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.878 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0123 W/kg

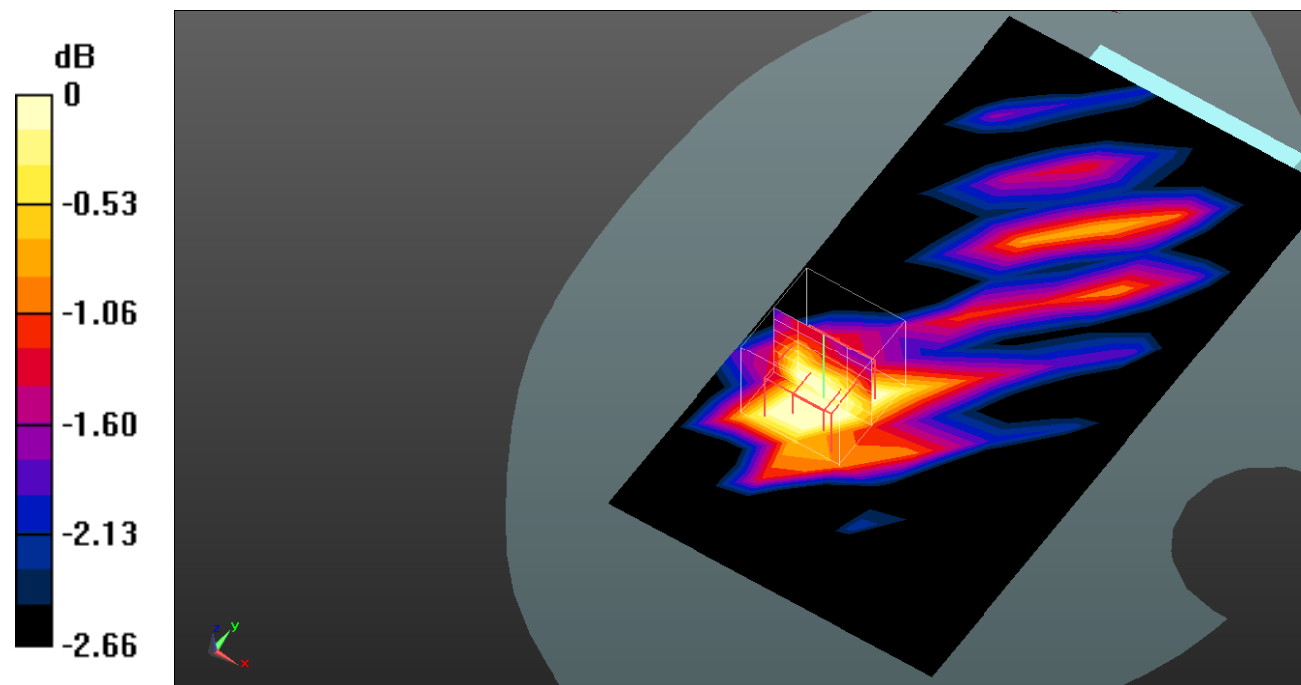

0 dB = 0.0123 W/kg = -19.10 dB dBW/kg

Test Plot7#: GSM 850_Body Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0546 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.655 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0365 W/kg

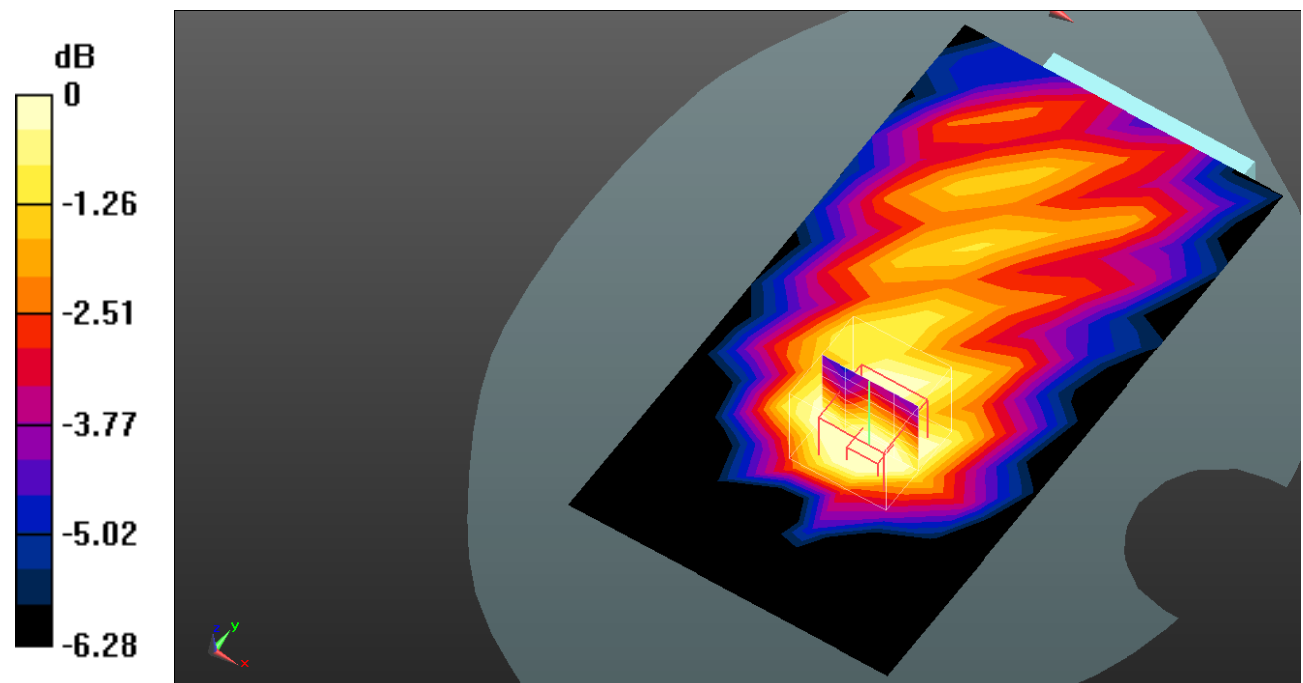

0 dB = 0.0365 W/kg = -14.38 dB dBW/kg

Test Plot8#: GSM 850_Body Left_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0122 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.795 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.00953 W/kg

SAR(1 g) = 0.0093 W/kg; SAR(10 g) = 0.00837 W/kg

Maximum value of SAR (measured) = 0.00936 W/kg

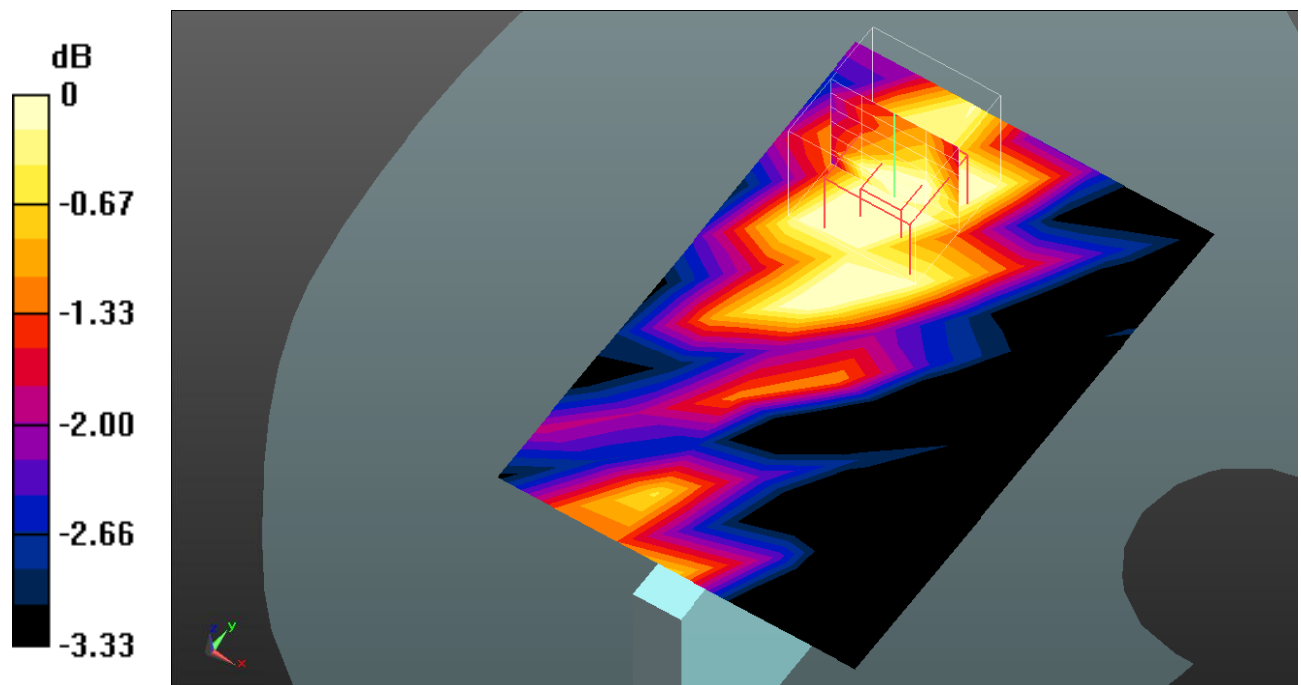

0 dB = 0.00936 W/kg = -20.29 dB dBW/kg

Test Plot9#: GSM 850_Body Right_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0142 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.486 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00945 W/kg

Maximum value of SAR (measured) = 0.0127 W/kg

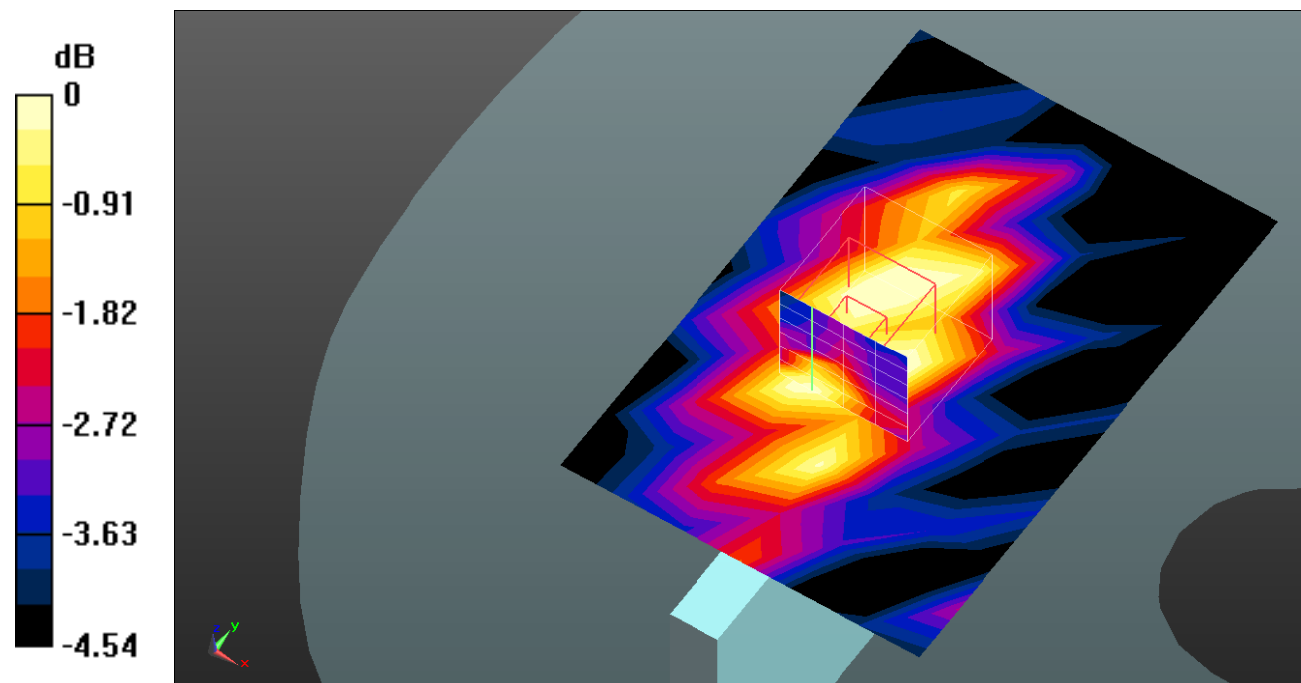

0 dB = 0.0127 W/kg = -18.96 dB dBW/kg

Test Plot10#: GSM 850_Body Bottom_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0134 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.830 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.00924 W/kg; SAR(10 g) = 0.00787 W/kg

Maximum value of SAR (measured) = 0.00966 W/kg

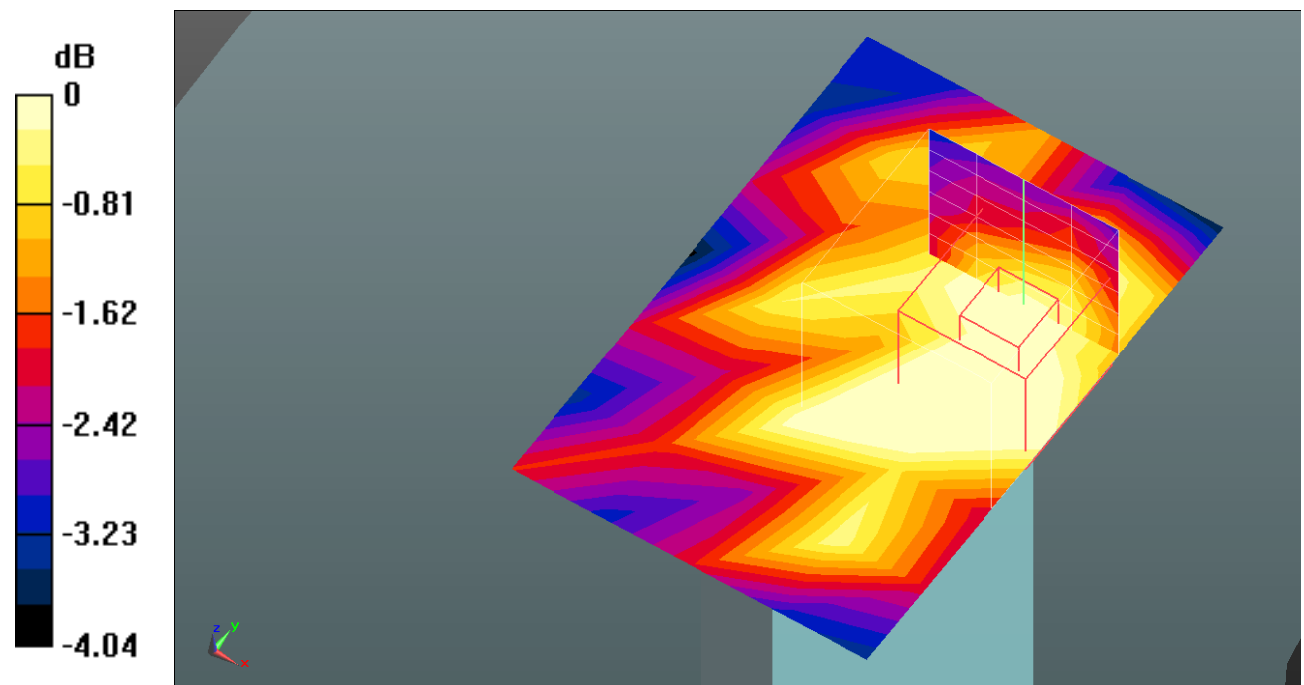

0 dB = 0.00966 W/kg = -20.15 dB dBW/kg

Test Plot11#: PCS 1900_Head Left Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.517 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.49 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

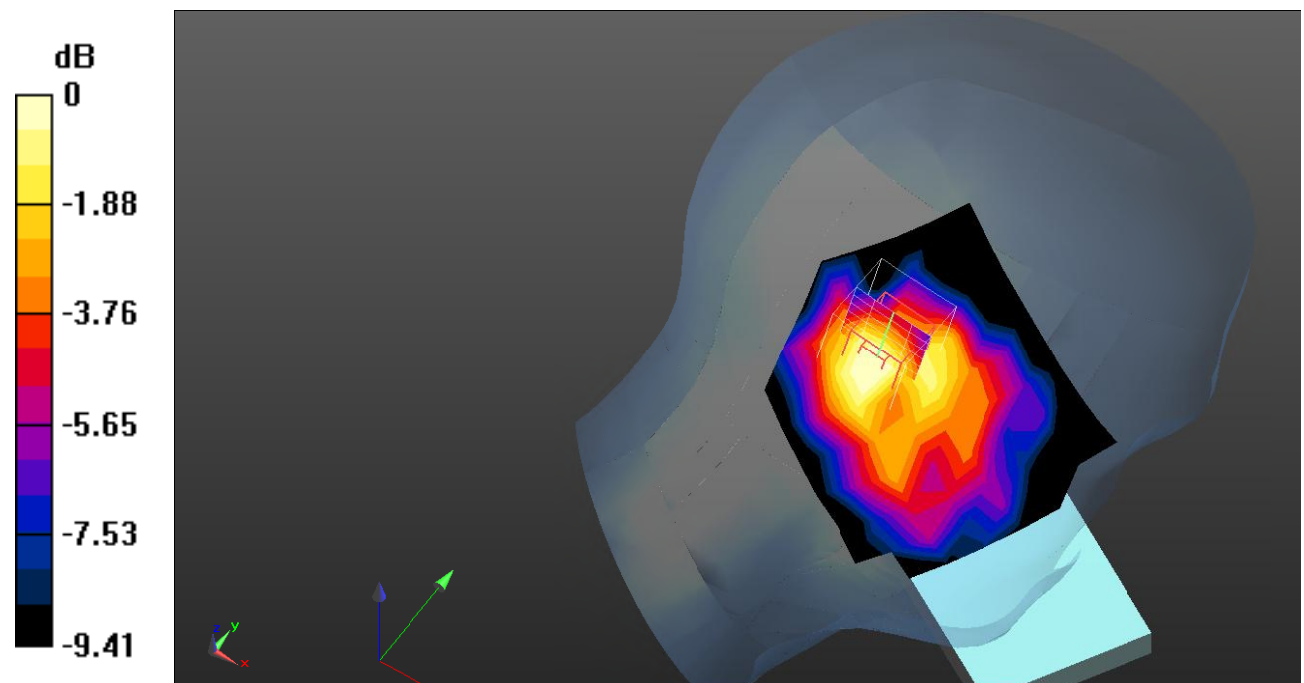

0 dB = 0.401 W/kg = -3.97 dB dBW/kg

Test Plot12#: PCS 1900_Head Left Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.523 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.40 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.287 W/kg

Maximum value of SAR (measured) = 0.420 W/kg

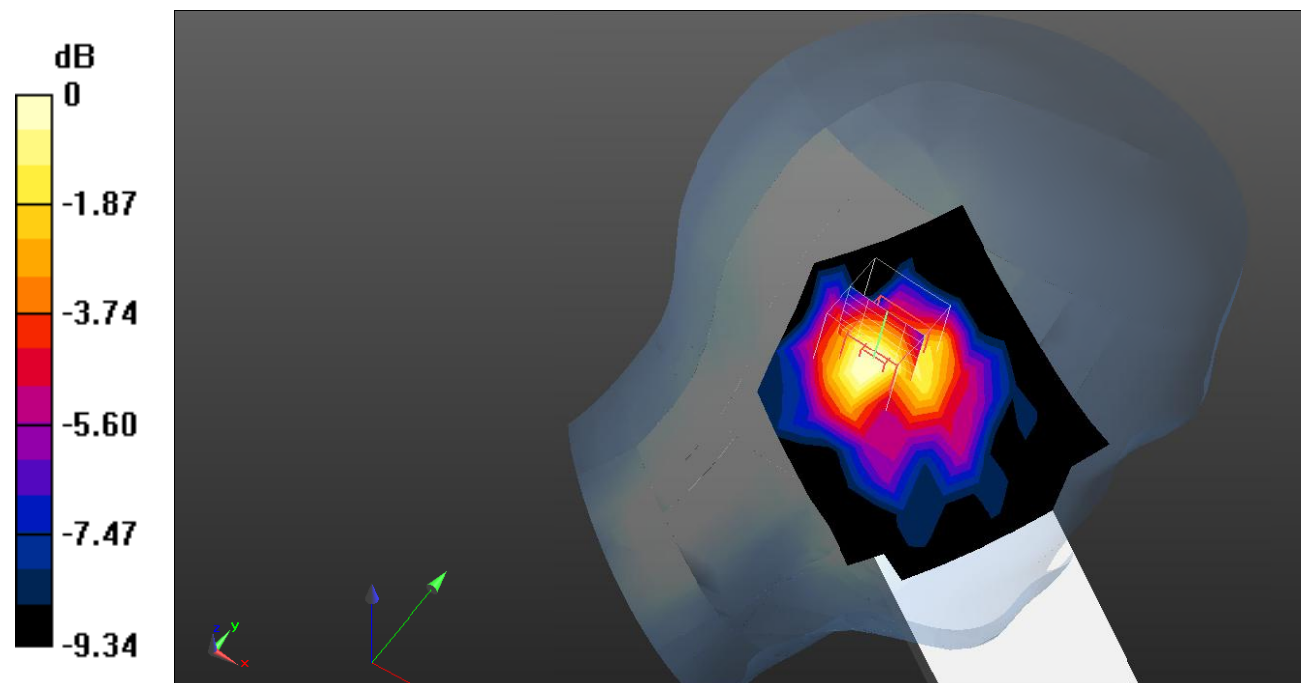

0 dB = 0.420 W/kg = -3.77 dB dBW/kg

Test Plot13#: PCS 1900_Head Right Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.601 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.12 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 0.455 W/kg

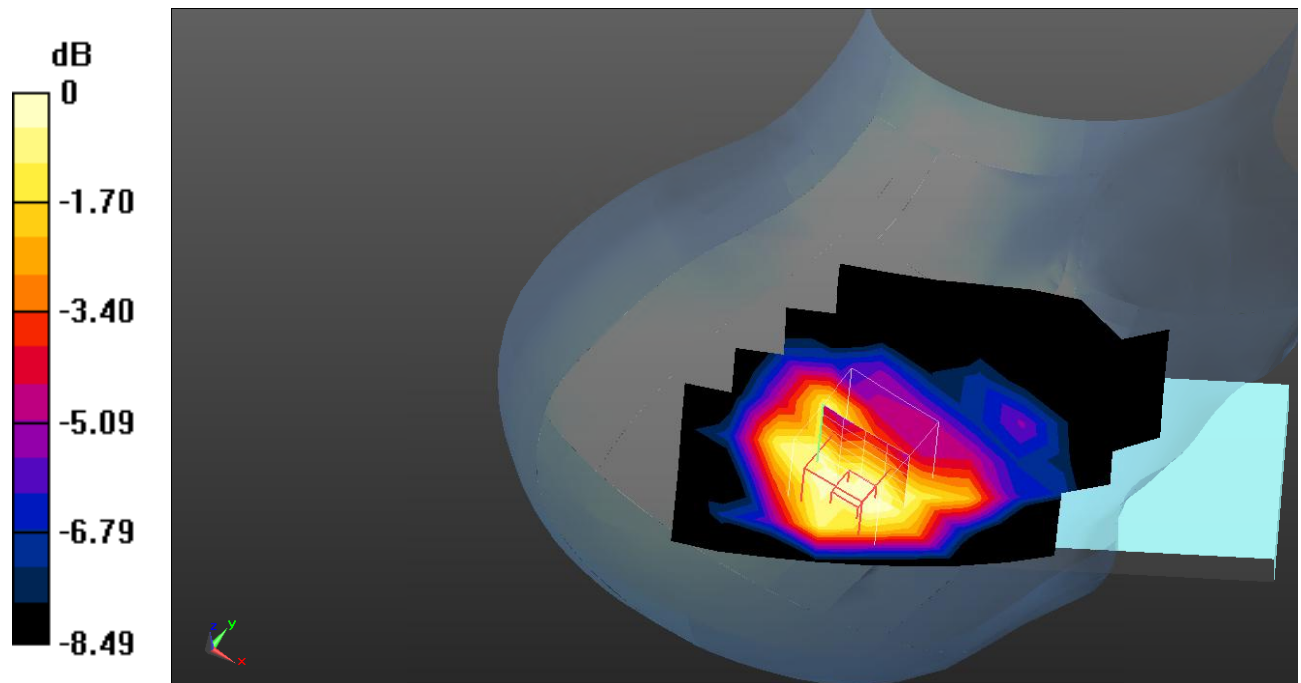

0 dB = 0.455 W/kg = -3.42 dB dBW/kg

Test Plot14#: PCS 1900_Head Right Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.516 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.26 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.495 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 0.452 W/kg

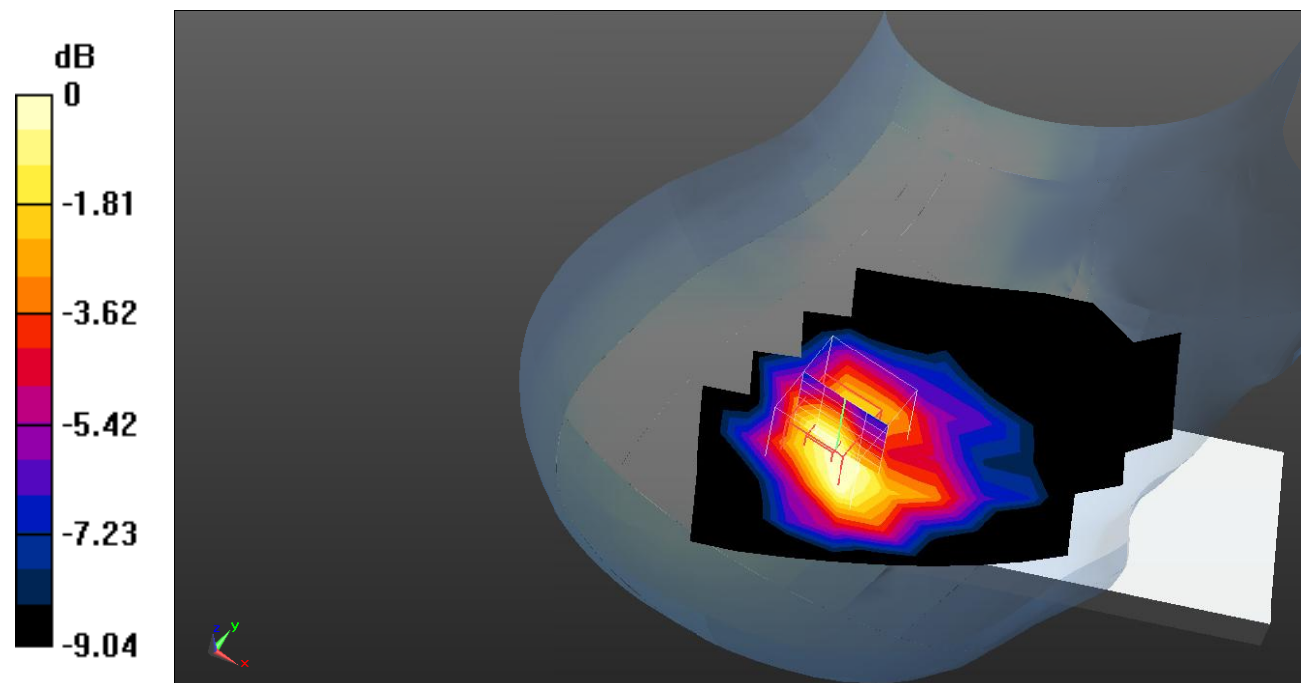

0 dB = 0.452 W/kg = -3.45 dB dBW/kg

Test Plot15#: PCS 1900_Body Worn Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.308 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.602 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.248 W/kg

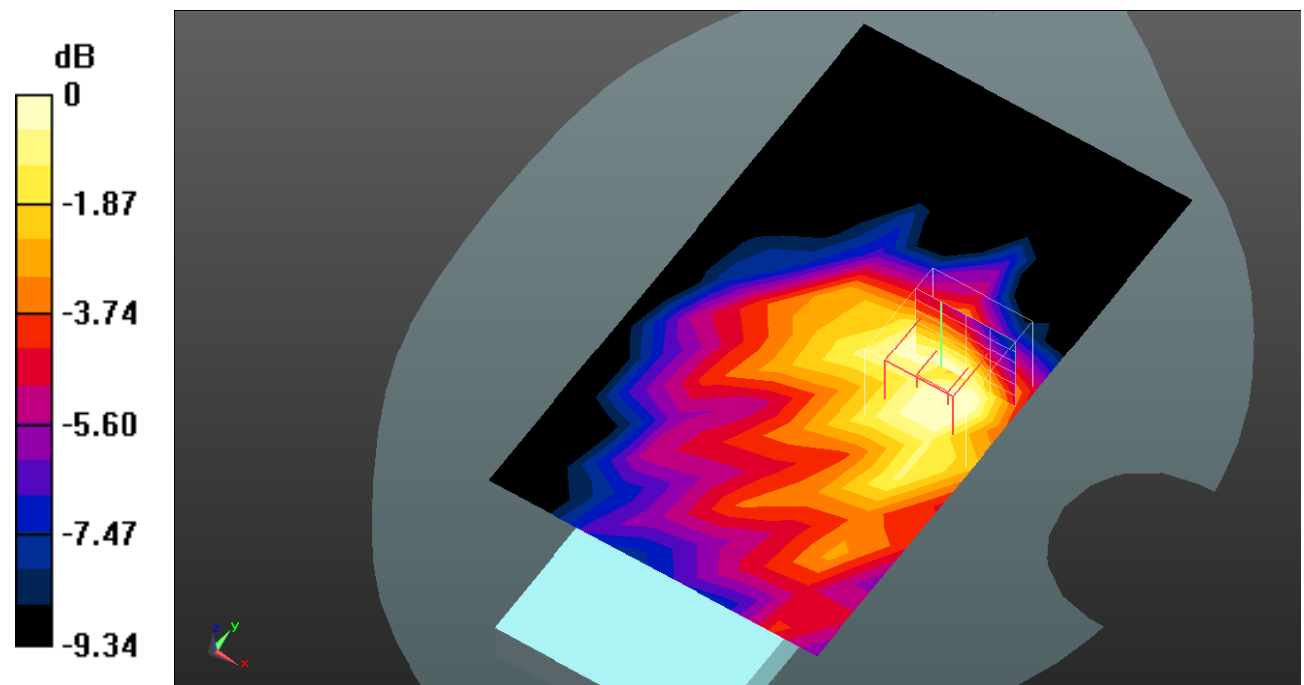

0 dB = 0.248 W/kg = -6.06 dB dBW/kg

Test Plot16#: PCS 1900_Body Front_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.302 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.739 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.259 W/kg

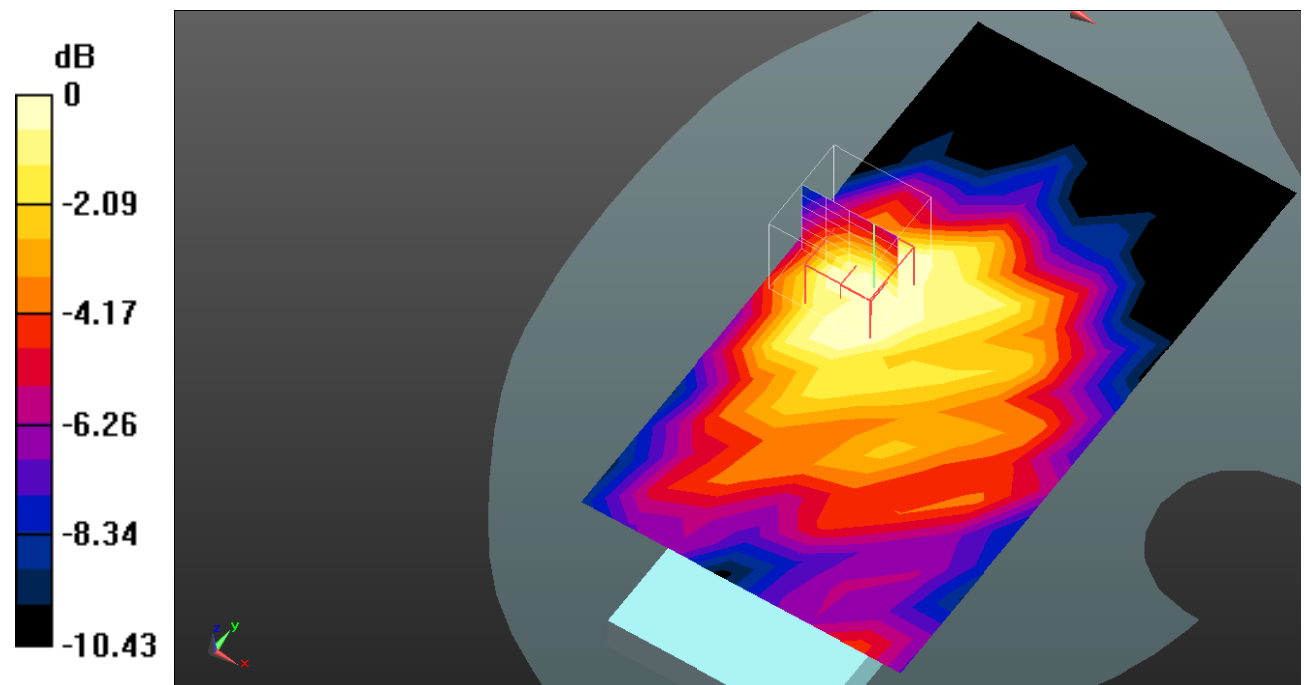

0 dB = 0.259 W/kg = -5.87 dB dBW/kg

Test Plot17#: PCS 1900_Body Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.481 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.61 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.371 W/kg

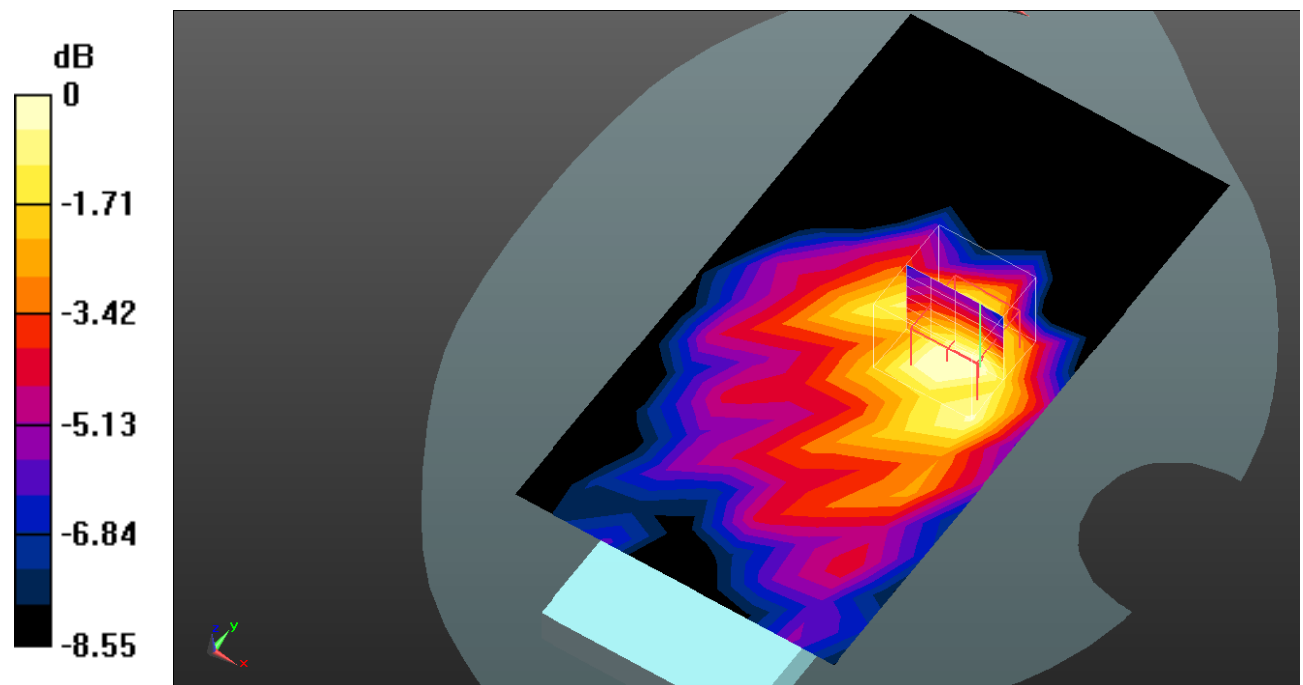

0 dB = 0.371 W/kg = -4.31 dB dBW/kg

Test Plot18#: PCS 1900_Body Left_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.213 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.12 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.181 W/kg

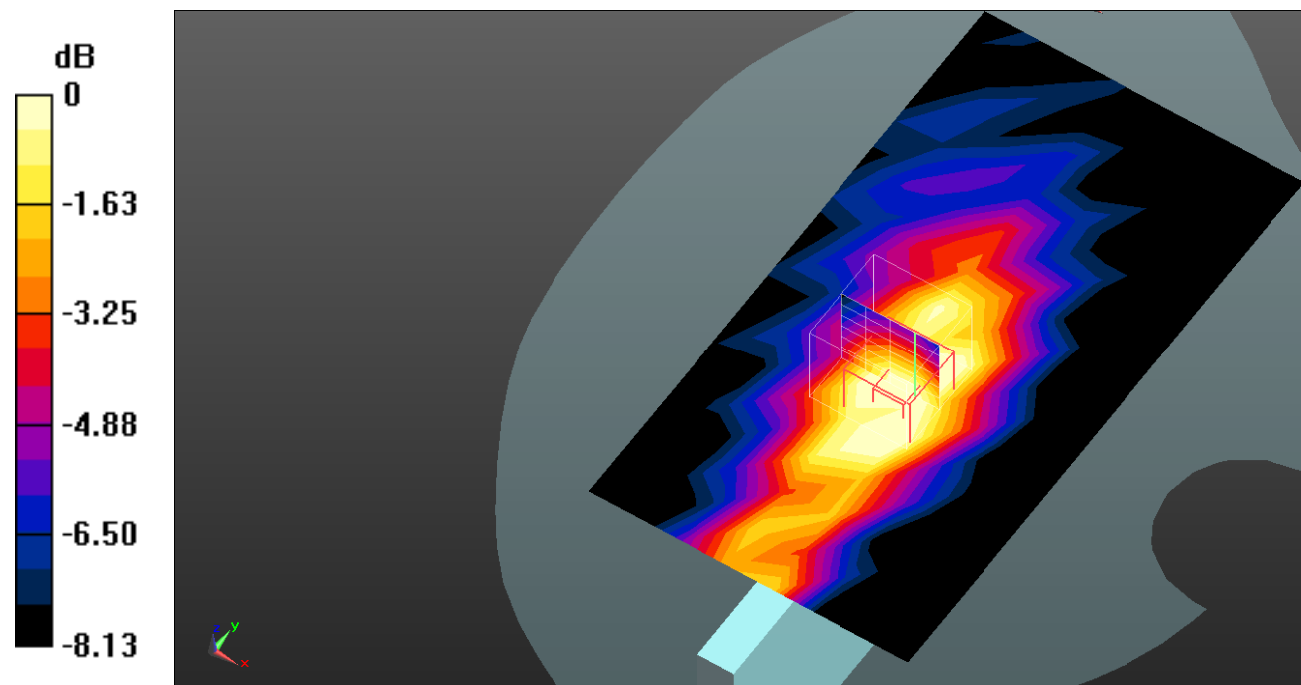

0 dB = 0.181 W/kg = -7.42 dB dBW/kg

Test Plot19#: PCS 1900_Body Top_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.334 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.87 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.287 W/kg

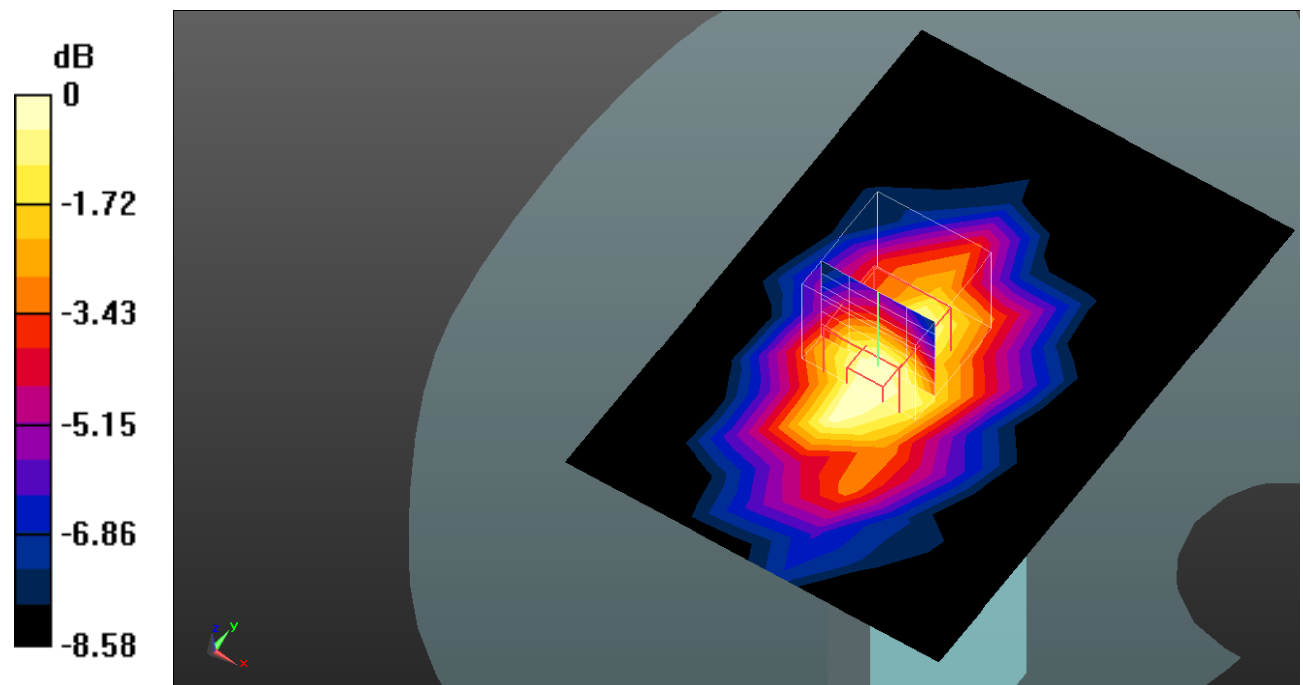

0 dB = 0.287 W/kg = -5.42 dB dBW/kg

Test Plot20#: CDMA BC0_Head Left Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**


Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 42.298$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

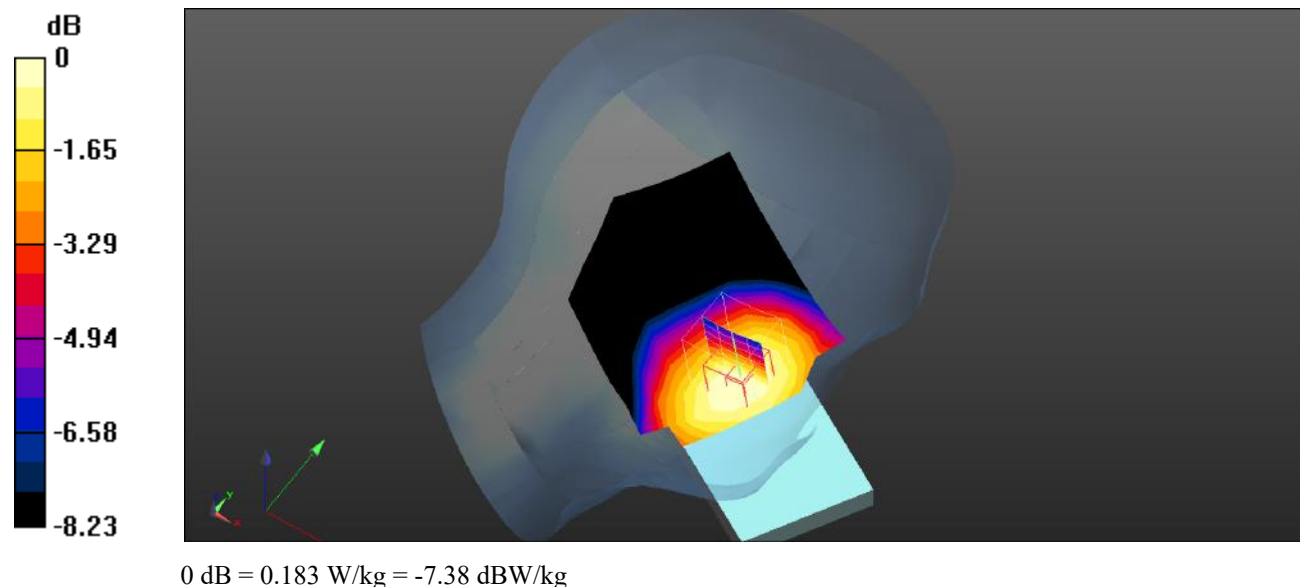Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.184 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.475 V/m ; Power Drift = 0.19 dB Peak SAR (extrapolated) = 0.226 W/kg **SAR(1 g) = 0.178 W/kg ; SAR(10 g) = 0.134 W/kg** Maximum value of SAR (measured) = 0.183 W/kg 

Test Plot21#: CDMA BC0_Head Left Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**


Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 42.298$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

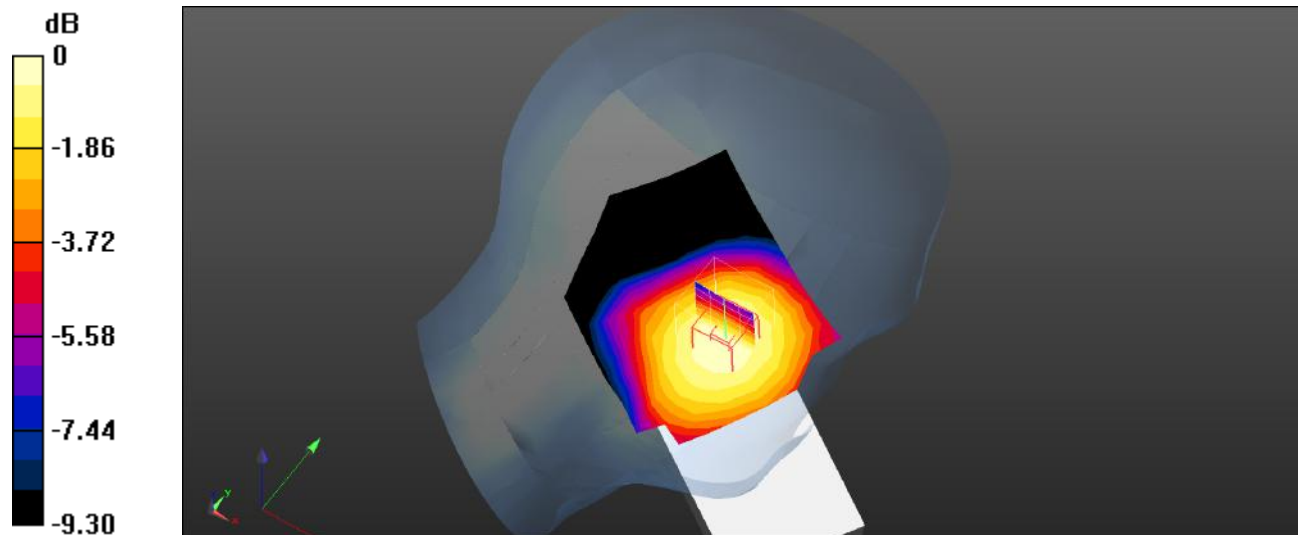Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.108 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.834 V/m ; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.131 W/kg **SAR(1 g) = 0.104 W/kg ; SAR(10 g) = 0.079 W/kg** Maximum value of SAR (measured) = 0.108 W/kg  $0 \text{ dB} = 0.108 \text{ W/kg} = -9.67 \text{ dBW/kg}$

Test Plot22#: CDMA BC0_Head Right Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.298$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.212 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.554 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 0.217 W/kg

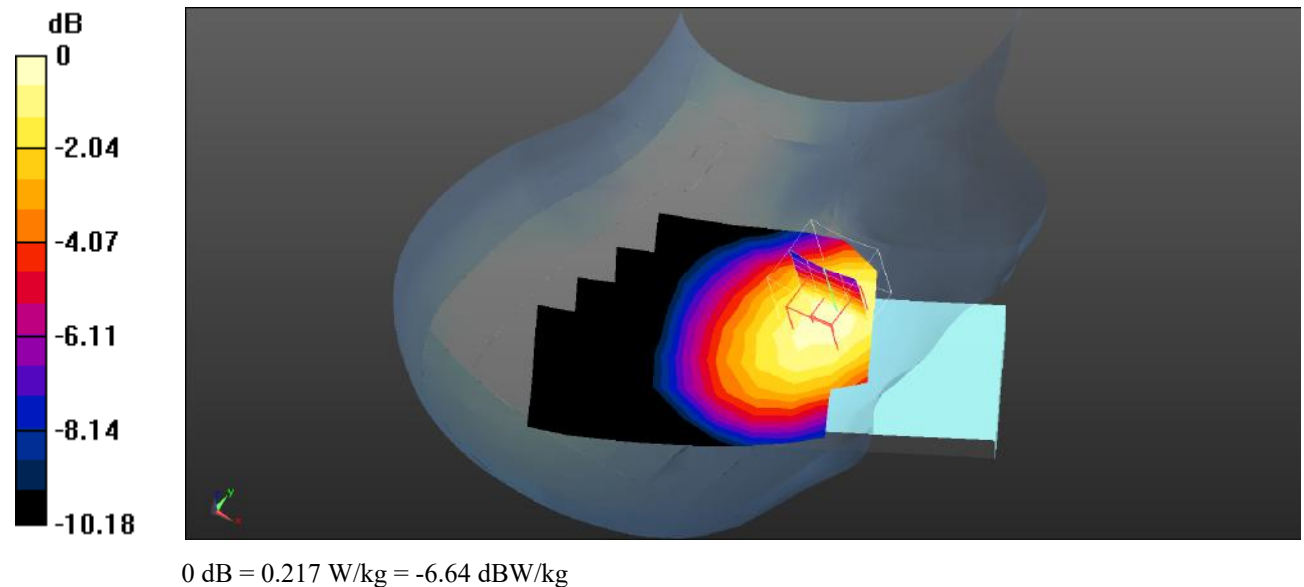

Test Plot23#: CDMA BC0_Head Right Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.298$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.398 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

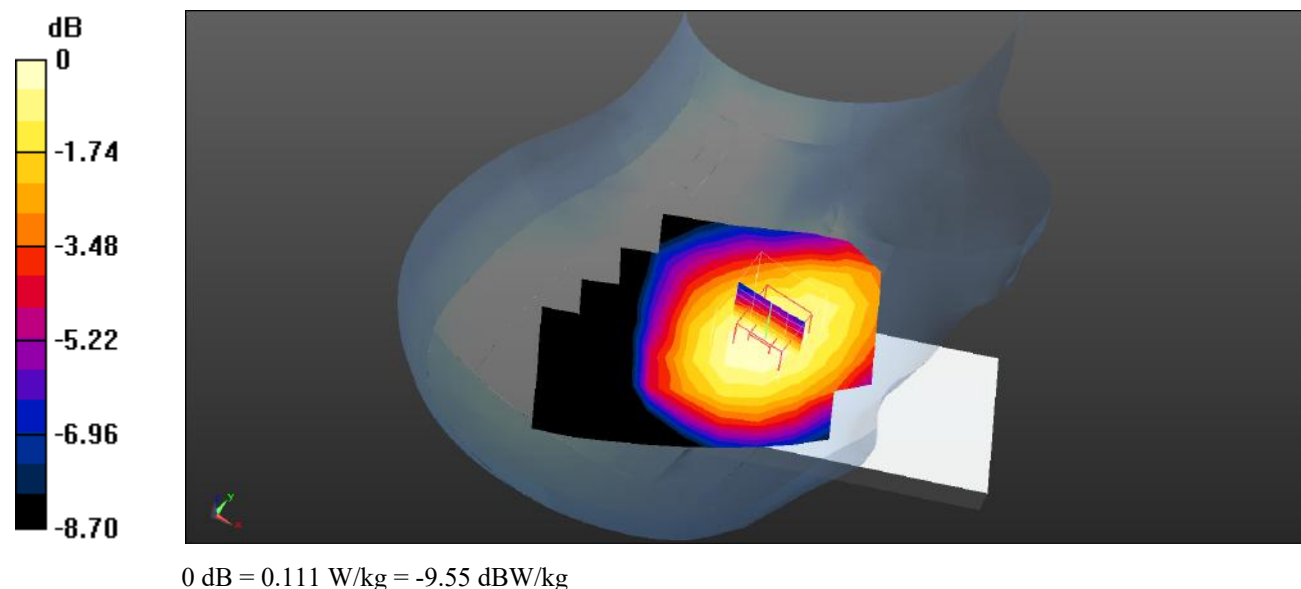

Test Plot24#: CDMA BC0_Body Worn Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.478 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.89 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.914 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 0.561 W/kg

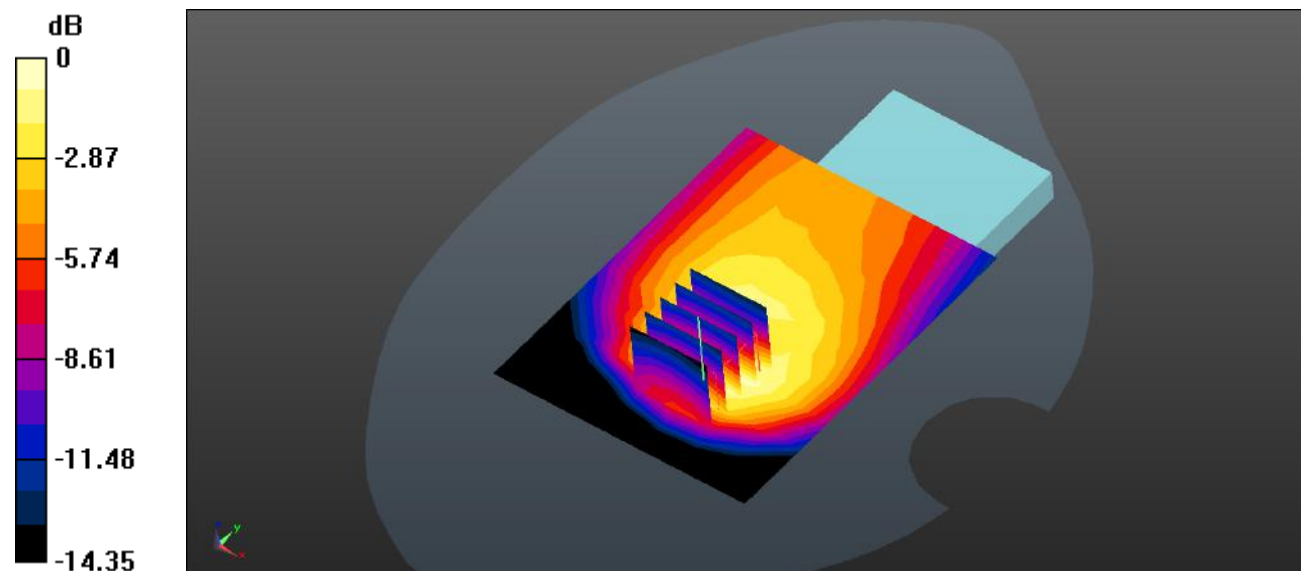

0 dB = 0.561 W/kg = -2.51 dBW/kg

Test Plot25#: CDMA BC0_Body Front_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.235 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.65 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.222 W/kg

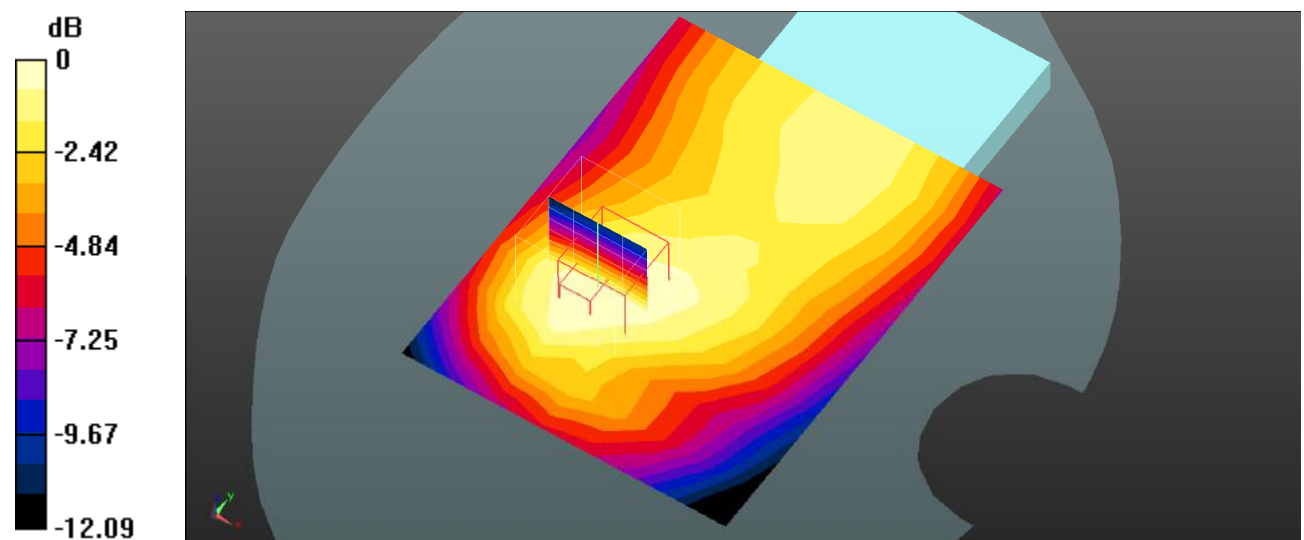

Test Plot26#: CDMA BC0_Body Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.463 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.25 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.914 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.561 W/kg

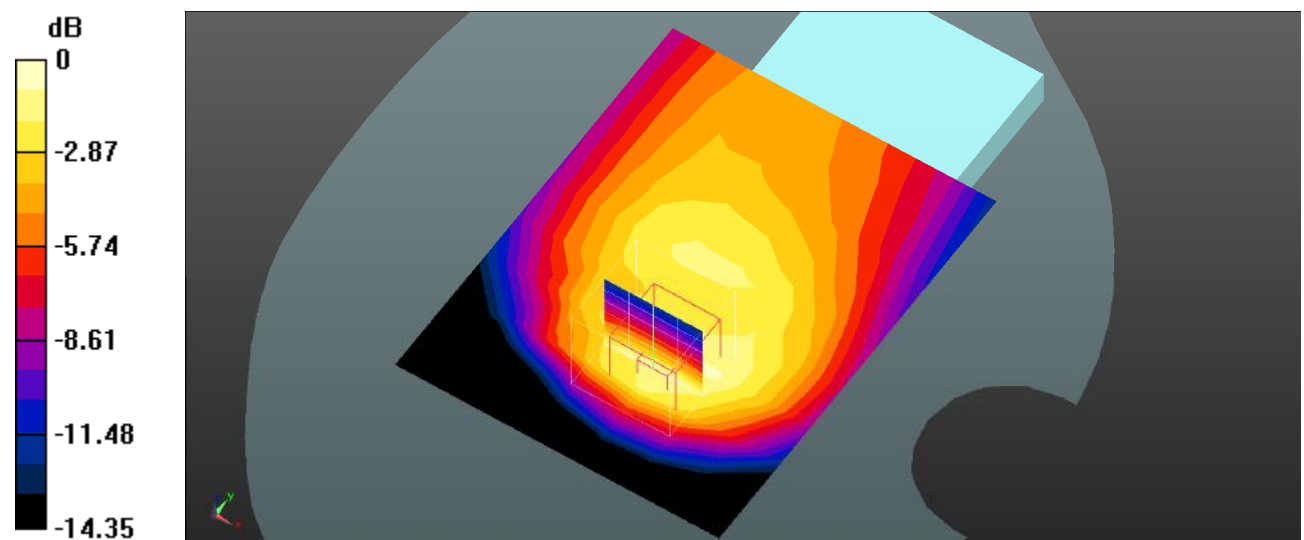

0 dB = 0.561 W/kg = -2.51 dBW/kg

Test Plot27#: CDMA BC0_Body Left_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.126 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.437 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

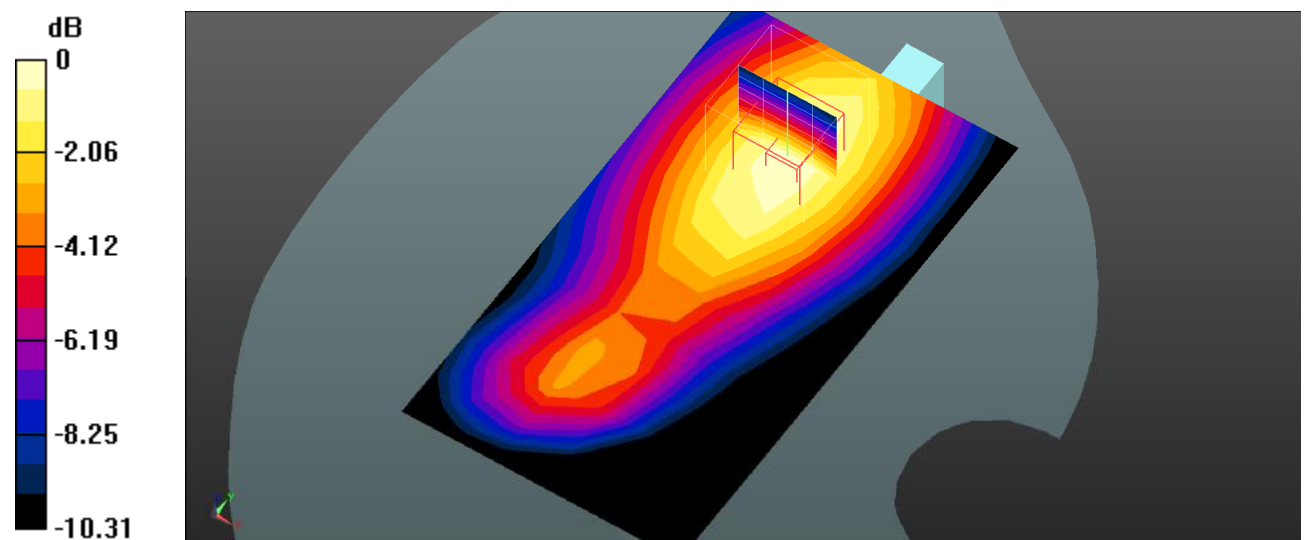

0 dB = 0.130 W/kg = -8.86 dBW/kg

Test Plot28#: CDMA BC0_Body Right_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.299 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.34 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.321 W/kg

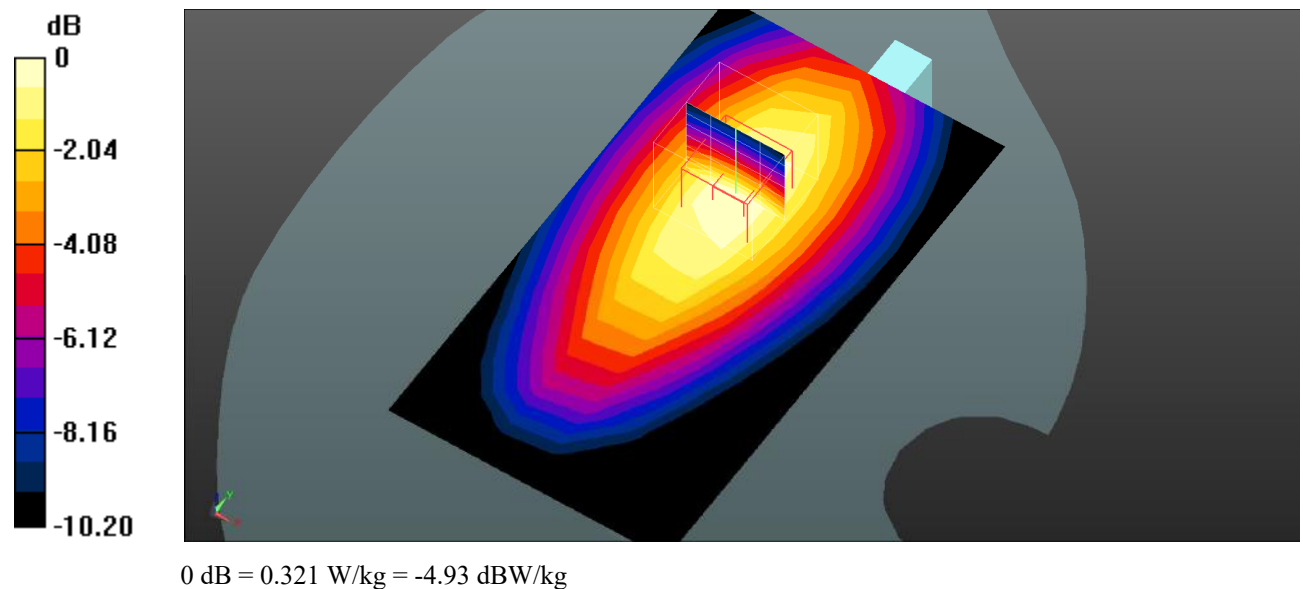

Test Plot29#: CDMA BC0_Body Bottom_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.52$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @ 836.52 MHz; Calibrated: 2023/03/15
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.188 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.139 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.191 W/kg

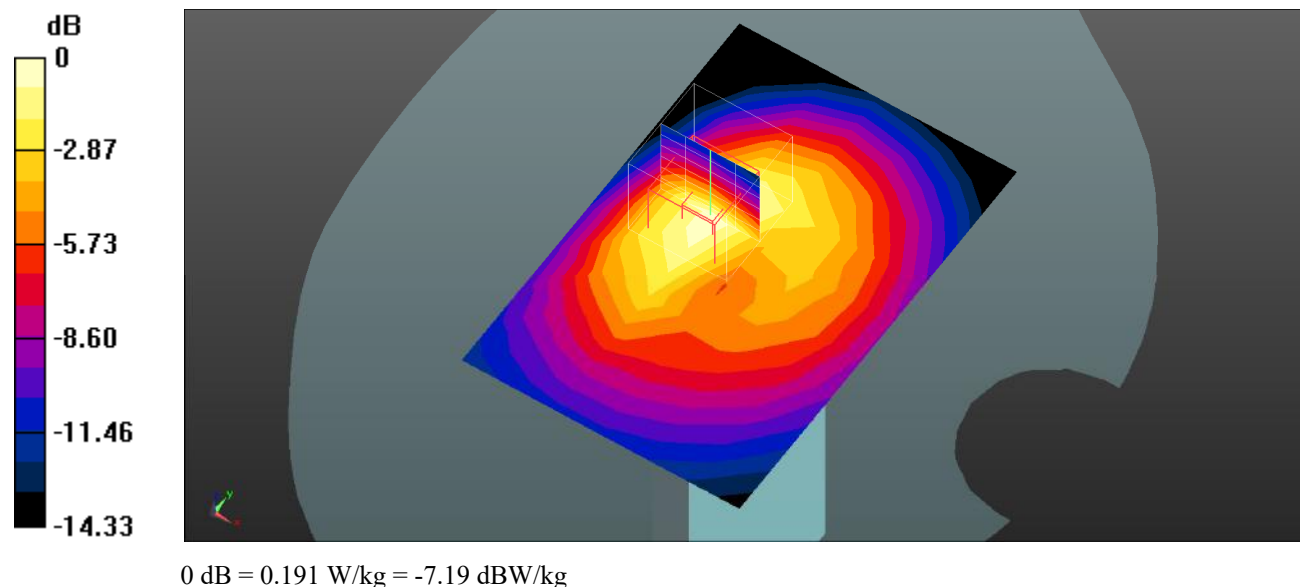

Test Plot30#: WCDMA Band 2_Head Left Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.131 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.544 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.102 W/kg

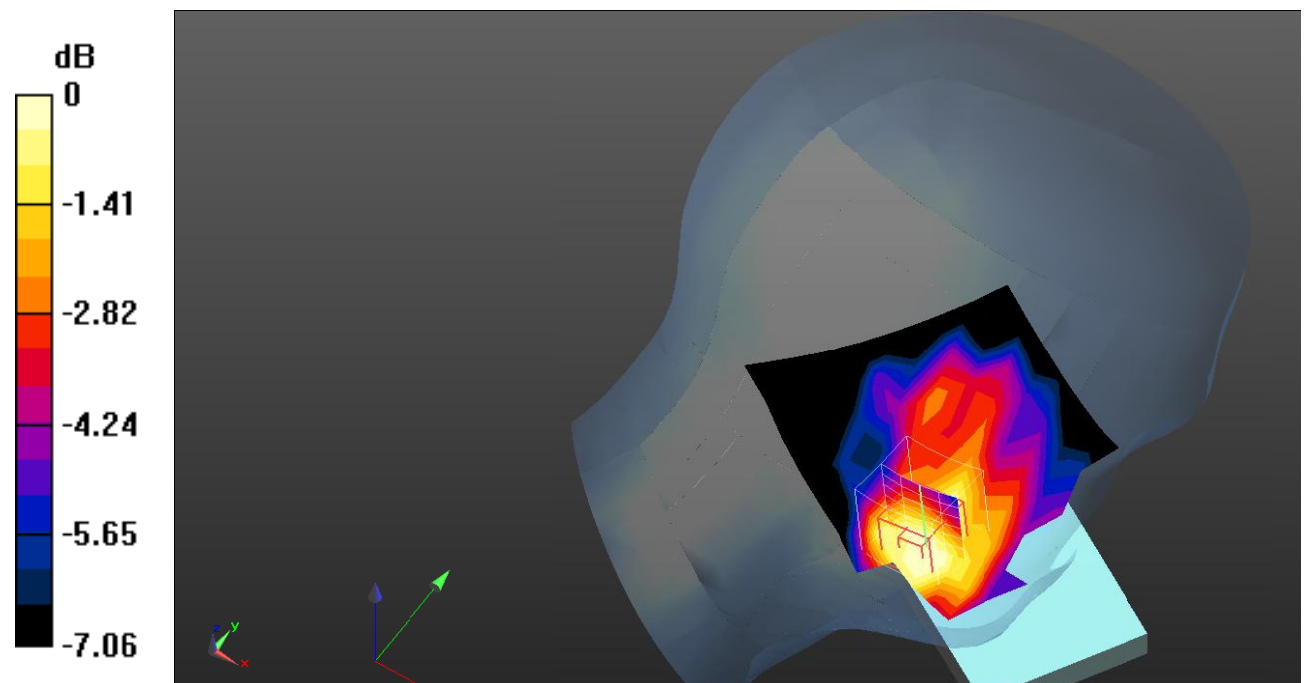

0 dB = 0.102 W/kg = -9.91 dB dBW/kg

Test Plot31#: WCDMA Band 2_Head Left Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0666 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.740 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0711 W/kg

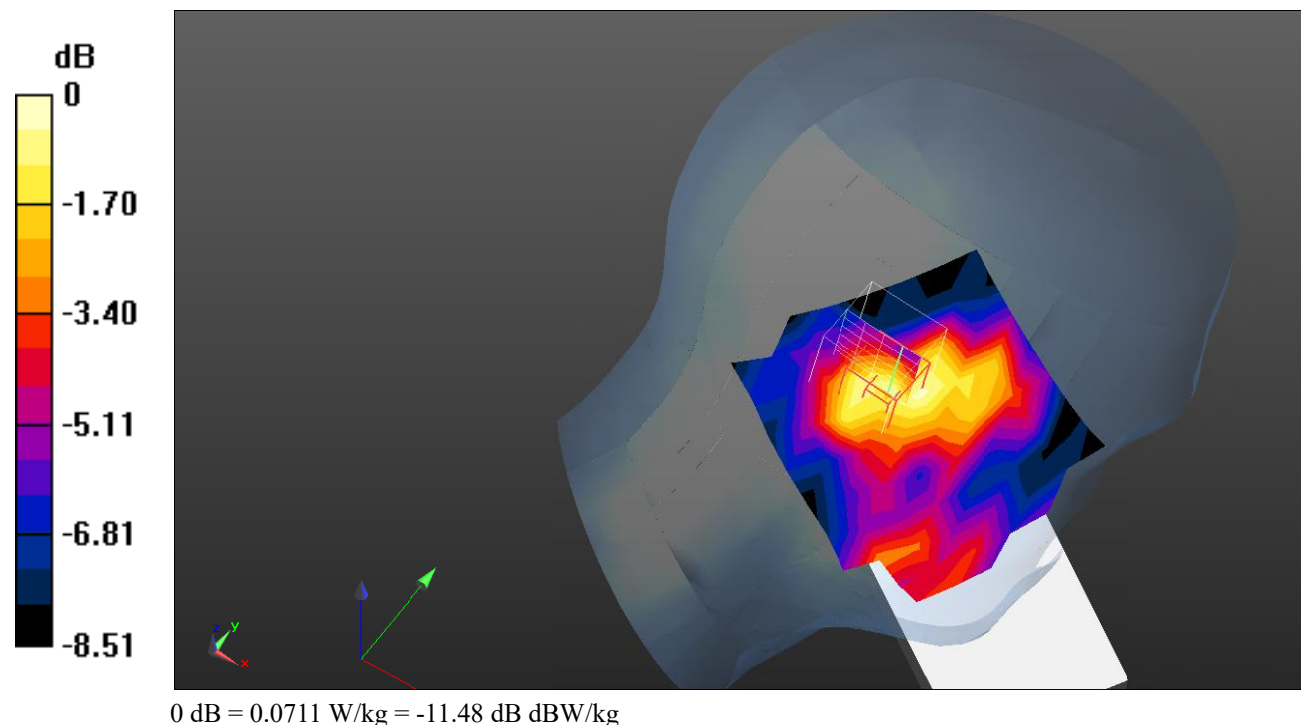

Test Plot32#: WCDMA Band 2_Head Right Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0573 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.064 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0492 W/kg

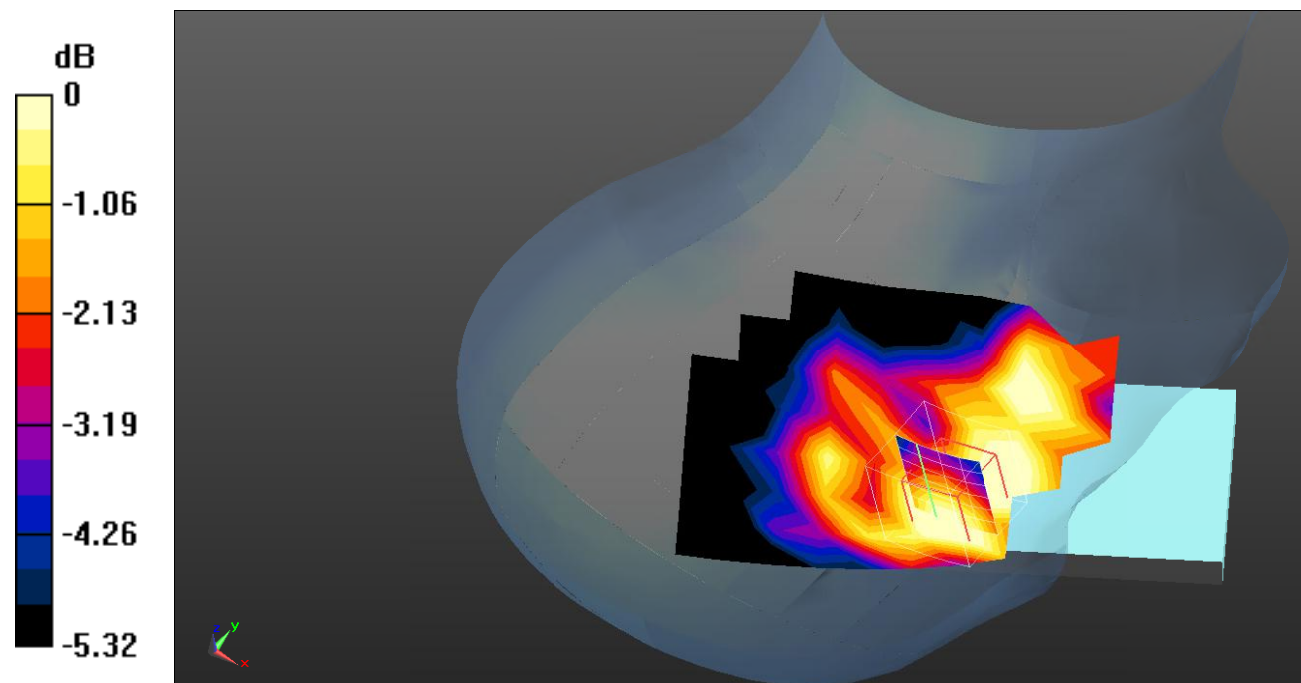

0 dB = 0.0492 W/kg = -13.08 dB dBW/kg

Test Plot33#: WCDMA Band 2_Head Right Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0719 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.757 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0525 W/kg

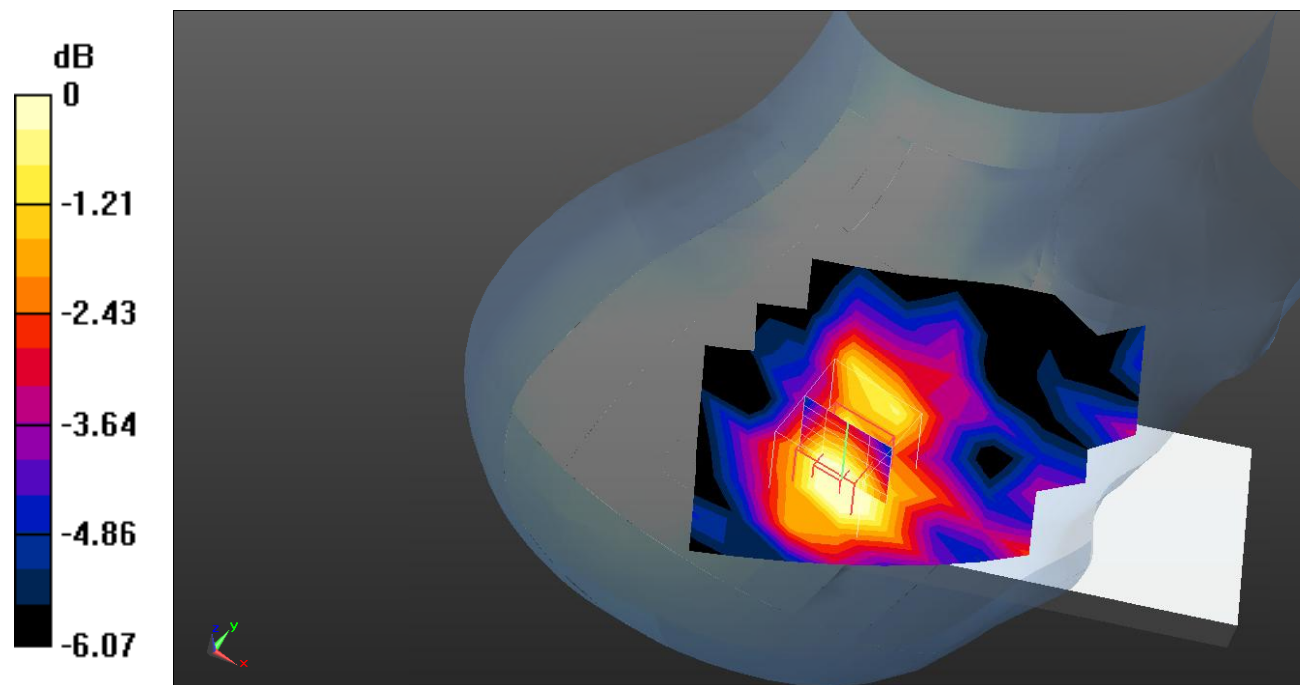

0 dB = 0.0525 W/kg = -12.80 dB dBW/kg

Test Plot34#: WCDMA Band 2_Body Front_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.442 \text{ S/m}$; $\epsilon_r = 39.874$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.211 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.794 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.208 W/kg

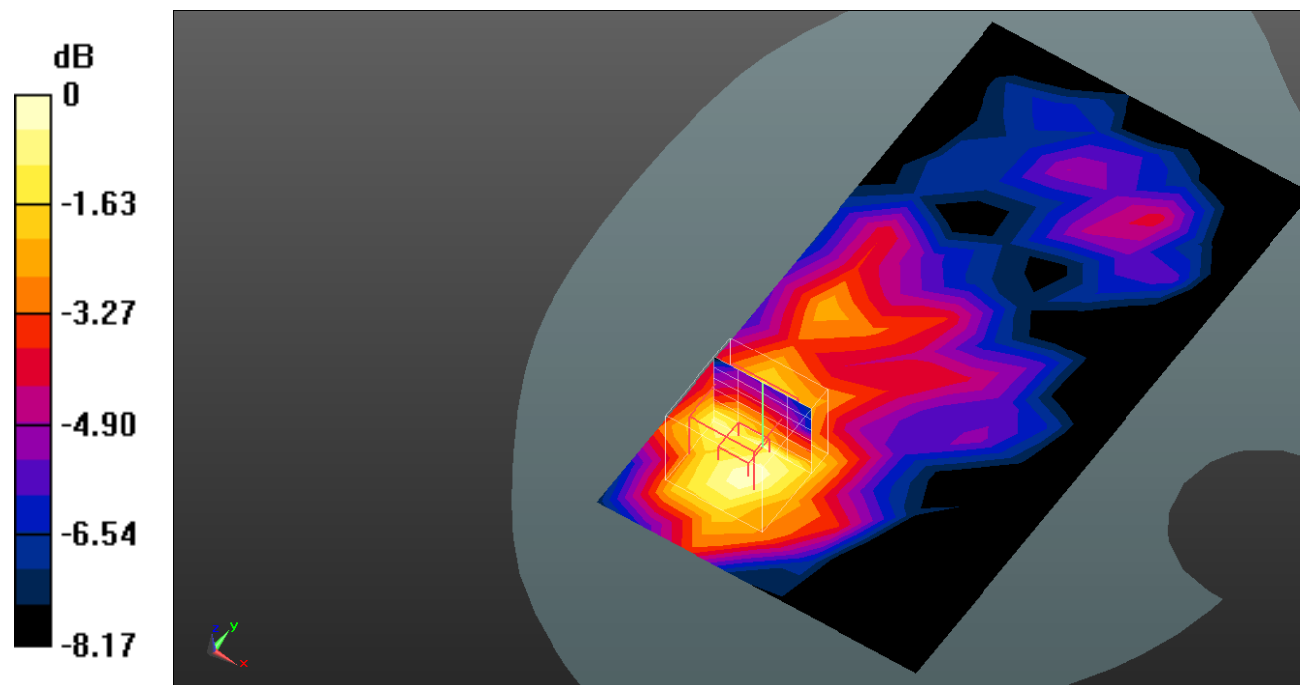

0 dB = 0.208 W/kg = -6.82 dB dBW/kg

Test Plot35#: WCDMA Band 2_Body Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.442 \text{ S/m}$; $\epsilon_r = 39.874$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.420 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.585 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

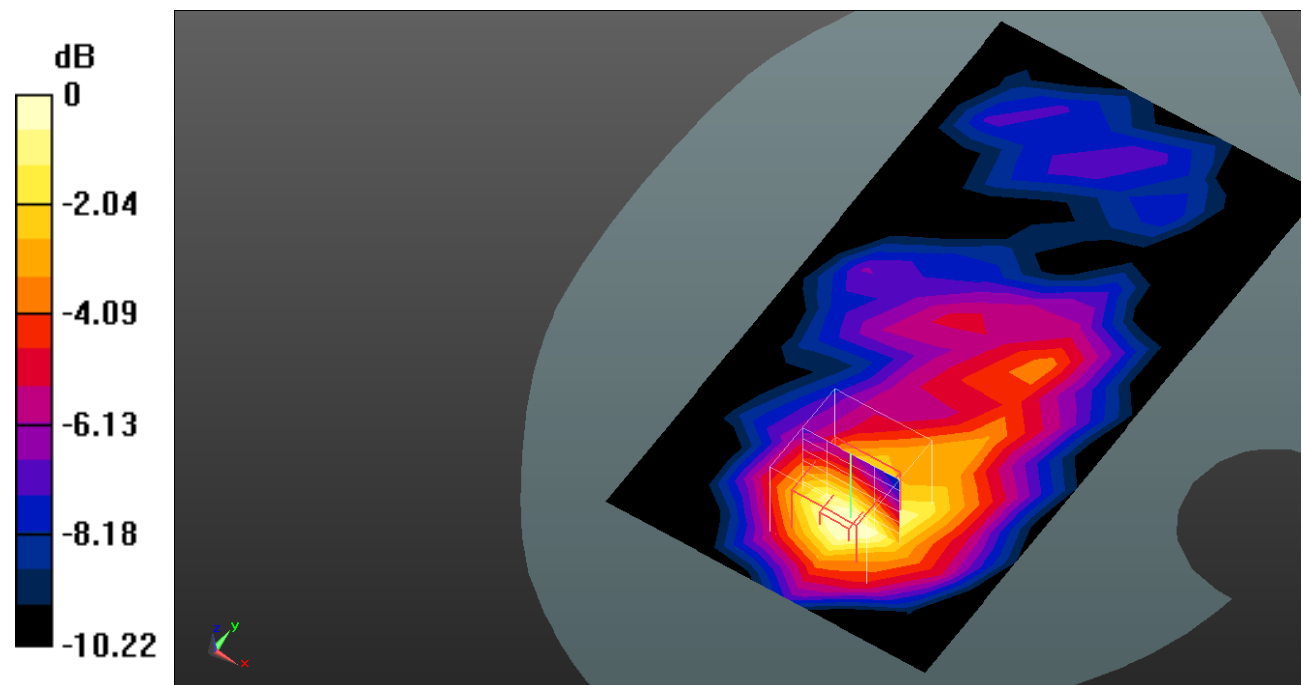

0 dB = 0.319 W/kg = -4.96 dB dBW/kg

Test Plot36#: WCDMA Band 2_Body Left_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.442 \text{ S/m}$; $\epsilon_r = 39.874$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.214 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.883 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

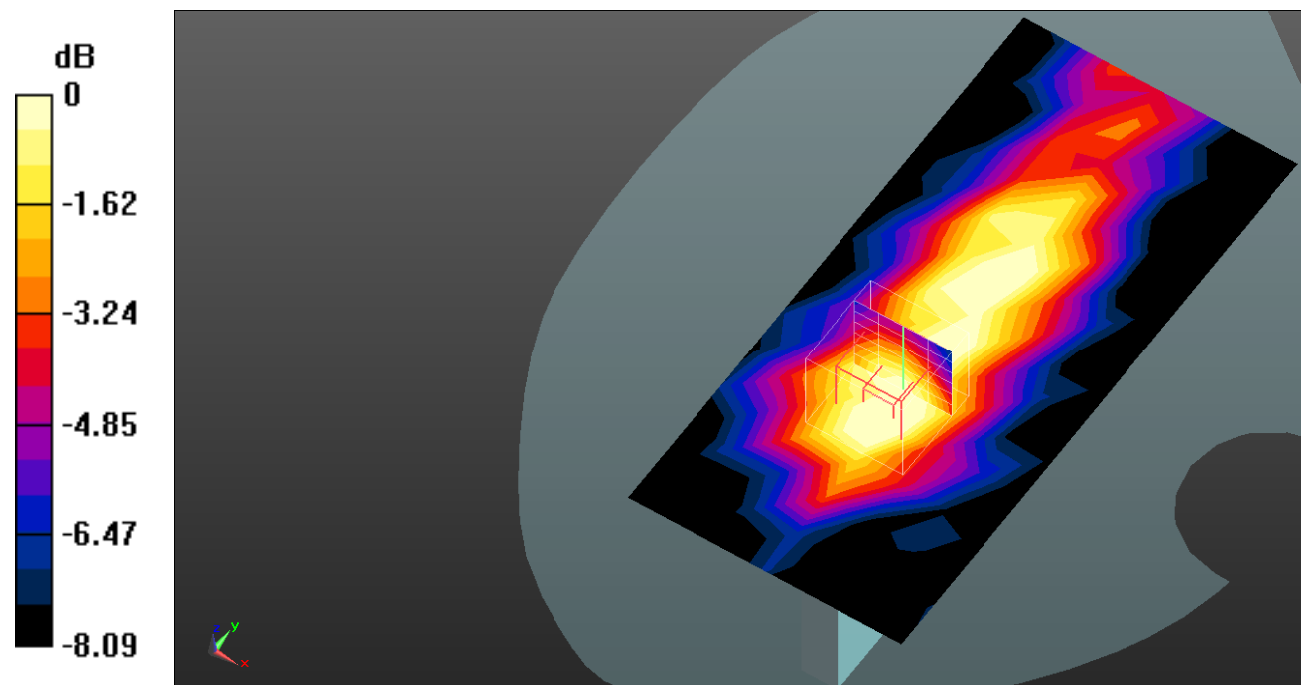

0 dB = 0.153 W/kg = -8.15 dB dBW/kg

Test Plot37#: WCDMA Band 2_Body Right_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.442 \text{ S/m}$; $\epsilon_r = 39.874$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0504 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.418 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0404 W/kg

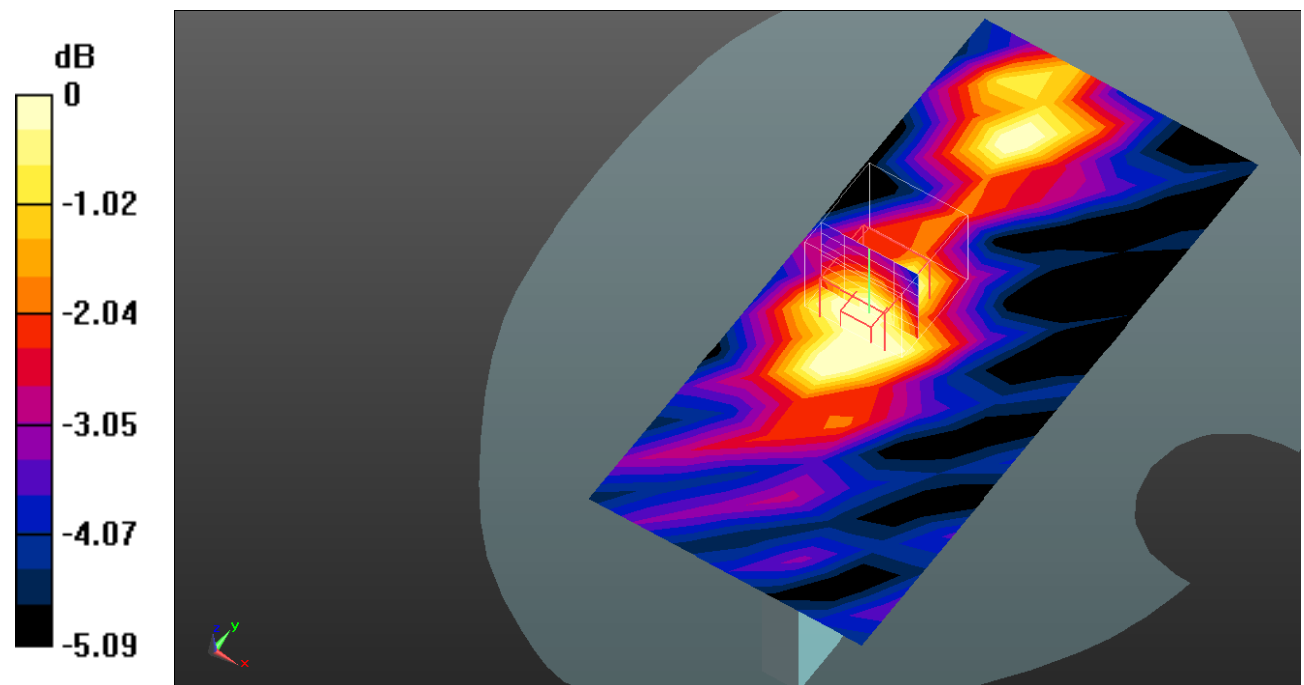

0 dB = 0.0404 W/kg = -13.94 dB dBW/kg

Test Plot38#: WCDMA Band 2_Body Bottom_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 39.874$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1880 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.192 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.494 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

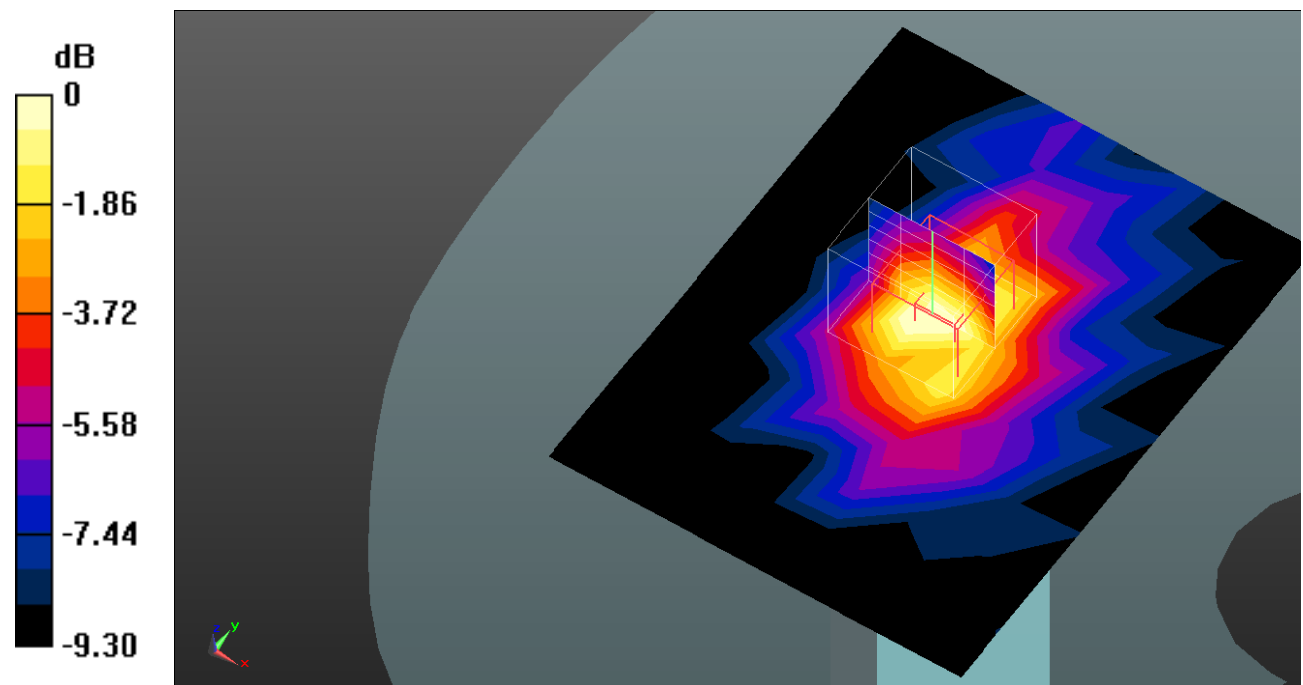

0 dB = 0.154 W/kg = -8.12 dB dBW/kg

Test Plot39#: WCDMA Band 4_Head Left Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.853$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.97, 7.97, 7.97) @1732.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.645 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.23 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.453 W/kg

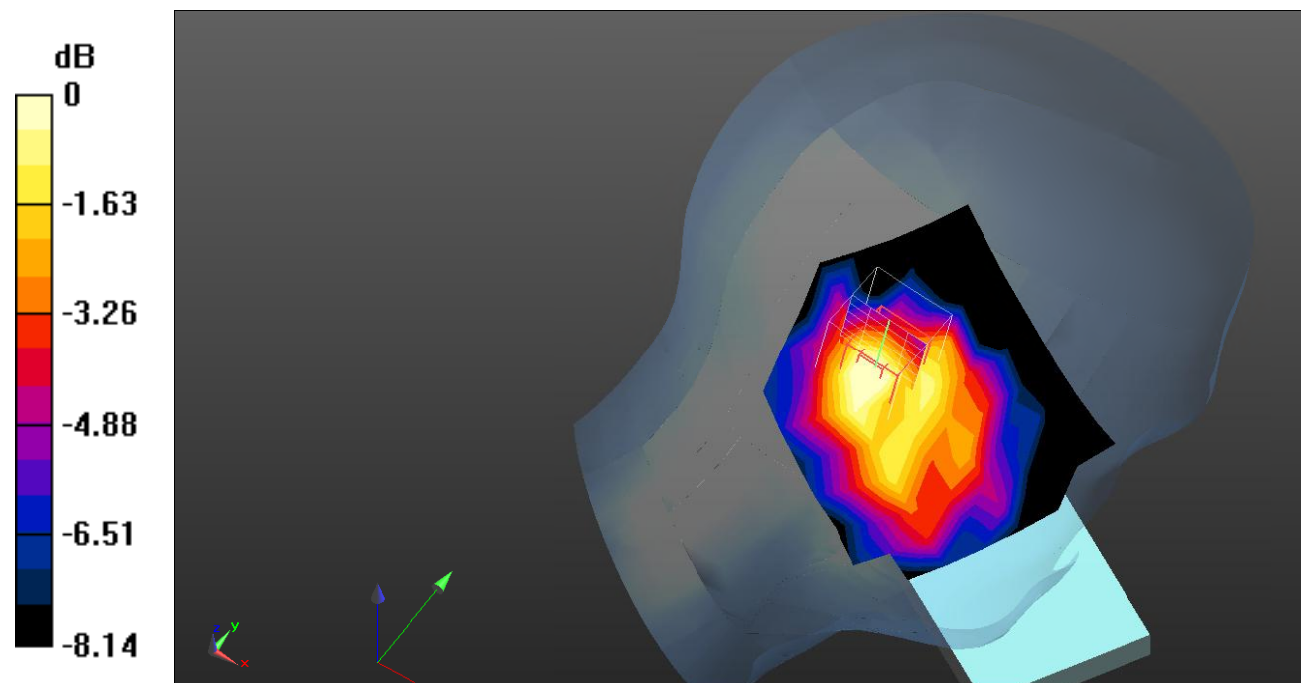

0 dB = 0.453 W/kg = -3.44 dB dBW/kg

Test Plot40#: WCDMA Band 4_Head Left Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.352 \text{ S/m}$; $\epsilon_r = 40.853$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.97, 7.97, 7.97) @1732.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.571 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.80 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.422 W/kg

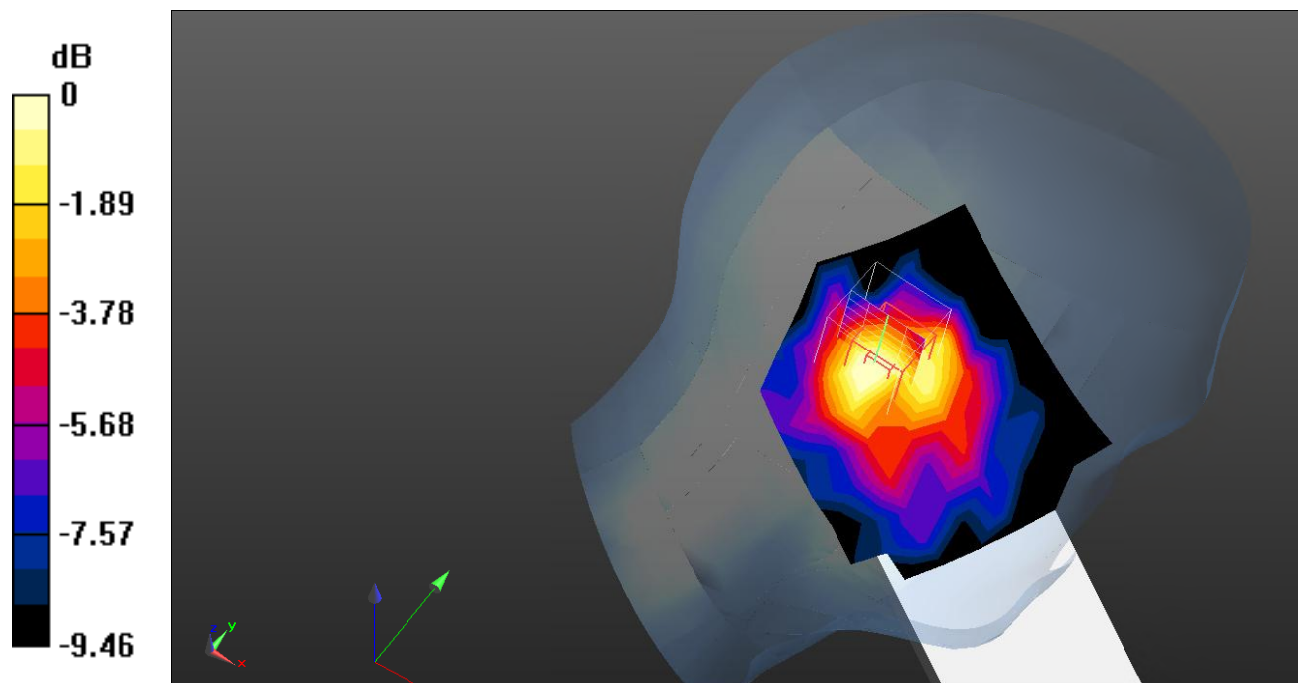

0 dB = 0.422 W/kg = -3.75 dB dBW/kg

Test Plot41#: WCDMA Band 4_Head Right Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.352 \text{ S/m}$; $\epsilon_r = 40.853$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.97, 7.97, 7.97) @1732.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.822 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.81 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.762 W/kg

SAR(1 g) = 0.729 W/kg; SAR(10 g) = 0.554 W/kg

Maximum value of SAR (measured) = 0.748 W/kg

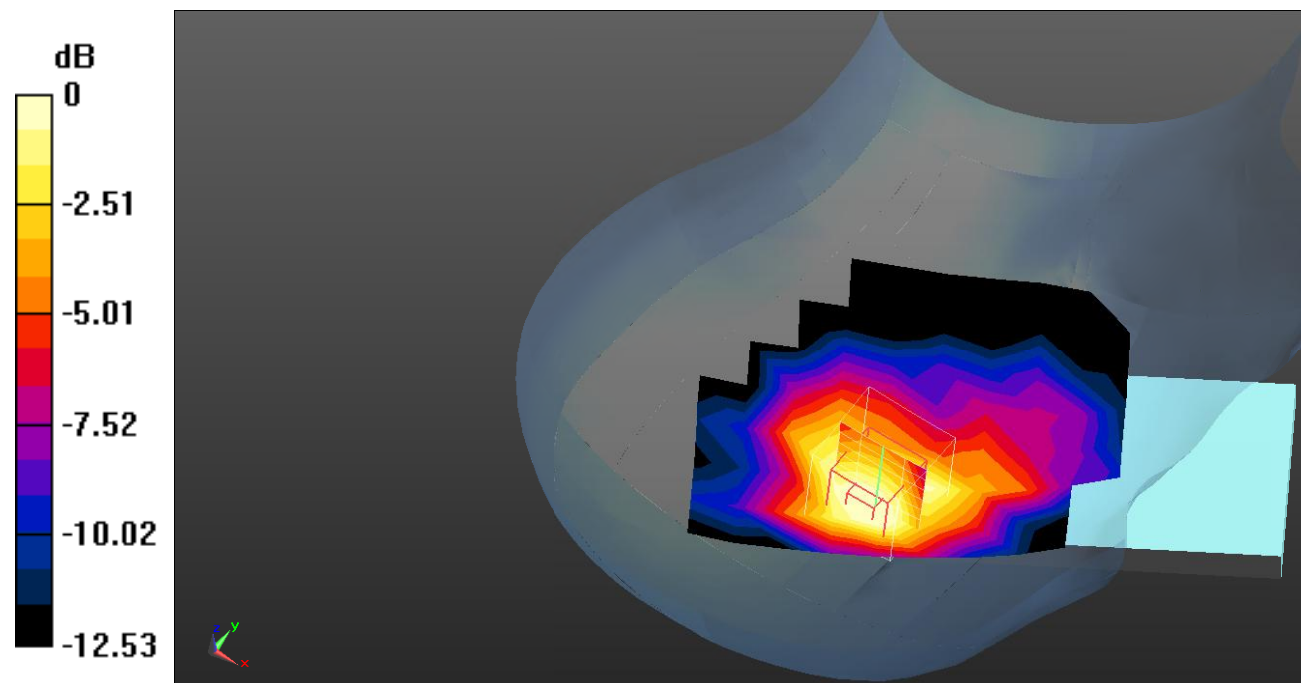

0 dB = 0.748 W/kg = -1.26 dB dBW/kg

Test Plot42#: WCDMA Band 4_Head Right Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.853$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.97, 7.97, 7.97) @1732.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.639 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.16 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.520 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

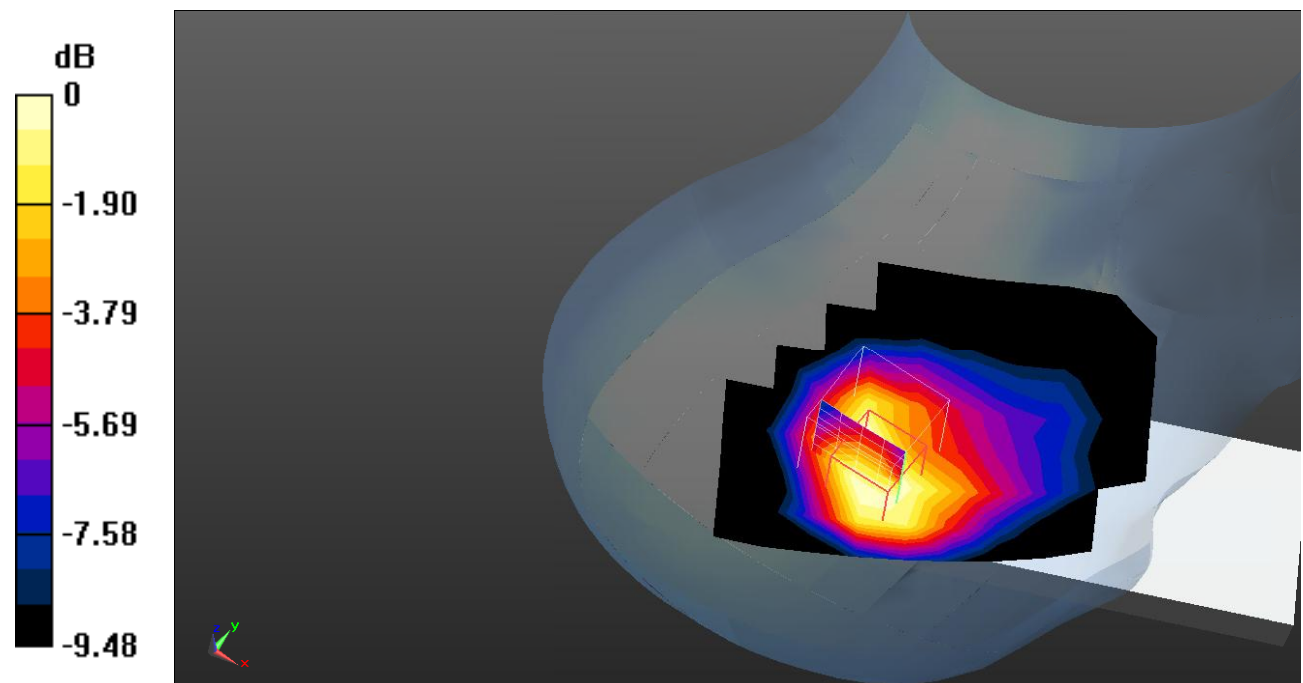

0 dB = 0.554 W/kg = -2.56 dB dBW/kg

Test Plot43#: WCDMA Band 4_Body Front_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.853$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.97, 7.97, 7.97) @1732.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.309 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.116 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

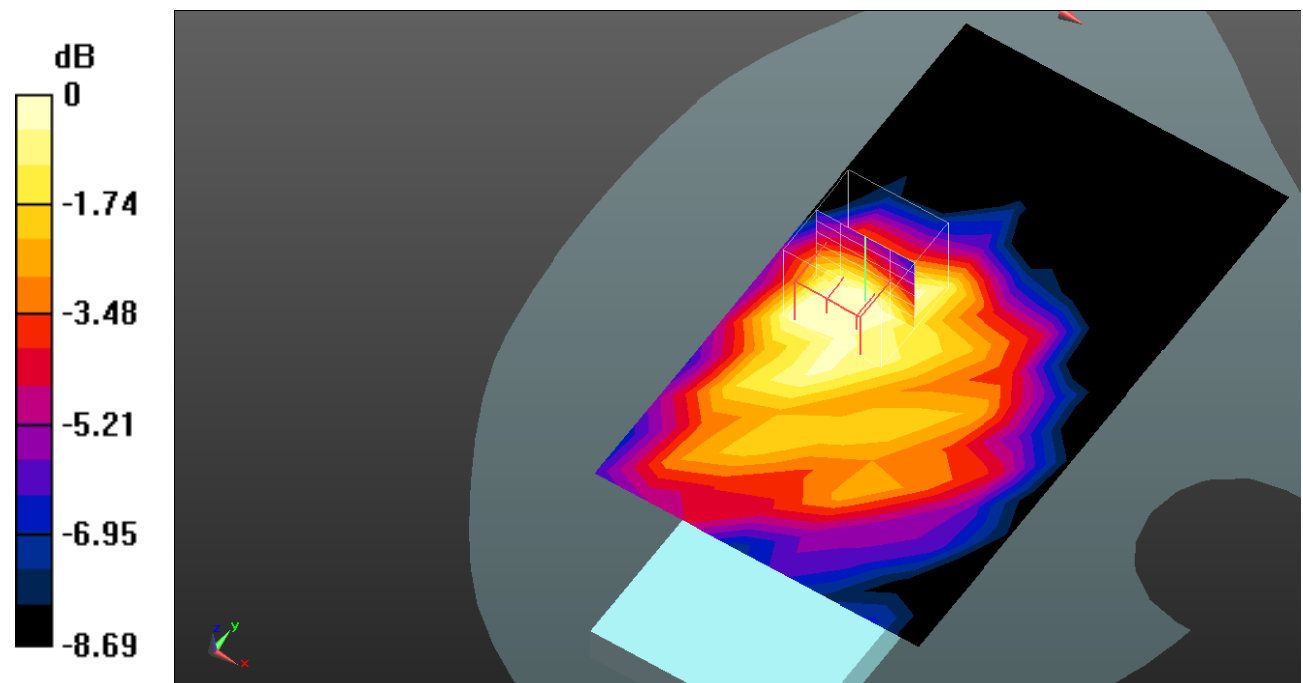

0 dB = 0.241 W/kg = -6.18 dB dBW/kg

Test Plot44#: WCDMA Band 4_Body Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.853$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.97, 7.97, 7.97) @1732.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.434 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

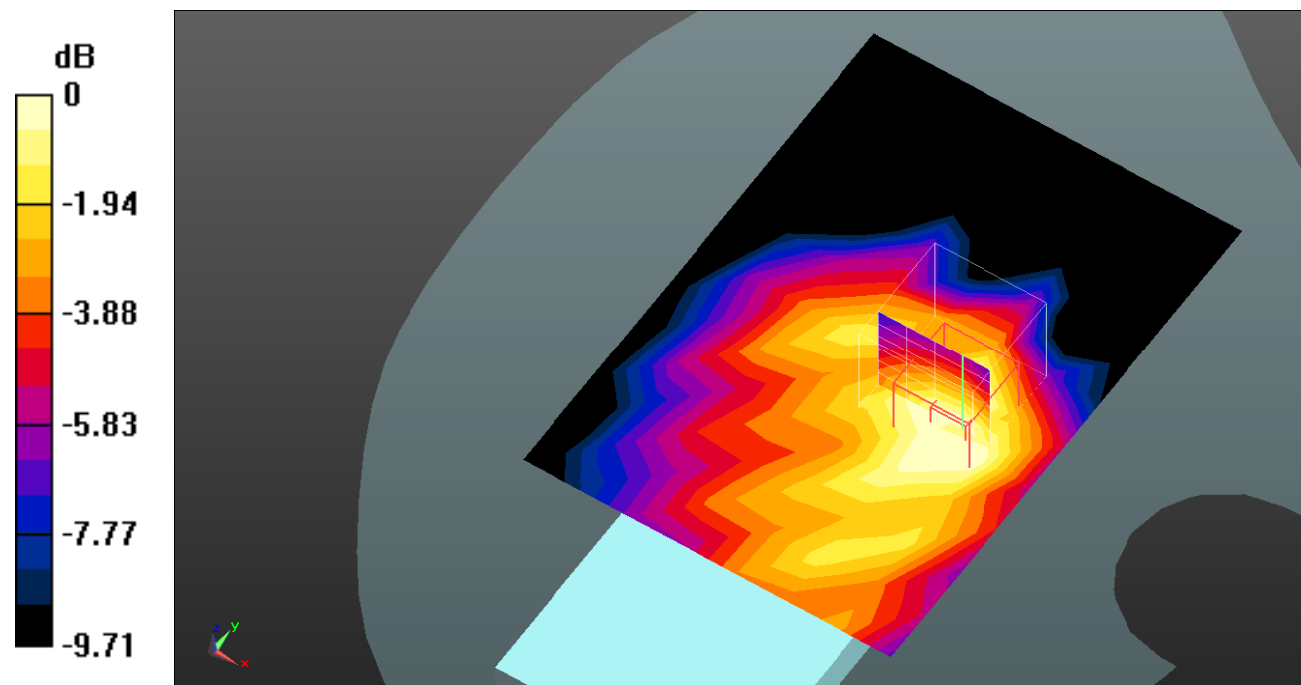

0 dB = 0.328 W/kg = -4.84 dB dBW/kg

Test Plot45#: WCDMA Band 4_Body Left_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6 \text{ MHz}$; $\sigma = 1.352 \text{ S/m}$; $\epsilon_r = 40.853$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.97, 7.97, 7.97) @1732.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.328 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.54 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.293 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

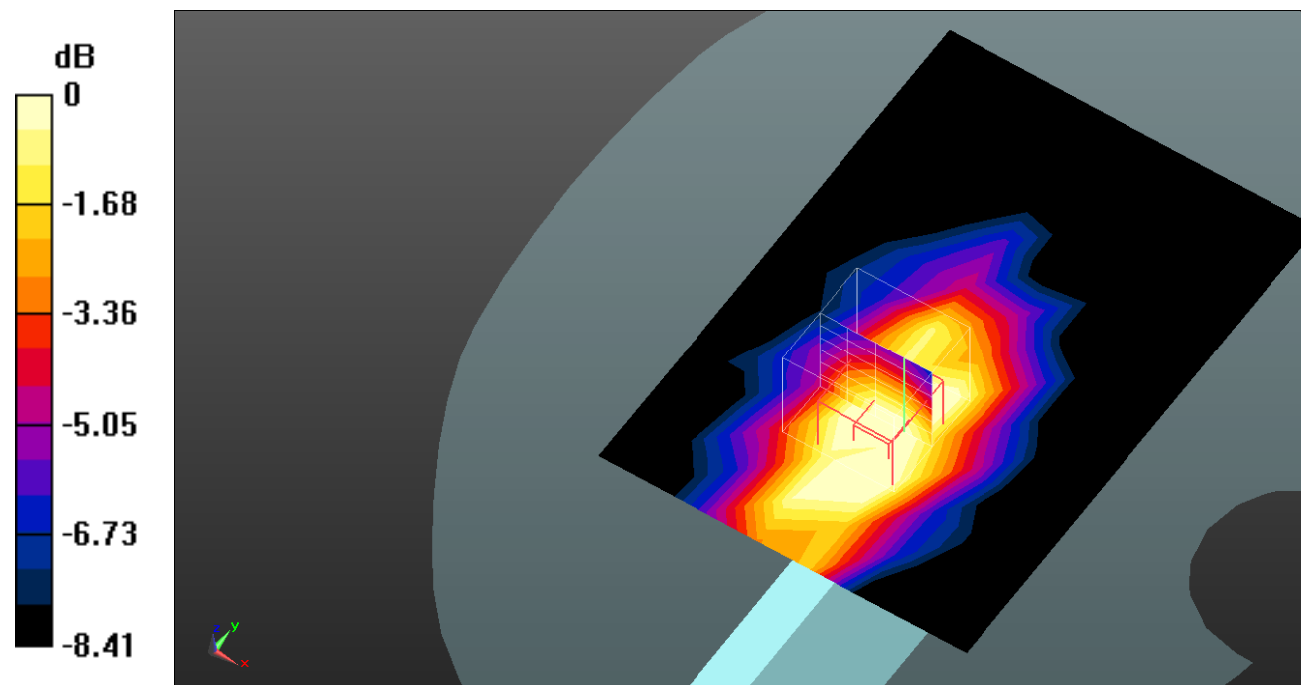

0 dB = 0.276 W/kg = -5.59 dB dBW/kg

Test Plot46#: WCDMA Band 4_Body Top_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.853$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.97, 7.97, 7.97) @1732.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.310 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.35 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.257 W/kg

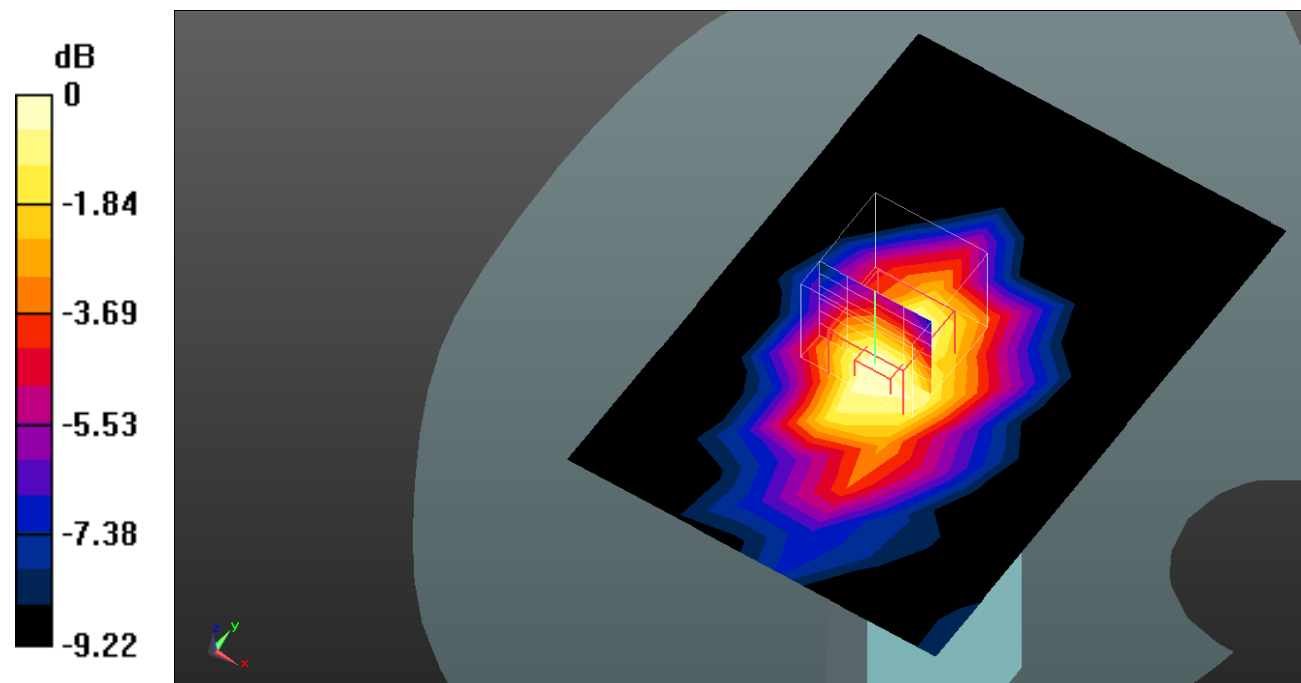

0 dB = 0.257 W/kg = -5.90 dB dBW/kg

Test Plot47#: WCDMA Band 5_Head Left Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.00884 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.074 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.00713 W/kg

SAR(1 g) = 0.0067 W/kg; SAR(10 g) = 0.00612 W/kg

Maximum value of SAR (measured) = 0.00713 W/kg

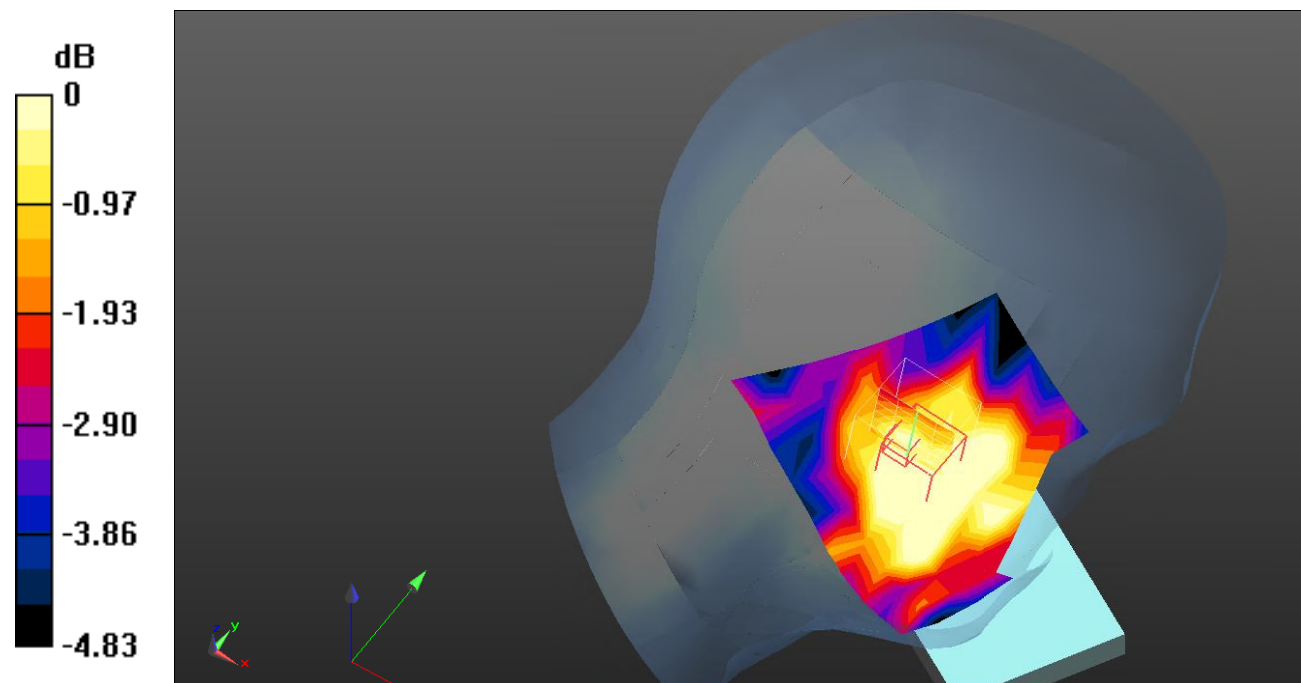

0 dB = 0.00713 W/kg = -21.47 dB dBW/kg

Test Plot48#: WCDMA Band 5_Head Left Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00642 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.848 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.00932 W/kg

SAR(1 g) = 0.00569 W/kg; SAR(10 g) = 0.00475 W/kg

Maximum value of SAR (measured) = 0.00697 W/kg

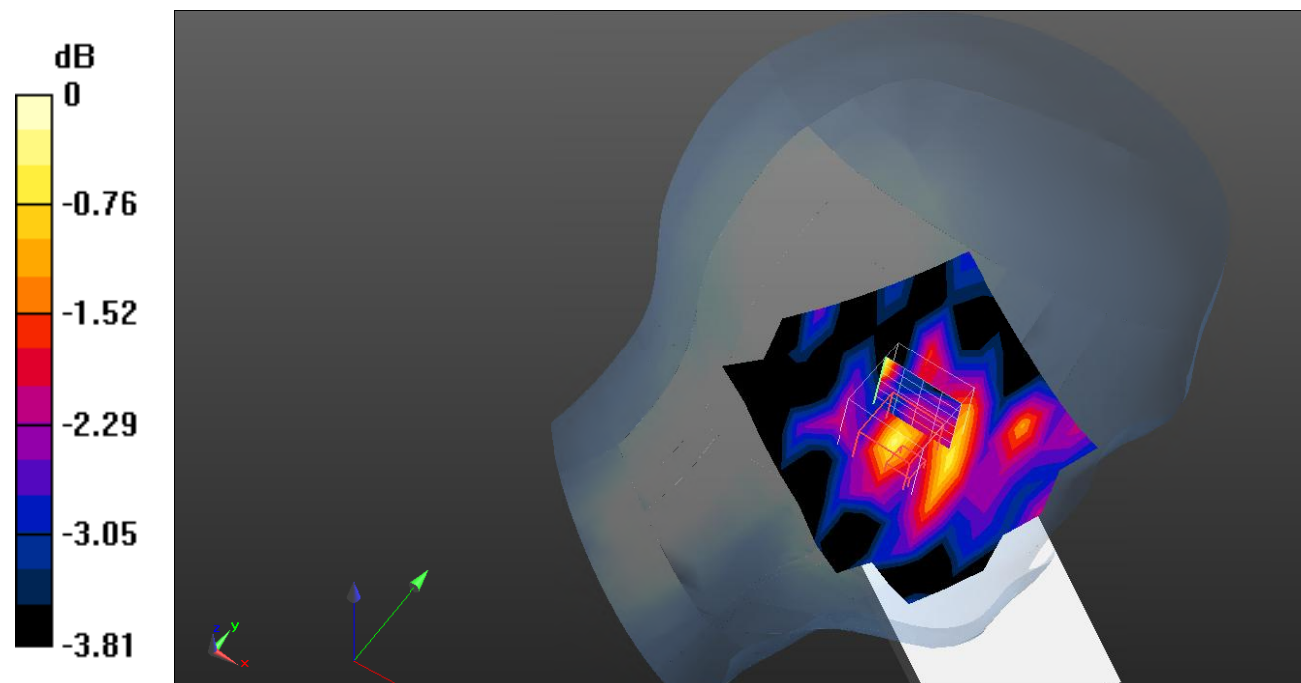

0 dB = 0.00697 W/kg = -21.57 dB dBW/kg

Test Plot49#: WCDMA Band 5_Head Right Cheek_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.00991 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.145 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.00822 W/kg

SAR(1 g) = 0.008 W/kg; SAR(10 g) = 0.0073 W/kg

Maximum value of SAR (measured) = 0.00809 W/kg

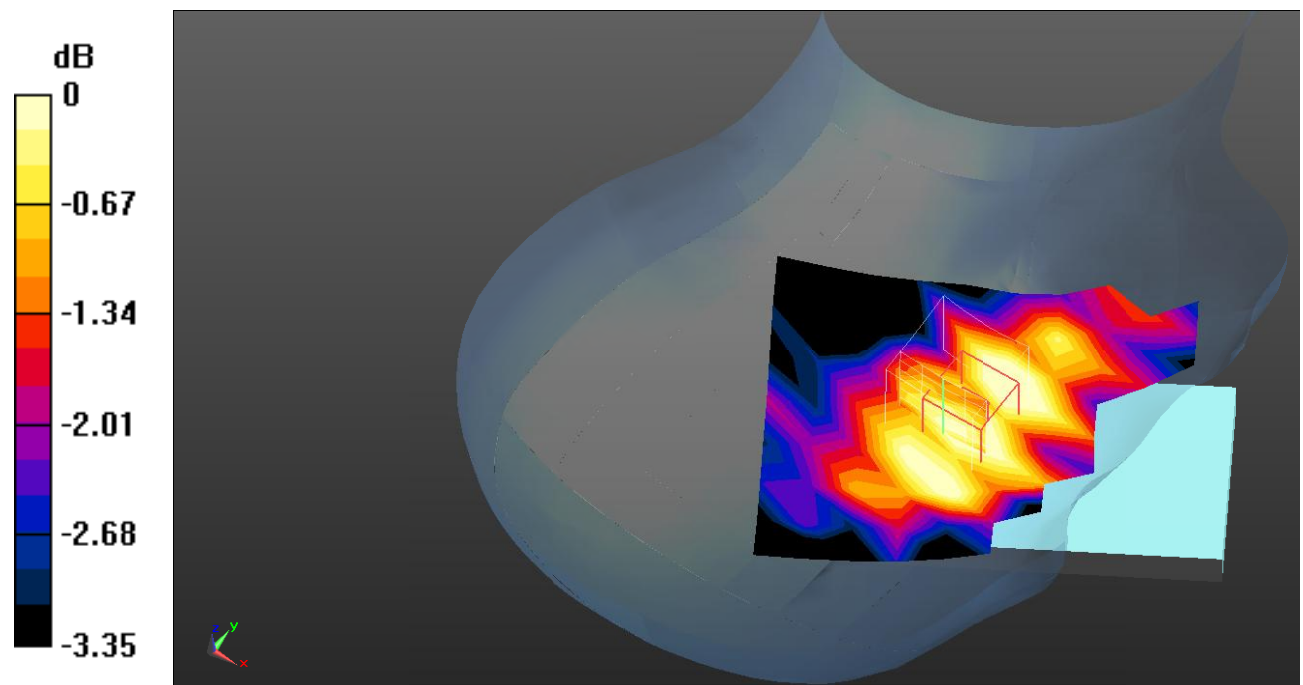

0 dB = 0.00809 W/kg = -20.92 dB dBW/kg

Test Plot50#: WCDMA Band 5_Head Right Tilt_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00554 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.960 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.00584 W/kg

SAR(1 g) = 0.00545 W/kg; SAR(10 g) = 0.0051 W/kg

Maximum value of SAR (measured) = 0.00584 W/kg

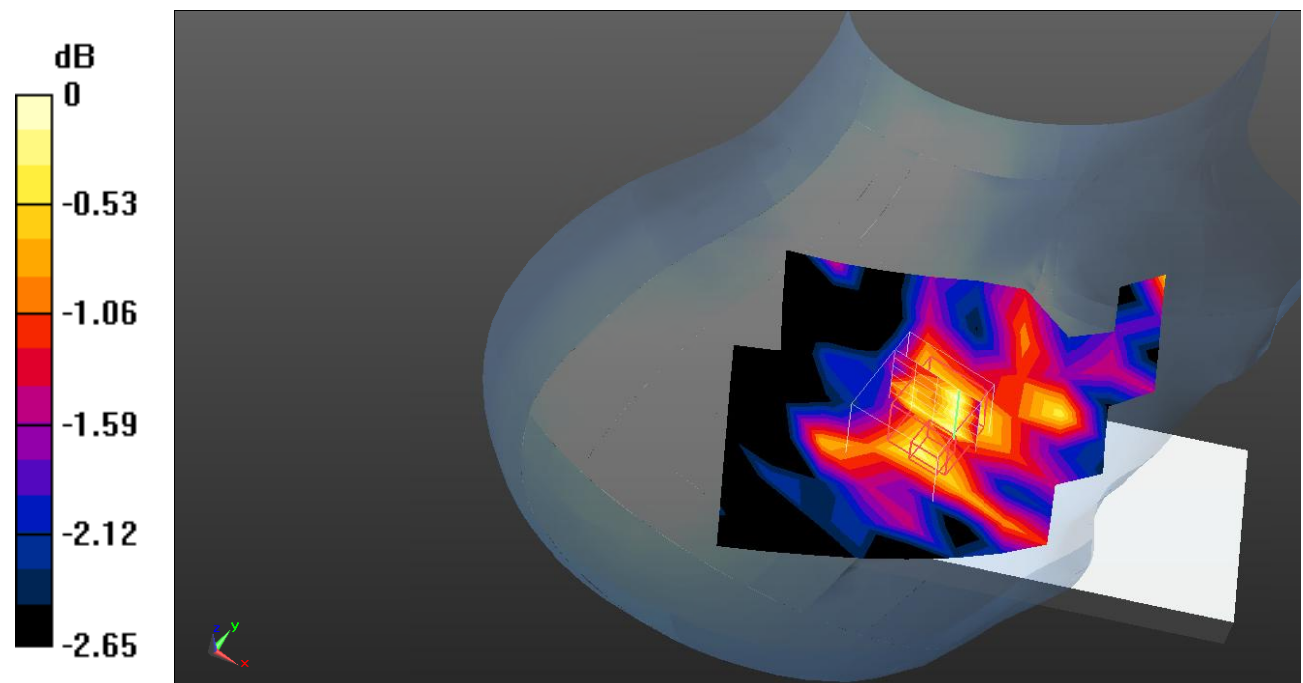

0 dB = 0.00584 W/kg = -22.34 dB dBW/kg

Test Plot51#: WCDMA Band 5_Body Front_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.00860 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.799 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.00852 W/kg; SAR(10 g) = 0.00712 W/kg

Maximum value of SAR (measured) = 0.00959 W/kg

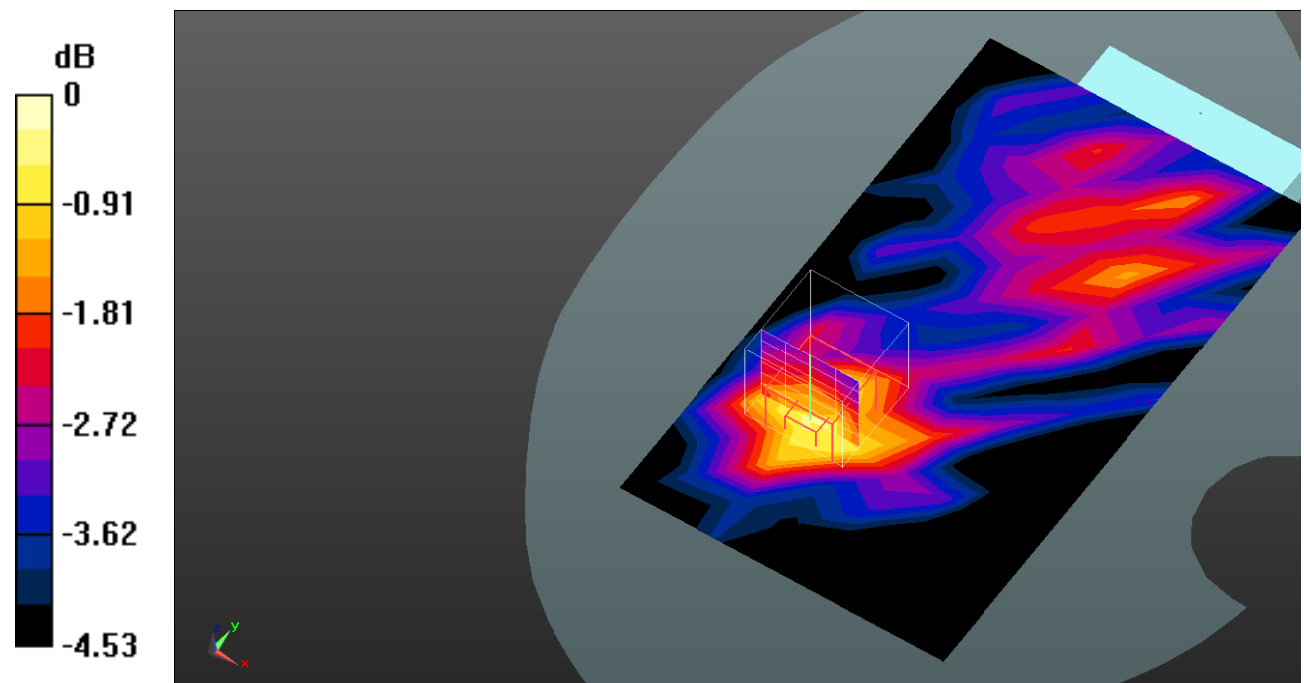

0 dB = 0.00959 W/kg = -20.18 dB dBW/kg

Test Plot52#: WCDMA Band 5_Body Back_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0347 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.486 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0324 W/kg

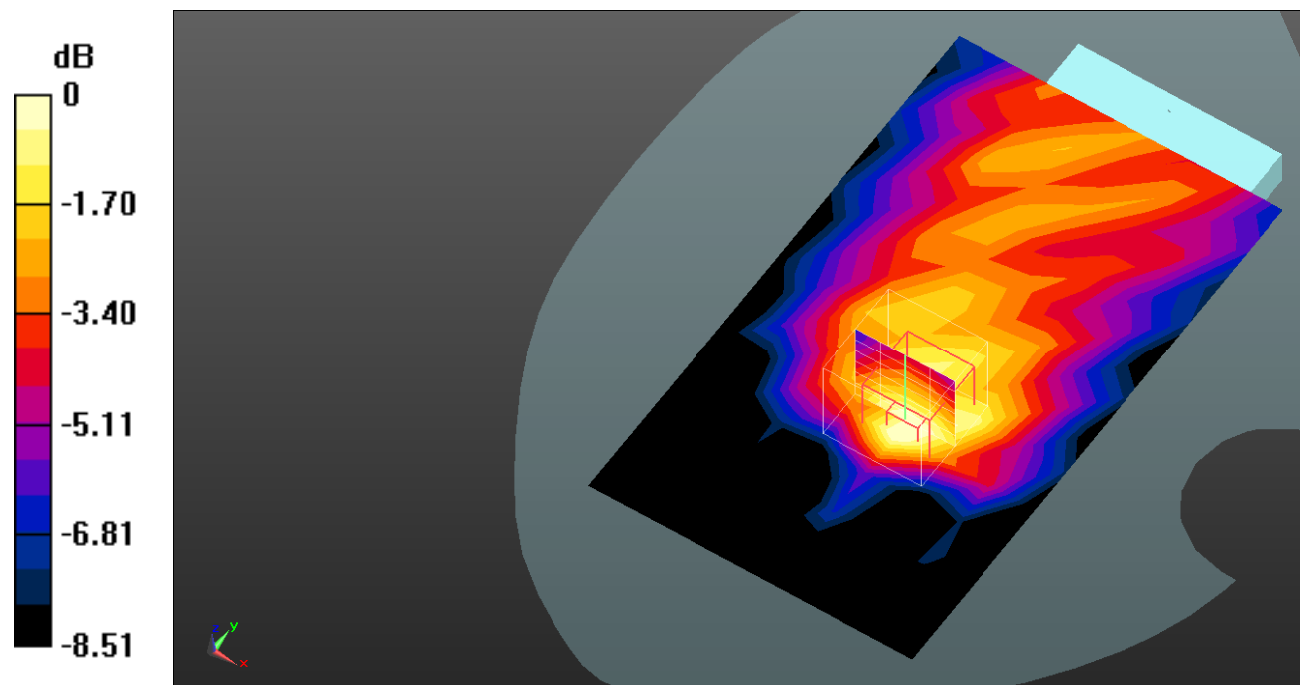

0 dB = 0.0324 W/kg = -14.89 dB dBW/kg

Test Plot53#: WCDMA Band 5_Body Left_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0126 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.586 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.00946 W/kg

SAR(1 g) = 0.00919 W/kg; SAR(10 g) = 0.00834 W/kg

Maximum value of SAR (measured) = 0.00934 W/kg

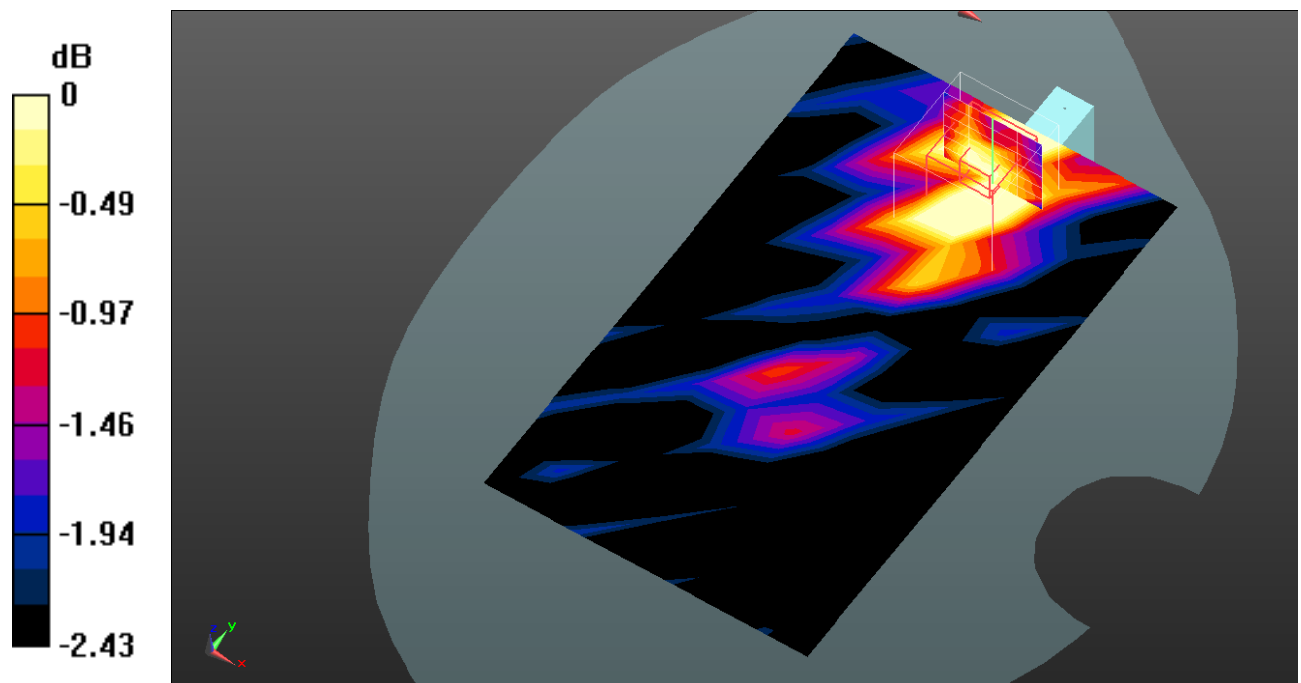

0 dB = 0.00934 W/kg = -20.30 dB dBW/kg

Test Plot54#: WCDMA Band 5_Body Right_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.934 \text{ S/m}$; $\epsilon_r = 42.286$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0120 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.446 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.00971 W/kg; SAR(10 g) = 0.00868 W/kg

Maximum value of SAR (measured) = 0.0104 W/kg

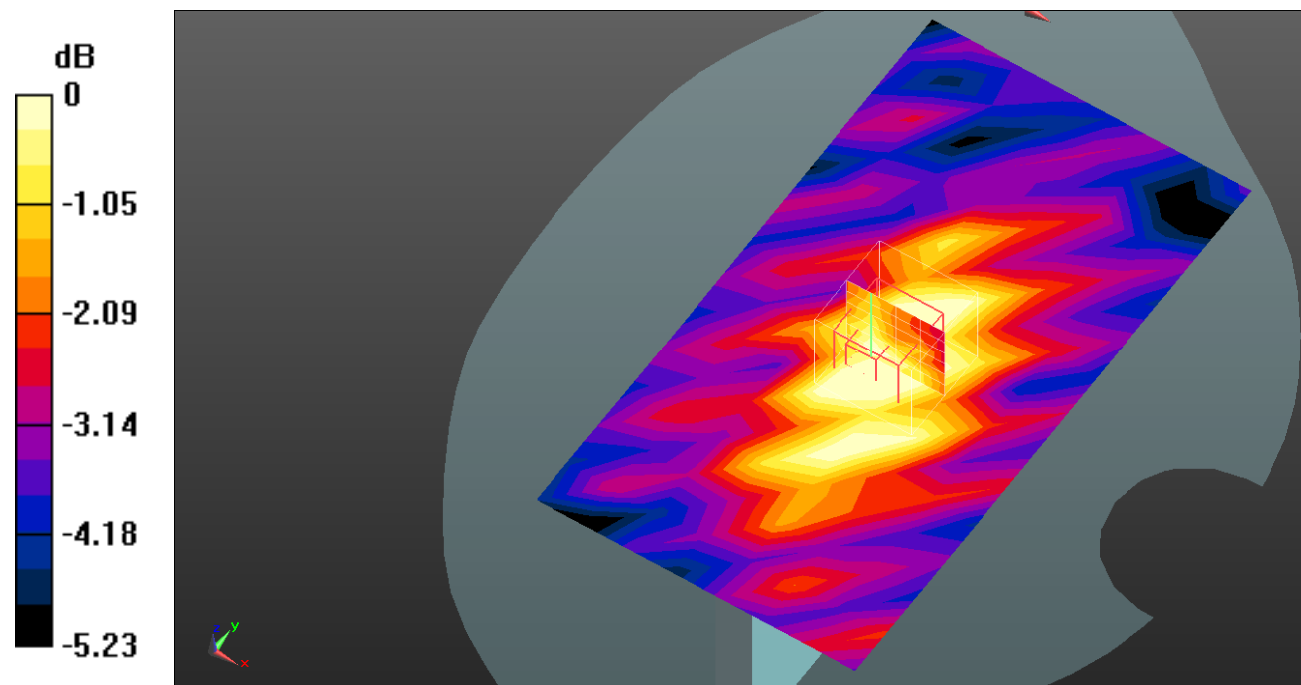

0 dB = 0.0104 W/kg = -19.83 dB dBW/kg

Test Plot55#: WCDMA Band 5_Body Bottom_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.286$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @836.6 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0108 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.931 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.00955 W/kg

SAR(1 g) = 0.00885 W/kg; SAR(10 g) = 0.00727 W/kg

Maximum value of SAR (measured) = 0.00942 W/kg

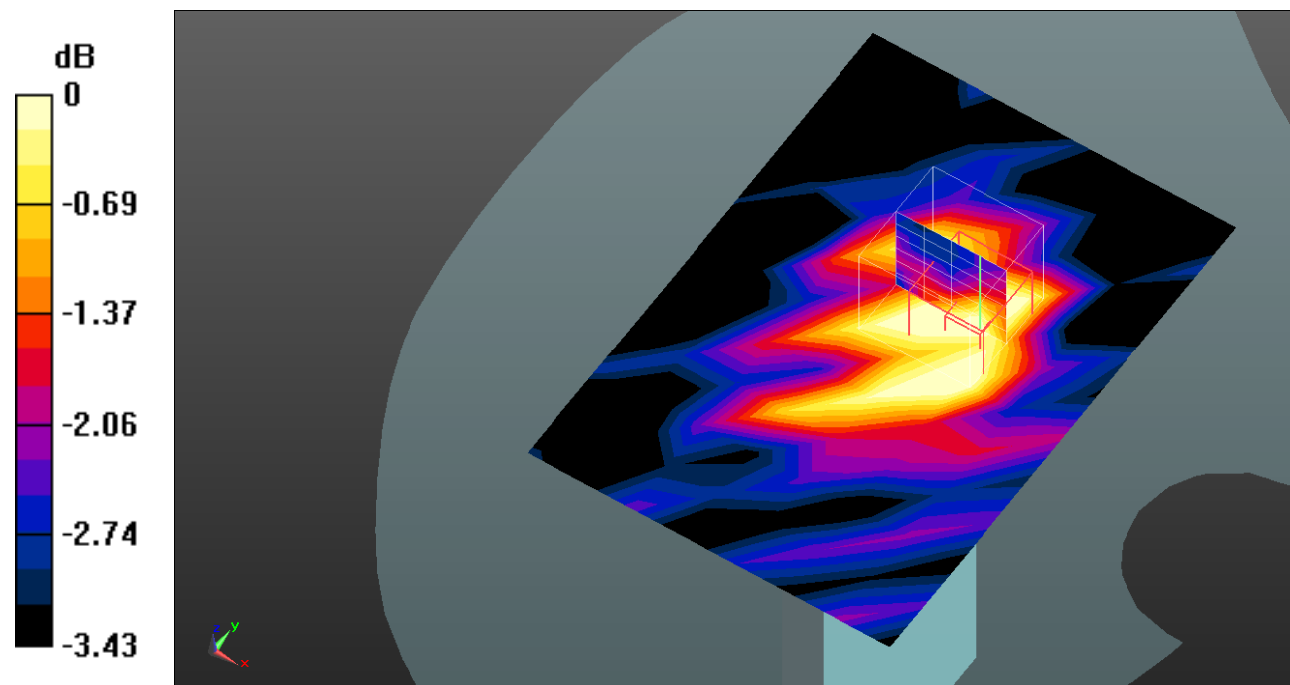

0 dB = 0.00942 W/kg = -20.26 dB dBW/kg

Test Plot56#: LTE Band 7_Head Left Cheek_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0417 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.629 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0436 W/kg

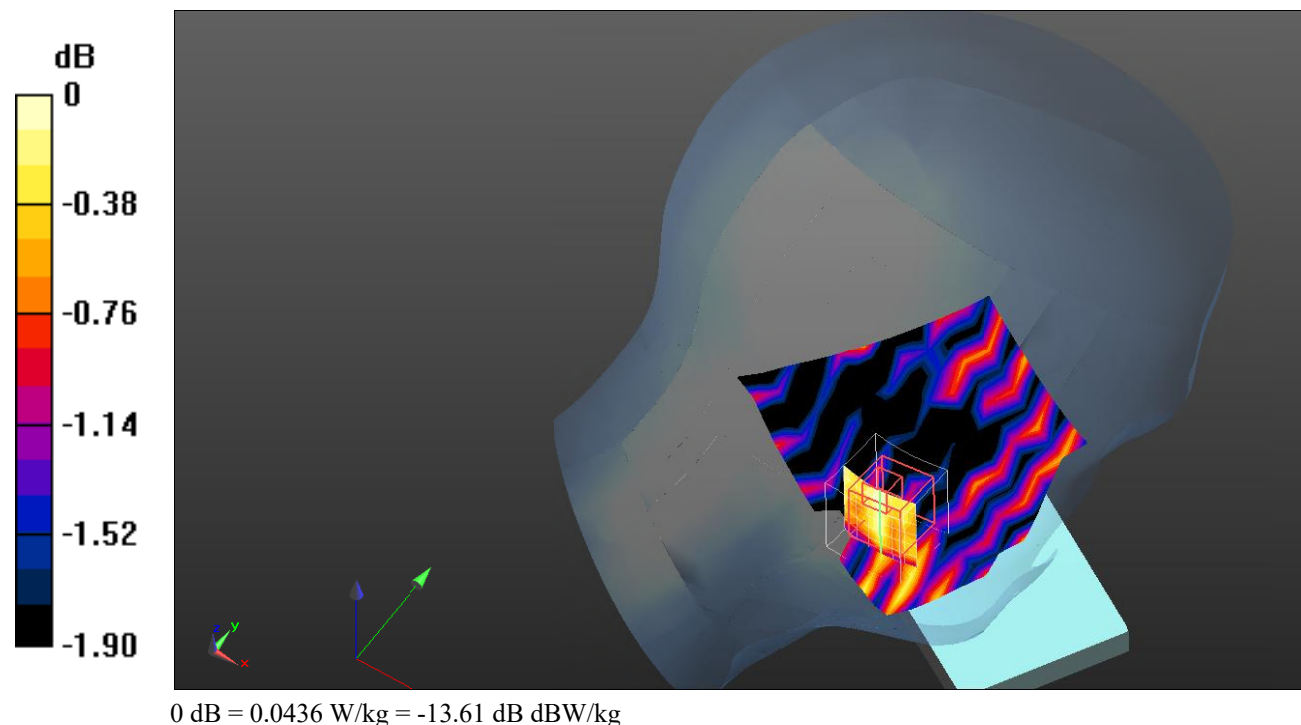

Test Plot57#: LTE Band 7_Head Left Cheek_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0240 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.655 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0185 W/kg

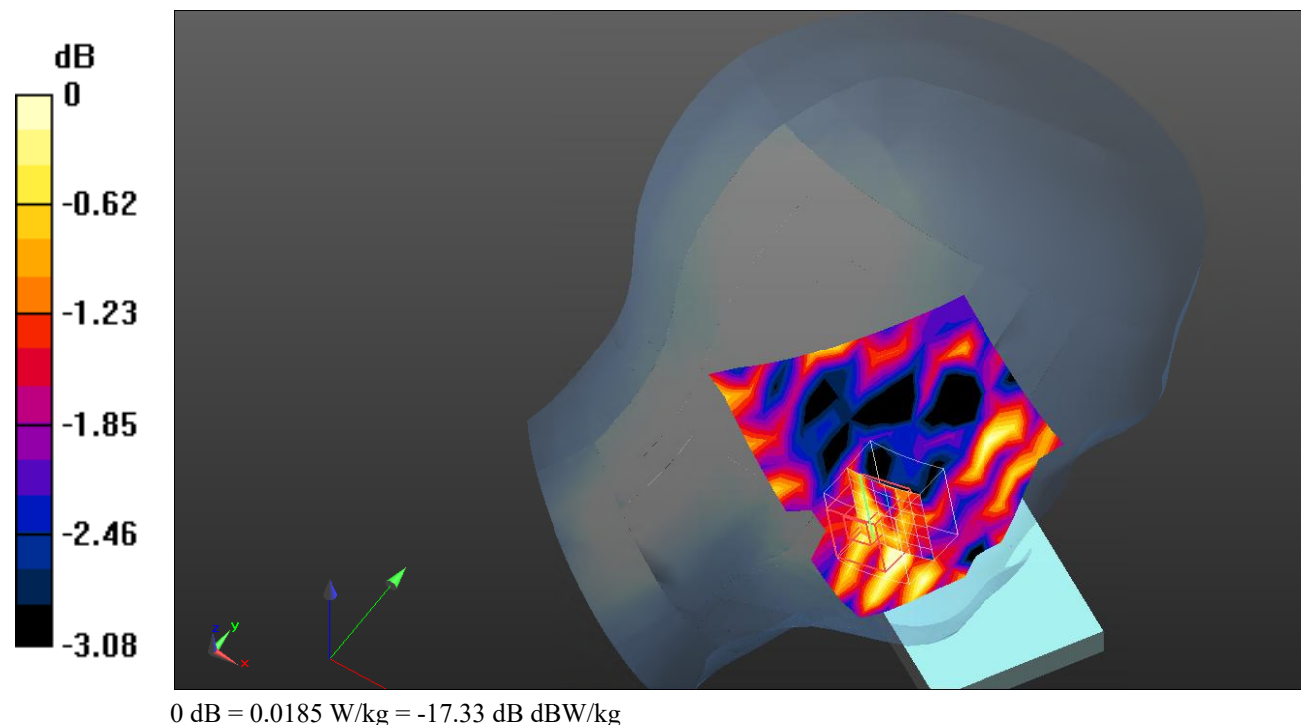

Test Plot58#: LTE Band 7_Head Left Tilt_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0212 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.373 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0291 W/kg

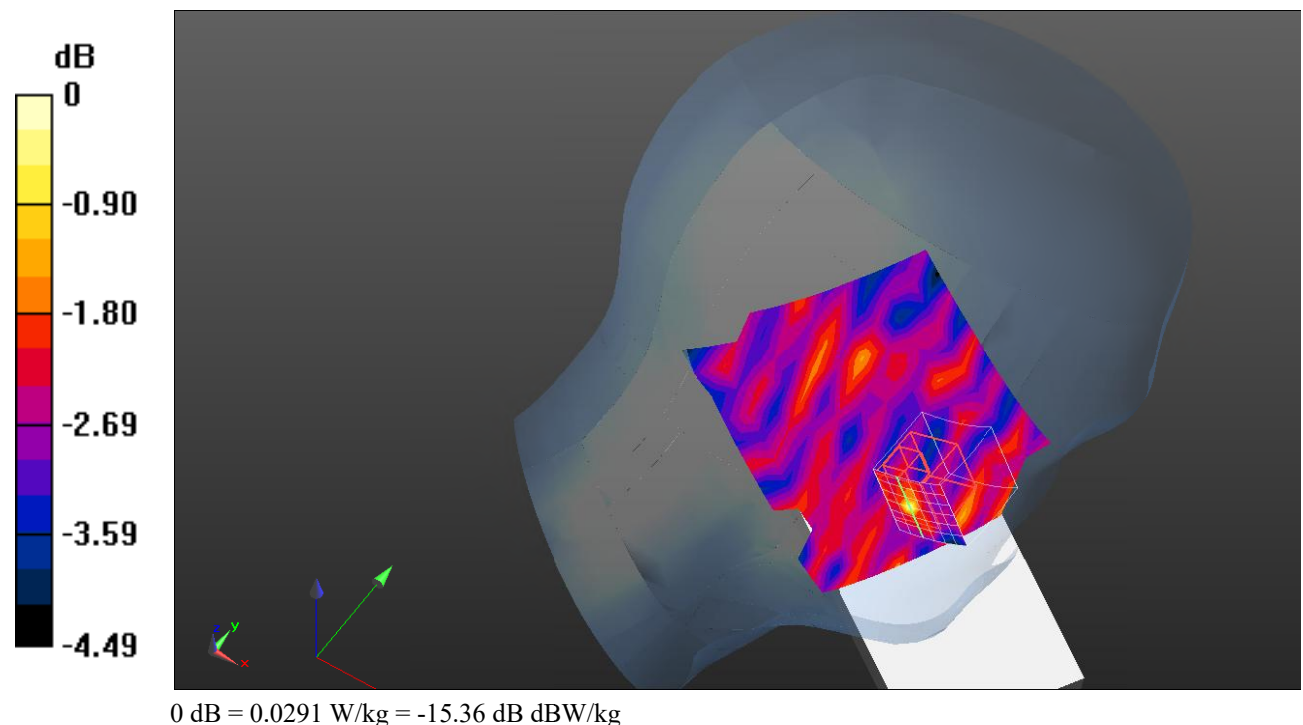

Test Plot59#: LTE Band 7_Head Left Tilt_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0204 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.434 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0206 W/kg

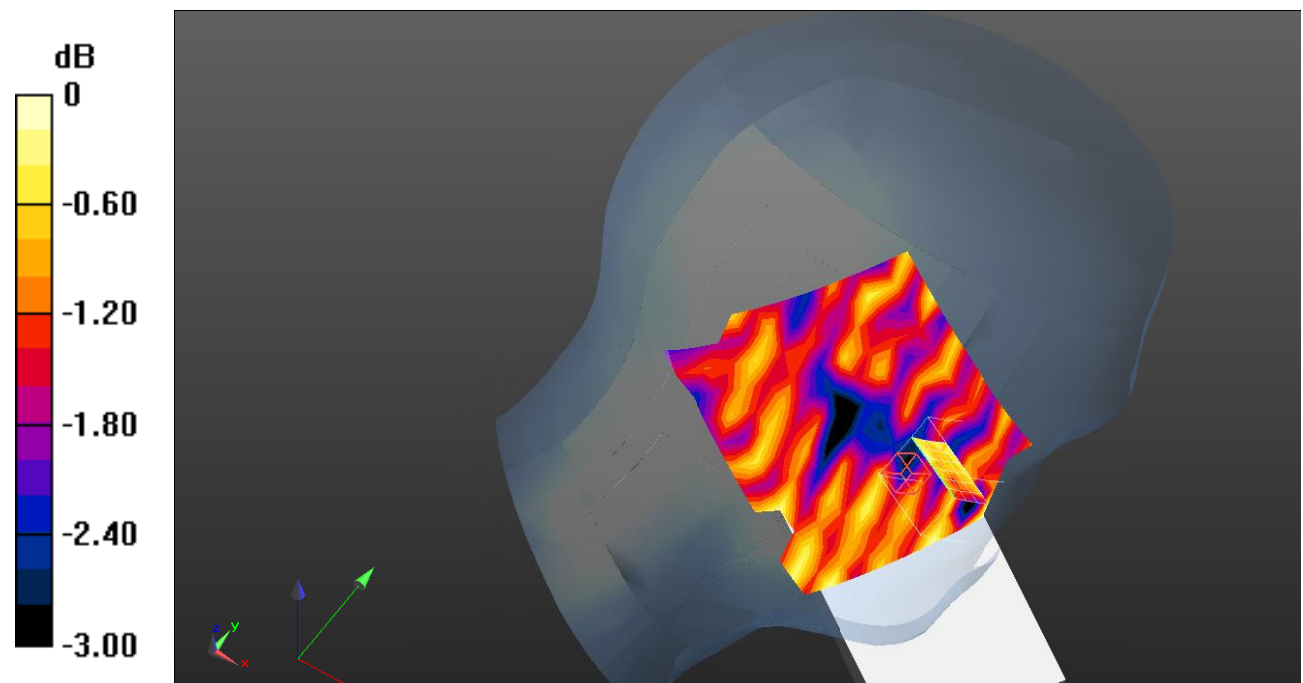

0 dB = 0.0206 W/kg = -16.86 dB dBW/kg

Test Plot60#: LTE Band 7_Head Right Cheek_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0253 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.235 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0213 W/kg

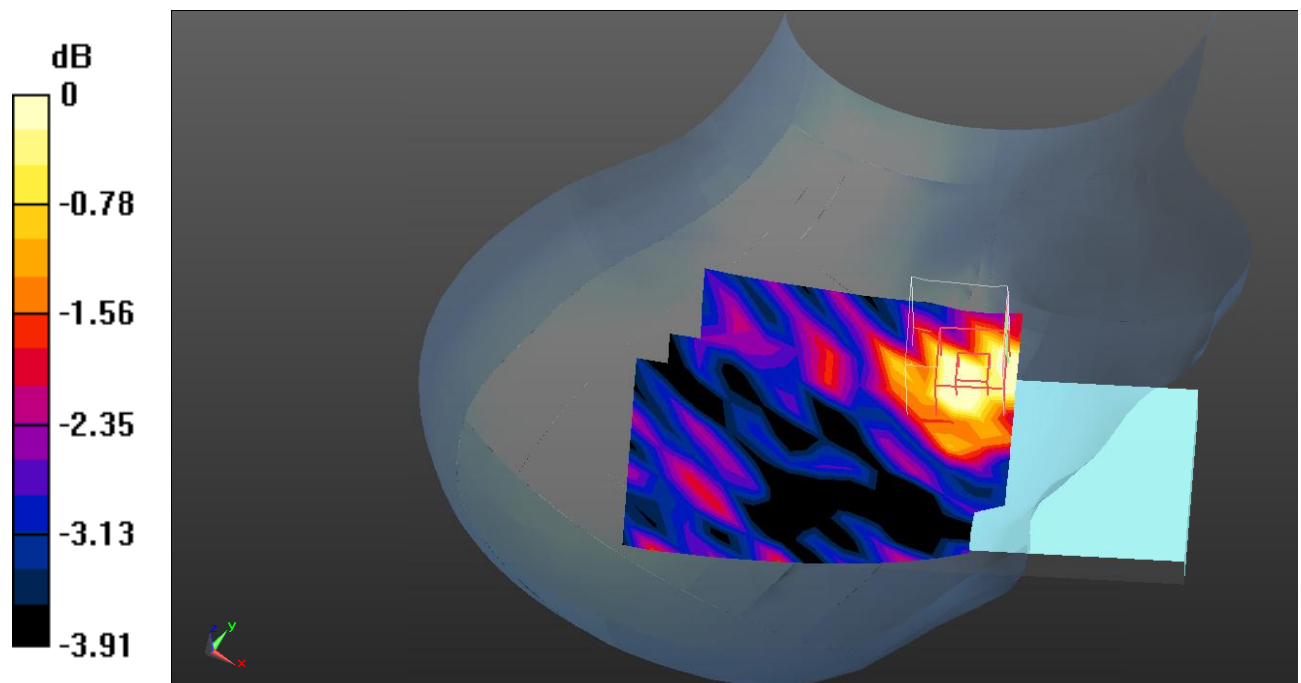

0 dB = 0.0213 W/kg = -16.72 dB dBW/kg

Test Plot61#: LTE Band 7_Head Right Cheek_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0209 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.999 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0188 W/kg

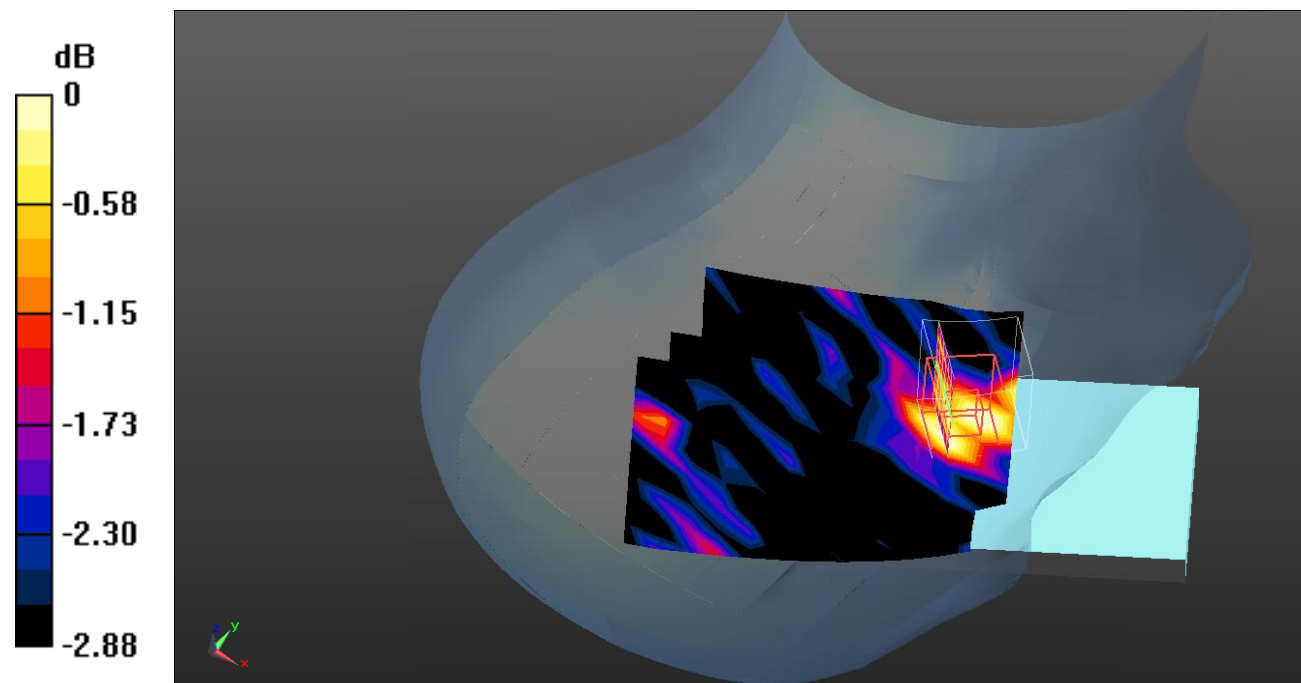

0 dB = 0.0188 W/kg = -17.26 dB dBW/kg

Test Plot62#: LTE Band 7_Head Right Tilt_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0150 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.859 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0168 W/kg

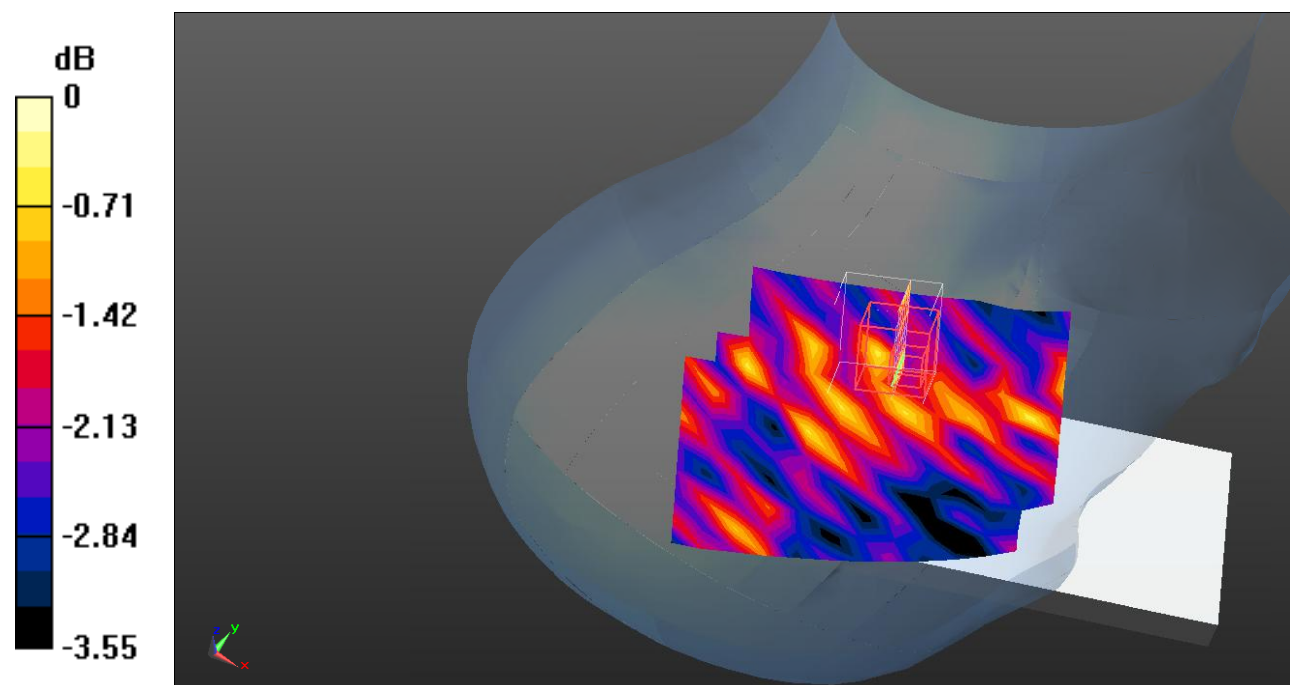

0 dB = 0.0168 W/kg = -17.75 dB dBW/kg

Test Plot63#: LTE Band 7_Head Right Tilt_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0137 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.980 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0173 W/kg

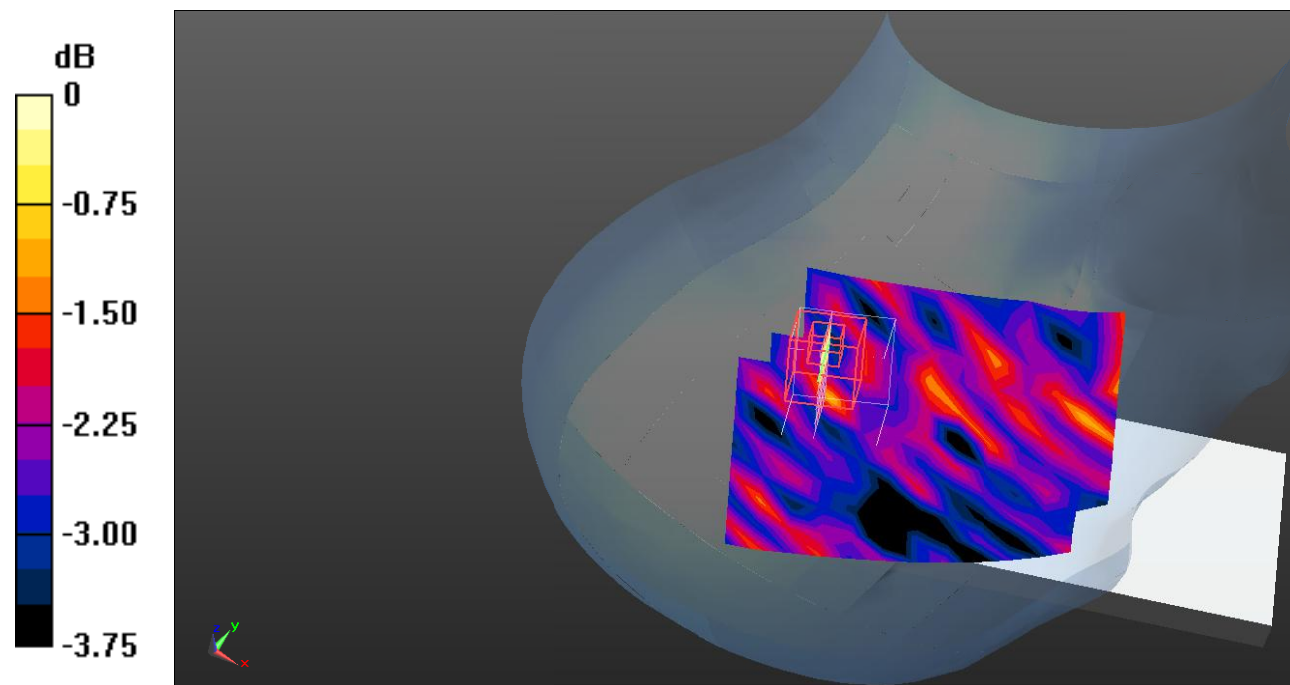

0 dB = 0.0173 W/kg = -17.62 dB dBW/kg

Test Plot64#: LTE Band 7_Body Front_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0800 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.755 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0599 W/kg

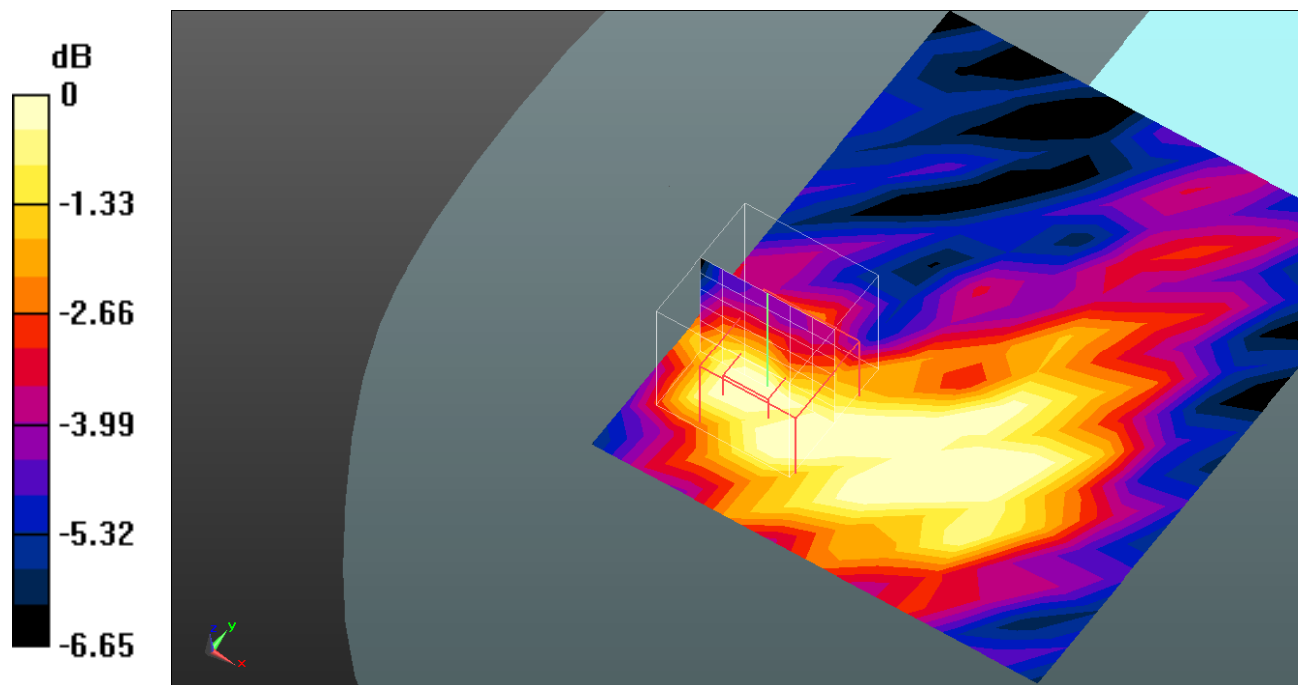

0 dB = 0.0599 W/kg = -12.23 dB dBW/kg

Test Plot65#: LTE Band 7_Body Front_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0661 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.559 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0655 W/kg

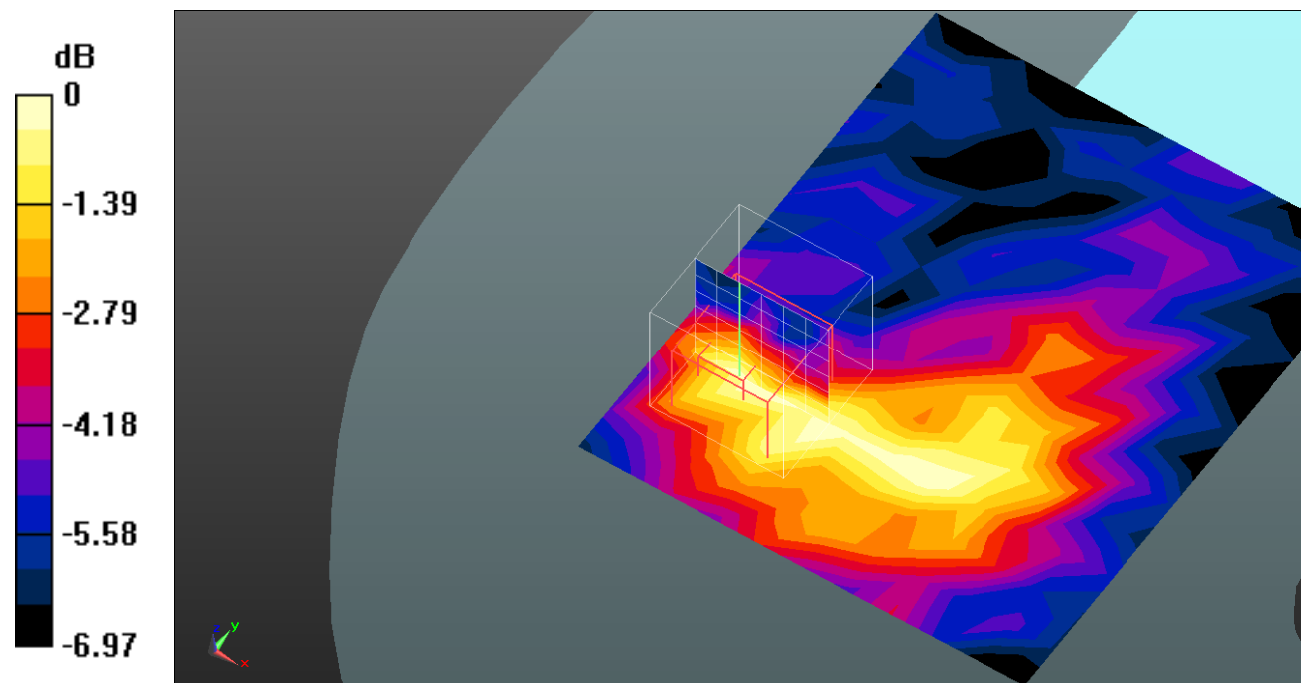

0 dB = 0.0655 W/kg = -11.84 dB dBW/kg

Test Plot66#: LTE Band 7_Body Back_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.359 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.865 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.317 W/kg

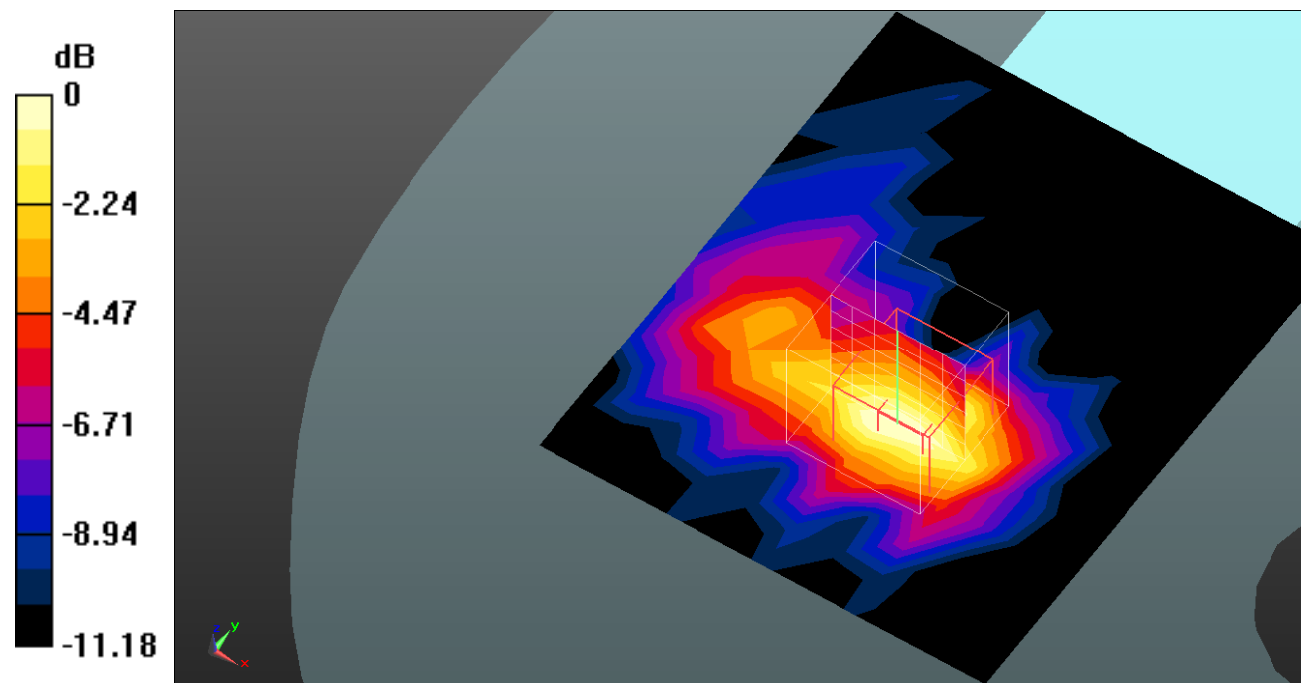

0 dB = 0.317 W/kg = -4.99 dB dBW/kg

Test Plot67#: LTE Band 7_Body Back_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.304 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.038 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

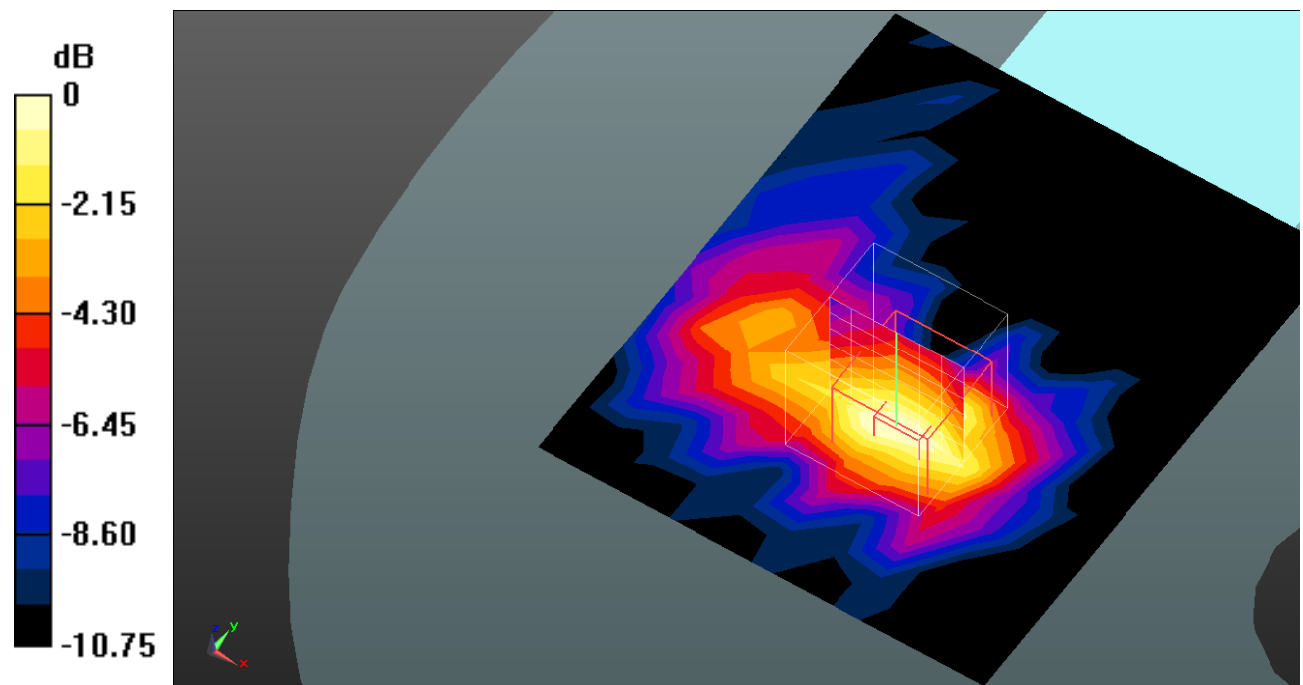

0 dB = 0.267 W/kg = -5.73 dB dBW/kg

Test Plot68#: LTE Band 7_Body Left_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.332 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.956 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

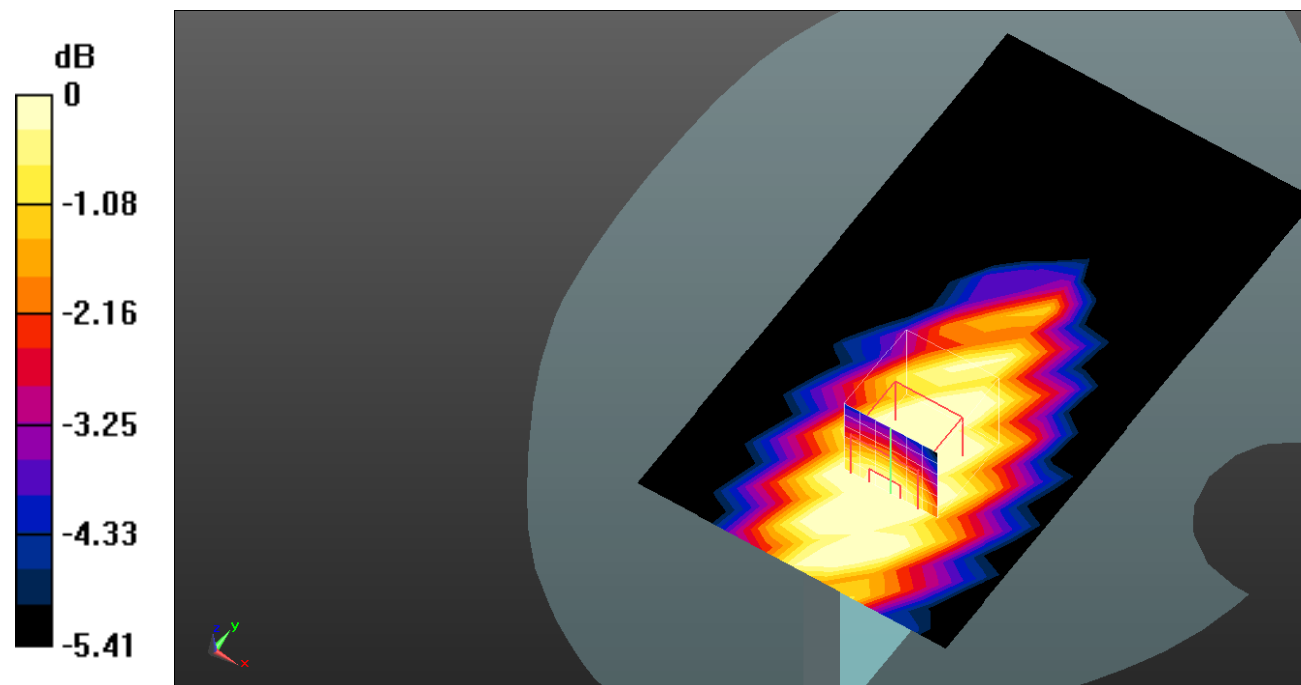

0 dB = 0.237 W/kg = -6.25 dB dBW/kg

Test Plot69#: LTE Band 7_Body Left_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.288 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.993 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.210 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.208 W/kg

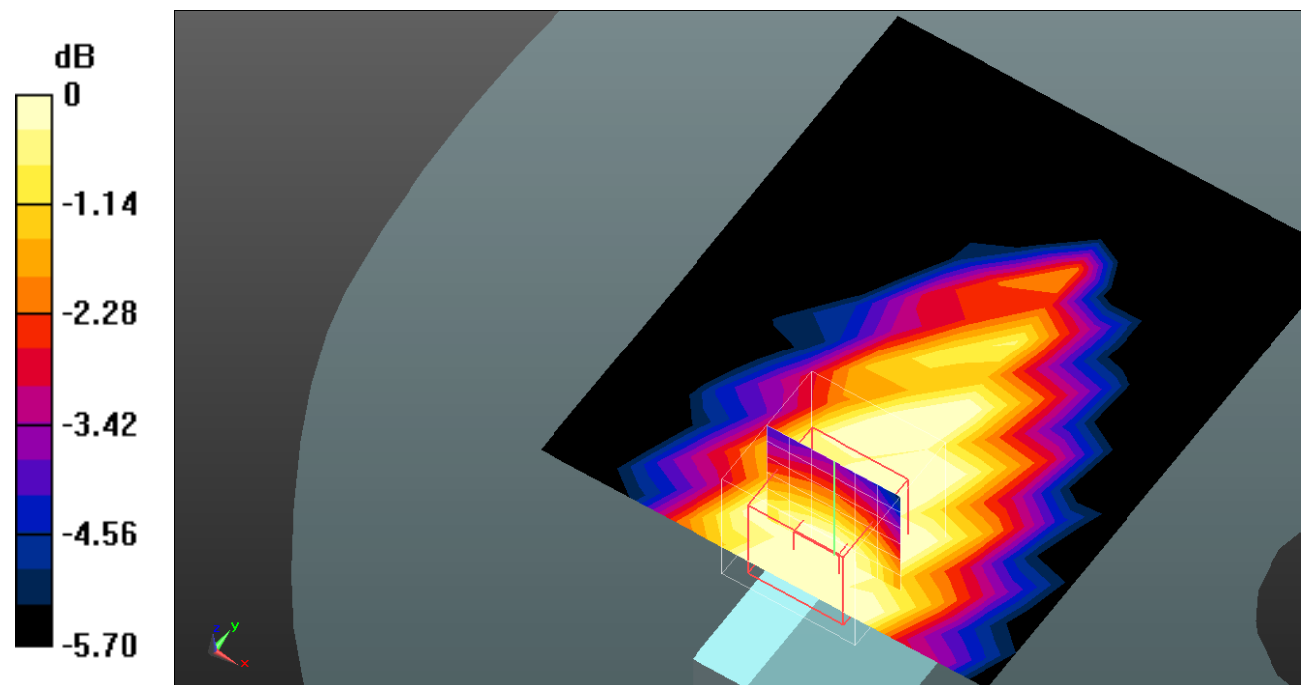

0 dB = 0.208 W/kg = -6.82 dB dBW/kg

Test Plot70#: LTE Band 7_Body Right_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0499 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.682 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0357 W/kg

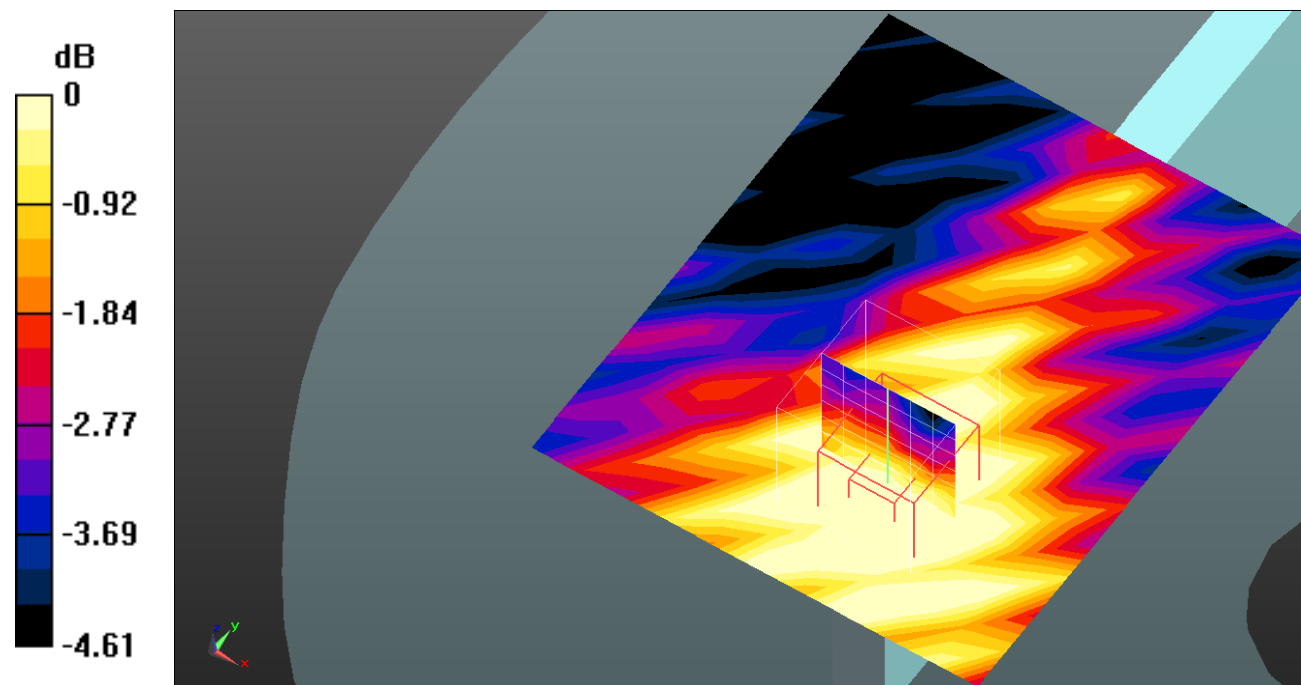

0 dB = 0.0357 W/kg = -14.47 dB dBW/kg

Test Plot71#: LTE Band 7_Body Right_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0444 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.656 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0342 W/kg

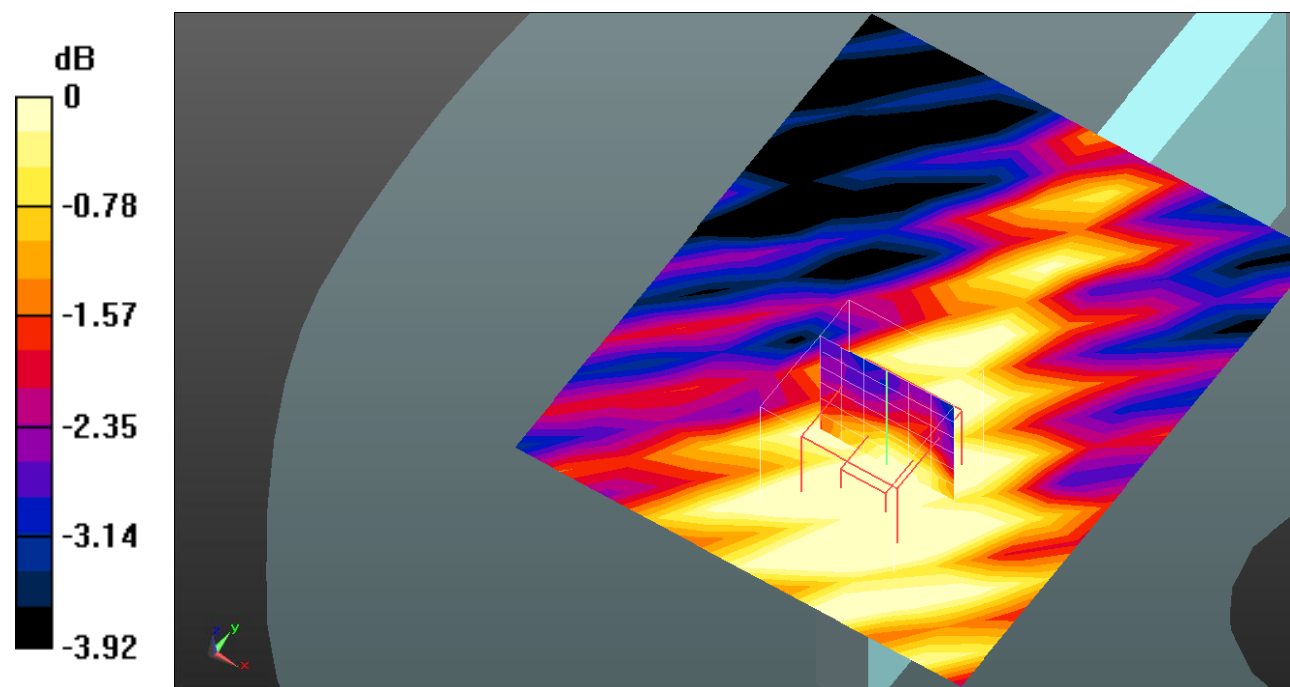

0 dB = 0.0342 W/kg = -14.66 dB dBW/kg

Test Plot72#: LTE Band 7_Body Bottom_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.207 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.810 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

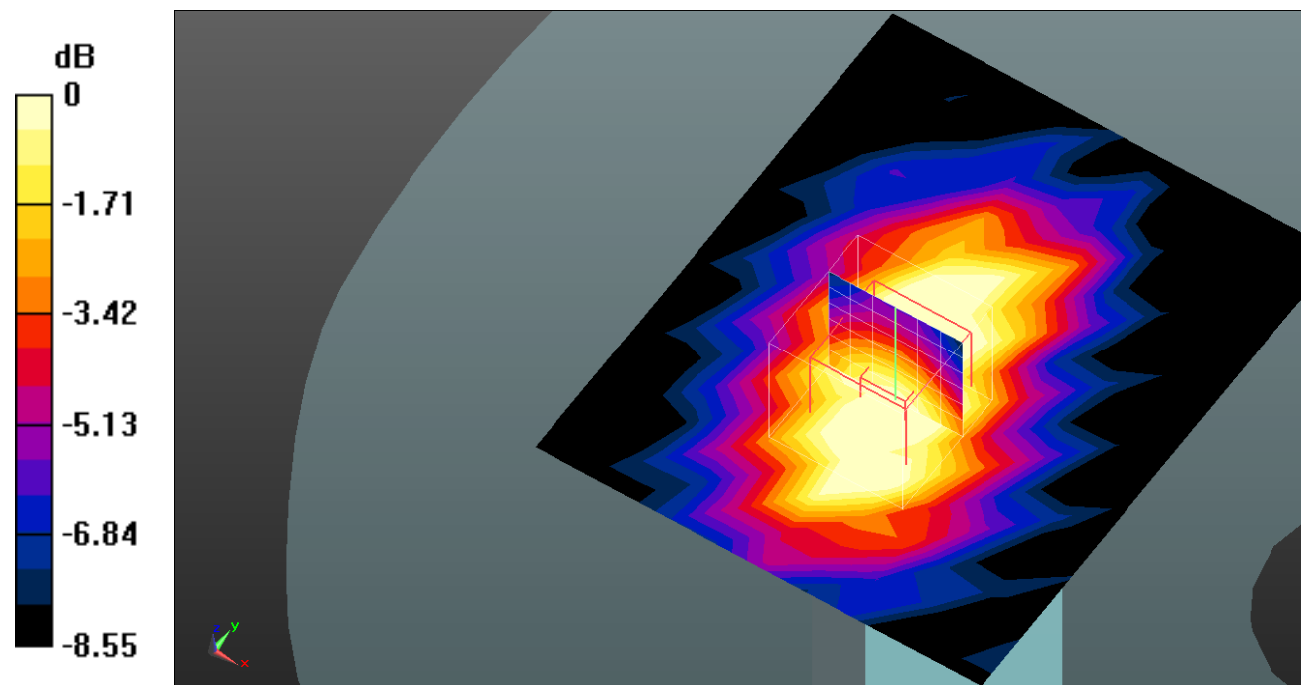

0 dB = 0.138 W/kg = -8.60 dB dBW/kg

Test Plot73#: LTE Band 7_Body Bottom_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2535$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 39.591$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.25, 7.25, 7.25) @2535 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.163 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.524 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

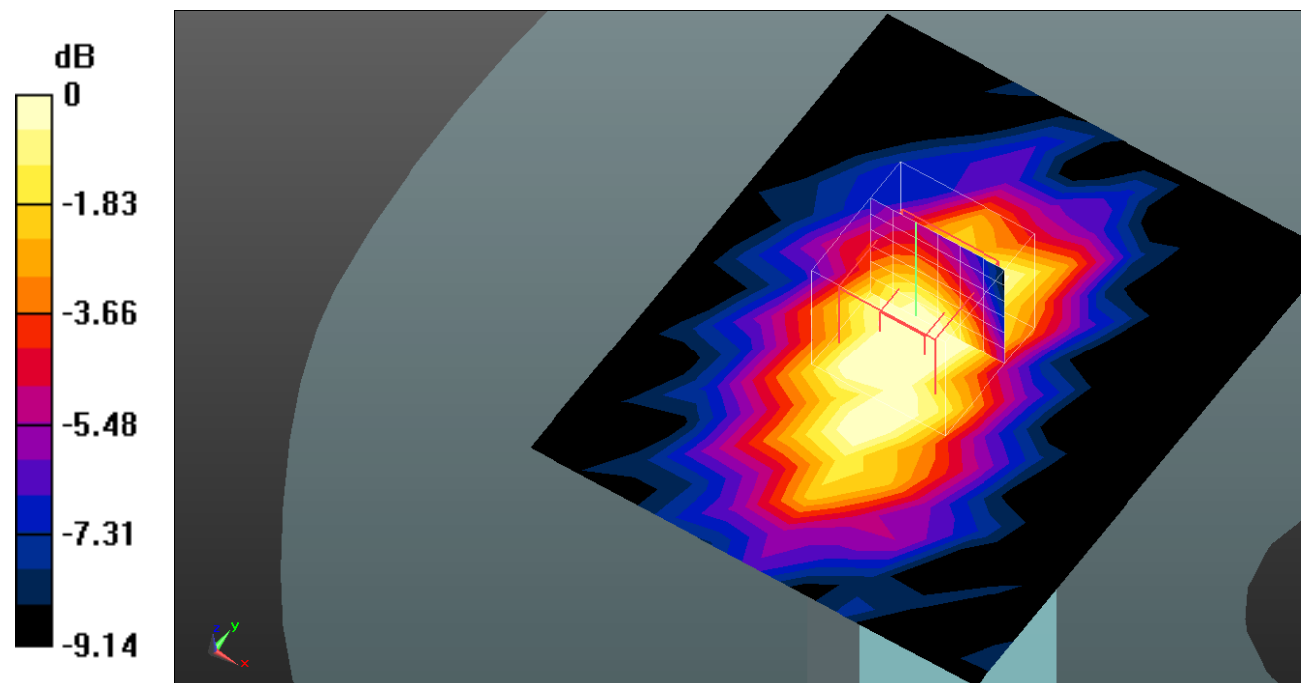

0 dB = 0.126 W/kg = -9.00 dB dBW/kg

Test Plot74#: LTE Band 12_Head Left Cheek_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0185 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.920 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0155 W/kg

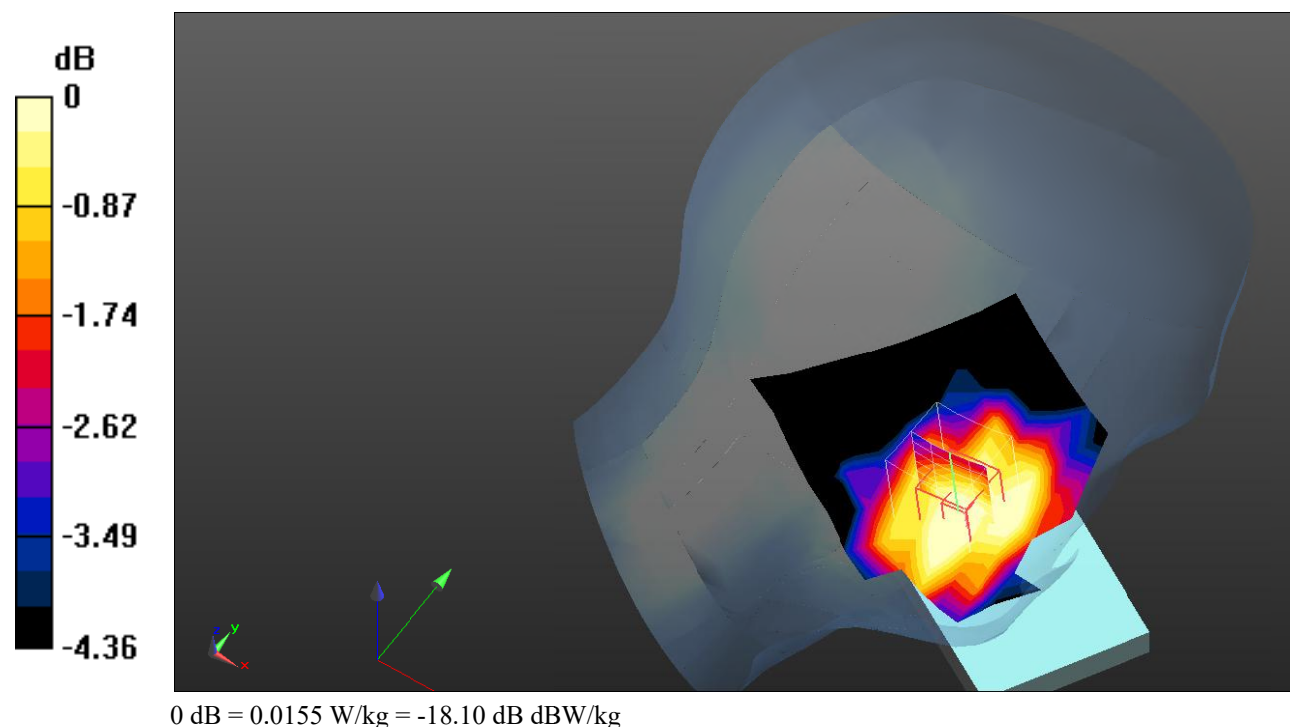

Test Plot75#: LTE Band 12_Head Left Cheek_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0141 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.434 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0118 W/kg

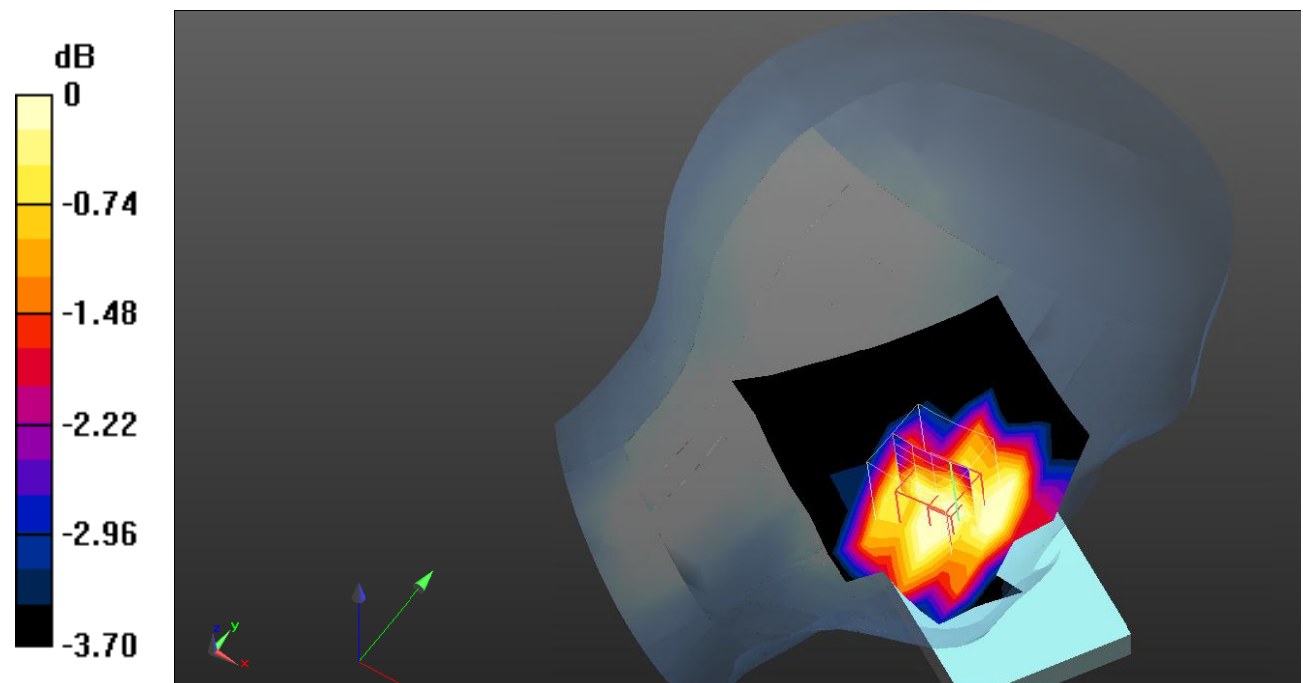

0 dB = 0.0118 W/kg = -19.28 dB dBW/kg

Test Plot76#: LTE Band 12_Head Left Tilt_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00982 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.967 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.00762 W/kg

SAR(1 g) = 0.00747 W/kg; SAR(10 g) = 0.00695 W/kg

Maximum value of SAR (measured) = 0.00760 W/kg

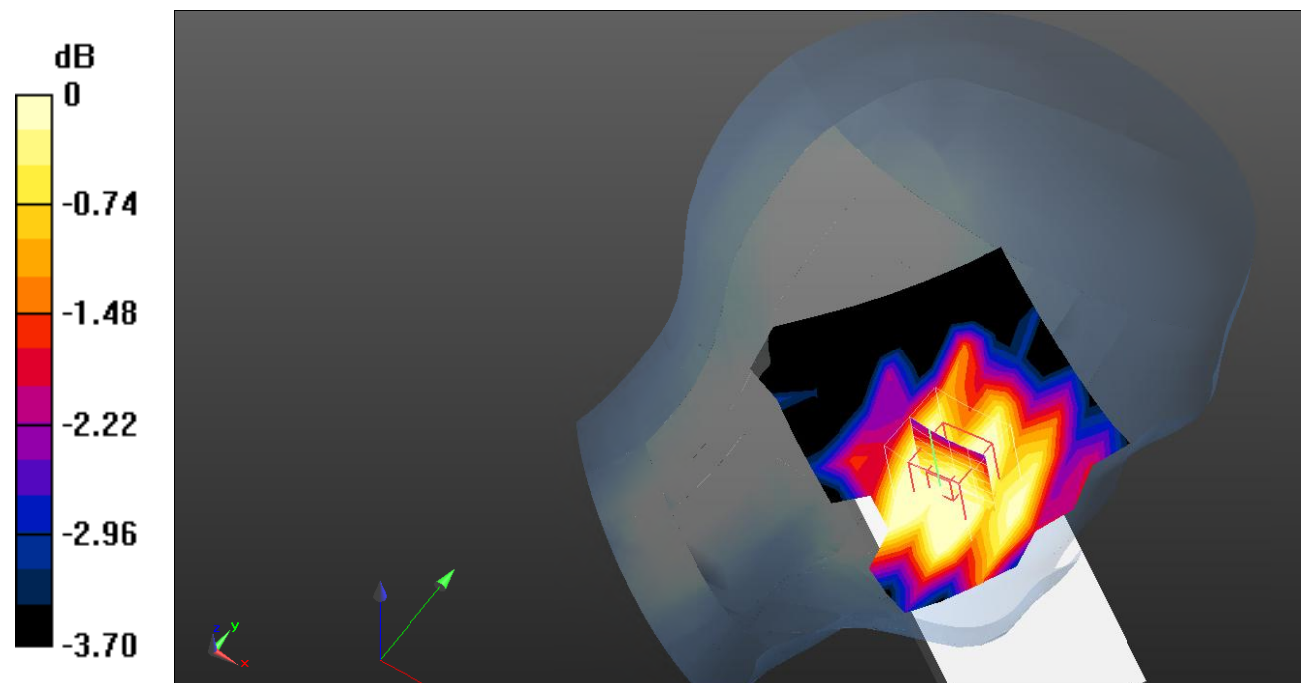

0 dB = 0.00760 W/kg = -21.19 dB dBW/kg

Test Plot77#: LTE Band 12_Head Left Tilt_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00723 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.723 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.00610 W/kg

SAR(1 g) = 0.00586 W/kg; SAR(10 g) = 0.00533 W/kg

Maximum value of SAR (measured) = 0.00601 W/kg

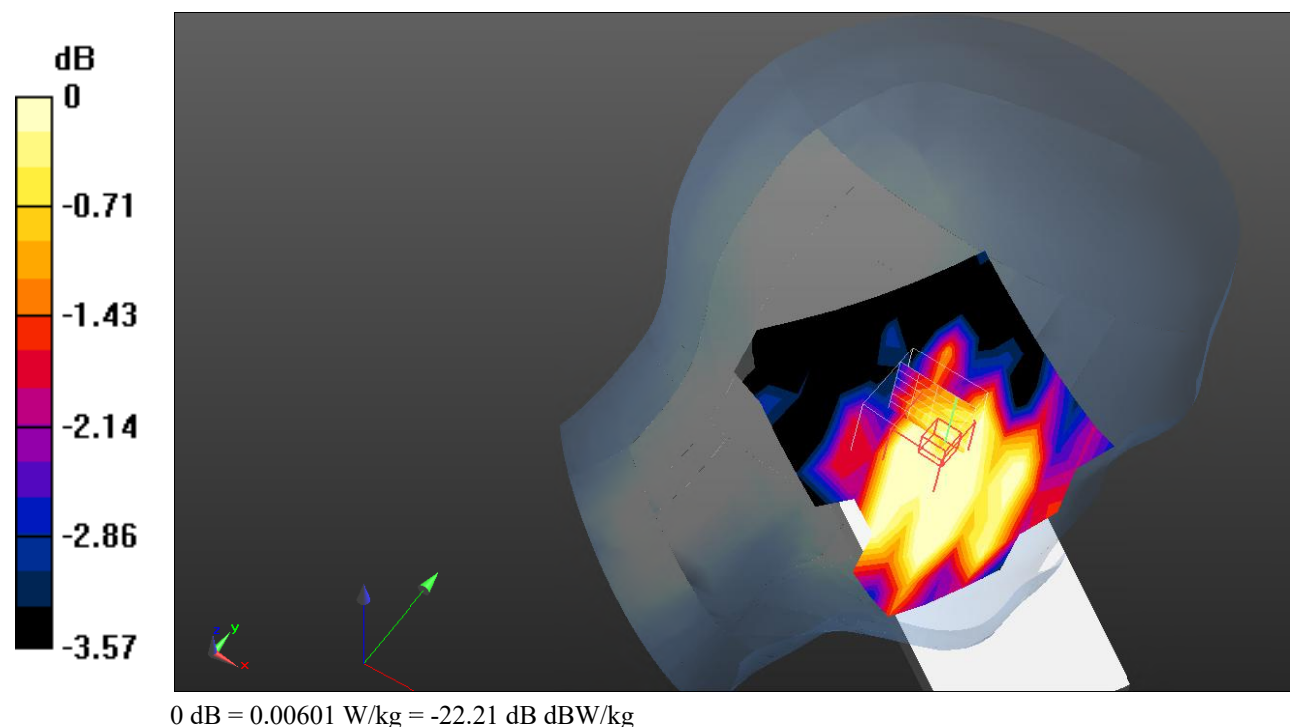

Test Plot78#: LTE Band 12_Head Right Cheek_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0153 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.254 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0140 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0136 W/kg

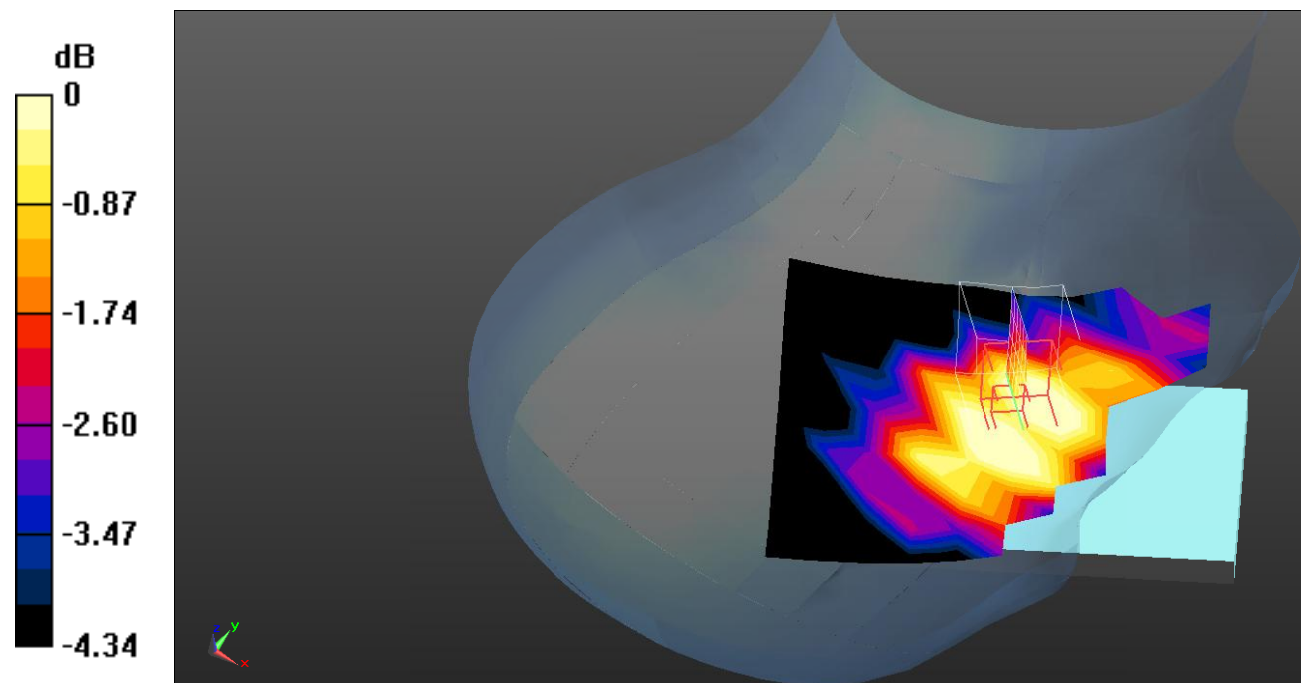

0 dB = 0.0136 W/kg = -18.66 dB dBW/kg

Test Plot79#: LTE Band 12_Head Right Cheek_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0124 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.639 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00975 W/kg

Maximum value of SAR (measured) = 0.0108 W/kg

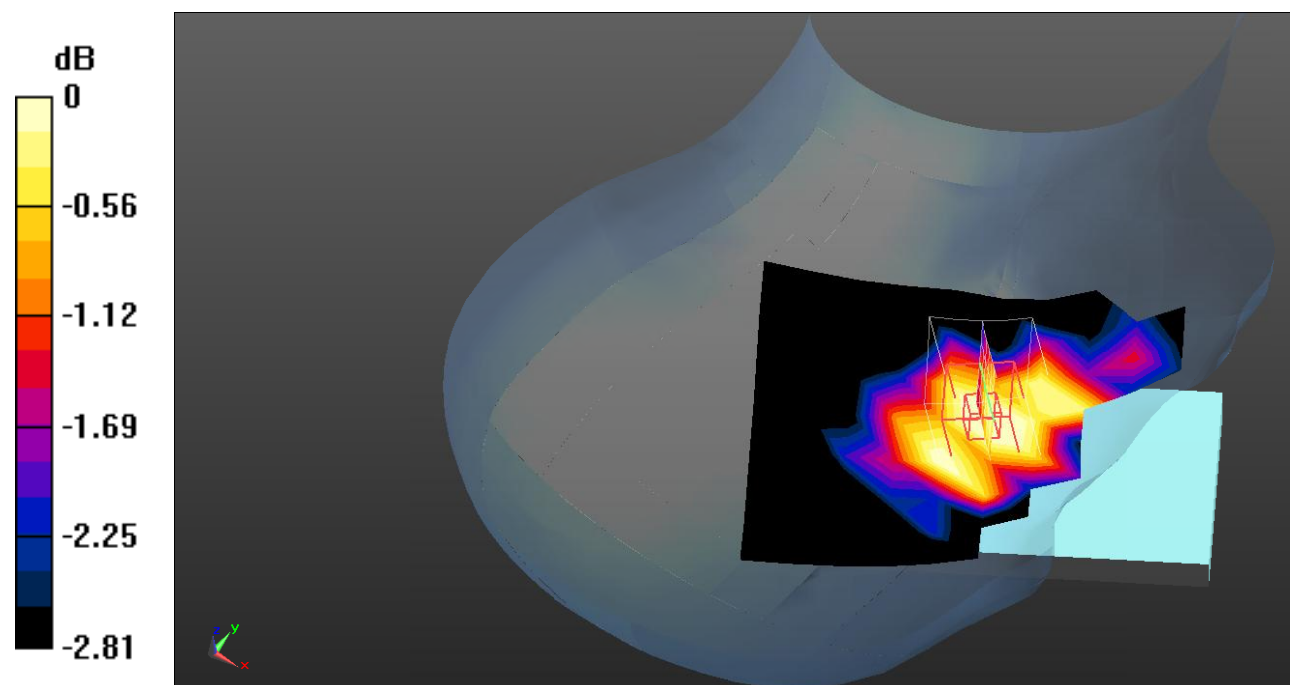

0 dB = 0.0108 W/kg = -19.67 dB dBW/kg

Test Plot80#: LTE Band 12_Head Right Tilt_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00835 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.833 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.00942 W/kg

SAR(1 g) = 0.00899 W/kg; SAR(10 g) = 0.00796 W/kg

Maximum value of SAR (measured) = 0.00938 W/kg

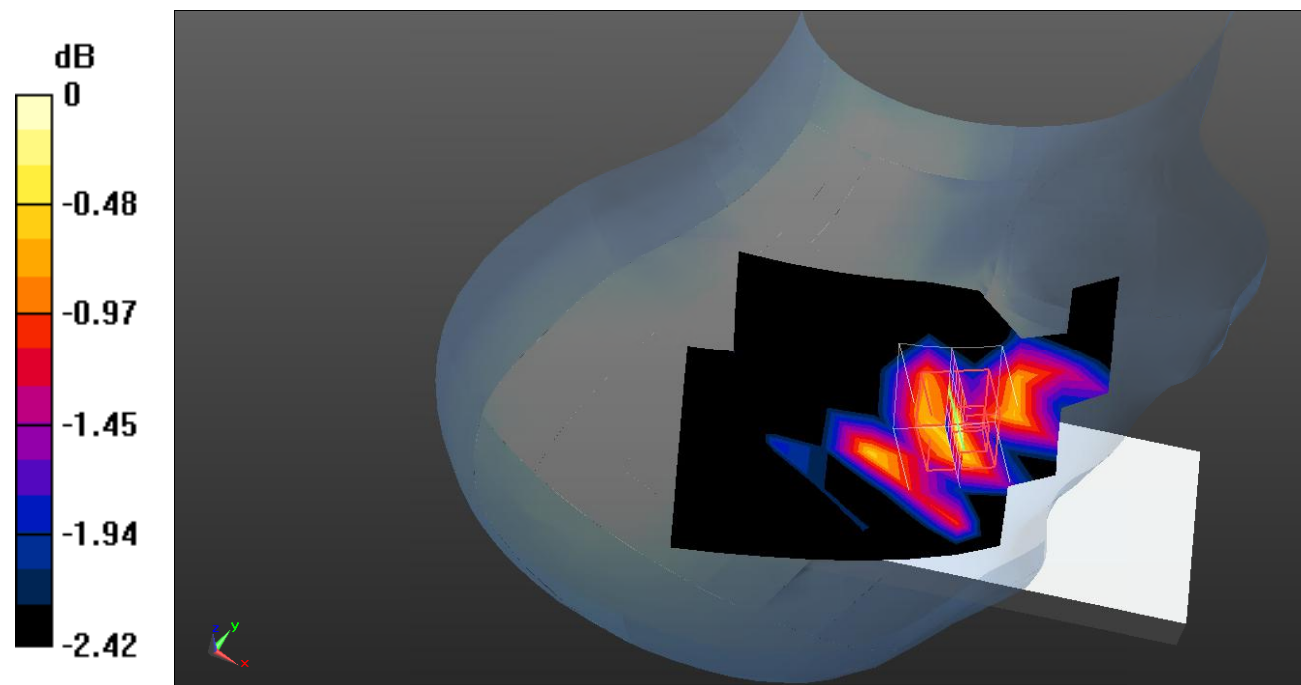

0 dB = 0.00938 W/kg = -20.28 dB dBW/kg

Test Plot81#: LTE Band 12_Head Right Tilt_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00888 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.972 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.00914 W/kg

SAR(1 g) = 0.00772 W/kg; SAR(10 g) = 0.00662 W/kg

Maximum value of SAR (measured) = 0.00813 W/kg

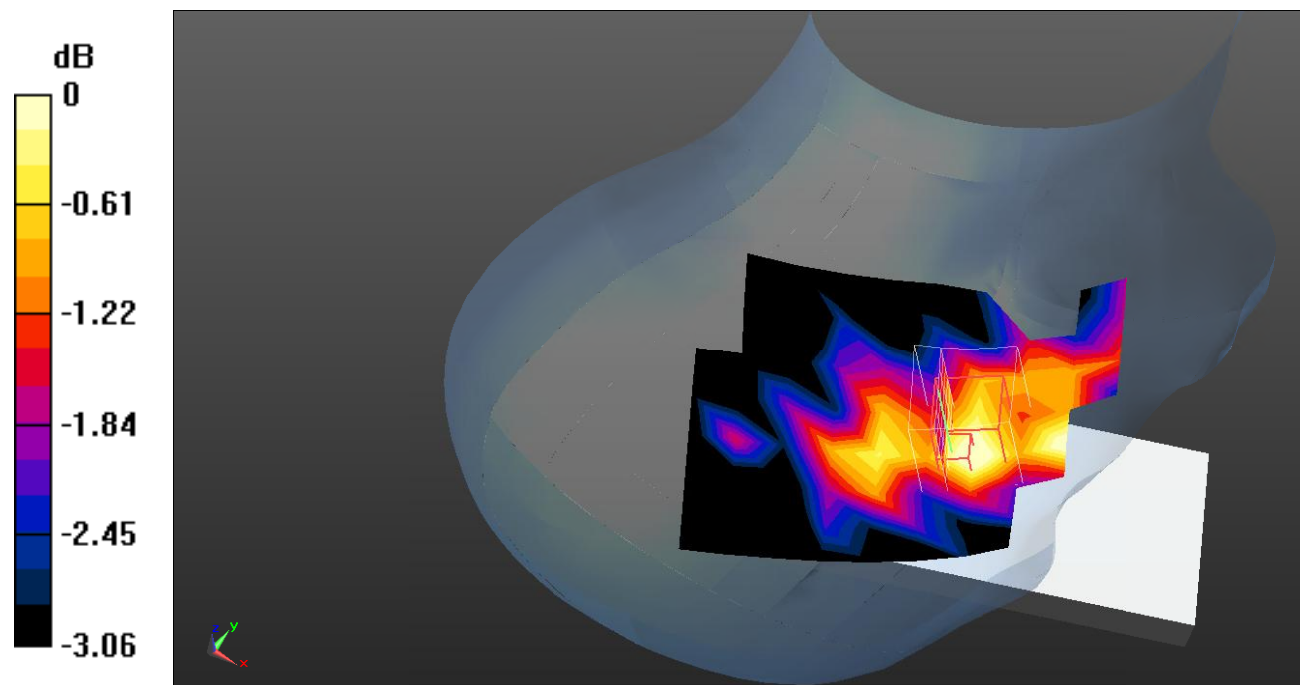

0 dB = 0.00813 W/kg = -20.90 dB dBW/kg

Test Plot82#: LTE Band 12_Body Front_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0220 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.811 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0162 W/kg

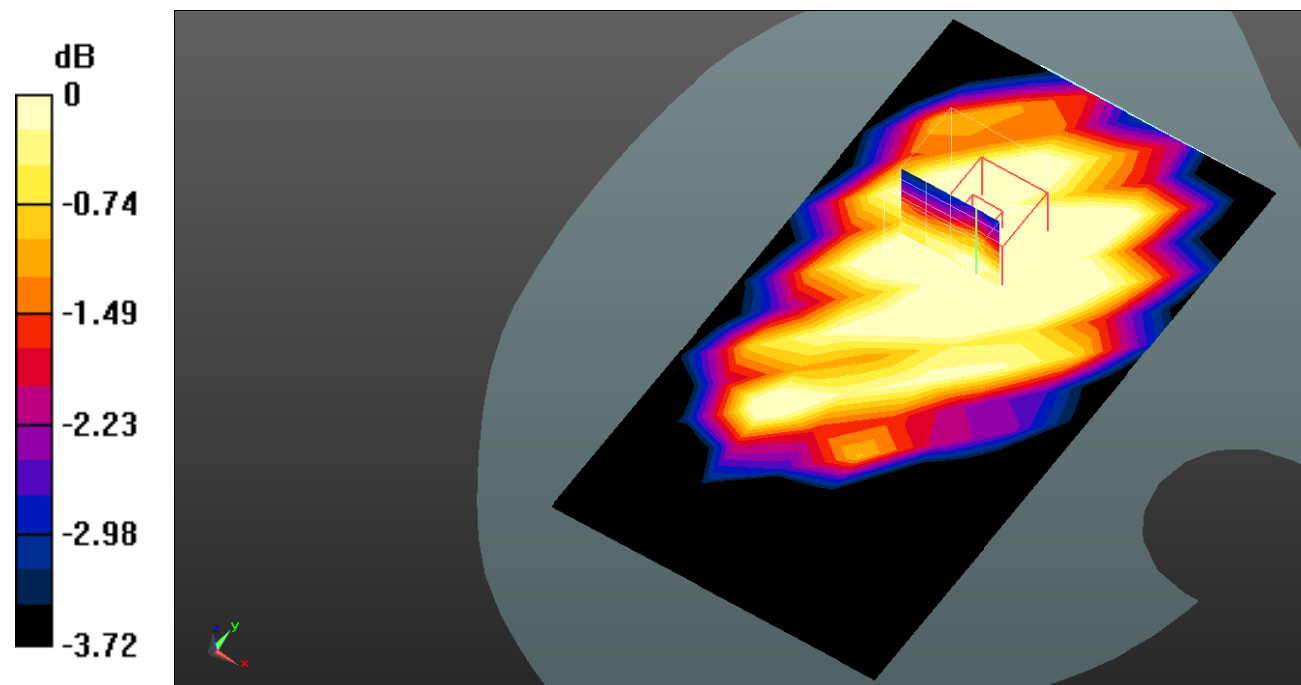

0 dB = 0.0162 W/kg = -17.90 dB dBW/kg

Test Plot83#: LTE Band 12_Body Front_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0153 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.434 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0120 W/kg

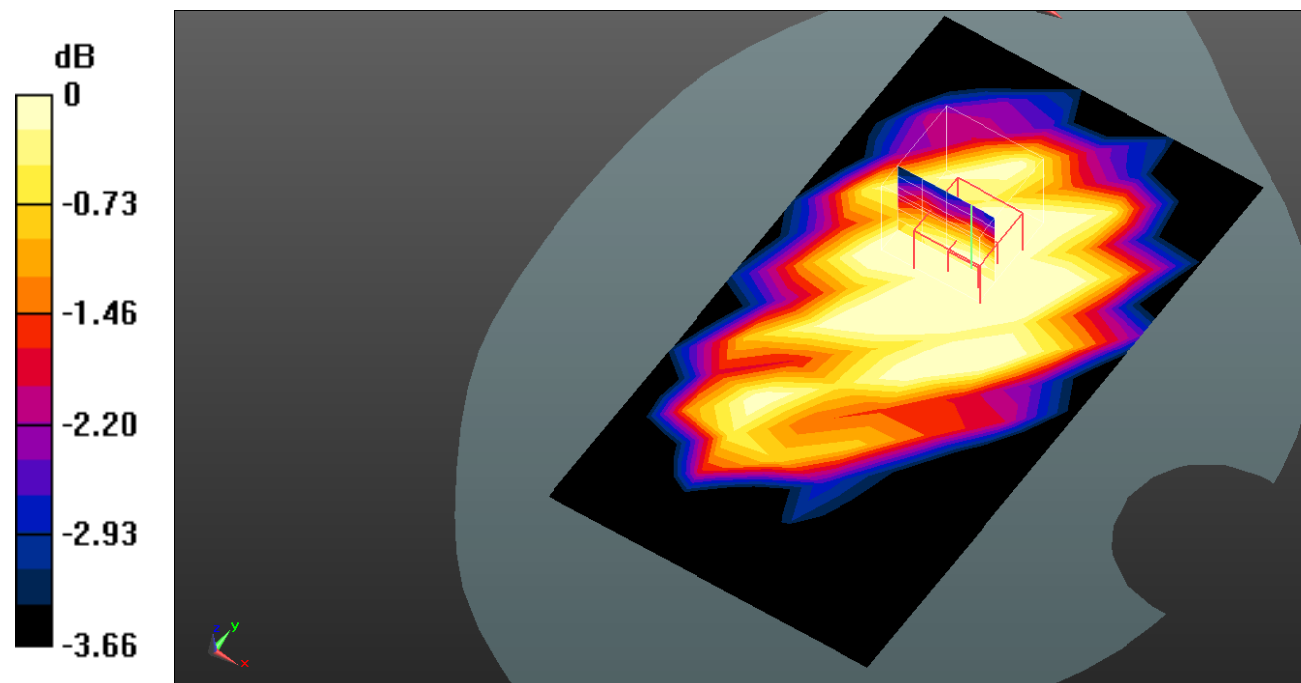

0 dB = 0.0120 W/kg = -19.21 dB dBW/kg

Test Plot84#: LTE Band 12_Body Back_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0617 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.117 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0423 W/kg

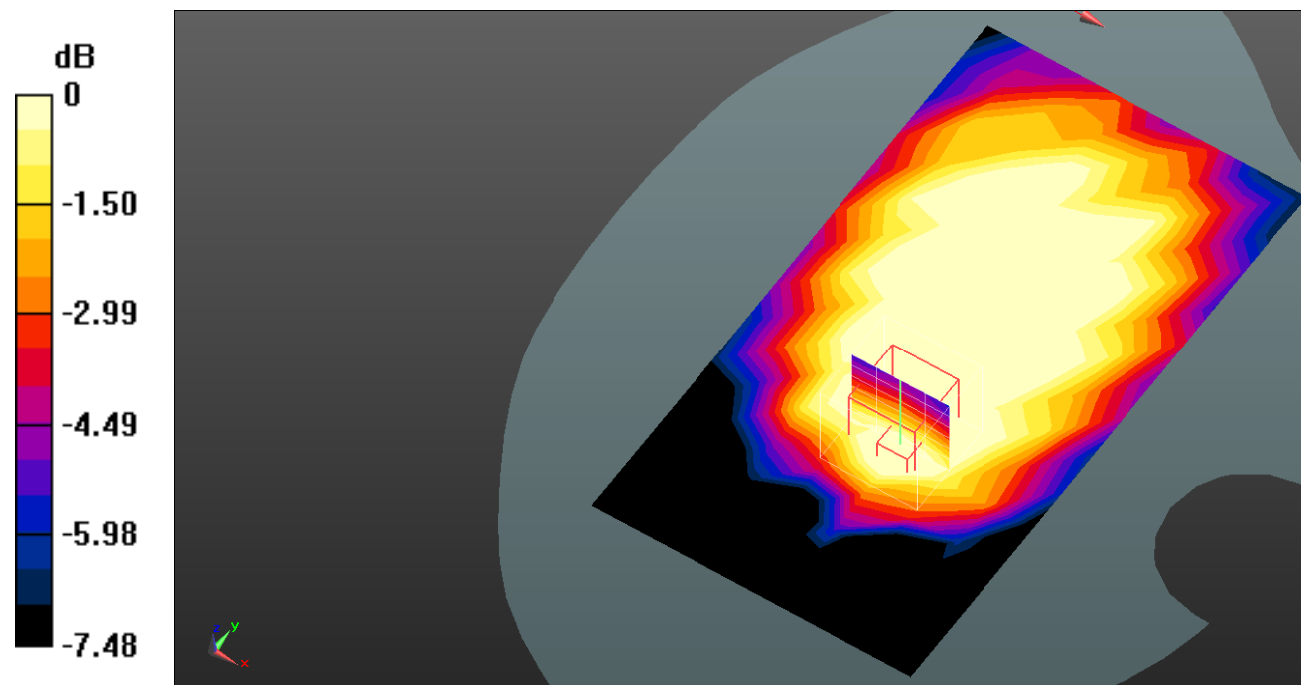

0 dB = 0.0423 W/kg = -13.74 dB dBW/kg

Test Plot85#: LTE Band 12_Body Back_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0420 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.099 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0324 W/kg

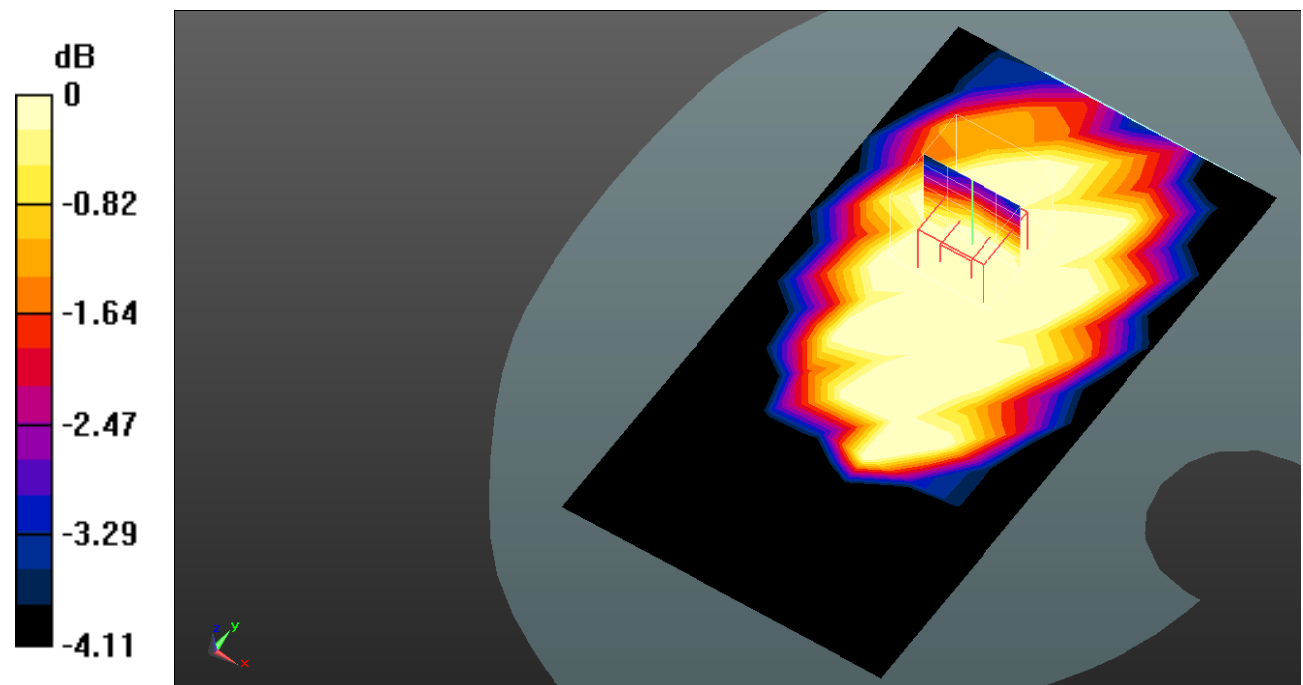

0 dB = 0.0324 W/kg = -14.89 dB dBW/kg

Test Plot86#: LTE Band 12_Body Left_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0358 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.639 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0279 W/kg

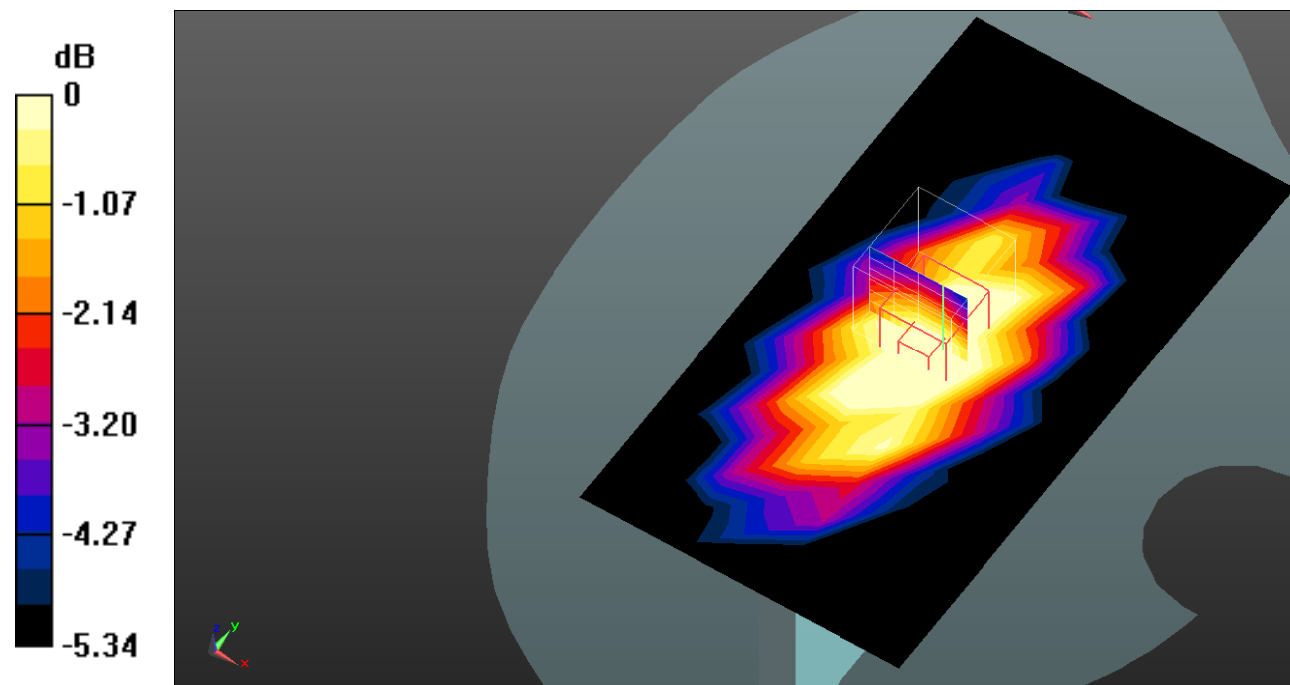

Test Plot87#: LTE Band 12_Body Left_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0260 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.939 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0197 W/kg

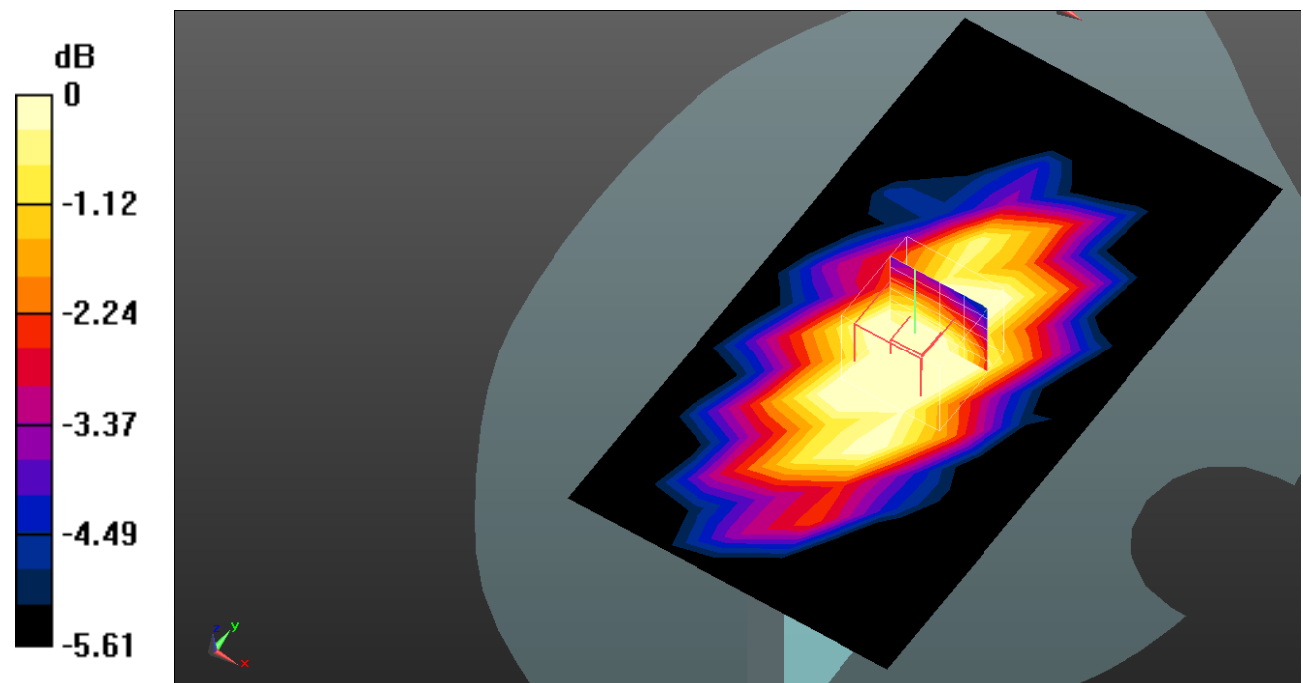

0 dB = 0.0197 W/kg = -17.06 dB dBW/kg

Test Plot88#: LTE Band 12_Body Right_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0277 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.196 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0222 W/kg

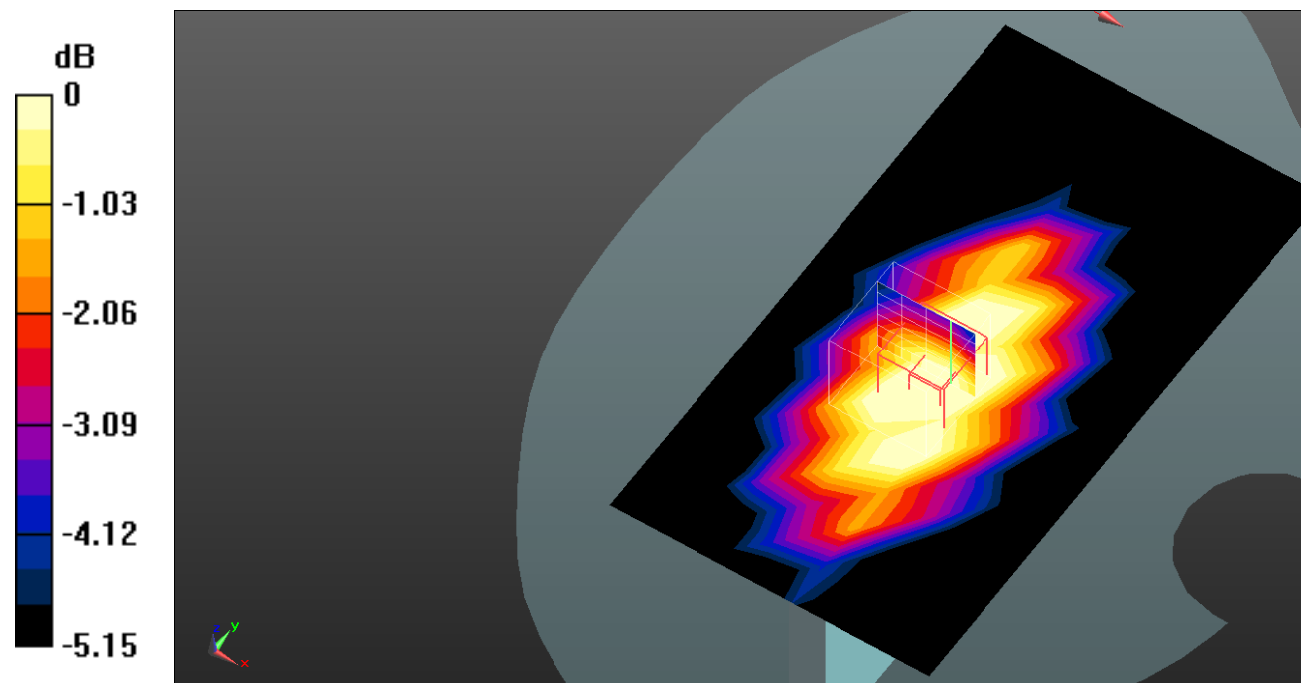

0 dB = 0.0222 W/kg = -16.54 dB dBW/kg

Test Plot89#: LTE Band 12_Body Right_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0198 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.504 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0162 W/kg

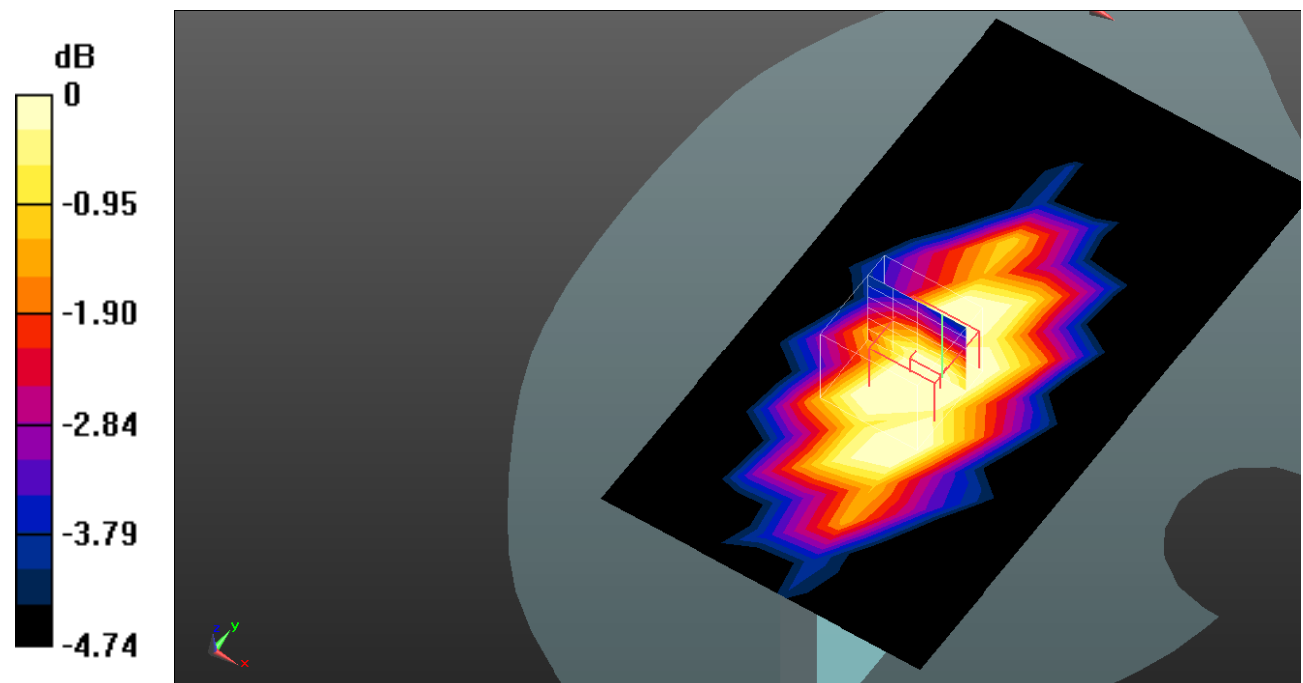

0 dB = 0.0162 W/kg = -17.90 dB dBW/kg

Test Plot90#: LTE Band 12_Body Bottom_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0132 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.343 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00814 W/kg

Maximum value of SAR (measured) = 0.0105 W/kg

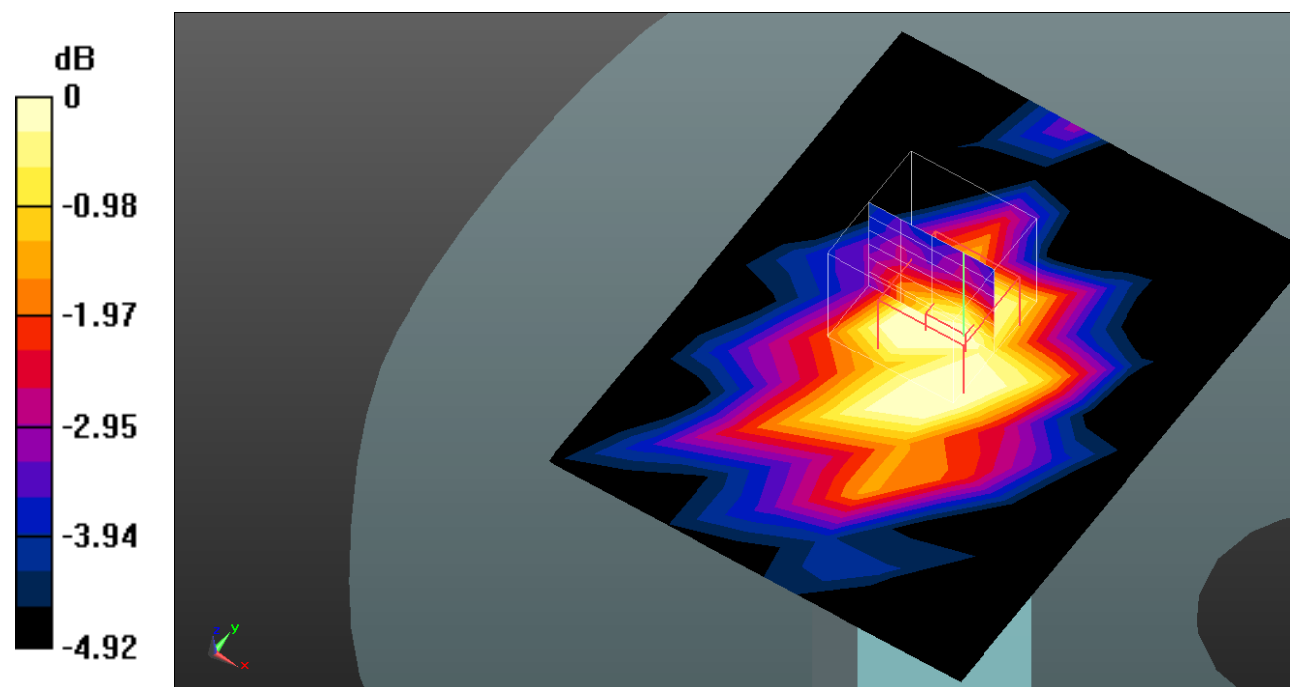

0 dB = 0.0105 W/kg = -19.79 dB dBW/kg

Test Plot91#: LTE Band 12_Body Bottom_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @707.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0105 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.903 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.00772 W/kg; SAR(10 g) = 0.00624 W/kg

Maximum value of SAR (measured) = 0.00757 W/kg

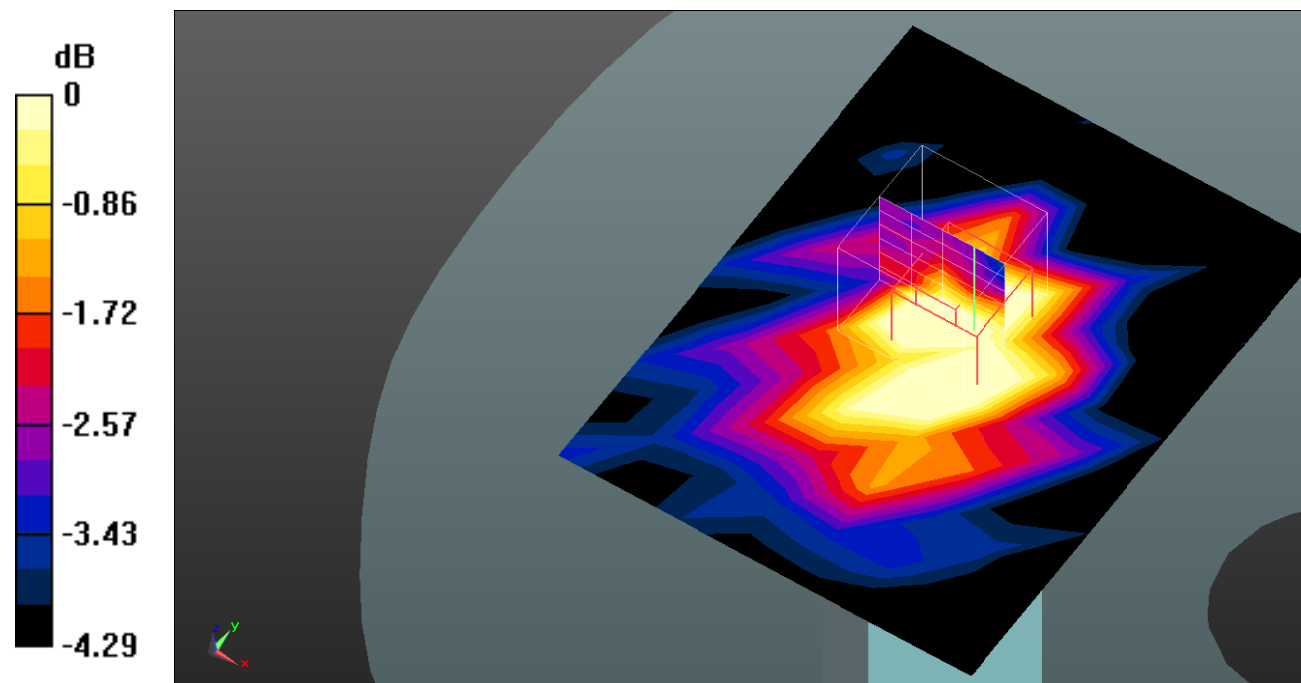

0 dB = 0.00757 W/kg = -21.21 dB dBW/kg

Test Plot92#: LTE Band 13_Head Left Cheek_1RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0150 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.471 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0127 W/kg

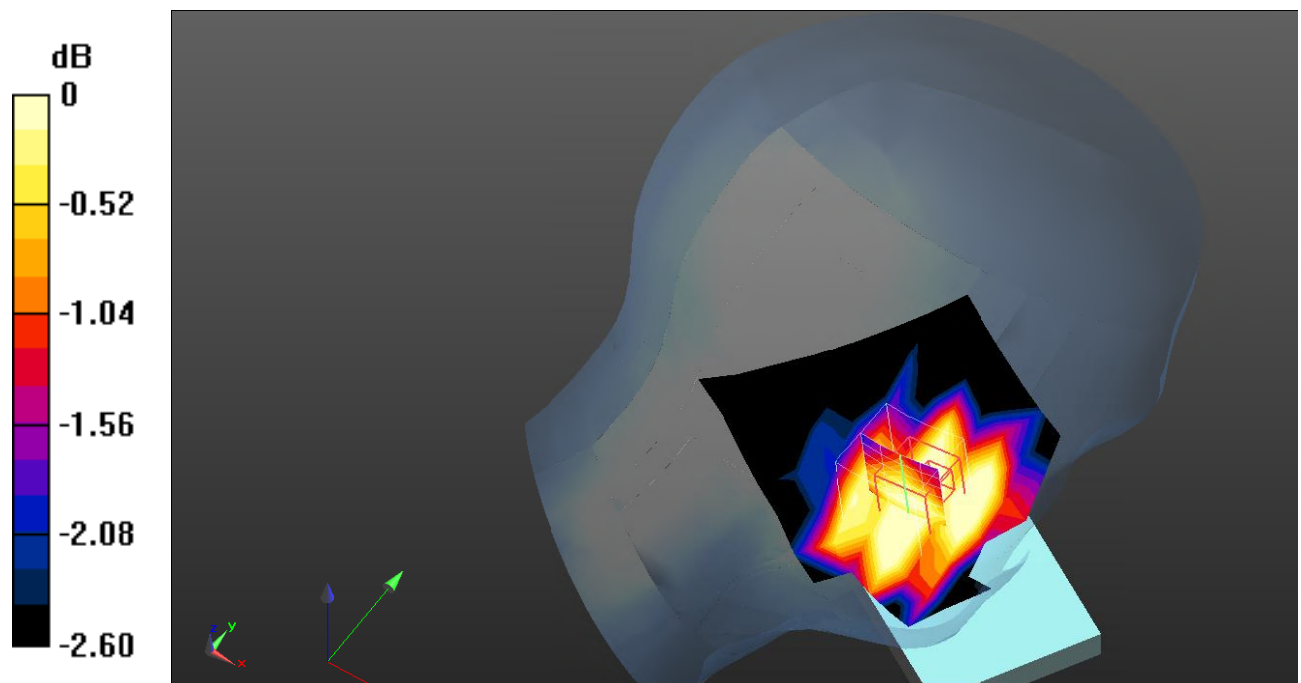

0 dB = 0.0127 W/kg = -18.96 dB dBW/kg

Test Plot93#: LTE Band 13_Head Left Cheek_50%RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0129 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.327 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00963 W/kg

Maximum value of SAR (measured) = 0.0104 W/kg

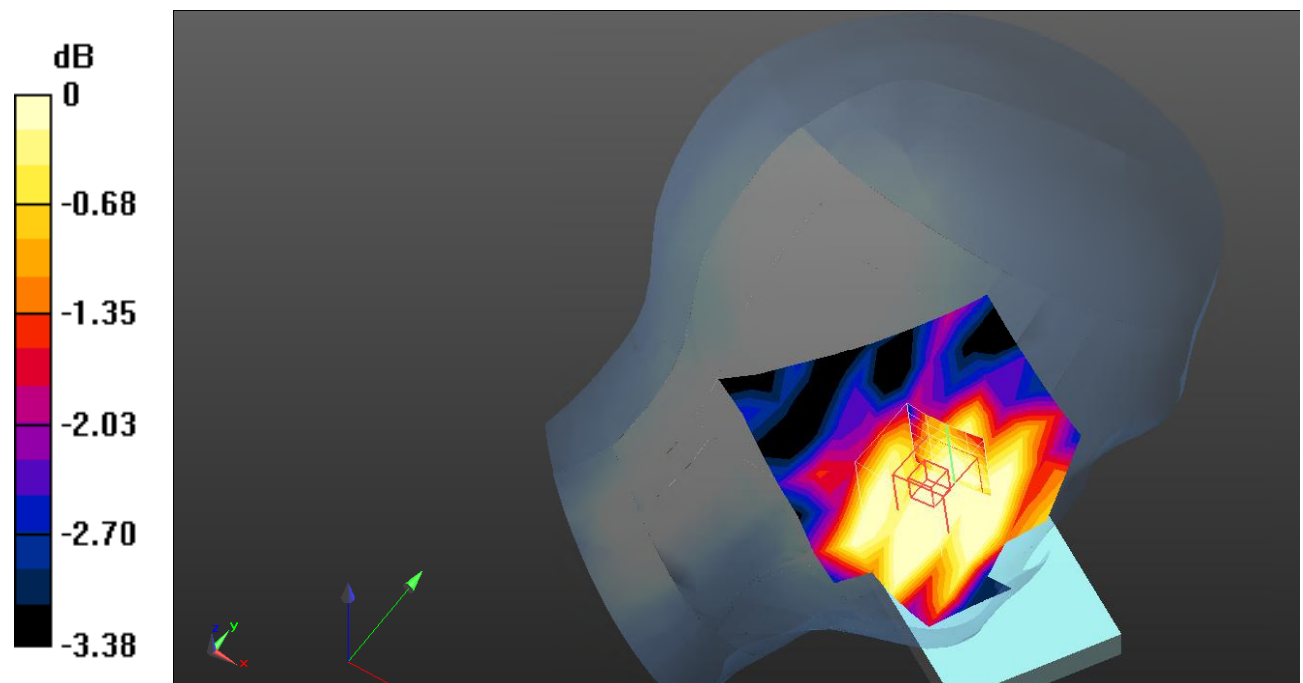

0 dB = 0.0104 W/kg = -19.83 dB dBW/kg

Test Plot94#: LTE Band 13_Head Left Tilt_1RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0102 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.120 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.00889 W/kg

SAR(1 g) = 0.0084 W/kg; SAR(10 g) = 0.0078 W/kg

Maximum value of SAR (measured) = 0.00889 W/kg

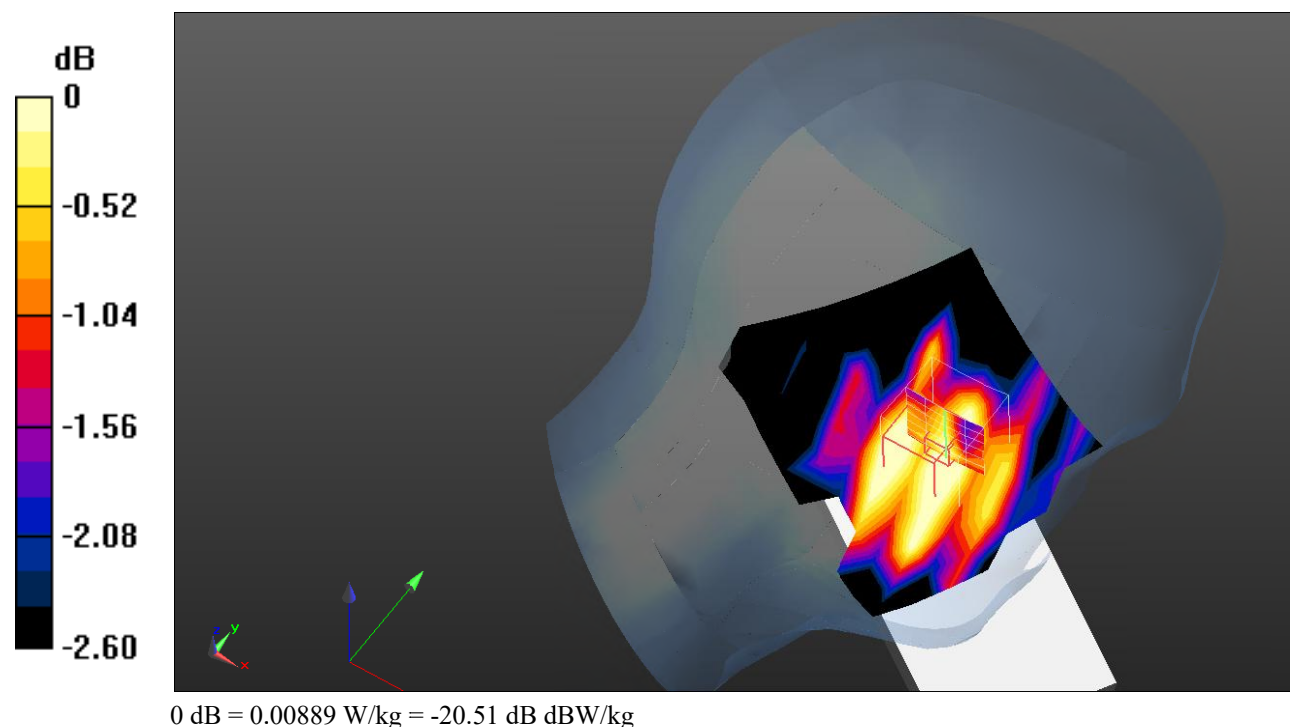

Test Plot95#: LTE Band 13_Head Left Tilt_50%RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.00900 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.229 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.00624 W/kg

SAR(1 g) = 0.00566 W/kg; SAR(10 g) = 0.00533 W/kg

Maximum value of SAR (measured) = 0.00624 W/kg

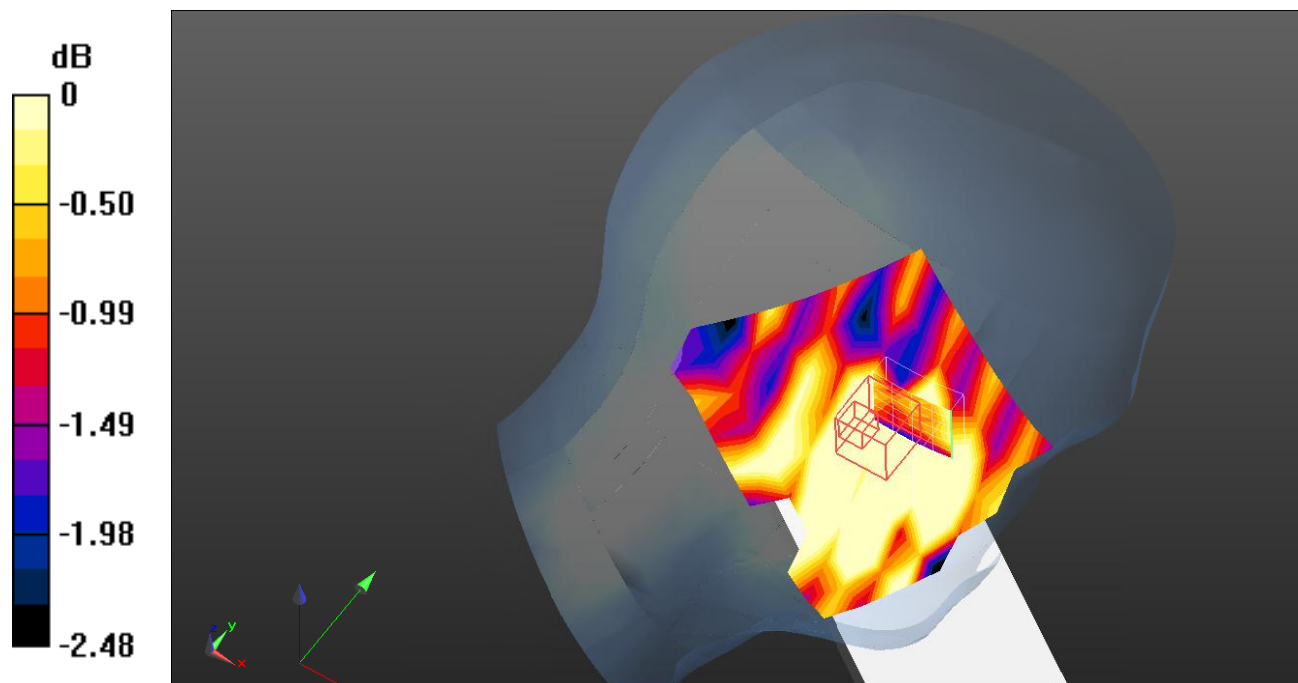

0 dB = 0.00624 W/kg = -22.05 dB dBW/kg

Test Plot96#: LTE Band 13_Head Right Cheek_1RB_Low**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0190 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.311 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0201 W/kg

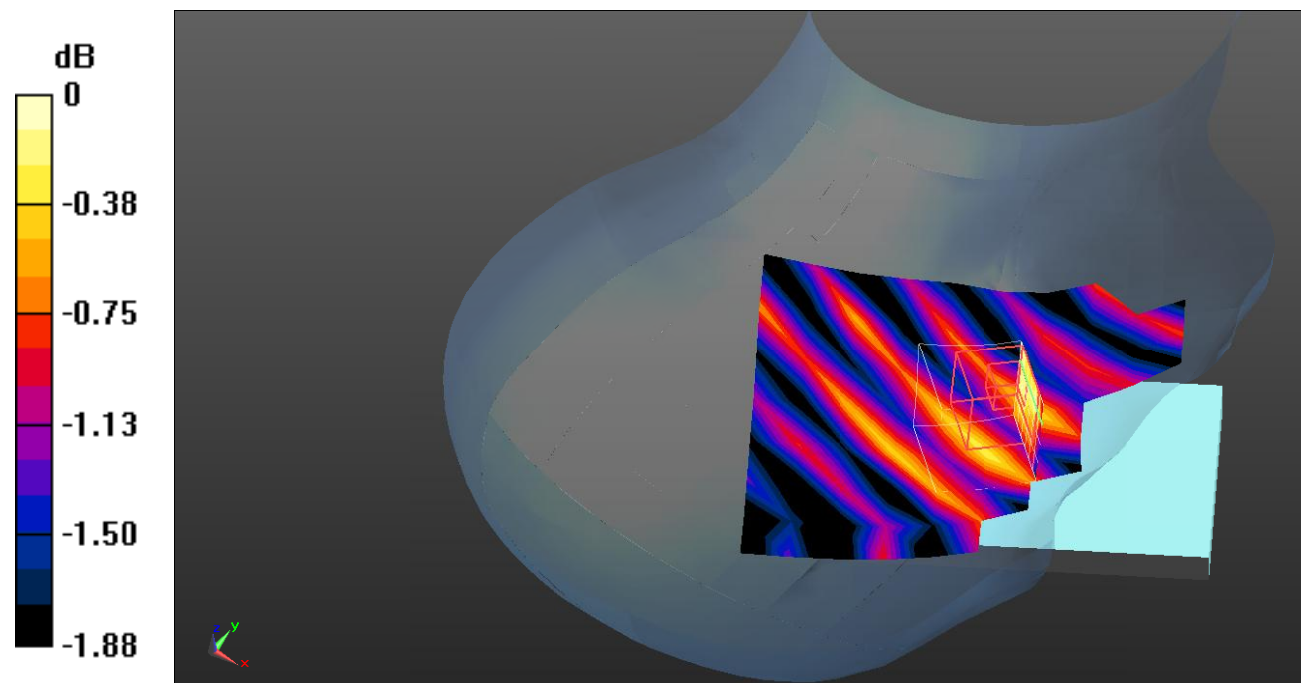

0 dB = 0.0201 W/kg = -16.97 dB dBW/kg

Test Plot97#: LTE Band 13_Head Right Cheek_50%RB_Low**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0187 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.498 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0192 W/kg

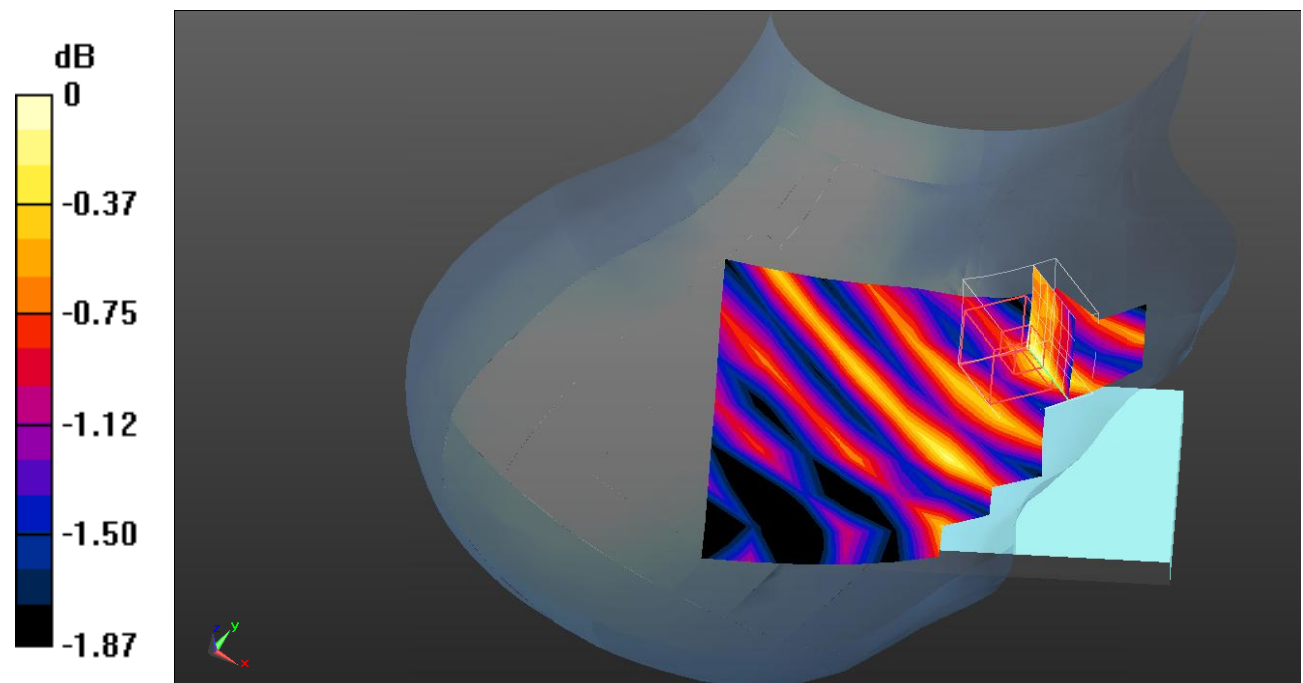

0 dB = 0.0192 W/kg = -17.17 dB dBW/kg

Test Plot98#: LTE Band 13_Head Right Tilt_1RB_Low**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0102 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.051 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.00961 W/kg

SAR(1 g) = 0.00868 W/kg; SAR(10 g) = 0.00787 W/kg

Maximum value of SAR (measured) = 0.00908 W/kg

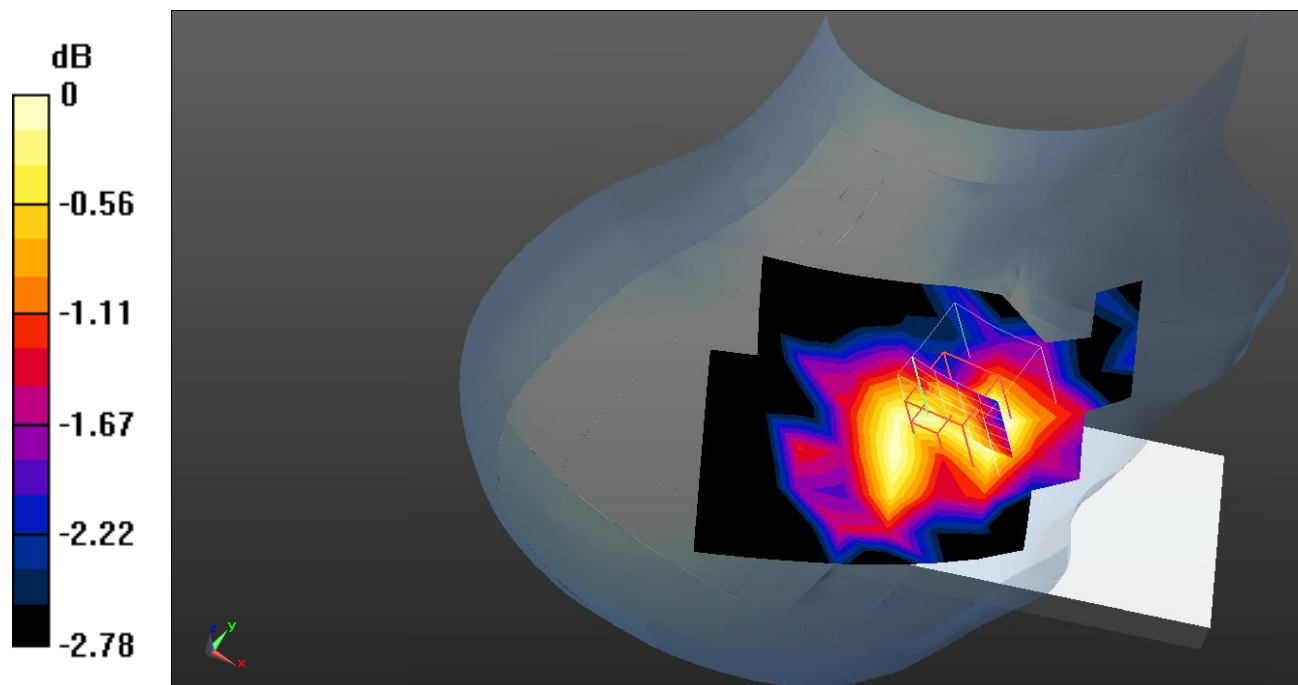

0 dB = 0.00908 W/kg = -20.42 dB dBW/kg

Test Plot99#: LTE Band 13_Head Right Tilt_50%RB_Low**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0118 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.034 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0115 W/kg

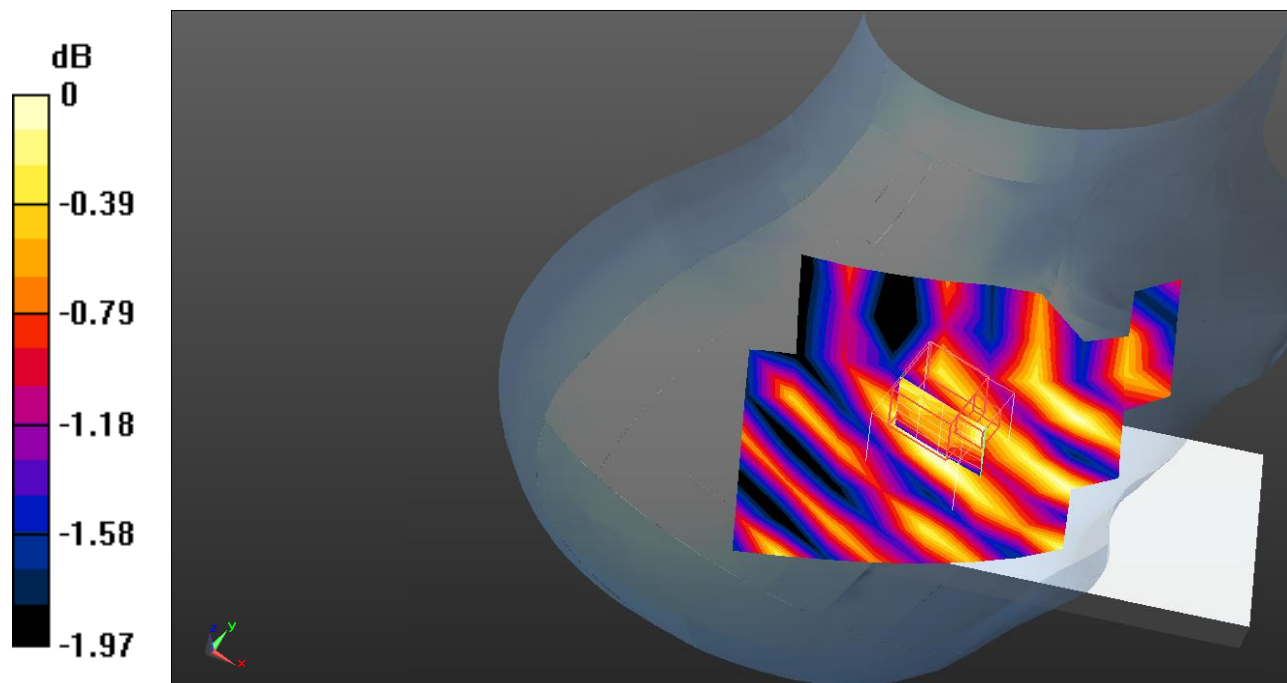

0 dB = 0.0115 W/kg = -19.39 dB dBW/kg

Test Plot100#: LTE Band 13_Body Front_1RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0140 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.366 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0117 W/kg

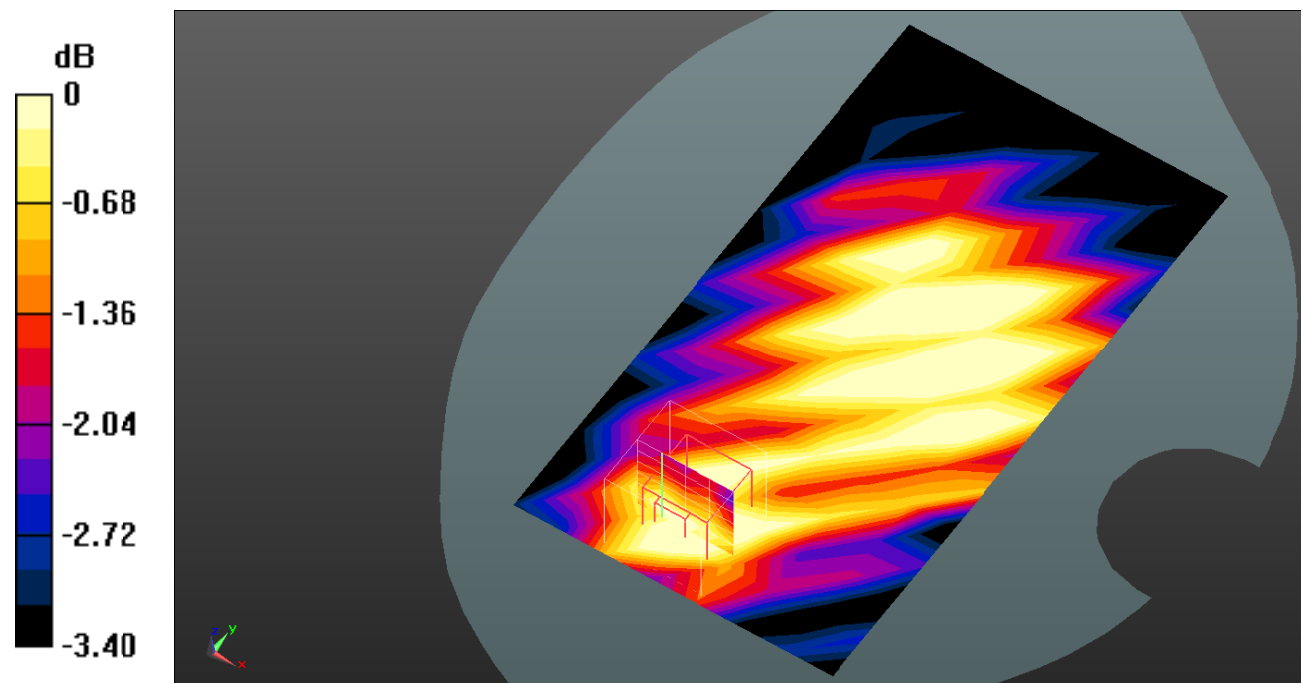

0 dB = 0.0117 W/kg = -19.32 dB dBW/kg

Test Plot101#: LTE Band 13_Body Front_50%RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0121 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.112 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.00942 W/kg; SAR(10 g) = 0.00886 W/kg

Maximum value of SAR (measured) = 0.0100 W/kg

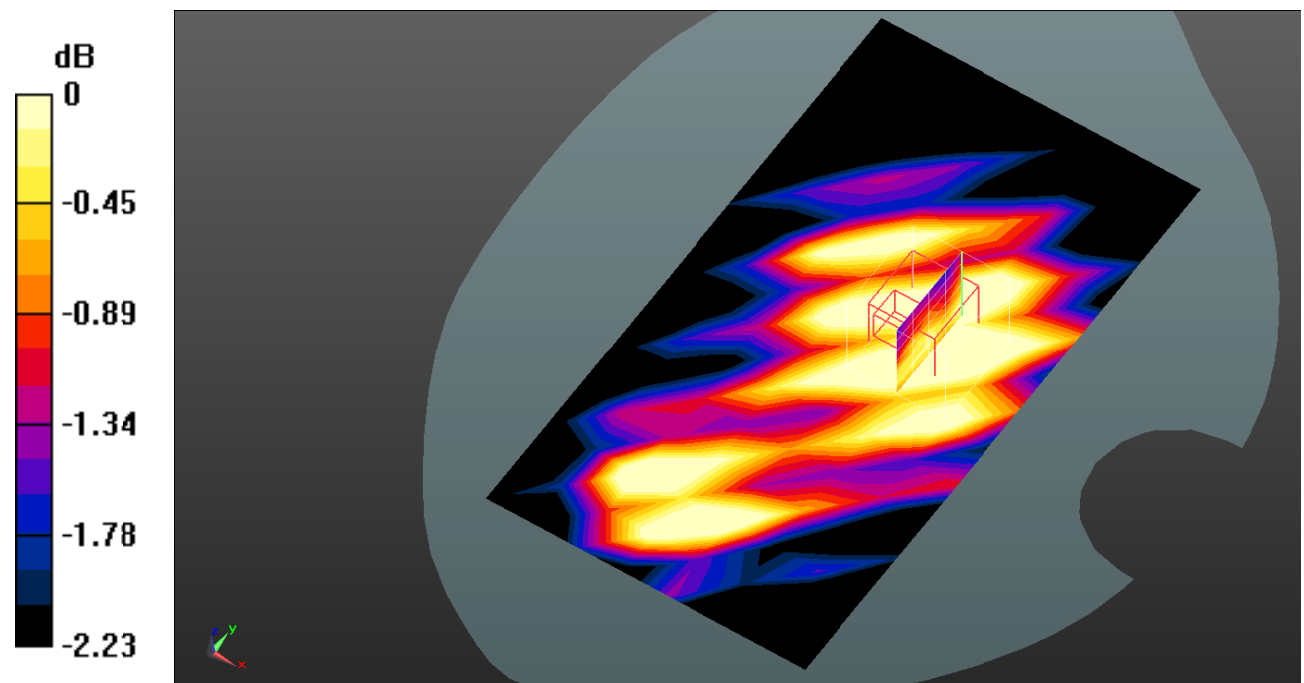

0 dB = 0.0100 W/kg = -20.00 dB dBW/kg

Test Plot102#: LTE Band 13_Body Back_1RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0368 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.445 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0311 W/kg

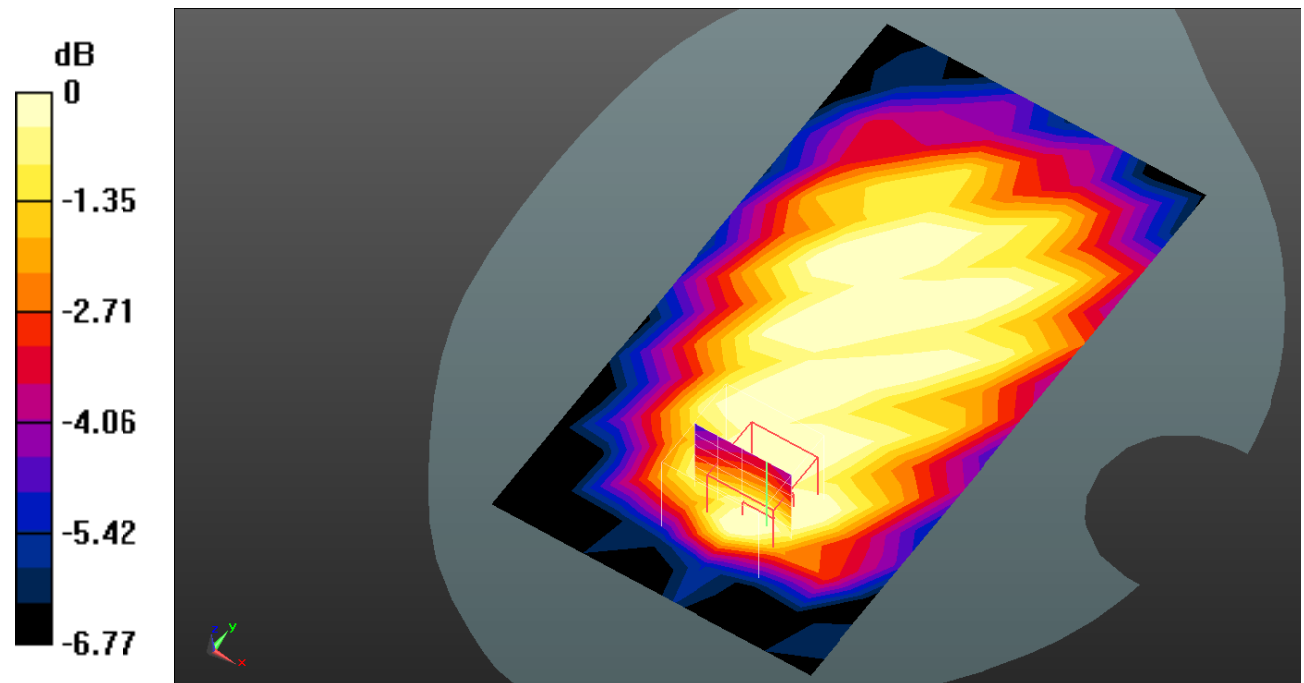

0 dB = 0.0311 W/kg = -15.07 dB dBW/kg

Test Plot103#: LTE Band 13_Body Back_50%RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0334 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.983 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0266 W/kg

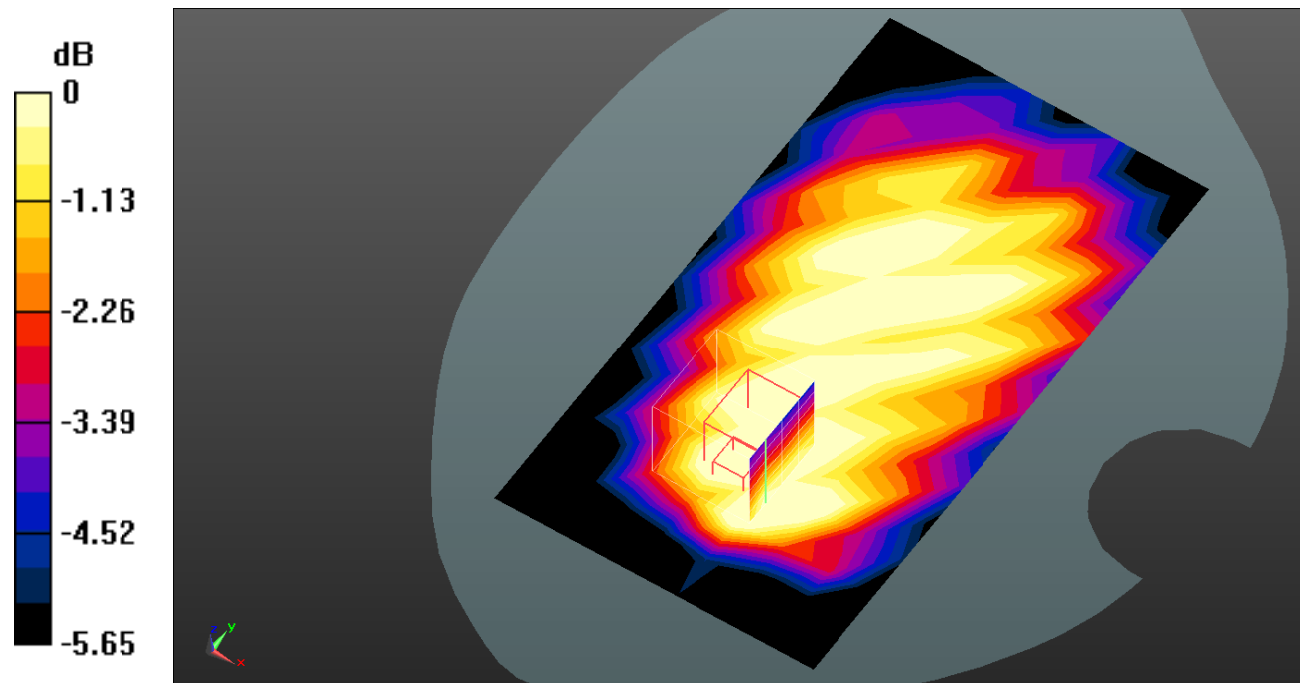

0 dB = 0.0266 W/kg = -15.75 dB dBW/kg

Test Plot104#: LTE Band 13_Body Left_1RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0199 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.440 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0159 W/kg

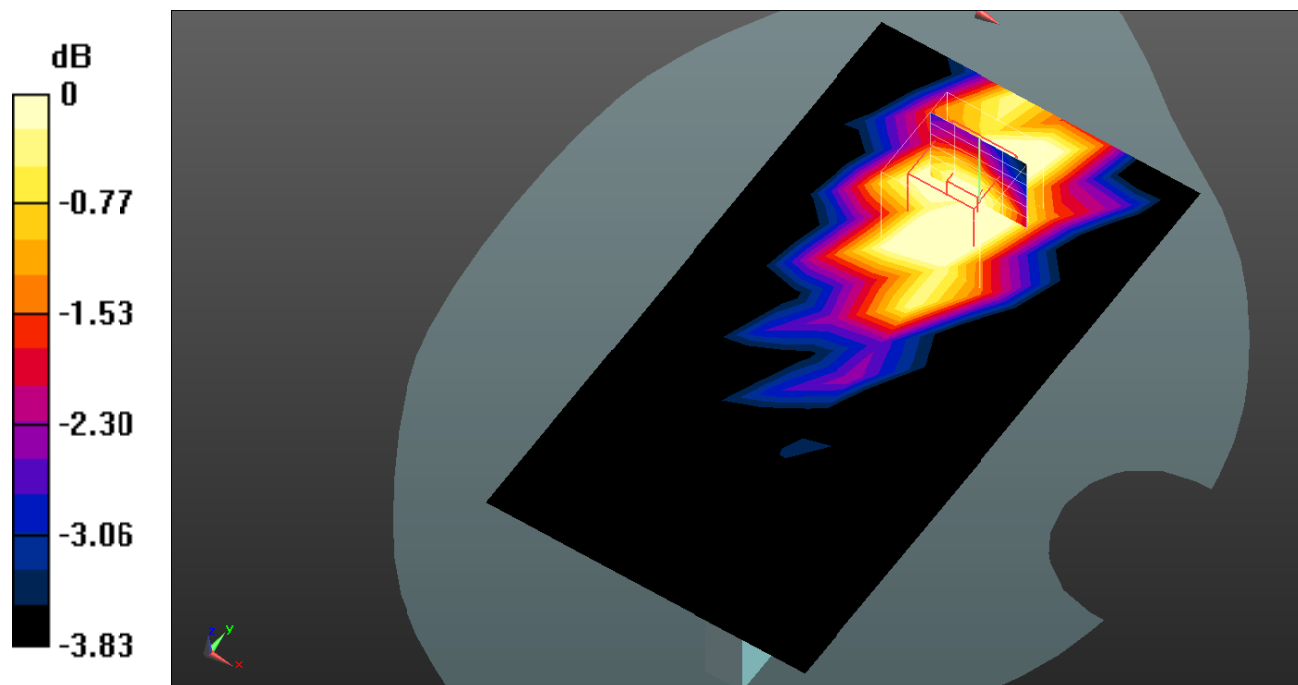

0 dB = 0.0159 W/kg = -17.99 dB dBW/kg

Test Plot105#: LTE Band 13_Body Left_50%RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0167 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.579 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0140 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0136 W/kg

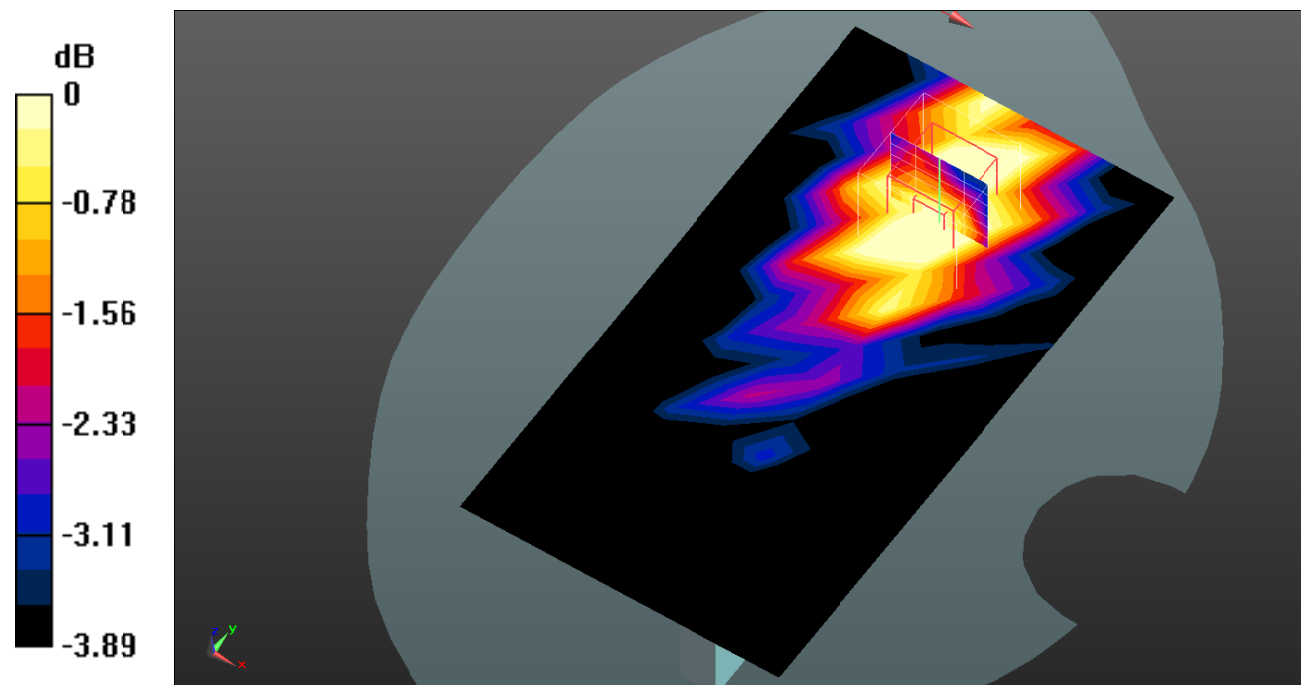

0 dB = 0.0136 W/kg = -18.66 dB dBW/kg

Test Plot106#: LTE Band 13_Body Right_1RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0202 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.026 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0149 W/kg

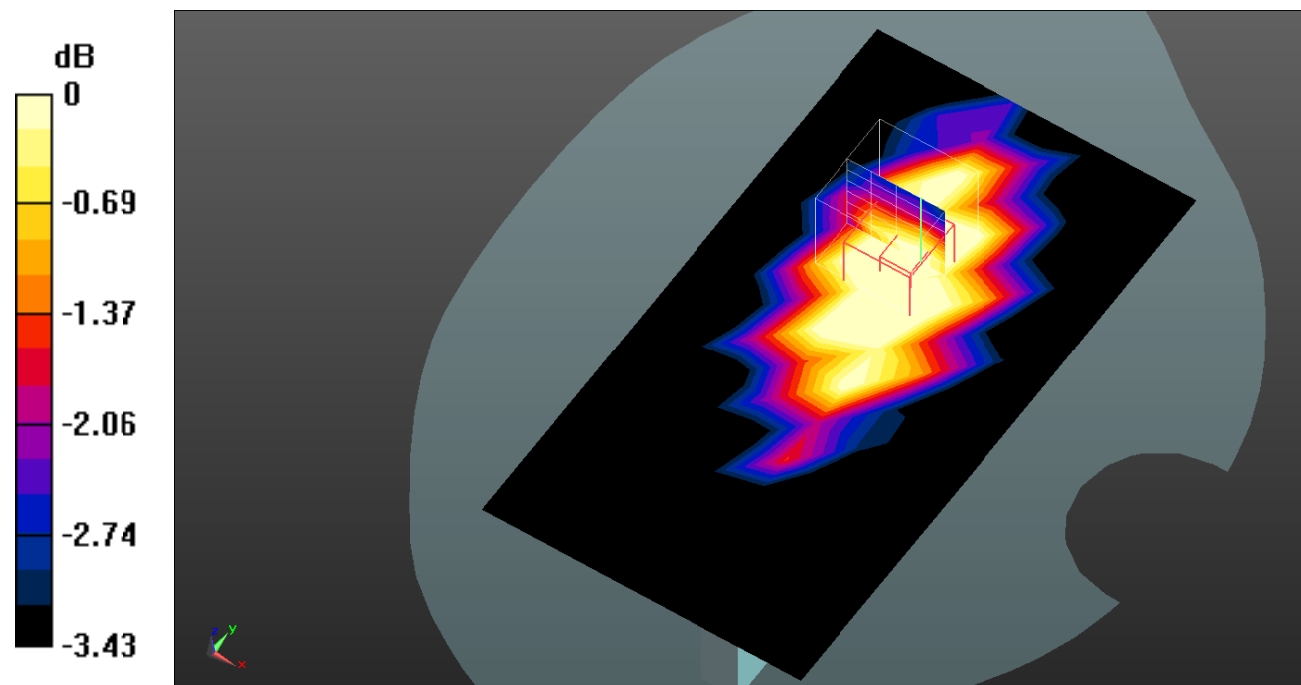

0 dB = 0.0149 W/kg = -18.27 dB dBW/kg

Test Plot107#: LTE Band 13_Body Right_50%RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0159 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.782 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0132 W/kg

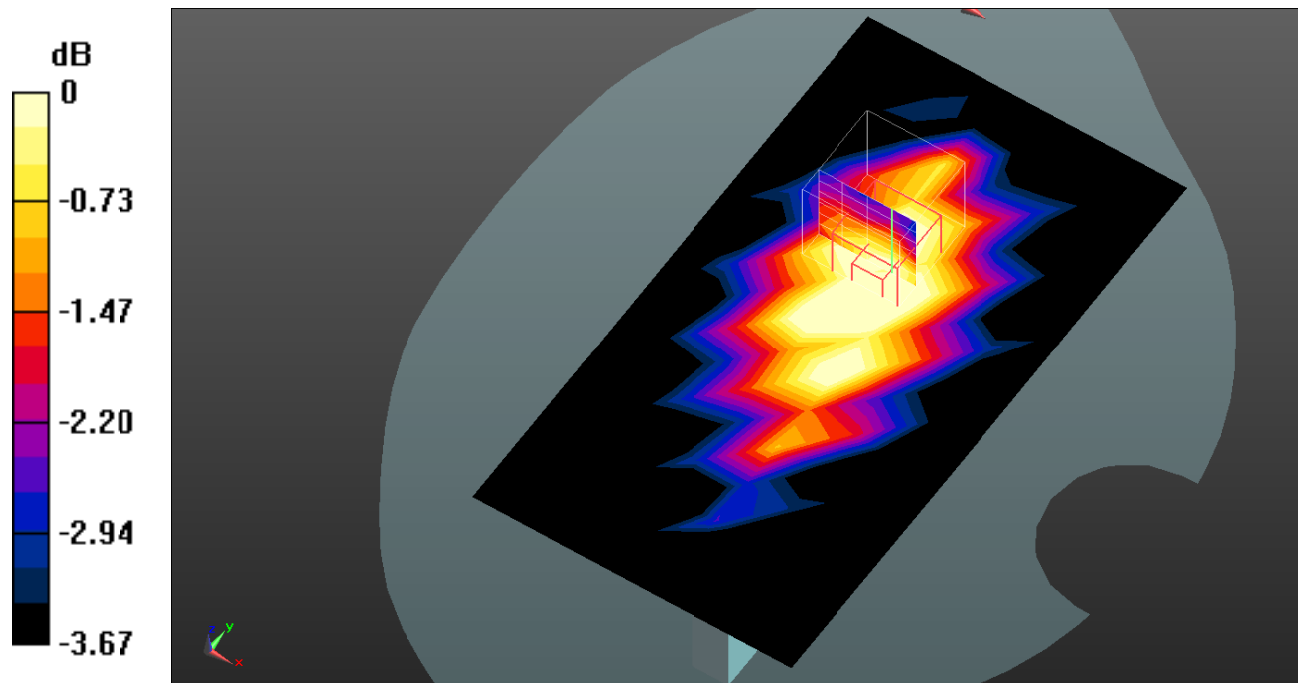

0 dB = 0.0132 W/kg = -18.79 dB dBW/kg

Test Plot108#: LTE Band 13_Body Bottom_1RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0128 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.344 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00909 W/kg

Maximum value of SAR (measured) = 0.0110 W/kg

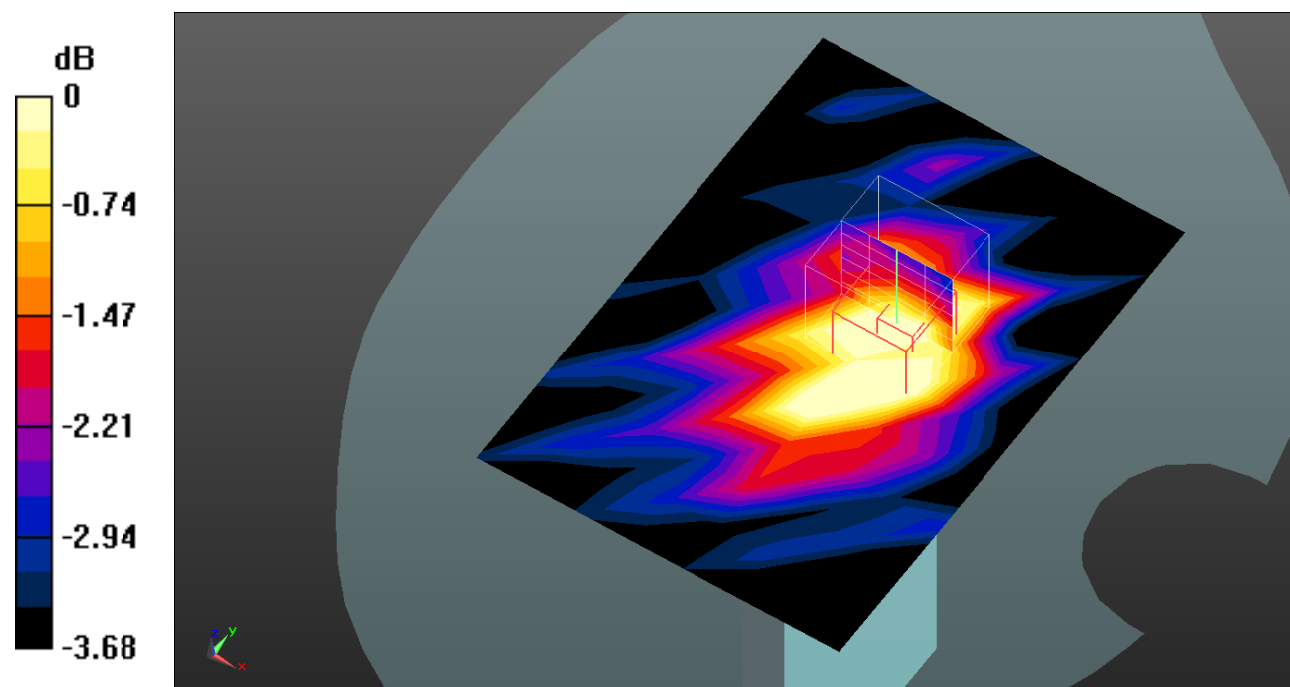

0 dB = 0.0110 W/kg = -19.59 dB dBW/kg

Test Plot109#: LTE Band 13_Body Bottom_50%RB_High**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.045$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @782 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0120 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.079 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.00975 W/kg

SAR(1 g) = 0.00919 W/kg; SAR(10 g) = 0.00792 W/kg

Maximum value of SAR (measured) = 0.00938 W/kg

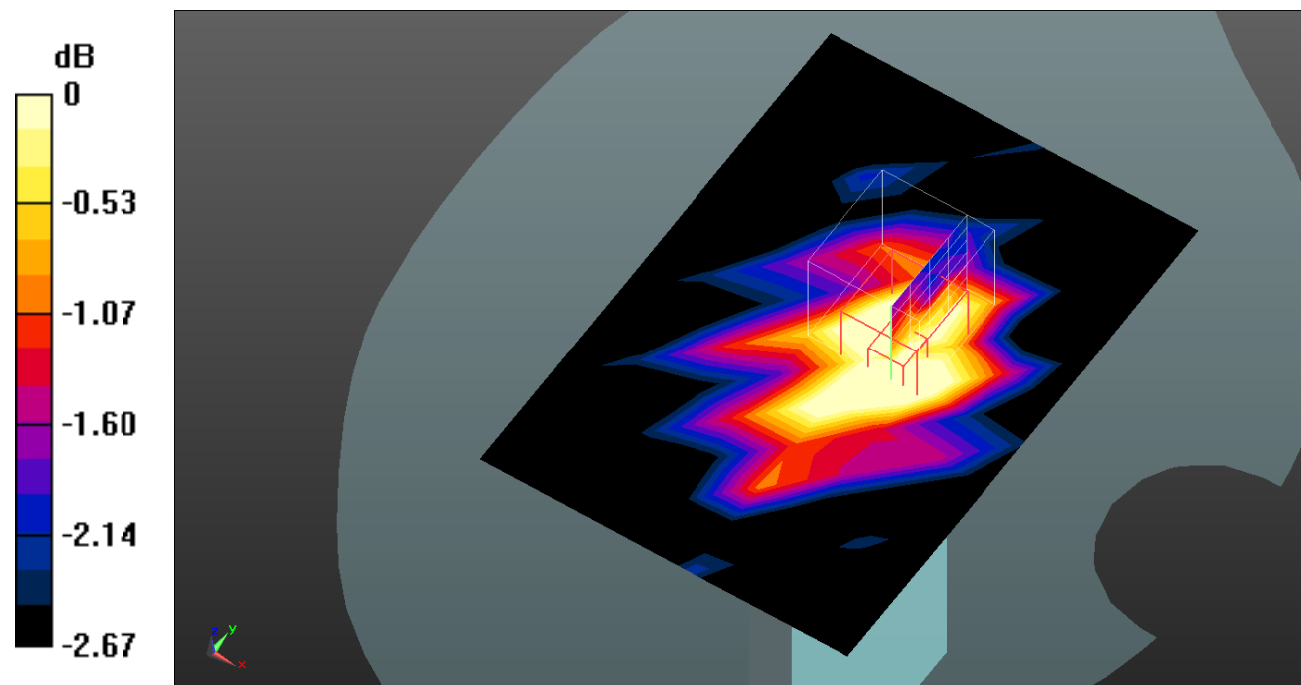

0 dB = 0.00938 W/kg = -20.28 dB dBW/kg

Test Plot110#: LTE Band 25_Head Left Cheek_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.107 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.373 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.0973 W/kg

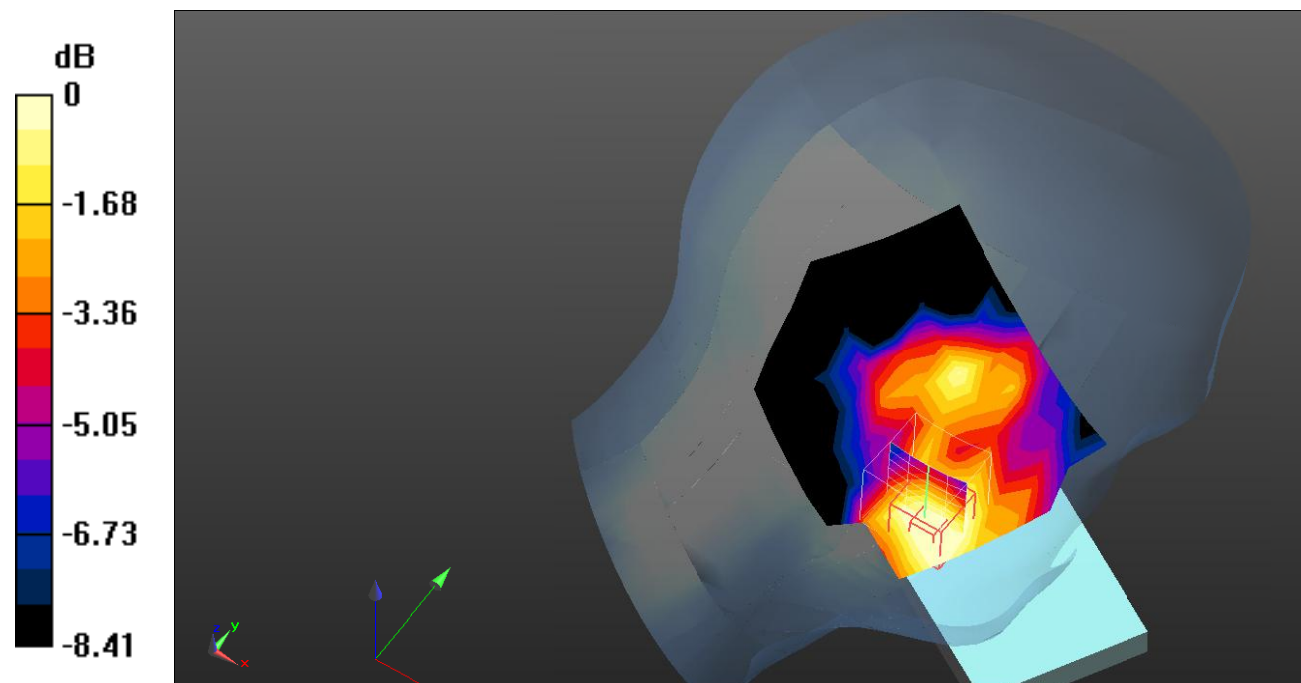

0 dB = 0.0973 W/kg = -10.12 dB dBW/kg

Test Plot111#: LTE Band 25_Head Left Cheek_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.104 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.917 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

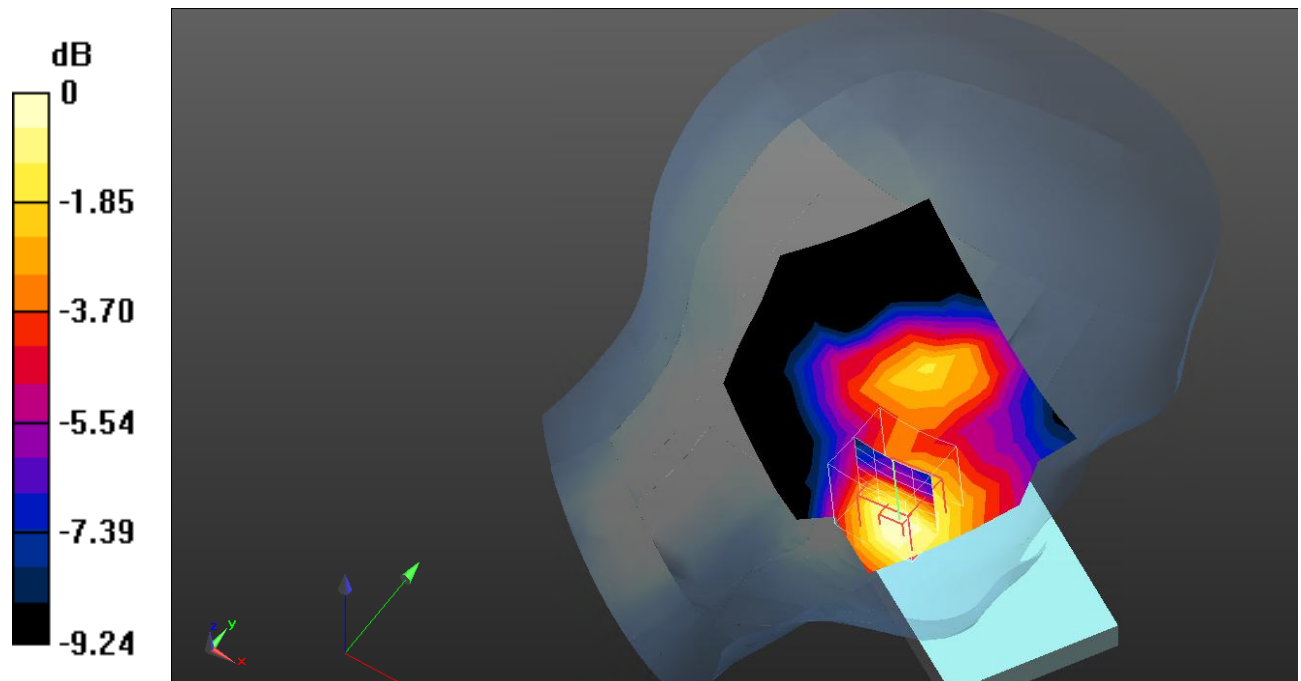

0 dB = 0.107 W/kg = -9.71 dB dBW/kg

Test Plot112#: LTE Band 25_Head Left Tilt_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0638 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.679 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0633 W/kg

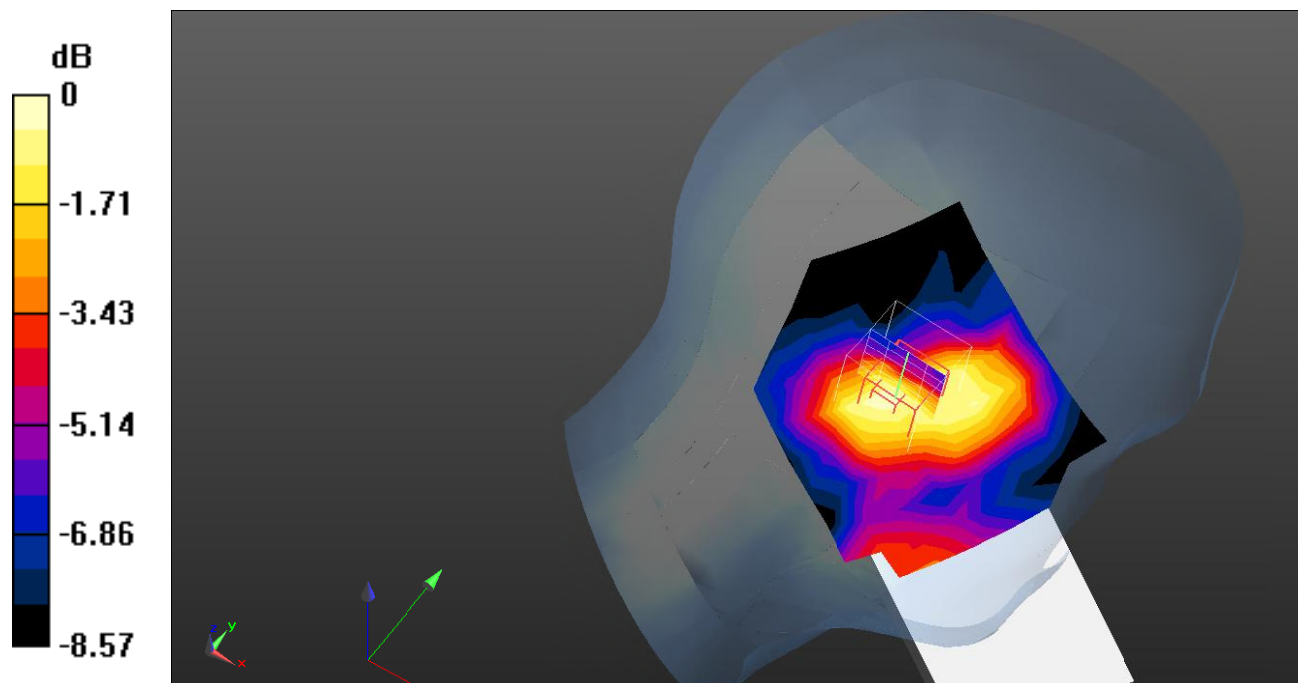

0 dB = 0.0633 W/kg = -11.99 dB dBW/kg

Test Plot113#: LTE Band 25_Head Left Tilt_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0603 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.387 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0595 W/kg

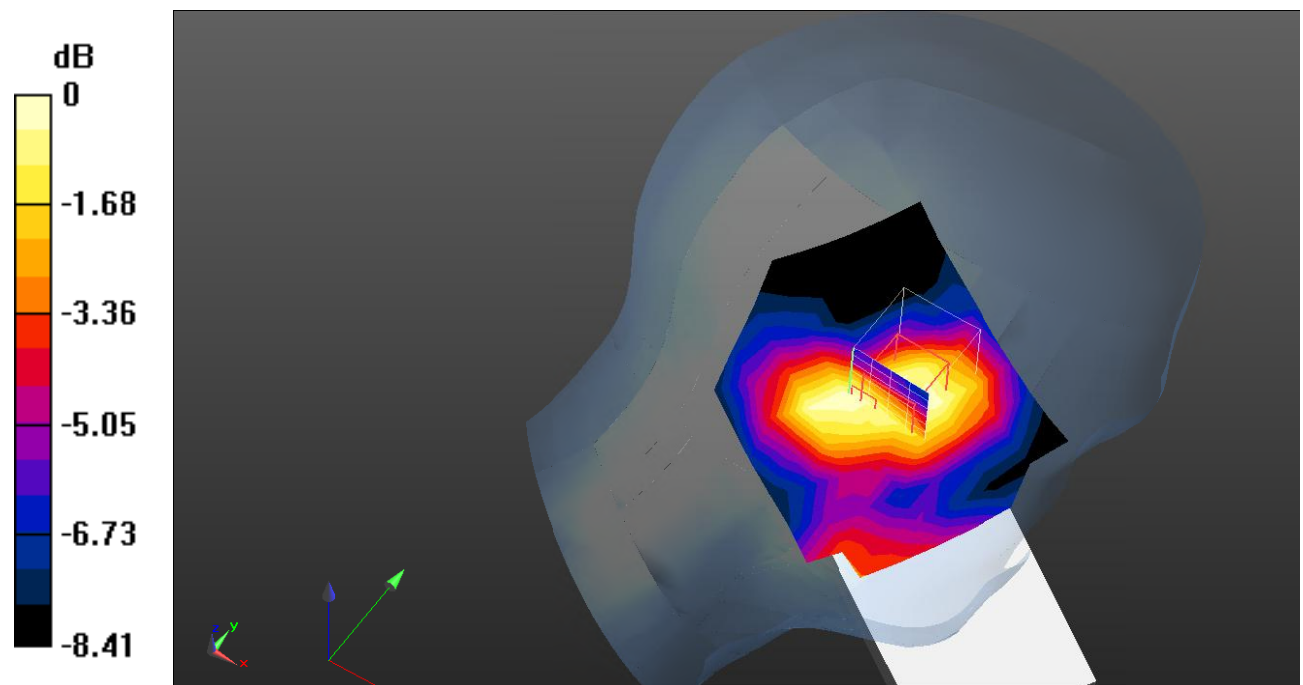

0 dB = 0.0595 W/kg = -12.25 dB dBW/kg

Test Plot114#: LTE Band 25_Head Right Cheek_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0678 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.522 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0681 W/kg

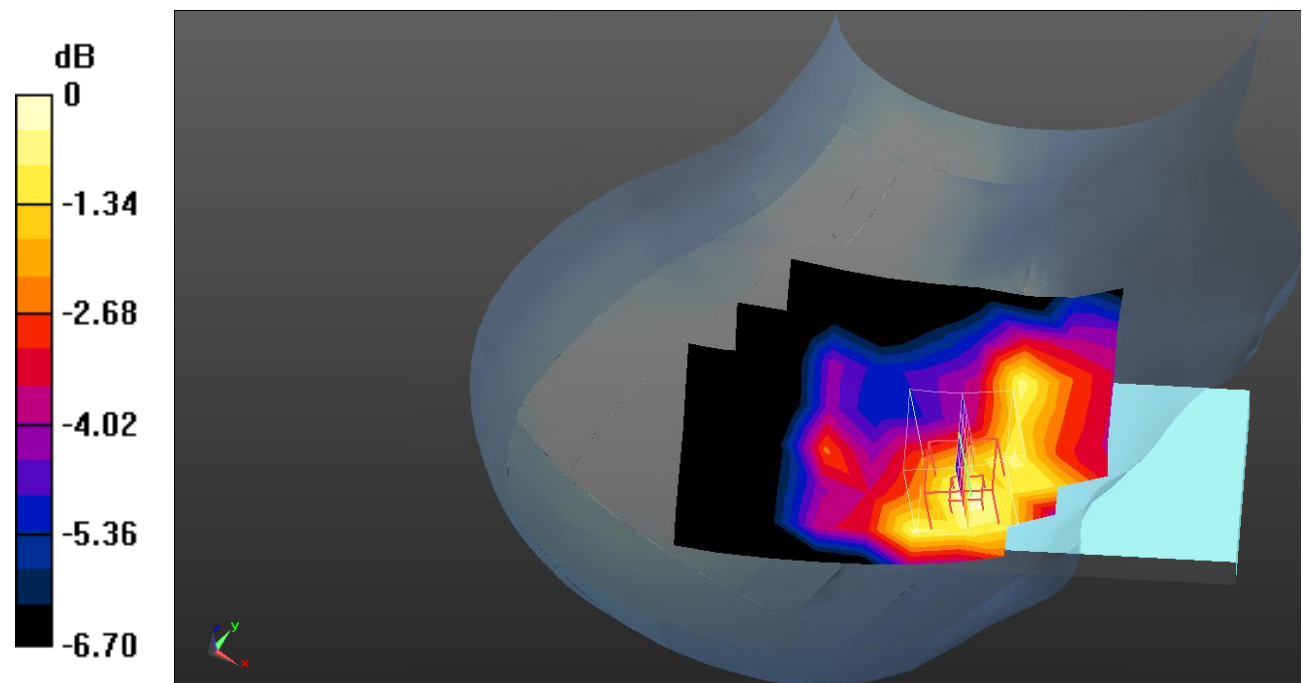

0 dB = 0.0681 W/kg = -11.67 dB dBW/kg

Test Plot115#: LTE Band 25_Head Right Cheek_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0632 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.936 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0607 W/kg

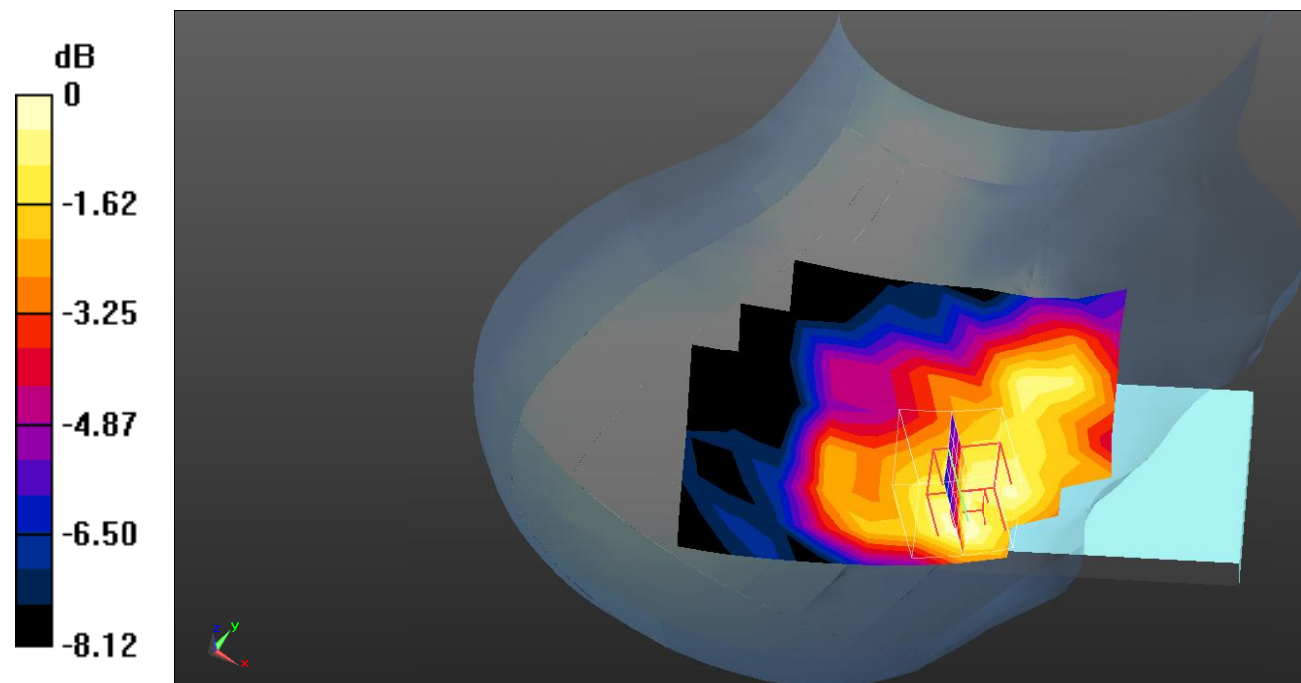

0 dB = 0.0607 W/kg = -12.17 dB dBW/kg

Test Plot116#: LTE Band 25_Head Right Tilt_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0658 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.277 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0723 W/kg

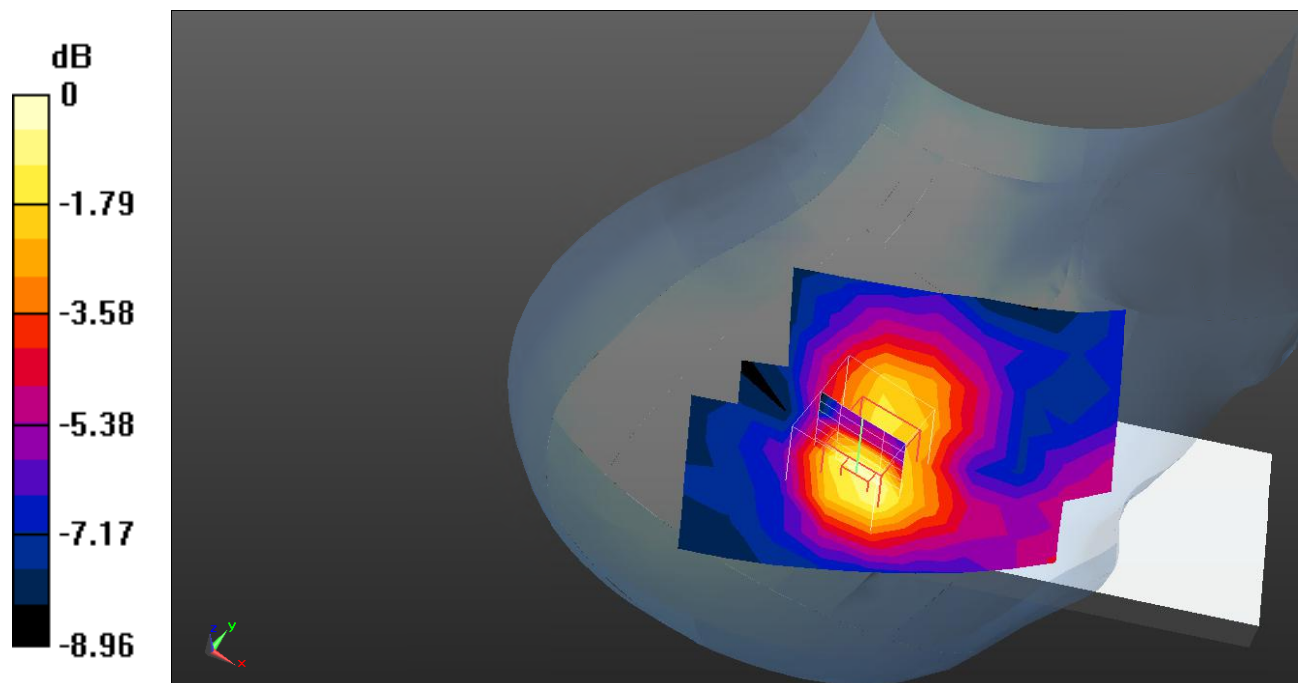

0 dB = 0.0723 W/kg = -11.41 dB dBW/kg

Test Plot117#: LTE Band 25_Head Right Tilt_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0622 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.040 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0647 W/kg

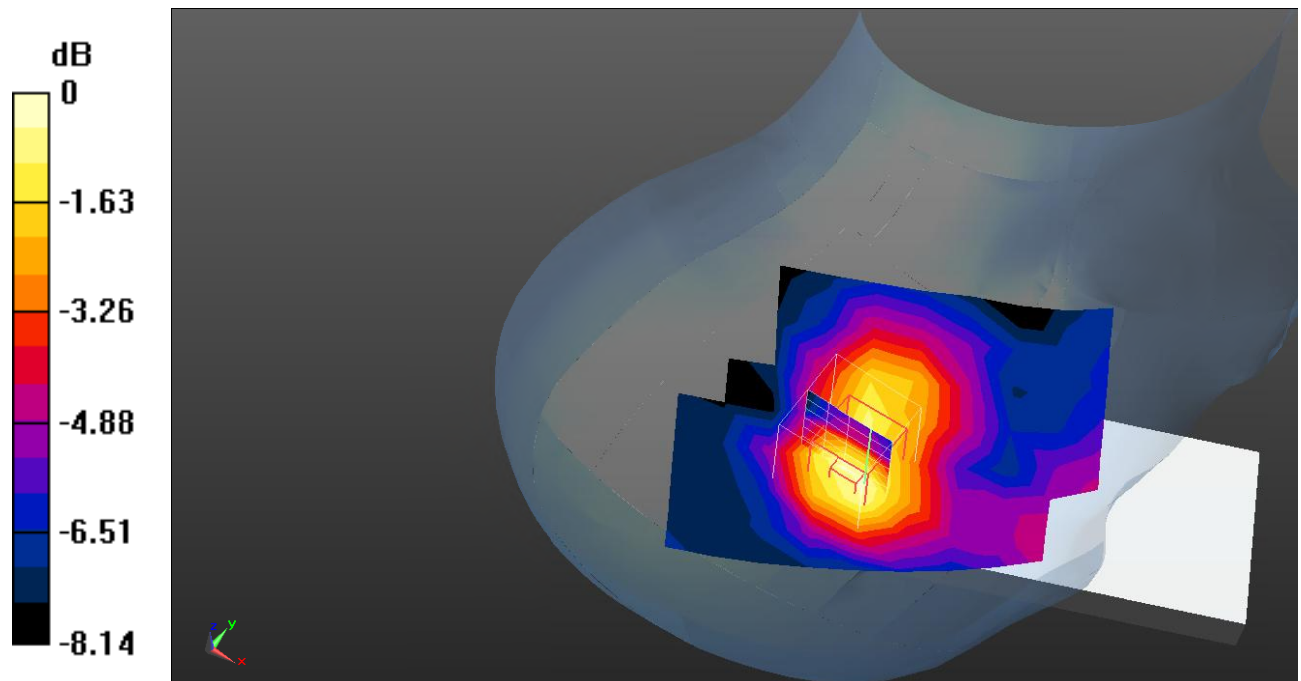

0 dB = 0.0647 W/kg = -11.89 dB dBW/kg

Test Plot118#: LTE Band 25_Body Front_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.239 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.886 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

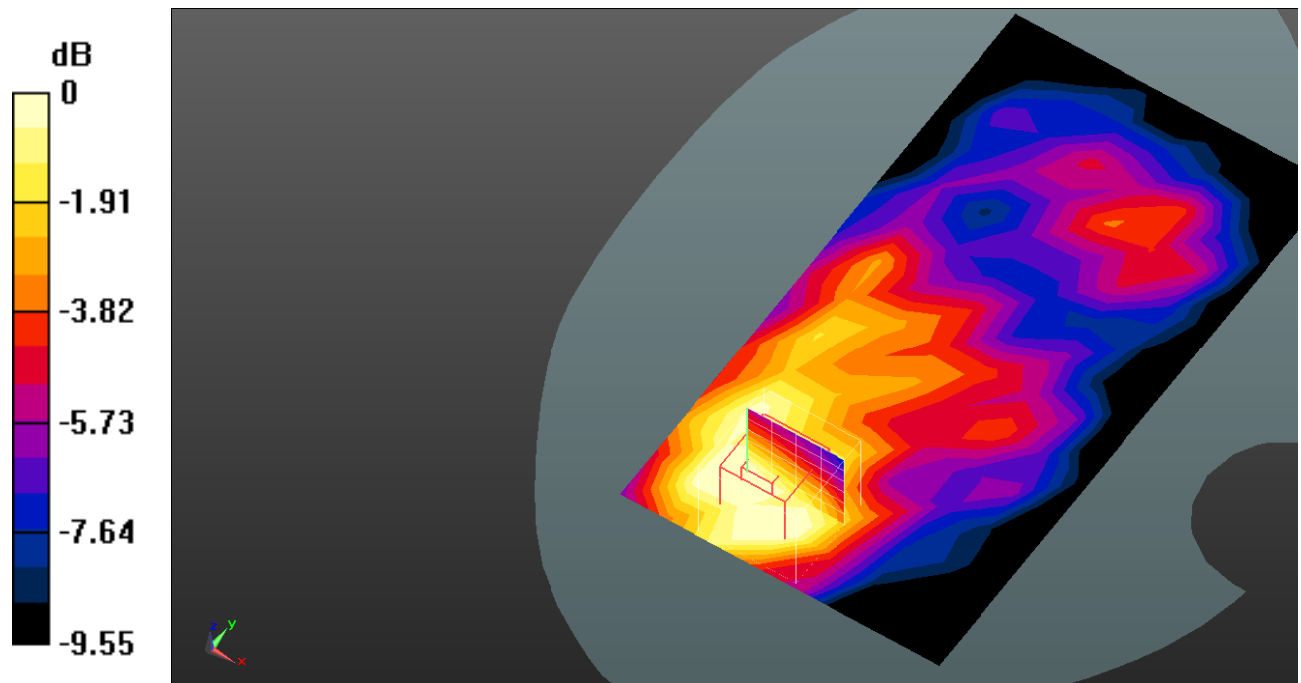

0 dB = 0.195 W/kg = -7.10 dB dBW/kg

Test Plot119#: LTE Band 25_Body Front_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.212 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.096 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.184 W/kg

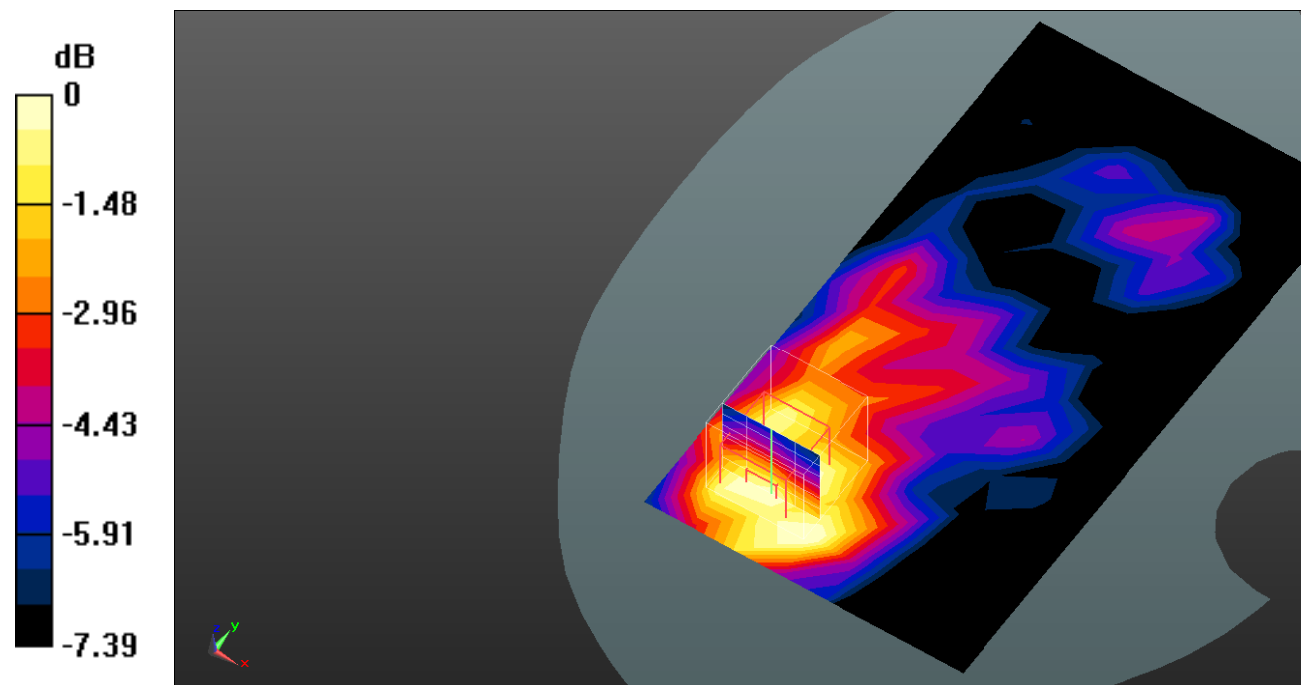

0 dB = 0.184 W/kg = -7.35 dB dBW/kg

Test Plot120#: LTE Band 25_Body Back_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.378 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.604 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.361 W/kg

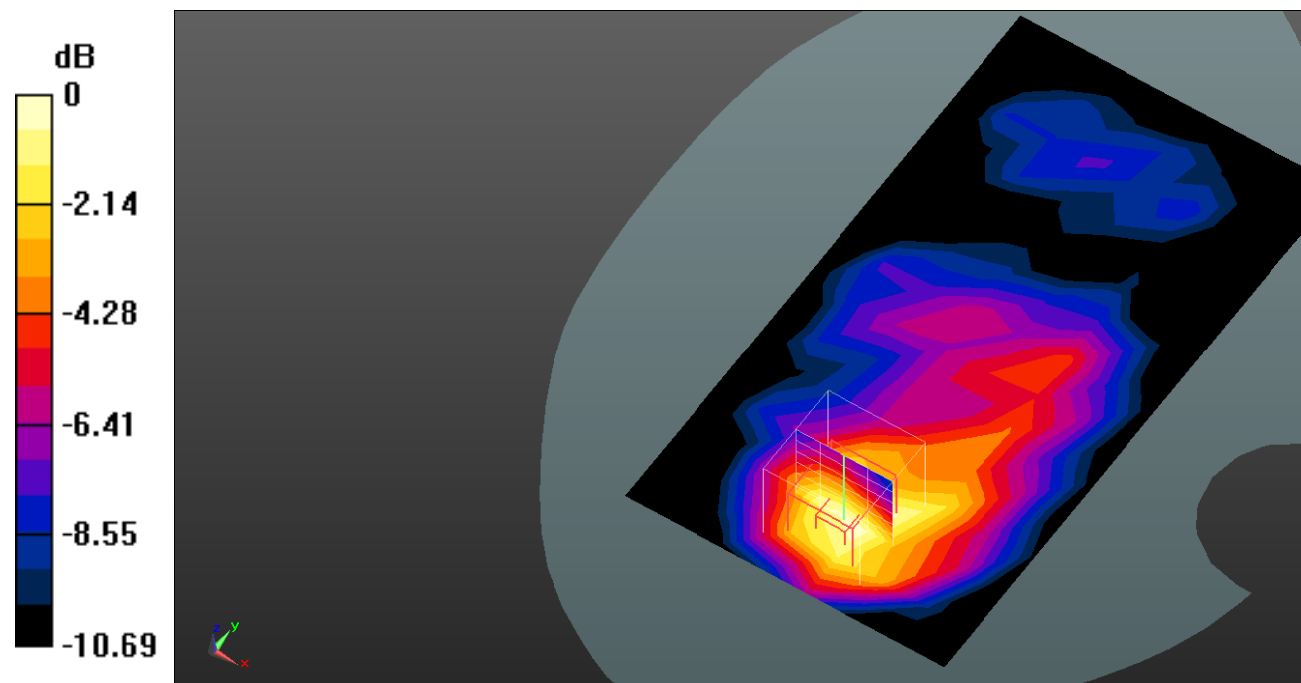

0 dB = 0.361 W/kg = -4.42 dB dBW/kg

Test Plot121#: LTE Band 25_Body Back_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.334 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.275 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

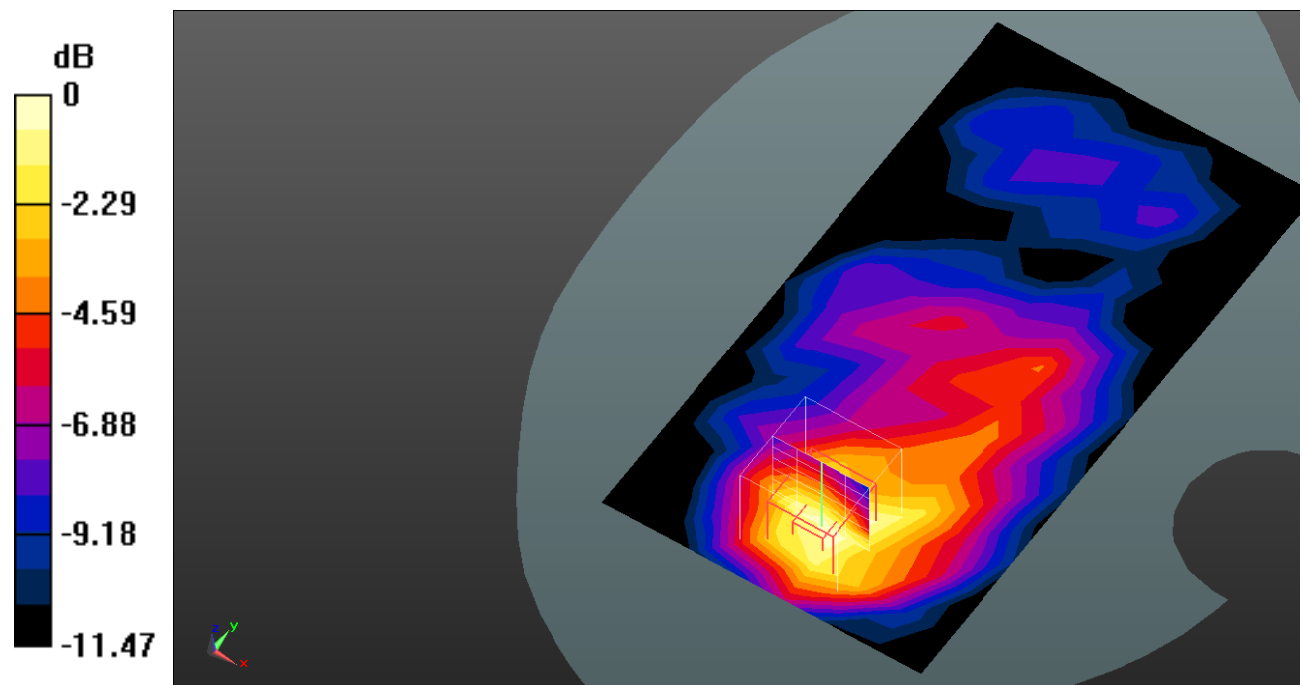

0 dB = 0.320 W/kg = -4.95 dB dBW/kg

Test Plot122#: LTE Band 25_Body Left_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.153 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.563 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

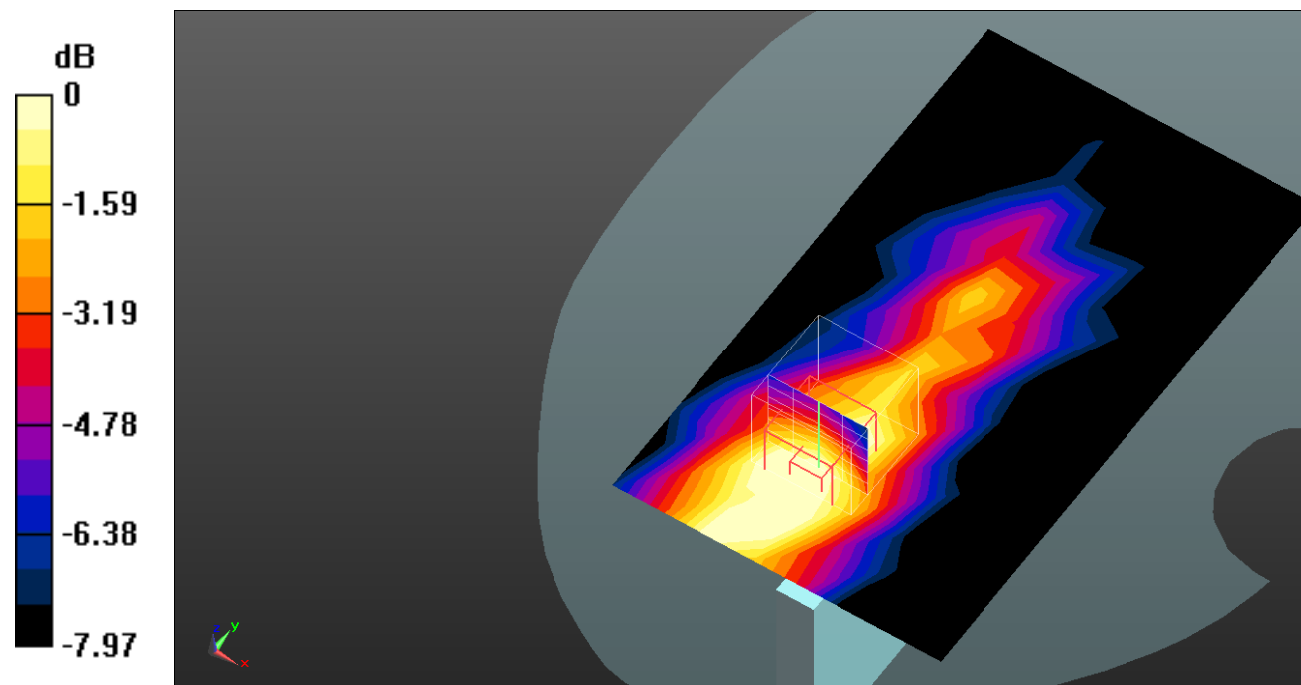

0 dB = 0.123 W/kg = -9.10 dB dBW/kg

Test Plot123#: LTE Band 25_Body Left_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.129 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.287 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

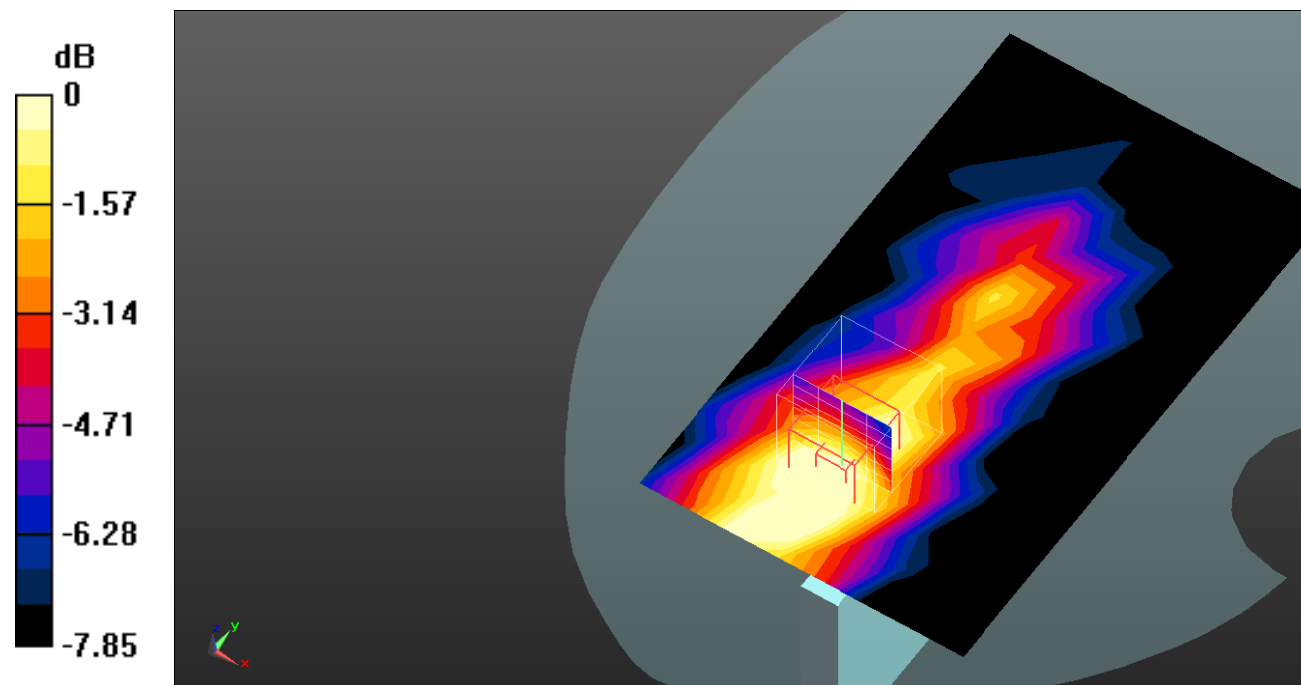

0 dB = 0.101 W/kg = -9.96 dB dBW/kg

Test Plot124#: LTE Band 25_Body Right_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0822 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.955 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0857 W/kg

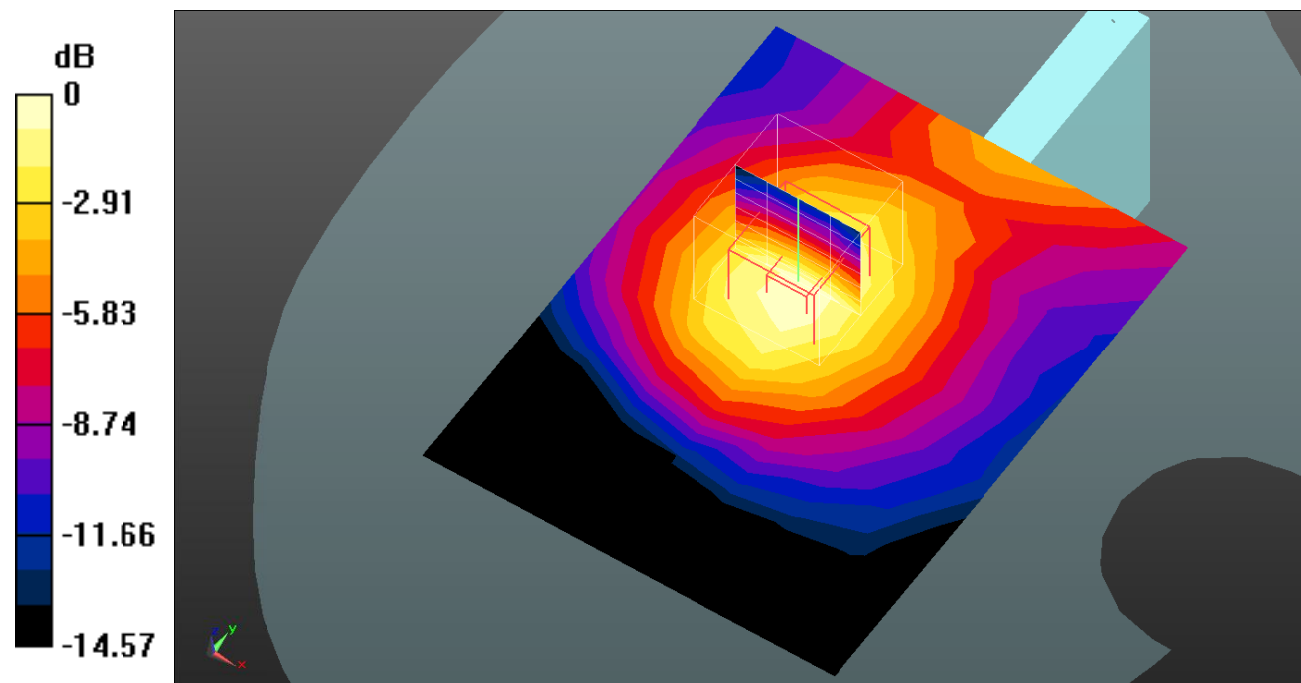

Test Plot125#: LTE Band 25_Body Right_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0780 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.763 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0822 W/kg

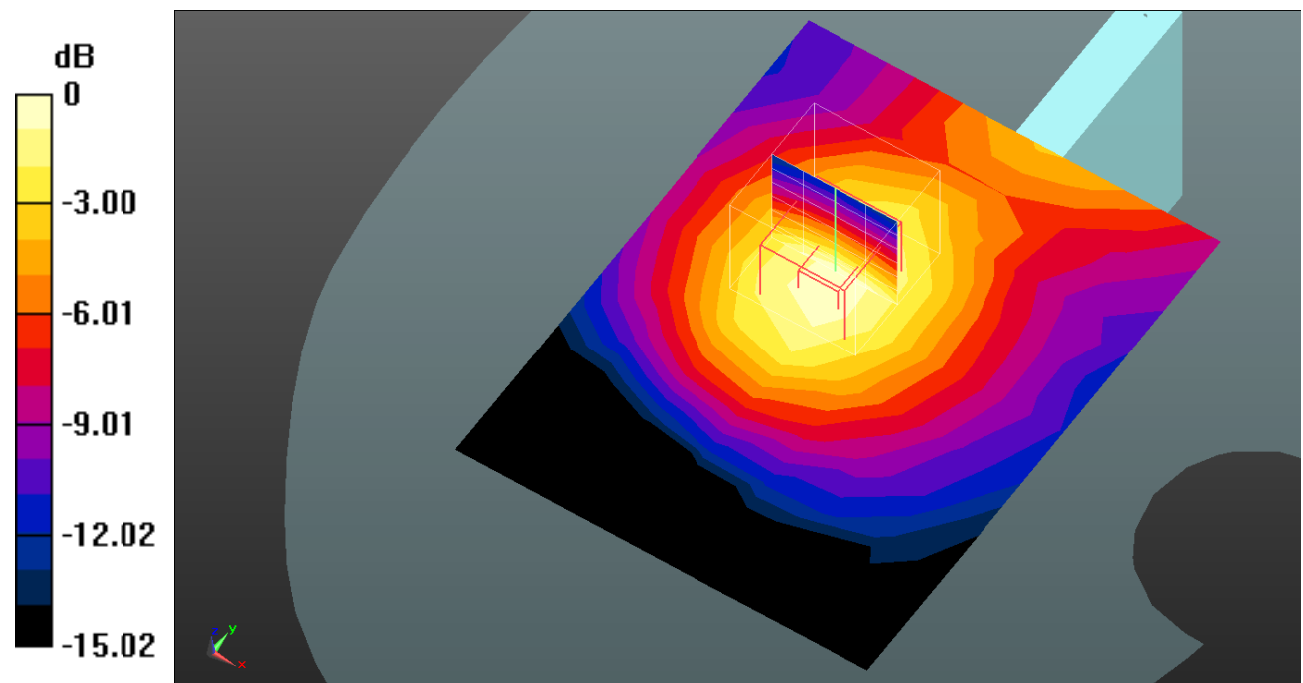

0 dB = 0.0822 W/kg = -10.85 dB dBW/kg

Test Plot126#: LTE Band 25_Body Bottom_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.182 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.391 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

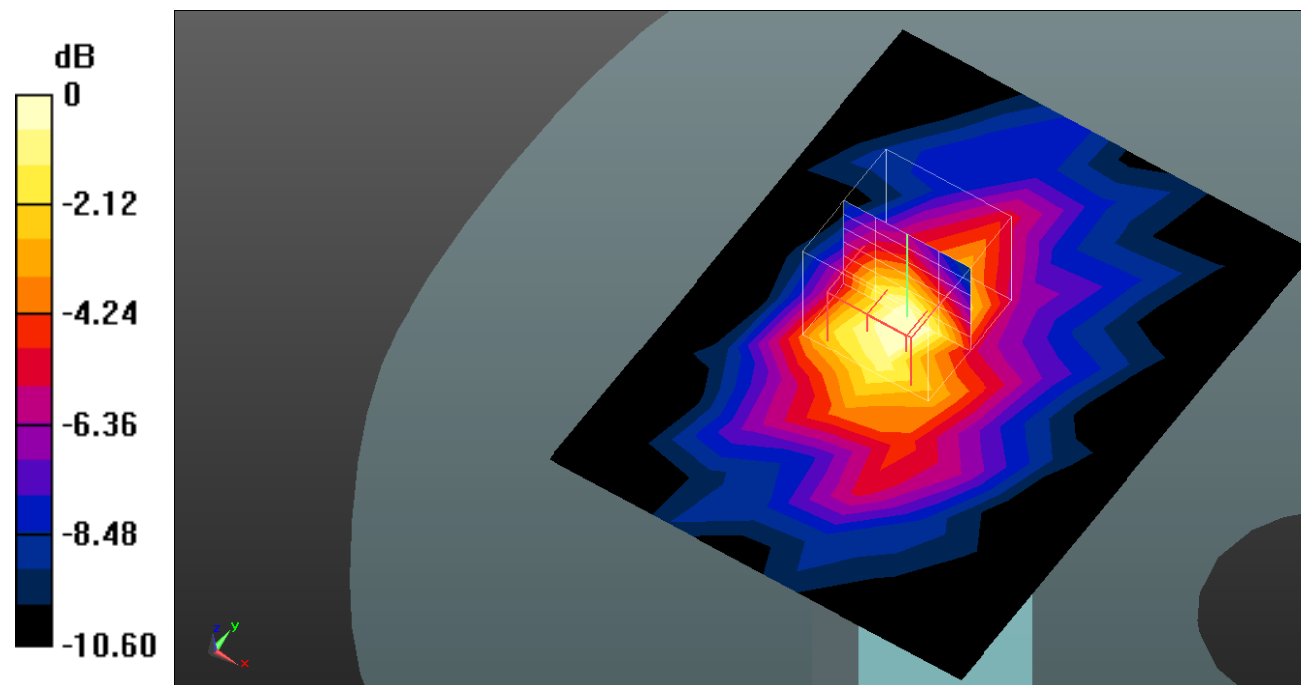

0 dB = 0.145 W/kg = -8.39 dB dBW/kg

Test Plot127#: LTE Band 25_Body Bottom_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.817$; $\rho = 1000$ kg/m³;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(7.65, 7.65, 7.65) @1882.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.165 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.149 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

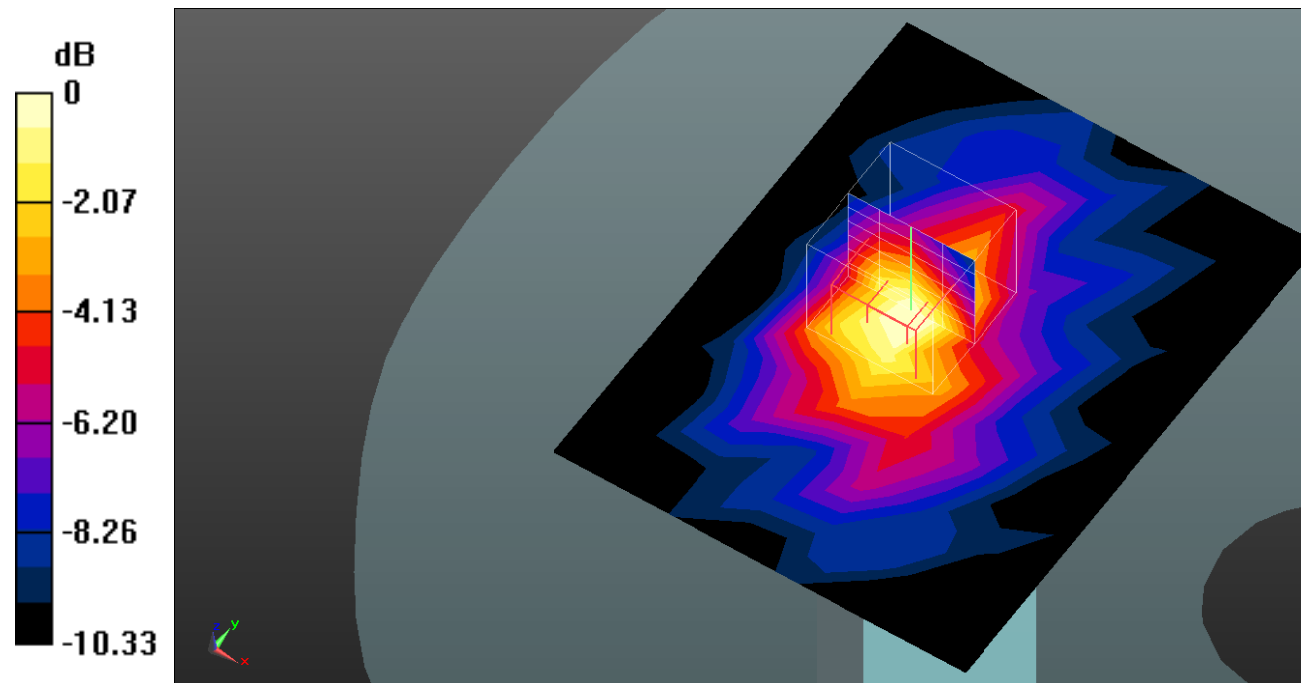

0 dB = 0.132 W/kg = -8.79 dB dBW/kg

Test Plot128#: LTE Band 26_Head Left Cheek_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00853 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.761 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.00792 W/kg

SAR(1 g) = 0.00736 W/kg; SAR(10 g) = 0.00677 W/kg

Maximum value of SAR (measured) = 0.00792 W/kg

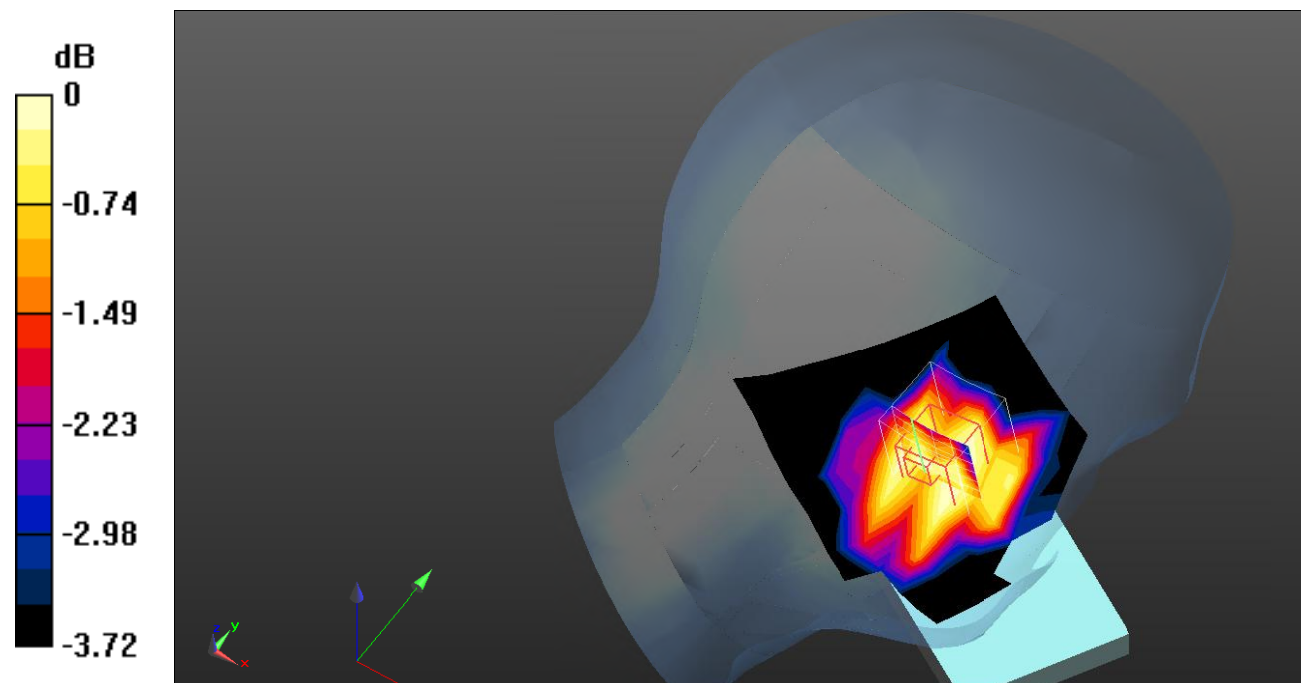

0 dB = 0.00792 W/kg = -21.01 dB dBW/kg

Test Plot129#: LTE Band 26_Head Left Cheek_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00683 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.467 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.00595 W/kg

SAR(1 g) = 0.00546 W/kg; SAR(10 g) = 0.00497 W/kg

Maximum value of SAR (measured) = 0.00595 W/kg

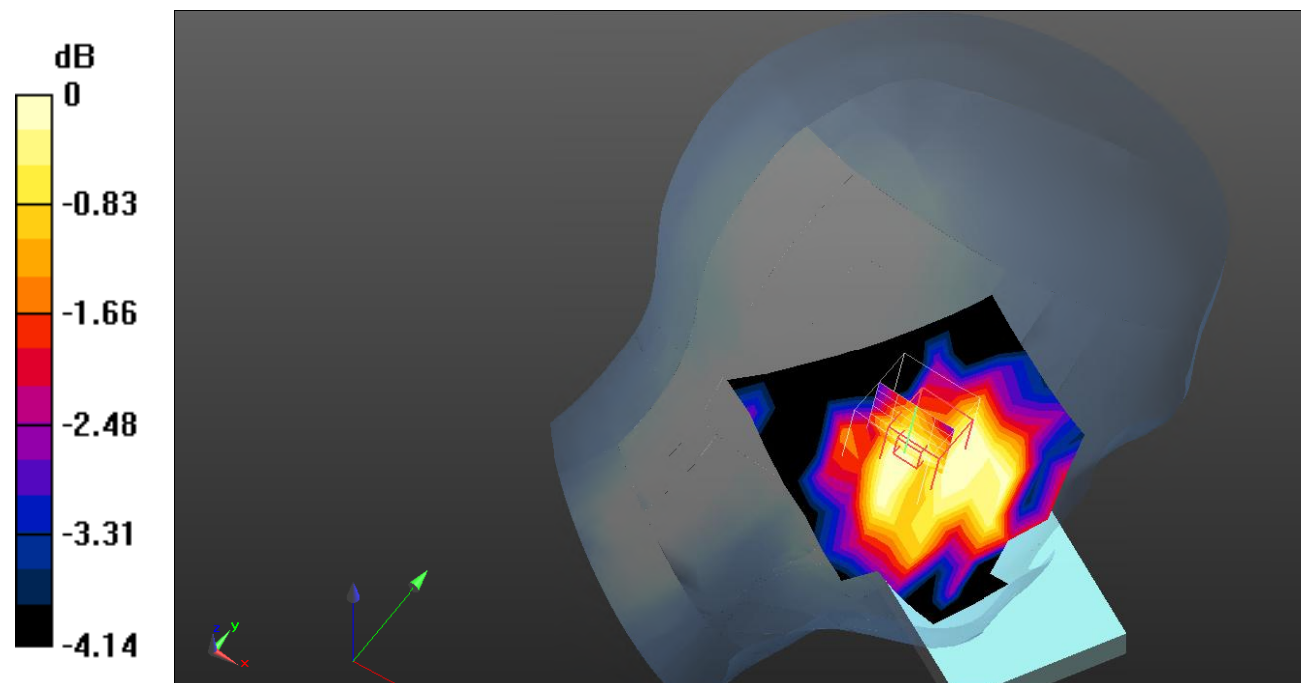

0 dB = 0.00595 W/kg = -22.25 dB dBW/kg

Test Plot130#: LTE Band 26_Head Left Tilt_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00635 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.747 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.00583 W/kg

SAR(1 g) = 0.00514 W/kg; SAR(10 g) = 0.00459 W/kg

Maximum value of SAR (measured) = 0.00583 W/kg

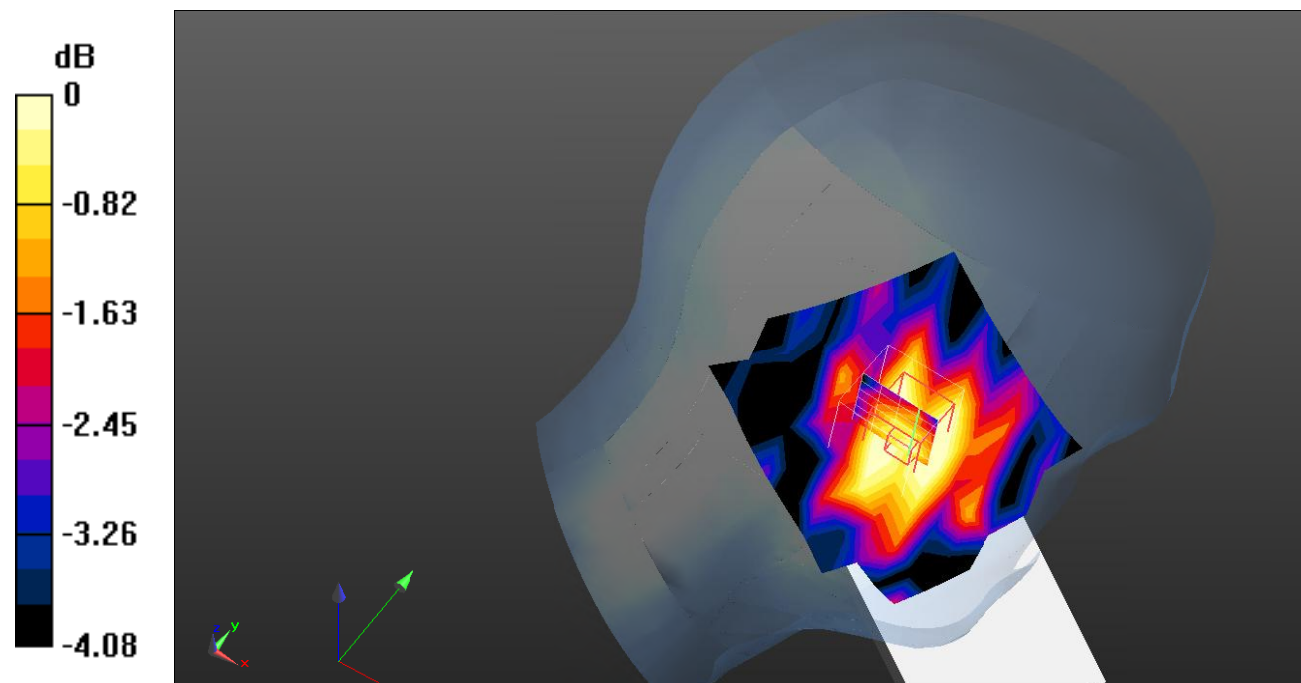

Test Plot131#: LTE Band 26_Head Left Tilt_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00470 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.356 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.00427 W/kg

SAR(1 g) = 0.00366 W/kg; SAR(10 g) = 0.00334 W/kg

Maximum value of SAR (measured) = 0.00427 W/kg

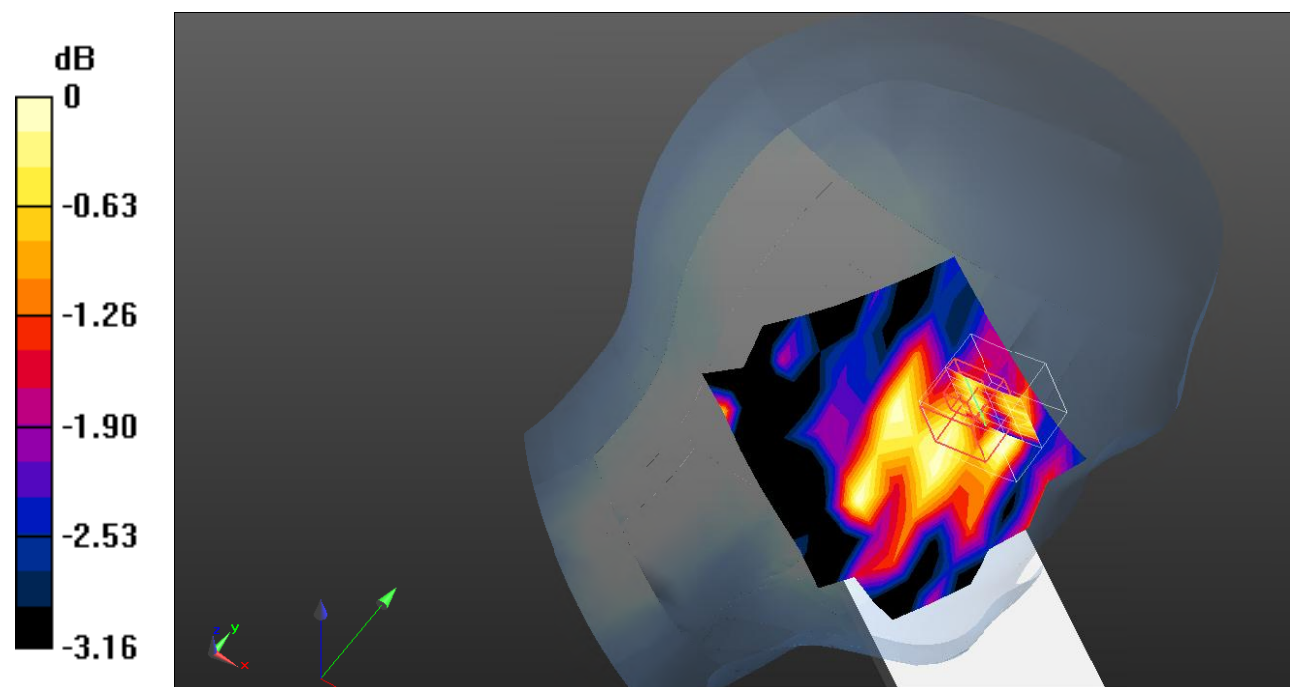

0 dB = 0.00427 W/kg = -23.70 dB dBW/kg

Test Plot132#: LTE Band 26_Head Right Cheek_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00994 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.323 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.00968 W/kg

SAR(1 g) = 0.00914 W/kg; SAR(10 g) = 0.00839 W/kg

Maximum value of SAR (measured) = 0.00961 W/kg

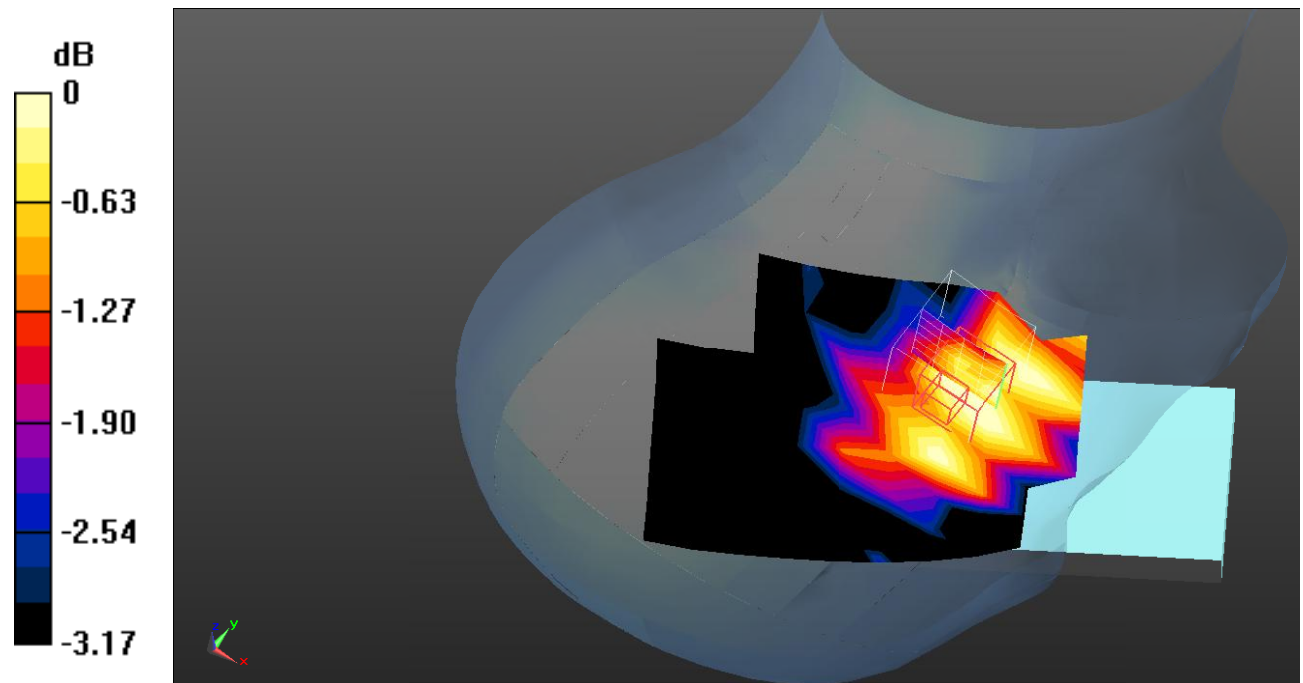

0 dB = 0.00961 W/kg = -20.17 dB dBW/kg

Test Plot133#: LTE Band 26_Head Right Cheek_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00948 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.191 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.00848 W/kg

SAR(1 g) = 0.00813 W/kg; SAR(10 g) = 0.00755 W/kg

Maximum value of SAR (measured) = 0.00845 W/kg

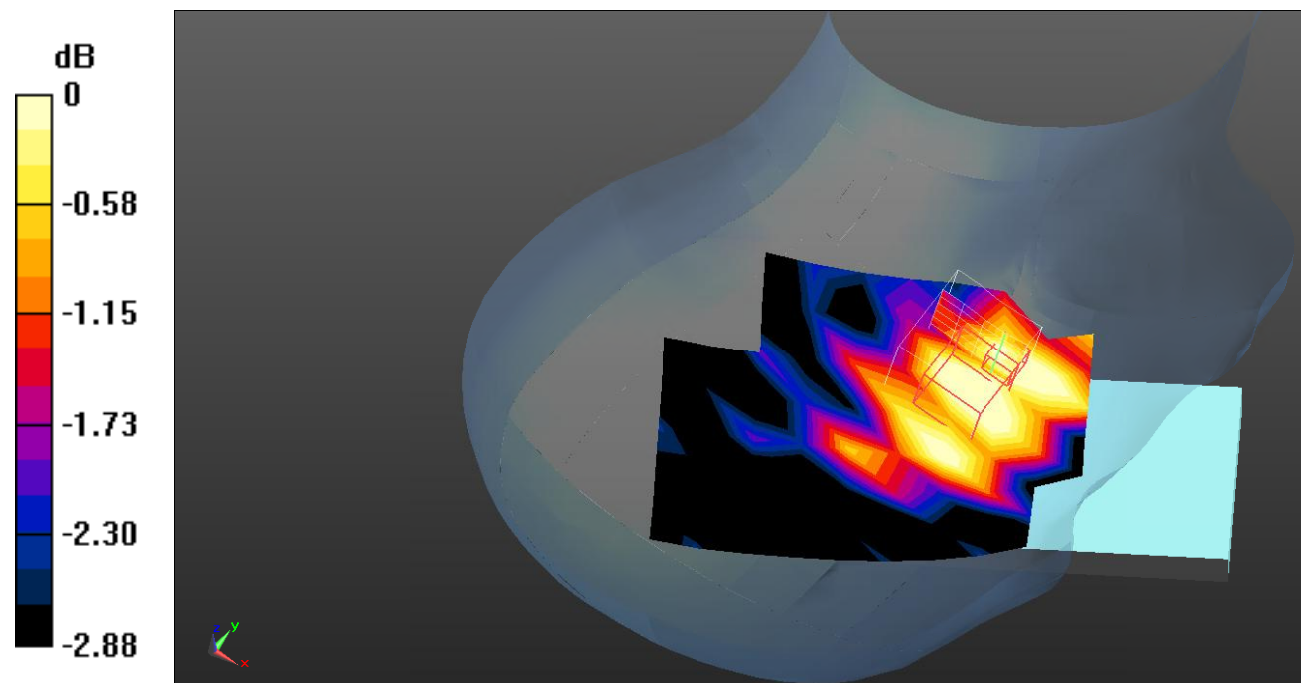

0 dB = 0.00845 W/kg = -20.73 dB dBW/kg

Test Plot134#: LTE Band 26_Head Right Tilt_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00816 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.274 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.00791 W/kg

SAR(1 g) = 0.00757 W/kg; SAR(10 g) = 0.00674 W/kg

Maximum value of SAR (measured) = 0.00781 W/kg

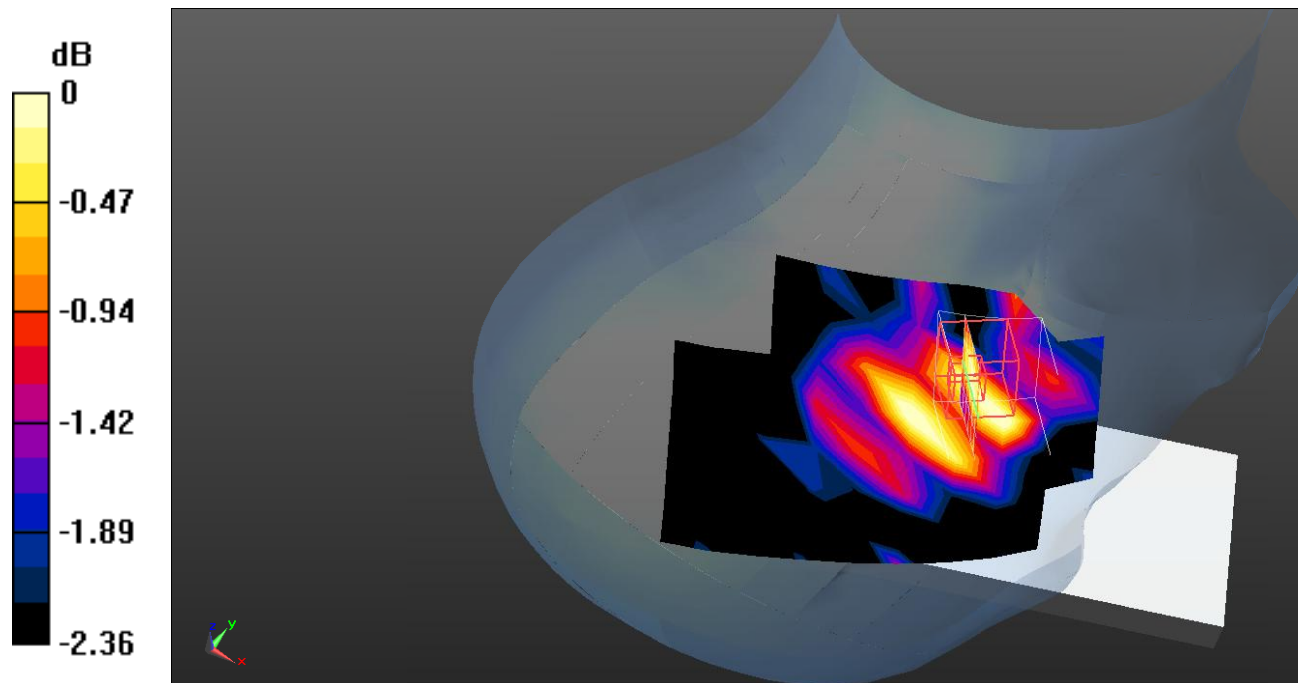

0 dB = 0.00781 W/kg = -21.07 dB dBW/kg

Test Plot135#: LTE Band 26_Head Right Tilt_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00723 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.409 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.00629 W/kg

SAR(1 g) = 0.00587 W/kg; SAR(10 g) = 0.00542 W/kg

Maximum value of SAR (measured) = 0.00621 W/kg

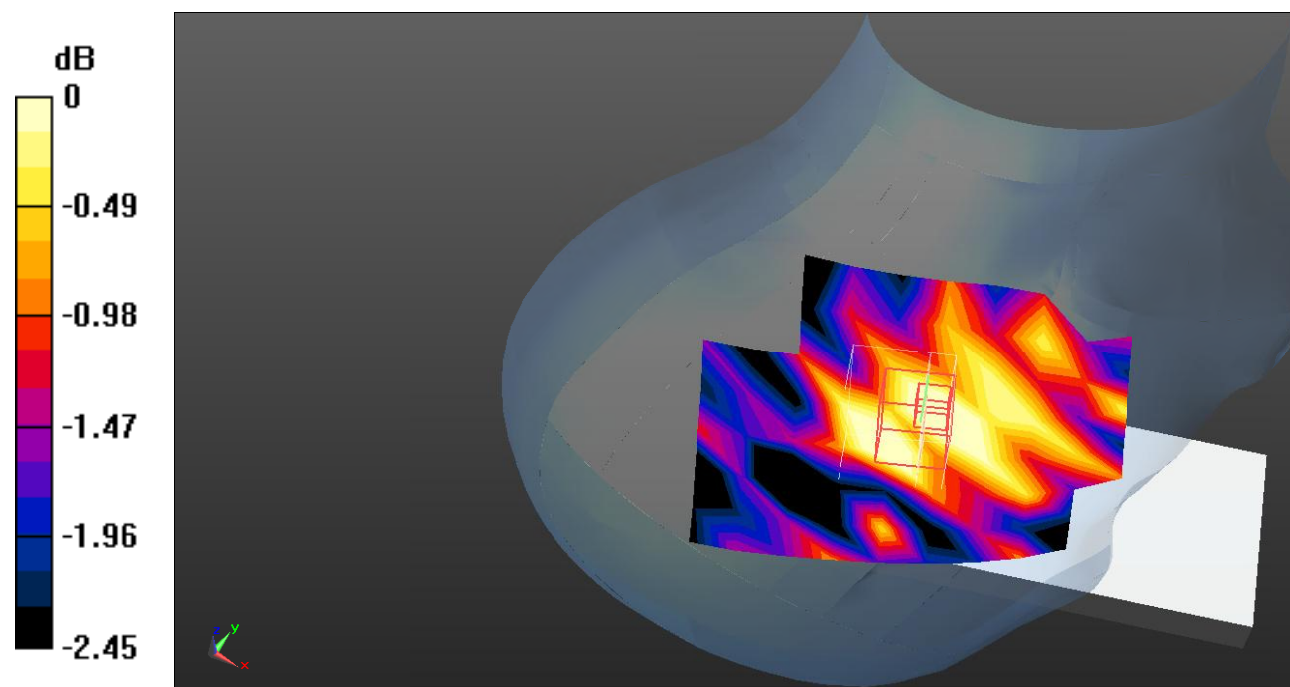

0 dB = 0.00621 W/kg = -22.07 dB dBW/kg

Test Plot136#: LTE Band 26_Body Front_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0116 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.874 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.00899 W/kg

SAR(1 g) = 0.00863 W/kg; SAR(10 g) = 0.00741 W/kg

Maximum value of SAR (measured) = 0.00878 W/kg

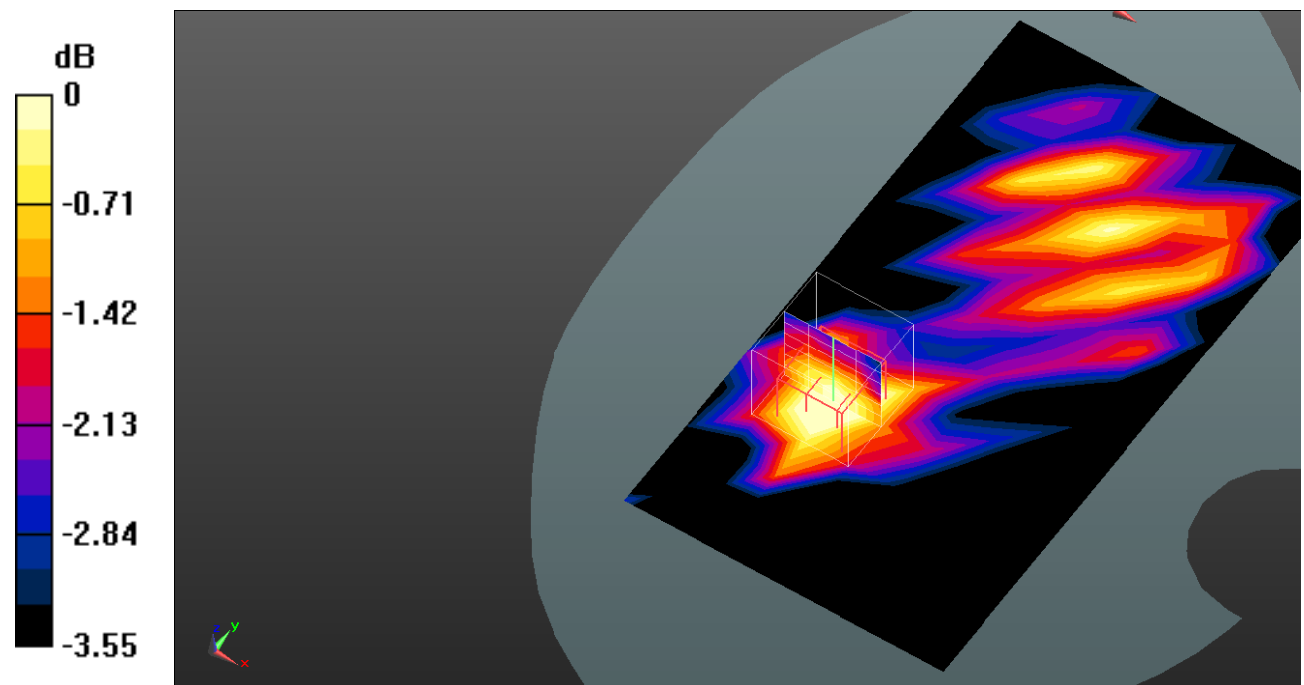

0 dB = 0.00878 W/kg = -20.57 dB dBW/kg

Test Plot137#: LTE Band 26_Body Front_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00868 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.771 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.00729 W/kg

SAR(1 g) = 0.00694 W/kg; SAR(10 g) = 0.00594 W/kg

Maximum value of SAR (measured) = 0.00696 W/kg

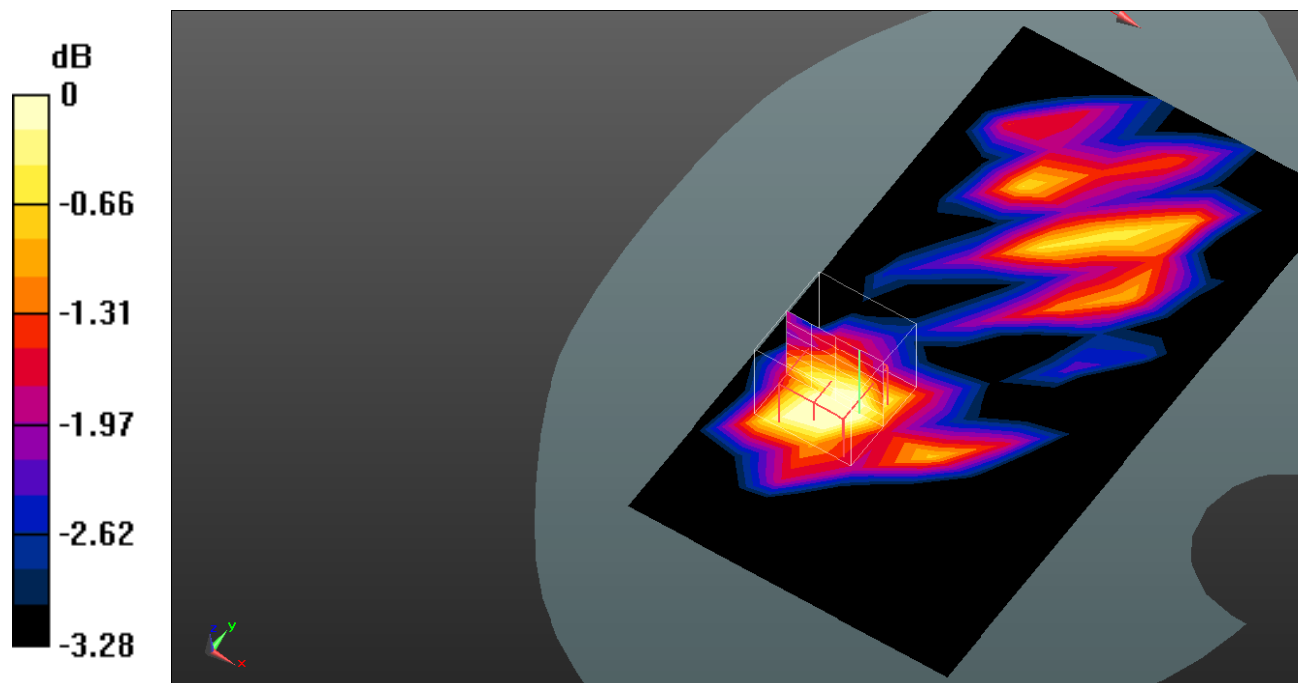

0 dB = 0.00696 W/kg = -21.57 dB dBW/kg

Test Plot138#: LTE Band 26_Body Back_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0432 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.932 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0386 W/kg

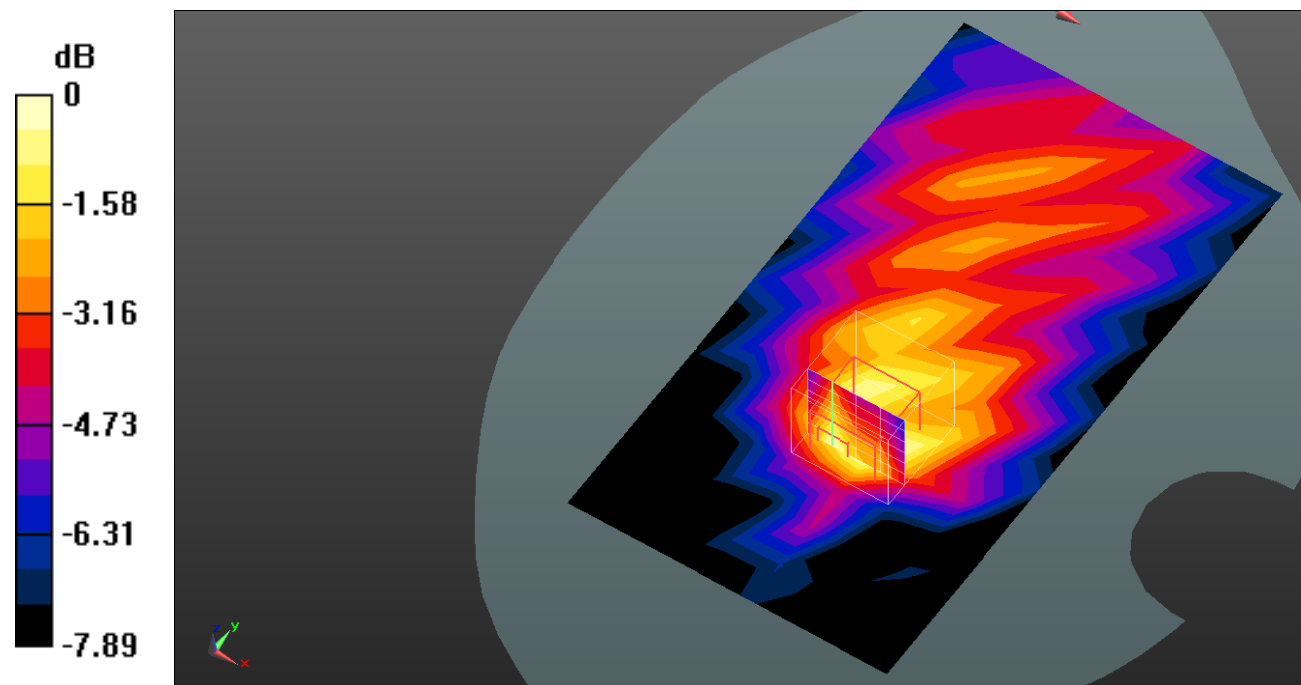

0 dB = 0.0386 W/kg = -14.13 dB dBW/kg

Test Plot139#: LTE Band 26_Body Back_50%RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0338 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.494 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0285 W/kg

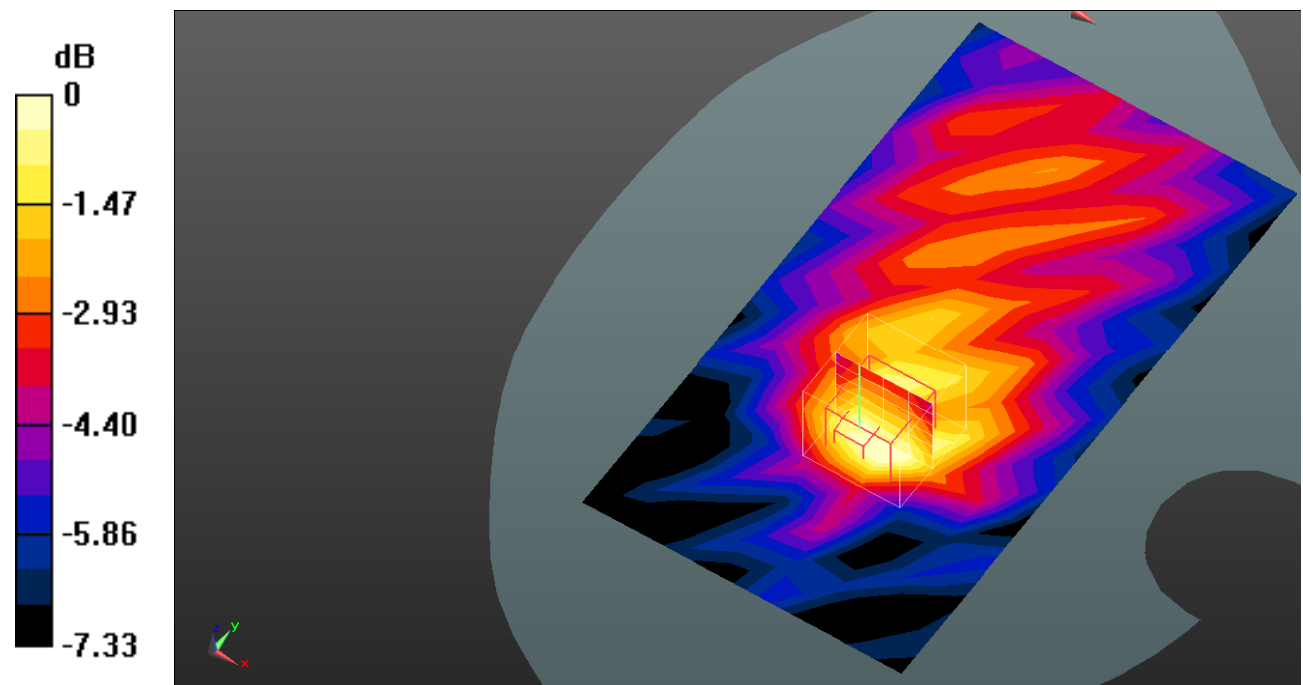

0 dB = 0.0285 W/kg = -15.45 dB dBW/kg

Test Plot140#: LTE Band 26_Body Left_1RB_Middle**DUT: Smart phone; Type: Air1 Ultra Pro; Serial: 24XJ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.347$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3701; ConvF(9.71, 9.71, 9.71) @831.5 MHz; Calibrated: 2023/03/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1325; Calibrated: 2022/08/29
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0102 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.717 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.00812 W/kg

SAR(1 g) = 0.00771 W/kg; SAR(10 g) = 0.00665 W/kg

Maximum value of SAR (measured) = 0.00808 W/kg

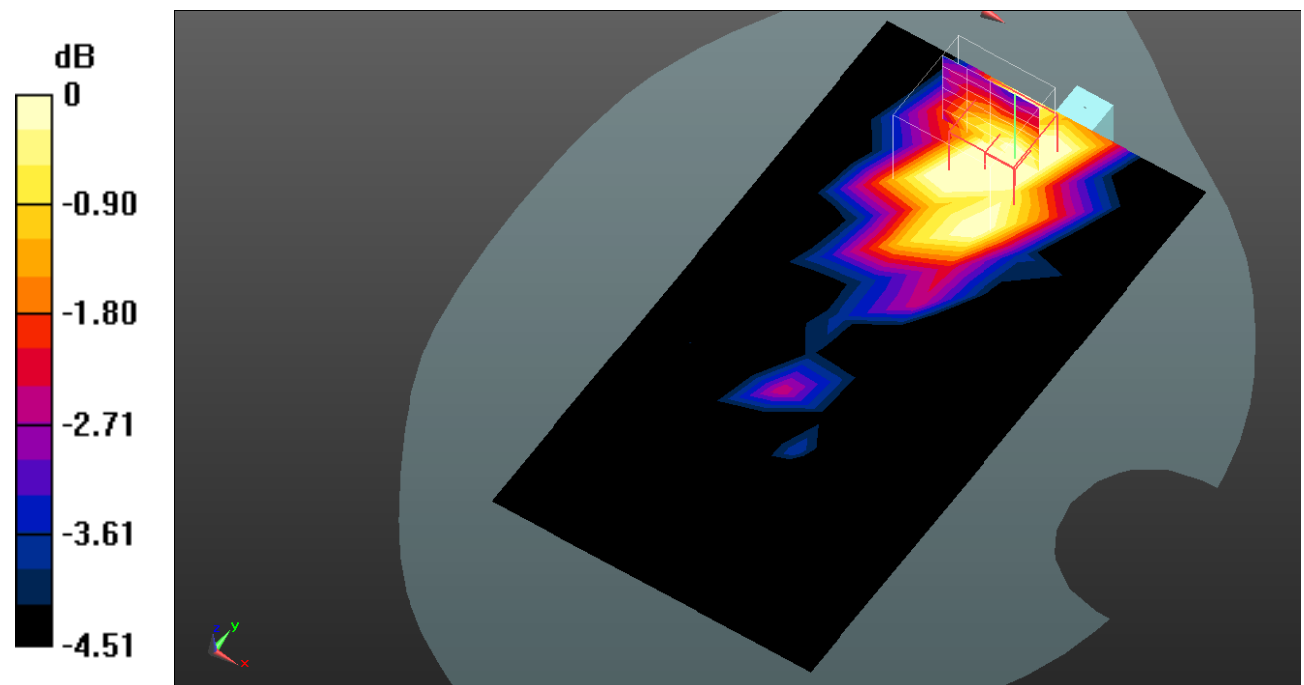

0 dB = 0.00808 W/kg = -20.93 dB dBW/kg