

SPECIFICATION FOR APPROVED

CUSTOMER: Shenzhen Yipinqi Technology Co. LTD

PRODUCTS: Built-in FPC antenna

PART NO: ETWS100-FPC antenna

Spec. : ETWS100-A1

Data: 2022. 7. 30

SUPPLIER		
PREPARED BY	CHECKED BY	APPROVED BY

CUSTOMER		
ACCEPTED BY	CHECKED BY	APPROVED BY

Catalogue

Product acknowledgement.....	1
1. Project Information.....	3
1.1. Appearance and Dimensions.....	3
2. Electrical Characteristics.....	4
2.1. Test Environment Conditions.....	4
2.2. Measurement method.....	4
2.2.1. VSWR.....	4
2.2.2. Log Mag.....	4
2.3. Efficiency and Gain.....	5
2.3.1. Test system.....	5
2.3.2. No-source test data.....	5
2.3.3. 3D Radiation Drawing.....	6
2.3.4. directional drawing of horizontal plane.....	6

ANTENNASPECIFICATION


Revision history

versions	Date	State
A1	2022-07-30	First edition

ANTENNASPECIFICATION

1. Project Information

1.1. Appearance and Dimensions

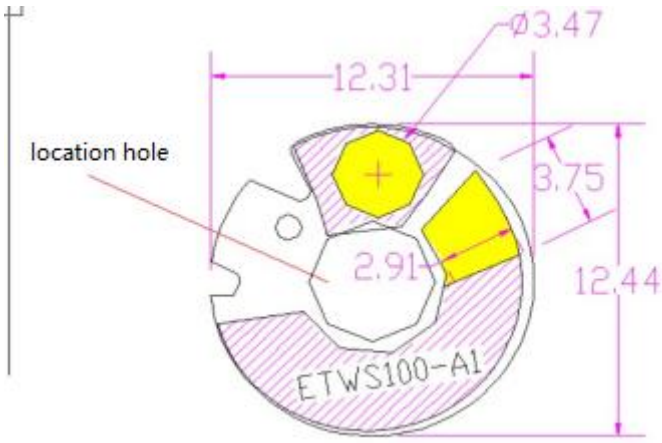Test point	Specification	Test result
Boundary dimension	12.31mm*12.44mm	OK
Goldfinger	3.47mm, 3.75*2.91mm	OK
Blueprint	 The blueprint shows a circular antenna component with a central octagonal pad. Dimensions are indicated in millimeters: the overall width is 12.31mm, the overall height is 12.44mm, and the central pad has a diameter of 3.47mm. A yellow rectangular area on the right side has dimensions of 3.75mm by 2.91mm. A 'location hole' is marked on the left side. The component is labeled 'ETWS100-A1'.	

Inspection items		Inspection result
(S.W.P)	25um +12.5um +12.5umPI	OK
Texture	Half and half (electrolytic copper)	OK
Texture	Gummed paper (3M300LSE)	OK
Electroplating	Gold plating	OK
Exterior	Surface matte black, silk screen white characters	OK



ANTENNA SPECIFICATION

2. Electrical Characteristics

2.1. Test Environment Conditions

Temperature	Ordinary Temperature (5 to 35℃)
Humidity	Ordinary Humidity (25 to 85% RH)


2.2. Measurement method

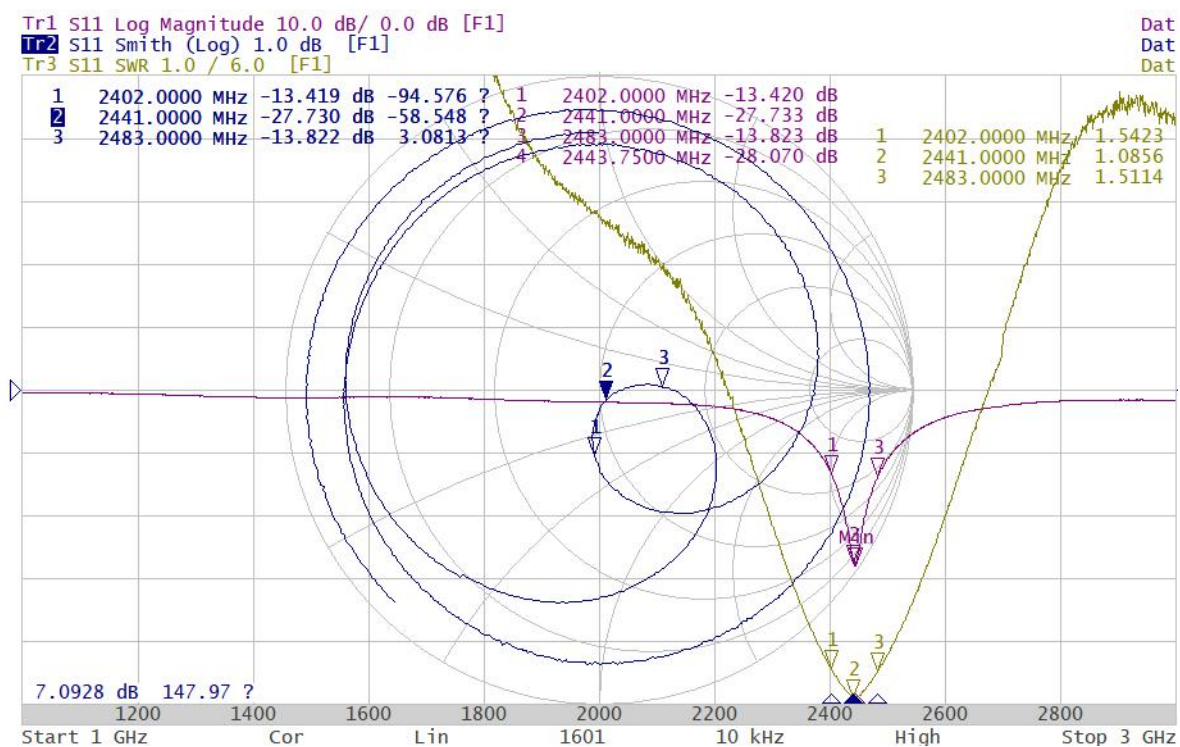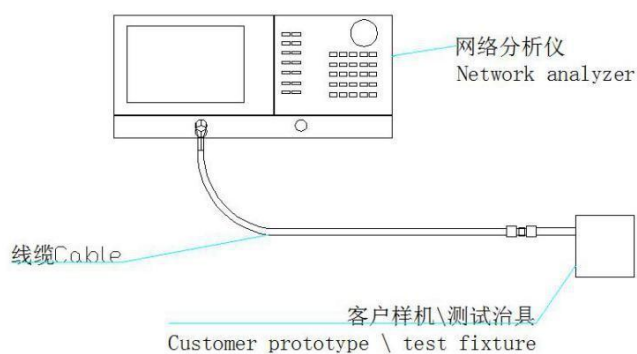

ANTENNA SPECIFICATION

2.3. Efficiency and Gain

2.3.1. Test system

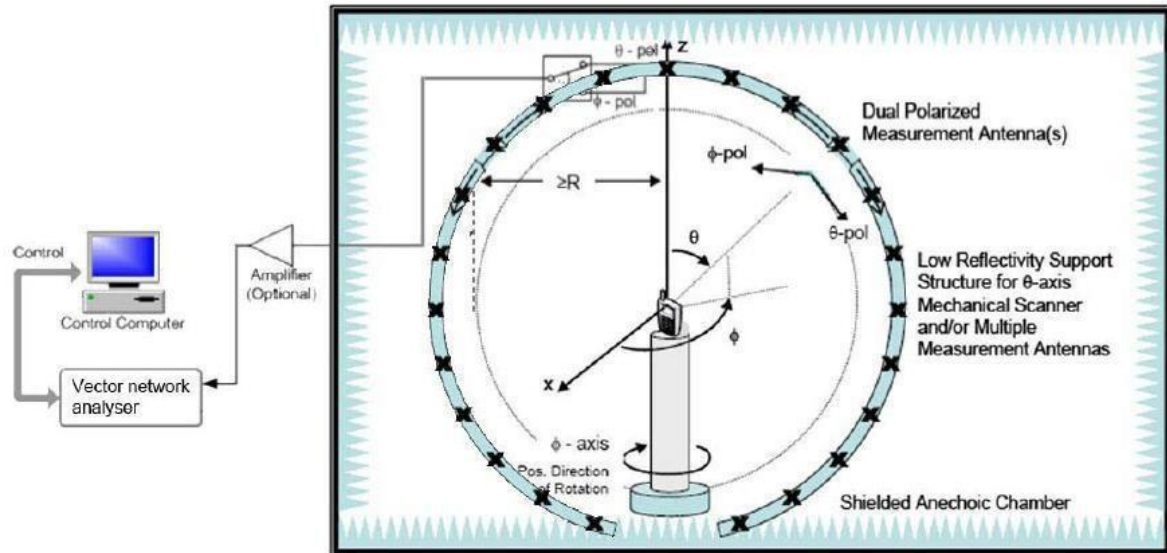


2.3.2. No-source test data

frequency	gain	efficiency
频率(MHz)	增益(dB)	效率
2400	1.18	40.52%
2410	1.15	37.87%
2420	1.66	40.81%
2430	1.69	39.48%
2440	1.83	38.87%
2450	2.12	39.64%
2460	2.12	38.40%
2470	2.29	38.87%
2480	2.6	40.46%
2490	2.23	35.96%
2500	2.59	37.91%


ANTENNA SPECIFICATION

2.3.3. 3D Radiation Drawing

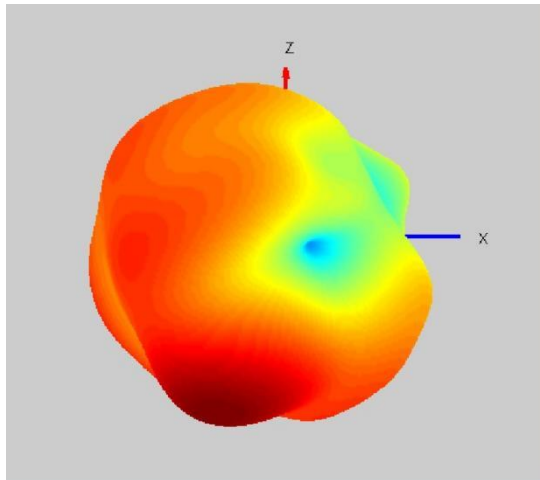


2.3.4. directional drawing of horizontal plane

H Theta=90 freq=2400MHz

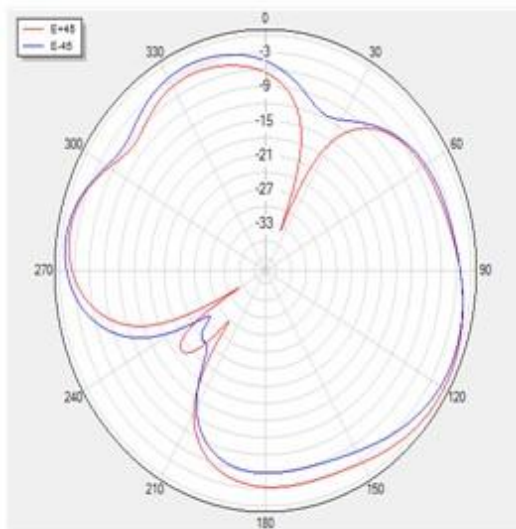


H Theta=0 freq=2400MHz

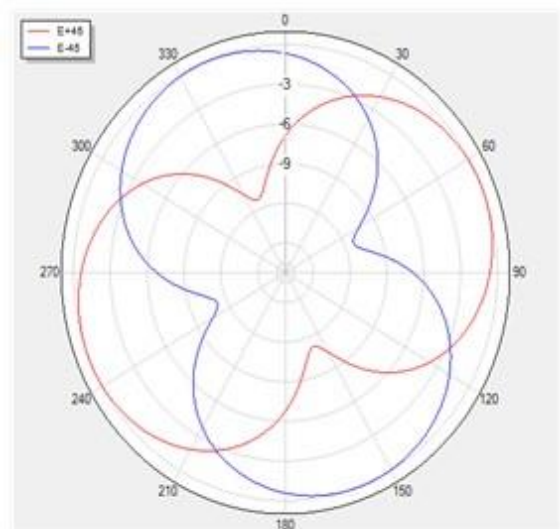


ANTENNA SPECIFICATION


H Theta=90 freq=2450MHz

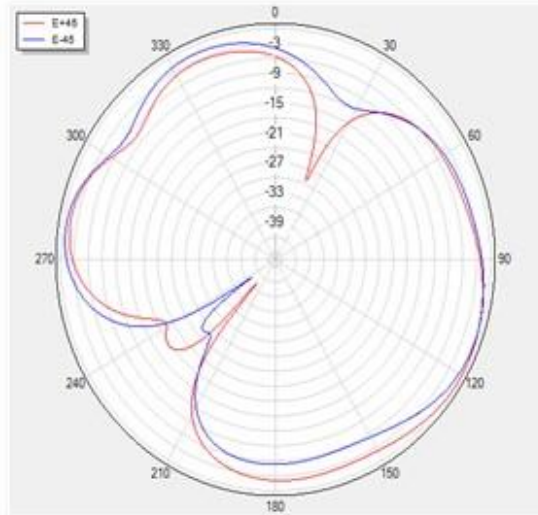

H Theta=0 freq=2450MHz

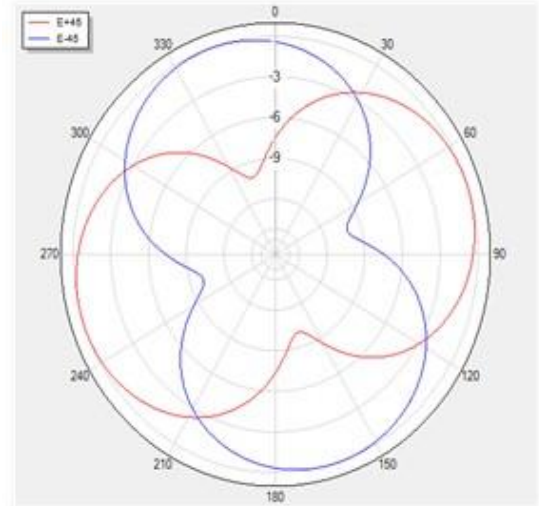

H Theta=90 freq=2480MHz

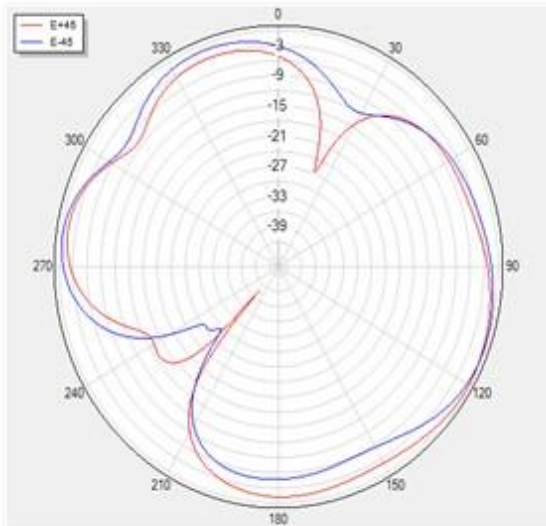

H Theta=0 freq=2480MHz

