Report No.: HTT202301038F01

TEST Report

Applicant:	Galton Voysey Limited
Address of Applicant:	Unit A, 17/F, Grandion Plaza, 932 Cheung Sha Wan Road,Lai Chi Kok,Hong Kong
Manufacturer :	Dongguan Aiue Electronics Technology co.,LTD
Address of Manufacturer :	Room 103,NO.42,Yanhedong Street, Ailingkan,Dalingshan Town,Dongguan, Guangdong,China
Equipment Under Test (EUT)	
Product Name:	Schultz S-900X 2.1ch Bluetooth Home Theatre Soundbar System and Wireless Subwoofer
Model No.:	S-900X
Series model:	ASW120-2.1U, ASW150-2.1U, ASW100-2.1U, ASW280-2.1U, ASW260-2.1, ASW270-2.1
Trade Mark:	SCHULTZ
FCC ID:	2A94YAY120B
Applicable standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of sample receipt:	Dec. 26,2022
Date of Test:	Dec. 26,2022- Feb. 08,2023
Date of report issued:	Feb. 08,2023
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

1. Version

Version No.	Date	Description
00	*Feb. 08,2023*	*Original*

Tested/ Prepared By	Ervin Xu	***Date:***	***Feb. 08,2023***
	Project Engineer		
Check By:	Bruce Zhu	***Date:***	***Feb. 08,2023***
	Reviewer		
Approved By :	Kevin Yang	***Date:***	***Feb. 08,2023***
	Authorized Signature		

2. Contents

Page

1. VERSION 2

2. CONTENTS 3

3. TEST SUMMARY 4

4. GENERAL INFORMATION 5

4.1. GENERAL DESCRIPTION OF EUT 5
4.2. TEST MODE 7
4.3. DESCRIPTION OF SUPPORT UNITS 7
4.4. DEVIATION FROM STANDARDS 7
4.5. ABNORMALITIES FROM STANDARD CONDITIONS 7
4.6. TEST FACILITY 7
4.7. TEST LOCATION 7
4.8. ADDITIONAL INSTRUCTIONS 7
4.9. DESCRIPTION OF TEST MODES 8

5. TEST INSTRUMENTS LIST 9

6. TEST RESULTS AND MEASUREMENT DATA 10

6.1. CONDUCTED EMISSIONS 10
6.2. CONDUCTED PEAK OUTPUT POWER 13
6.3. 20DB EMISSION BANDWIDTH 17
6.4. FREQUENCIES SEPARATION 20
6.5. HOPPING CHANNEL NUMBER 23
6.6. DWELL TIME 26
6.7. BAND EDGE 30
6.7.1. Conducted Emission Method 30
6.7.2. Radiated Emission Method 34
6.8. SPURIOUS EMISSION 38
6.8.1. Conducted Emission Method 38
6.8.2. Radiated Emission Method 41

7. TEST SETUP PHOTO 49

8. EUT CONSTRUCTIONAL DETAILS 49

3. Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)(iii)	Pass
Dwell Time	15.247 (a)(1)(iii)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remarks:

1. *Pass: The EUT complies with the essential requirements in the standard.*
2. *Test according to ANSI C63.10:2013*

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9k~30MHz	3.17 dB	(1)
Radiated Emission	30~1000MHz	3.45 dB	(1)
Radiated Emission	1~6GHz	3.54 dB	(1)
Radiated Emission	>6GHz	4.89dB	(1)
Conducted Disturbance	0.15~30MHz	2.66 dB	(1)
RF power, conducted	/	0.16 dB	(1)
Spurious emissions, conducted	/	0.21dB	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

4. General Information

4.1. General Description of EUT

Product Name:	Schultz S-900X 2.1ch Bluetooth Home Theatre Soundbar System and Wireless Subwoofer
Model No.:	S-900X
Series model:	ASW120-2.1U, ASW150-2.1U, ASW100-2.1U, ASW280-2.1U, ASW260-2.1, ASW270-2.1
Model Difference	All the model are the same circuit and RF module, Only the model name and color are different.
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, π/4-DQPSK, 8QPSK
Antenna Type:	PCB Antenna
Antenna gain:	2.74dBi
Power Supply:	DC 15V From adapter
Adapter	Model:MYX-1502000U Input:100-240V~ 50/60Hz 1.5A Max Output: DC15V 2000mA

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

4.2. Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

4.3. Description of Support Units

None.

4.4. Deviation from Standards

None.

4.5. Abnormalities from Standard Conditions

None.

4.6. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 779513 Designation Number: CN1319
Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6435.01
Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

4.7. Test Location

All tests were performed at:

Shenzhen HTT Technology Co.,Ltd.
1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road,Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China
Tel: 0755-23595200
Fax: 0755-23595201

4.8. Additional Instructions

Test Software	Special AT test command provided by manufacturer to Keep the EUT in continuously transmitting mode and hopping mode
Power level setup	Default

4.9. DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	1Mbps
Mode 2	2Mbps
Mode 3	3Mbps

For Conducted Emission	
Final Test Mode	Description
Mode 3	1Mbps

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00 /CH39 /CH78
Mode 3	CH00 /CH39 /CH78

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

(2) For all tests the worst-case was selected as the table above, the data of the worst-case is shown in the report.

5. Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2020	Aug. 09 2024
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2020	Aug. 09 2024
3	EMI Test Receiver	Rohde&Schwar	ESCI7	HTT-E022	May 21 2022	May 20 2023
4	Spectrum Analyzer	Rohde&Schwar	FSP	HTT-E037	May 21 2022	May 20 2023
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	May 21 2022	May 20 2023
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	May 21 2022	May 20 2023
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	May 21 2022	May 20 2023
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	May 21 2022	May 20 2023
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	Aug. 22 2022	Aug. 21 2023
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	Aug. 22 2022	Aug. 21 2023
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	Aug. 22 2022	Aug. 21 2023
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	Aug. 22 2022	Aug. 21 2023
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	May 21 2022	May 20 2023
14	high-frequency Amplifier	HP	8449B	HTT-E014	May 21 2022	May 20 2023
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	May 21 2022	May 20 2023
16	EMI Test Receiver	Rohde & Schwarz	ESCS30	HTT-E004	May 21 2022	May 20 2023
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	May 21 2022	May 20 2023
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	May 21 2022	May 20 2023
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	May 21 2022	May 20 2023
20	Attenuator	Robinson	6810.17A	HTT-E007	May 21 2022	May 20 2023
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650（5KVA）	HTT-E032	May 21 2022	May 20 2023
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	May 21 2022	May 20 2023
23	DC power supply	Agilent	E3632A	HTT-E023	May 21 2022	May 20 2023
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	May 21 2022	May 20 2023
25	Analog signal generator	Agilent	N5181A	HTT-E025	May 21 2022	May 20 2023
26	Vector signal generator	Agilent	N5182A	HTT-E026	May 21 2022	May 20 2023
27	Power sensor	Keysight	U2021XA	HTT-E027	May 21 2022	May 20 2023
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	May 21 2022	May 20 2023

6. Test results and Measurement Data

6.1. Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Class / Severity:	Class B
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto
Limit:	

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test setup:

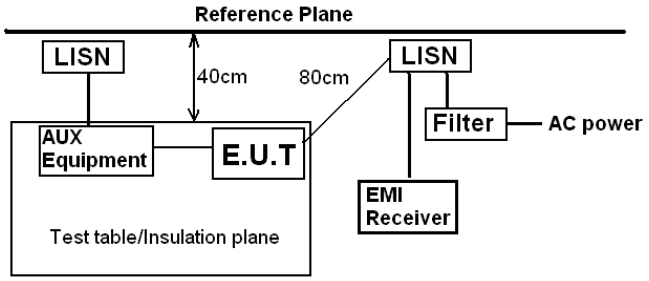

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m

Test procedure:

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:

Line:

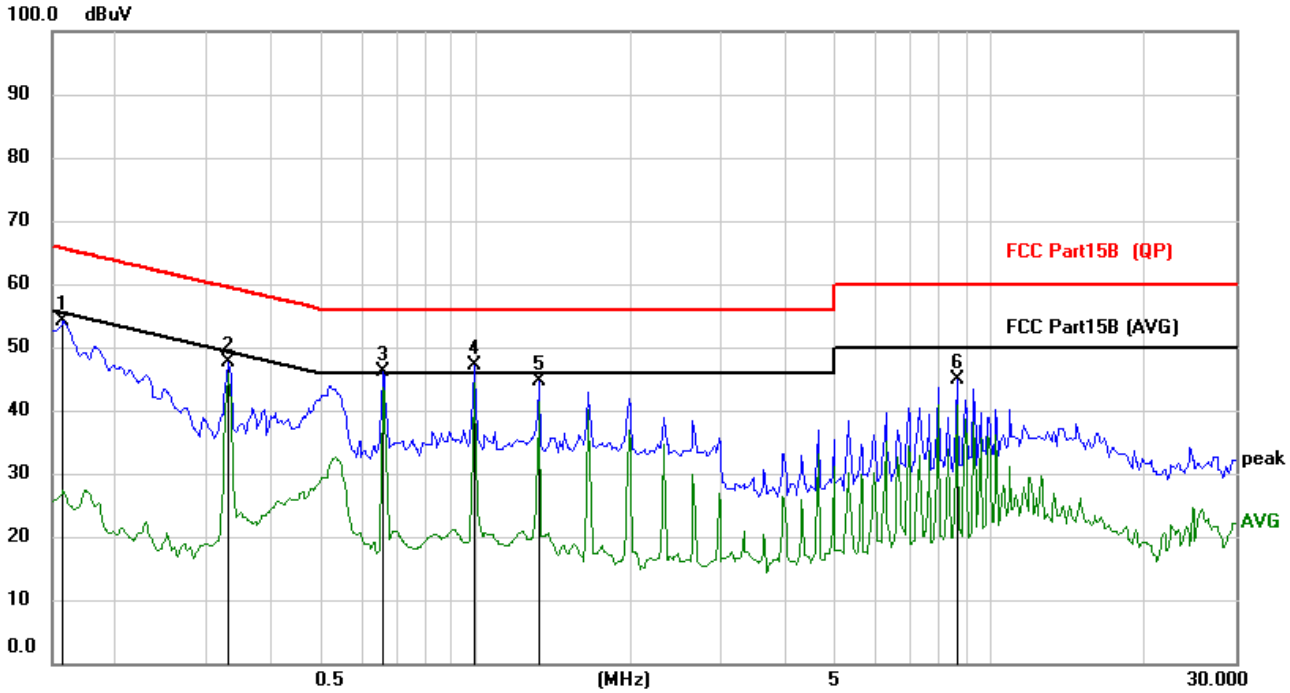

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1577	43.77	10.38	54.15	65.58	-11.43	peak
2		0.3294	37.14	10.42	47.56	59.47	-11.91	peak
3		0.6609	35.39	10.69	46.08	56.00	-9.92	peak
4	*	0.9921	36.31	10.90	47.21	56.00	-8.79	peak
5		1.3239	33.81	10.88	44.69	56.00	-11.31	peak
6		8.6004	33.35	11.47	44.82	60.00	-15.18	peak

Neutral:

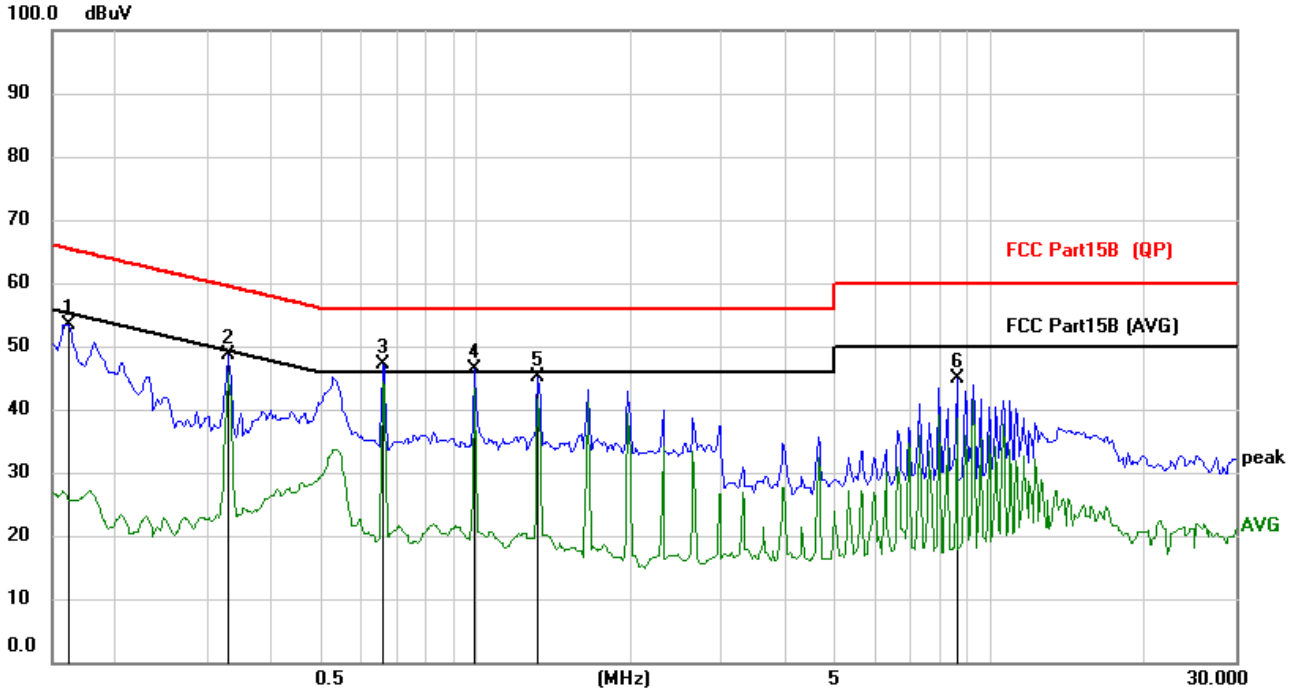

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1617	43.10	10.26	53.36	65.38	-12.02	peak
2		0.3294	38.43	10.26	48.69	59.47	-10.78	peak
3	*	0.6609	36.64	10.59	47.23	56.00	-8.77	peak
4		0.9924	35.62	10.80	46.42	56.00	-9.58	peak
5		1.3200	34.25	10.81	45.06	56.00	-10.94	peak
6		8.5926	33.57	11.24	44.81	60.00	-15.19	peak

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

6.2. Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)					
Test Method:	ANSI C63.10:2013					
Limit:	30dBm(for GFSK),20.97dBm(for EDR)					
Test setup:	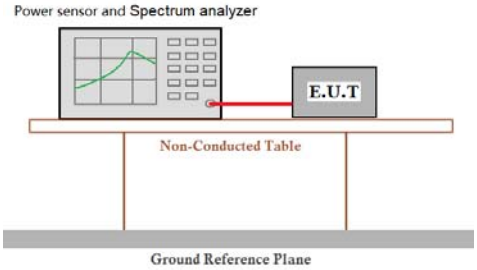					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	5.178	30.00	Pass
	Middle	5.741		
	Highest	5.618		
π/4-DQPSK	Lowest	5.580	20.97	Pass
	Middle	6.036		
	Highest	5.962		
8QPSK	Lowest	5.644	20.97	Pass
	Middle	6.091		
	Highest	5.942		

Test plot as follows:

Test mode:	GFSK mode

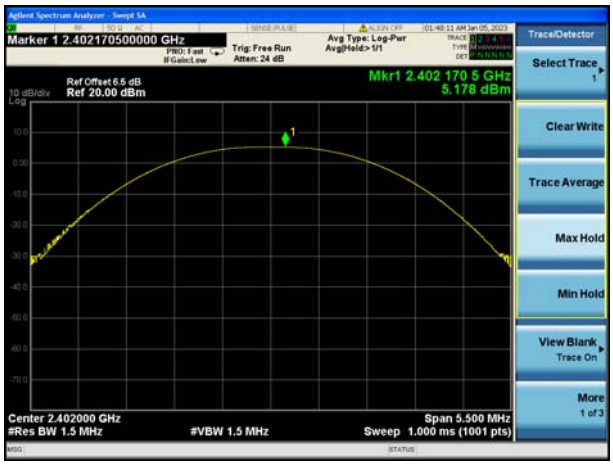

Lowest channel

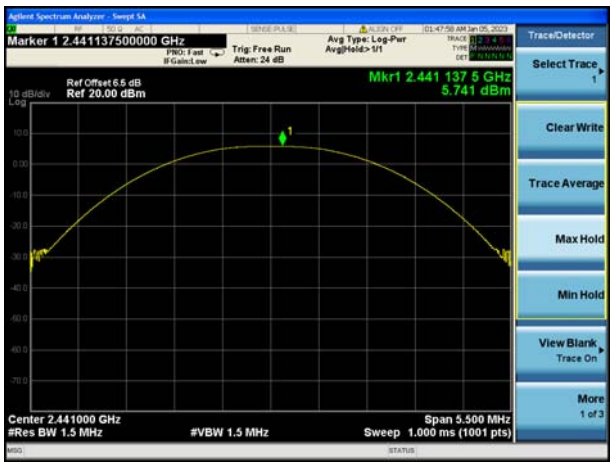

Middle channel

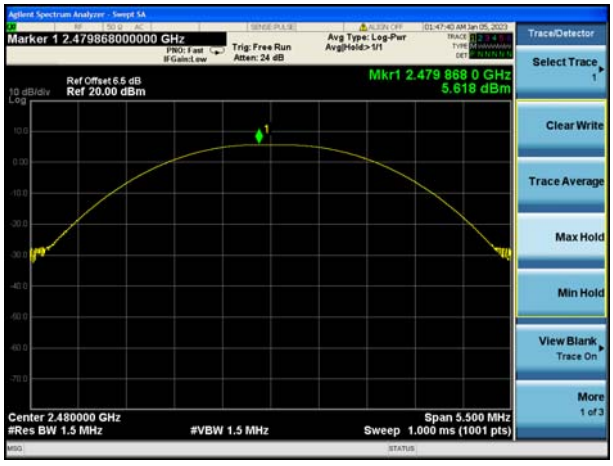

Highest channel

Test mode:	π/4-DQPSK mode

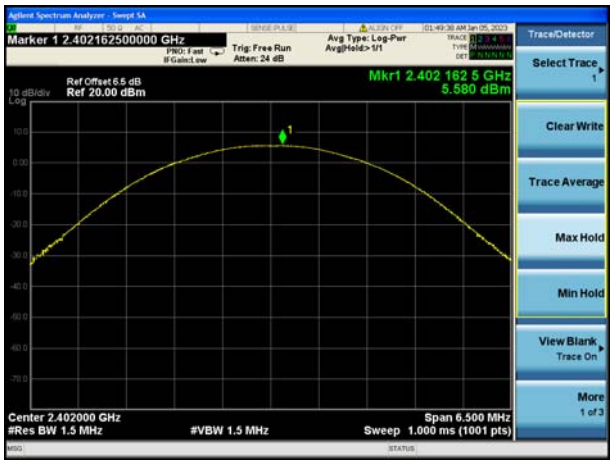

Lowest channel

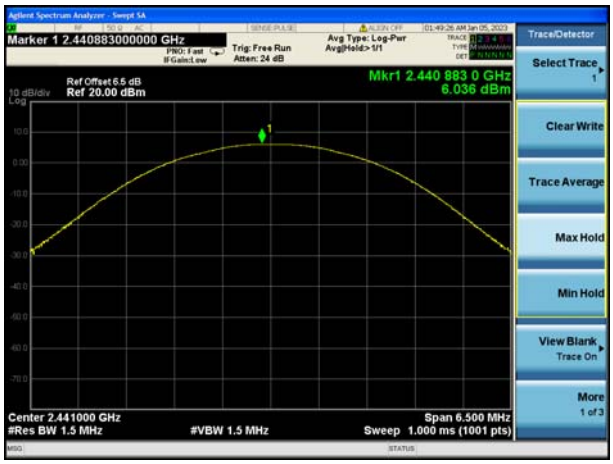

Middle channel

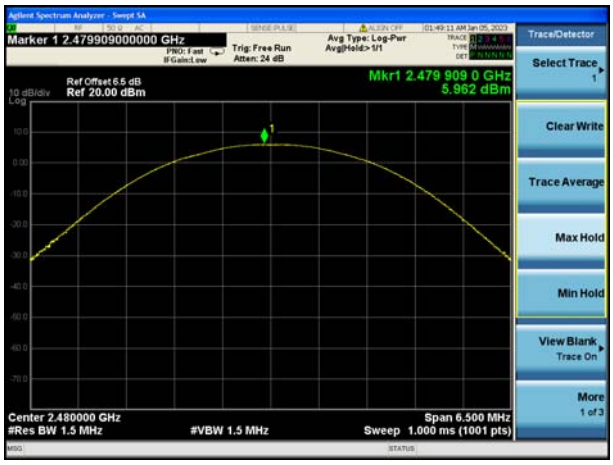

Highest channel

Test mode:	8QPSK mode

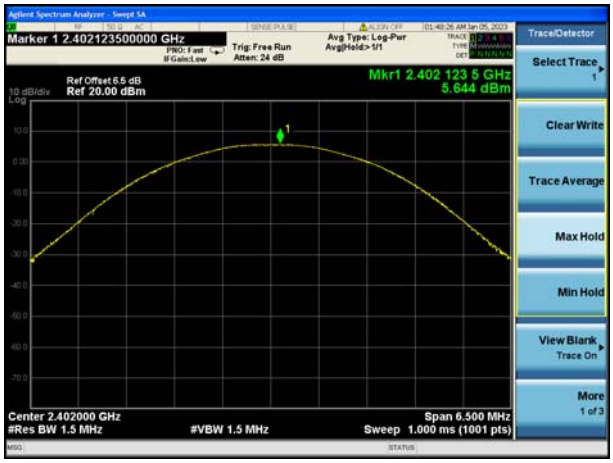

Lowest channel

Middle channel

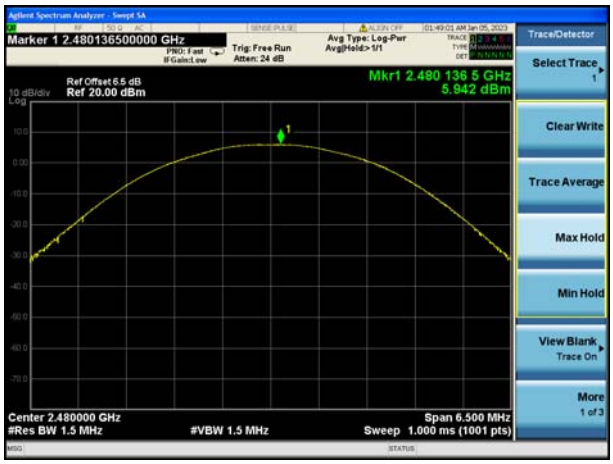

Highest channel

6.3. 20dB Emission Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)					
Test Method:	ANSI C63.10:2013					
Limit:	N/A					
Test setup:	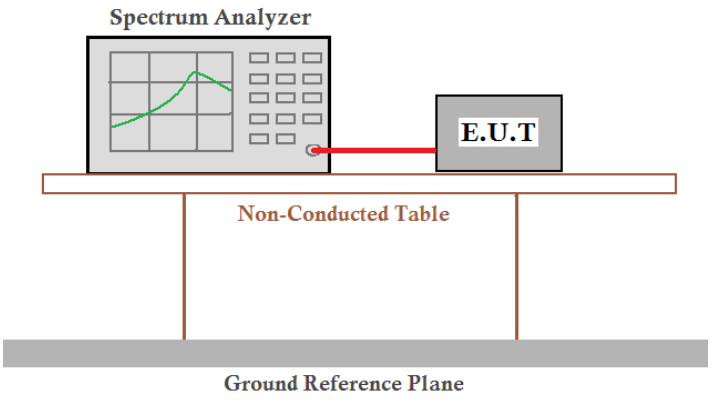					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.876	Pass
	Middle	0.877	
	Highest	0.879	
8QPSK	Lowest	1.242	Pass
	Middle	1.252	
	Highest	1.258	

Test plot as follows:

Test mode:	GFSK mode

Lowest channel

Middle channel

Highest channel

Test mode:	8QPSK mode

Lowest channel

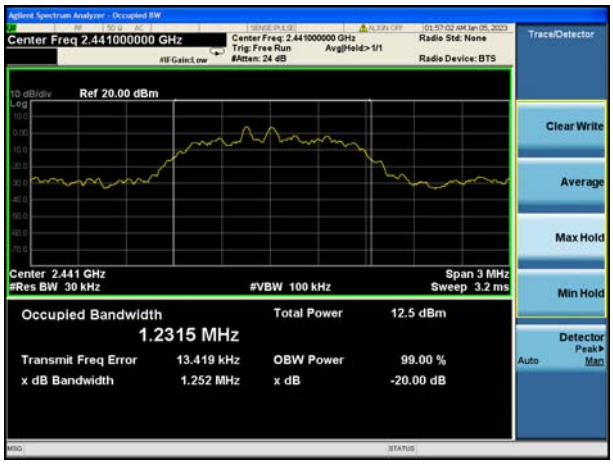

Middle channel

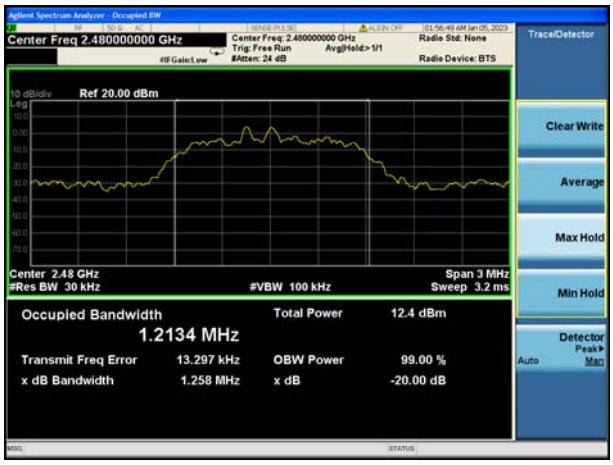

Highest channel

6.4. Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=300KHz, VBW=1MHz, detector=Peak					
Limit:	GFSK: 20dB bandwidth π/4-DQPSK/8QPSK : 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)					
Test setup:	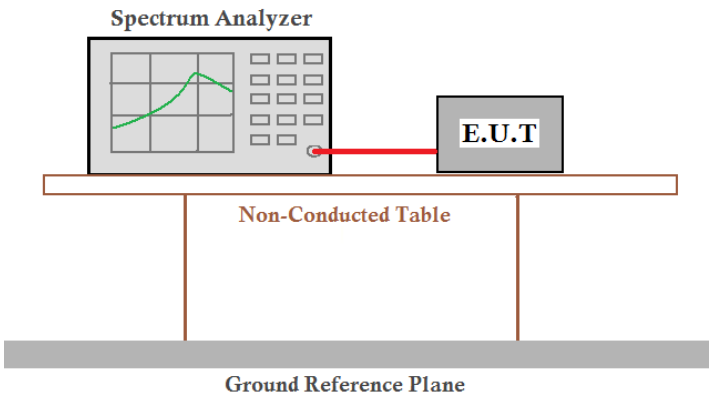					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Mode	Test channel	Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	Low	1.002	20dB bandwidth	Pass
	Middle	1.002		
	High	1.002		
8QPSK	Low	1.002	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1.002		
	High	1.002		

Test plot as follows:

Test mode:	GFSK mode

Lowest channel

Middle channel

Highest channel

Test mode:	8QPSK mode

Lowest channel

Middle channel

Highest channel

6.5. Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=300kHz, VBW=1MHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak					
Limit:	15 channels					
Test setup:	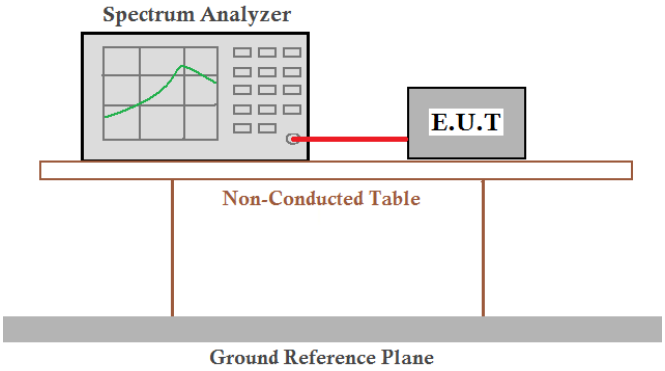					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	≥15	Pass
8QPSK	79		Pass

Test plot as follows:

Test mode:	GFSK

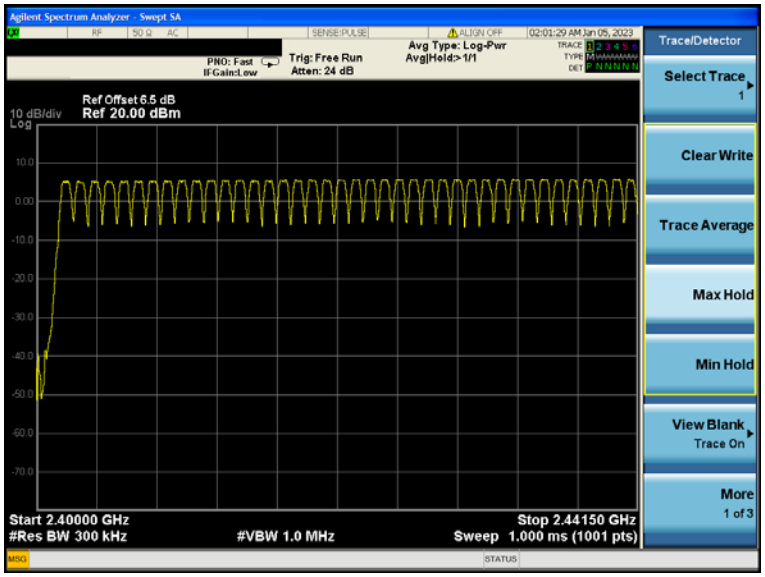

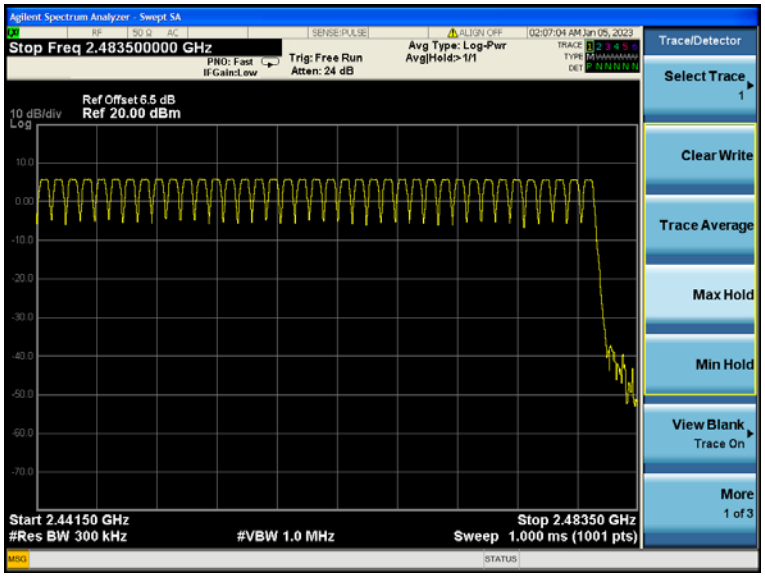

Test mode:	8QPSK

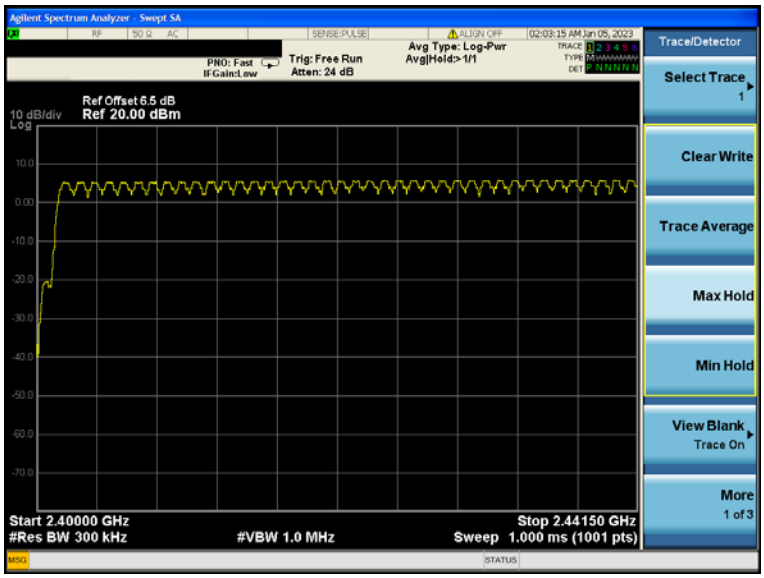

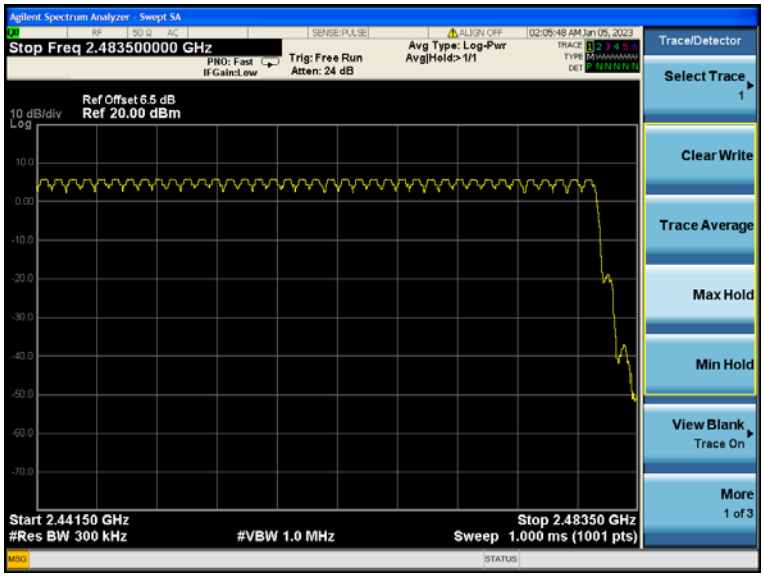

6.6. Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak					
Limit:	0.4 Second					
Test setup:	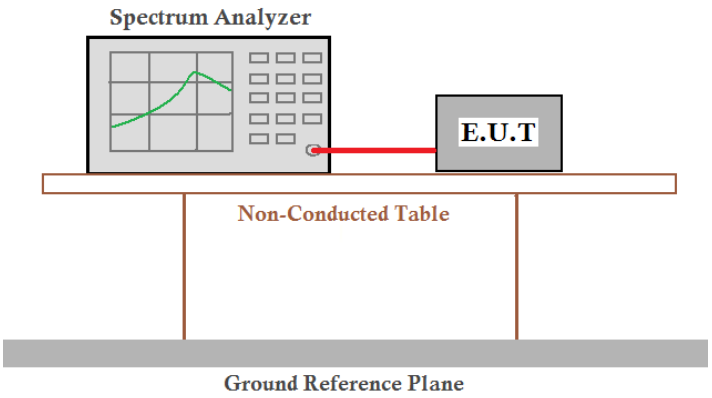					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

GFSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.382	122	400	Pass
Hopping	DH3	1.638	262	400	Pass
Hopping	DH5	2.888	308	400	Pass

Note:We have tested all mode at high,middle and low channel,and recoreded worst case at Low channel.

Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1

Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3

Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5

8QPSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	3DH1	0.391	125	400	Pass
Hopping	3DH3	1.642	263	400	Pass
Hopping	3DH5	2.888	308	400	Pass

Note:We have tested all mode at high,middle and low channel,and recoreded worst case at Low channel.

Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for 3-DH1

Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for 3-DH3

Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for 3-DH5

Test plot as follows:

GFSK mode

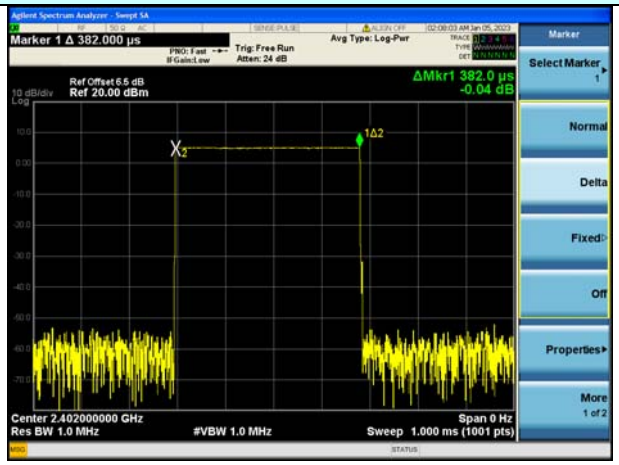

DH1

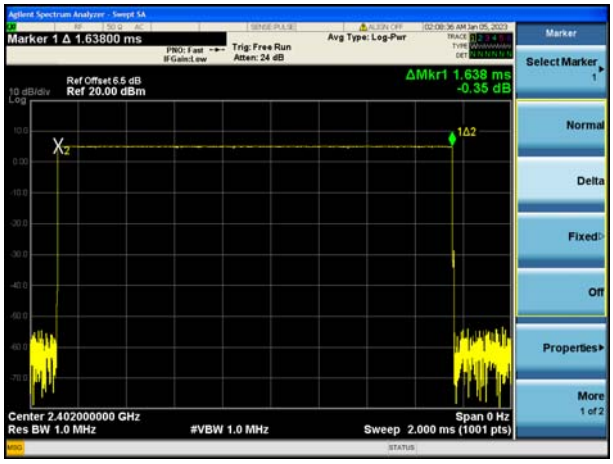

DH3

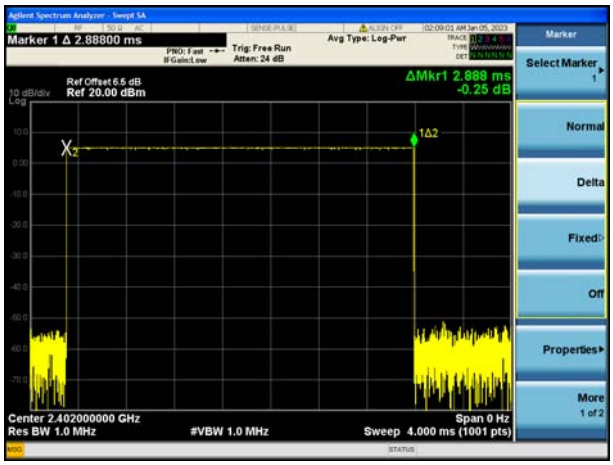

DH5

8QPSK mode

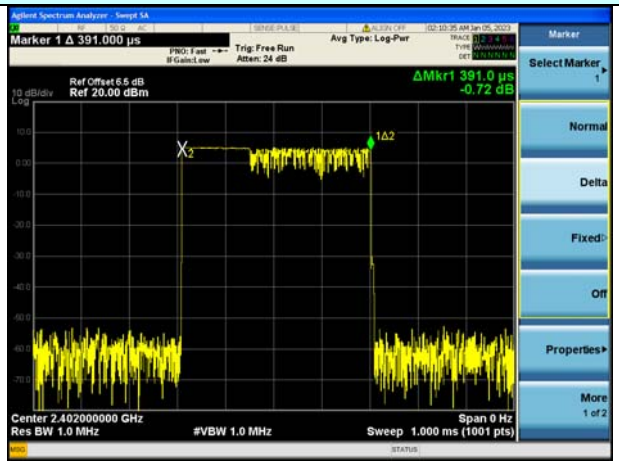

3DH1

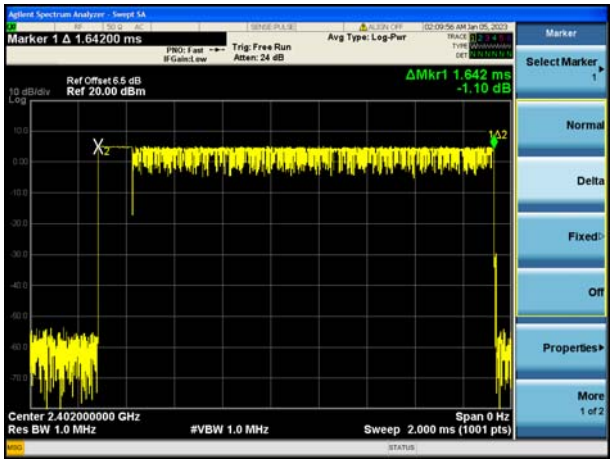

3DH3

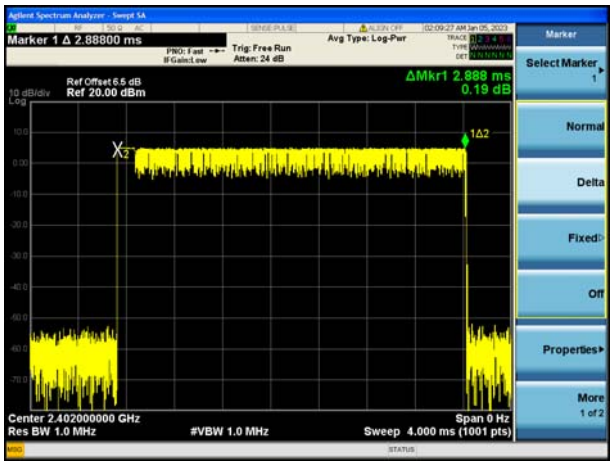

3DH5

6.7. Band Edge

6.7.1. Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	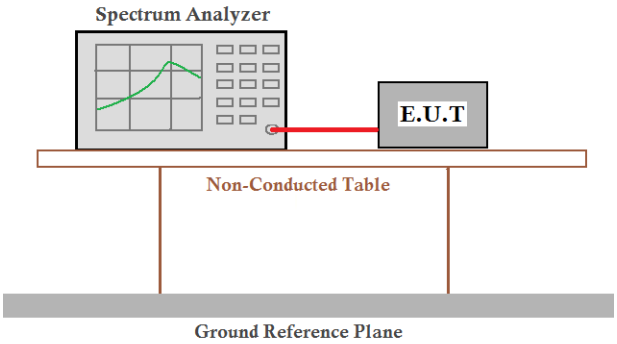					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Frequency Band	Delta Peak to band emission (dBc)	＞Limit (dBc)	Result
GFSK Non-hopping			
2400	52.04	20	Pass
2483.5	60.59	20	Pass

Frequency Band	Delta Peak to band emission (dBc)	＞Limit (dBc)	Result
GFSK hopping			
2400	55.49	20	Pass
2483.5	59.42	20	Pass

Frequency Band	Delta Peak to band emission (dBc)	＞Limit (dBc)	Result
8DPSK Non-hopping			
2400	50.42	20	Pass
2483.5	62.52	20	Pass

Frequency Band	Delta Peak to band emission (dBc)	＞Limit (dBc)	Result
8DPSK hopping			
2400	50.45	20	Pass
2483.5	62.58	20	Pass

Test plot as follows:

GFSK Mode:

Lowest channel	Highest channel
No-hopping mode	No-hopping mode

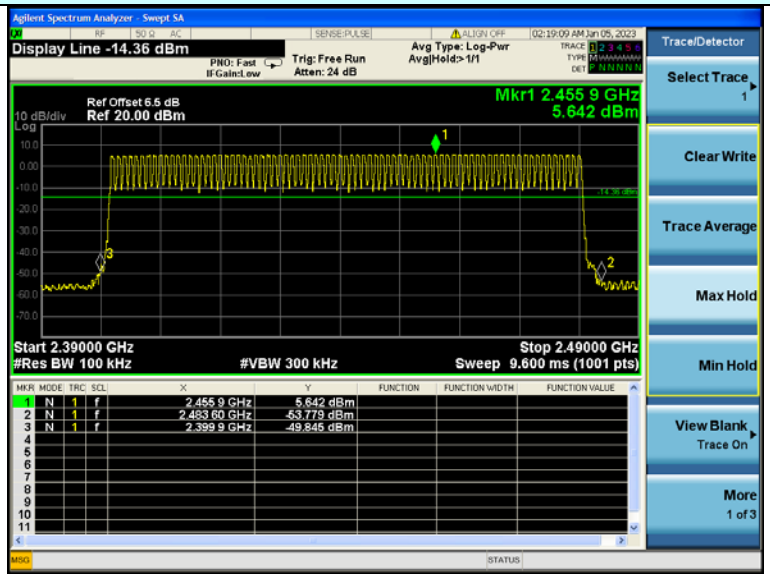

Hopping mode

8QPSK Mode:

Lowest channel	Highest channel
No-hopping mode	No-hopping mode

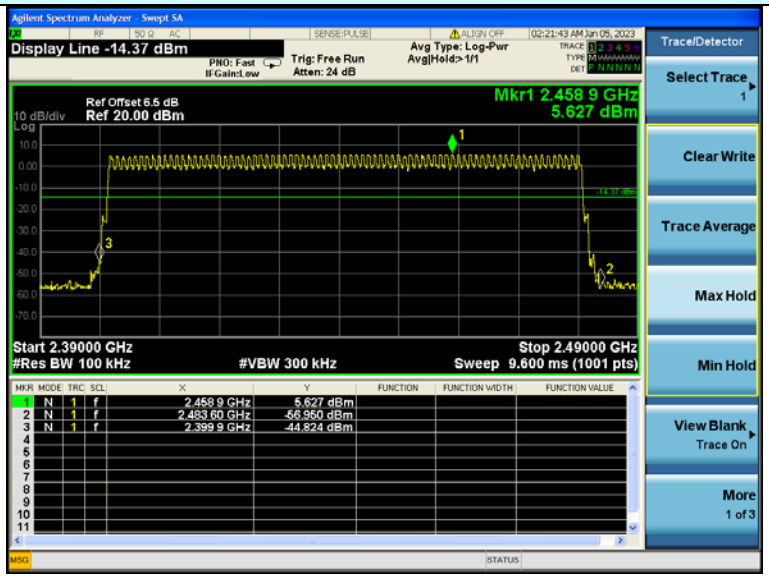

Hopping mode

6.7.2. Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205
Test Method:	ANSI C63.10:2013
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.
Test site:	Measurement Distance: 3m

Receiver setup:

Frequency	Detector	RBW	VBW	Remark
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	Peak	1MHz	10Hz	Average Value

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
Above 1GHz	54.00	Average Value
	74.00	Peak Value

Test setup:

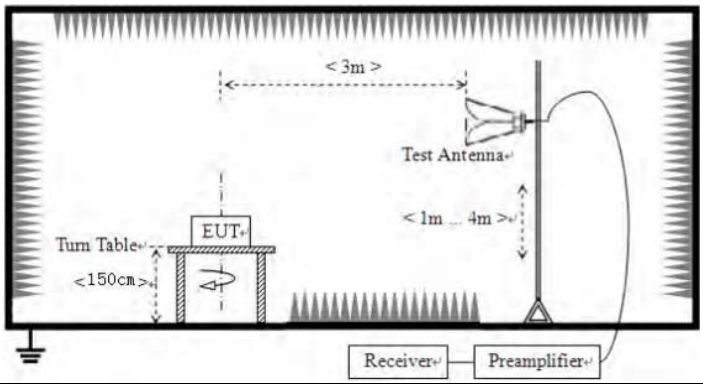

Test Procedure:

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Remark: GFSK, Pi/4 DQPSK, 8QPSK all have been tested, only worse case GFSK is reported.

Operation Mode: GFSK TX Low channel & High channel.

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant/CF CF(dB)	Act		Limit		Note
		Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)	
2390.00	H	41.32	--	-5.79	35.53	--	74.00	54.00	CH00
2390.00	V	42.05	--	-5.79	36.26	--	74.00	54.00	CH00
2483.50	H	41.97	--	-4.98	36.99	--	74.00	54.00	CH78
2483.50	V	40.92	--	-4.98	35.94	--	74.00	54.00	CH78

Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Horizontal

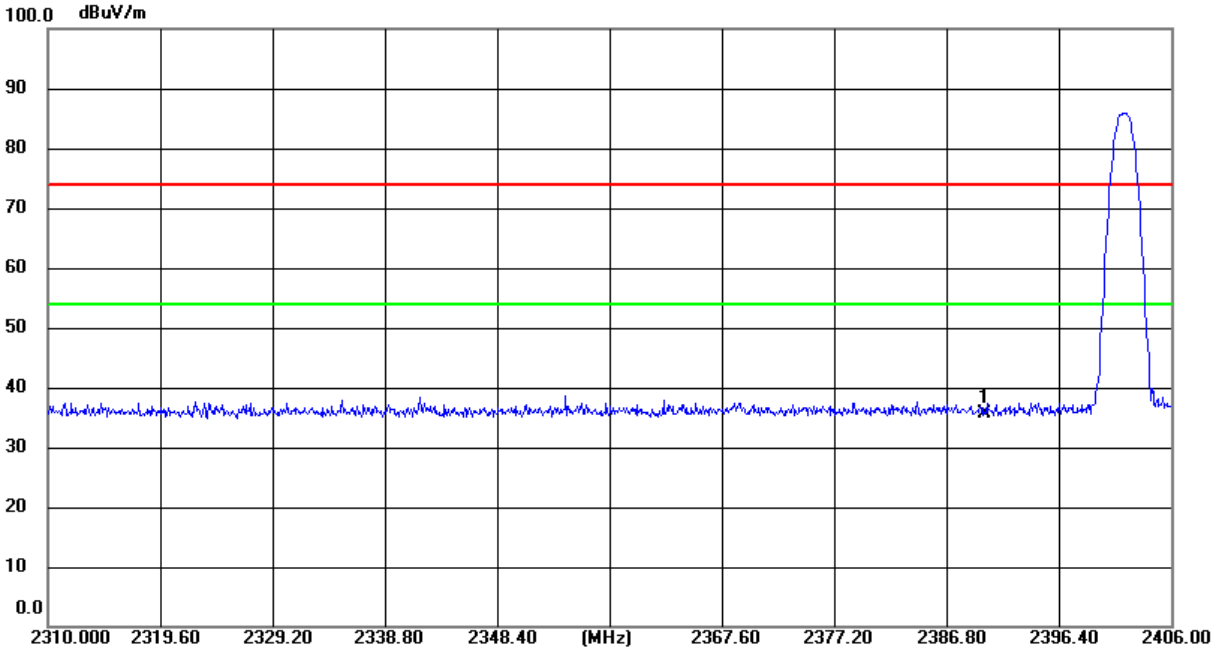

Vertical

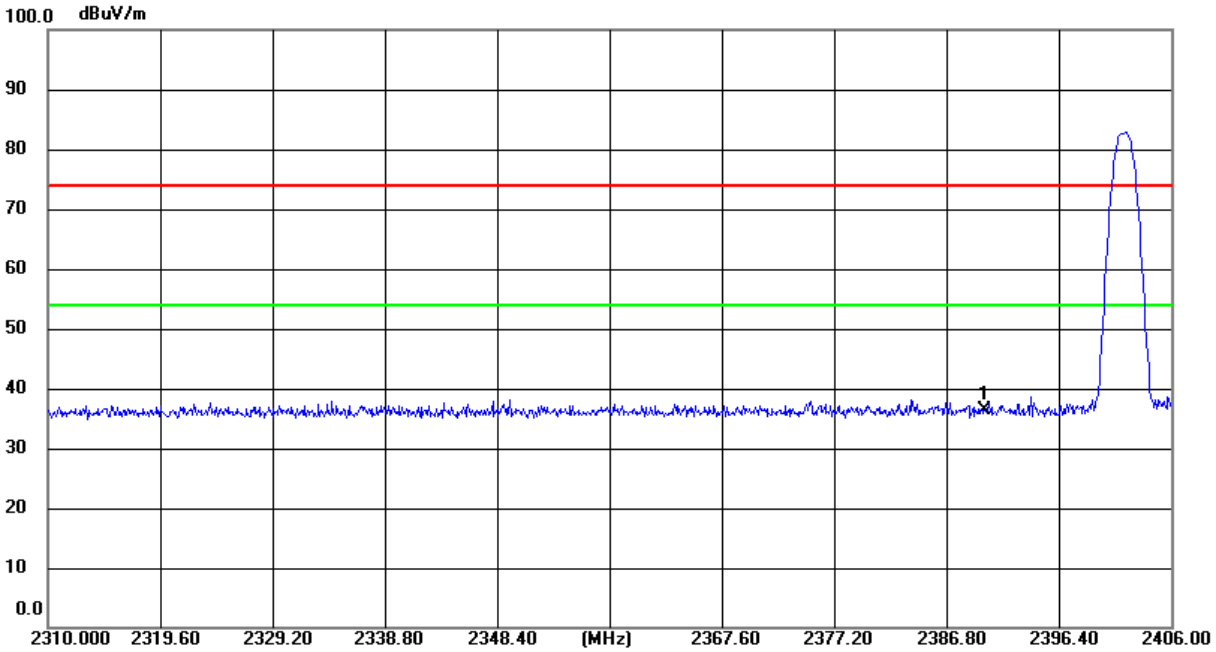

Horizontal

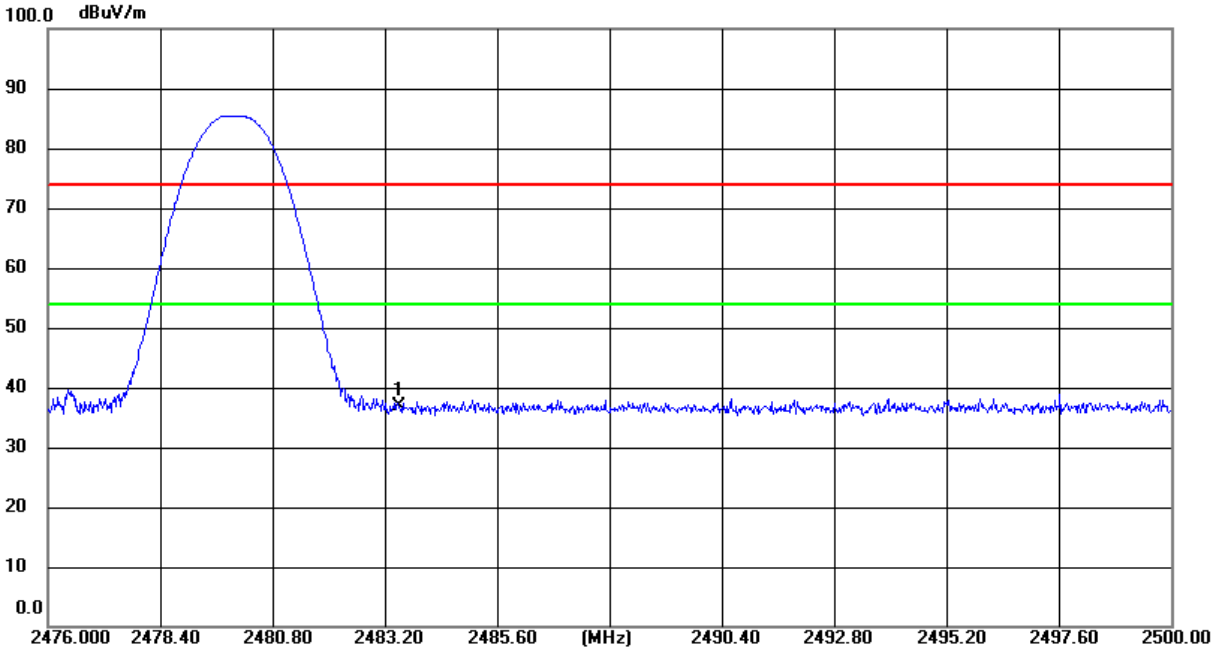

Vertical

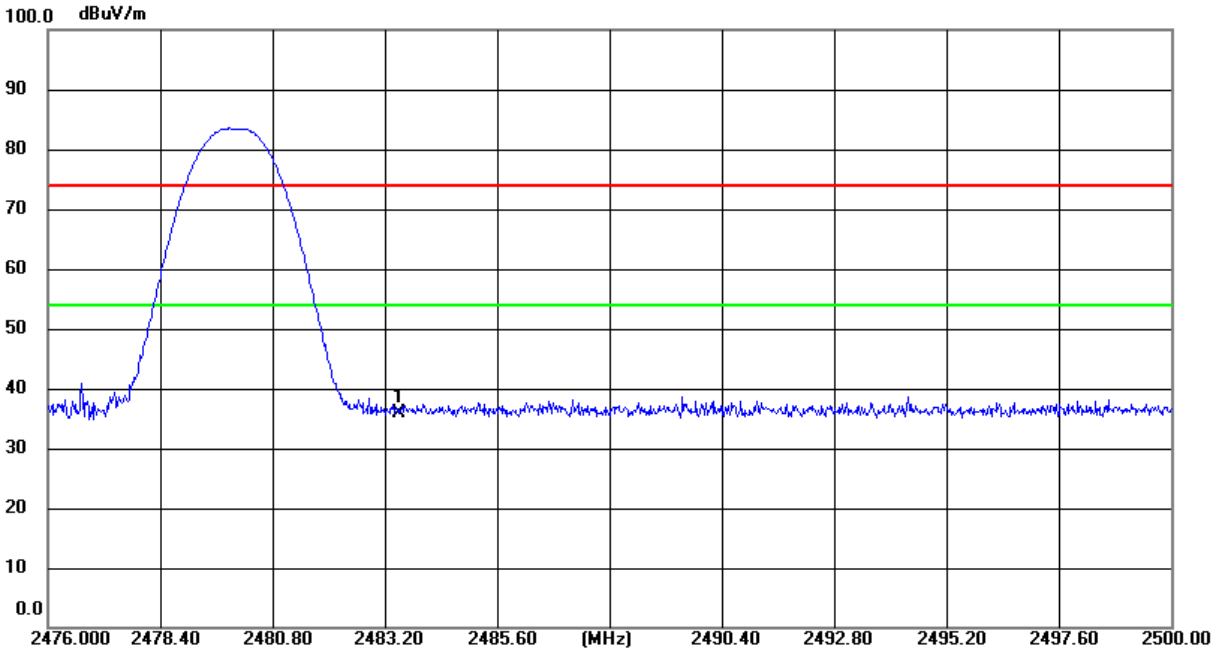

6.8. Spurious Emission

6.8.1. Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	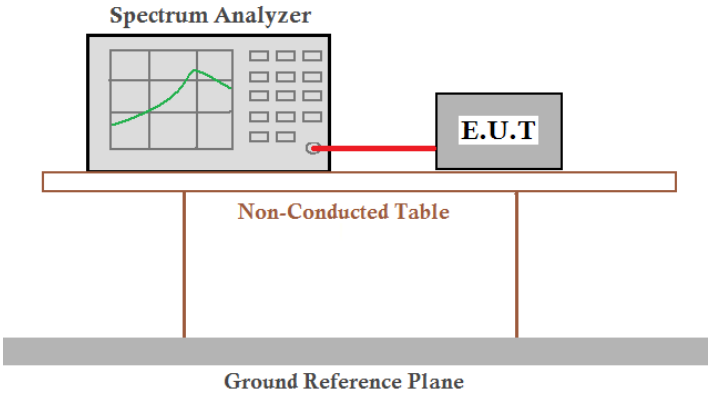					
Test Instruments:	Refer to section 5.0 for details					
Test mode:	Refer to section 4.9 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

GFSK

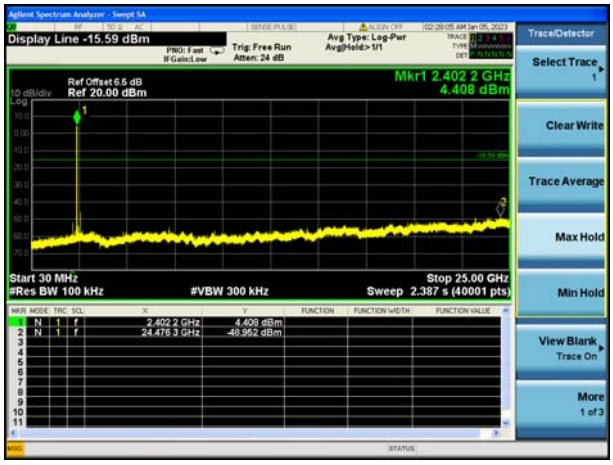

CH00

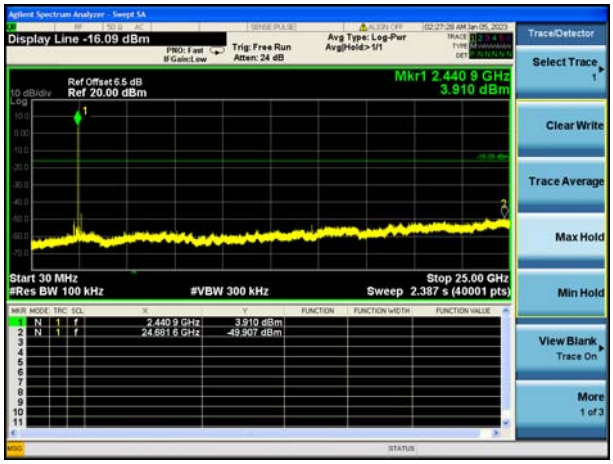

CH39

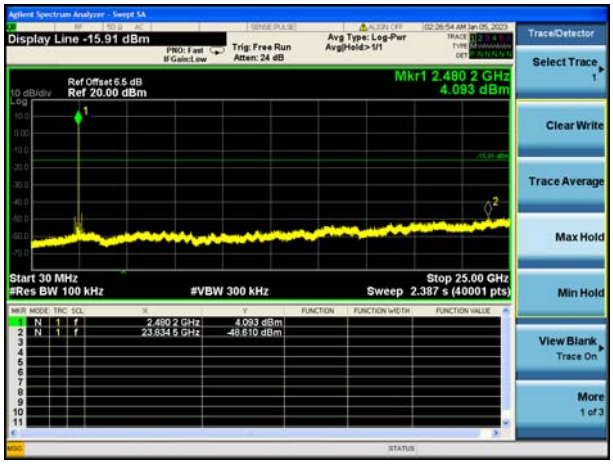

CH78

8QPSK

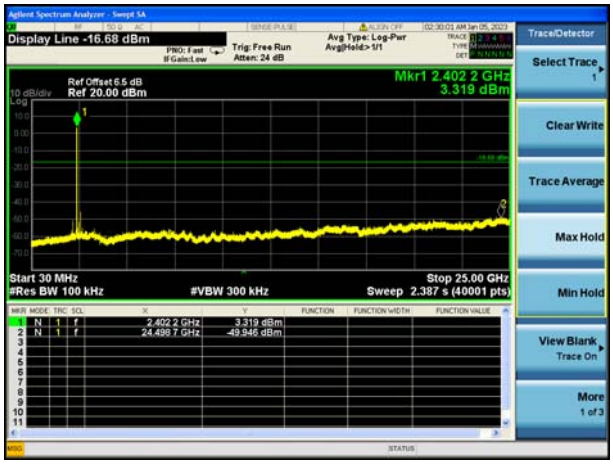

CH00

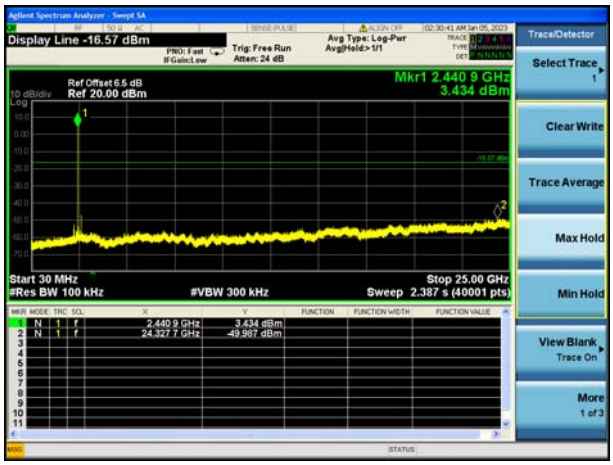

CH39

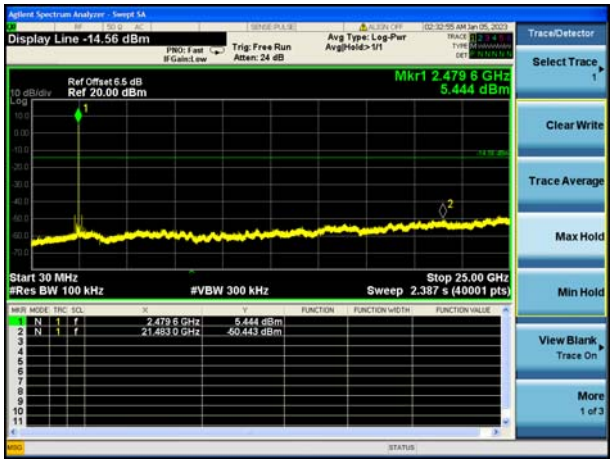

CH78

6.8.2. Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209
Test Method:	ANSI C63.10:2013
Test Frequency Range:	9kHz to 25GHz
Test site:	Measurement Distance: 3m

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limit:

Frequency	Limit (uV/m)	Value	Measurement Distance
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m
0.490MHz-1.705MHz	24000/F(KHz)	QP	30m
1.705MHz-30MHz	30	QP	30m
30MHz-88MHz	100	QP	3m
88MHz-216MHz	150	QP	
216MHz-960MHz	200	QP	
960MHz-1GHz	500	QP	
Above 1GHz	500	Average	
	5000	Peak	

Test setup:

For radiated emissions from 9kHz to 30MHz

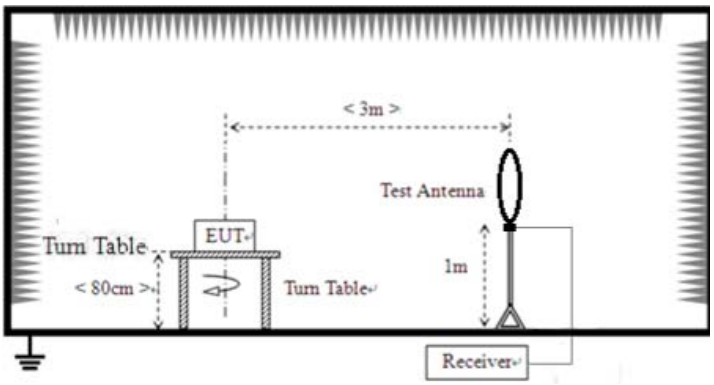

	For radiated emissions from 30MHz to1GHz 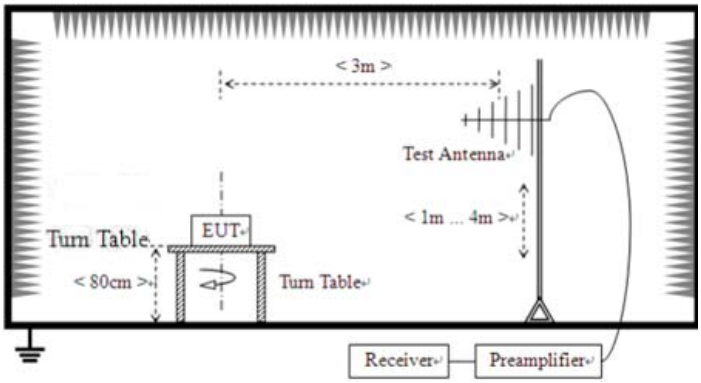 For radiated emissions above 1GHz 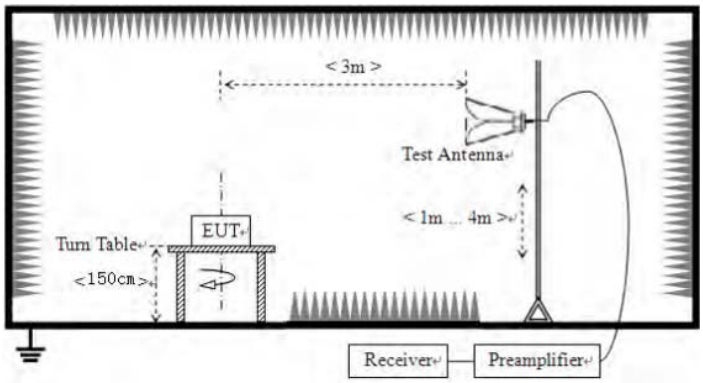
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 4.9 for details
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1012mbar

Test voltage:	AC 120V, 60Hz
Test results:	Pass

Measurement data:

Remarks:

1. *During the test, pre-scan the GFSK, π/4-DQPSK,8QPSK modulation, and found the 8QPSK modulation which it is worse case.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

For 30MHz-1GHz

Horizontal

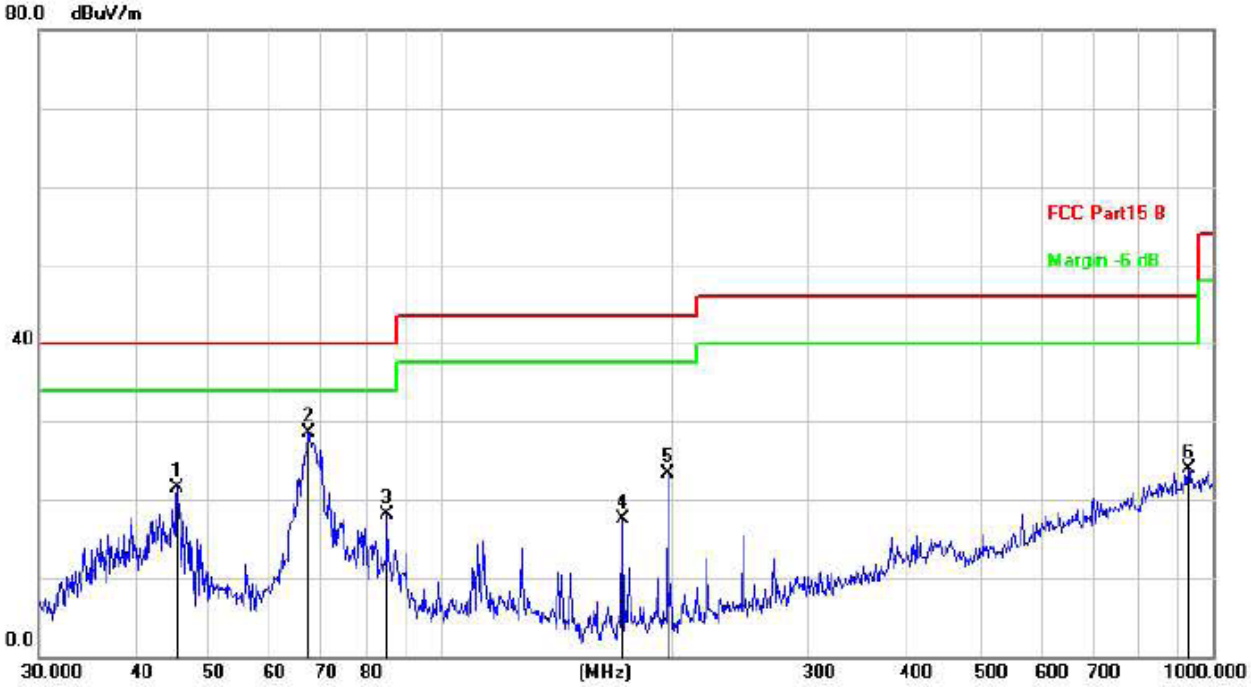

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	45.3755	38.81	-17.21	21.6	40	-18.4	QP
2	67.2022	47.87	-19.46	28.41	40	-11.59	QP
3	84.9995	40.14	-21.96	18.18	40	-21.82	QP
4	171.9946	36.48	-19.06	17.42	43.5	-26.08	QP
5	196.5098	44.18	-20.79	23.39	43.5	-20.11	QP
6	929.0082	28.56	-4.65	23.91	46	-22.09	QP

Vertical

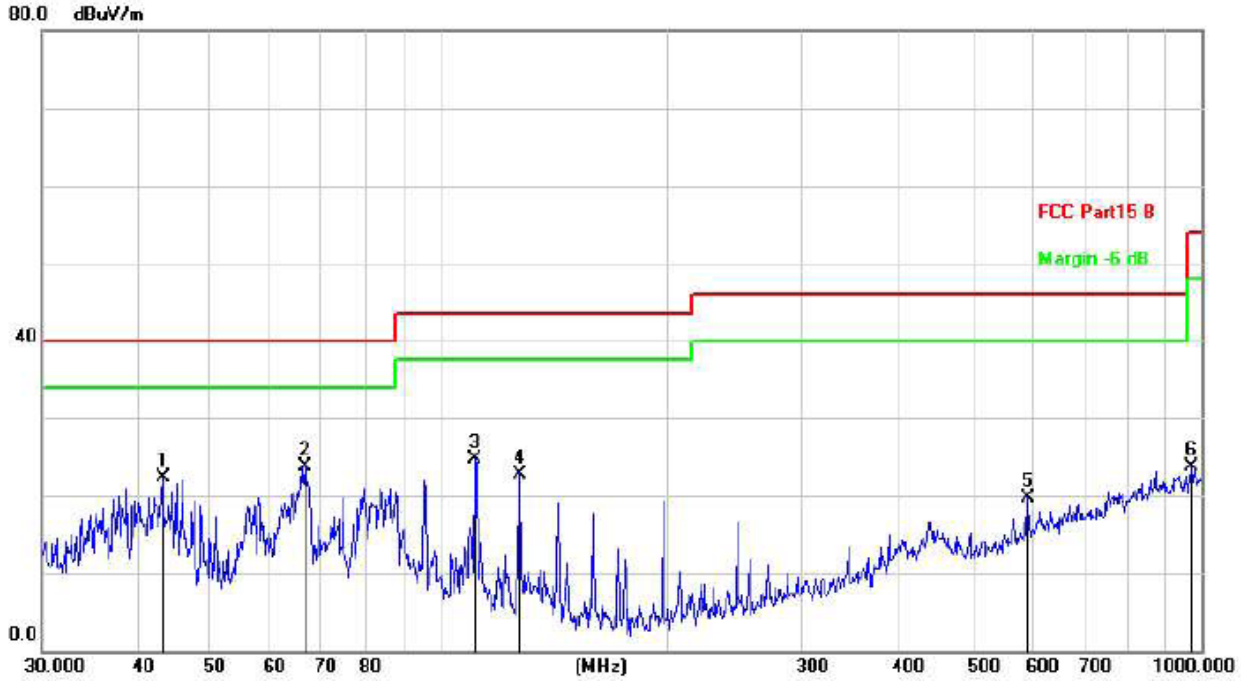

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	43.2017	39.71	-17.43	22.28	40	-17.72	QP
2	66.4989	43.12	-19.32	23.8	40	-16.2	QP
3	111.3468	45.45	-20.65	24.8	43.5	-18.7	QP
4	127.6645	41.84	-19.04	22.8	43.5	-20.7	QP
5	590.9737	29.81	-10.18	19.63	46	-26.37	QP
6	968.9338	28.26	-4.5	23.76	54	-30.24	QP

For 1GHz to 25GHz

Remark: For test above 1GHz GFSK, Pi/4 DQPSK and 8QPSK were test at Low, Middle, and High channel; only the worst result of GFSK was reported as below:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	48.74	31.40	8.18	31.50	56.82	74.00	-17.18	peak
4804	36.28	31.40	8.18	31.50	44.36	54.00	-9.64	AVG
7206	39.12	35.80	10.83	31.40	54.35	74.00	-19.65	peak
7206	24.46	35.80	10.83	31.40	39.69	54.00	-14.31	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	48.03	31.40	8.18	31.50	56.11	74.00	-17.89	peak
4804	34.12	31.40	8.18	31.50	42.20	54.00	-11.80	AVG
7206	37.62	35.80	10.83	31.40	52.85	74.00	-21.15	peak
7206	24.16	35.80	10.83	31.40	39.39	54.00	-14.61	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882	48.66	31.40	9.17	32.10	57.13	74.00	-16.87	peak
4882	33.42	31.40	9.17	32.10	41.89	54.00	-12.11	AVG
7323	37.26	35.80	10.83	31.40	52.49	74.00	-21.51	peak
7323	23.62	35.80	10.83	31.40	38.85	54.00	-15.15	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4882	47.88	31.40	9.17	32.10	56.35	74.00	-17.65	peak
4882	33.29	31.40	9.17	32.10	41.76	54.00	-12.24	AVG
7323	36.52	35.80	10.83	31.40	51.75	74.00	-22.25	peak
7323	22.83	35.80	10.83	31.40	38.06	54.00	-15.94	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

CH High (2480MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	46.36	31.40	9.17	32.10	54.83	74	-19.17	peak
4960	36.12	31.40	9.17	32.10	44.59	54	-9.41	AVG
7440	40.79	35.80	10.83	31.40	56.02	74	-17.98	peak
7440	23.11	35.80	10.83	31.40	38.34	54	-15.66	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	48.95	31.40	9.17	32.10	57.42	74	-16.58	peak
4960	35.77	31.40	9.17	32.10	44.24	54	-9.76	AVG
7440	39.96	35.80	10.83	31.40	55.19	74	-18.81	peak
7440	22.14	35.80	10.83	31.40	37.37	54	-16.63	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Remark：
(1) Data of measurement within this frequency range shown "--- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.

7. Test Setup Photo

Reference to the **appendix I** for details.

8. EUT Constructional Details

Reference to the **appendix II** for details.

------End------