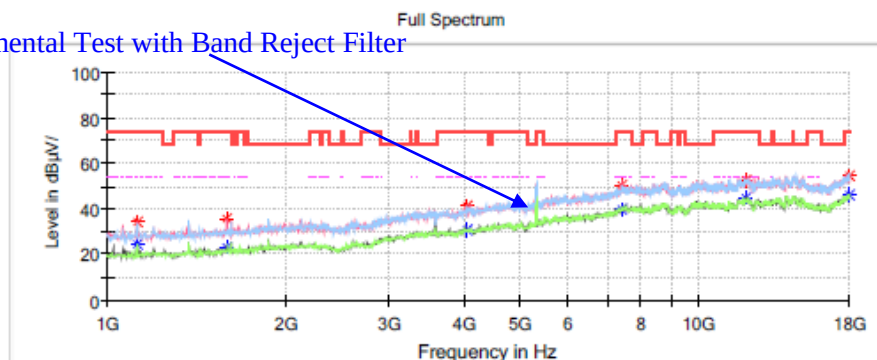


High Channel: 5320MHz**Common Information**

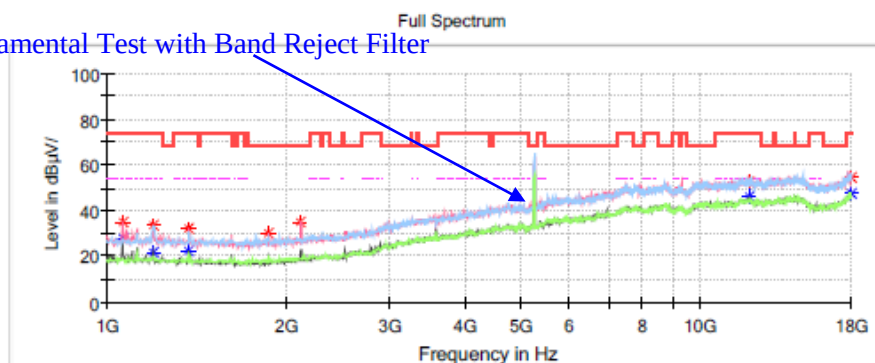
Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 21.1°C
 Humidity: 47%
 Atmospheric Pressure: 101.0kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/6

Fundamental Test with Band Reject Filter
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	34.49	—	74.00	39.51	V	-15.6
1122.400000	—	24.53	54.00	29.47	V	-15.6
1595.000000	35.63	—	74.00	38.37	V	-13.6
1595.000000	—	22.91	54.00	31.09	V	-13.6
4053.200000	41.29	—	74.00	32.71	H	-4.9
4053.200000	—	31.04	54.00	22.96	H	-4.9
7419.200000	—	40.12	54.00	13.88	H	3.0
7419.200000	50.05	—	74.00	23.95	H	3.0
12056.800000	52.17	—	74.00	21.83	H	9.0
12056.800000	—	44.94	54.00	9.06	H	9.0
17993.200000	—	46.15	54.00	7.85	V	13.8
17993.200000	54.55	—	74.00	19.45	V	13.8

**MIMO(Chain 0+Chain 1):
802.11ac 20 Mode:****Low Channel: 5260MHz****Common Information**

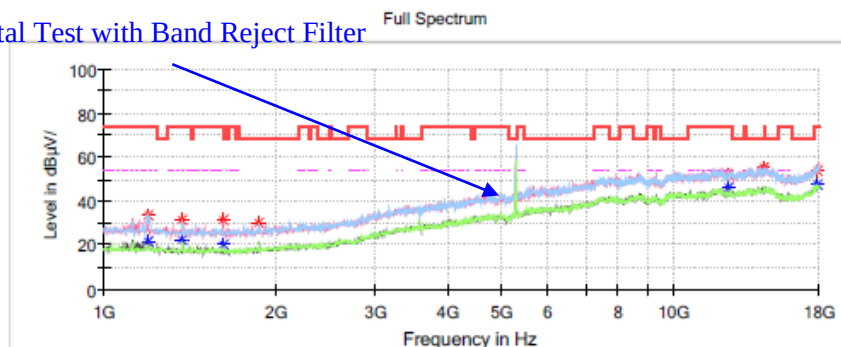
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	28.01	54.00	25.99	V	-15.9
1061.200000	34.62	—	74.00	39.38	V	-15.9
1193.800000	—	21.68	54.00	32.32	H	-15.3
1193.800000	33.42	—	74.00	40.58	H	-15.3
1374.000000	—	22.56	54.00	31.44	V	-14.6
1374.000000	32.07	—	74.00	41.93	V	-14.6
1873.800000	30.32	—	68.20	37.88	V	-12.3
2122.000000	34.92	—	68.20	33.28	V	-11.3
12135.000000	52.22	—	74.00	21.78	H	9.0
12135.000000	—	45.95	54.00	8.05	H	9.0
17996.600000	54.68	—	74.00	19.32	H	13.8
17996.600000	—	47.49	54.00	6.51	H	13.8

Middle Channel: 5300MHz**Common Information**

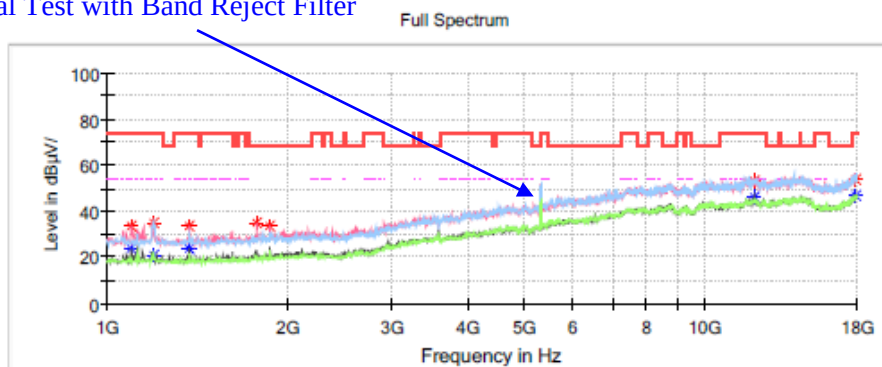
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1°C
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1200.600000	—	21.94	54.00	32.06	V	-15.3
1200.600000	33.38	—	74.00	40.62	V	-15.3
1374.000000	31.77	—	74.00	42.23	V	-14.6
1374.000000	—	22.26	54.00	31.74	V	-14.6
1622.200000	31.80	—	74.00	42.20	H	-13.5
1622.200000	—	20.49	54.00	33.51	H	-13.5
1873.800000	30.17	—	68.20	38.03	H	-12.3
12488.600000	—	45.89	54.00	8.11	H	8.8
12488.600000	51.78	—	74.00	22.22	H	8.8
14436.800000	55.42	—	68.20	12.78	H	11.0
17904.800000	—	47.20	54.00	6.80	H	13.2
17904.800000	53.86	—	74.00	20.14	H	13.2

High Channel: 5320MHz**Common Information**

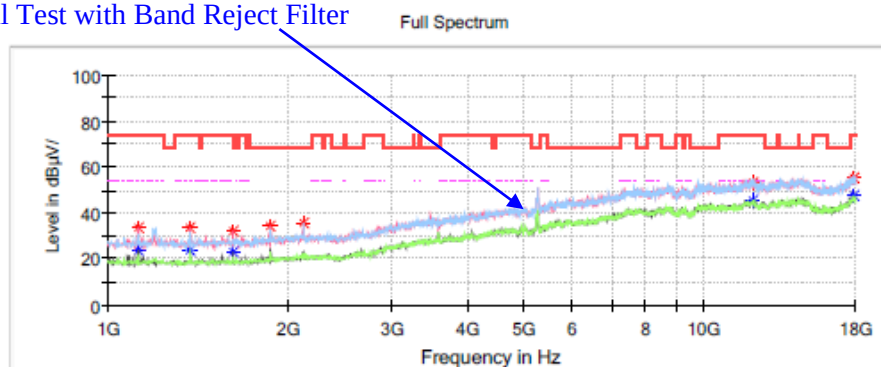
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1098.600000	—	23.53	54.00	30.47	V	-15.7
1098.600000	33.35	—	74.00	40.65	V	-15.7
1193.800000	—	21.26	54.00	32.74	H	-15.3
1193.800000	34.80	—	74.00	39.20	H	-15.3
1374.000000	—	24.12	54.00	29.88	V	-14.6
1374.000000	33.68	—	74.00	40.32	V	-14.6
1782.000000	34.90	—	68.20	33.30	V	-12.7
1873.800000	33.27	—	68.20	34.93	V	-12.3
12067.000000	—	46.21	54.00	7.79	V	9.0
12067.000000	53.28	—	74.00	20.72	V	9.0
17935.400000	53.91	—	74.00	20.09	H	13.4
17935.400000	—	46.96	54.00	7.04	H	13.4

802.11ac40 Mode:**Low Channel: 5270MHz****Common Information**

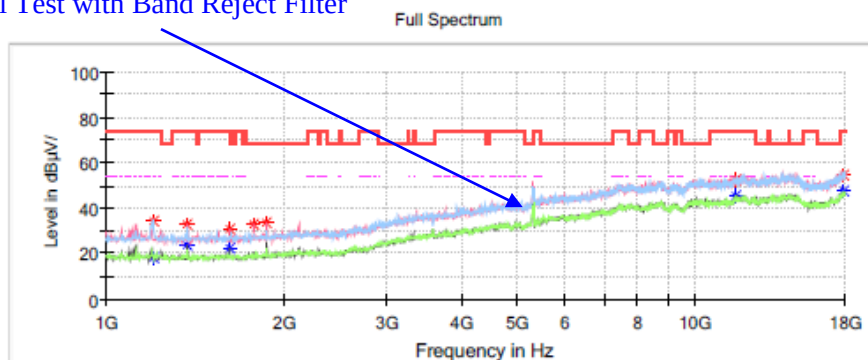
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1°C
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	23.61	54.00	30.39	V	-15.6
1122.400000	33.41	—	74.00	40.59	V	-15.6
1374.000000	—	23.79	54.00	30.21	V	-14.6
1374.000000	33.39	—	74.00	40.61	V	-14.6
1622.200000	—	23.11	54.00	30.89	V	-13.5
1622.200000	31.91	—	74.00	42.09	V	-13.5
1873.800000	34.53	—	68.20	33.67	V	-12.3
2128.800000	35.88	—	68.20	32.32	V	-11.3
12077.200000	—	45.58	54.00	8.42	V	9.0
12077.200000	52.93	—	74.00	21.07	V	9.0
17857.200000	54.98	—	74.00	19.02	H	13.0
17857.200000	—	47.41	54.00	6.59	H	13.0

High Channel: 5310MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

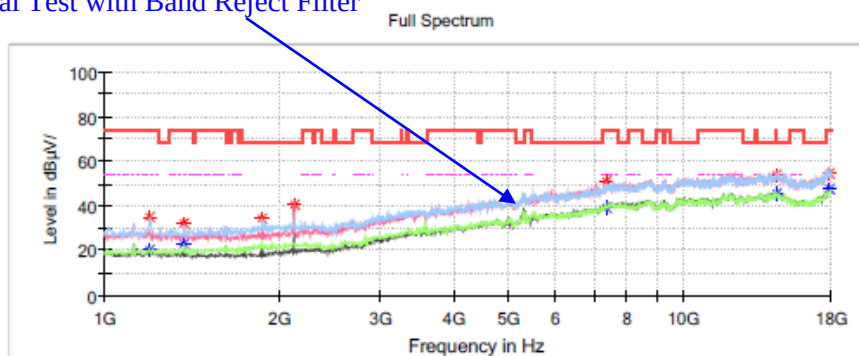
Fundamental Test with Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1204.000000	—	18.44	54.00	35.56	H	-15.3
1204.000000	34.23	—	74.00	39.77	H	-15.3
1374.000000	—	23.59	54.00	30.41	V	-14.6
1374.000000	32.77	—	74.00	41.23	V	-14.6
1622.200000	—	22.42	54.00	31.58	V	-13.5
1622.200000	31.10	—	74.00	42.90	V	-13.5
1778.600000	32.97	—	68.20	35.23	V	-12.7
1873.800000	33.24	—	68.20	34.96	V	-12.3
11737.200000	52.44	—	74.00	21.56	V	8.6
11737.200000	—	45.56	54.00	8.44	V	8.6
17938.800000	54.70	—	74.00	19.30	V	13.5
17938.800000	—	47.57	54.00	6.43	V	13.5

802.11ac80 Mode:**Channel: 5290MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ac80
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	21.1℃
Humidity:	47%
Atmospheric Pressure:	101.0kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/6

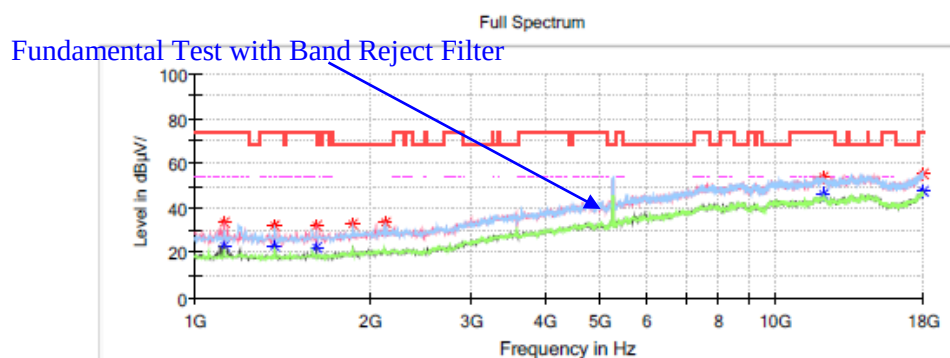
Fundamental Test with Band Reject Filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1197.200000	—	20.46	54.00	33.54	H	-15.3
1197.200000	35.16	—	74.00	38.84	H	-15.3
1374.000000	—	23.29	54.00	30.71	H	-14.6
1374.000000	32.13	—	74.00	41.87	H	-14.6
1873.800000	34.28	—	68.20	33.92	H	-12.3
2125.400000	40.46	—	68.20	27.74	H	-11.3
7385.200000	—	39.34	54.00	14.66	H	2.9
7385.200000	51.10	—	74.00	22.90	H	2.9
14494.600000	—	45.41	54.00	8.59	V	11.1
14494.600000	53.91	—	74.00	20.09	V	11.1
17901.400000	54.73	—	74.00	19.27	V	13.2
17901.400000	—	47.30	54.00	6.70	V	13.2

802.11ax 20 Mode:**Low Channel: 5260MHz****Common Information**

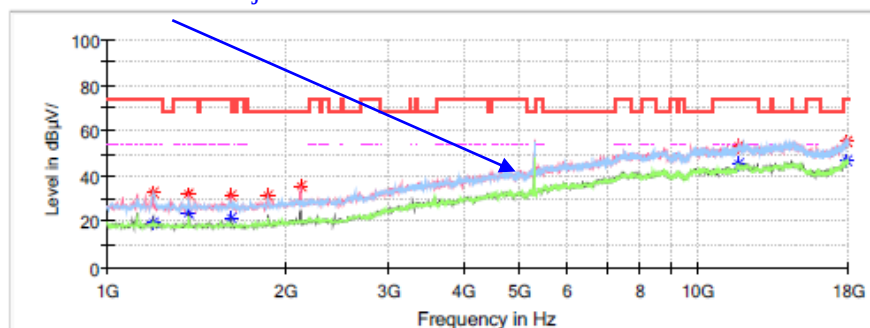
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1°C
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	23.30	54.00	30.70	V	-15.6
1122.400000	33.71	—	74.00	40.29	V	-15.6
1374.000000	—	23.37	54.00	30.63	H	-14.6
1374.000000	32.01	—	74.00	41.99	H	-14.6
1622.200000	—	22.38	54.00	31.62	H	-13.5
1622.200000	32.40	—	74.00	41.60	H	-13.5
1873.800000	32.54	—	68.20	35.66	H	-12.3
2128.800000	33.22	—	68.20	34.98	H	-11.3
12084.000000	53.80	—	74.00	20.20	H	9.0
12084.000000	—	46.04	54.00	7.96	H	9.0
17945.600000	55.37	—	74.00	18.63	V	13.5
17945.600000	—	47.48	54.00	6.52	V	13.5

Middle Channel: 5300MHz**Common Information**

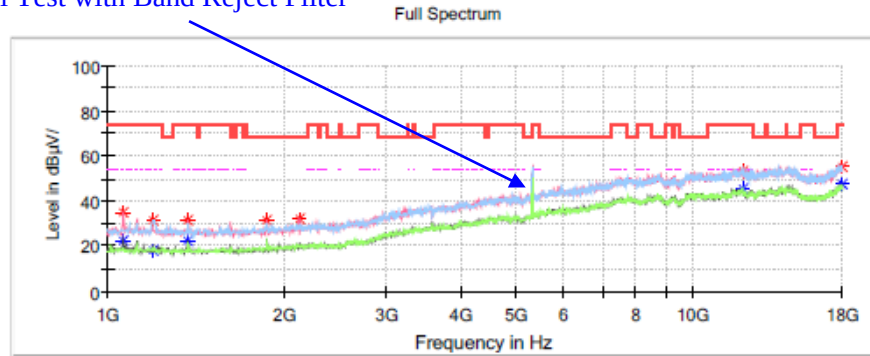
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1200.600000	—	19.73	54.00	34.27	H	-15.3
1200.600000	32.98	—	74.00	41.02	H	-15.3
1374.000000	—	23.48	54.00	30.52	V	-14.6
1374.000000	32.31	—	74.00	41.69	V	-14.6
1622.200000	—	21.88	54.00	32.12	V	-13.5
1622.200000	31.69	—	74.00	42.31	V	-13.5
1873.800000	31.25	—	68.20	36.95	V	-12.3
2128.800000	35.75	—	68.20	32.45	V	-11.3
11727.000000	53.04	—	74.00	20.96	V	8.6
11727.000000	—	45.36	54.00	8.64	V	8.6
17894.600000	55.08	—	74.00	18.92	V	13.2
17894.600000	—	47.03	54.00	6.97	V	13.2

High Channel: 5320MHz**Common Information**

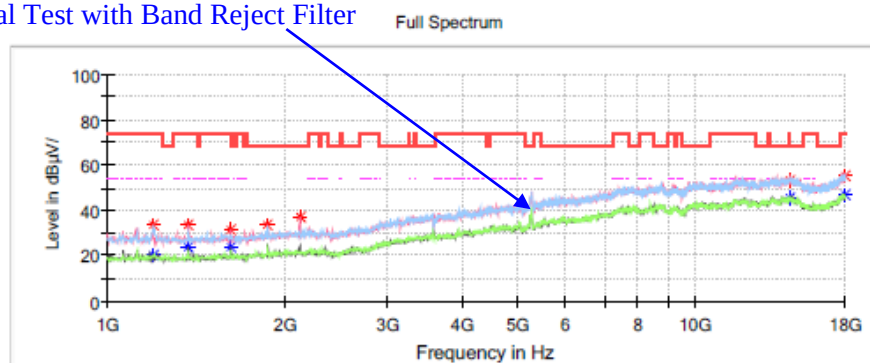
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	34.94	—	74.00	39.06	V	-15.9
1064.600000	—	22.06	54.00	31.94	V	-15.9
1200.600000	31.78	—	74.00	42.22	H	-15.3
1200.600000	—	18.30	54.00	35.70	H	-15.3
1374.000000	31.62	—	74.00	42.38	V	-14.6
1374.000000	—	22.50	54.00	31.50	V	-14.6
1873.800000	31.63	—	68.20	36.57	V	-12.3
2128.800000	32.05	—	68.20	36.15	V	-11.3
12141.800000	53.47	—	74.00	20.53	V	9.0
12141.800000	—	45.23	54.00	8.77	V	9.0
17996.600000	55.05	—	74.00	18.95	V	13.8
17996.600000	—	47.47	54.00	6.53	V	13.8

802.11ax40 Mode:**Low Channel: 5270MHz****Common Information**

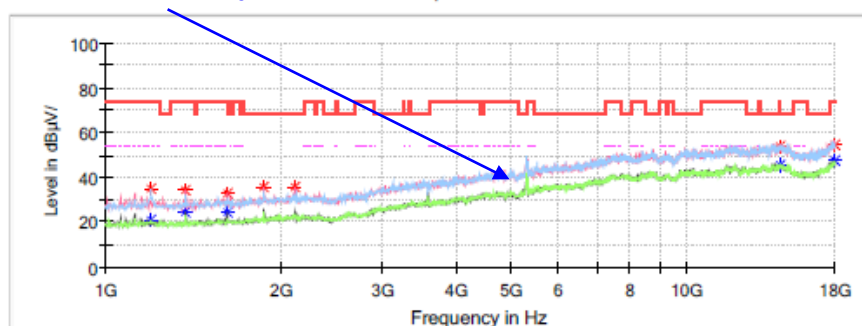
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1°C
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1197.200000	—	20.15	54.00	33.85	H	-15.3
1197.200000	33.78	—	74.00	40.22	H	-15.3
1374.000000	—	24.07	54.00	29.93	H	-14.6
1374.000000	33.48	—	74.00	40.52	H	-14.6
1622.200000	—	23.82	54.00	30.18	V	-13.5
1622.200000	31.12	—	74.00	42.88	V	-13.5
1873.800000	33.26	—	68.20	34.94	V	-12.3
2128.800000	36.83	—	68.20	31.37	V	-11.3
14498.000000	52.96	—	74.00	21.04	V	11.1
14498.000000	—	45.69	54.00	8.31	V	11.1
17996.600000	55.22	—	74.00	18.78	V	13.8
17996.600000	—	46.90	54.00	7.10	V	13.8

High Channel: 5310MHz**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ax40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 21.1°C
 Humidity: 47%
 Atmospheric Pressure: 101.0kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/6

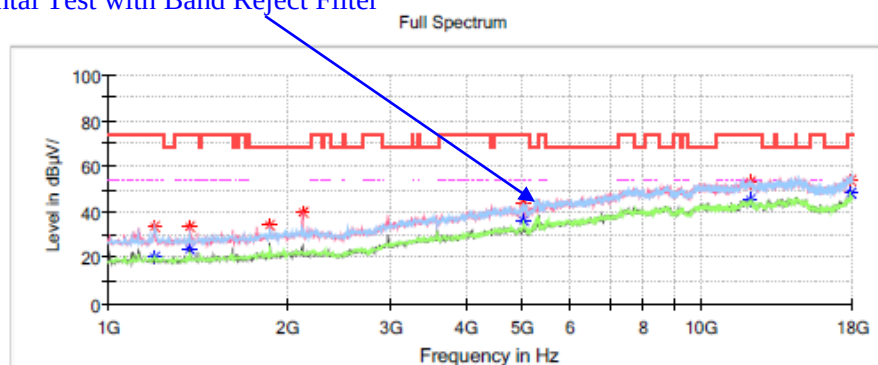
Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1197.200000	—	20.86	54.00	33.14	H	-15.3
1197.200000	35.14	—	74.00	38.86	H	-15.3
1374.000000	—	24.37	54.00	29.63	V	-14.6
1374.000000	34.20	—	74.00	39.80	V	-14.6
1622.200000	—	24.56	54.00	29.44	V	-13.5
1622.200000	32.77	—	74.00	41.23	V	-13.5
1873.800000	35.71	—	68.20	32.49	V	-12.3
2122.000000	35.41	—	68.20	32.79	V	-11.3
14494.600000	—	45.47	54.00	8.53	V	11.1
14494.600000	54.04	—	74.00	19.96	V	11.1
17979.600000	54.56	—	74.00	19.44	V	13.7
17979.600000	—	47.73	54.00	6.27	V	13.7

802.11ax80 Mode:**Channel: 5290MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Fundamental Test with Band Reject Filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1200.600000	33.54	—	74.00	40.46	H	-15.3
1200.600000	—	20.48	54.00	33.52	H	-15.3
1374.000000	33.66	—	74.00	40.34	V	-14.6
1374.000000	—	24.03	54.00	29.97	V	-14.6
1873.800000	34.55	—	68.20	33.65	V	-12.3
2125.400000	39.53	—	68.20	28.67	V	-11.3
5015.400000	—	36.17	54.00	17.83	H	-2.7
5015.400000	43.76	—	74.00	30.24	H	-2.7
12135.000000	—	45.52	54.00	8.48	V	9.0
12135.000000	53.09	—	74.00	20.91	V	9.0
17928.600000	—	47.95	54.00	6.05	H	13.4
17928.600000	54.16	—	74.00	19.84	H	13.4

1GHz-18GHz(5470-5725MHz Band):

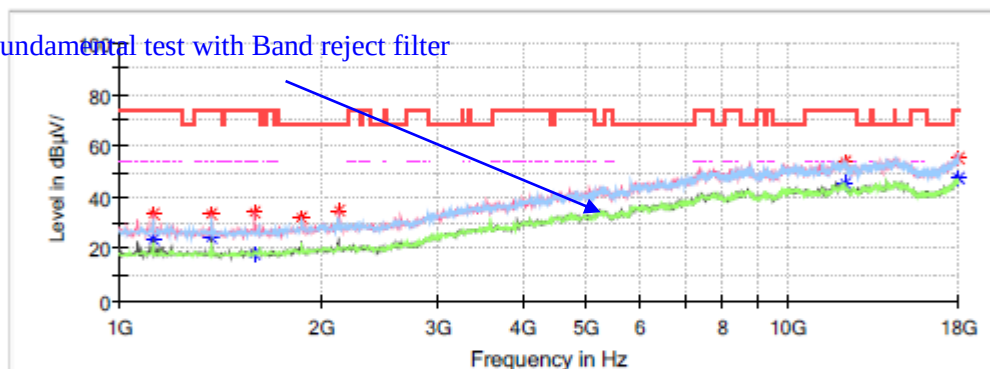
Chain 0

802.11a Mode:**Low Channel: 5500MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.1°C
Humidity:	46%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

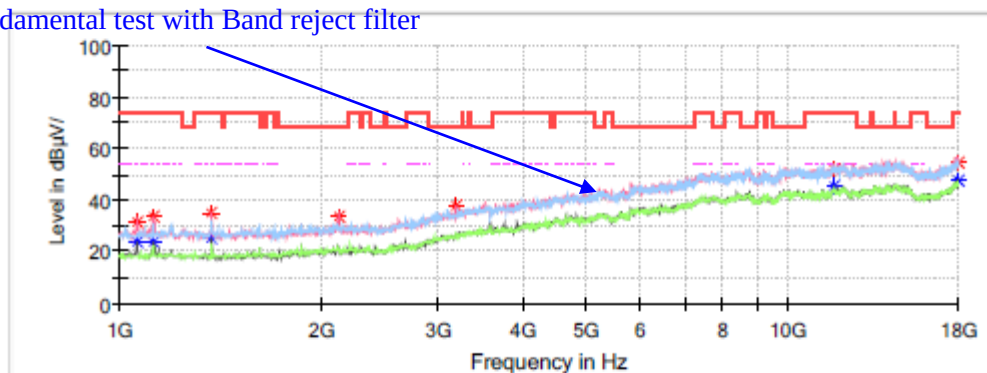
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	24.08	54.00	29.92	V	-15.6
1122.400000	33.74	—	74.00	40.26	V	-15.6
1374.000000	—	24.18	54.00	29.82	H	-14.6
1374.000000	33.32	—	74.00	40.68	H	-14.6
1591.600000	—	18.44	54.00	35.56	V	-13.6
1591.600000	34.22	—	74.00	39.78	V	-13.6
1873.800000	32.33	—	68.20	35.87	V	-12.3
2128.800000	34.71	—	68.20	33.49	V	-11.3
12162.200000	54.19	—	74.00	19.81	V	8.9
12162.200000	—	45.40	54.00	8.60	V	8.9
17989.800000	55.19	—	74.00	18.81	V	13.8
17989.800000	—	47.26	54.00	6.74	V	13.8

Middle Channel: 5600MHz**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.1℃
 Humidity: 46%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/7

Full Spectrum

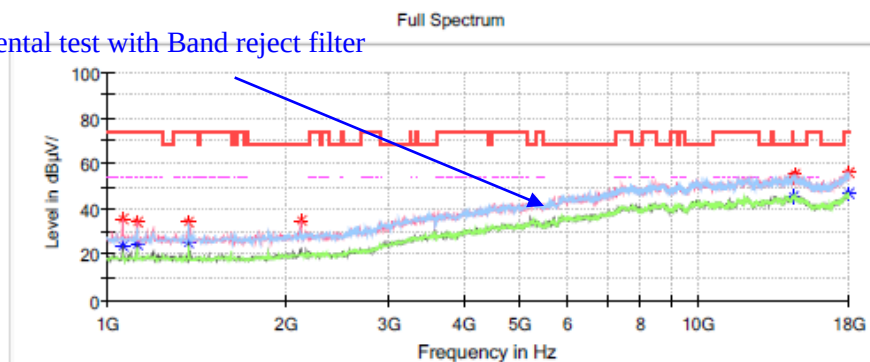
Fundamental test with Band reject filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	31.49	—	74.00	42.51	V	-15.9
1061.200000	—	23.77	54.00	30.23	V	-15.9
1122.400000	33.32	—	74.00	40.68	V	-15.6
1122.400000	—	24.10	54.00	29.90	V	-15.6
1374.000000	34.99	—	74.00	39.01	V	-14.6
1374.000000	—	25.51	54.00	28.49	V	-14.6
2125.400000	33.52	—	68.20	34.68	V	-11.3
3182.800000	37.69	—	68.20	30.51	V	-7.6
11744.000000	—	45.35	54.00	8.65	V	8.6
11744.000000	52.01	—	74.00	21.99	V	8.6
17996.600000	54.73	—	74.00	19.27	H	13.8
17996.600000	—	47.57	54.00	6.43	H	13.8

High Channel: 5700MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Fundamental test with Band reject filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	23.61	54.00	30.39	V	-15.9
1061.200000	35.48	—	74.00	38.52	V	-15.9
1122.400000	—	24.67	54.00	29.33	V	-15.6
1122.400000	34.14	—	74.00	39.86	V	-15.6
1374.000000	—	25.49	54.00	28.51	H	-14.6
1374.000000	34.14	—	74.00	39.86	H	-14.6
2128.800000	34.62	—	68.20	33.58	H	-11.3
14498.000000	53.68	—	74.00	20.32	H	11.1
14498.000000	—	45.72	54.00	8.28	H	11.1
14552.400000	55.48	—	68.20	12.72	H	10.9
17993.200000	—	47.02	54.00	6.98	H	13.8
17993.200000	55.63	—	74.00	18.37	H	13.8

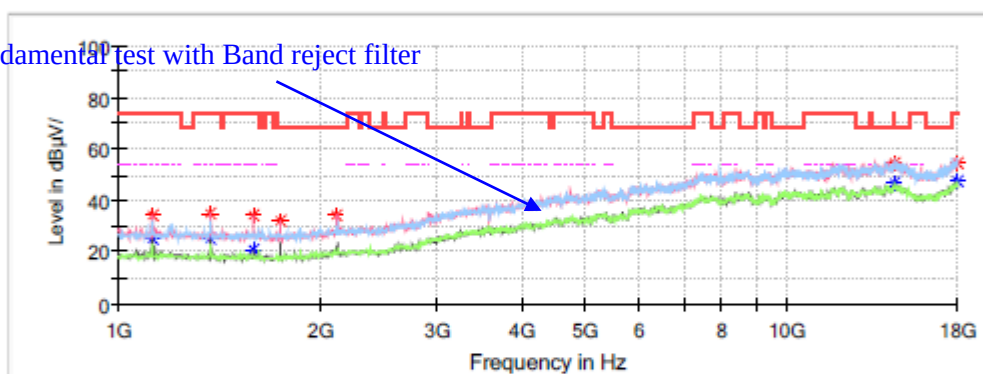
Chain 1

802.11a Mode:**Low Channel: 5500MHz****Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11a mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.1℃
 Humidity: 46%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

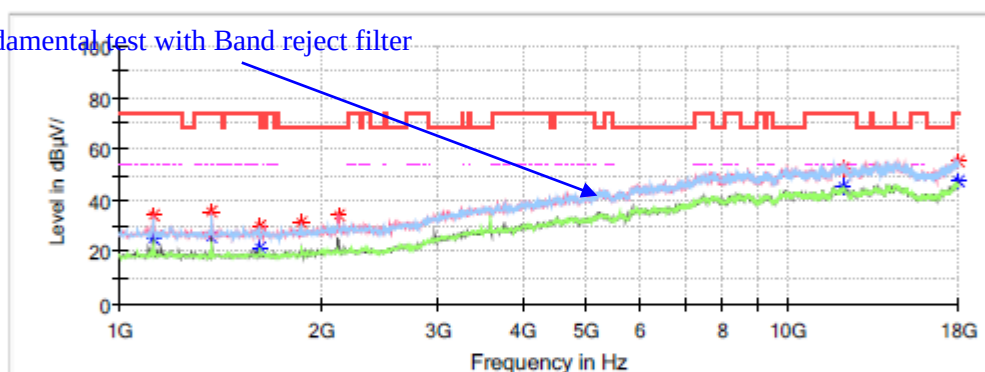
Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	24.86	54.00	29.14	V	-15.6
1122.400000	34.46	—	74.00	39.54	V	-15.6
1374.000000	—	25.30	54.00	28.70	V	-14.6
1374.000000	35.07	—	74.00	38.93	V	-14.6
1591.600000	—	20.71	54.00	33.29	V	-13.6
1591.600000	33.99	—	74.00	40.01	V	-13.6
1748.000000	31.97	—	68.20	36.23	V	-12.9
2122.000000	34.55	—	68.20	33.65	V	-11.3
14494.600000	54.36	—	74.00	19.64	V	11.1
14494.600000	—	46.71	54.00	7.29	V	11.1
17996.600000	54.71	—	74.00	19.29	H	13.8
17996.600000	—	47.28	54.00	6.72	H	13.8

Middle Channel: 5600MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

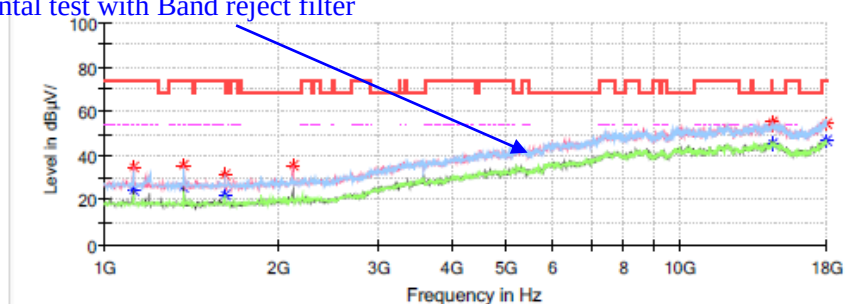
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	34.11	—	74.00	39.89	V	-15.6
1122.400000	—	24.84	54.00	29.16	V	-15.6
1374.000000	35.60	—	74.00	38.40	V	-14.6
1374.000000	—	25.87	54.00	28.13	V	-14.6
1622.200000	—	21.65	54.00	32.35	H	-13.5
1622.200000	30.37	—	74.00	43.63	H	-13.5
1873.800000	31.12	—	68.20	37.08	H	-12.3
2128.800000	34.44	—	68.20	33.76	H	-11.3
12070.400000	—	45.55	54.00	8.45	H	9.0
12070.400000	52.37	—	74.00	21.63	H	9.0
17993.200000	—	47.41	54.00	6.59	H	13.8
17993.200000	55.42	—	74.00	18.58	H	13.8

High Channel: 5700MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	24.68	54.00	29.32	V	-15.6
1122.400000	35.28	—	74.00	38.72	V	-15.6
1374.000000	—	25.61	54.00	28.39	V	-14.6
1374.000000	36.01	—	74.00	37.99	V	-14.6
1622.200000	—	22.15	54.00	31.85	H	-13.5
1622.200000	31.61	—	74.00	42.39	H	-13.5
2125.400000	35.44	—	68.20	32.76	H	-11.3
14460.600000	55.25	—	68.20	12.95	H	11.1
14494.600000	54.09	—	74.00	19.91	H	11.1
14494.600000	—	45.76	54.00	8.24	H	11.1
17996.600000	—	46.86	54.00	7.14	H	13.8
17996.600000	54.84	—	74.00	19.16	H	13.8

MIMO(Chain 0+Chain 1):
802.11ac20 Mode:

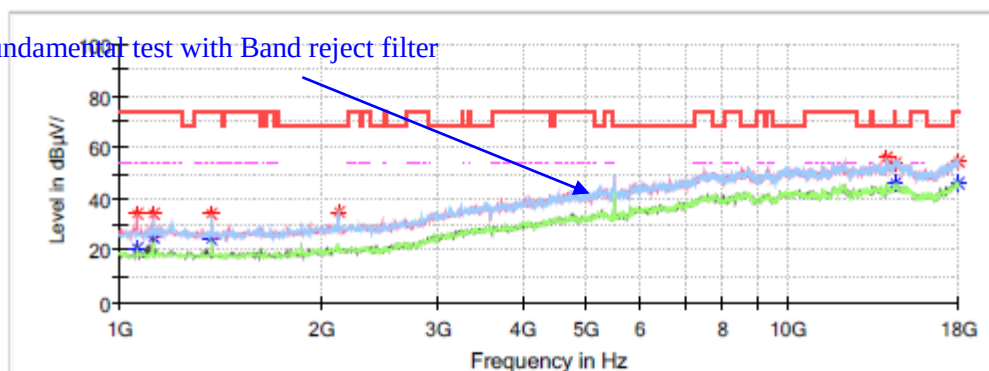
Low Channel: 5500MHz

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

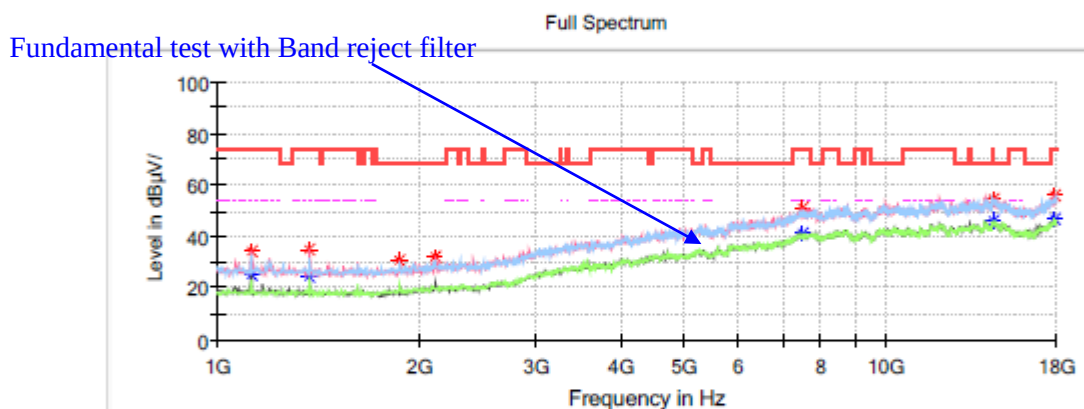


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	20.89	54.00	33.11	V	-15.9
1061.200000	33.94	—	74.00	40.06	V	-15.9
1122.400000	—	24.90	54.00	29.10	V	-15.6
1122.400000	34.40	—	74.00	39.60	V	-15.6
1374.000000	—	24.80	54.00	29.20	H	-14.6
1374.000000	34.51	—	74.00	39.49	H	-14.6
2125.400000	35.08	—	68.20	33.12	H	-11.3
14032.200000	55.84	—	68.20	12.36	H	10.7
14484.400000	54.03	—	74.00	19.97	H	11.1
14484.400000	—	46.08	54.00	7.92	H	11.1
17972.800000	—	46.32	54.00	7.68	V	13.7
17972.800000	54.84	—	74.00	19.16	V	13.7

Middle Channel: 5600MHz**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.1℃
 Humidity: 46%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/7

**Critical Freqs**

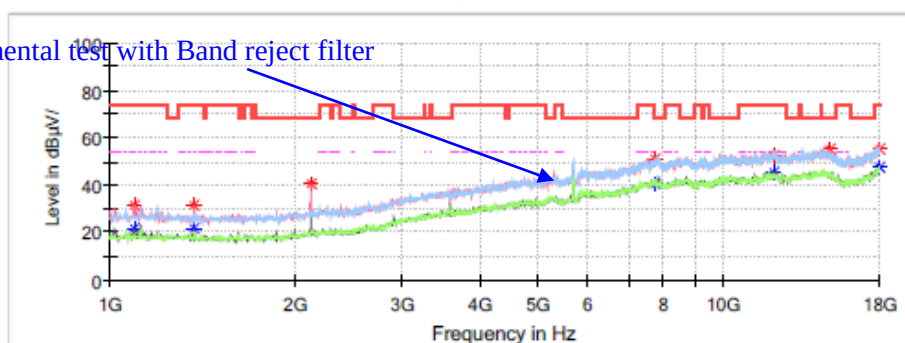
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	24.90	54.00	29.10	V	-15.6
1122.400000	34.61	—	74.00	39.39	V	-15.6
1374.000000	—	24.74	54.00	29.26	V	-14.6
1374.000000	34.81	—	74.00	39.19	V	-14.6
1873.800000	30.48	—	68.20	37.72	V	-12.3
2122.000000	31.92	—	68.20	36.28	V	-11.3
7497.400000	—	41.49	54.00	12.51	V	3.3
7497.400000	51.27	—	74.00	22.73	V	3.3
14494.600000	—	45.90	54.00	8.10	H	11.1
14494.600000	54.86	—	74.00	19.14	H	11.1
17921.800000	55.73	—	74.00	18.27	V	13.4
17921.800000	—	46.71	54.00	7.29	V	13.4

High Channel: 5700MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

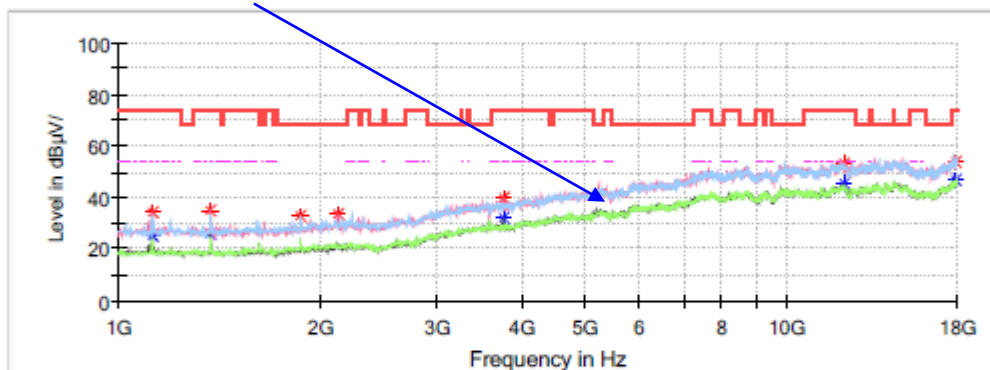
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1095.200000	31.75	—	74.00	42.25	V	-15.7
1095.200000	—	21.67	54.00	32.34	V	-15.7
1374.000000	31.26	—	74.00	42.74	H	-14.6
1374.000000	—	21.38	54.00	32.62	H	-14.6
2128.800000	40.82	—	68.20	27.38	H	-11.3
7749.000000	—	40.89	54.00	13.11	H	3.4
7749.000000	51.03	—	74.00	22.97	H	3.4
12124.800000	52.52	—	74.00	21.48	V	9.0
12124.800000	—	45.46	54.00	8.54	V	9.0
14977.400000	55.33	—	68.20	12.87	V	9.4
17996.600000	55.05	—	74.00	18.95	V	13.8
17996.600000	—	47.35	54.00	6.65	V	13.8

802.11ac40 Mode:**Low Channel: 5510MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ac40 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.1℃
Humidity:	46%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/7

Fundamental test with Band reject filter

Full Spectrum

**Critical Freqs**

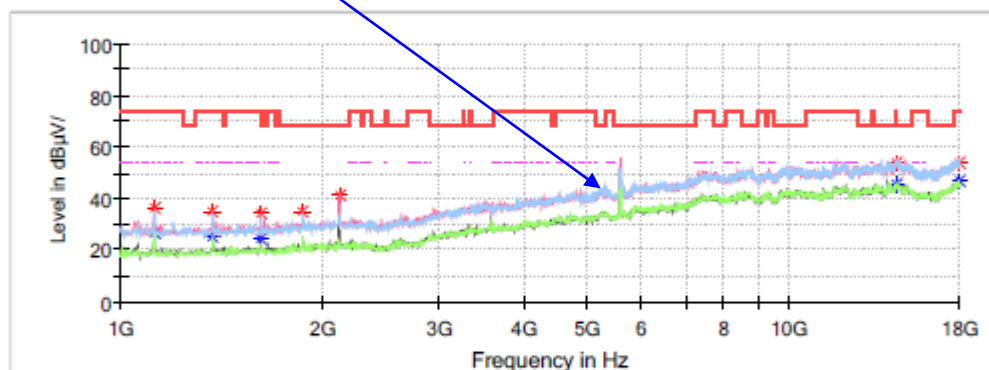
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.09	54.00	28.91	V	-15.6
1122.400000	34.30	—	74.00	39.70	V	-15.6
1374.000000	—	25.89	54.00	28.11	V	-14.6
1374.000000	35.08	—	74.00	38.92	V	-14.6
1873.800000	32.56	—	68.20	35.64	V	-12.3
2125.400000	33.63	—	68.20	34.57	V	-11.3
3760.800000	—	32.22	54.00	21.78	V	-5.6
3760.800000	40.14	—	74.00	33.86	V	-5.6
12169.000000	—	45.29	54.00	8.71	H	8.9
12169.000000	53.03	—	74.00	20.97	H	8.9
17942.200000	54.12	—	74.00	19.88	H	13.5
17942.200000	—	46.68	54.00	7.32	H	13.5

Middle Channel: 5590MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Fundamental test with Band reject filter

Full Spectrum

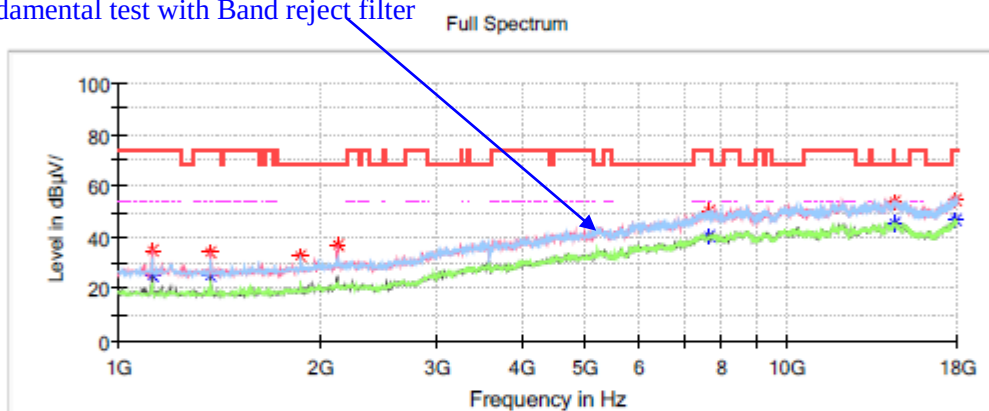
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	26.35	54.00	27.65	V	-15.6
1122.400000	36.34	—	74.00	37.66	V	-15.6
1374.000000	—	25.03	54.00	28.97	H	-14.6
1374.000000	34.92	—	74.00	39.08	H	-14.6
1622.200000	—	24.28	54.00	29.72	V	-13.5
1622.200000	34.16	—	74.00	39.84	V	-13.5
1873.800000	34.65	—	68.20	33.55	V	-12.3
2125.400000	41.42	—	68.20	26.78	V	-11.3
14498.000000	—	45.75	54.00	8.25	H	11.1
14498.000000	53.64	—	74.00	20.36	H	11.1
17996.600000	54.03	—	74.00	19.97	V	13.8
17996.600000	—	47.03	54.00	6.97	V	13.8

High Channel: 5670MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Fundamental test with Band reject filter

**Critical Freqs**

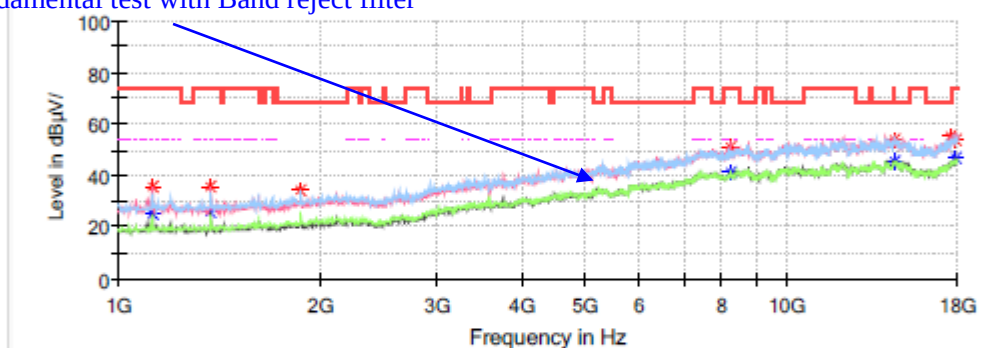
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	34.69	—	74.00	39.31	V	-15.6
1122.400000	—	25.02	54.00	28.98	V	-15.6
1374.000000	33.94	—	74.00	40.06	H	-14.6
1374.000000	—	25.06	54.00	28.94	H	-14.6
1873.800000	33.04	—	68.20	35.16	H	-12.3
2128.800000	37.26	—	68.20	30.94	H	-11.3
7667.400000	—	40.34	54.00	13.66	H	3.4
7667.400000	50.24	—	74.00	23.76	H	3.4
14484.400000	—	45.53	54.00	8.47	V	11.1
14484.400000	53.72	—	74.00	20.28	V	11.1
17925.200000	—	46.75	54.00	7.25	V	13.4
17925.200000	54.69	—	74.00	19.31	V	13.4

802.11ac80 Mode:**Low Channel: 5530MHz****Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ac80 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.1°C
 Humidity: 46%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

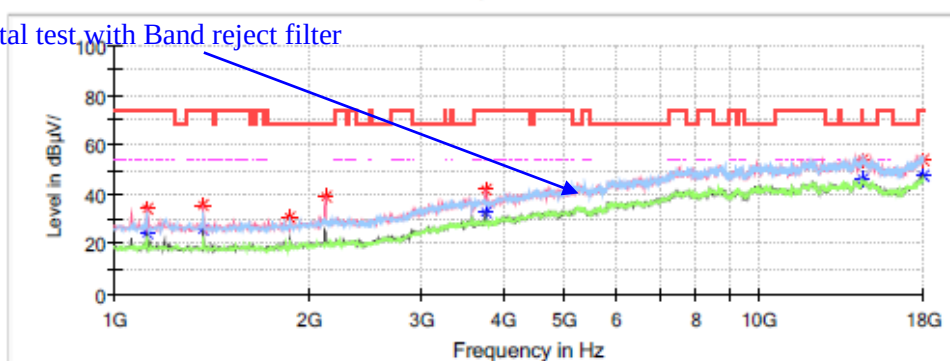
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.14	54.00	28.86	V	-15.6
1122.400000	35.52	—	74.00	38.48	V	-15.6
1374.000000	35.57	—	74.00	38.43	H	-14.6
1374.000000	—	26.18	54.00	27.82	H	-14.6
1873.800000	33.96	—	68.20	34.24	H	-12.3
8214.800000	—	41.55	54.00	12.45	H	4.0
8214.800000	51.05	—	74.00	22.95	H	4.0
14477.600000	—	45.68	54.00	8.32	H	11.1
14477.600000	53.78	—	74.00	20.22	H	11.1
17605.600000	55.01	—	68.20	13.19	H	11.4
17925.200000	—	46.63	54.00	7.37	H	13.4
17925.200000	53.77	—	74.00	20.23	H	13.4

High Channel: 5610MHz**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ac80 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.1°C
 Humidity: 46%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

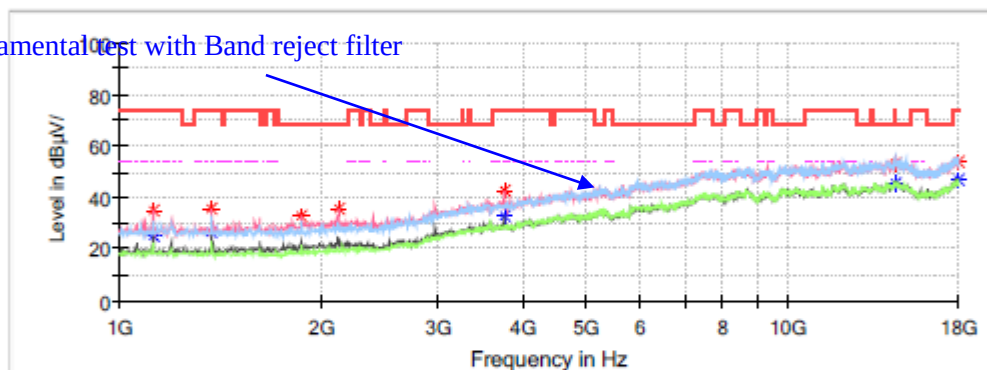
Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	24.69	54.00	29.31	V	-15.6
1122.400000	34.24	—	74.00	39.76	V	-15.6
1374.000000	35.45	—	74.00	38.55	V	-14.6
1374.000000	—	25.54	54.00	28.46	V	-14.6
1873.800000	31.10	—	68.20	37.10	V	-12.3
2125.400000	38.85	—	68.20	29.35	V	-11.3
3760.800000	41.86	—	74.00	32.14	V	-5.6
3760.800000	—	32.56	54.00	21.44	V	-5.6
14484.400000	—	46.29	54.00	7.71	H	11.1
14484.400000	53.95	—	74.00	20.05	H	11.1
17989.800000	53.58	—	74.00	20.42	H	13.8
17989.800000	—	47.24	54.00	6.76	H	13.8

802.11ax20 Mode:**Low Channel: 5500MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

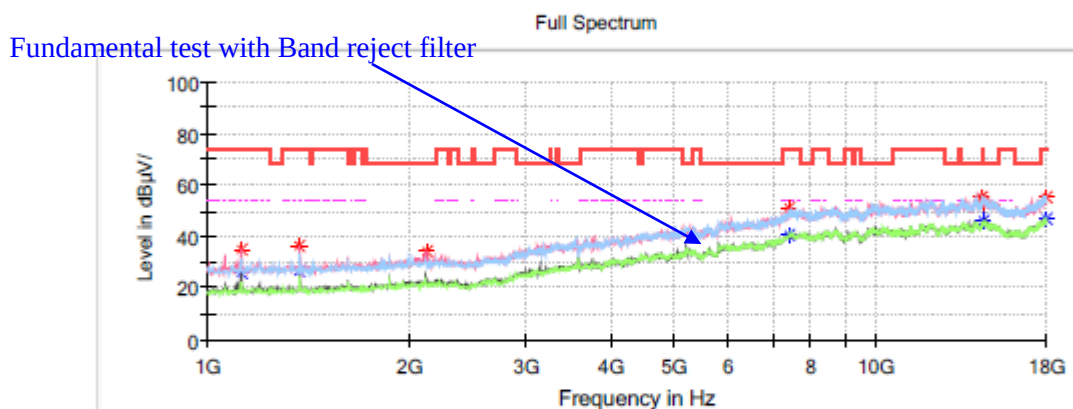
Fundamental test with Band reject filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.20	54.00	28.80	V	-15.6
1122.400000	35.12	—	74.00	38.88	V	-15.6
1374.000000	—	26.85	54.00	27.15	V	-14.6
1374.000000	35.40	—	74.00	38.60	V	-14.6
1873.800000	32.86	—	68.20	35.34	V	-12.3
2128.800000	35.98	—	68.20	32.22	V	-11.3
3760.800000	42.36	—	74.00	31.64	V	-5.6
3760.800000	—	32.60	54.00	21.40	V	-5.6
14491.200000	—	45.69	54.00	8.31	H	11.1
14491.200000	53.28	—	74.00	20.72	H	11.1
17996.600000	54.11	—	74.00	19.89	H	13.8
17996.600000	—	47.10	54.00	6.90	H	13.8

Middle Channel: 5600MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

**Critical Freqs**

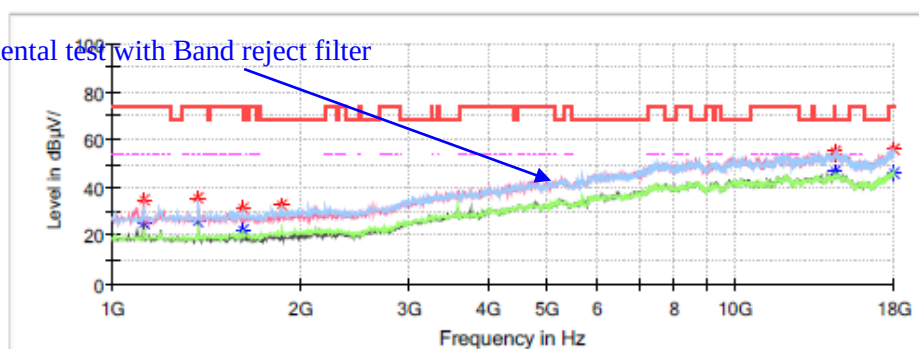
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	34.99	—	74.00	39.01	H	-15.6
1122.400000	—	25.69	54.00	28.31	H	-15.6
1374.000000	36.69	—	74.00	37.31	V	-14.6
1374.000000	—	26.73	54.00	27.27	V	-14.6
2128.800000	34.34	—	68.20	33.86	V	-11.3
7429.400000	—	40.40	54.00	13.60	V	3.1
7429.400000	50.85	—	74.00	23.15	V	3.1
14430.000000	55.38	—	68.20	12.82	V	11.0
14491.200000	53.06	—	74.00	20.94	V	11.1
14491.200000	—	45.85	54.00	8.15	V	11.1
17972.800000	—	46.61	54.00	7.39	H	13.7
17972.800000	55.04	—	74.00	18.96	H	13.7

High Channel: 5700MHz**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ax20 mode High Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.1°C
Humidity:	46%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

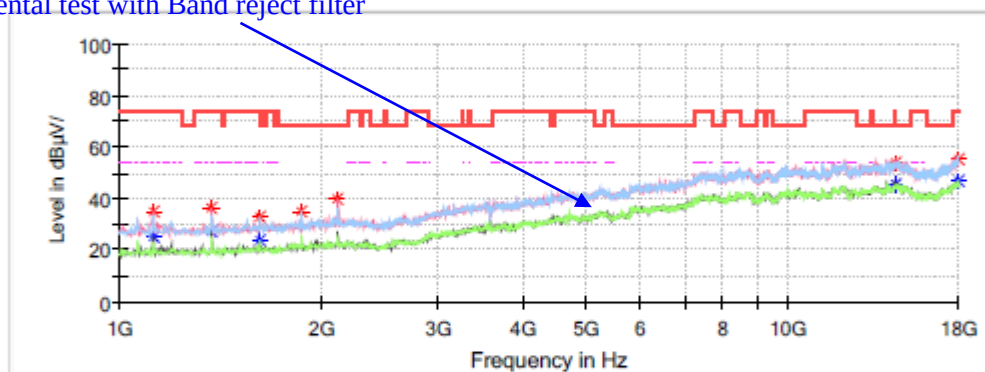
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.05	54.00	28.95	V	-15.6
1122.400000	34.62	—	74.00	39.38	V	-15.6
1374.000000	—	26.04	54.00	27.96	V	-14.6
1374.000000	35.90	—	74.00	38.10	V	-14.6
1622.200000	—	22.24	54.00	31.76	H	-13.5
1622.200000	31.53	—	74.00	42.47	H	-13.5
1873.800000	32.80	—	68.20	35.40	H	-12.3
14447.000000	55.27	—	68.20	12.93	H	11.1
14494.600000	54.11	—	74.00	19.89	H	11.1
14494.600000	—	46.53	54.00	7.47	H	11.1
17972.800000	—	46.43	54.00	7.57	H	13.7
17972.800000	56.01	—	74.00	17.99	H	13.7

802.11ax40 Mode:**Low Channel: 5510MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ax40 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.1°C
Humidity:	46%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/7

Fundamental test with Band reject filter

Full Spectrum

**Critical Freqs**

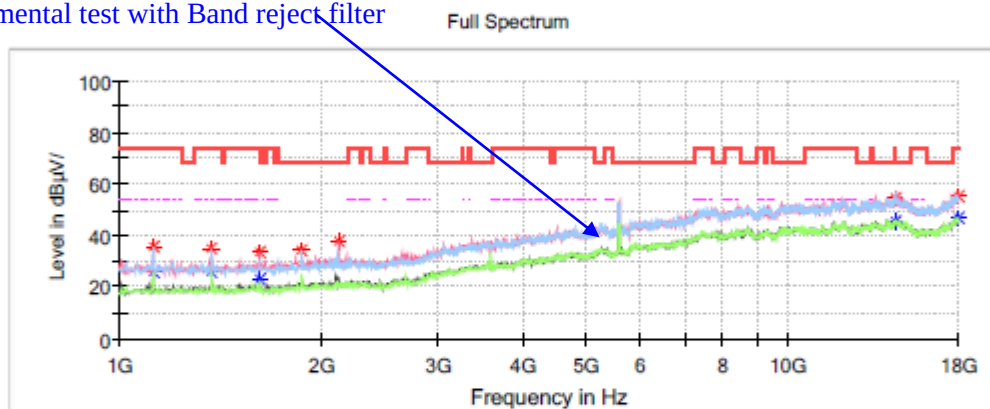
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.49	54.00	28.51	V	-15.6
1122.400000	34.89	—	74.00	39.11	V	-15.6
1374.000000	—	27.30	54.00	26.70	V	-14.6
1374.000000	36.21	—	74.00	37.79	V	-14.6
1622.200000	—	23.47	54.00	30.53	H	-13.5
1622.200000	33.10	—	74.00	40.90	H	-13.5
1873.800000	34.73	—	68.20	33.47	H	-12.3
2122.000000	39.67	—	68.20	28.53	H	-11.3
14491.200000	53.51	—	74.00	20.49	H	11.1
14491.200000	—	45.49	54.00	8.51	H	11.1
17986.400000	55.13	—	74.00	18.87	H	13.7
17986.400000	—	46.64	54.00	7.36	H	13.7

Middle Channel: 5590MHz

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Fundamental test with Band reject filter



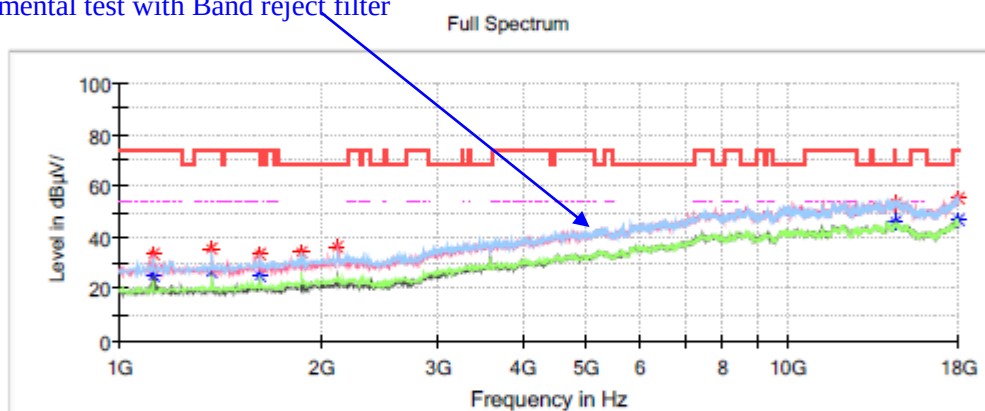
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.86	54.00	28.14	H	-15.6
1122.400000	35.58	—	74.00	38.42	H	-15.6
1374.000000	—	25.71	54.00	28.29	H	-14.6
1374.000000	34.97	—	74.00	39.03	H	-14.6
1622.200000	—	23.38	54.00	30.62	V	-13.5
1622.200000	33.27	—	74.00	40.73	V	-13.5
1873.800000	34.48	—	68.20	33.72	H	-12.3
2128.800000	37.47	—	68.20	30.73	H	-11.3
14491.200000	—	45.80	54.00	8.20	H	11.1
14491.200000	54.47	—	74.00	19.53	H	11.1
17976.200000	55.42	—	74.00	18.58	V	13.7
17976.200000	—	46.97	54.00	7.03	V	13.7

High Channel: 5670MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Fundamental test with Band reject filter

**Critical Freqs**

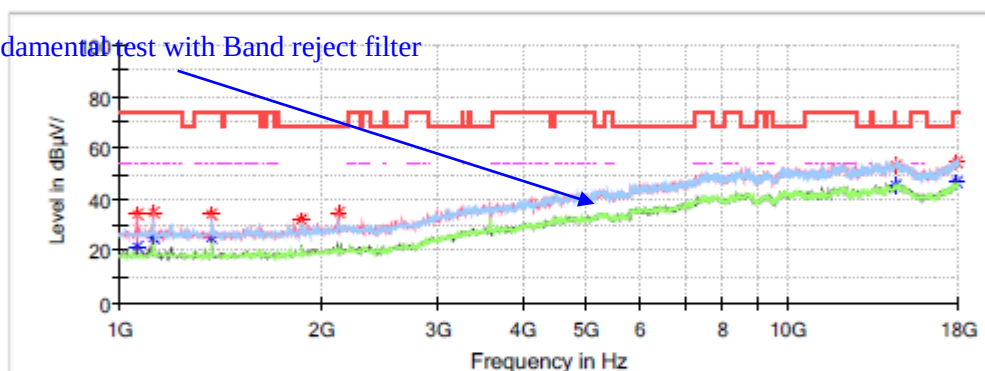
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.29	54.00	28.71	V	-15.6
1122.400000	33.78	—	74.00	40.22	V	-15.6
1374.000000	—	26.43	54.00	27.57	V	-14.6
1374.000000	35.72	—	74.00	38.28	V	-14.6
1622.200000	—	25.34	54.00	28.66	H	-13.5
1622.200000	33.39	—	74.00	40.61	H	-13.5
1873.800000	34.09	—	68.20	34.11	H	-12.3
2122.000000	36.29	—	68.20	31.91	H	-11.3
14491.200000	53.15	—	74.00	20.85	H	11.1
14491.200000	—	46.03	54.00	7.97	H	11.1
17969.400000	55.18	—	74.00	18.82	H	13.6
17969.400000	—	46.91	54.00	7.09	H	13.6

802.11ax80 Mode:**Low Channel: 5530MHz****Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ax80 mode Low Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.1℃
 Humidity: 46%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

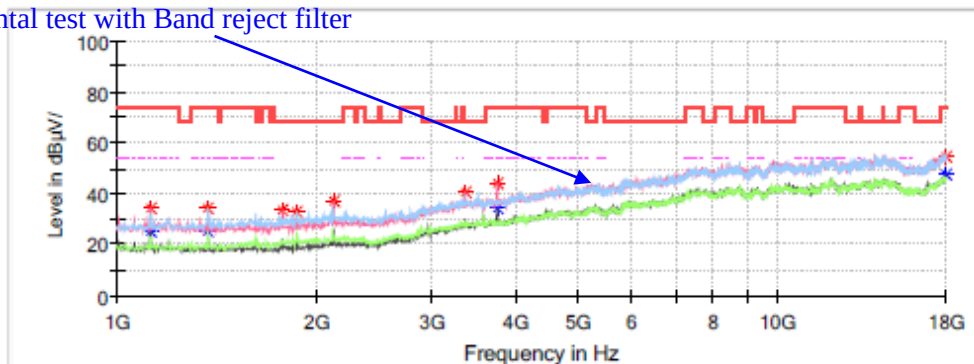
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	21.34	54.00	32.66	H	-15.9
1061.200000	34.10	—	74.00	39.90	H	-15.9
1122.400000	—	25.09	54.00	28.91	H	-15.6
1122.400000	34.73	—	74.00	39.27	H	-15.6
1374.000000	—	24.92	54.00	29.08	V	-14.6
1374.000000	34.15	—	74.00	39.85	V	-14.6
1873.800000	31.85	—	68.20	36.35	V	-12.3
2132.200000	34.75	—	68.20	33.45	V	-11.3
14498.000000	53.40	—	74.00	20.60	V	11.1
14498.000000	—	45.20	54.00	8.80	V	11.1
17921.800000	54.45	—	74.00	19.55	V	13.4
17921.800000	—	47.07	54.00	6.93	V	13.4

High Channel: 5610MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax80 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

Fundamental test with Band reject filter

**Critical Freqs**

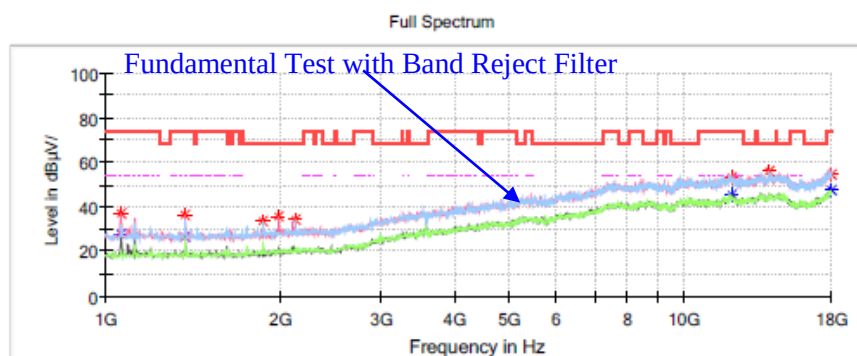
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.18	54.00	28.82	V	-15.6
1122.400000	34.26	—	74.00	39.74	V	-15.6
1374.000000	—	25.04	54.00	28.96	H	-14.6
1374.000000	34.38	—	74.00	39.62	H	-14.6
1782.000000	33.27	—	68.20	34.93	H	-12.7
1873.800000	33.18	—	68.20	35.02	H	-12.3
2125.400000	37.37	—	68.20	30.83	H	-11.3
3366.400000	40.89	—	68.20	27.31	H	-6.8
3760.800000	44.21	—	74.00	29.79	H	-5.6
3760.800000	—	34.36	54.00	19.64	H	-5.6
17996.600000	54.58	—	74.00	19.42	H	13.8
17996.600000	—	47.37	54.00	6.63	H	13.8

1GHz-18GHz(5725-5850MHz Band):

Chain 0

802.11a Mode:**Low Channel: 5745MHz****Common Information**

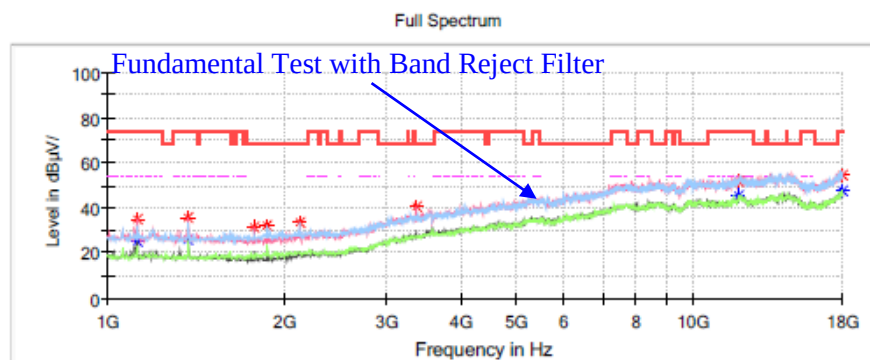
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	37.27	—	74.00	36.73	V	-15.9
1064.600000	—	27.95	54.00	26.05	V	-15.9
1374.000000	—	26.71	54.00	27.29	H	-14.6
1374.000000	36.67	—	74.00	37.33	H	-14.6
1873.800000	33.66	—	68.20	34.54	H	-12.3
1996.200000	35.41	—	68.20	32.79	H	-11.7
2128.800000	34.19	—	68.20	34.01	H	-11.3
12077.200000	53.02	—	74.00	20.98	H	9.0
12077.200000	—	45.51	54.00	8.49	H	9.0
14062.800000	55.90	—	68.20	12.30	H	10.7
17993.200000	54.82	—	74.00	19.18	H	13.8
17993.200000	—	47.45	54.00	6.55	H	13.8

Middle Channel: 5785MHz**Common Information**

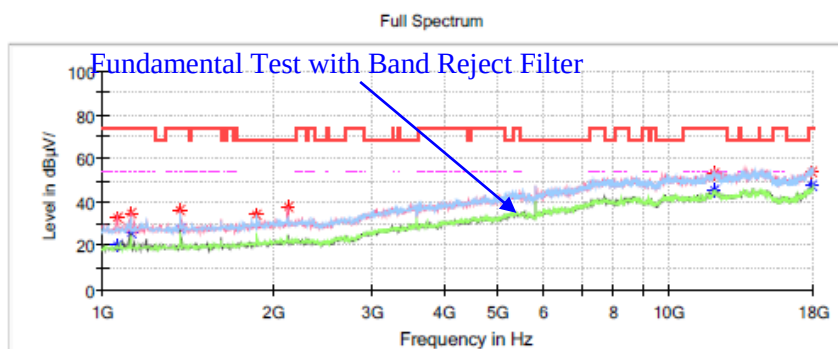
Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/8

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	24.98	54.00	29.02	V	-15.6
1122.400000	34.90	—	74.00	39.10	V	-15.6
1374.000000	—	25.71	54.00	28.29	H	-14.6
1374.000000	35.85	—	74.00	38.15	H	-14.6
1778.600000	31.58	—	68.20	36.62	H	-12.7
1873.800000	32.14	—	68.20	36.06	H	-12.3
2132.200000	33.35	—	68.20	34.85	H	-11.3
3366.400000	40.67	—	68.20	27.53	H	-6.8
11985.400000	—	45.55	54.00	8.45	H	9.0
11985.400000	52.06	—	74.00	21.94	H	9.0
17969.400000	54.75	—	74.00	19.25	H	13.6
17969.400000	—	47.27	54.00	6.73	H	13.6

High Channel: 5825MHz**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/8

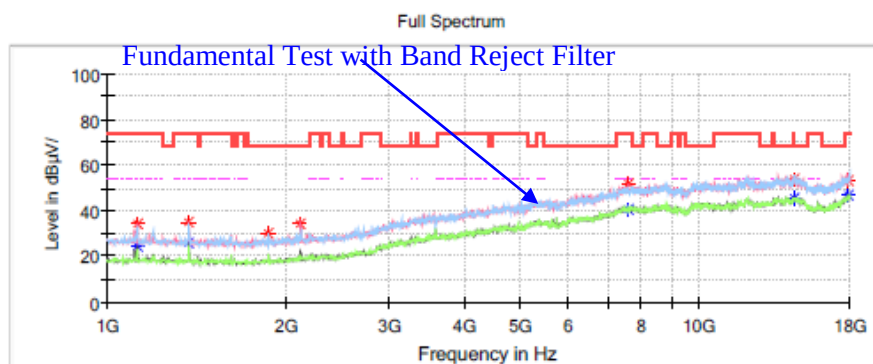
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	20.46	54.00	33.54	V	-15.9
1064.600000	32.97	—	74.00	41.03	V	-15.9
1122.400000	—	25.77	54.00	28.23	V	-15.6
1122.400000	35.10	—	74.00	38.90	V	-15.6
1374.000000	—	27.65	54.00	26.35	H	-14.6
1374.000000	36.57	—	74.00	37.43	H	-14.6
1873.800000	34.40	—	68.20	33.80	H	-12.3
2125.400000	37.57	—	68.20	30.63	H	-11.3
12033.000000	52.82	—	74.00	21.18	H	9.0
12033.000000	—	45.46	54.00	8.54	H	9.0
17877.600000	53.83	—	74.00	20.17	H	13.1
17877.600000	—	47.42	54.00	6.58	H	13.1

Chain 1

802.11a Mode:**Low Channel: 5745MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

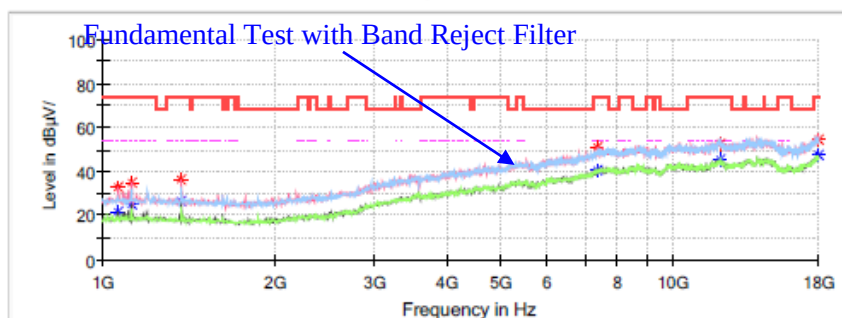
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	33.92	—	74.00	40.08	V	-15.6
1122.400000	—	24.79	54.00	29.21	V	-15.6
1374.000000	35.21	—	74.00	38.79	V	-14.6
1374.000000	—	25.54	54.00	28.46	V	-14.6
1873.800000	29.90	—	68.20	38.30	V	-12.3
2122.000000	34.59	—	68.20	33.61	V	-11.3
7582.400000	—	40.26	54.00	13.74	V	3.3
7582.400000	51.45	—	74.00	22.55	V	3.3
14481.000000	—	45.53	54.00	8.47	H	11.1
14481.000000	54.01	—	74.00	19.99	H	11.1
17938.800000	—	46.84	54.00	7.16	H	13.5
17938.800000	52.89	—	74.00	21.11	H	13.5

Middle Channel: 5785MHz**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11a mode Middle Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/8

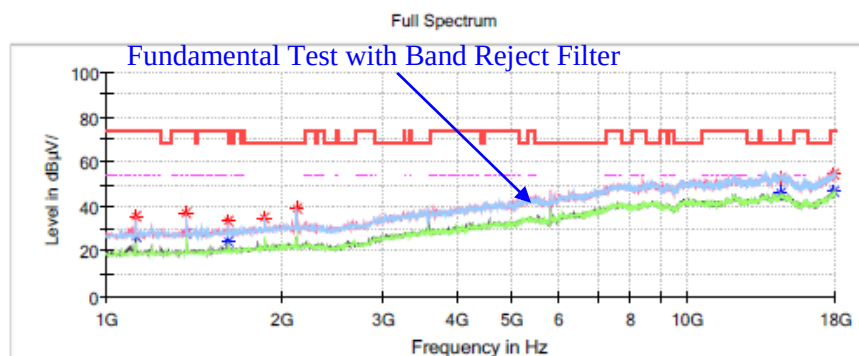
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	21.41	54.00	32.59	V	-15.9
1064.600000	32.99	—	74.00	41.01	V	-15.9
1122.400000	—	24.99	54.00	29.01	V	-15.6
1122.400000	34.63	—	74.00	39.37	V	-15.6
1374.000000	—	26.44	54.00	27.56	V	-14.6
1374.000000	36.71	—	74.00	37.29	V	-14.6
7381.800000	50.88	—	74.00	23.12	V	2.9
7381.800000	—	40.73	54.00	13.27	V	2.9
12067.000000	52.62	—	74.00	21.38	H	9.0
12067.000000	—	45.67	54.00	8.33	H	9.0
17996.600000	54.79	—	74.00	19.21	H	13.8
17996.600000	—	47.45	54.00	6.55	H	13.8

High Channel: 5825MHz**Common Information**

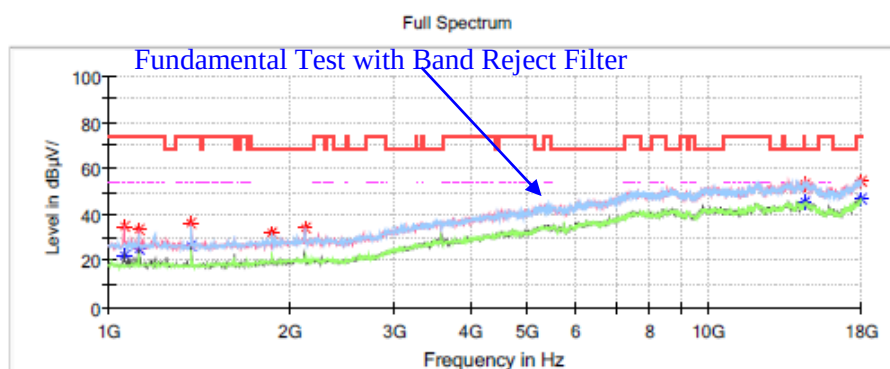
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	26.61	54.00	27.39	V	-15.6
1122.400000	35.91	—	74.00	38.09	V	-15.6
1374.000000	—	27.92	54.00	26.08	V	-14.6
1374.000000	37.27	—	74.00	36.73	V	-14.6
1622.200000	—	24.51	54.00	29.49	H	-13.5
1622.200000	33.28	—	74.00	40.72	H	-13.5
1873.800000	35.07	—	68.20	33.13	H	-12.3
2128.800000	39.10	—	68.20	29.10	H	-11.3
14498.000000	52.71	—	74.00	21.29	H	11.1
14498.000000	—	45.86	54.00	8.14	H	11.1
17942.200000	54.41	—	74.00	19.59	V	13.5
17942.200000	—	46.96	54.00	7.04	V	13.5

**MIMO(Chain 0+Chain 1):
802.11ac20 Mode:****Low Channel: 5745MHz****Common Information**

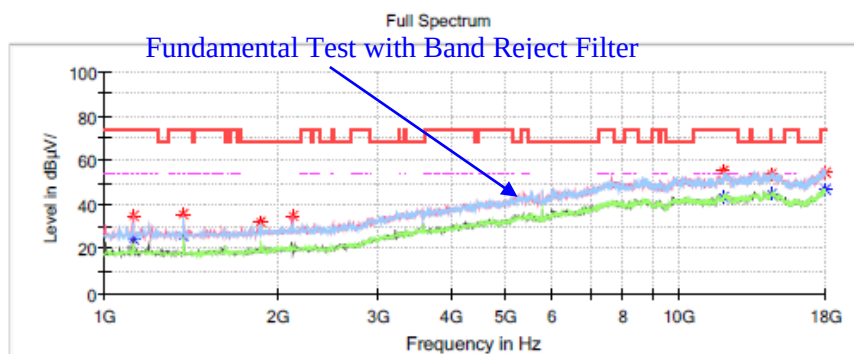
Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5℃
Humidity:	45%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/8

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	22.28	54.00	31.72	V	-15.9
1061.200000	35.15	—	74.00	38.85	V	-15.9
1122.400000	—	24.83	54.00	29.17	V	-15.6
1122.400000	33.87	—	74.00	40.13	V	-15.6
1374.000000	—	26.26	54.00	27.74	H	-14.6
1374.000000	36.09	—	74.00	37.91	H	-14.6
1873.800000	32.39	—	68.20	35.81	H	-12.3
2125.400000	34.43	—	68.20	33.77	H	-11.3
14491.200000	—	45.50	54.00	8.50	H	11.1
14491.200000	52.86	—	74.00	21.14	H	11.1
17979.600000	54.81	—	74.00	19.19	H	13.7
17979.600000	—	46.72	54.00	7.28	H	13.7

Middle Channel: 5785MHz**Common Information**

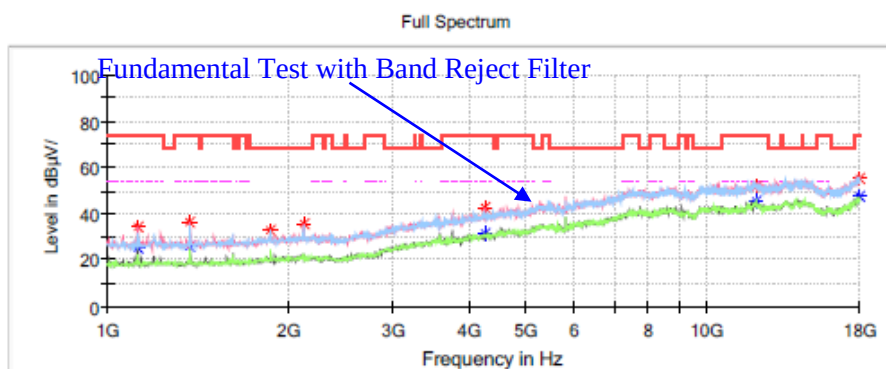
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	34.93	—	74.00	39.07	V	-15.6
1122.400000	—	24.77	54.00	29.23	V	-15.6
1374.000000	35.76	—	74.00	38.24	V	-14.6
1374.000000	—	26.08	54.00	27.92	V	-14.6
1873.800000	32.09	—	68.20	36.11	V	-12.3
2128.800000	34.94	—	68.20	33.26	V	-11.3
11971.800000	—	43.42	54.00	10.58	V	9.0
11971.800000	55.16	—	74.00	18.84	V	9.0
14498.000000	53.53	—	74.00	20.47	H	11.1
14498.000000	—	44.98	54.00	9.02	H	11.1
17996.600000	54.70	—	74.00	19.30	H	13.8
17996.600000	—	47.06	54.00	6.94	H	13.8

High Channel: 5825MHz**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ac20 mode High Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5°C
Humidity:	45%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/8

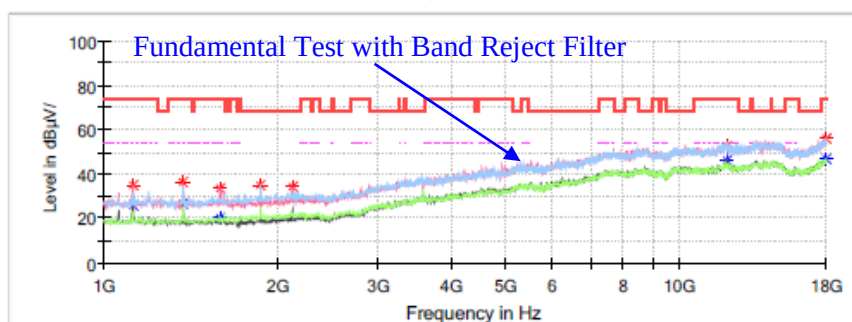
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.15	54.00	28.85	V	-15.6
1122.400000	34.15	—	74.00	39.85	V	-15.6
1374.000000	—	26.05	54.00	27.95	V	-14.6
1374.000000	36.38	—	74.00	37.62	V	-14.6
1873.800000	33.07	—	68.20	35.13	V	-12.3
2128.800000	35.87	—	68.20	32.33	V	-11.3
4264.000000	—	31.25	54.00	22.75	V	-4.7
4264.000000	42.97	—	74.00	31.03	V	-4.7
12067.000000	51.97	—	74.00	22.03	H	9.0
12067.000000	—	45.17	54.00	8.83	H	9.0
17966.000000	55.43	—	74.00	18.57	V	13.6
17966.000000	—	47.38	54.00	6.62	V	13.6

802.11ac40 Mode:**Low Channel: 5755MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

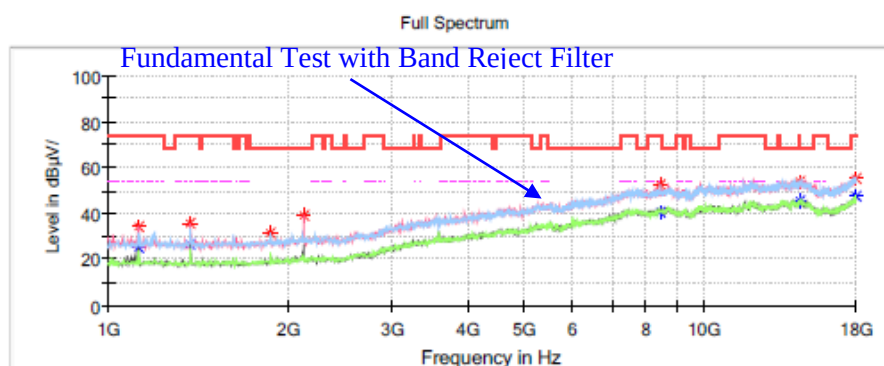
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.59	54.00	28.41	V	-15.6
1122.400000	34.92	—	74.00	39.08	V	-15.6
1374.000000	—	26.40	54.00	27.60	V	-14.6
1374.000000	36.10	—	74.00	37.90	V	-14.6
1595.000000	—	20.38	54.00	33.62	H	-13.6
1595.000000	33.42	—	74.00	40.58	H	-13.6
1873.800000	34.68	—	68.20	33.52	H	-12.3
2125.400000	33.99	—	68.20	34.21	H	-11.3
12067.000000	—	46.10	54.00	7.90	H	9.0
12067.000000	52.37	—	74.00	21.63	H	9.0
17972.800000	55.78	—	74.00	18.22	H	13.7
17972.800000	—	46.75	54.00	7.25	H	13.7

High Channel: 5795MHz**Common Information**

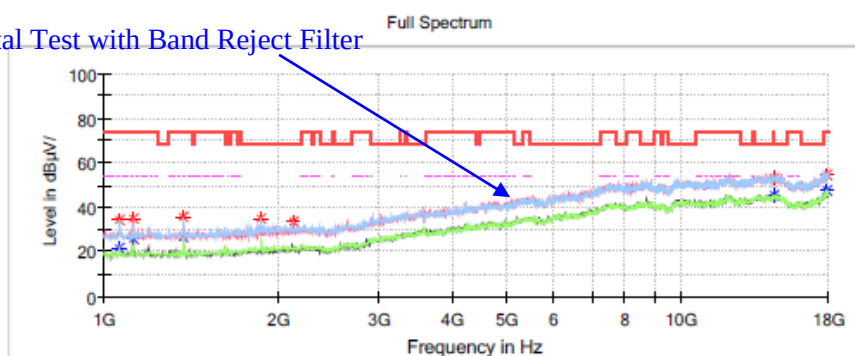
Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ac40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.5°C
 Humidity: 45%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/8

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	34.37	—	74.00	39.63	V	-15.6
1122.400000	—	25.23	54.00	28.77	V	-15.6
1374.000000	35.63	—	74.00	38.37	H	-14.6
1374.000000	—	26.40	54.00	27.60	H	-14.6
1873.800000	31.33	—	68.20	36.87	H	-12.3
2128.800000	38.89	—	68.20	29.31	H	-11.3
8432.400000	—	40.63	54.00	13.37	H	4.5
8432.400000	52.25	—	74.00	21.75	H	4.5
14494.600000	53.72	—	74.00	20.28	H	11.1
14494.600000	—	45.59	54.00	8.41	H	11.1
17993.200000	—	47.25	54.00	6.75	H	13.8
17993.200000	55.20	—	74.00	18.80	H	13.8

802.11ac80 Mode:**Channel: 5775MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Fundamental Test with Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	21.38	54.00	32.62	H	-15.9
1064.600000	34.06	—	74.00	39.94	H	-15.9
1122.400000	—	25.81	54.00	28.19	H	-15.6
1122.400000	34.64	—	74.00	39.36	H	-15.6
1374.000000	—	26.52	54.00	27.48	V	-14.6
1374.000000	35.63	—	74.00	38.37	V	-14.6
1873.800000	34.96	—	68.20	33.24	V	-12.3
2125.400000	33.36	—	68.20	34.84	V	-11.3
14484.400000	52.93	—	74.00	21.07	V	11.1
14484.400000	—	45.46	54.00	8.54	V	11.1
17915.000000	54.39	—	74.00	19.61	V	13.3
17915.000000	—	47.28	54.00	6.72	V	13.3

802.11ax20 Mode:**Low Channel: 5745MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

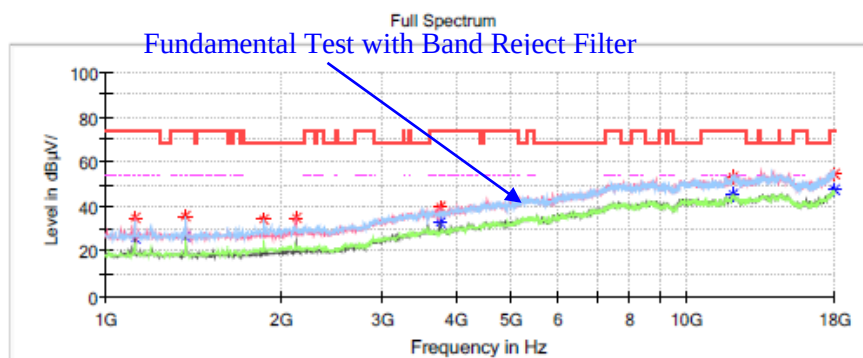
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	—	21.71	54.00	32.29	V	-15.9
1064.600000	34.47	—	74.00	39.53	V	-15.9
1122.400000	—	25.35	54.00	28.65	V	-15.6
1122.400000	34.39	—	74.00	39.61	V	-15.6
1374.000000	—	26.46	54.00	27.54	V	-14.6
1374.000000	35.25	—	74.00	38.75	V	-14.6
1873.800000	30.72	—	68.20	37.48	V	-12.3
2125.400000	33.00	—	68.20	35.20	V	-11.3
12019.400000	53.71	—	74.00	20.29	V	9.0
12019.400000	—	45.32	54.00	8.68	V	9.0
17966.000000	54.98	—	74.00	19.02	H	13.6
17966.000000	—	47.05	54.00	6.95	H	13.6

Middle Channel: 5785MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Middle Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

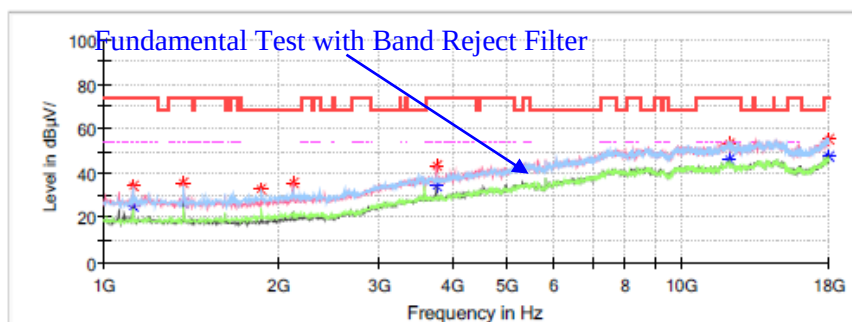
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µV/m)	Average (dB µV/m)	Limit (dB µV/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.59	54.00	28.41	V	-15.6
1122.400000	34.97	—	74.00	39.03	V	-15.6
1374.000000	—	26.36	54.00	27.64	V	-14.6
1374.000000	35.67	—	74.00	38.33	V	-14.6
1873.800000	34.17	—	68.20	34.03	V	-12.3
2125.400000	35.18	—	68.20	33.02	V	-11.3
3760.800000	—	32.57	54.00	21.43	V	-5.6
3760.800000	39.93	—	74.00	34.07	V	-5.6
12002.400000	53.31	—	74.00	20.69	H	9.0
12002.400000	—	45.70	54.00	8.30	H	9.0
17996.600000	54.62	—	74.00	19.38	H	13.8
17996.600000	—	47.30	54.00	6.70	H	13.8

High Channel: 5825MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum

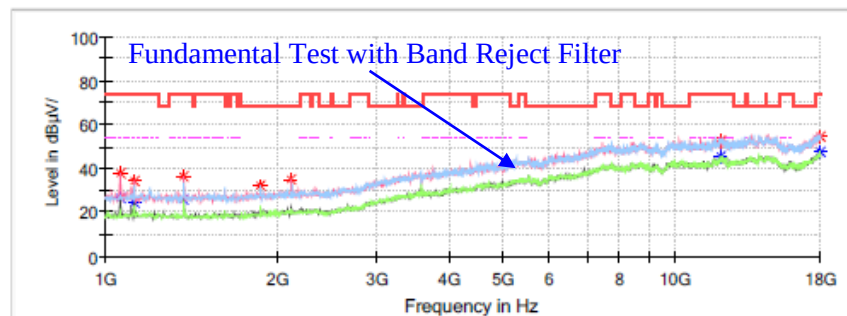
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	24.92	54.00	29.08	V	-15.6
1122.400000	34.32	—	74.00	39.68	V	-15.6
1374.000000	—	26.32	54.00	27.68	V	-14.6
1374.000000	35.66	—	74.00	38.34	V	-14.6
1873.800000	33.21	—	68.20	34.99	V	-12.3
2125.400000	35.49	—	68.20	32.71	V	-11.3
3760.800000	—	34.53	54.00	19.47	V	-5.6
3760.800000	43.48	—	74.00	30.52	V	-5.6
12094.200000	—	46.21	54.00	7.79	H	9.0
12094.200000	52.92	—	74.00	21.08	H	9.0
17993.200000	55.23	—	74.00	18.77	H	13.8
17993.200000	—	47.33	54.00	6.67	H	13.8

802.11ax40 Mode:**Low Channel: 5755MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

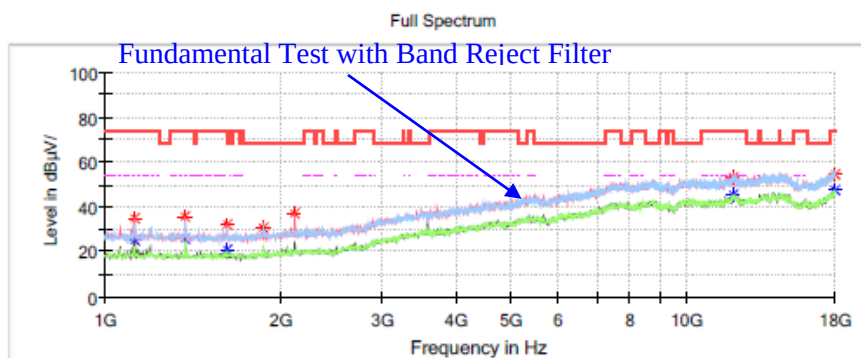
Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	—	26.47	54.00	27.53	V	-15.9
1061.200000	37.45	—	74.00	36.55	V	-15.9
1122.400000	—	24.65	54.00	29.35	V	-15.6
1122.400000	34.38	—	74.00	39.62	V	-15.6
1374.000000	—	25.87	54.00	28.13	H	-14.6
1374.000000	36.52	—	74.00	37.48	H	-14.6
1873.800000	32.15	—	68.20	36.05	H	-12.3
2122.000000	34.86	—	68.20	33.34	H	-11.3
12060.200000	52.55	—	74.00	21.45	H	9.0
12060.200000	—	45.74	54.00	8.26	H	9.0
17993.200000	54.73	—	74.00	19.27	H	13.8
17993.200000	—	47.28	54.00	6.72	H	13.8

High Channel: 5795MHz**Common Information**

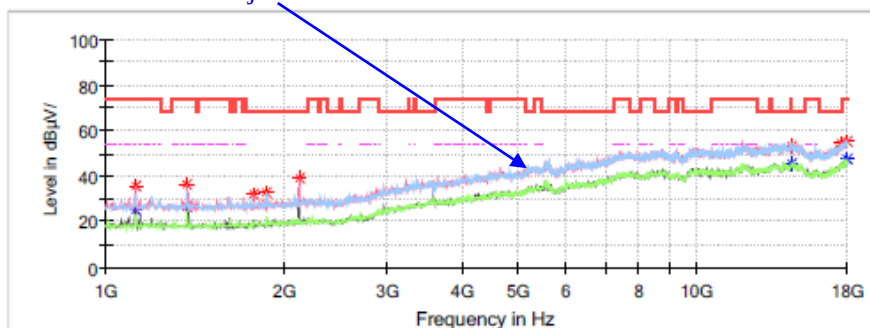
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

**Critical Freqs**

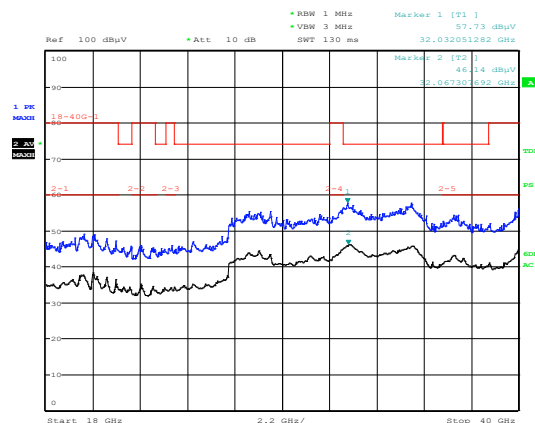
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	—	25.20	54.00	28.80	V	-15.6
1122.400000	34.92	—	74.00	39.08	V	-15.6
1374.000000	—	25.88	54.00	28.12	V	-14.6
1374.000000	35.42	—	74.00	38.58	V	-14.6
1622.200000	—	21.22	54.00	32.78	H	-13.5
1622.200000	31.82	—	74.00	42.18	H	-13.5
1873.800000	30.54	—	68.20	37.66	H	-12.3
2122.000000	37.24	—	68.20	30.96	H	-11.3
11995.600000	—	45.75	54.00	8.25	H	9.0
11995.600000	53.09	—	74.00	20.91	H	9.0
17986.400000	54.68	—	74.00	19.32	H	13.7
17986.400000	—	47.61	54.00	6.39	H	13.7

802.11ax80 Mode:**Channel: 5775MHz****Common Information**

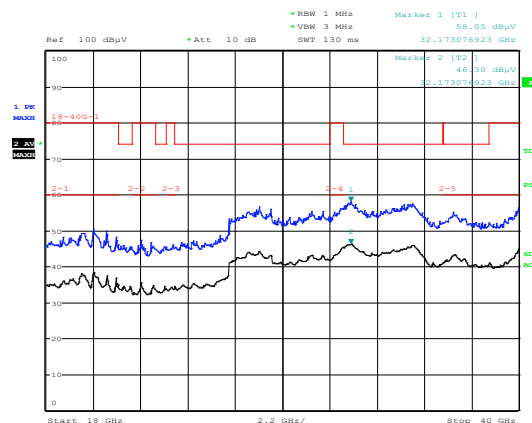
Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ax80
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5℃
Humidity:	45%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/8

Fundamental Test with Band Reject Filter Full Spectrum**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1122.400000	35.51	—	74.00	38.49	V	-15.6
1122.400000	—	25.28	54.00	28.72	V	-15.6
1374.000000	36.43	—	74.00	37.57	H	-14.6
1374.000000	—	26.33	54.00	27.67	H	-14.6
1778.600000	31.82	—	68.20	36.38	H	-12.7
1873.800000	33.17	—	68.20	35.03	H	-12.3
2128.800000	39.10	—	68.20	29.10	H	-11.3
14494.600000	—	45.37	54.00	8.63	H	11.1
14494.600000	52.96	—	74.00	21.04	H	11.1
17524.000000	54.33	—	68.20	13.87	H	10.9
17969.400000	—	47.41	54.00	6.59	H	13.6
17969.400000	55.39	—	74.00	18.61	H	13.6

18GHz-40GHz:**Transmitting in Chain 0 + Chain 1 802.11ac40 mode 5795MHz (maximum output power)****Horizontal**

Project No : RKSA260428001 Tester : Hugh Wu
 Date: 10.JUN.2026 15:24:54

Vertical

Project No : RKSA260428001 Tester : Hugh Wu
 Date: 10.JUN.2026 15:59:36

Note: The test distance is 1.5m.

Extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB

Limit = Specific limits(dBμV/m) + distance extrapolation factor (6 dB)

Frequency (GHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
32.17	58.05	74.2	16.15	V	23.31
32.03	57.73	74.2	16.47	H	23.2

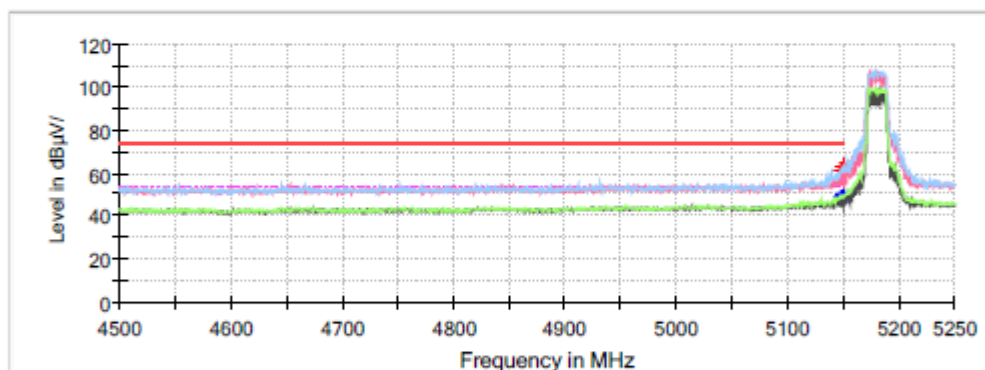
Restricted Bands Emissions Test (5150-5250MHz Band):

Chain 0

802.11a Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	21.4℃
Humidity:	45%
Atmospheric Pressure:	100.9kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/5

Full Spectrum

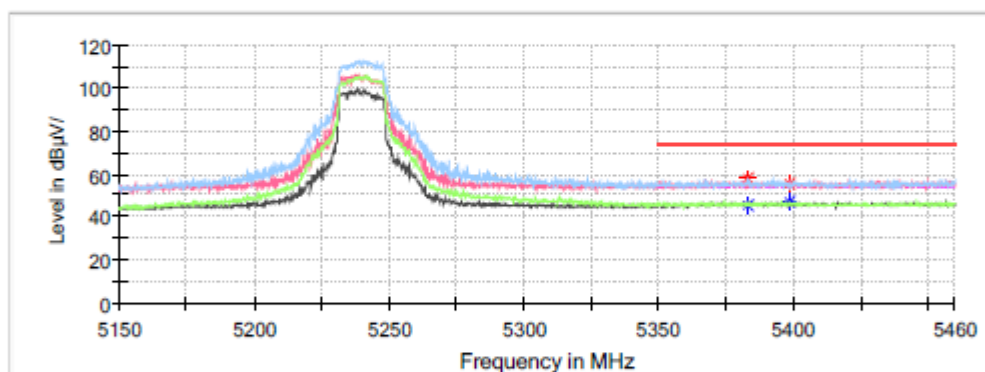
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5147.400000	—	49.05	54.00	4.95	H	7.6
5147.400000	61.66	—	74.00	12.34	H	7.6
5149.200000	—	49.58	54.00	4.42	H	7.6
5149.200000	62.99	—	74.00	11.01	H	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum



Critical Freqs

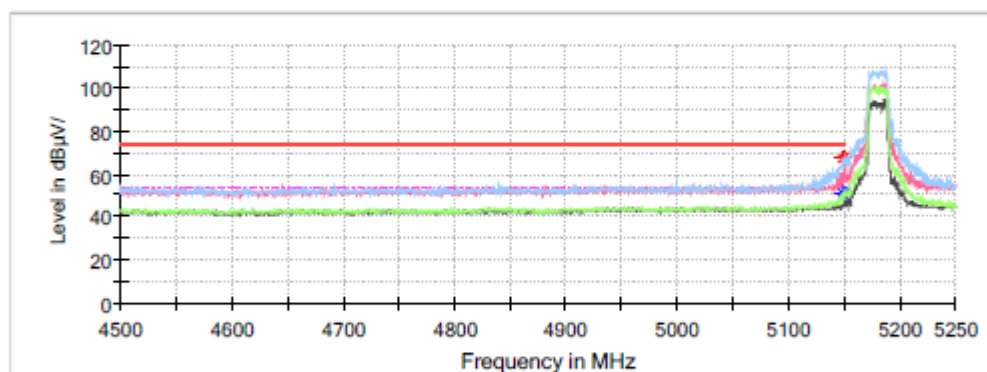
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5383.120000	57.60	—	74.00	16.40	H	8.2
5383.120000	—	45.66	54.00	8.34	H	8.2
5398.620000	55.34	—	74.00	18.66	V	8.3
5398.620000	—	46.68	54.00	7.32	V	8.3

Chain 1

802.11a Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	21.4℃
Humidity:	45%
Atmospheric Pressure:	100.9kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/5

Full Spectrum

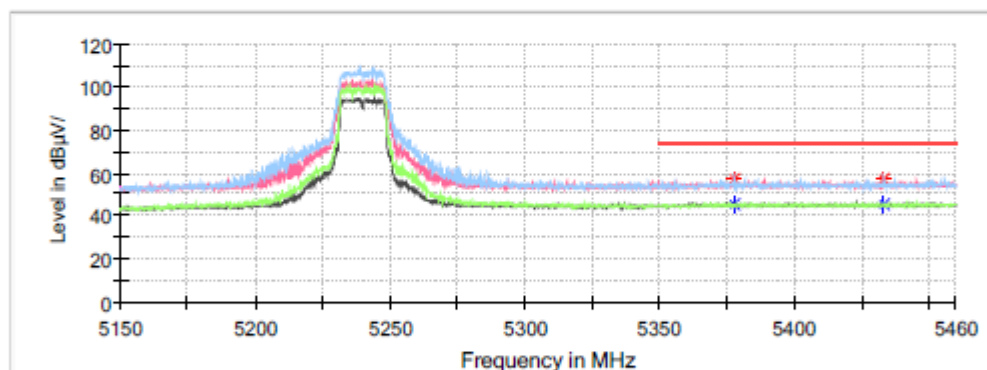
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5148.300000	—	51.11	54.00	2.89	H	7.6
5148.300000	67.16	—	74.00	6.84	H	7.6
5149.500000	—	50.27	54.00	3.73	H	7.6
5149.500000	67.25	—	74.00	6.75	H	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum



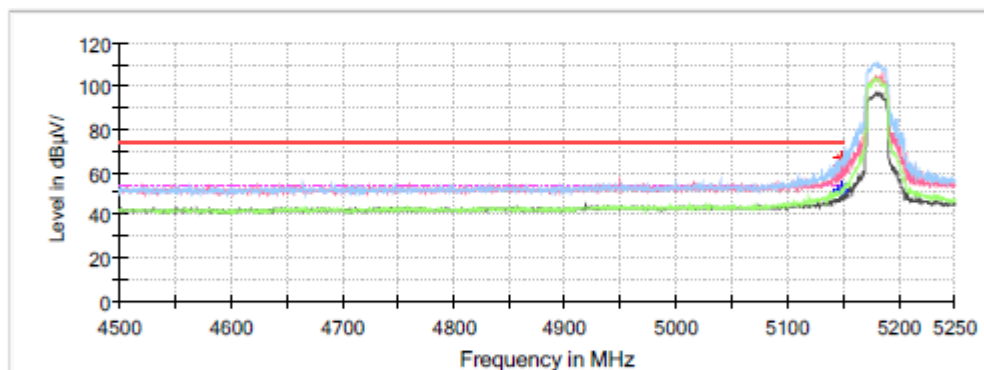
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5378.036000	—	45.61	54.00	8.39	V	8.2
5378.036000	56.97	—	74.00	17.03	V	8.2
5433.588000	—	45.10	54.00	8.90	H	8.4
5433.588000	57.13	—	74.00	16.87	H	8.4

MIMO(Chain 0+Chain 1):**802.11ac20 Mode:****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	21.4℃
Humidity:	45%
Atmospheric Pressure:	100.9kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/5

Full Spectrum

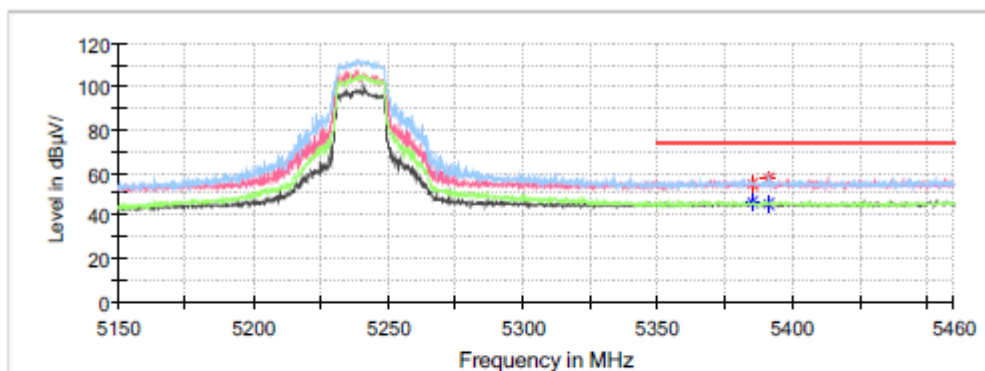
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5148.300000	—	51.70	54.00	2.30	H	7.6
5148.300000	63.07	—	74.00	10.93	H	7.6
5148.600000	—	51.15	54.00	2.85	H	7.6
5148.600000	66.68	—	74.00	7.32	H	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum



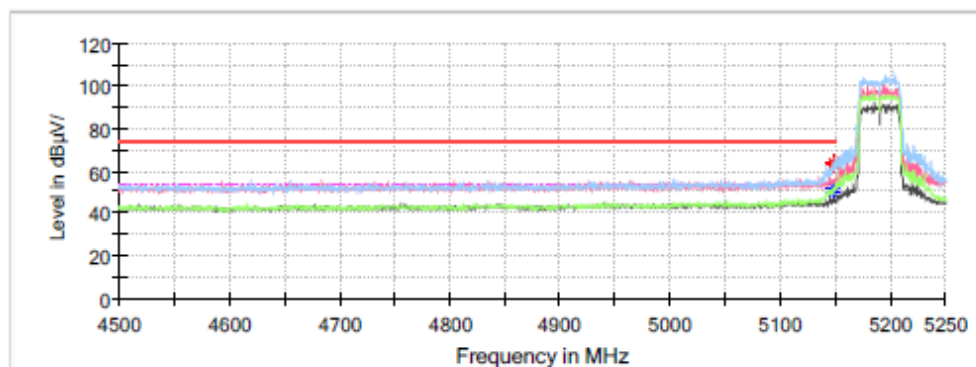
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5385.352000	—	45.99	54.00	8.01	V	8.2
5385.352000	54.68	—	74.00	19.32	V	8.2
5391.428000	—	45.40	54.00	8.60	H	8.2
5391.428000	57.17	—	74.00	16.83	H	8.2

802.11ac40 Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ac40 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	21.4℃
Humidity:	45%
Atmospheric Pressure:	100.9kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/5

Full Spectrum

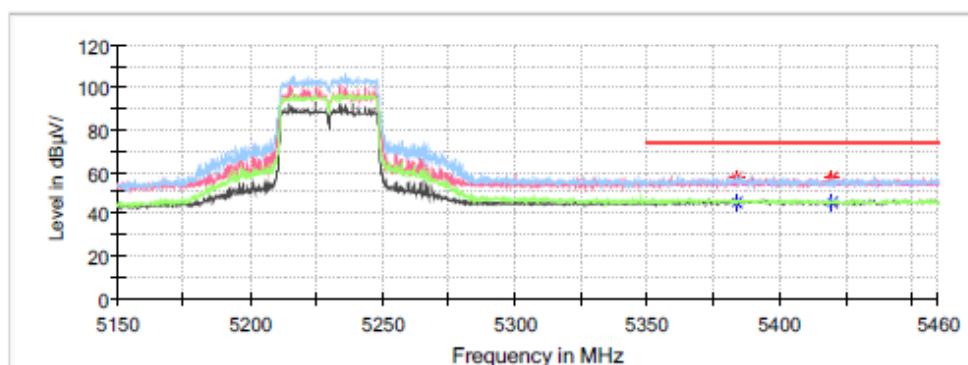
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5147.400000	63.47	—	74.00	10.53	H	7.6
5147.400000	—	49.46	54.00	4.54	H	7.6
5148.300000	62.86	—	74.00	11.14	H	7.6
5148.300000	—	52.15	54.00	1.85	H	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum



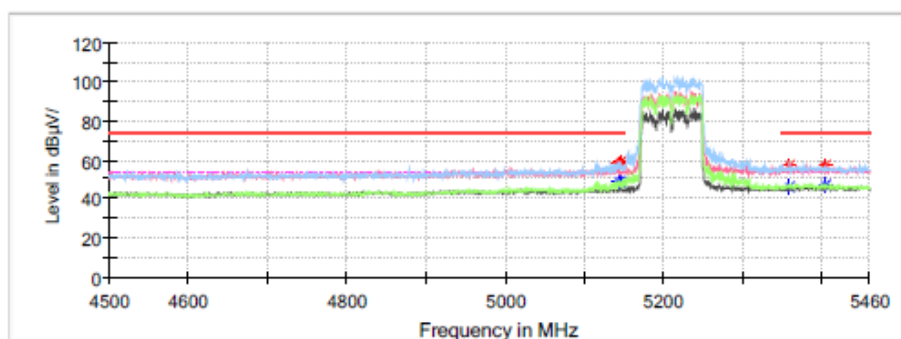
Critical Freqs

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
5383.616000	57.21	—	74.00	16.79	H	8.2
5383.616000	—	45.46	54.00	8.54	H	8.2
5419.948000	—	45.40	54.00	8.60	H	8.3
5419.948000	56.83	—	74.00	17.17	H	8.3

802.11ac80 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum

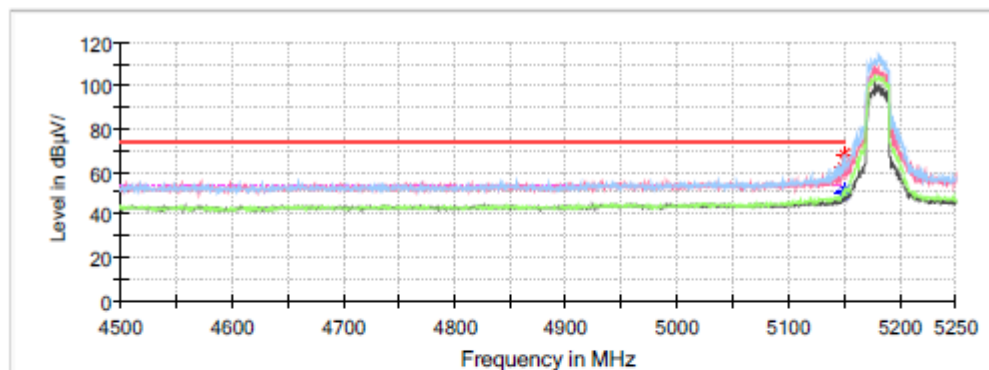
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5142.816000	—	49.03	54.00	4.97	H	7.6
5142.816000	57.94	—	74.00	16.06	H	7.6
5145.888000	—	48.67	54.00	5.33	H	7.6
5145.888000	59.08	—	74.00	14.92	H	7.6
5359.392000	—	46.19	54.00	7.81	H	8.2
5359.392000	56.89	—	74.00	17.11	H	8.2
5403.552000	—	46.90	54.00	7.10	H	8.3
5403.552000	57.47	—	74.00	16.53	H	8.3

802.11ax20 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum

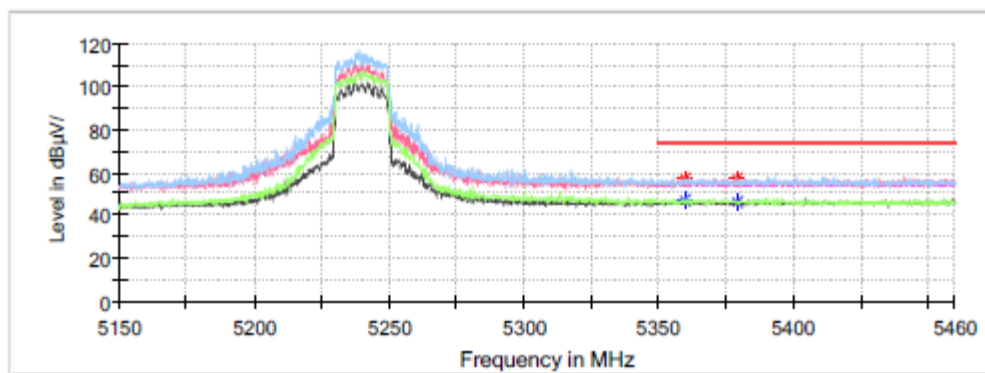
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5147.700000	—	49.52	54.00	4.48	H	7.6
5147.700000	62.49	—	74.00	11.51	H	7.6
5149.200000	—	51.33	54.00	2.67	H	7.6
5149.200000	67.97	—	74.00	6.03	H	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum



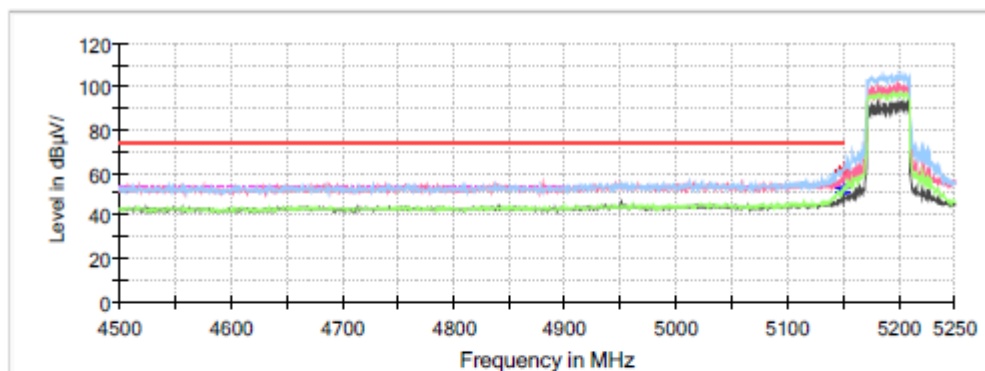
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5359.684000	57.26	—	74.00	16.74	H	8.2
5359.684000	—	46.68	54.00	7.32	H	8.2
5379.152000	—	45.97	54.00	8.03	H	8.2
5379.152000	57.20	—	74.00	16.80	H	8.2

802.11ax40 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum

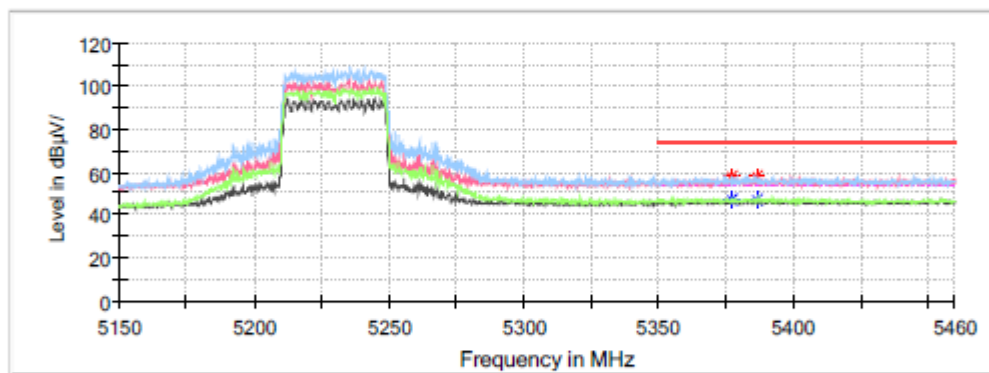
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5149.200000	—	51.52	54.00	2.48	H	7.6
5149.200000	61.53	—	74.00	12.47	H	7.6
5149.500000	—	52.52	54.00	1.48	H	7.6
5149.500000	60.34	—	74.00	13.66	H	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.4℃
Humidity: 45%
Atmospheric Pressure: 100.9kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/5

Full Spectrum



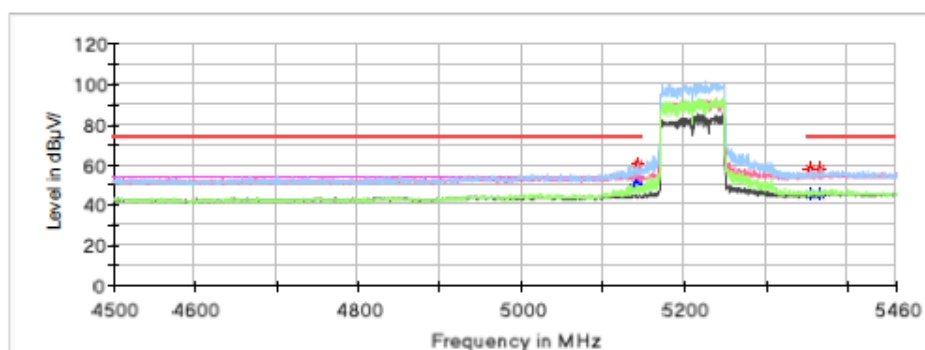
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5377.168000	—	47.04	54.00	6.96	H	8.2
5377.168000	57.49	—	74.00	16.51	H	8.2
5386.468000	57.54	—	74.00	16.46	H	8.2
5386.468000	—	46.63	54.00	7.37	H	8.2

802.11ax80 Mode:**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ax80
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 21.4℃
 Humidity: 45%
 Atmospheric Pressure: 100.9kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/5

Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5142.048000	—	50.25	54.00	3.75	H	7.6
5142.048000	57.45	—	74.00	16.55	H	7.6
5143.968000	—	49.11	54.00	4.89	H	7.6
5143.968000	60.00	—	74.00	14.00	H	7.6
5354.400000	57.61	—	74.00	16.39	H	8.2
5354.400000	—	45.38	54.00	8.62	H	8.2
5367.840000	—	45.63	54.00	8.37	V	8.2
5367.840000	57.98	—	74.00	16.02	V	8.2

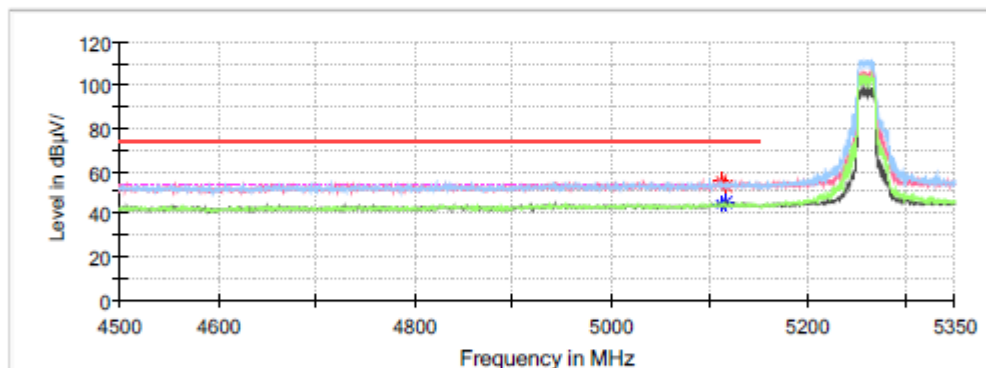
Restricted Bands Emissions Test (5250-5350MHz Band):

Chain 0

802.11a Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	21.1℃
Humidity:	47%
Atmospheric Pressure:	101.0kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/6

Full Spectrum

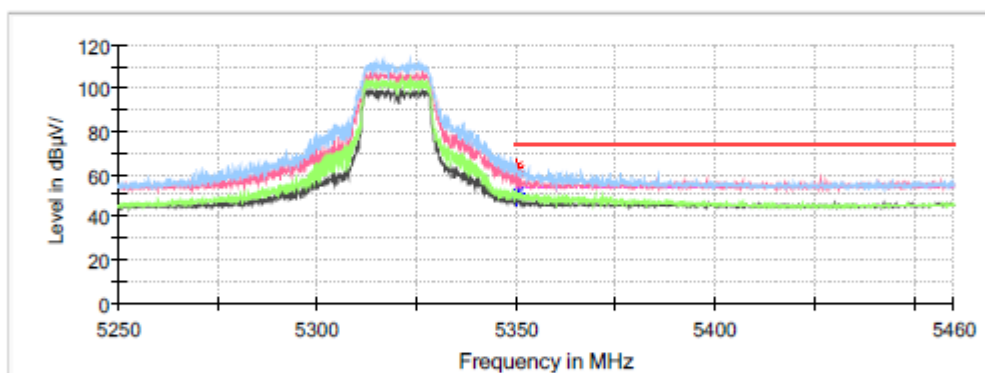
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5111.660000	55.43	—	74.00	18.57	V	7.5
5111.660000	—	44.24	54.00	9.76	V	7.5
5116.760000	52.90	—	74.00	21.10	V	7.6
5116.760000	—	45.18	54.00	8.82	V	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum



Critical Freqs

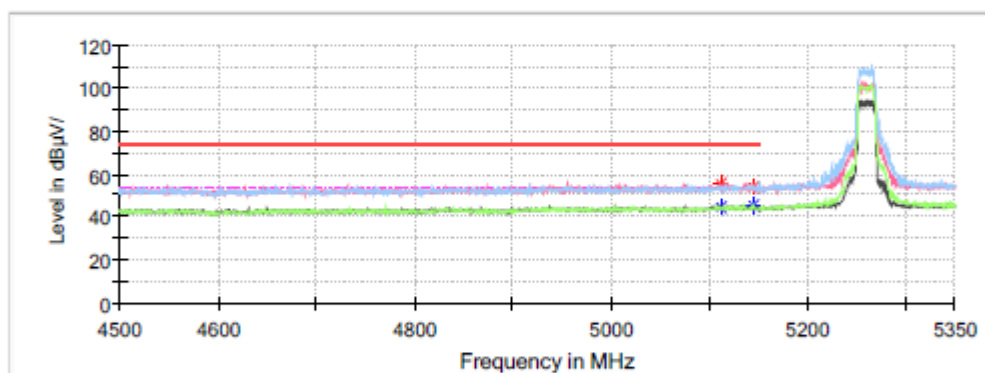
Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5350.128000	62.61	—	74.00	11.39	H	8.1
5350.128000	—	48.98	54.00	5.02	H	8.1
5350.464000	60.92	—	74.00	13.08	H	8.1
5350.464000	—	51.43	54.00	2.57	H	8.1

Chain 1

802.11a Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum

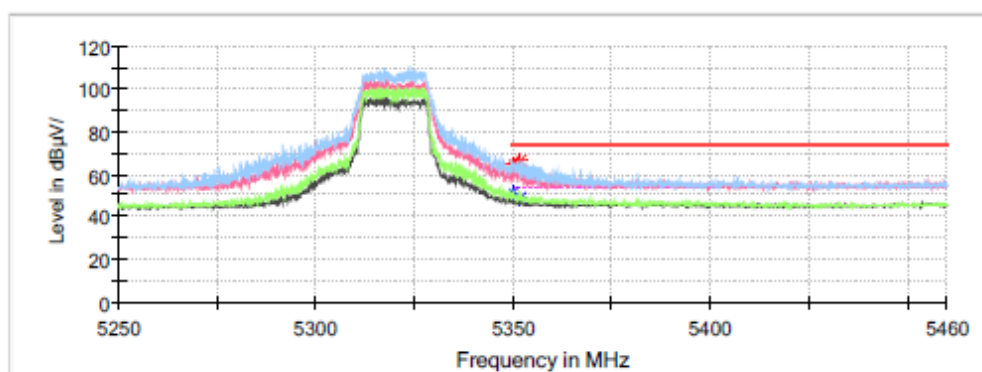
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5112.340000	55.31	—	74.00	18.69	V	7.5
5112.340000	—	44.63	54.00	9.37	V	7.5
5145.660000	53.45	—	74.00	20.55	H	7.6
5145.660000	—	45.01	54.00	8.99	H	7.6

Common Information

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11a mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 21.1℃
 Humidity: 47%
 Atmospheric Pressure: 101.0kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/6

Full Spectrum



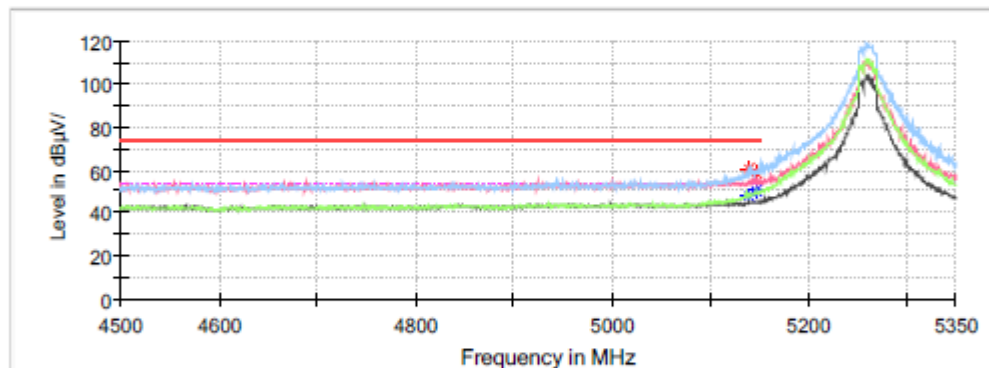
Critical Freqs

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
5350.212000	—	51.08	54.00	2.92	H	8.1
5350.212000	64.99	—	74.00	9.01	H	8.1
5351.808000	—	48.65	54.00	5.35	H	8.1
5351.808000	66.07	—	74.00	7.93	H	8.1

MIMO(Chain 0+Chain 1):**802.11ac20 Mode:****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	21.1°C
Humidity:	47%
Atmospheric Pressure:	101.0kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/6

Full Spectrum

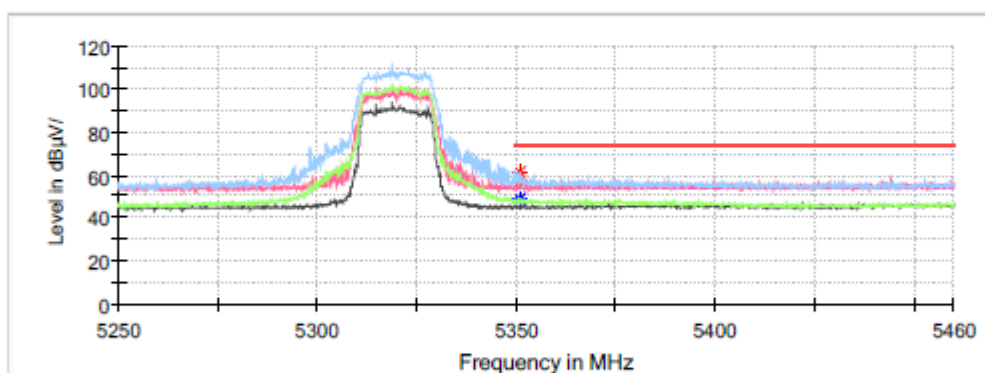
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5138.520000	60.51	—	74.00	13.49	H	7.6
5138.520000	—	47.56	54.00	6.44	H	7.6
5146.000000	58.68	—	74.00	15.32	H	7.6
5146.000000	—	50.07	54.00	3.93	H	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum



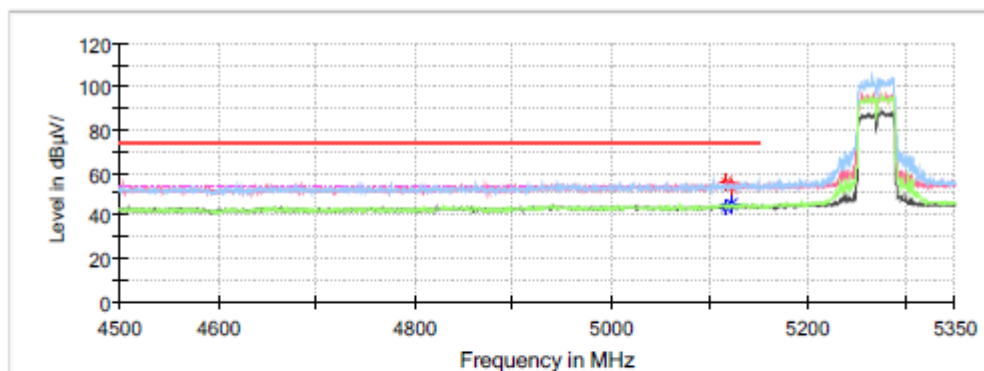
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5350.716000	61.61	—	74.00	12.39	H	8.1
5350.716000	—	48.32	54.00	5.68	H	8.1
5350.884000	56.81	—	74.00	17.19	H	8.1
5350.884000	—	48.66	54.00	5.34	H	8.1

802.11ac40 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum

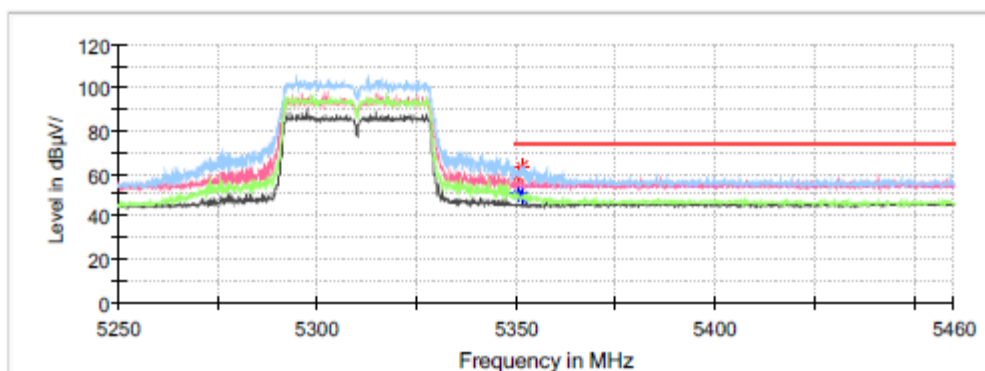
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5117.780000	55.25	—	74.00	18.75	V	7.6
5117.780000	—	43.98	54.00	10.02	V	7.6
5122.540000	53.08	—	74.00	20.92	V	7.6
5122.540000	—	45.53	54.00	8.47	V	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum



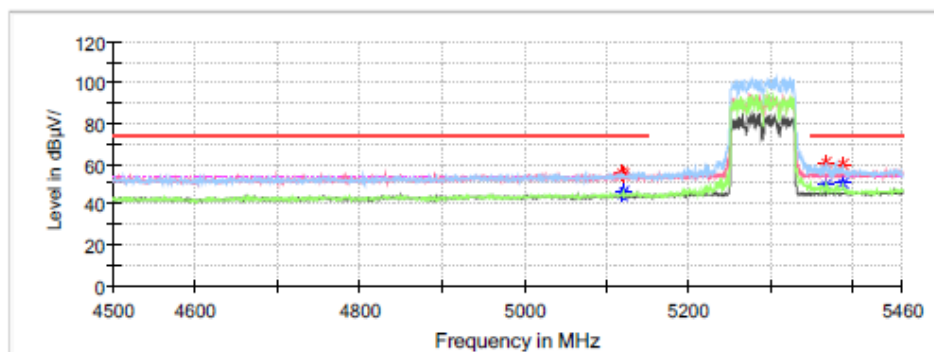
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5350.464000	—	50.29	54.00	3.71	H	8.1
5350.464000	58.34	—	74.00	15.66	H	8.1
5351.556000	—	48.59	54.00	5.41	H	8.1
5351.556000	62.96	—	74.00	11.04	H	8.1

802.11ac80 Mode:**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ac80
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 21.1°C
 Humidity: 47%
 Atmospheric Pressure: 101.0kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/6

Full Spectrum

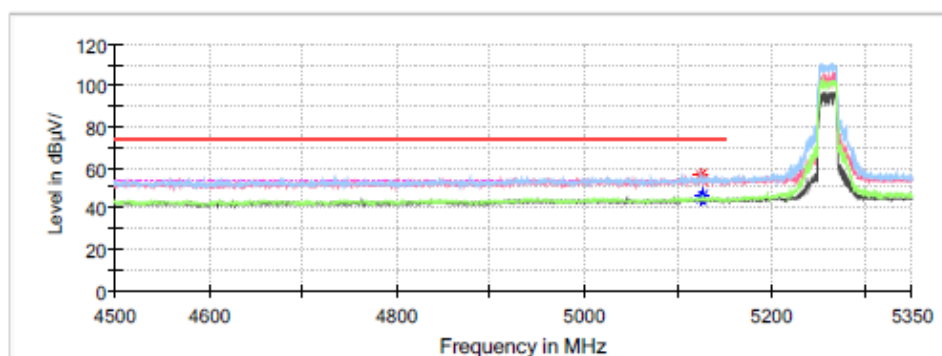
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5119.008000	—	44.38	54.00	9.62	V	7.6
5119.008000	55.55	—	74.00	18.45	V	7.6
5119.776000	—	45.88	54.00	8.12	H	7.6
5119.776000	54.22	—	74.00	19.78	H	7.6
5367.840000	—	49.43	54.00	4.57	H	8.2
5367.840000	60.58	—	74.00	13.42	H	8.2
5387.424000	59.24	—	74.00	14.76	H	8.2
5387.424000	—	50.55	54.00	3.45	H	8.2

802.11ax20 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum

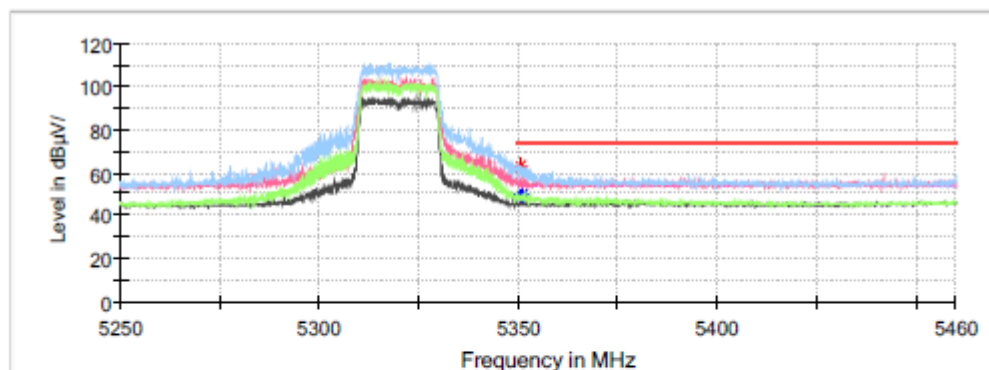
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5125.260000	56.09	—	74.00	17.91	H	7.6
5125.260000	—	44.26	54.00	9.74	H	7.6
5126.960000	53.63	—	74.00	20.37	H	7.6
5126.960000	—	46.11	54.00	7.89	H	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1°C
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum



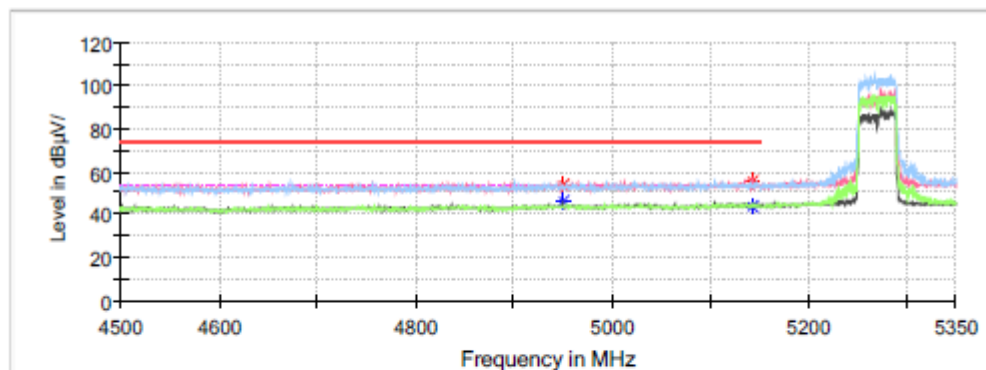
Critical Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5350.632000	63.26	—	74.00	10.74	H	8.1
5350.632000	—	48.27	54.00	5.73	H	8.1
5350.800000	60.33	—	74.00	13.67	H	8.1
5350.800000	—	49.88	54.00	4.12	H	8.1

802.11ax40 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1°C
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum

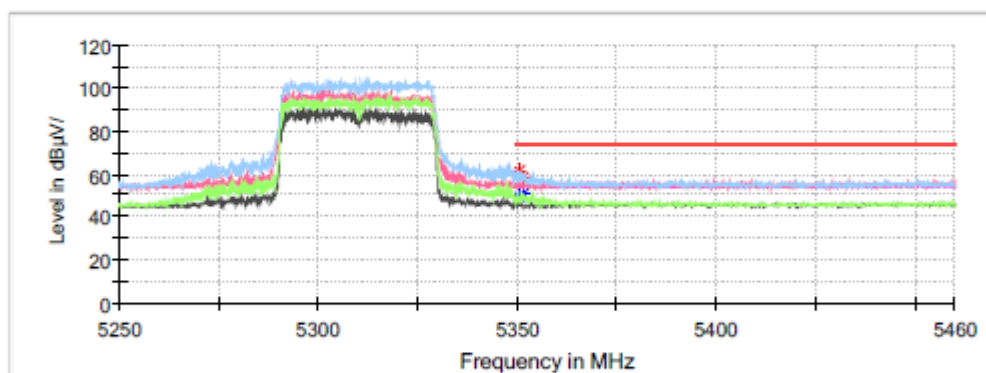
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
4950.160000	—	46.17	54.00	7.83	V	7.1
4950.160000	53.46	—	74.00	20.54	V	7.1
5143.620000	—	43.89	54.00	10.11	V	7.6
5143.620000	55.66	—	74.00	18.34	V	7.6

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum



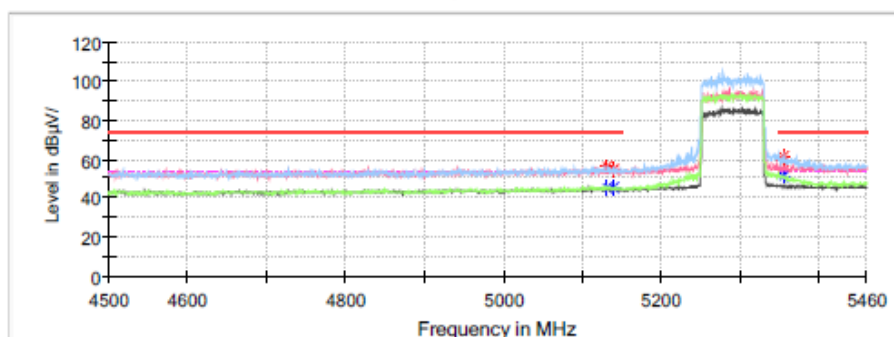
Critical Freqs

Frequency (MHz)	MaxPeak (dB μV/m)	Average (dB μV/m)	Limit (dB μV/m)	Margin (dB)	Pol	Corr. (dB/m)
5350.380000	61.55	—	74.00	12.45	H	8.1
5350.380000	—	49.49	54.00	4.51	H	8.1
5351.556000	58.14	—	74.00	15.86	H	8.1
5351.556000	—	50.25	54.00	3.75	H	8.1

802.11ax80 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 21.1℃
Humidity: 47%
Atmospheric Pressure: 101.0kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/6

Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5131.680000	55.91	—	74.00	18.09	H	7.6
5131.680000	—	45.23	54.00	8.77	H	7.6
5139.360000	54.43	—	74.00	19.57	V	7.6
5139.360000	—	45.64	54.00	8.36	V	7.6
5353.632000	61.30	—	74.00	12.70	H	8.2
5353.632000	—	51.14	54.00	2.86	H	8.2
5354.400000	59.02	—	74.00	14.98	H	8.2
5354.400000	—	51.30	54.00	2.70	H	8.2

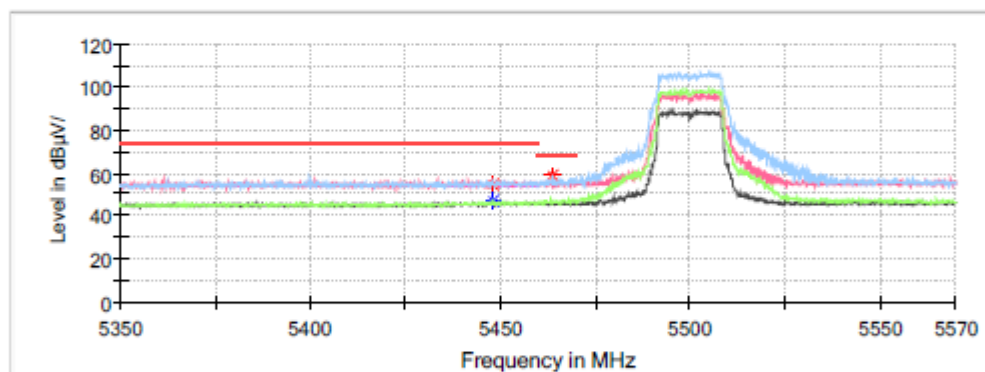
Band Edge Test (5470-5725MHz Band):

Chain 0

802.11a Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.1℃
Humidity:	46%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/7

Full Spectrum

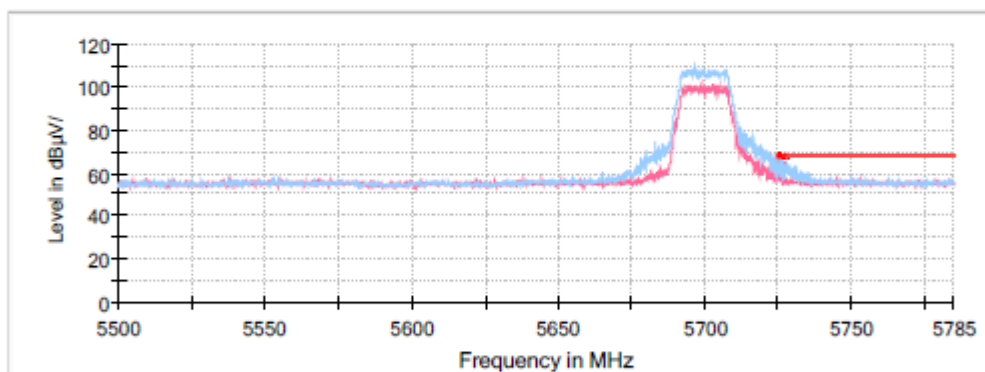
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
5448.296000	54.74	—	74.00	19.26	H	8.4
5448.296000	—	46.72	54.00	7.28	H	8.4
5463.872000	58.81	—	68.20	9.39	H	8.4

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum



Critical Freqs

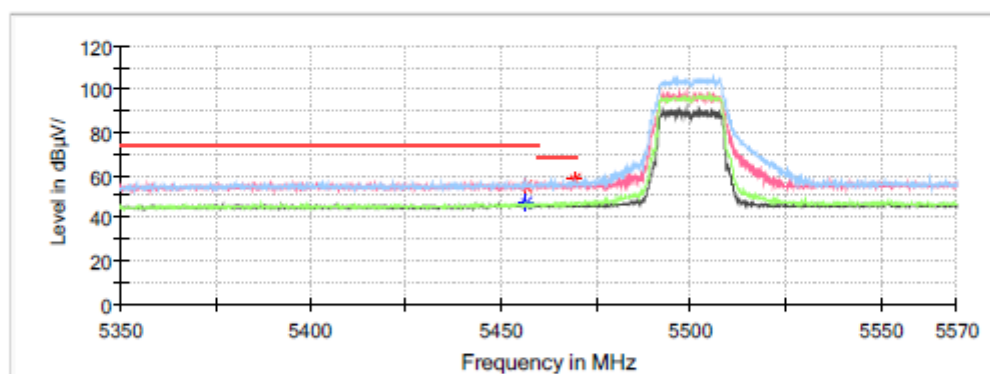
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5725.264000	66.14	—	68.20	2.06	H	9.0
5726.062000	65.89	—	68.20	2.31	H	9.0

Chain 1

802.11a Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.1°C
Humidity:	46%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/7

Full Spectrum

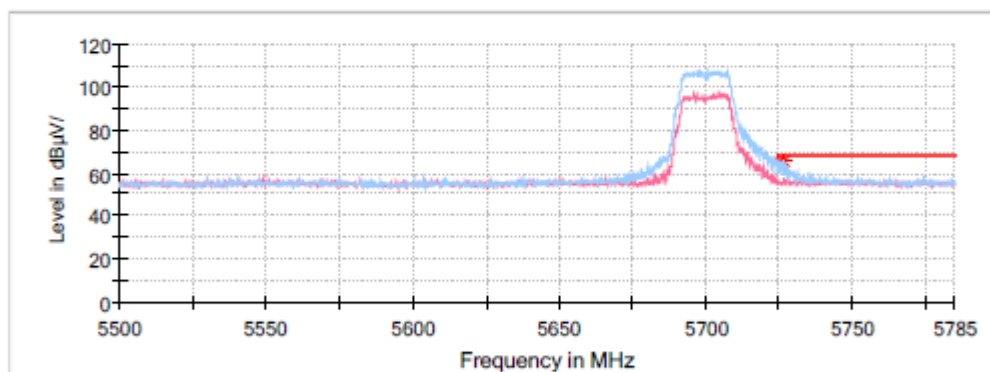
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5456.656000	54.80	—	74.00	19.20	H	8.4
5456.656000	—	46.86	—	—	H	8.4
5469.504000	57.80	—	68.20	10.40	H	8.4

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum



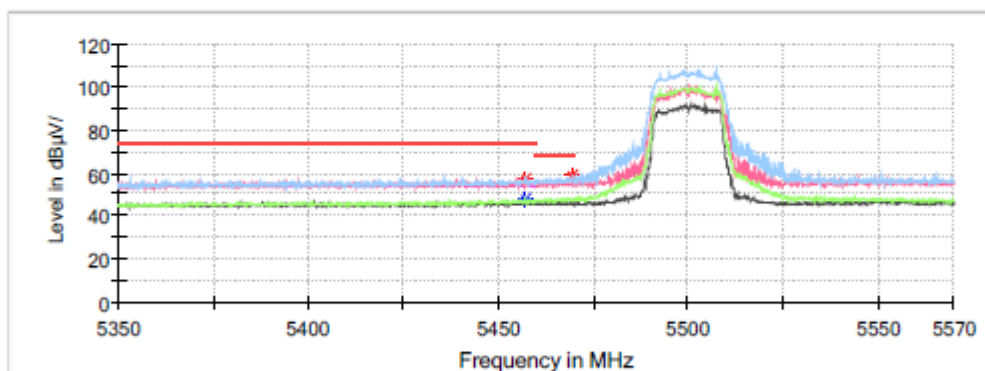
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5725.036000	65.42	—	68.20	2.78	H	9.0
5726.860000	65.50	—	68.20	2.70	H	9.0

MIMO(Chain 0+Chain 1):**802.11ac20 Mode:****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ac20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.1℃
Humidity:	46%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/7

Full Spectrum

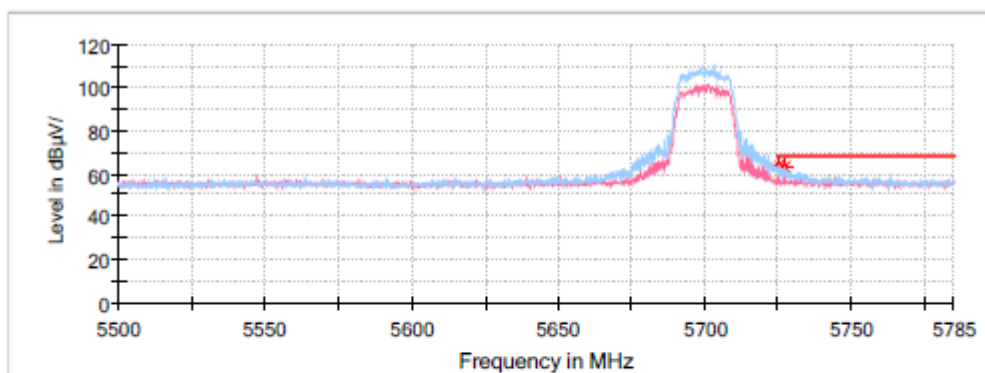
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5457.360000	56.97	—	74.00	17.03	H	8.4
5457.360000	—	47.83	54.00	6.17	H	8.4
5469.504000	58.65	—	68.20	9.55	H	8.4

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum



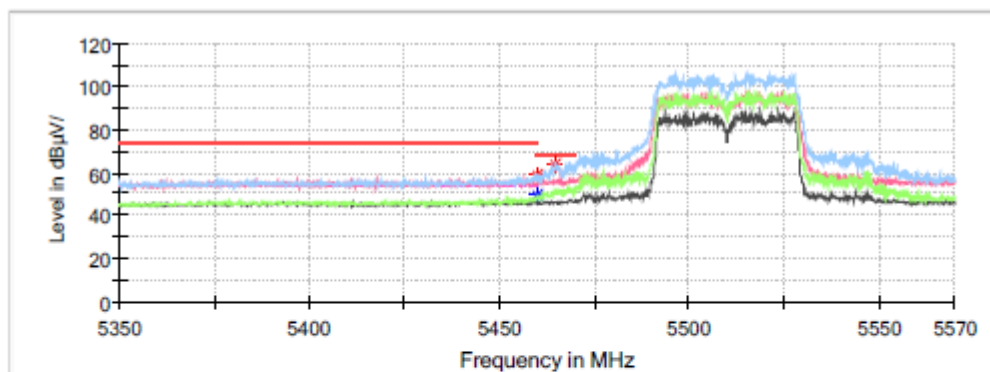
Critical Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5725.264000	63.77	—	68.20	4.43	H	9.0
5727.202000	62.67	—	68.20	5.53	H	9.0

802.11ac40 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

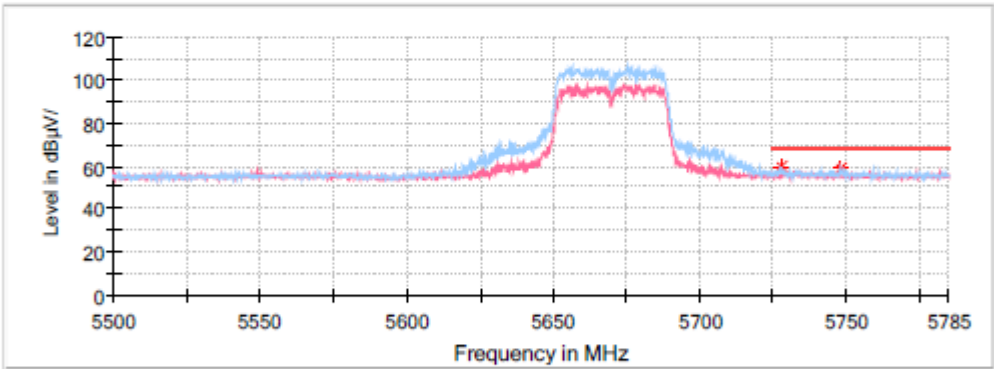
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5459.912000	59.08	—	74.00	14.92	H	8.4
5459.912000	—	49.45	54.00	4.55	H	8.4
5464.928000	64.06	—	68.20	4.14	H	8.4

Common Information

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 5G WIFI 802.11ac40 mode High Channel
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 23.1℃
 Humidity: 46%
 Atmospheric Pressure: 101.1kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/7

Full Spectrum



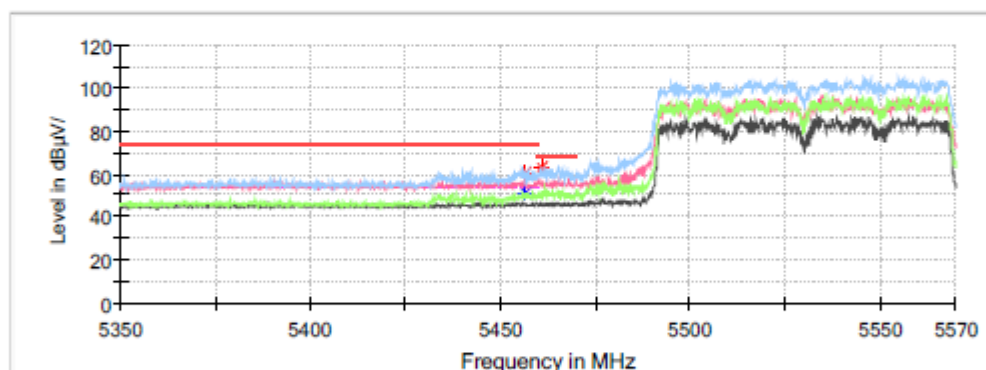
Critical Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5728.000000	59.52	—	68.20	8.68	H	9.0
5748.406000	58.83	—	68.20	9.37	H	9.0

802.11ac80 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac80 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

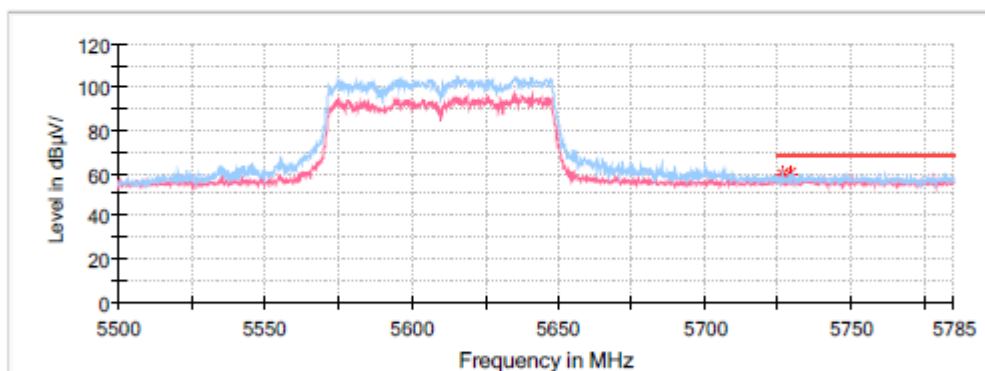
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5456.744000	60.12	—	74.00	13.88	H	8.4
5456.744000	—	51.39	54.00	2.61	H	8.4
5461.056000	62.78	—	68.20	5.42	H	8.4

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac80 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum



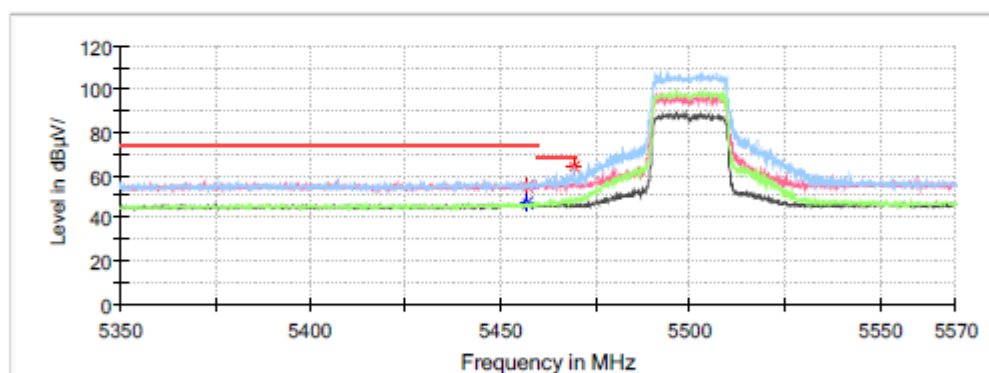
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5726.404000	59.75	—	68.20	8.45	H	9.0
5729.140000	59.37	—	68.20	8.83	H	9.0

802.11ax20 Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ax20 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	23.1°C
Humidity:	46%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/7

Full Spectrum

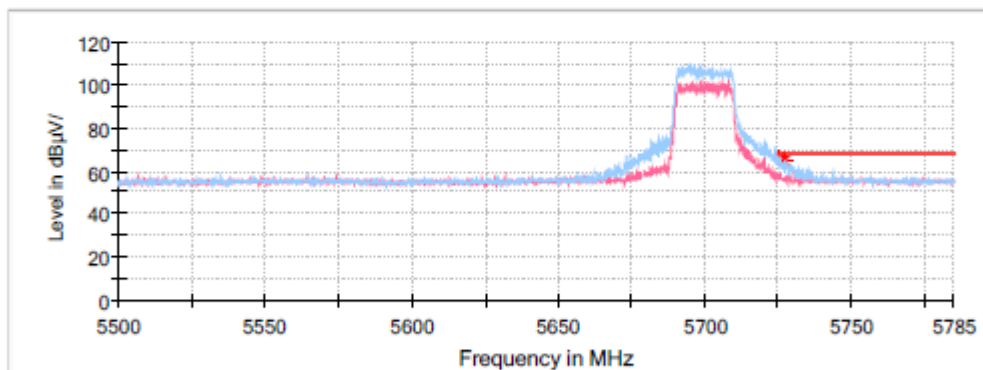
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5457.272000	54.75	—	74.00	19.25	H	8.4
5457.272000	—	46.90	54.00	7.10	H	8.4
5469.328000	63.62	—	68.20	4.58	H	8.4

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum



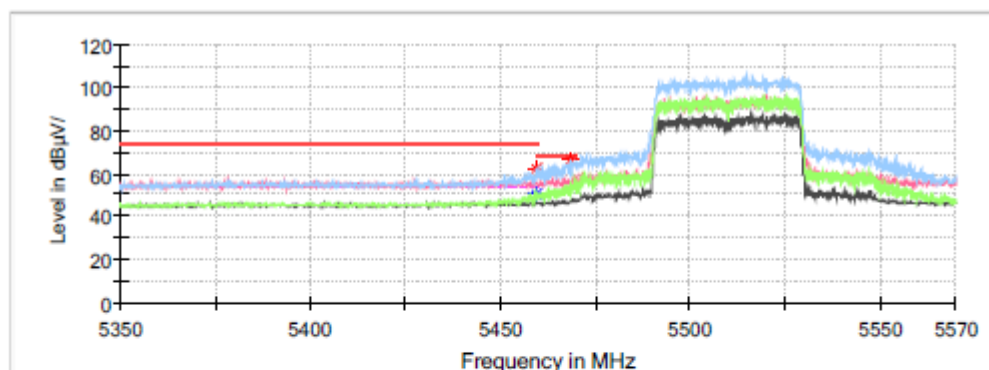
Critical Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5725.492000	66.31	—	68.20	1.89	H	9.0
5727.430000	64.52	—	68.20	3.68	H	9.0

802.11ax40 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

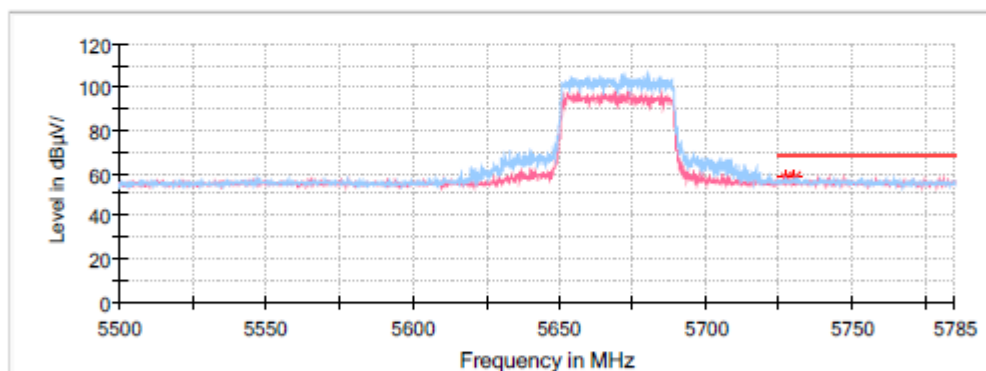
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5459.472000	62.26	—	74.00	11.74	H	8.4
5459.472000	—	50.65	54.00	3.35	H	8.4
5468.448000	66.41	—	68.20	1.79	H	8.4

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1°C
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum



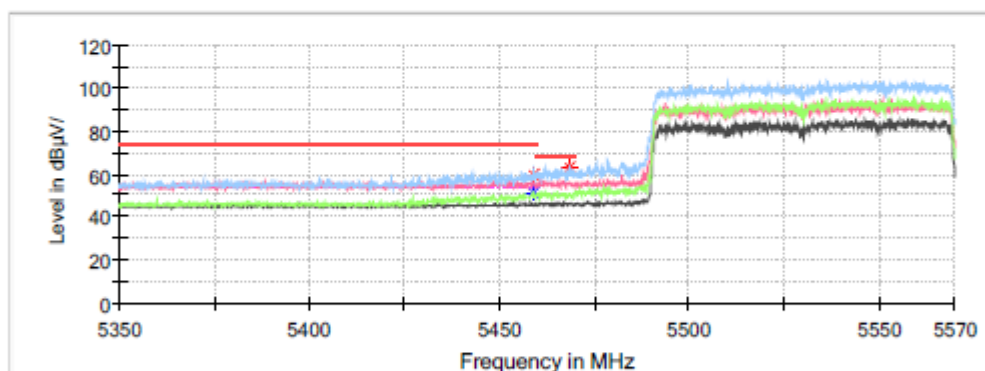
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5727.316000	57.63	---	68.20	10.57	H	9.0
5730.508000	57.64	---	68.20	10.56	H	9.0

802.11ax80 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax80 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum

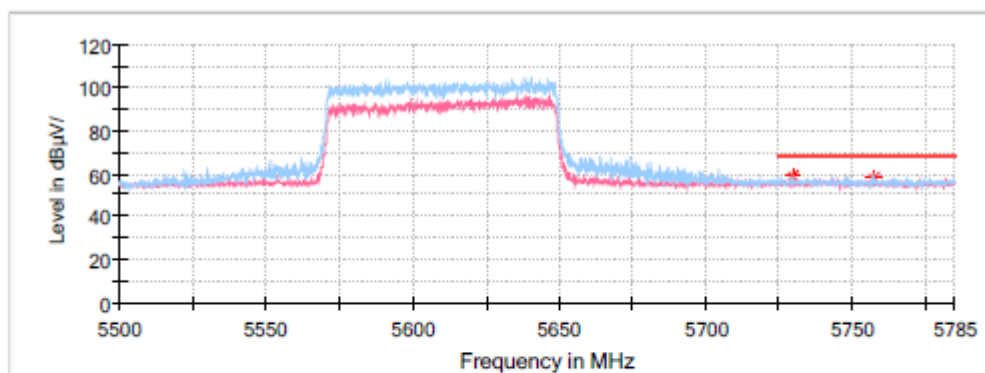
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5458.944000	59.43	—	74.00	14.57	H	8.4
5458.944000	—	51.31	54.00	2.69	H	8.4
5468.712000	63.07	—	68.20	5.13	H	8.4

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax80 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 23.1℃
Humidity: 46%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/7

Full Spectrum



Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5729.710000	59.11	—	68.20	9.09	H	9.0
5757.640000	57.93	—	68.20	10.27	H	9.0

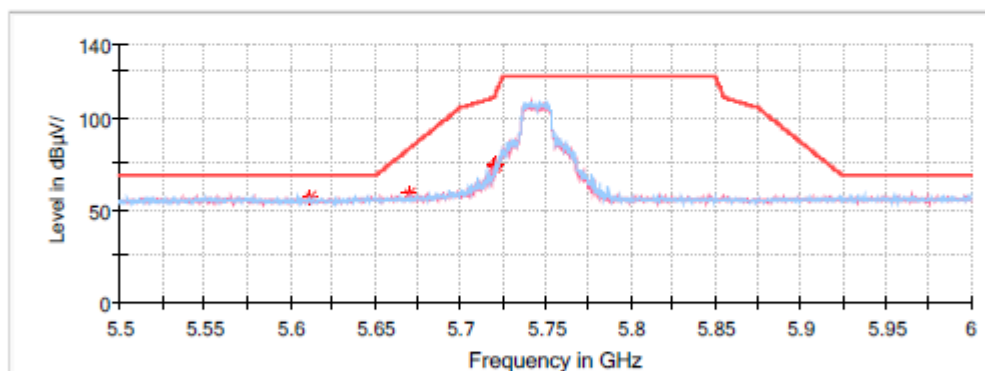
Bandedge Emissions Test (5725-5850MHz Band):

Chain0

802.11a Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5℃
Humidity:	45%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/8

Full Spectrum

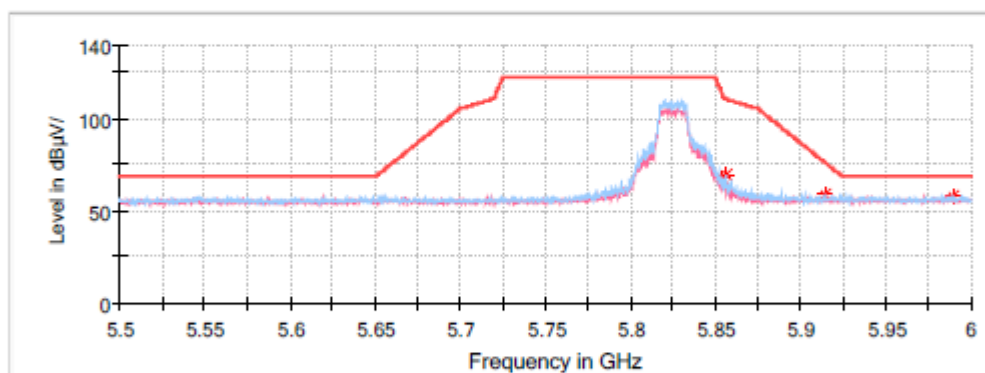
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5611.800000	57.18	—	68.20	11.02	H	8.7
5670.200000	58.79	—	83.15	24.36	H	8.9
5719.800000	73.67	—	110.74	37.08	H	9.0
5720.600000	73.98	—	112.17	38.18	H	9.0

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum



Critical Freqs

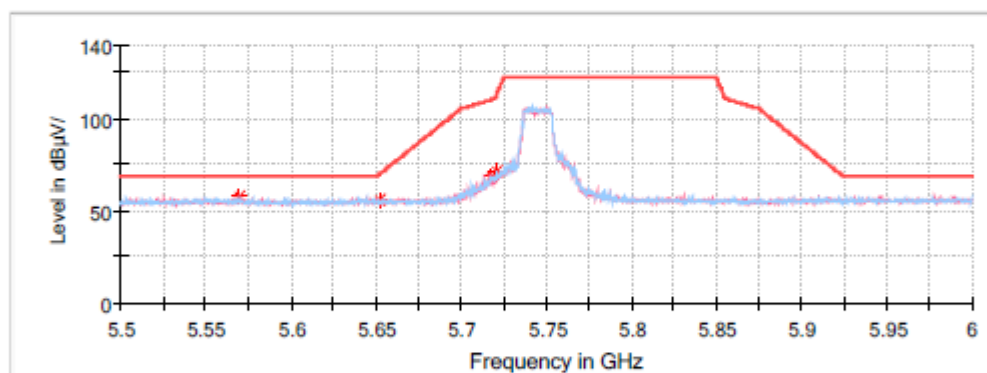
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5854.400000	68.03	—	112.17	44.14	H	9.2
5856.000000	69.76	—	110.52	40.76	H	9.2
5914.600000	58.46	—	75.90	17.43	H	9.3
5989.800000	57.68	—	68.20	10.52	H	9.5

Chain1

802.11a Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11a mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5℃
Humidity:	45%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/8

Full Spectrum

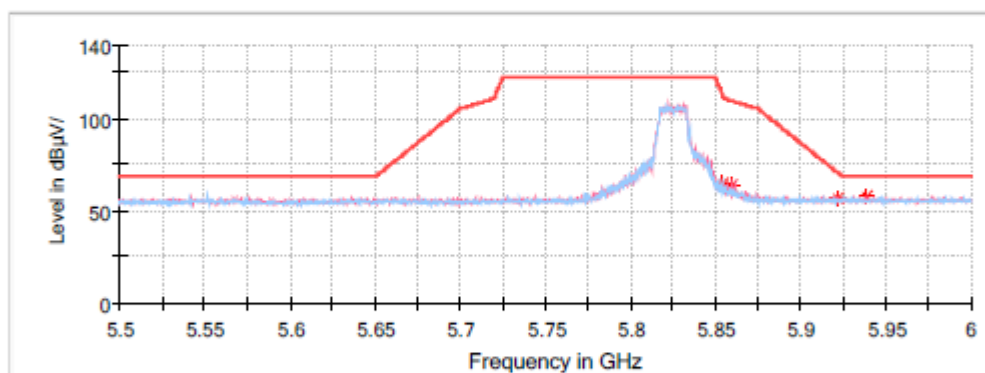
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5569.600000	57.45	—	68.20	10.75	H	8.7
5652.200000	56.19	—	69.83	13.64	H	8.8
5717.600000	68.34	—	110.13	41.79	H	9.0
5721.200000	71.24	—	113.54	42.29	H	9.0

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11a mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum



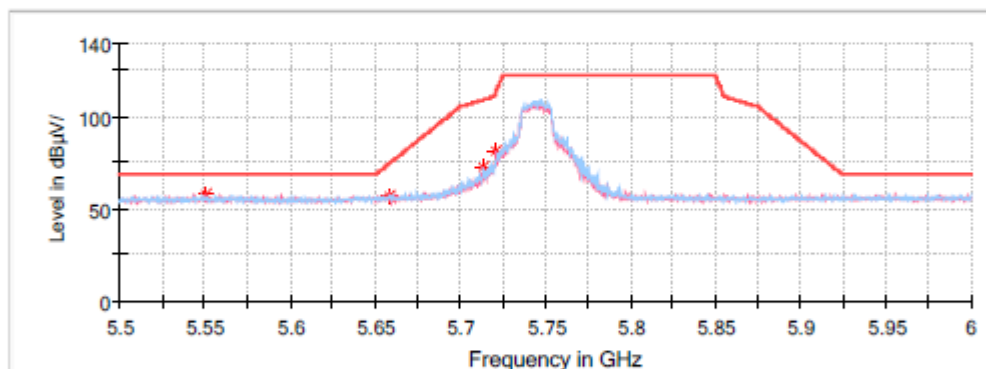
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5854.200000	64.25	—	112.62	48.38	V	9.2
5859.800000	63.94	—	109.46	45.52	V	9.2
5922.000000	56.99	—	70.42	13.43	V	9.4
5938.600000	57.84	—	68.20	10.36	V	9.4

MIMO(Chain 0+Chain 1):**802.11ac20 Mode:****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum

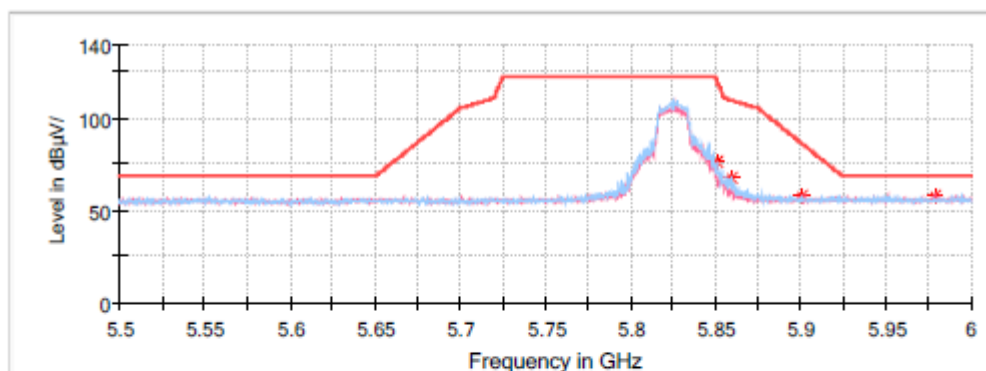
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5551.000000	57.44	—	68.20	10.76	V	8.6
5659.000000	57.11	—	74.86	17.75	V	8.8
5713.600000	71.99	—	109.01	37.02	V	8.9
5721.400000	80.95	—	113.99	33.05	V	9.0

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum



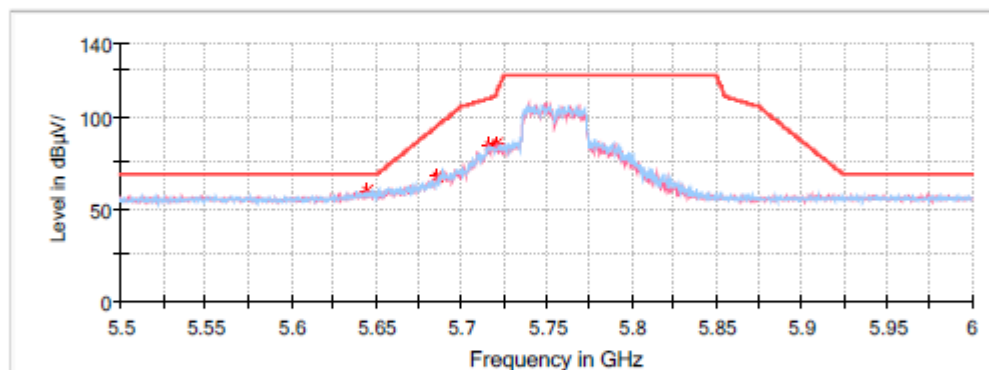
Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5851.200000	76.62	—	119.46	42.84	H	9.2
5859.000000	67.56	—	109.68	42.12	H	9.2
5900.800000	58.00	—	86.11	28.10	H	9.3
5978.400000	57.99	—	68.20	10.21	H	9.5

802.11ac40 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum

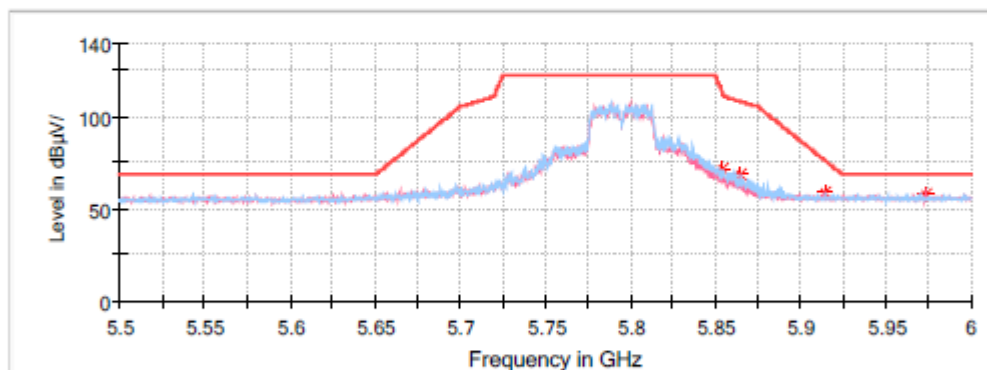
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5644.800000	59.41	—	68.20	8.79	V	8.8
5686.000000	67.80	—	94.84	27.04	V	8.9
5716.400000	83.77	—	109.79	26.02	V	9.0
5720.800000	84.82	—	112.62	27.80	V	9.0

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum



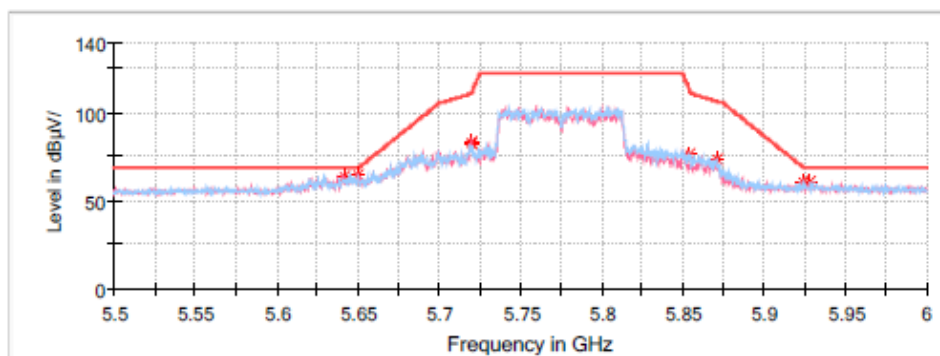
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5854.400000	71.22	---	112.17	40.95	H	9.2
5865.000000	68.45	---	108.00	39.55	H	9.3
5914.200000	58.54	---	76.19	17.65	H	9.3
5973.200000	58.21	---	68.20	9.99	H	9.5

802.11ac80 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ac80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5°C
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum

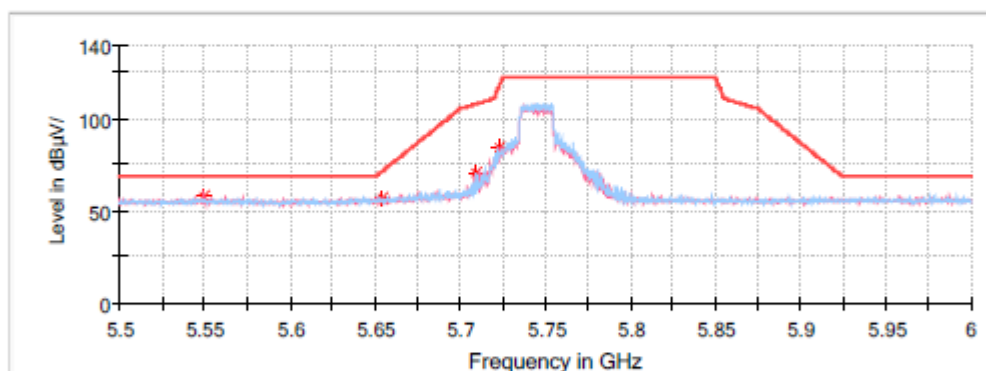
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5641.600000	63.97	—	68.20	4.23	V	8.8
5650.200000	64.61	—	68.35	3.73	V	8.8
5719.400000	82.65	—	110.63	27.98	V	9.0
5720.200000	83.23	—	111.26	28.02	V	9.0
5854.200000	76.84	—	112.62	35.78	H	9.2
5870.600000	73.50	—	106.43	32.93	H	9.3
5923.800000	60.77	—	69.09	8.32	H	9.4
5927.800000	60.25	—	68.20	7.95	H	9.4

802.11ax20 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum

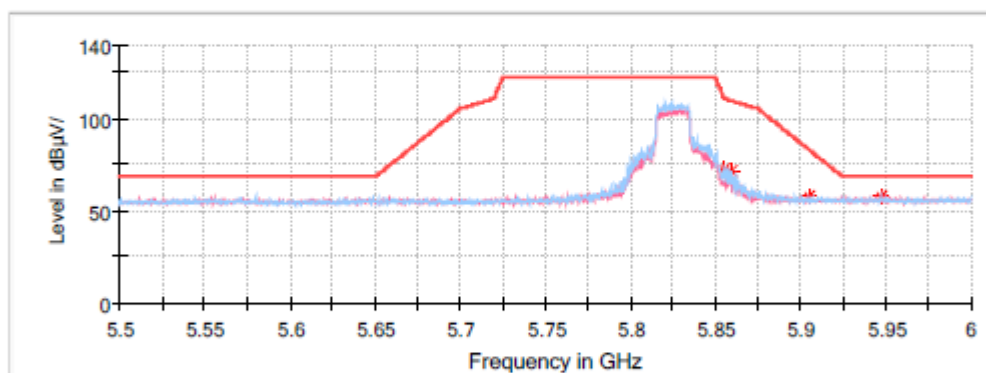
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5550.200000	57.43	—	68.20	10.77	V	8.6
5654.200000	57.24	—	71.31	14.07	V	8.8
5709.400000	70.27	—	107.83	37.56	V	8.9
5722.800000	83.89	—	117.18	33.29	V	9.0

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax20 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum



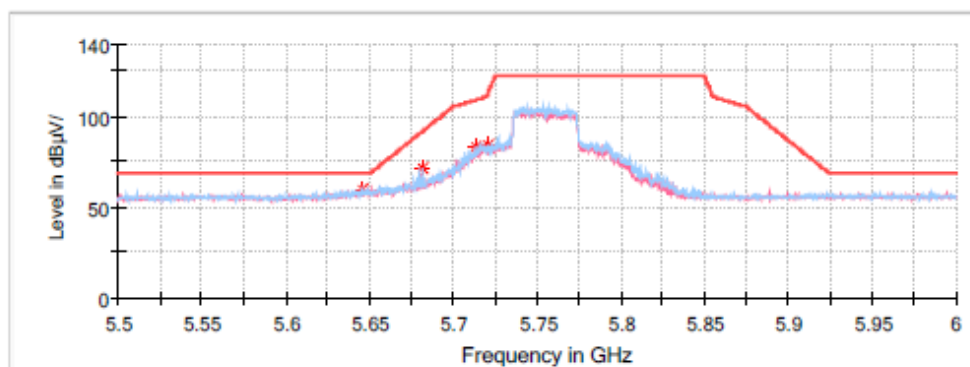
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5854.800000	72.34	—	111.26	38.92	H	9.2
5859.400000	71.70	—	109.57	37.87	H	9.2
5904.600000	58.02	—	83.30	25.28	H	9.3
5946.800000	57.89	—	68.20	10.31	H	9.4

802.11ax40 Mode:**Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	5G WIFI 802.11ax40 mode Low Channel
Standard:	FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.5℃
Humidity:	45%
Atmospheric Pressure:	101.1kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/8

Full Spectrum

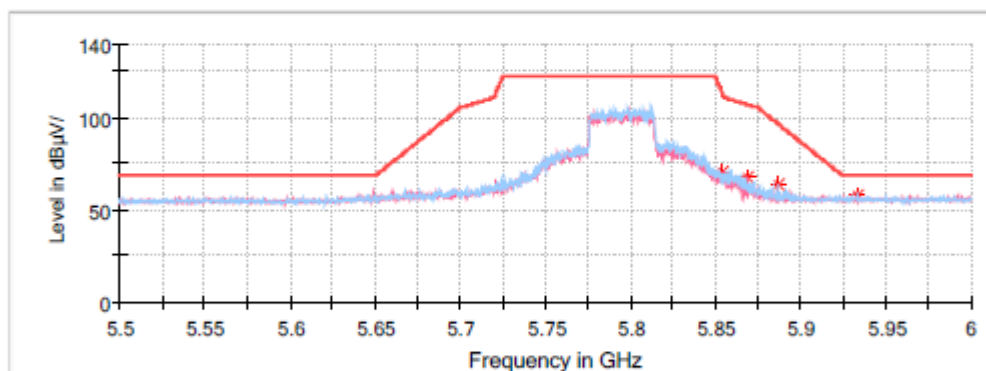
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5645.400000	60.00	—	68.20	8.20	H	8.8
5681.800000	71.22	—	91.73	20.51	H	8.9
5713.200000	83.08	—	108.90	25.81	H	8.9
5721.000000	84.66	—	113.08	28.42	H	9.0

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax40 mode High Channel
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum



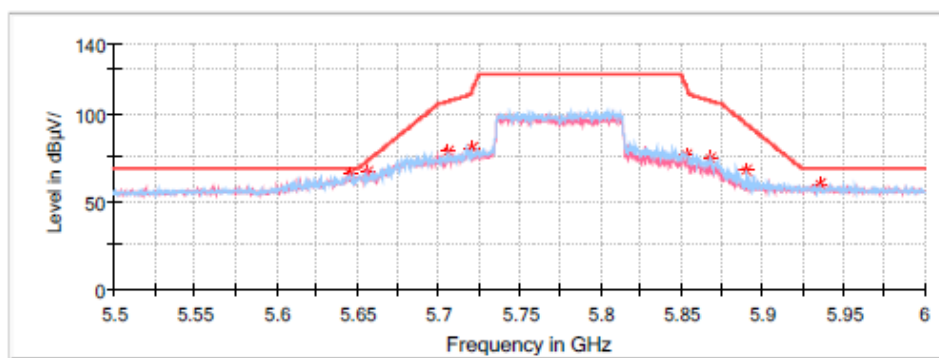
Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5853.800000	70.11	---	113.54	43.43	V	9.2
5868.600000	67.36	---	106.99	39.63	V	9.3
5887.000000	63.80	---	96.32	32.52	H	9.3
5933.000000	58.02	---	68.20	10.18	H	9.4

802.11ax80 Mode:**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 5G WIFI 802.11ax80
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.5℃
Humidity: 45%
Atmospheric Pressure: 101.1kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/8

Full Spectrum

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
5646.200000	65.81	—	68.20	2.39	H	8.8
5656.000000	66.55	—	72.64	6.09	H	8.8
5706.400000	78.55	—	106.99	28.44	V	8.9
5721.200000	80.01	—	113.54	33.53	V	9.0
5853.000000	76.66	—	115.36	38.70	H	9.2
5867.400000	74.65	—	107.33	32.68	H	9.3
5889.800000	67.59	—	94.25	26.66	H	9.3
5935.200000	59.40	—	68.20	8.80	H	9.4

EMISSION BANDWIDTH**Environmental Conditions & Test Information**

Test Date:	2026-06-09	2026-06-10	2026-06-16	2026-07-16
Temperature:	25.6 °C	26.3 °C	25 °C	23.2°C
Relative Humidity:	55 %	58 %	52 %	44%
ATM Pressure:	101.2 kPa	101.3 kPa	102.5 kPa	100.5 kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Neil Zhou	Neil Zhou	Neil Zhou	Neil Zhou

Test Result: Compliant*5150-5250 MHz:*

Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)		99% Bandwidth (MHz)	
			Chain 0	Chain 1	Chain 0	Chain 1
802.11a	Low	5180	22.175	21.654	16.800	16.750
	Middle	5200	22.530	24.522	16.800	16.850
	High	5240	24.016	23.257	16.800	16.900
802.11ac20	Low	5180	24.036	33.126	17.950	18.450
	Middle	5200	25.251	25.290	17.900	18.100
	High	5240	24.761	26.197	17.950	18.050
802.11ac40	Low	5190	40.440	40.140	36.500	36.300
	High	5230	40.541	39.840	36.500	36.300
802.11ac80	Middle	5210	82.883	83.684	76.000	76.000
802.11ax20	Low	5180	21.612	21.852	18.900	19.000
	Middle	5200	21.514	25.323	18.900	18.950
	High	5240	21.373	21.298	18.950	19.000
802.11ax40	Low	5190	40.541	40.240	37.700	37.600
	High	5230	40.741	40.541	37.700	37.600
802.11ax80	Middle	5210	82.282	82.082	77.400	77.400

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz

5250-5350 MHz:

Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)		99% Bandwidth (MHz)	
			Chain 0	Chain 1	Chain 0	Chain 1
802.11a	Low	5260	21.701	22.981	16.750	16.850
	Middle	5300	22.889	25.522	16.700	17.200
	High	5320	21.559	29.705	16.750	17.150
802.11ac20	Low	5260	21.762	21.961	17.850	17.750
	Middle	5300	21.866	21.539	17.850	17.800
	High	5320	21.711	21.531	17.800	17.800
802.11ac40	Low	5270	40.240	39.940	36.600	36.300
	High	5310	40.641	39.940	36.400	36.300
802.11ac80	Middle	5290	82.683	82.282	76.000	75.800
802.11ax20	Low	5260	21.616	21.550	18.950	18.950
	Middle	5300	21.559	27.383	18.850	19.000
	High	5320	21.671	22.875	18.950	19.000
802.11ax40	Low	5270	40.440	40.240	37.700	37.600
	High	5310	40.541	40.340	37.600	37.700
802.11ax80	Middle	5290	82.082	82.482	77.200	77.200

5470-5725 MHz:

Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)		99% Bandwidth (MHz)	
			Chain 0	Chain 1	Chain 0	Chain 1
802.11a	Low	5500	21.556	21.500	16.650	16.700
	Middle	5600	21.718	21.481	16.700	16.750
	High	5700	21.657	21.716	16.700	16.700
	Cross	5720	21.455	21.604	16.700	16.700
802.11ac20	Low	5500	21.914	22.780	17.800	17.750
	Middle	5600	21.869	21.393	17.850	17.750
	High	5700	21.765	21.708	17.850	17.750
	Cross	5720	21.866	21.485	17.800	17.750
802.11ac40	Low	5510	40.340	39.940	36.500	36.400
	Middle	5590	40.541	40.140	36.600	36.400
	High	5670	40.440	40.641	36.500	36.300
	Cross	5710	40.541	40.040	36.500	36.400
802.11ac80	Low	5530	82.683	82.282	76.000	76.000
	High	5610	82.082	84.284	75.800	76.000
	Cross	5690	82.883	83.884	76.000	76.000
802.11ax20	Low	5500	21.607	21.382	18.950	18.950
	Middle	5600	21.616	21.393	18.950	18.950
	High	5700	21.346	21.550	18.950	18.900
	Cross	5720	21.718	21.556	18.950	18.950
802.11ax40	Low	5510	40.641	40.541	37.600	37.600
	Middle	5590	40.440	40.541	37.700	37.700
	High	5670	40.641	40.340	37.700	37.700
	Cross	5710	40.140	40.140	37.700	37.700
802.11ax80	Low	5530	82.483	82.482	77.200	77.200
	High	5610	82.282	82.082	77.200	77.400
	Cross	5690	82.082	82.082	77.200	77.400

5725-5850MHz:

Test mode	Channel	Frequency (MHz)	99% Bandwidth (MHz)	
			Chain 0	Chain 1
802.11a	Low	5745	19.150	17.050
	Middle	5785	18.800	17.500
	High	5825	17.750	17.250
802.11ac20	Low	5745	22.350	18.050
	Middle	5785	20.850	18.000
	High	5825	19.400	18.150
802.11ac40	Low	5755	56.200	37.300
	High	5795	51.900	37.300
802.11ac80	Middle	5775	94.400	77.000
802.11ax20	Low	5745	20.900	19.100
	Middle	5785	19.900	19.050
	High	5825	19.500	19.150
802.11ax40	Low	5755	49.200	38.000
	High	5795	45.500	82.200
802.11ax80	Middle	5775	37.900	77.800

Note: the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz

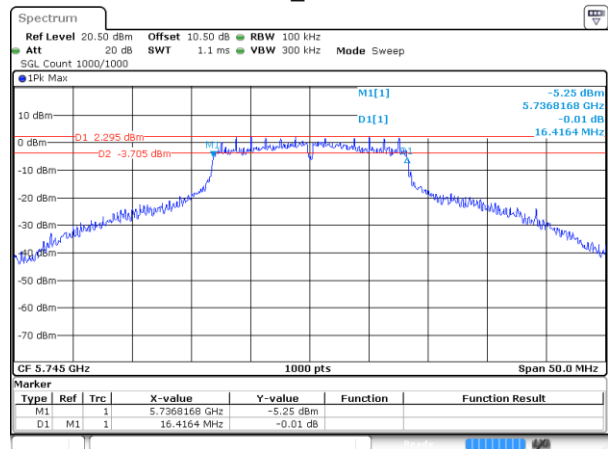
Test mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			Chain 0	Chain 1	
802.11a	Low	5745	16.416	16.416	0.5
	Middle	5785	16.116	16.416	
	High	5825	16.366	16.366	
802.11ac20	Low	5745	17.217	17.718	
	Middle	5785	17.668	17.668	
	High	5825	17.668	17.668	
802.11ac40	Low	5755	36.637	36.537	
	High	5795	36.136	36.236	
802.11ac80	Middle	5775	76.076	76.677	
802.11ax20	Low	5745	17.918	17.618	
	Middle	5785	17.718	18.619	
	High	5825	18.118	17.618	
802.11ax40	Low	5755	37.938	37.838	
	High	5795	37.738	37.738	
802.11ax80	Middle	5775	77.878	78.078	

Chain 0

6dB Bandwidth

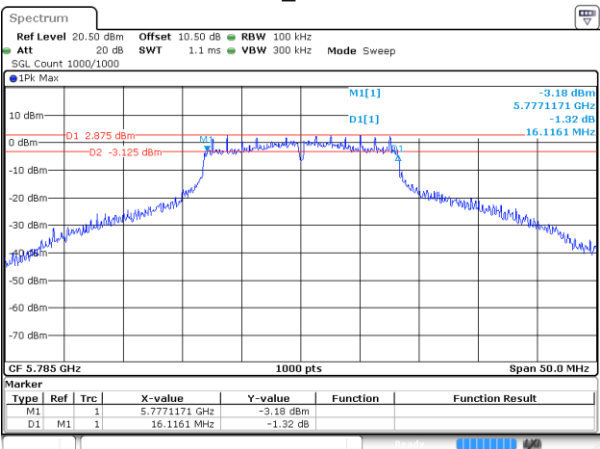
5725-5850 MHz Band

802.11a_5745MHz



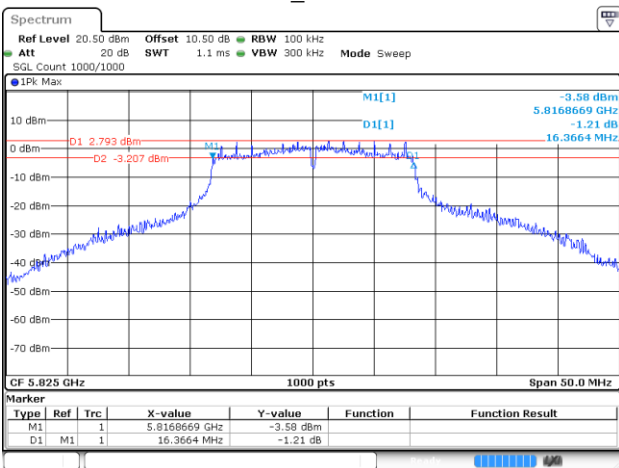
ProjectNo. RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 15:46:20

802.11a_5785MHz



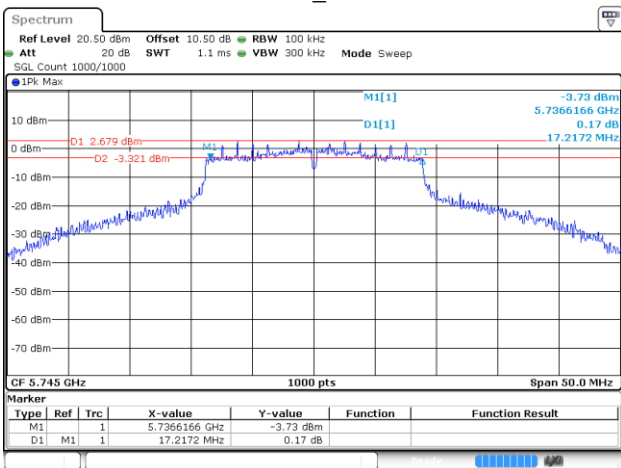
ProjectNo. RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 15:46:23

802.11a_5825MHz



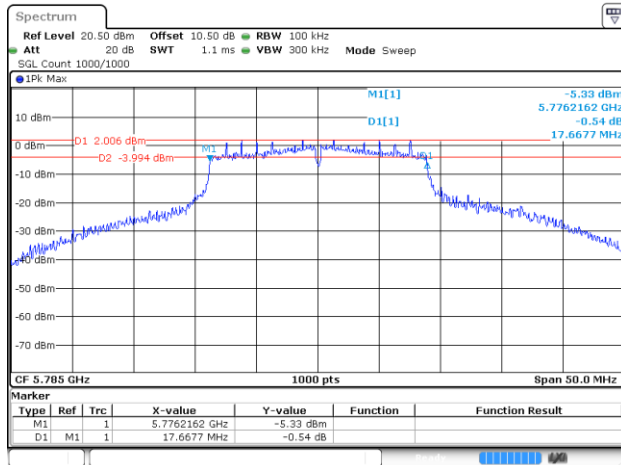
ProjectNo. RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 15:50:00

802.11ac20_5745MHz



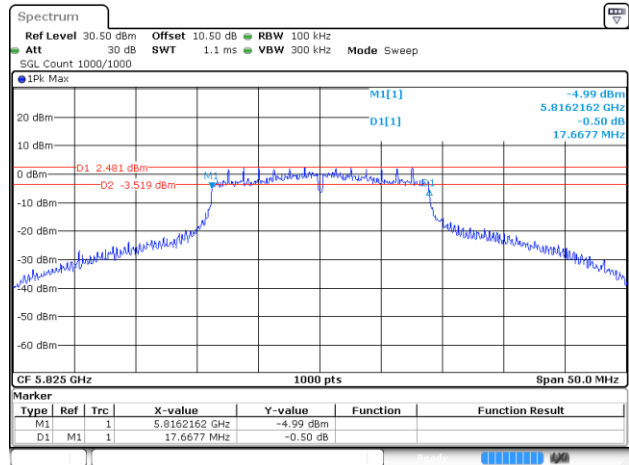
ProjectNo. RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 15:52:10

802.11ac20_5785MHz



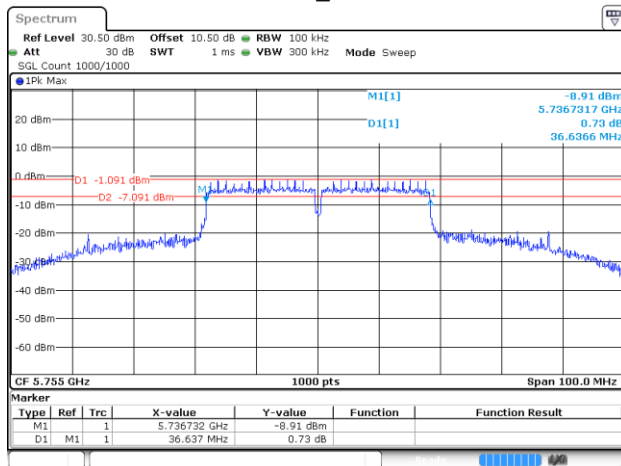
ProjectNo.:RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 15:54:02

802.11ac20_5825MHz



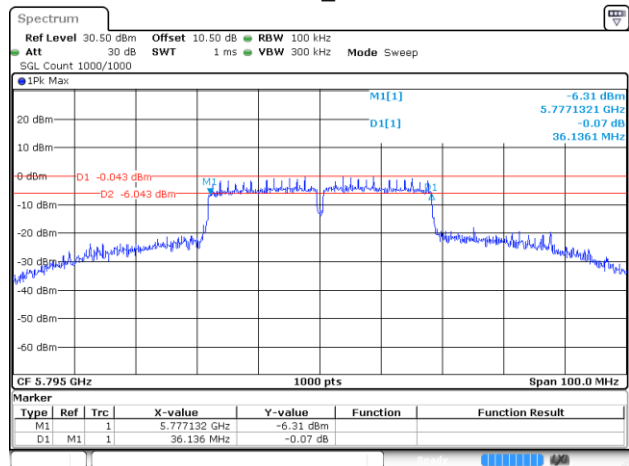
ProjectNo.:RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 15:55:48

802.11ac40_5755MHz



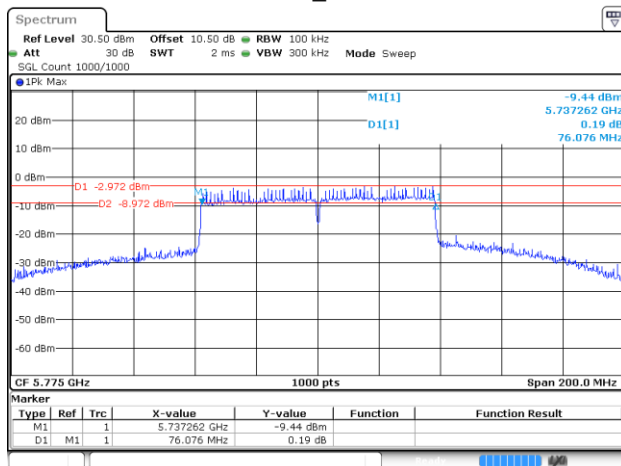
ProjectNo.:RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 15:58:00

802.11ac40_5795MHz



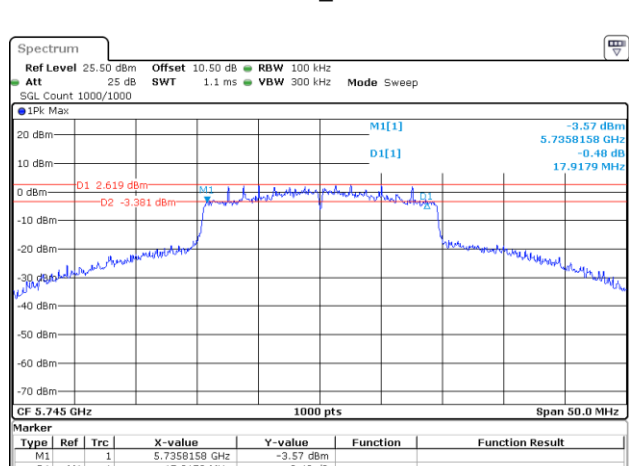
ProjectNo.:RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 16:08:11

802.11ac80_5775MHz



ProjectNo.:RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 16:08:48

802.11ax20_5745MHz



ProjectNo.:RKSA260428001 Tester:Neil Zhou
Date: 9 JUN 2026 17:05:41