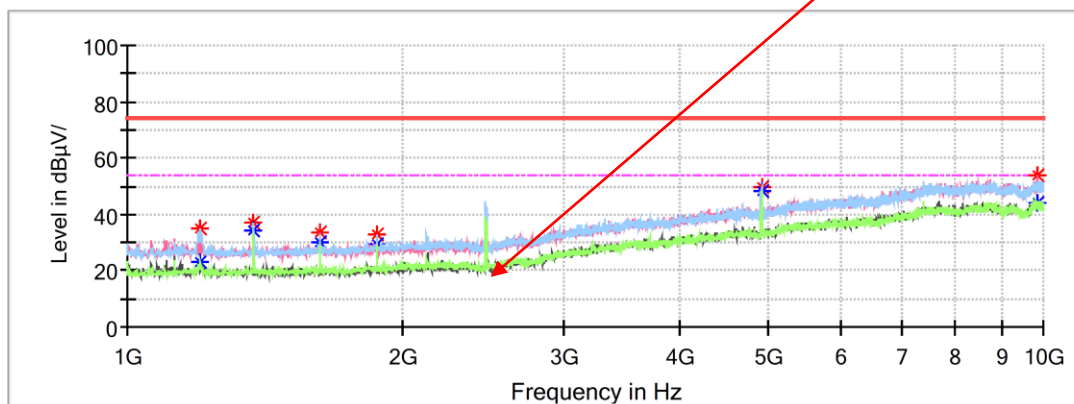


1GHz-10GHz:**High Channel: 2462MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11b mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1°C
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Fundamental Test with
Band Reject Filter

Full Spectrum

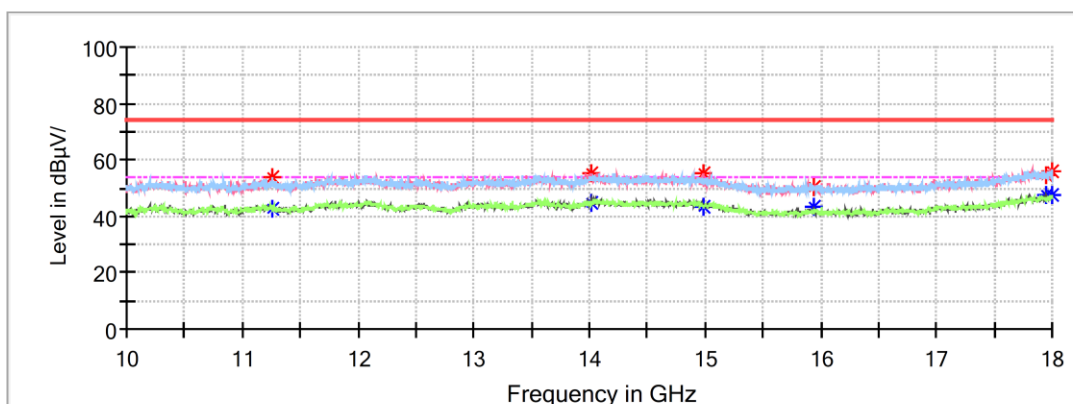
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1203.400000	---	23.33	54.00	30.67	H	-15.3
1203.400000	34.81	---	74.00	39.19	H	-15.3
1374.400000	37.01	---	74.00	36.99	V	-14.6
1374.400000	---	34.20	54.00	19.80	V	-14.6
1624.600000	33.46	---	74.00	40.54	H	-13.5
1624.600000	---	30.26	54.00	23.74	H	-13.5
1874.800000	32.70	---	74.00	41.30	V	-12.3
1874.800000	---	29.44	54.00	24.56	V	-12.3
4924.000000	49.88	---	74.00	24.12	H	-3.0
4924.000000	---	48.59	54.00	5.41	H	-3.0
9836.200000	53.51	---	74.00	20.49	V	5.9
9836.200000	---	43.91	54.00	10.09	V	5.9

10GHz-18GHz:**High Channel: 2462MHz****Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 2.4G WIFI 802.11b mode High Channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 20.1℃
 Humidity: 42%
 Atmospheric Pressure: 100.2kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/4

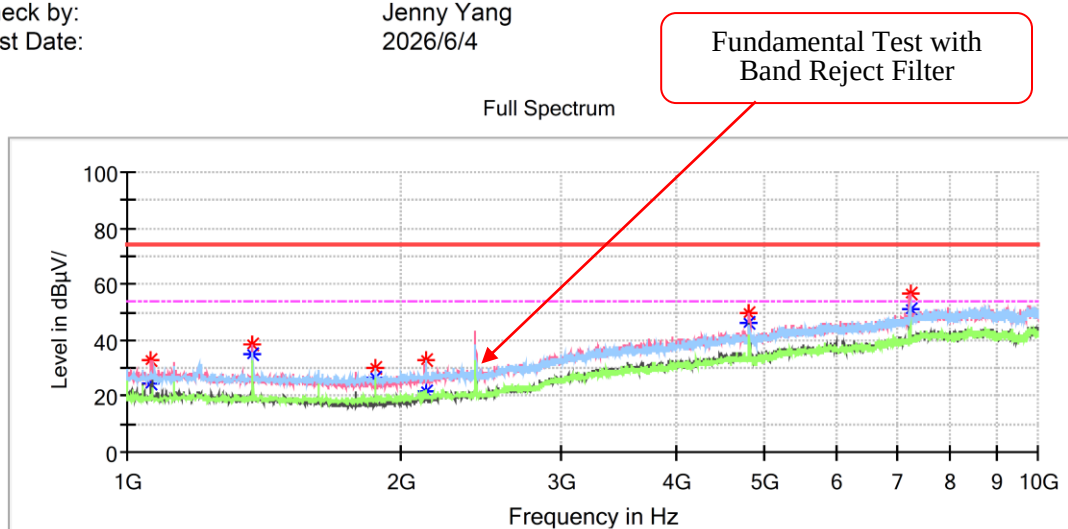
Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
11260.800000	53.59	---	74.00	20.41	H	7.5
11260.800000	---	43.01	54.00	10.99	H	7.5
14022.400000	55.44	---	74.00	18.56	V	10.7
14022.400000	---	44.87	54.00	9.13	V	10.7
14980.800000	55.25	---	74.00	18.75	V	9.4
14980.800000	---	43.57	54.00	10.43	V	9.4
15936.000000	50.55	---	74.00	23.45	V	7.6
15936.000000	---	43.27	54.00	10.73	V	7.6
17956.800000	---	47.34	54.00	6.66	V	13.6
17956.800000	54.72	---	74.00	19.28	V	13.6
17996.800000	---	47.48	54.00	6.52	H	13.8
17996.800000	55.67	---	74.00	18.33	H	13.8

802.11b Mode:**Chain 1****1GHz-10GHz:****Low Channel: 2412MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11b mode Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1℃
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

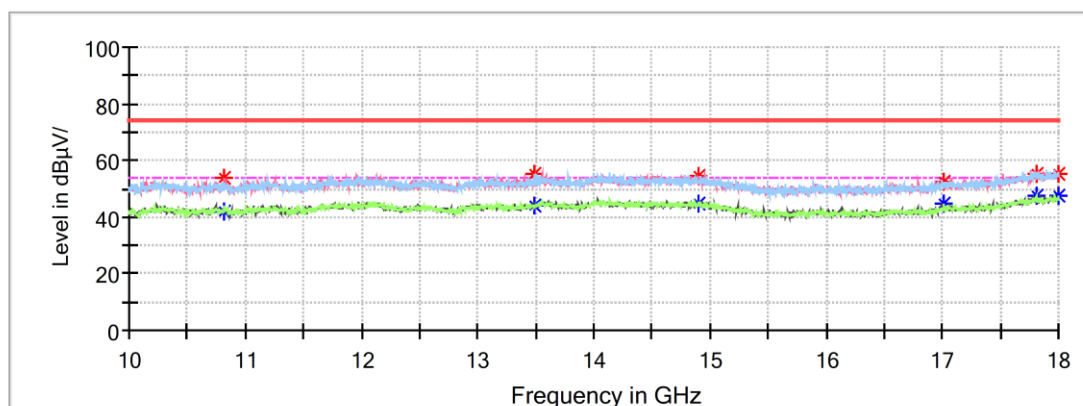
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.100000	33.08	---	74.00	40.92	V	-15.9
1062.100000	---	24.16	54.00	29.84	V	-15.9
1374.400000	---	35.00	54.00	19.00	V	-14.6
1374.400000	38.18	---	74.00	35.82	V	-14.6
1874.800000	---	26.44	54.00	27.56	H	-12.3
1874.800000	30.26	---	74.00	43.74	H	-12.3
2126.800000	---	21.53	54.00	32.47	H	-11.3
2126.800000	32.53	---	74.00	41.47	H	-11.3
4824.100000	---	46.37	54.00	7.63	V	-3.4
4824.100000	49.43	---	74.00	24.57	V	-3.4
7236.100000	---	50.89	54.00	3.12	V	2.4
7236.100000	56.97	---	74.00	17.03	V	2.4

10GHz-18GHz:**Low Channel: 2412MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11b mode Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

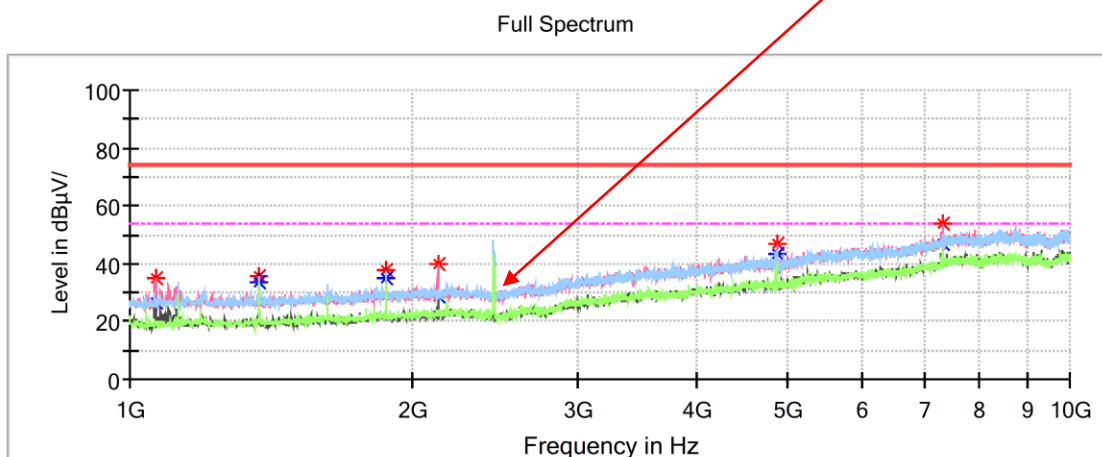
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
10816.000000	53.62	---	74.00	20.38	V	6.7
10816.000000	---	42.09	54.00	11.91	V	6.7
13491.200000	55.09	---	74.00	18.91	V	9.6
13491.200000	---	43.99	54.00	10.01	V	9.6
14900.800000	---	44.90	54.00	9.10	V	9.7
14900.800000	54.89	---	74.00	19.11	V	9.7
17012.800000	52.30	---	74.00	21.70	H	9.5
17012.800000	---	44.47	54.00	9.53	H	9.5
17804.800000	55.33	---	74.00	18.67	H	12.6
17804.800000	---	47.34	54.00	6.66	H	12.6
17996.800000	55.26	---	74.00	18.74	H	13.8
17996.800000	---	47.79	54.00	6.21	H	13.8

1GHz-10GHz:**Middle Channel: 2437MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11b mode Middle Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1℃
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

Fundamental Test with
Band Reject Filter

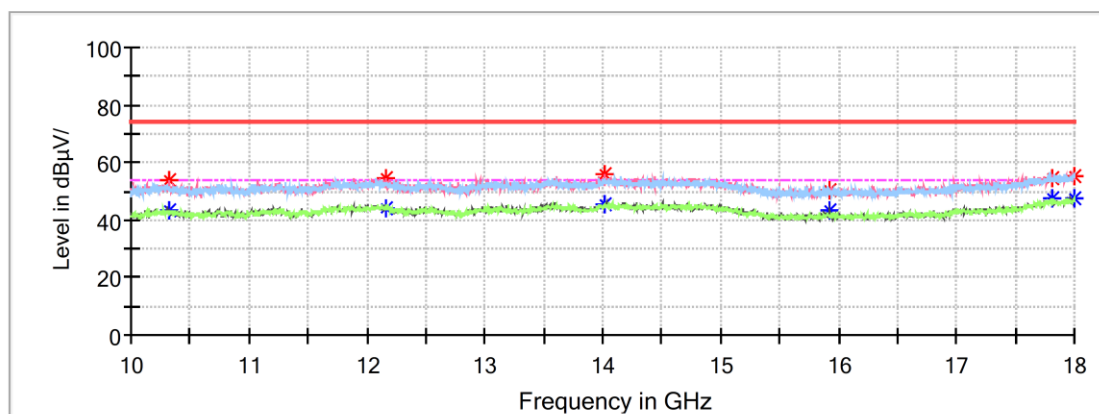
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1065.700000	35.14	---	74.00	38.86	V	-15.9
1065.700000	---	26.31	54.00	27.69	V	-15.9
1374.400000	---	33.37	54.00	20.63	H	-14.6
1374.400000	35.96	---	74.00	38.04	H	-14.6
1874.800000	37.83	---	74.00	36.17	V	-12.3
1874.800000	---	34.91	54.00	19.09	V	-12.3
2126.800000	---	28.70	54.00	25.30	V	-11.3
2126.800000	39.71	---	74.00	34.29	V	-11.3
4873.600000	46.54	---	74.00	27.46	V	-3.2
4873.600000	---	43.13	54.00	10.87	V	-3.2
7309.900000	53.91	---	74.00	20.09	V	2.7
7309.900000	---	47.11	54.00	6.89	V	2.7

10GHz-18GHz:**Middle Channel: 2437MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11b mode Middle Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1℃
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

Full Spectrum

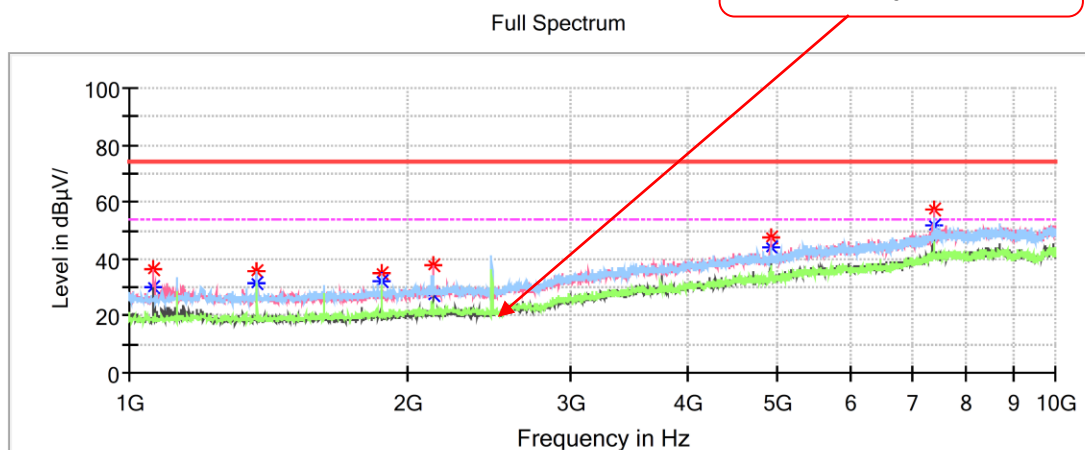
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
10320.000000	---	43.31	54.00	10.69	V	6.6
10320.000000	53.93	---	74.00	20.07	V	6.6
12160.000000	---	43.93	54.00	10.07	V	8.9
12160.000000	54.82	---	74.00	19.18	V	8.9
14022.400000	---	45.74	54.00	8.26	V	10.7
14022.400000	55.87	---	74.00	18.13	V	10.7
15931.200000	50.63	---	74.00	23.37	V	7.6
15931.200000	---	43.01	54.00	10.99	V	7.6
17806.400000	54.71	---	74.00	19.29	H	12.6
17806.400000	---	47.88	54.00	6.12	H	12.6
17998.400000	55.27	---	74.00	18.73	H	13.8
17998.400000	---	47.51	54.00	6.49	H	13.8

1GHz-10GHz:**High Channel: 2462MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11b mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1°C
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Fundamental Test with
Band Reject Filter

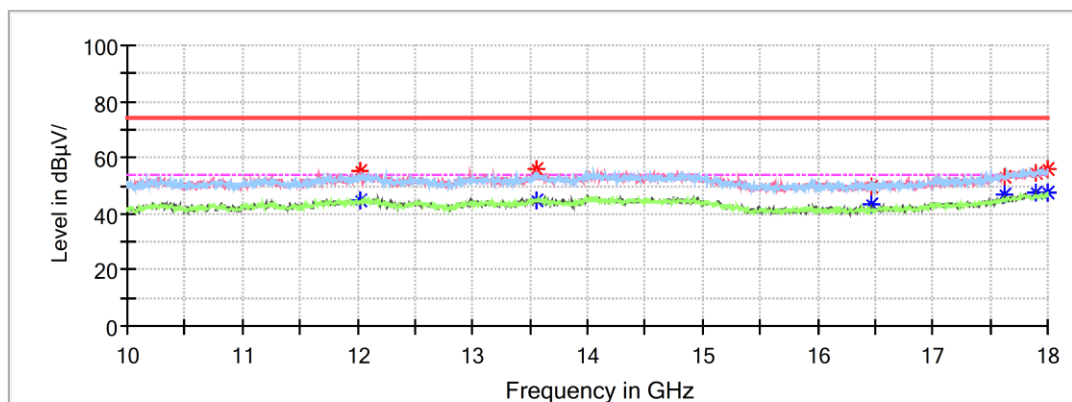
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1062.100000	36.40	---	74.00	37.60	V	-15.9
1062.100000	---	30.25	54.00	23.75	V	-15.9
1374.400000	35.59	---	74.00	38.41	H	-14.6
1374.400000	---	31.77	54.00	22.23	H	-14.6
1874.800000	35.30	---	74.00	38.70	V	-12.3
1874.800000	---	32.16	54.00	21.84	V	-12.3
2129.500000	37.85	---	74.00	36.15	V	-11.3
2129.500000	---	27.44	54.00	26.56	V	-11.3
4924.000000	47.76	---	74.00	26.24	V	-3.0
4924.000000	---	44.38	54.00	9.62	V	-3.0
7387.300000	57.34	---	74.00	16.66	V	2.9
7387.300000	---	51.72	54.00	2.28	V	2.9

10GHz-18GHz:**High Channel: 2462MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11b mode High Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1℃
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

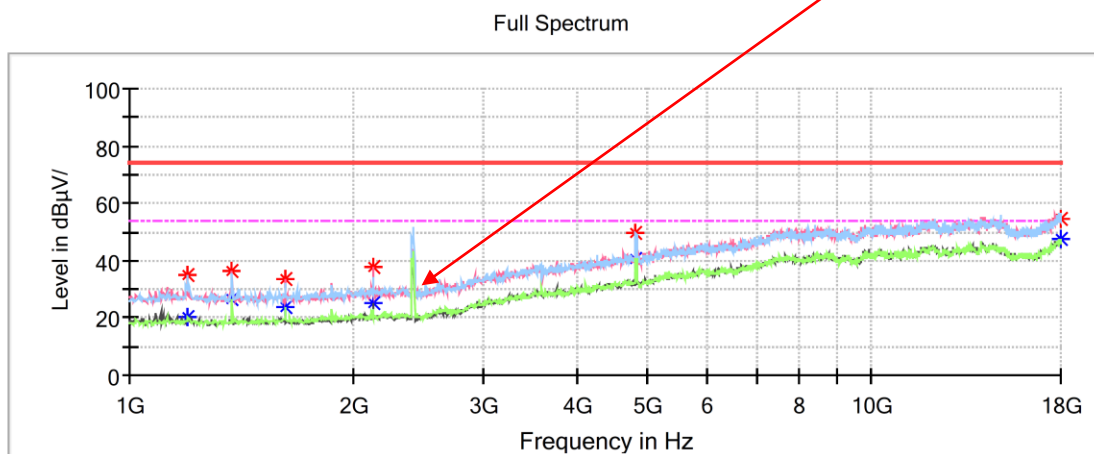
Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
12025.600000	---	44.48	54.00	9.52	V	9.0
12025.600000	55.03	---	74.00	18.97	V	9.0
13553.600000	---	44.55	54.00	9.45	H	9.8
13553.600000	56.12	---	74.00	17.88	H	9.8
16467.200000	49.44	---	74.00	24.56	H	7.6
16467.200000	---	43.42	54.00	10.58	H	7.6
17627.200000	52.97	---	74.00	21.03	V	11.6
17627.200000	---	46.62	54.00	7.38	V	11.6
17889.600000	54.89	---	74.00	19.11	V	13.2
17889.600000	---	47.46	54.00	6.54	V	13.2
17996.800000	55.78	---	74.00	18.22	V	13.8
17996.800000	---	47.54	54.00	6.46	V	13.8

802.11g Mode:**Chain 0****1GHz-18GHz:****Low Channel: 2412MHz****Common Information**

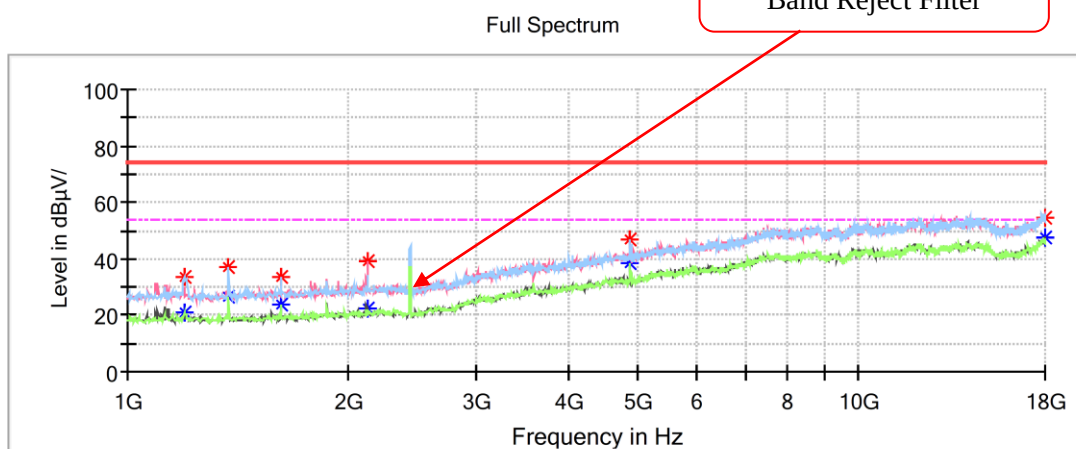
Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11g mode Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1°C
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

Fundamental Test with
Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1197.200000	---	20.17	54.00	33.83	H	-15.3
1197.200000	35.13	---	74.00	38.87	H	-15.3
1374.000000	---	26.74	54.00	27.26	V	-14.6
1374.000000	36.07	---	74.00	37.93	V	-14.6
1622.200000	---	23.75	54.00	30.25	V	-13.5
1622.200000	33.36	---	74.00	40.64	V	-13.5
2128.800000	---	24.93	54.00	29.07	V	-11.3
2128.800000	37.50	---	74.00	36.50	V	-11.3
4814.800000	---	40.42	54.00	13.58	H	-3.4
4814.800000	49.82	---	74.00	24.18	H	-3.4
17966.000000	54.47	---	74.00	19.53	V	13.6
17966.000000	---	47.40	54.00	6.60	V	13.6

Middle Channel: 2437MHz**Common Information**

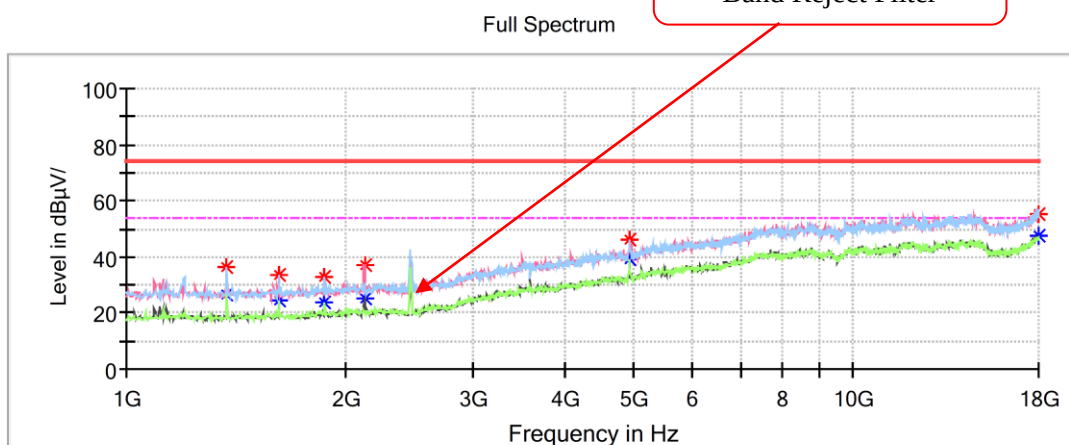
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11g mode Middle Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1193.800000	---	20.72	54.00	33.28	H	-15.3
1193.800000	33.46	---	74.00	40.54	H	-15.3
1374.000000	37.17	---	74.00	36.83	H	-14.6
1374.000000	---	26.82	54.00	27.18	H	-14.6
1622.200000	33.49	---	74.00	40.51	V	-13.5
1622.200000	---	23.76	54.00	30.24	V	-13.5
2128.800000	39.30	---	74.00	34.70	V	-11.3
2128.800000	---	22.65	54.00	31.35	V	-11.3
4865.800000	46.97	---	74.00	27.03	H	-3.2
4865.800000	---	38.42	54.00	15.58	H	-3.2
17955.800000	---	47.55	54.00	6.45	H	13.6
17955.800000	54.25	---	74.00	19.75	H	13.6

High Channel: 2462MHz**Common Information**

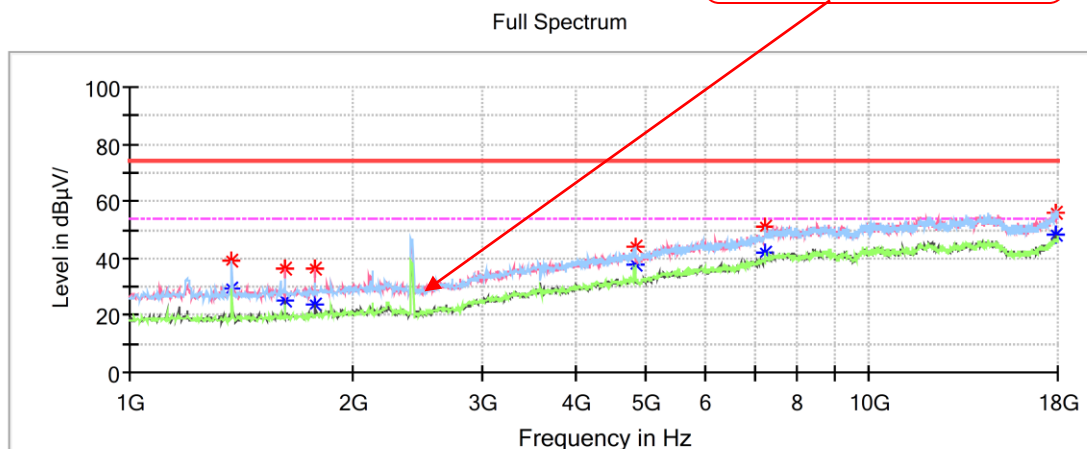
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11g mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1374.000000	---	26.75	54.00	27.25	V	-14.6
1374.000000	36.53	---	74.00	37.47	V	-14.6
1622.200000	---	24.20	54.00	29.80	H	-13.5
1622.200000	33.59	---	74.00	40.41	H	-13.5
1873.800000	---	23.80	54.00	30.20	H	-12.3
1873.800000	32.89	---	74.00	41.11	H	-12.3
2125.400000	---	24.92	54.00	29.08	V	-11.3
2125.400000	37.03	---	74.00	36.97	V	-11.3
4923.600000	---	38.89	54.00	15.11	V	-3.0
4923.600000	46.48	---	74.00	27.52	V	-3.0
17996.600000	54.91	---	74.00	19.09	V	13.8
17996.600000	---	47.38	54.00	6.62	V	13.8

802.11g Mode:**Chain 1****1GHz-18GHz:****Low Channel: 2412MHz****Common Information**

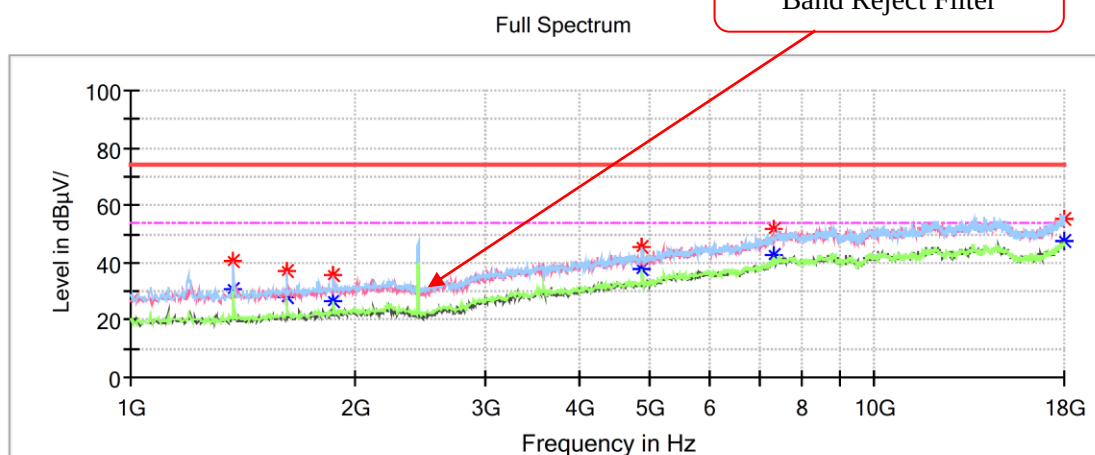
Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11g mode Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Fundamental Test with
Band Reject Filter**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1374.000000	39.20	---	74.00	34.80	H	-14.6
1374.000000	---	29.25	54.00	24.75	H	-14.6
1622.200000	36.06	---	74.00	37.94	V	-13.5
1622.200000	---	25.31	54.00	28.69	V	-13.5
1778.600000	36.06	---	74.00	37.94	V	-12.7
1778.600000	---	23.44	54.00	30.56	V	-12.7
4821.600000	44.34	---	74.00	29.66	H	-3.4
4821.600000	---	37.82	54.00	16.18	H	-3.4
7228.800000	---	42.17	54.00	11.83	H	2.4
7228.800000	51.05	---	74.00	22.95	H	2.4
17921.800000	---	47.94	54.00	6.06	V	13.4
17921.800000	56.07	---	74.00	17.93	V	13.4

Middle Channel: 2437MHz**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 2.4G WIFI 802.11g mode Middle Channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 20.1℃
 Humidity: 42%
 Atmospheric Pressure: 100.2kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/4

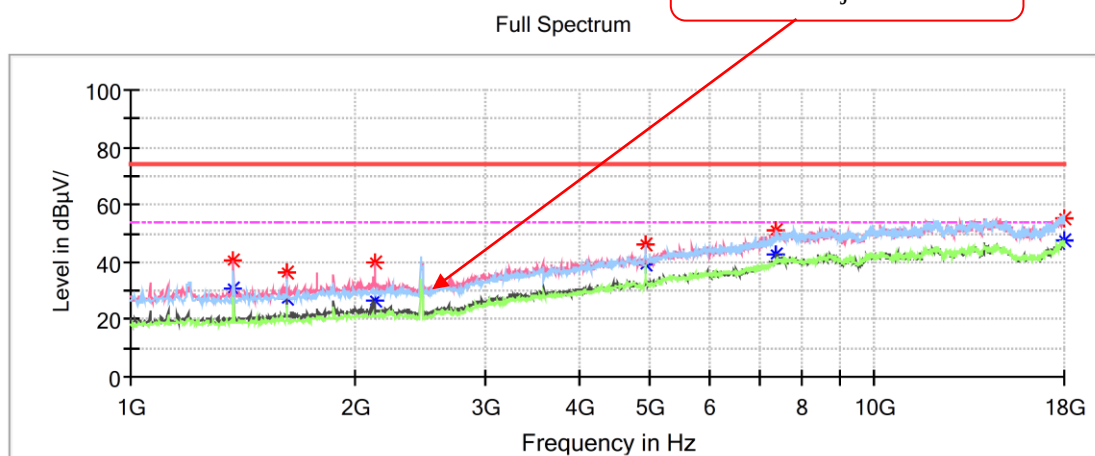
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1374.000000	---	30.55	54.00	23.45	V	-14.6
1374.000000	40.60	---	74.00	33.40	V	-14.6
1622.200000	---	28.20	54.00	25.80	H	-13.5
1622.200000	36.84	---	74.00	37.16	H	-13.5
1873.800000	---	26.66	54.00	27.34	H	-12.3
1873.800000	35.38	---	74.00	38.62	H	-12.3
4872.600000	---	37.78	54.00	16.22	H	-3.2
4872.600000	45.53	---	74.00	28.47	H	-3.2
7317.200000	51.94	---	74.00	22.06	V	2.7
7317.200000	---	42.60	54.00	11.40	V	2.7
17996.600000	55.09	---	74.00	18.91	V	13.8
17996.600000	---	47.62	54.00	6.38	V	13.8

High Channel: 2462MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11g mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

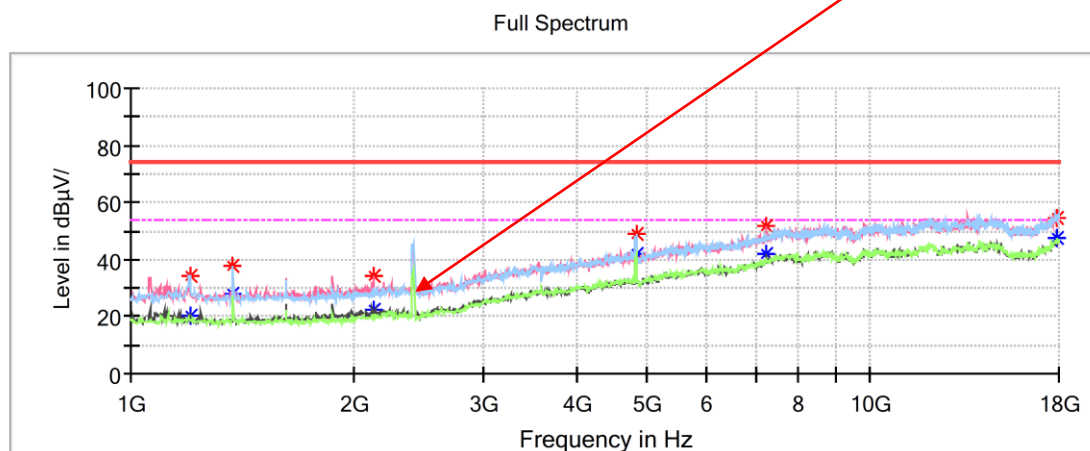
Fundamental Test with
Band Reject Filter

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1374.000000	---	30.68	54.00	23.32	V	-14.6
1374.000000	40.77	---	74.00	33.23	V	-14.6
1622.200000	---	27.57	54.00	26.43	V	-13.5
1622.200000	36.65	---	74.00	37.35	V	-13.5
2132.200000	---	26.84	54.00	27.16	V	-11.3
2132.200000	39.71	---	74.00	34.29	V	-11.3
4923.600000	45.99	---	74.00	28.01	H	-3.0
4923.600000	---	39.03	54.00	14.97	H	-3.0
7388.600000	---	42.38	54.00	11.62	V	2.9
7388.600000	50.97	---	74.00	23.03	V	2.9
17996.600000	54.93	---	74.00	19.07	V	13.8
17996.600000	---	47.64	54.00	6.36	V	13.8

802.11n-HT20 Mode :**Chain 0 + Chain 1****1GHz-18GHz:****Low Channel: 2412MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11n20 mode Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1℃
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

Fundamental Test with
Band Reject Filter**Critical Freqs**

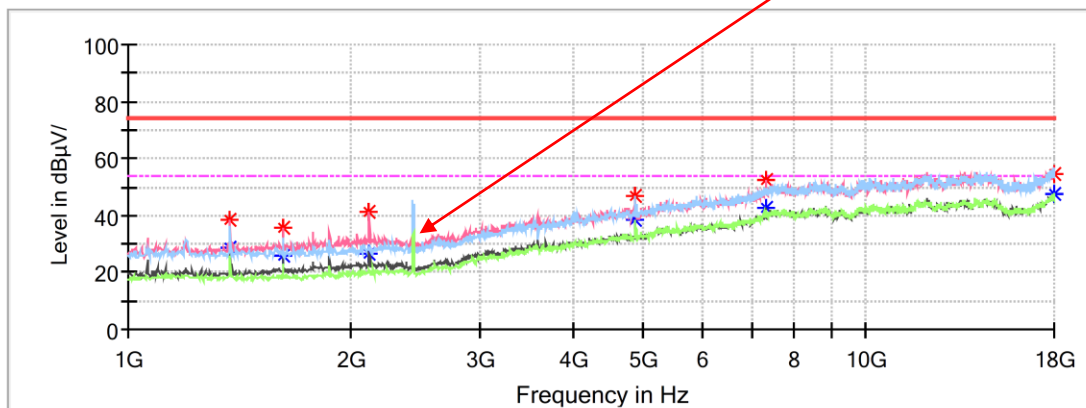
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1204.000000	34.39	---	74.00	39.61	V	-15.3
1204.000000	---	20.26	54.00	33.74	V	-15.3
1374.000000	37.71	---	74.00	36.29	V	-14.6
1374.000000	---	28.11	54.00	25.89	V	-14.6
2128.800000	34.56	---	74.00	39.44	V	-11.3
2128.800000	---	22.63	54.00	31.37	V	-11.3
4821.600000	---	42.23	54.00	11.77	H	-3.4
4821.600000	49.10	---	74.00	24.90	H	-3.4
7235.600000	---	42.19	54.00	11.81	V	2.4
7235.600000	51.96	---	74.00	22.04	V	2.4
17932.000000	54.23	---	74.00	19.77	V	13.4
17932.000000	---	47.53	54.00	6.47	V	13.4

Middle Channel: 2437MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11n20 mode Middle Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Fundamental Test with
Band Reject Filter

Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1374.000000	---	28.37	54.00	25.63	V	-14.6
1374.000000	38.66	---	74.00	35.34	V	-14.6
1622.200000	---	25.89	54.00	28.11	V	-13.5
1622.200000	35.53	---	74.00	38.47	V	-13.5
2122.000000	---	26.45	54.00	27.55	V	-11.3
2122.000000	41.24	---	74.00	32.76	V	-11.3
4869.200000	46.65	---	74.00	27.35	H	-3.2
4869.200000	---	38.45	54.00	15.55	H	-3.2
7307.000000	52.24	---	74.00	21.76	V	2.7
7307.000000	---	42.83	54.00	11.17	V	2.7
17969.400000	54.58	---	74.00	19.42	H	13.6
17969.400000	---	47.66	54.00	6.34	H	13.6