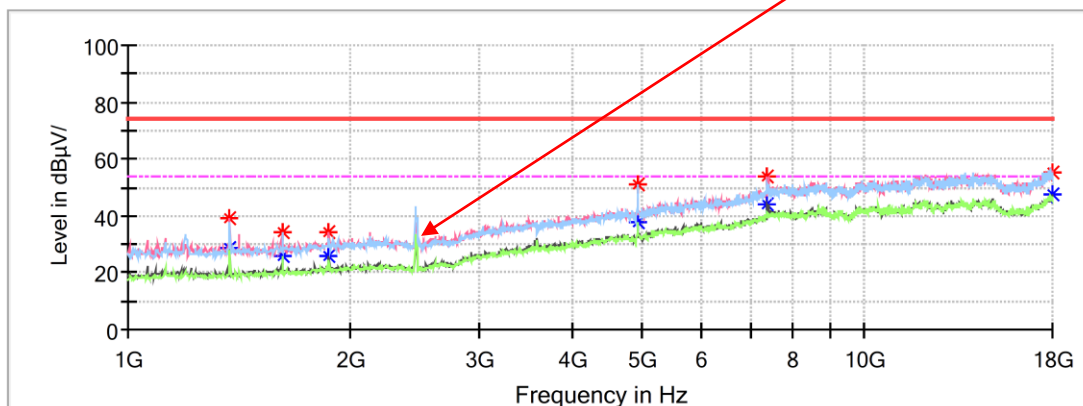


High Channel: 2462MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11n20 mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Fundamental Test with
Band Reject Filter


Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1374.000000	39.20	---	74.00	34.80	V	-14.6
1374.000000	---	28.77	54.00	25.23	V	-14.6
1622.200000	34.24	---	74.00	39.76	V	-13.5
1622.200000	---	25.64	54.00	28.36	V	-13.5
1873.800000	34.29	---	74.00	39.71	V	-12.3
1873.800000	---	26.13	54.00	27.87	V	-12.3
4923.600000	50.85	---	74.00	23.15	H	-3.0
4923.600000	---	38.04	54.00	15.96	H	-3.0
7385.200000	---	44.31	54.00	9.69	V	2.9
7385.200000	53.77	---	74.00	20.23	V	2.9
17996.600000	55.09	---	74.00	18.91	V	13.8
17996.600000	---	47.47	54.00	6.53	V	13.8

802.11ax-HE20 Mode :**Chain 0 + Chain 1****1GHz-18GHz:****Low Channel: 2412MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11ax20 mode Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1°C
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

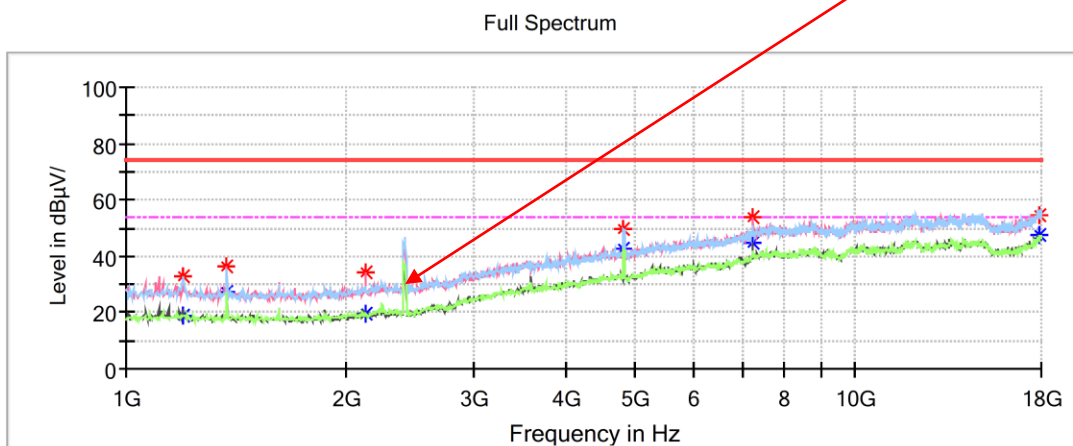Fundamental Test with
Band Reject Filter**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB)
1200.600000	32.74	---	74.00	41.26	H	-15.3
1200.600000	---	19.04	54.00	34.96	H	-15.3
1374.000000	36.28	---	74.00	37.72	V	-14.6
1374.000000	---	26.97	54.00	27.03	V	-14.6
2132.200000	34.42	---	74.00	39.58	V	-11.3
2132.200000	---	19.72	54.00	34.28	V	-11.3
4814.800000	49.96	---	74.00	24.04	H	-3.4
4814.800000	---	42.47	54.00	11.53	H	-3.4
7232.200000	53.71	---	74.00	20.29	V	2.4
7232.200000	---	44.59	54.00	9.41	V	2.4
17918.400000	---	47.75	54.00	6.25	V	13.3
17918.400000	54.62	---	74.00	19.38	V	13.3

Middle Channel: 2437MHz**Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: 2.4G WIFI 802.11ax20 mode Middle Channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 20.1℃
 Humidity: 42%
 Atmospheric Pressure: 100.2kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/4

Fundamental Test with
Band Reject Filter

Full Spectrum

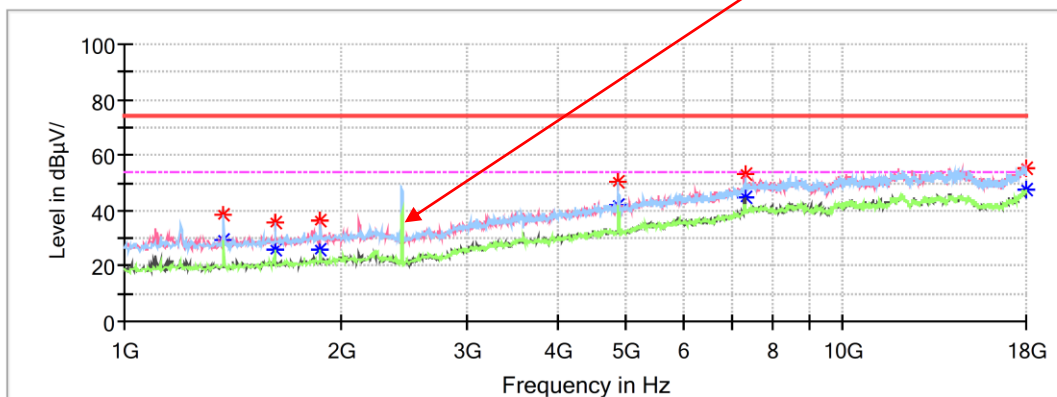**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1374.000000	---	29.30	54.00	24.70	H	-14.6
1374.000000	38.78	---	74.00	35.22	H	-14.6
1622.200000	35.82	---	74.00	38.18	H	-13.5
1622.200000	---	26.09	54.00	27.91	H	-13.5
1873.800000	---	26.13	54.00	27.87	V	-12.3
1873.800000	36.14	---	74.00	37.86	V	-12.3
4872.600000	---	42.24	54.00	11.76	H	-3.2
4872.600000	50.55	---	74.00	23.45	H	-3.2
7307.000000	---	44.86	54.00	9.14	V	2.7
7307.000000	53.30	---	74.00	20.70	V	2.7
17996.600000	55.27	---	74.00	18.73	H	13.8
17996.600000	---	47.68	54.00	6.32	H	13.8

High Channel: 2462MHz**Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11ax20 mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Fundamental Test with
Band Reject Filter

Full Spectrum

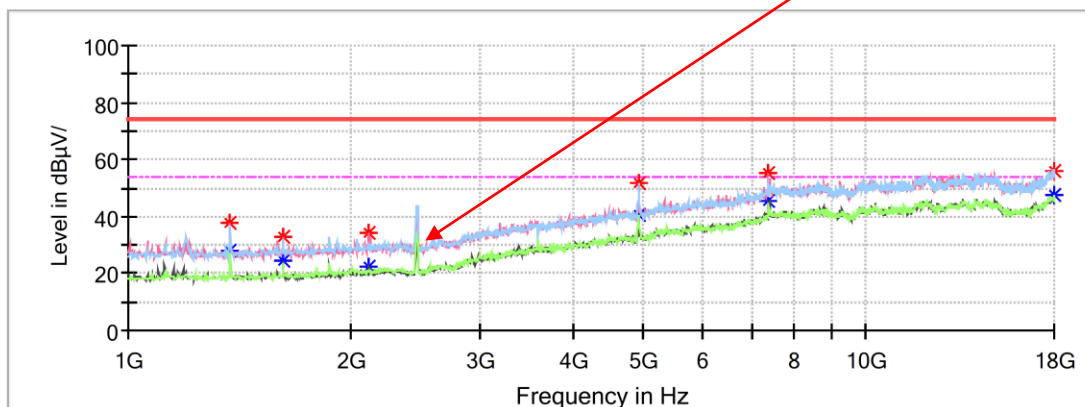**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1374.000000	---	28.20	54.00	25.80	V	-14.6
1374.000000	37.64	---	74.00	36.36	V	-14.6
1622.200000	---	24.27	54.00	29.73	V	-13.5
1622.200000	32.89	---	74.00	41.11	V	-13.5
2122.000000	---	22.27	54.00	31.73	V	-11.3
2122.000000	34.51	---	74.00	39.49	V	-11.3
4927.000000	51.42	---	74.00	22.58	H	-3.0
4927.000000	---	40.48	54.00	13.52	H	-3.0
7381.800000	---	45.70	54.00	8.30	V	2.9
7381.800000	54.99	---	74.00	19.01	V	2.9
17996.600000	56.12	---	74.00	17.88	H	13.8
17996.600000	---	47.58	54.00	6.42	H	13.8


Band Edge:
802.11b Mode:
Chain 0

Low Channel

Common Information

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11b mode Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1℃
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

Full Spectrum

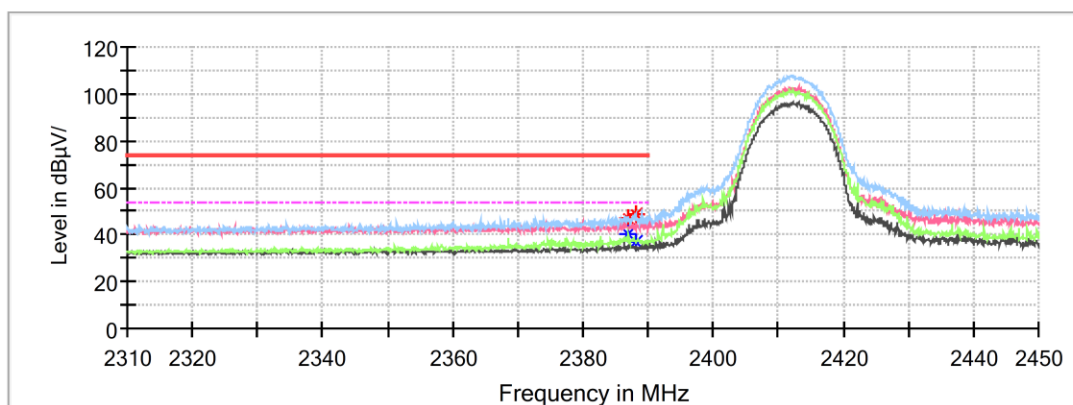

Critical_Freqs


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2387.056000	---	40.26	54.00	13.74	H	-0.6
2387.056000	46.93	---	74.00	27.07	H	-0.6
2388.008000	---	36.89	54.00	17.11	H	-0.6
2388.008000	48.65	---	74.00	25.35	H	-0.6

High Channel

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11b mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

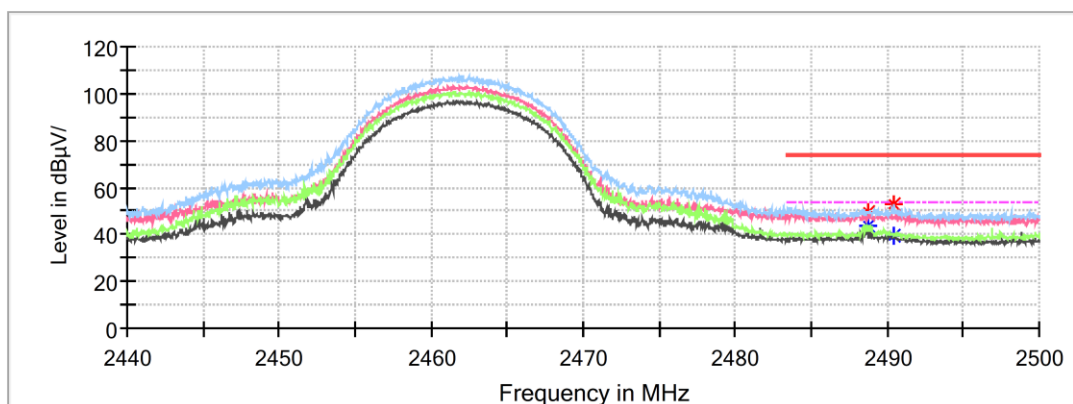

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2488.696000	---	44.02	54.00	9.98	H	-0.3
2488.696000	49.68	---	74.00	24.32	H	-0.3
2490.472000	---	39.76	54.00	14.24	H	-0.3
2490.472000	52.45	---	74.00	21.55	H	-0.3


Band Edge:
802.11b Mode:
Chain 1

Low Channel

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11b mode Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

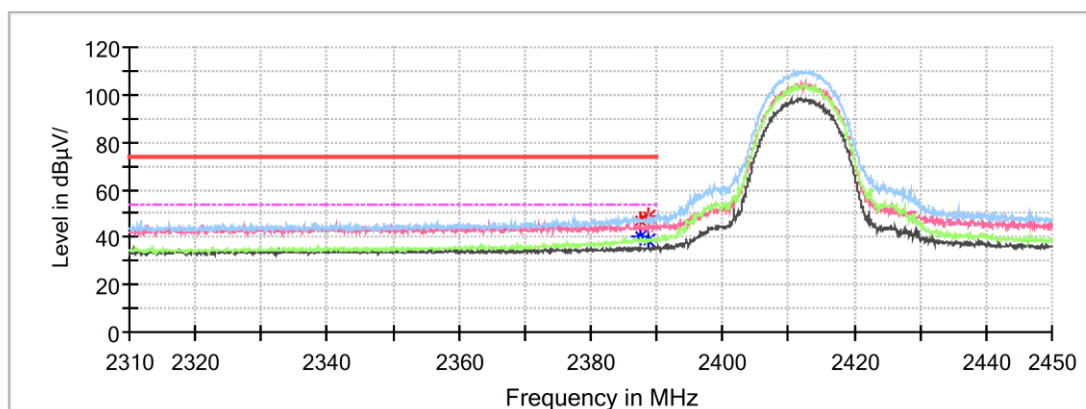

Critical Freqs


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2387.560000	---	39.90	54.00	14.10	H	-0.6
2387.560000	47.33	---	74.00	26.67	H	-0.6
2388.624000	---	38.49	54.00	15.51	H	-0.6
2388.624000	48.86	---	74.00	25.14	H	-0.6

High Channel

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11b mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

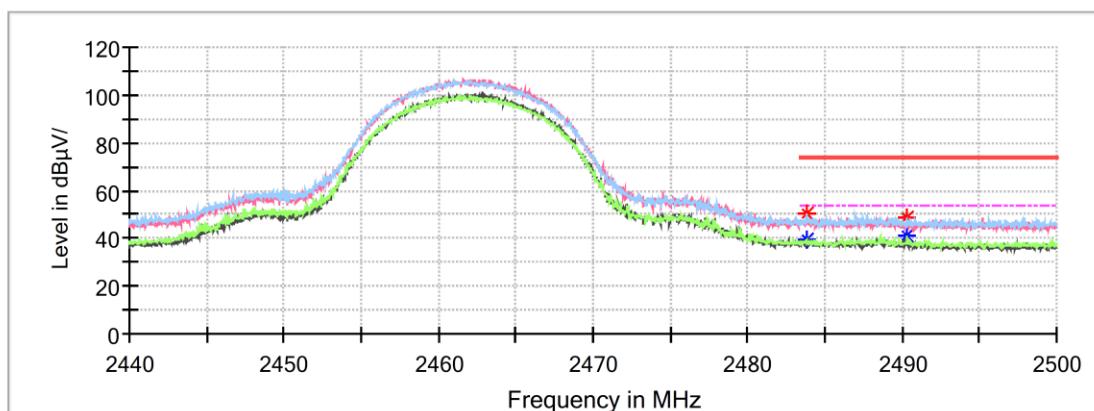


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.776000	50.40	---	74.00	23.60	H	-0.3
2483.776000	---	39.02	54.00	14.98	H	-0.3
2490.304000	48.44	---	74.00	25.56	H	-0.3
2490.304000	---	41.31	54.00	12.69	H	-0.3

**802.11g Mode :
Chain 0****Low Channel****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11g mode Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1℃
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

Full Spectrum

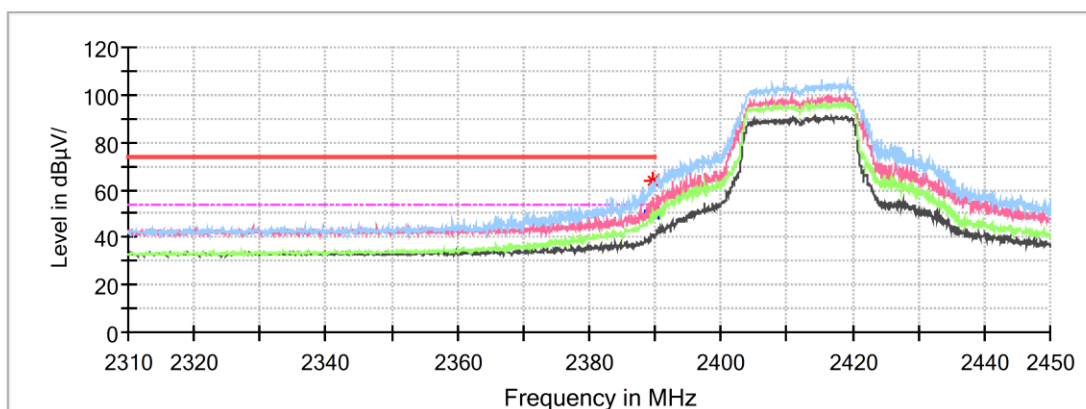**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.744000	---	50.62	54.00	3.38	H	-0.6
2389.744000	63.45	---	74.00	10.55	H	-0.6
2389.800000	---	50.95	54.00	3.05	H	-0.6
2389.800000	63.40	---	74.00	10.60	H	-0.6

High Channel

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11g mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

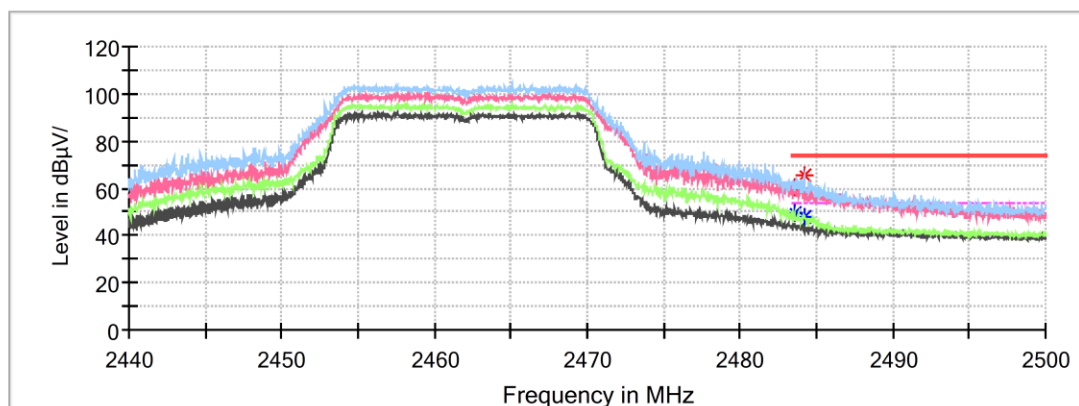


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.560000	---	49.78	54.00	4.22	H	-0.3
2483.560000	60.59	---	74.00	13.41	H	-0.3
2484.160000	---	47.85	54.00	6.15	H	-0.3
2484.160000	65.79	---	74.00	8.21	H	-0.3

**802.11g Mode :
Chain 1****Low Channel****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11g mode Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

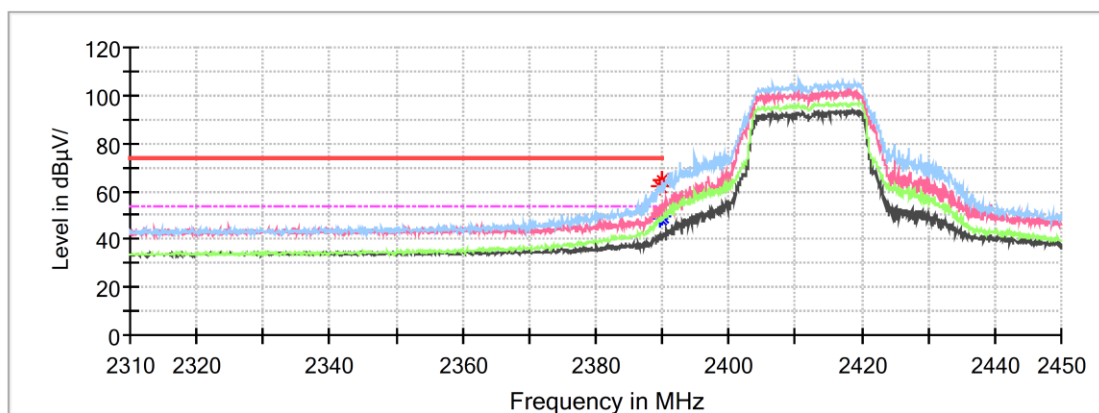**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.520000	---	48.63	54.00	5.37	H	-0.6
2389.520000	61.89	---	74.00	12.11	H	-0.6
2389.968000	64.67	---	74.00	9.33	H	-0.6
2389.968000	---	49.50	54.00	4.50	H	-0.6

High Channel

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11g mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

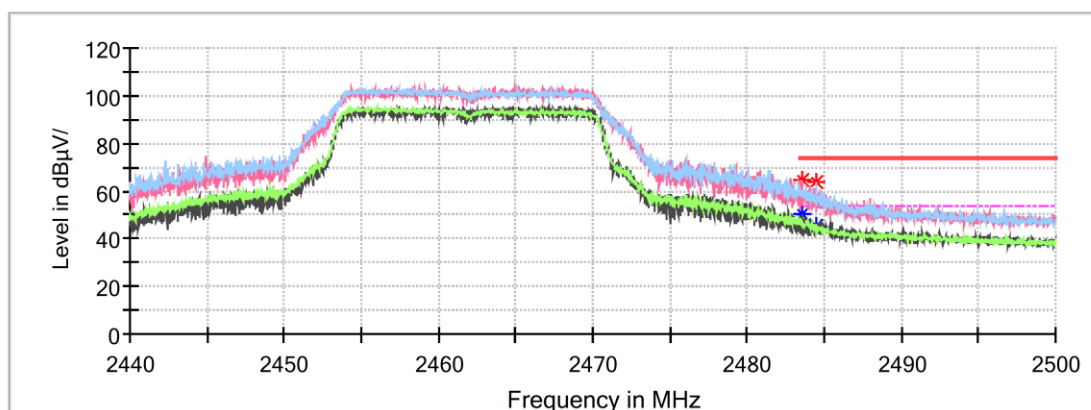


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.560000	---	50.07	54.00	3.93	V	-0.3
2483.560000	64.68	---	74.00	9.32	V	-0.3
2484.496000	---	45.38	54.00	8.62	V	-0.3
2484.496000	63.54	---	74.00	10.46	V	-0.3

**802.11n-HT20 Mode:
Chain 0 + Chain 1****Low Channel****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	2.4G WIFI 802.11n20 mode Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	20.1℃
Humidity:	42%
Atmospheric Pressure:	100.2kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/4

Full Spectrum

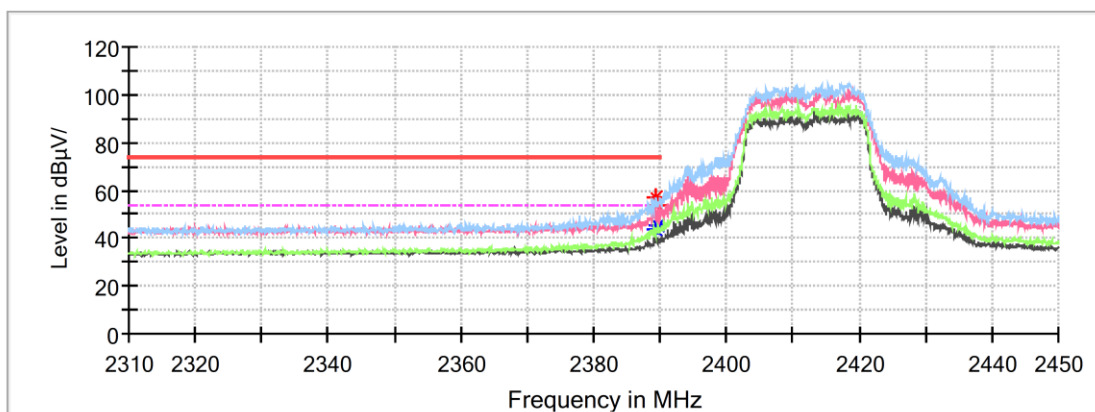**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.464000	56.96	---	74.00	17.04	H	-0.6
2389.464000	---	43.69	54.00	10.31	H	-0.6
2389.800000	54.09	---	74.00	19.91	H	-0.6
2389.800000	---	45.02	54.00	8.98	H	-0.6

High Channel

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11n20 mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

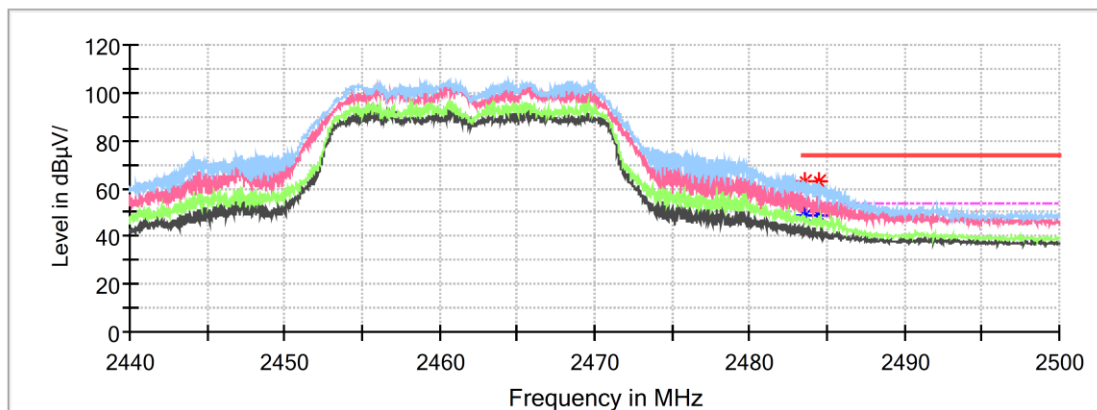


Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.560000	---	48.64	54.00	5.36	H	-0.3
2483.560000	62.95	---	74.00	11.05	H	-0.3
2484.448000	---	48.47	54.00	5.53	H	-0.3
2484.448000	62.79	---	74.00	11.21	H	-0.3

802.11ax-HE20 Mode:**Chain 0 + Chain 1****Low Channel****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11ax20 mode Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4

Full Spectrum

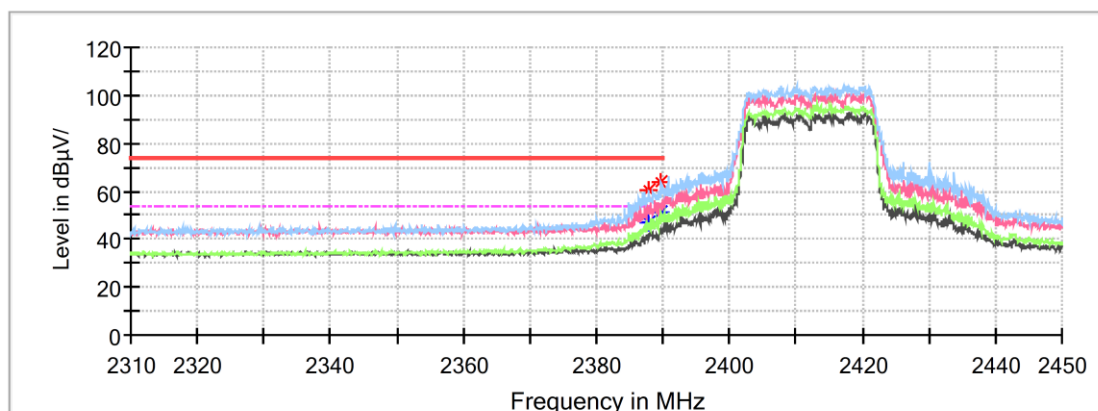**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2387.784000	---	46.70	54.00	7.30	H	-0.6
2387.784000	60.51	---	74.00	13.49	H	-0.6
2389.800000	---	50.91	54.00	3.09	H	-0.6
2389.800000	64.04	---	74.00	9.96	H	-0.6

High Channel

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: 2.4G WIFI 802.11ax20 mode High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 20.1℃
Humidity: 42%
Atmospheric Pressure: 100.2kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/4



Full Spectrum

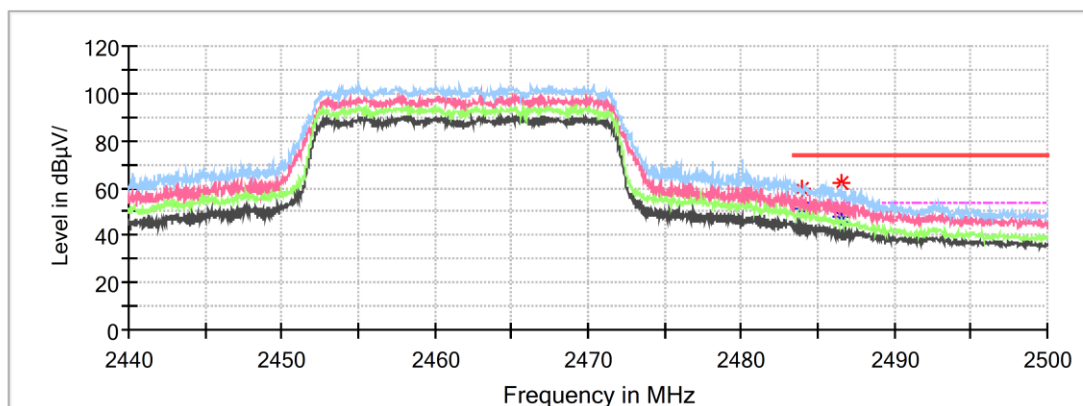

Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.968000	59.48	---	74.00	14.52	H	-0.3
2483.968000	---	50.85	54.00	3.15	H	-0.3
2486.512000	61.75	---	74.00	12.25	H	-0.3
2486.512000	---	47.68	54.00	6.32	H	-0.3

**18GHz-25GHz: Transmitting in maximum output power 802.11n20 mode high channel
chain 0 + chain 1**

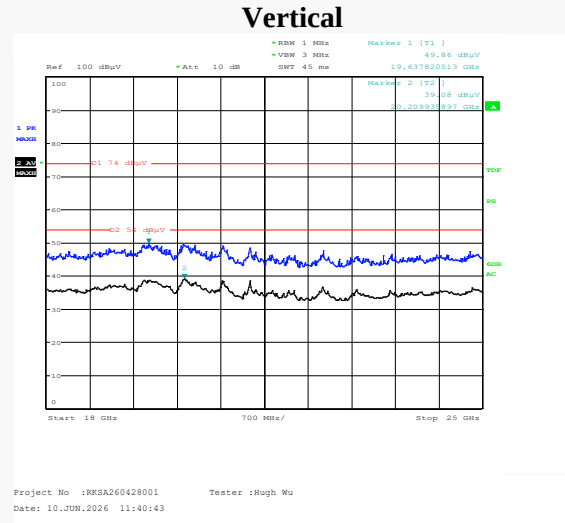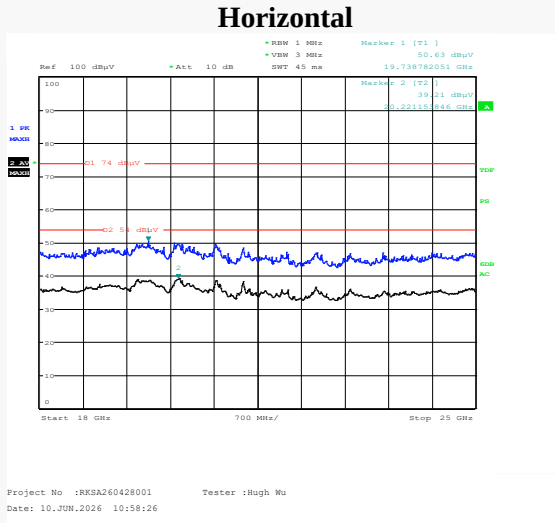


Frequency (GHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
20.21	---	39.08	54	14.92	V	12.47
19.64	49.86	---	74	24.14	V	11.96
20.22	---	39.21	54	14.79	H	12.48
19.74	50.63	---	74	23.37	H	12.05

Note: The test distance is 3m. The limit is 74dBμV/m (Peak) and 54dBμV/m (Average).

BLE Mode:**9kHz-150kHz:** Transmitting in maximum output power mode BLE (1 Mbps) low channel**Parallel(worst case)****Low Channel: 2402MHz****Common Information**

Project No: RKSA260428001
EUT Model: SRP2410A
Test Mode: Transmitting in BLE 1M mode low channel
Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment: ESCI, 1313-1A, 310N
Receiver Setting: RBW: 200 Hz, VBW: 1 kHz, Sweep Time: Auto
Temperature: 22.5°C
Humidity: 54%
Barometric Pressure: 101.3kPa
Test Engineer: Scarf Yang
Check by: Jenny Yang
Test Date: 2026/5/29

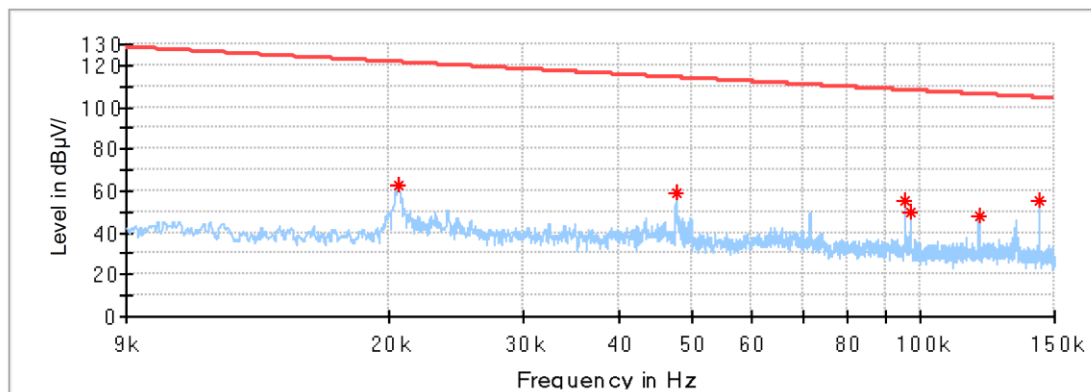**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.020509	62.74	121.36	58.62	Parallel	-0.1
0.047687	58.90	114.03	55.14	Parallel	-2.9
0.095398	55.40	108.02	52.62	Parallel	-8.1
0.096878	49.40	107.88	58.49	Parallel	-8.2
0.119227	47.69	106.07	58.38	Parallel	-9.3
0.143091	55.40	104.49	49.09	Parallel	-10.3

150kHz-30MHz: Transmitting in maximum output power mode BLE (1 Mbps) low channel
Parallel(worst case)

Low Channel: 2402MHz

Common Information

Project No:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE 1M mode low channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment:	ESCI, 1313-1A, 310N
Receiver Setting:	RBW: 9 kHz, VBW: 30 kHz, Sweep Time: Auto
Temperature:	22.5°C
Humidity:	54%
Barometric Pressure:	101.3 kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/5/29

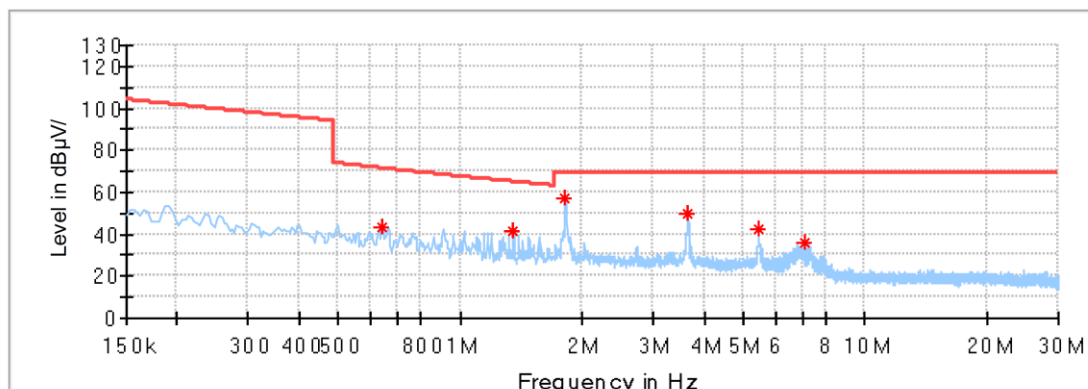

Critical Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.638794	43.51	71.35	27.84	Parallel	-23.4
1.355194	41.89	64.84	22.95	Parallel	-28.3
1.817869	57.05	69.54	12.49	Parallel	-29.8
3.634988	49.59	69.54	19.95	Parallel	-31.1
5.452106	42.79	69.54	26.75	Parallel	-31.5
7.086394	35.61	69.54	33.93	Parallel	-31.8