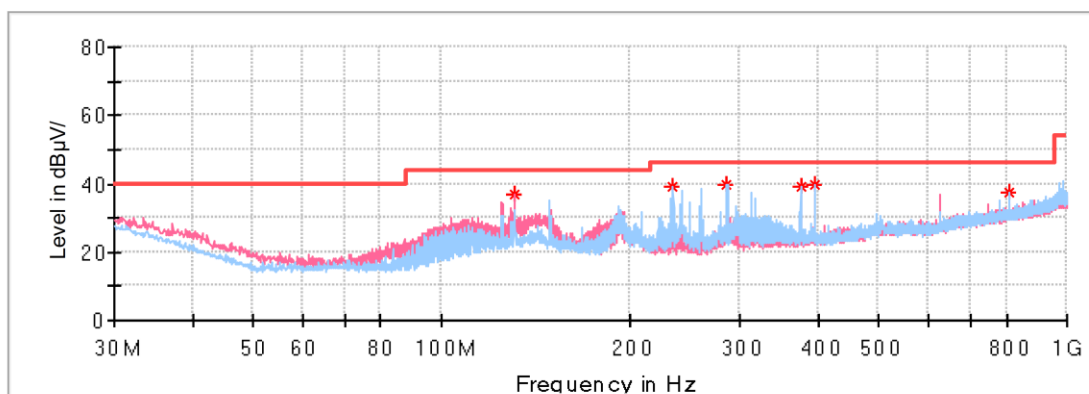


BLE (1 Mbps) (Transmitting in maximum output power BLE (1 Mbps) low channel)
30MHz-1GHz**Low Channel: 2402MHz****Common Information**

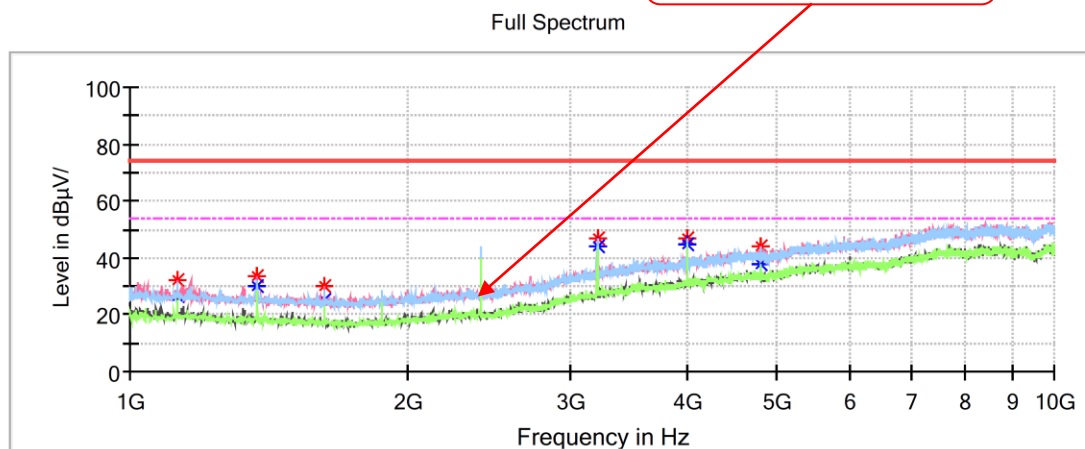
Project No:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE 1M mode low channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment:	ESCI, JB3, 310N
Receiver Setting:	RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature:	22.5°C
Humidity:	54%
Barometric Pressure:	101.3kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/5/29

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
130.637500	37.03	43.50	6.47	V	-10.9
234.670000	39.05	46.00	6.95	H	-12.4
286.322500	39.87	46.00	6.13	H	-10.1
375.077500	39.32	46.00	6.68	H	-8.5
396.053750	39.75	46.00	6.25	H	-8.1
806.970000	37.36	46.00	8.64	H	-0.1

**BLE (1 Mbps)
1GHz-10GHz:****Low Channel: 2402MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: Transmitting in BLE-1M Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1°C
Humidity: 42%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/9

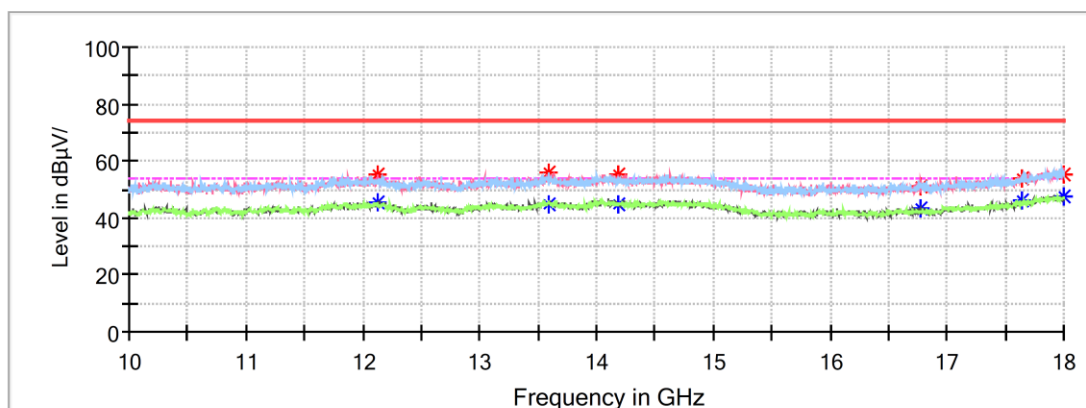
Fundamental Test with
Band Reject Filter**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1124.200000	---	26.24	54.00	27.76	V	-15.6
1124.200000	31.88	---	74.00	42.12	V	-15.6
1374.400000	---	30.00	54.00	24.00	V	-14.6
1374.400000	33.37	---	74.00	40.63	V	-14.6
1624.600000	---	24.99	54.00	29.01	V	-13.5
1624.600000	30.21	---	74.00	43.79	V	-13.5
3202.300000	---	44.12	54.00	9.88	H	-7.6
3202.300000	46.70	---	74.00	27.30	H	-7.6
4003.300000	---	44.64	54.00	9.36	H	-4.9
4003.300000	47.02	---	74.00	26.98	H	-4.9
4804.300000	43.81	---	74.00	30.19	H	-3.4
4804.300000	---	37.70	54.00	16.30	H	-3.4

10GHz-18GHz:**Low Channel: 2402MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE-1M Low Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.1℃
Humidity:	42%
Atmospheric Pressure:	101.3kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/9

Full Spectrum

**Critical_Freqs**

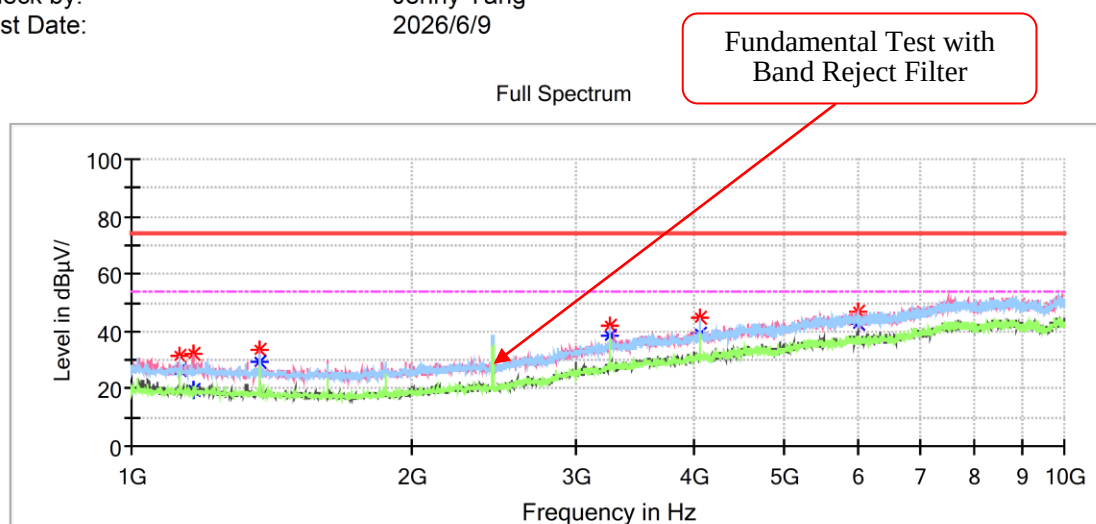
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
12123.200000	---	45.22	54.00	8.78	H	9.0
12123.200000	55.41	---	74.00	18.59	H	9.0
13593.600000	---	44.72	54.00	9.28	H	9.8
13593.600000	55.76	---	74.00	18.24	H	9.8
14182.400000	---	45.09	54.00	8.91	V	10.8
14182.400000	55.59	---	74.00	18.41	V	10.8
16776.000000	51.03	---	74.00	22.97	V	8.6
16776.000000	---	43.50	54.00	10.50	V	8.6
17646.400000	53.77	---	74.00	20.23	H	11.7
17646.400000	---	46.35	54.00	7.65	H	11.7
17998.400000	55.28	---	74.00	18.72	H	13.8
17998.400000	---	47.48	54.00	6.52	H	13.8

1GHz-10GHz:

Middle Channel: 2440MHz

Common Information

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE-1M Middle Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.1℃
Humidity:	42%
Atmospheric Pressure:	101.3kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/9

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1124.200000	---	26.91	54.00	27.09	V	-15.6
1124.200000	31.33	---	74.00	42.67	V	-15.6
1162.900000	32.40	---	74.00	41.60	V	-15.5
1162.900000	---	19.64	54.00	34.36	V	-15.5
1374.400000	33.58	---	74.00	40.42	V	-14.6
1374.400000	---	29.22	54.00	24.78	V	-14.6
3252.700000	41.91	---	74.00	32.09	H	-7.3
3252.700000	---	38.28	54.00	15.72	H	-7.3
4066.300000	44.59	---	74.00	29.41	H	-4.9
4066.300000	---	39.44	54.00	14.56	H	-4.9
6000.400000	---	42.58	54.00	11.42	H	-0.7
6000.400000	46.68	---	74.00	27.32	H	-0.7

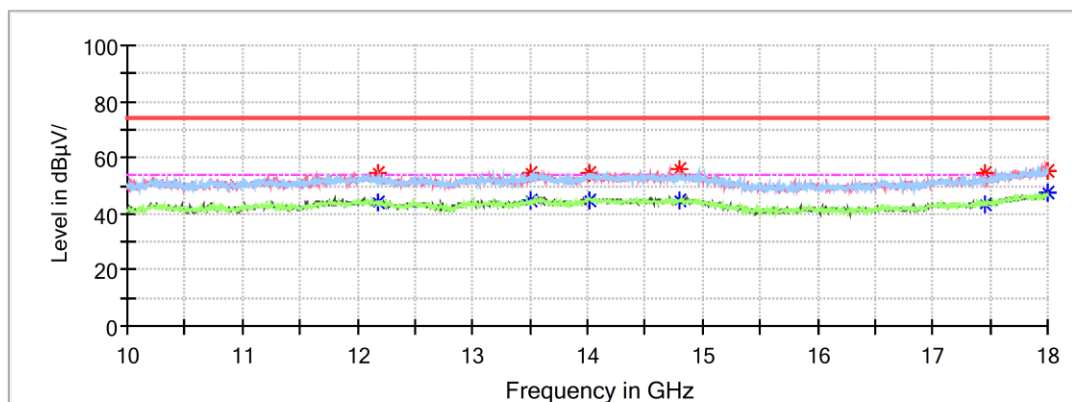
10GHz-18GHz:

Middle Channel: 2440MHz

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: Transmitting in BLE-1M Middle Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1℃
Humidity: 42%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/9

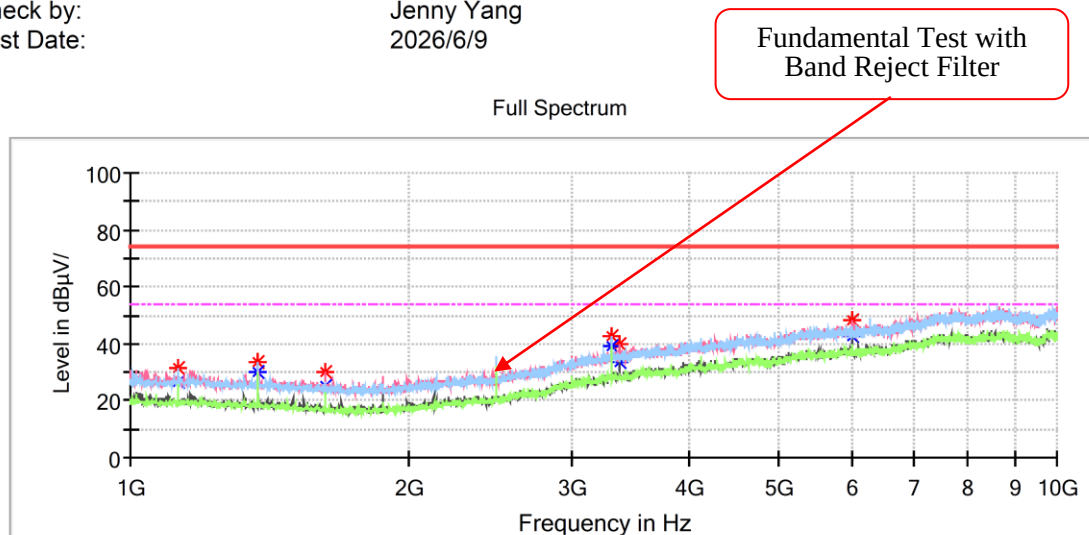
Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
12187.200000	---	44.25	54.00	9.75	V	8.9
12187.200000	54.54	---	74.00	19.46	V	8.9
13508.800000	---	44.42	54.00	9.58	H	9.7
13508.800000	54.84	---	74.00	19.16	H	9.7
14016.000000	---	44.87	54.00	9.13	H	10.7
14016.000000	54.77	---	74.00	19.23	H	10.7
14804.800000	---	44.54	54.00	9.46	V	10.0
14804.800000	55.65	---	74.00	18.35	V	10.0
17457.600000	---	43.33	54.00	10.67	V	10.7
17457.600000	54.49	---	74.00	19.51	V	10.7
17992.000000	54.93	---	74.00	19.07	V	13.8
17992.000000	---	47.60	54.00	6.40	V	13.8

1GHz-10GHz:**High Channel: 2480MHz****Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: Transmitting in BLE-1M High Channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1℃
 Humidity: 42%
 Atmospheric Pressure: 101.3kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/9

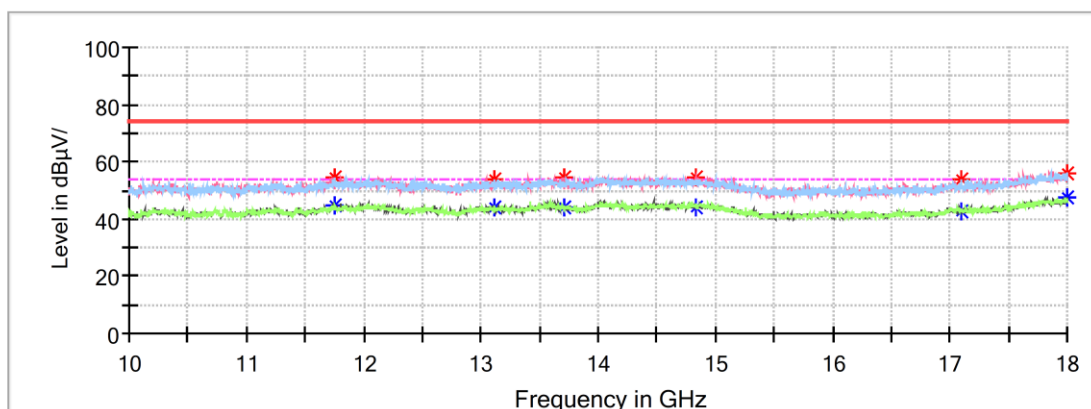
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1124.200000	---	26.81	54.00	27.19	H	-15.6
1124.200000	31.77	---	74.00	42.23	H	-15.6
1374.400000	---	29.95	54.00	24.05	H	-14.6
1374.400000	33.58	---	74.00	40.42	H	-14.6
1624.600000	29.78	---	74.00	44.22	V	-13.5
1624.600000	---	25.31	54.00	28.69	V	-13.5
3306.700000	---	39.03	54.00	14.97	H	-7.1
3306.700000	42.95	---	74.00	31.05	H	-7.1
3366.100000	39.64	---	74.00	34.36	V	-6.8
3366.100000	---	33.79	54.00	20.21	V	-6.8
6000.400000	---	42.93	54.00	11.07	V	-0.7
6000.400000	48.27	---	74.00	25.73	V	-0.7

10GHz-18GHz:**High Channel: 2480MHz****Common Information**

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE-1M High Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.1°C
Humidity:	42%
Atmospheric Pressure:	101.3kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/9

Full Spectrum

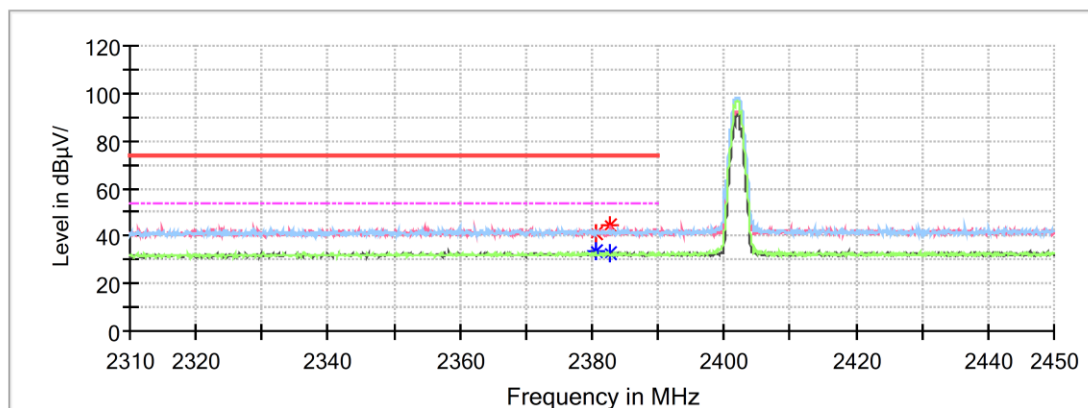
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
11760.000000	---	44.49	54.00	9.51	H	8.6
11760.000000	54.78	---	74.00	19.22	H	8.6
13110.400000	---	44.17	54.00	9.83	H	8.9
13110.400000	54.09	---	74.00	19.91	H	8.9
13715.200000	---	44.24	54.00	9.76	V	10.1
13715.200000	54.75	---	74.00	19.25	V	10.1
14825.600000	---	44.24	54.00	9.76	V	10.0
14825.600000	54.74	---	74.00	19.26	V	10.0
17094.400000	---	42.97	54.00	11.03	V	9.7
17094.400000	53.67	---	74.00	20.33	V	9.7
17995.200000	55.73	---	74.00	18.27	V	13.8
17995.200000	---	47.23	54.00	6.77	V	13.8

Band Edge:**Low Channel****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: Transmitting in BLE-1M Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1°C
Humidity: 42%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/9

Full Spectrum

**Critical_Freqs**

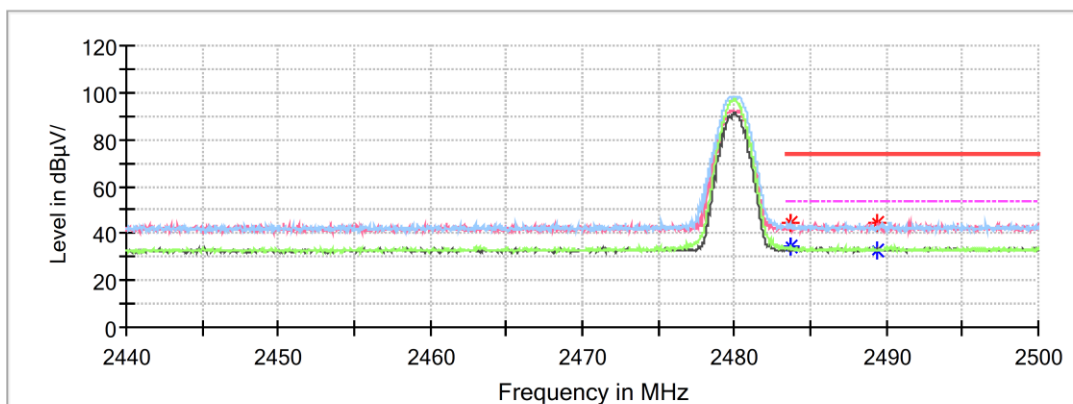
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2380.560000	---	33.21	54.00	20.79	V	-0.6
2380.560000	41.48	---	74.00	32.52	V	-0.6
2382.800000	---	32.56	54.00	21.44	V	-0.6
2382.800000	44.26	---	74.00	29.74	V	-0.6

High Channel

Common Information

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: Transmitting in BLE-1M High Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1℃
Humidity: 42%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/9

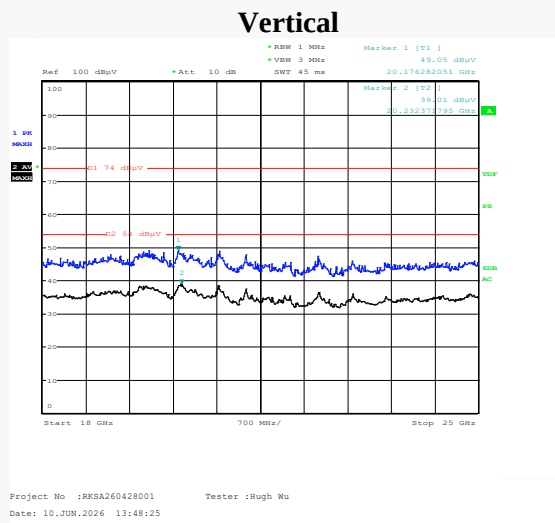
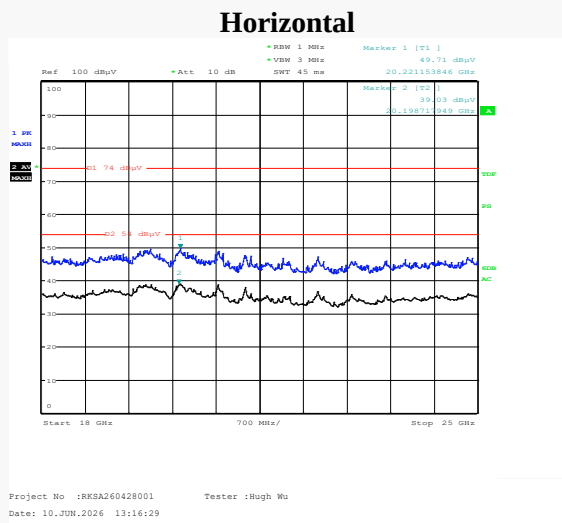
Full Spectrum



Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2483.656000	---	34.43	54.00	19.57	H	-0.3
2483.656000	44.15	---	74.00	29.85	H	-0.3
2489.416000	---	33.13	54.00	20.87	V	-0.3
2489.416000	44.70	---	74.00	29.30	V	-0.3

18GHz-25GHz: Transmitting in maximum output power mode and BLE 1Mbps low channel

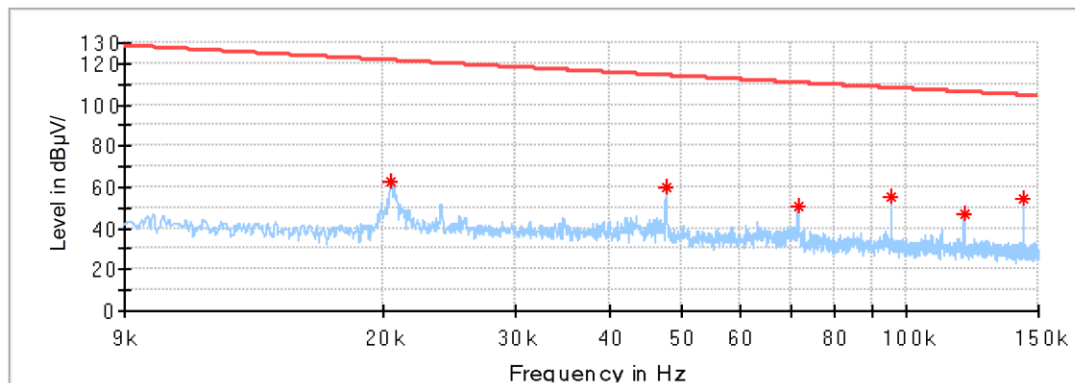


Frequency (GHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
20.23	---	39.01	54	14.99	V	12.49
20.18	49.05	---	74	24.95	V	12.44
20.20	---	39.03	54	14.97	H	12.46
20.22	49.71	---	74	24.29	H	12.46

Note: The test distance is 3m. The limit is 74dB μ V/m(Peak) and 54dB μ V/m(Average).

BLE Mode:**9kHz-150kHz:** Transmitting in maximum output power mode BLE 2Mbps low channel**Parallel(worst case)****Low Channel: 2402MHz****Common Information**

Project No:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE 2M mode low channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment:	ESCI, 1313-1A, 310N
Receiver Setting:	RBW: 200 Hz, VBW: 1 kHz, Sweep Time: Auto
Temperature:	22.5°C
Humidity:	54%
Barometric Pressure:	101.3kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/5/29

**Critical Freqs**

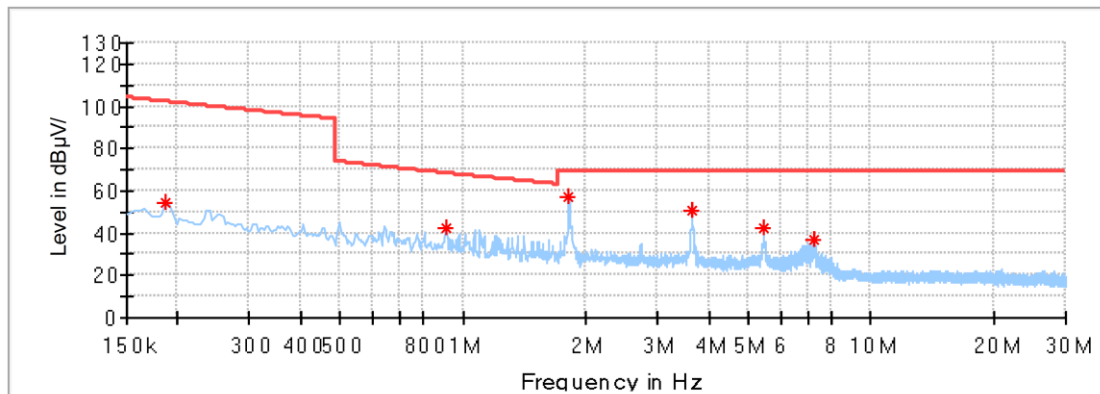
Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.020403	62.25	121.40	59.15	Parallel	-0.1
0.047704	59.54	114.03	54.49	Parallel	-2.9
0.071551	50.41	110.51	60.10	Parallel	-5.8
0.095398	55.49	108.02	52.53	Parallel	-8.1
0.119227	47.46	106.07	58.62	Parallel	-9.3
0.143091	54.61	104.49	49.88	Parallel	-10.3

150kHz-30MHz: Transmitting in maximum output power mode BLE 2Mbps low channel
Parallel(worst case)

Low Channel: 2402MHz

Common Information

Project No:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE 2M mode low channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment:	ESCI, 1313-1A, 310N
Receiver Setting:	RBW:9 kHz, VBW:30 kHz, Sweep Time: Auto
Temperature:	22.5°C
Humidity:	54%
Barometric Pressure:	101.3kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/5/29

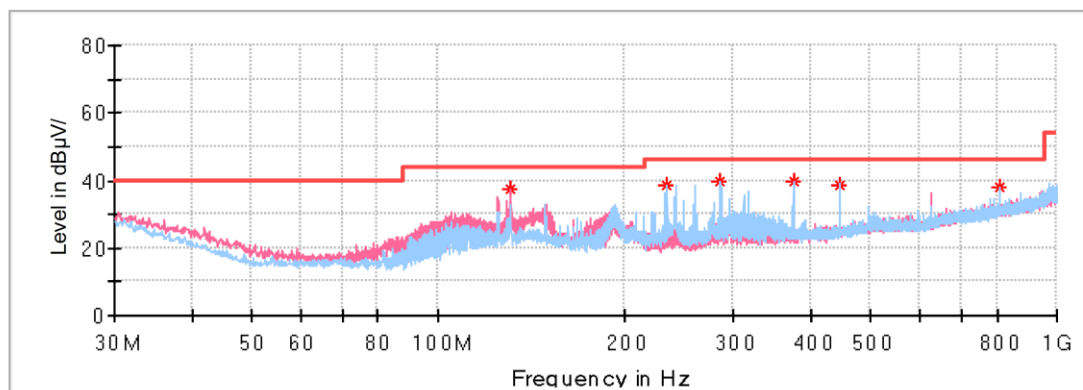


Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
0.187312	54.09	102.07	47.98	Parallel	-12.2
0.907444	42.09	68.23	26.14	Parallel	-26.3
1.817869	57.23	69.54	12.31	Parallel	-29.8
3.634988	50.37	69.54	19.17	Parallel	-31.1
5.452106	42.59	69.54	26.95	Parallel	-31.5
7.269225	36.48	69.54	33.06	Parallel	-31.8

BLE (2 Mbps) (Transmitting in maximum output power BLE (2 Mbps) low channel)
30MHz-1GHz**Low Channel: 2402MHz****Common Information**

Project No:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE 2M mode low channel
Standard:	FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
Test Equipment:	ESCI, JB3, 310N
Receiver Setting:	RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature:	22.5°C
Humidity:	54%
Barometric Pressure:	101.3kPa
Test Engineer:	Scarf Yang
Check by:	Jenny Yang
Test Date:	2026/5/29

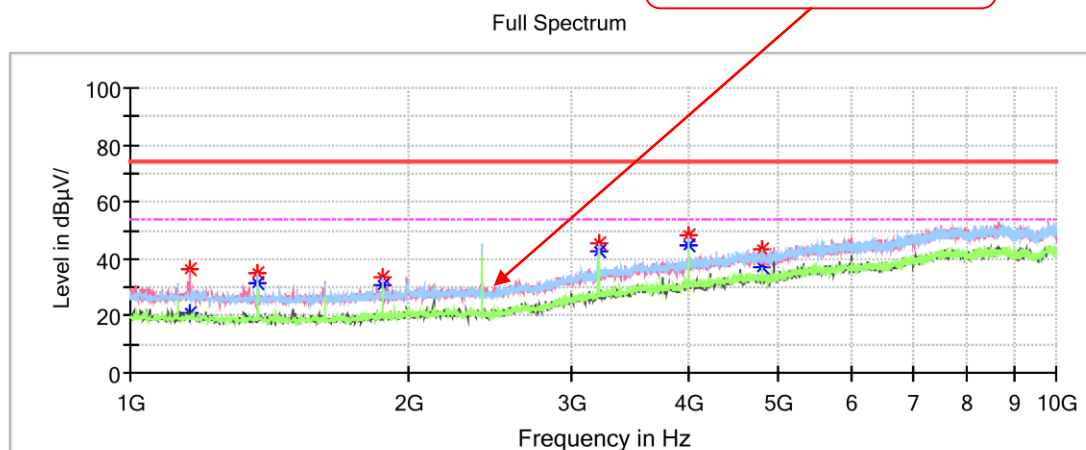
**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
130.637500	37.34	43.50	6.16	V	-10.9
234.548750	38.85	46.00	7.15	H	-12.4
286.322500	39.62	46.00	6.38	H	-10.1
374.956250	39.54	46.00	6.46	H	-8.5
445.402500	38.85	46.00	7.15	H	-6.6
807.212500	38.25	46.00	7.75	H	-0.1

**BLE (2 Mbps)
1GHz-10GHz:****Low Channel: 2402MHz****Common Information**

Project No.: RKSA260428001
EUT Model: SRP2410A
Test Mode: Transmitting in BLE-2M Low Channel
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 24.1℃
Humidity: 42%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Check by: Jenny Yang
Test Date: 2026/6/9

Fundamental Test with
Band Reject Filter

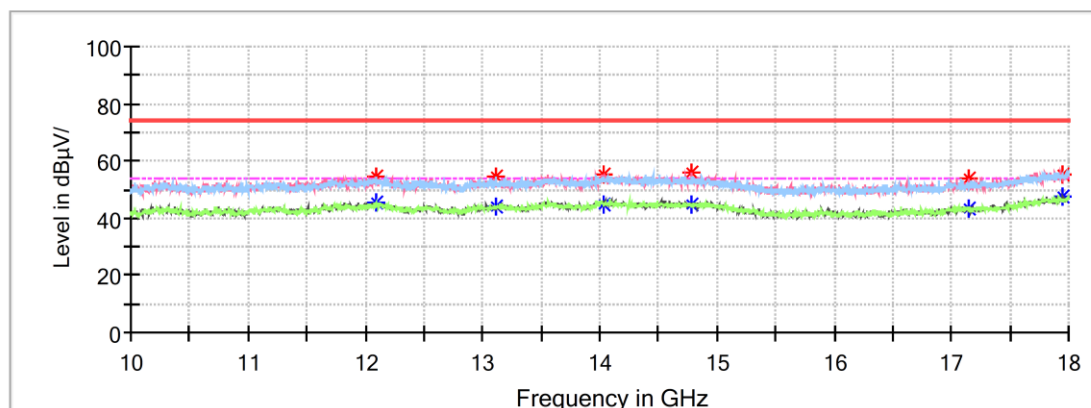
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1160.200000	36.13	---	74.00	37.87	V	-15.5
1160.200000	---	20.95	54.00	33.05	V	-15.5
1374.400000	---	31.36	54.00	22.64	H	-14.6
1374.400000	34.78	---	74.00	39.22	H	-14.6
1874.800000	---	30.55	54.00	23.45	H	-12.3
1874.800000	33.84	---	74.00	40.16	H	-12.3
3202.300000	---	42.93	54.00	11.07	H	-7.6
3202.300000	45.36	---	74.00	28.64	H	-7.6
4003.300000	---	44.74	54.00	9.26	H	-4.9
4003.300000	48.28	---	74.00	25.72	H	-4.9
4804.300000	43.11	---	74.00	30.89	H	-3.4
4804.300000	---	37.04	54.00	16.96	H	-3.4

10GHz-18GHz:**Low Channel: 2402MHz****Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: Transmitting in BLE-2M Low Channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1℃
 Humidity: 42%
 Atmospheric Pressure: 101.3kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/9

Full Spectrum

**Critical Freqs**

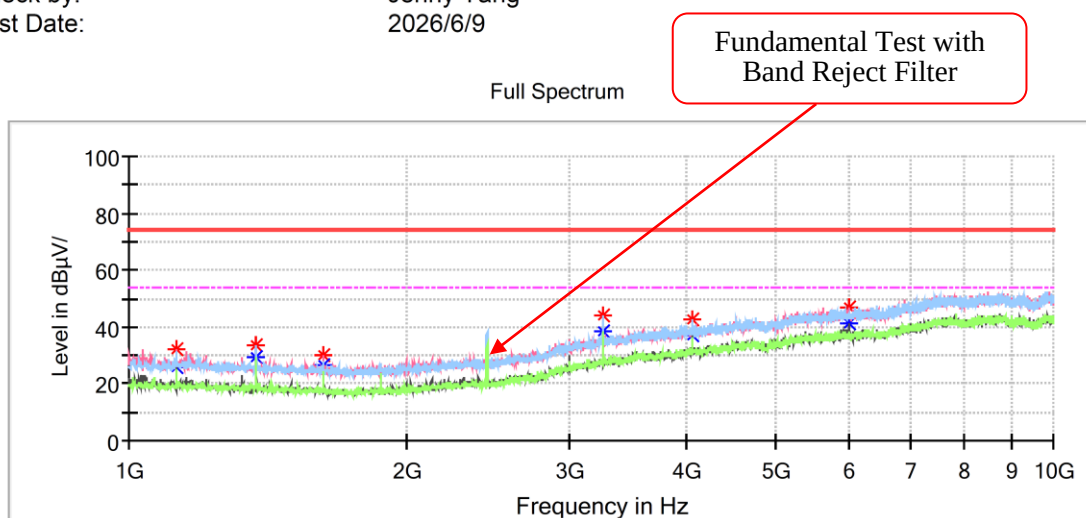
Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
12099.200000	---	45.25	54.00	8.75	H	9.0
12099.200000	54.45	---	74.00	19.55	H	9.0
13120.000000	---	43.86	54.00	10.14	H	8.9
13120.000000	54.49	---	74.00	19.51	H	8.9
14040.000000	---	44.97	54.00	9.03	V	10.7
14040.000000	55.19	---	74.00	18.81	V	10.7
14777.600000	---	44.84	54.00	9.16	V	10.1
14777.600000	55.63	---	74.00	18.37	V	10.1
17148.800000	---	43.03	54.00	10.97	V	9.9
17148.800000	53.70	---	74.00	20.30	V	9.9
17956.800000	55.11	---	74.00	18.89	V	13.6
17956.800000	---	47.57	54.00	6.43	V	13.6

1GHz-10GHz:

Middle Channel: 2440MHz

Common Information

Project No.:	RKSA260428001
EUT Model:	SRP2410A
Test Mode:	Transmitting in BLE-2M Middle Channel
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	24.1°C
Humidity:	42%
Atmospheric Pressure:	101.3kPa
Test Engineer:	Destine Hu
Check by:	Jenny Yang
Test Date:	2026/6/9

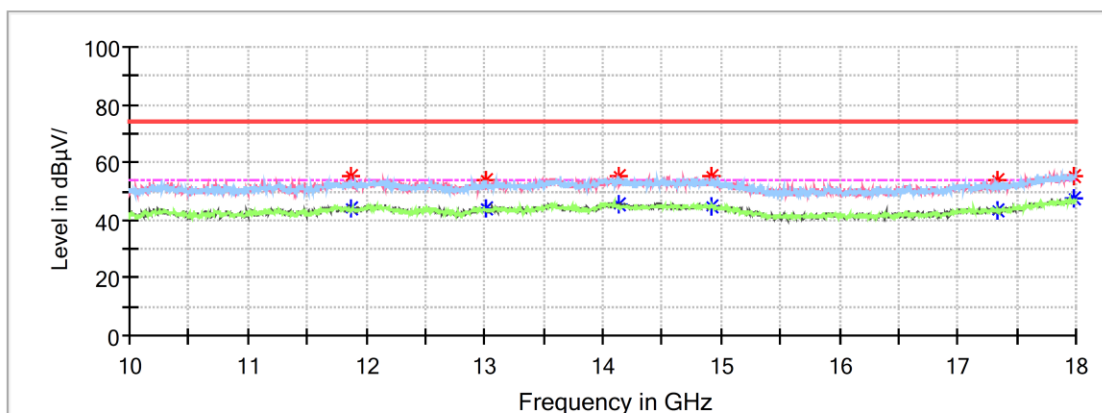
**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1124.200000	---	26.17	54.00	27.83	V	-15.6
1124.200000	32.03	---	74.00	41.97	V	-15.6
1374.400000	---	29.33	54.00	24.67	V	-14.6
1374.400000	33.56	---	74.00	40.44	V	-14.6
1624.600000	---	26.88	54.00	27.12	V	-13.5
1624.600000	29.73	---	74.00	44.27	V	-13.5
3252.700000	---	38.18	54.00	15.82	H	-7.3
3252.700000	44.28	---	74.00	29.72	H	-7.3
4066.300000	---	37.16	54.00	16.84	H	-4.9
4066.300000	42.82	---	74.00	31.18	H	-4.9
6000.400000	---	41.33	54.00	12.67	V	-0.7
6000.400000	46.76	---	74.00	27.24	V	-0.7

10GHz-18GHz:**Middle Channel: 2440MHz****Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: Transmitting in BLE-2M Middle Channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1℃
 Humidity: 42%
 Atmospheric Pressure: 101.3kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/9

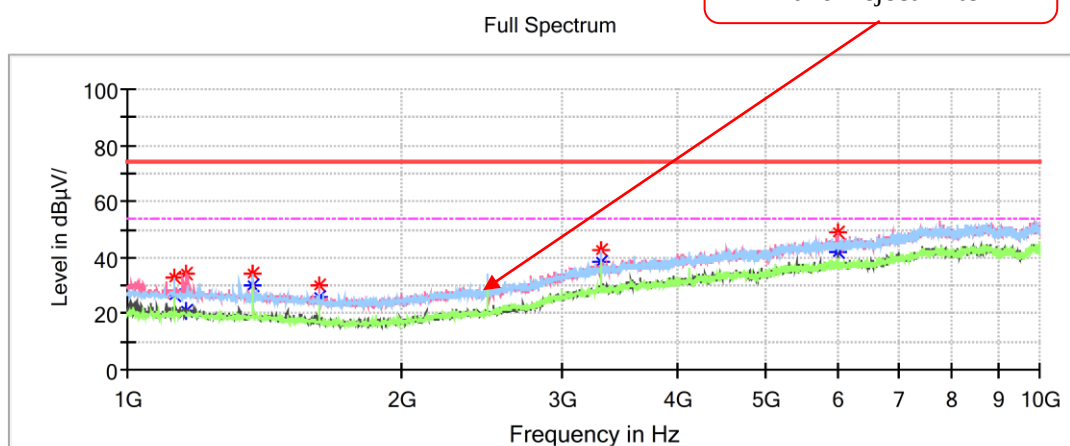
Full Spectrum

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
11865.600000	---	44.34	54.00	9.66	V	8.8
11865.600000	55.36	---	74.00	18.64	V	8.8
13006.400000	---	43.72	54.00	10.28	H	8.7
13006.400000	53.89	---	74.00	20.11	H	8.7
14134.400000	55.06	---	74.00	18.94	H	10.8
14134.400000	---	45.34	54.00	8.66	H	10.8
14918.400000	---	44.60	54.00	9.40	H	9.7
14918.400000	55.41	---	74.00	18.59	H	9.7
17342.400000	---	43.13	54.00	10.87	V	10.4
17342.400000	53.89	---	74.00	20.11	V	10.4
17988.800000	54.98	---	74.00	19.02	V	13.8
17988.800000	---	47.79	54.00	6.21	V	13.8

1GHz-10GHz:**High Channel: 2480MHz****Common Information**

Project No.: RKSA260428001
 EUT Model: SRP2410A
 Test Mode: Transmitting in BLE-2M High Channel
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 24.1℃
 Humidity: 42%
 Atmospheric Pressure: 101.3kPa
 Test Engineer: Destine Hu
 Check by: Jenny Yang
 Test Date: 2026/6/9

**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1124.200000	---	26.54	54.00	27.46	V	-15.6
1124.200000	32.88	---	74.00	41.12	V	-15.6
1162.000000	---	21.11	54.00	32.89	V	-15.5
1162.000000	34.52	---	74.00	39.48	V	-15.5
1374.400000	---	30.41	54.00	23.59	H	-14.6
1374.400000	34.02	---	74.00	39.98	H	-14.6
1624.600000	---	26.03	54.00	27.97	H	-13.5
1624.600000	30.30	---	74.00	43.70	H	-13.5
3306.700000	---	38.54	54.00	15.46	H	-7.1
3306.700000	42.54	---	74.00	31.46	H	-7.1
6000.400000	---	41.89	54.00	12.11	H	-0.7
6000.400000	48.62	---	74.00	25.38	H	-0.7