



802.11ax80_5690MHz_RU_Full_Chain 0

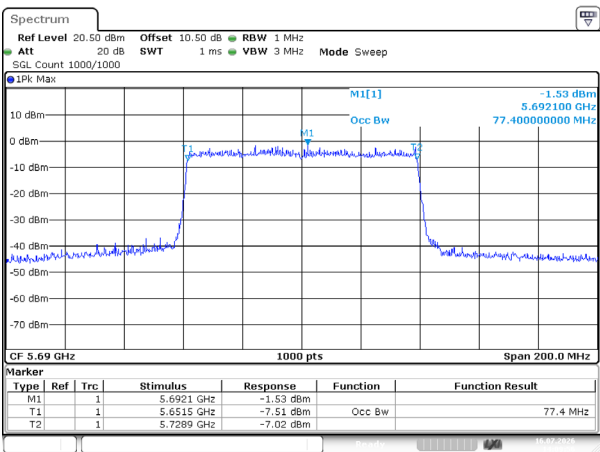


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:09:56

802.11ax80_5530MHz_RU_Full_Chain 1

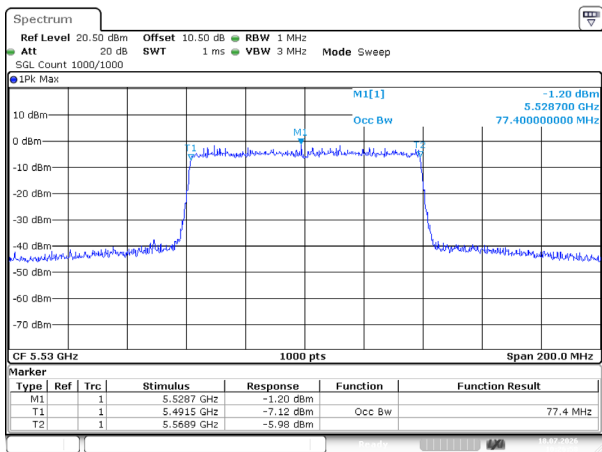


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 18.JUL.2026 10:26:57

802.11ax80_5610MHz_RU_Full_Chain 1

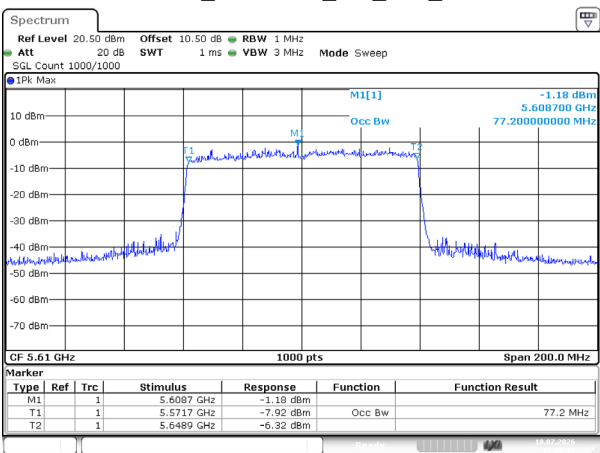

ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 18.JUL.2026 10:29:12


802.11ax80_5690MHz_RU_Full_Chain 1

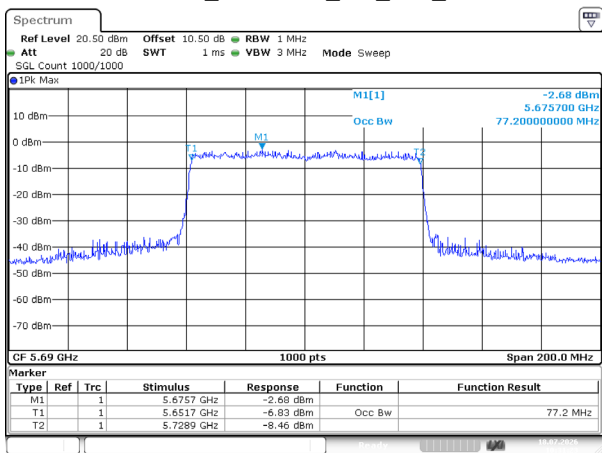

ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 18.JUL.2026 10:31:23


5725-5850MHz Band:

802.11a_5745MHz_Chain 0

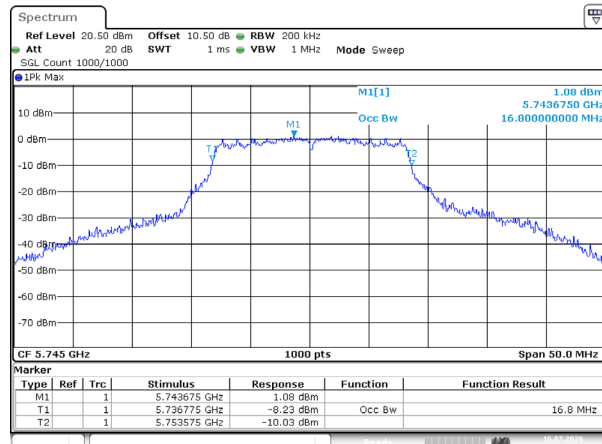


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:13:32

802.11a_5785MHz_Chain 0

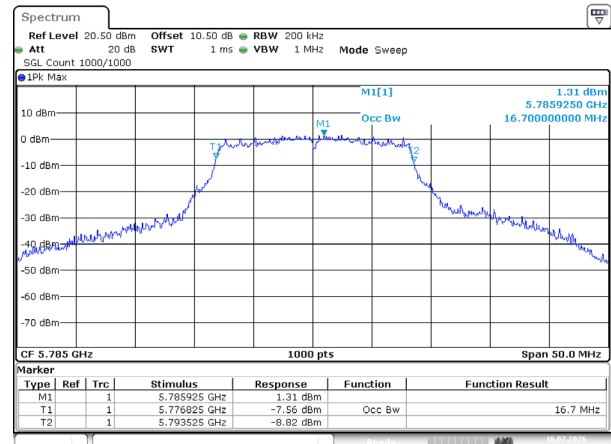


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:16:13

802.11a_5825MHz_Chain 0

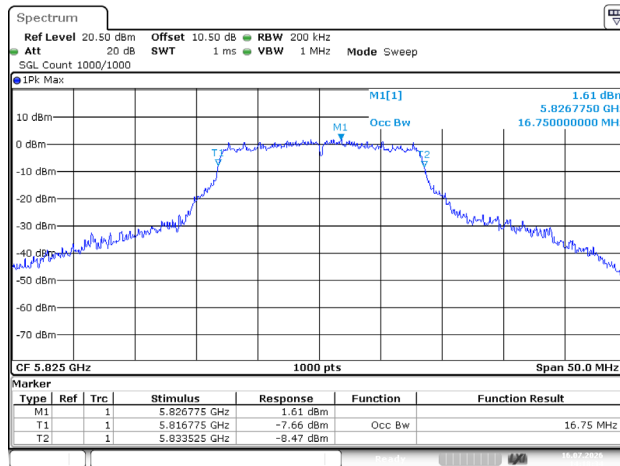


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:18:34

802.11a_5745MHz_Chain 1

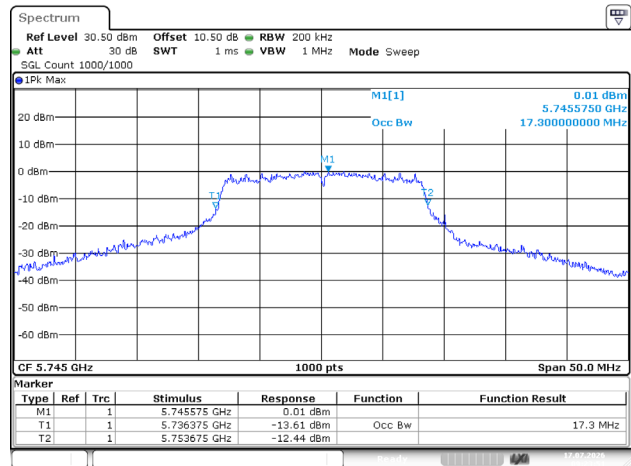


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 09:23:51

802.11a_5785MHz_Chain 1

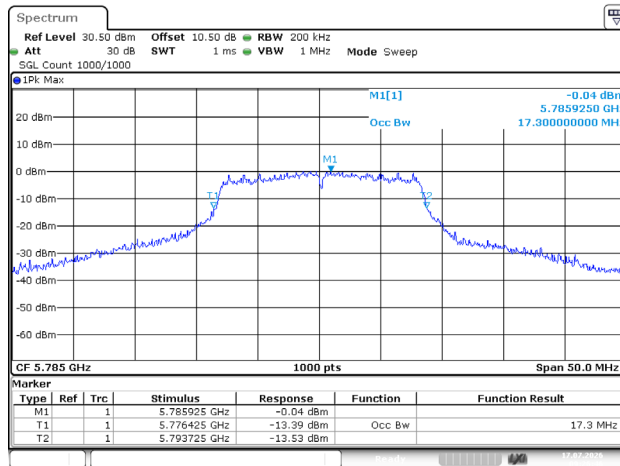


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 09:26:46

802.11a_5825MHz_Chain 1

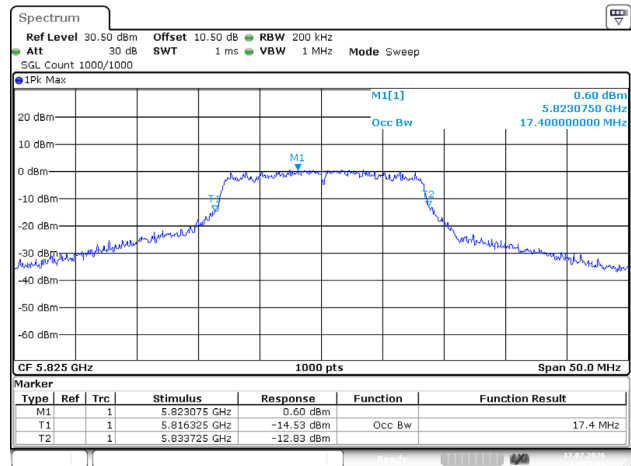


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 09:29:07

802.11ac20_5745MHz_Chain 0

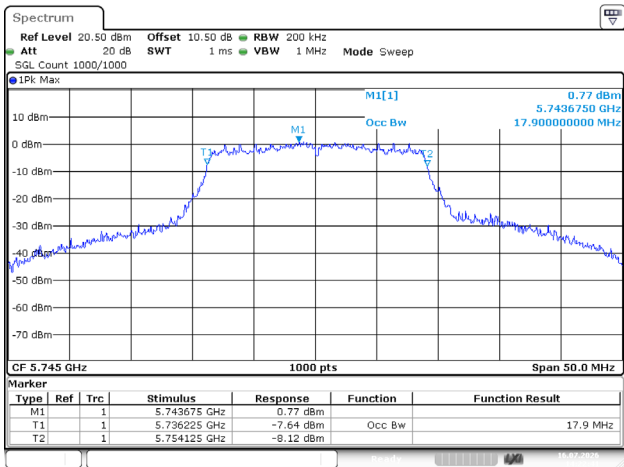


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:22:41

802.11ac20_5785MHz_Chain 0

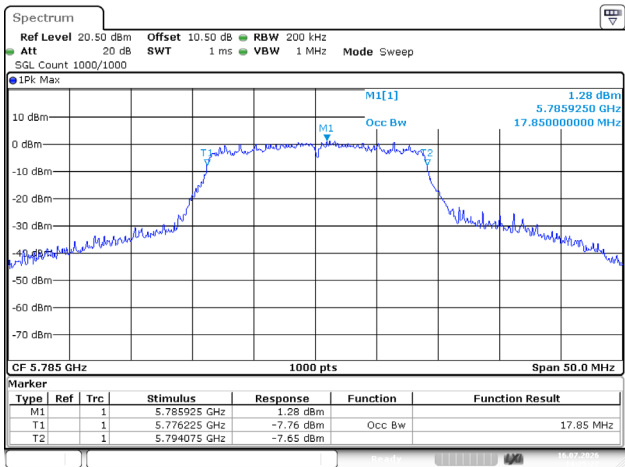


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:25:26

802.11ac20_5825MHz_Chain 0

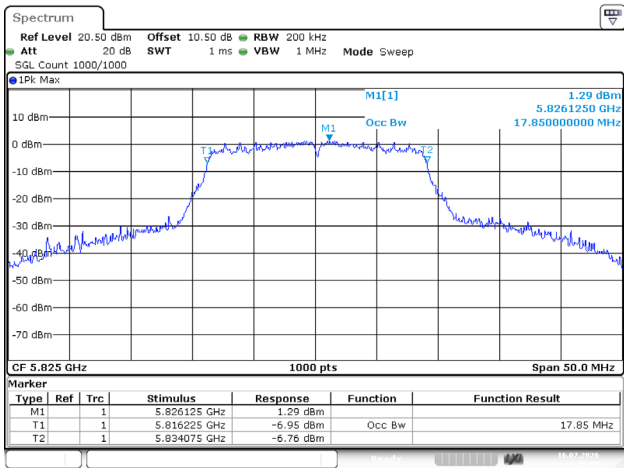


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:28:51

802.11ac20_5745MHz_Chain 1

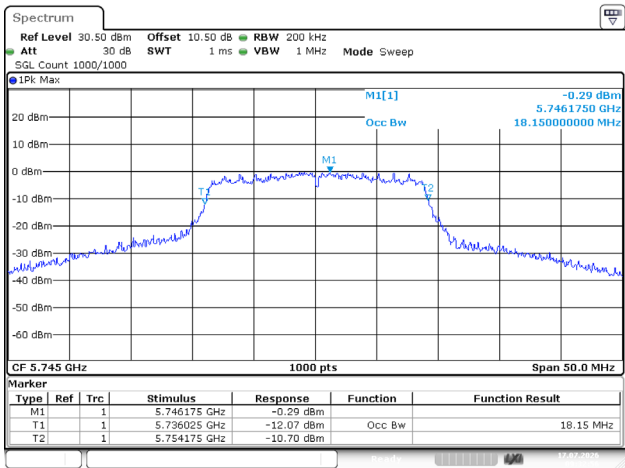


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 09:32:56

802.11ac20_5785MHz_Chain 1

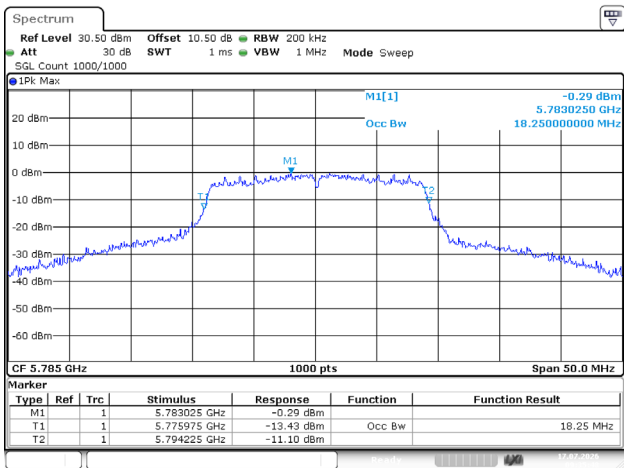


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 09:35:49

802.11ac20_5825MHz_Chain 1

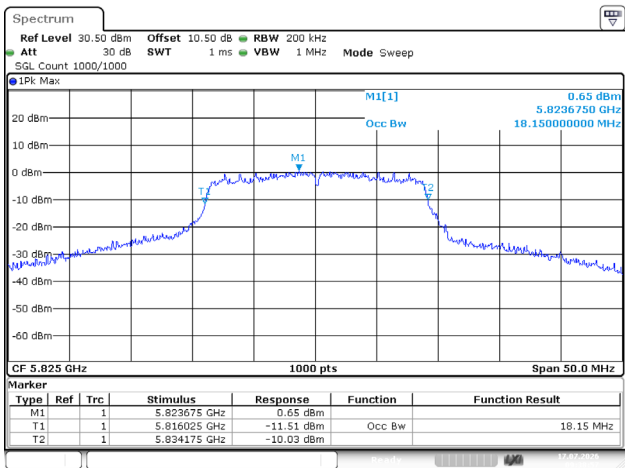


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 09:38:57


802.11ac40_5755MHz_Chain 0

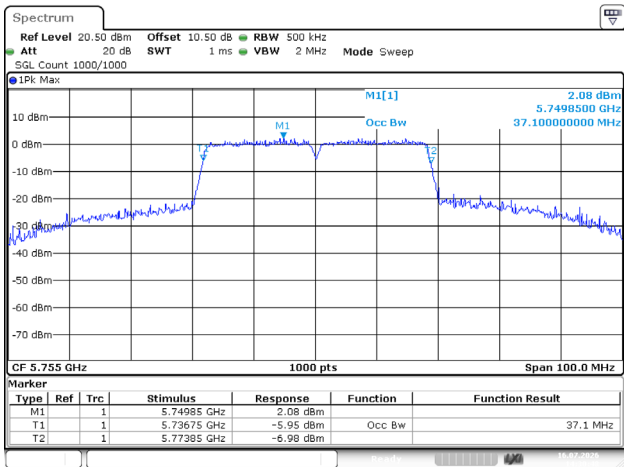


802.11ac40_5795MHz_Chain 0

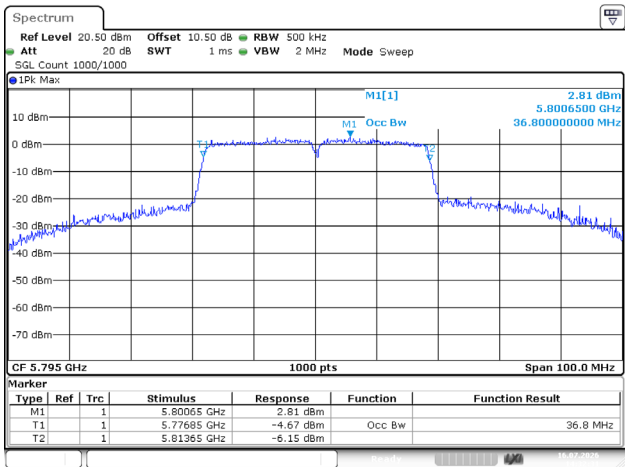


802.11ac40_5755MHz_Chain 1

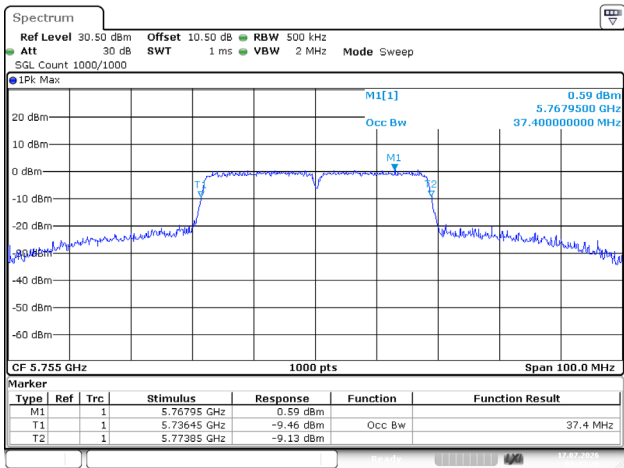


802.11ac40_5795MHz_Chain 1

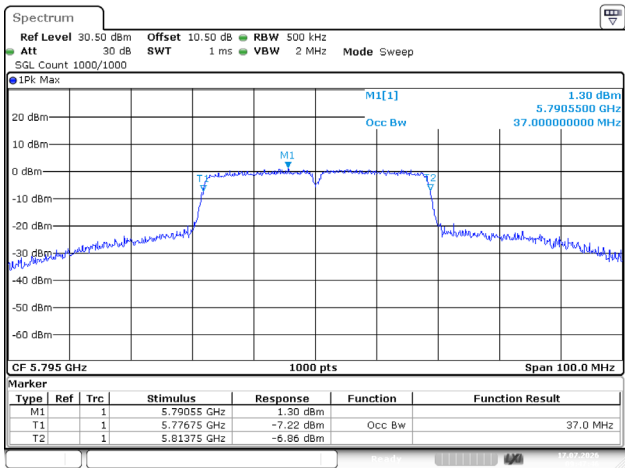


802.11ac80_5775MHz_Chain 0

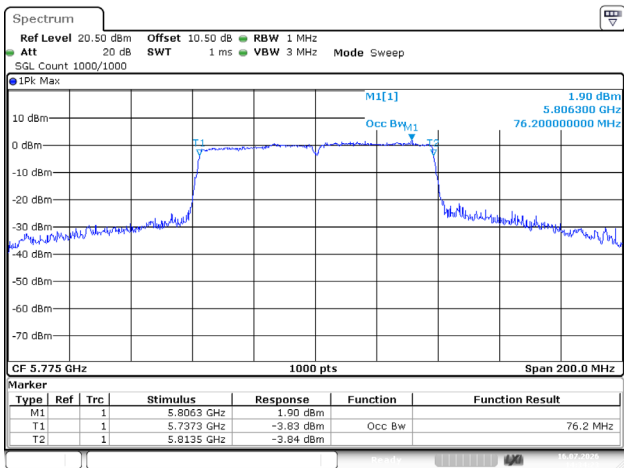

802.11ac80_5775MHz_Chain 1

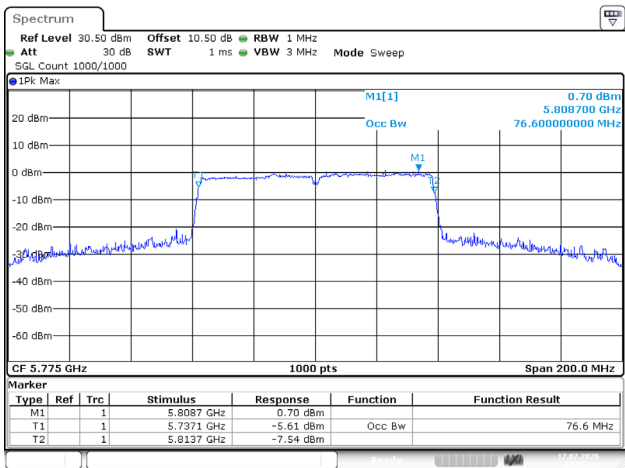


802.11ax20_5745MHz_RU_Full_Chain 0

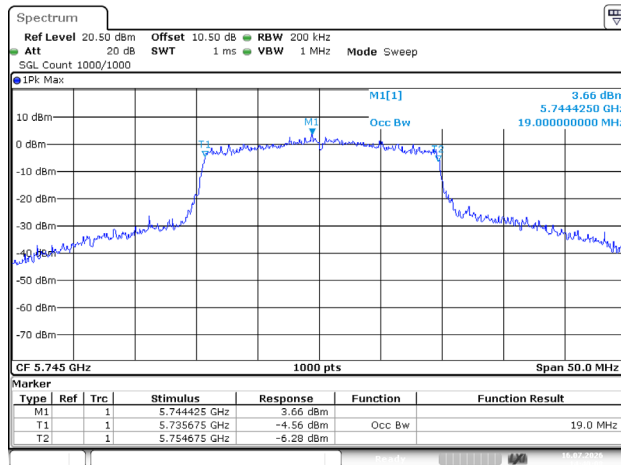


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:40:07

802.11ax20_5785MHz_RU_Full_Chain 0

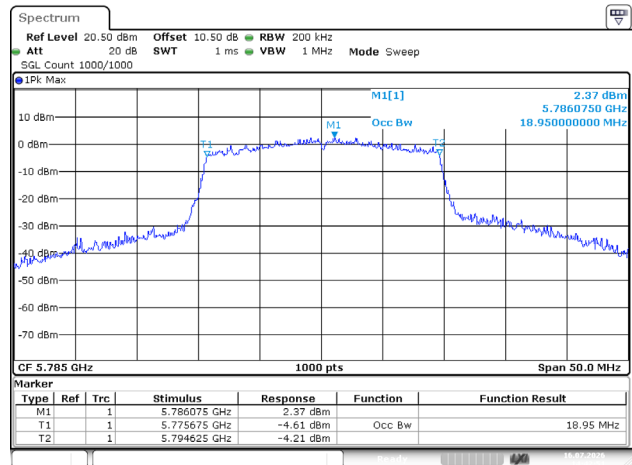


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:42:50

802.11ax20_5825MHz_RU_Full_Chain 0

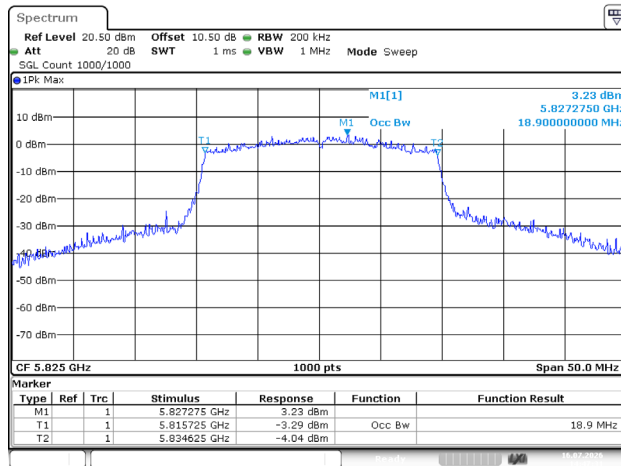


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:47:31

802.11ax20_5745MHz_RU_Full_Chain 1

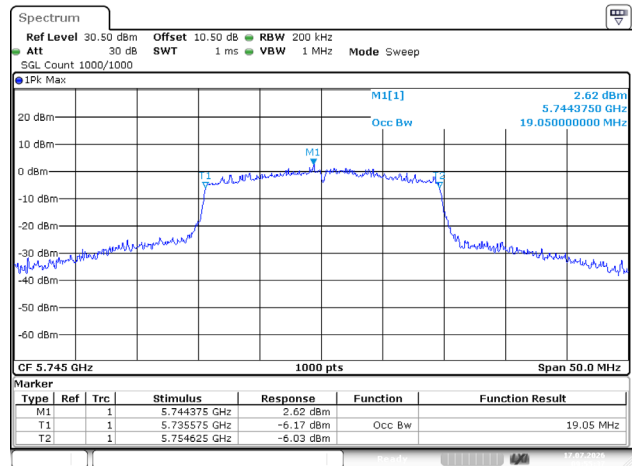


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 09:55:37

802.11ax20_5785MHz_RU_Full_Chain 1

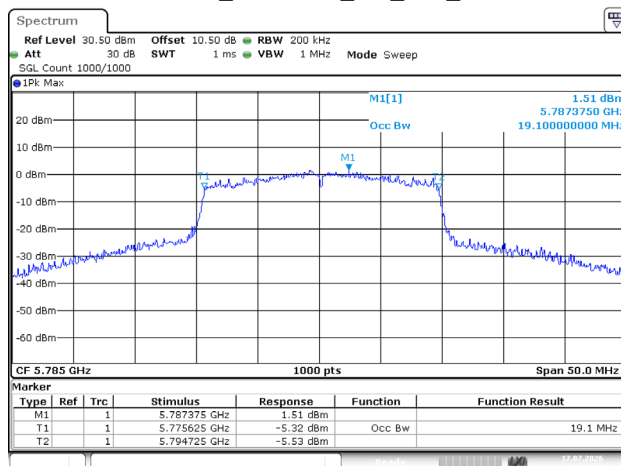


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 10:00:05

802.11ax20_5825MHz_RU_Full_Chain 1

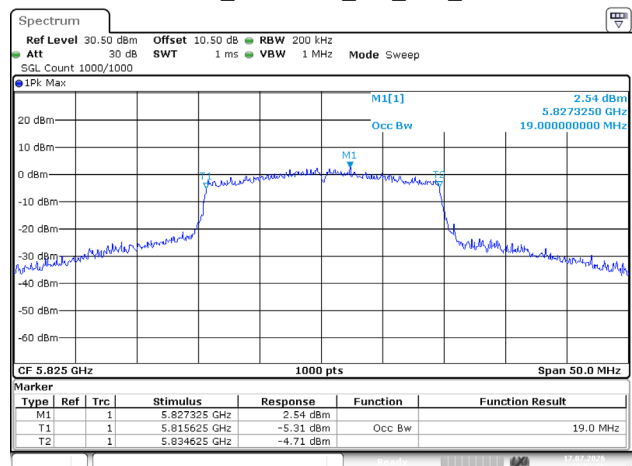


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 10:02:56

802.11ax40_5755MHz_RU_Full_Chain 0

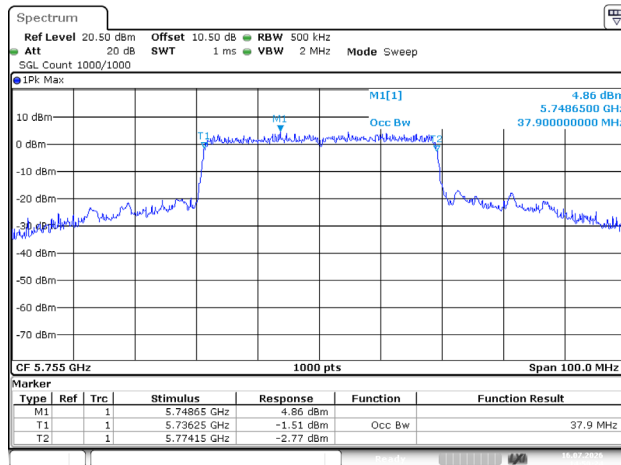


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:50:24

802.11ax40_5795MHz_RU_Full_Chain 0

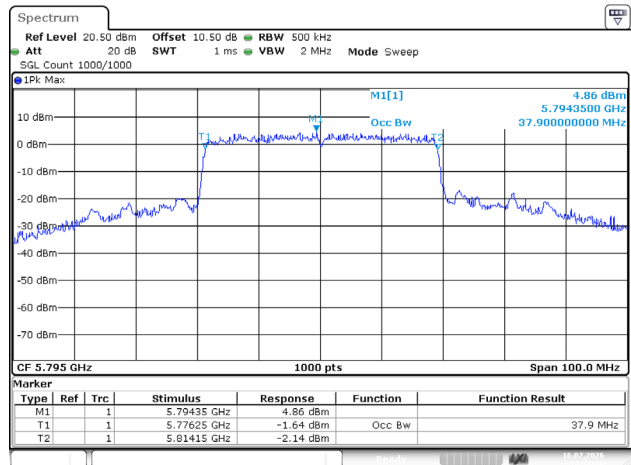


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:52:36

802.11ax40_5755MHz_RU_Full_Chain 1

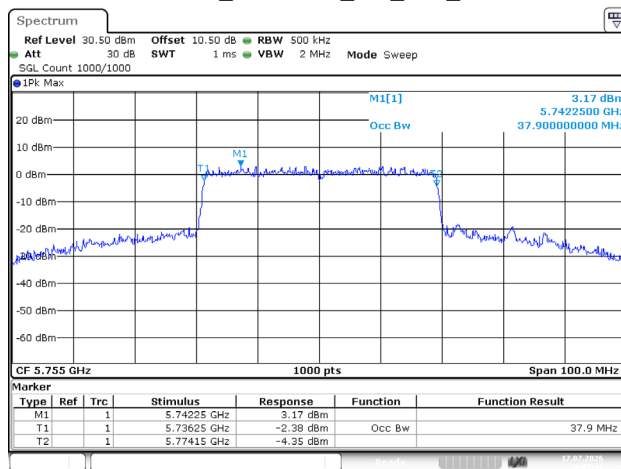


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 10:05:41

802.11ax40_5795MHz_RU_Full_Chain 1

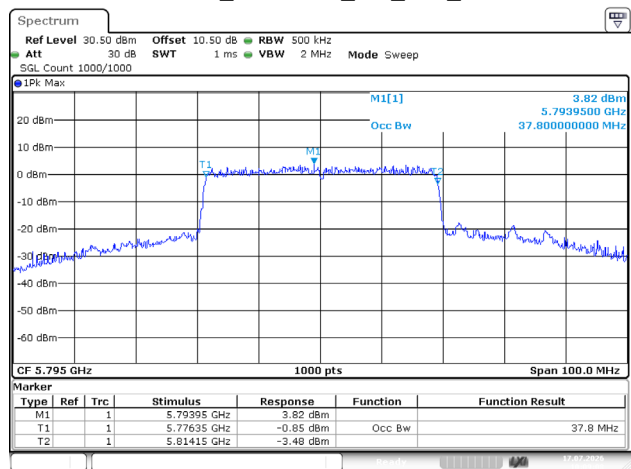


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 10:09:08

802.11ax80_5775MHz_RU_Full_Chain 0

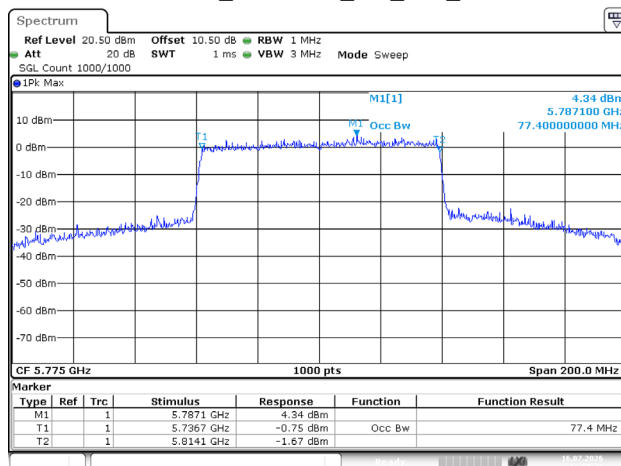

ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 14:59:30

802.11ax80_5775MHz_RU_Full_Chain 1

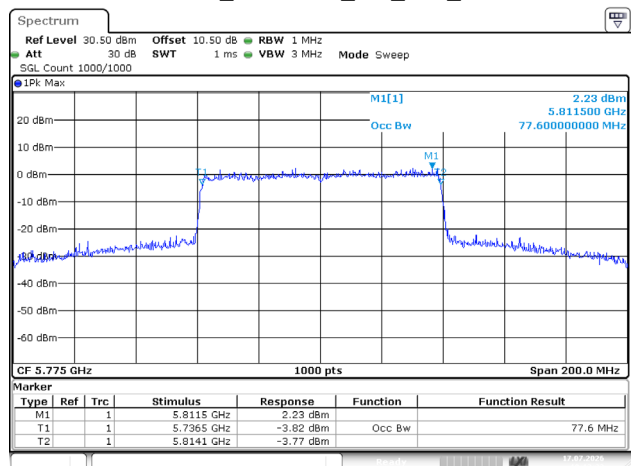

ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 17.JUL.2026 10:12:23

CONDUCTED TRANSMITTER OUTPUT POWER**Environmental Conditions & Test Information**

Test Date:	2026-07-15 to 2026-07-18
Temperature:	24.6-25.8 °C
Relative Humidity:	47-55 %
ATM Pressure:	100.9-102.3 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Mode: Transmitting

Band	Mode	Frequency (MHz)	Reading (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
5150-5250 MHz	802.11a	5180	10.49	8.47	/	24
		5200	10.94	9.22	/	
		5240	10.97	9.39	/	
	802.11ac20	5180	9.37	7.49	11.54	
		5200	9.93	8.04	12.10	
		5240	9.83	8.25	12.12	
	802.11ac40	5190	7.18	5.04	9.25	
		5230	7.47	5.64	9.66	
	802.11ac80	5210	5.98	4.34	8.25	
	802.11ax20	5180	9.51	7.54	11.65	
		5200	10.15	8.15	12.27	
		5240	9.91	8.40	12.23	
	802.11ax40	5190	6.68	5.10	8.97	
		5230	6.97	5.77	9.42	
	802.11ax80	5210	6.57	4.53	8.68	

Note:

EUT is a client device

The maximum antenna gain is 2.28 dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So: Directional gain = $G_{ANT} + \text{Array Gain} = 2.28 \text{ dBi} < 6 \text{ dBi}$, no RF outpower limit was reduced.

Band	Mode	Frequency (MHz)	Reading (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
5250-5350 MHz	802.11a	5260	9.36	6.10	/	24
		5300	8.93	5.47	/	
		5320	9.09	5.34	/	
	802.11ac20	5260	8.18	7.01	10.64	
		5300	7.78	6.31	10.12	
		5320	7.98	6.20	10.19	
	802.11ac40	5270	4.38	3.10	6.80	
		5310	4.29	2.33	6.43	
	802.11ac80	5290	4.21	2.32	6.38	
	802.11ax20	5260	8.29	7.13	10.76	
		5300	7.96	6.47	10.29	
		5320	8.01	6.31	10.25	
	802.11ax40	5270	4.73	3.18	7.03	
		5310	4.72	2.58	6.79	
	802.11ax80	5290	4.37	2.65	6.60	

Note:

The maximum antenna gain is 2.72 dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So: Directional gain = $G_{ANT} + \text{Array Gain} = 2.72 \text{ dBi} < 6 \text{ dBi}$, no RF outpower limit was reduced.

Band	Mode	Frequency (MHz)	Reading (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
5470-5725 MHz	802.11a	5500	4.03	4.40	/	24
		5600	4.47	3.52	/	
		5700	4.45	3.80	/	
		5720	3.52	2.48	/	
	802.11ac20	5500	3.92	4.27	7.11	
		5600	4.39	3.67	7.06	
		5700	4.53	3.57	7.09	
		5720	3.52	2.30	5.96	
	802.11ac40	5510	4.42	5.13	7.80	
		5590	4.90	4.82	7.87	
		5670	5.18	4.99	8.10	
		5710	4.18	3.25	6.75	
	802.11ac80	5530	3.97	4.98	7.51	
		5610	4.50	4.82	7.67	
		5690	4.13	4.11	7.13	
	802.11ax20	5500	4.18	4.34	7.27	
		5600	4.75	3.91	7.36	
		5700	4.70	3.99	7.37	
		5720	3.60	2.57	6.13	
	802.11ax40	5510	4.49	5.11	7.82	
		5590	5.18	4.52	7.87	
		5670	5.23	4.64	7.96	
		5710	4.28	3.02	6.71	
	802.11ax80	5530	4.29	4.86	7.59	
		5610	4.67	4.70	7.70	
		5690	4.42	3.91	7.18	

Note:

The maximum antenna gain is 2.67dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So: Directional gain = $G_{ANT} + \text{Array Gain} = 2.67\text{dBi} < 6\text{dBi}$, no RF output power limit was reduced.

Band	Mode	Frequency (MHz)	Result (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
5725-5850 MHz	802.11a	5745	10.80	9.88	/	30
		5785	11.02	9.74	/	
		5825	11.37	10.46	/	
	802.11ac20	5745	10.73	9.70	13.26	
		5785	10.80	9.59	13.25	
		5825	11.18	10.38	13.81	
	802.11ac40	5755	11.46	10.30	13.93	
		5795	11.55	10.43	14.04	
	802.11ac80	5775	10.17	8.97	12.62	
	802.11ax20	5745	10.80	9.83	13.35	
		5785	10.82	9.82	13.36	
		5825	11.33	10.45	13.92	
	802.11ax40	5755	11.45	10.44	13.98	
		5795	11.73	10.82	14.31	
	802.11ax80	5775	10.43	9.23	12.88	

Note:

The maximum antenna gain is 2.67dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So: Directional gain = $G_{ANT} + \text{Array Gain} = 2.67\text{dBi} < 6\text{dBi}$, no RF outpower limit was reduced.

POWER SPECTRAL DENSITY**Environmental Conditions & Test Information**

Test Date:	2026-07-15 to 2026-07-18
Temperature:	24.6-25.8 °C
Relative Humidity:	47-55 %
ATM Pressure:	100.9-102.3 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

Test Mode: Transmitting

5150-5250MHz

Mode	Frequency (MHz)	PSD							Limit (dBm/MHz)	Verdict
		Chain 0			Chain 1			Total (dBm/MHz)		
		Reading (dBm/MHz)	Duty Cycle Factor (dB)	Result (dBm/MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Result (dBm/MHz)			
802.11a	5180	0.33	0.30	0.63	-1.68	0.30	-1.38	/	11	Pass
	5200	0.77	0.30	1.07	-0.85	0.30	-0.55	/	11	Pass
	5240	0.58	0.30	0.88	-0.94	0.30	-0.64	/	11	Pass
802.11ac20	5180	-1.28	0.32	-0.96	-2.60	0.32	-2.28	1.44	11	Pass
	5200	-0.42	0.32	-0.10	-2.21	0.32	-1.89	2.11	11	Pass
	5240	-0.55	0.32	-0.23	-2.37	0.32	-2.05	1.96	11	Pass
802.11ac40	5190	-7.72	0.62	-7.10	-9.84	0.62	-9.22	-5.02	11	Pass
	5230	-7.50	0.62	-6.88	-9.37	0.62	-8.75	-4.70	11	Pass
802.11ac80	5210	-12.42	1.16	-11.26	-14.03	1.16	-12.87	-8.98	11	Pass
802.11ax20	5180	-0.84	0.41	-0.43	-2.90	0.41	-2.49	1.67	11	Pass
	5200	-0.27	0.41	0.14	-2.27	0.41	-1.86	2.26	11	Pass
	5240	-0.38	0.41	0.03	-2.23	0.41	-1.82	2.21	11	Pass
802.11ax40	5190	-8.16	0.73	-7.43	-9.95	0.74	-9.21	-5.22	11	Pass
	5230	-8.04	0.73	-7.31	-9.36	0.74	-8.62	-4.91	11	Pass
802.11ax80	5210	-12.00	1.29	-10.71	-14.23	1.29	-12.94	-8.67	11	Pass

Note:

1. Result=Reading+ Duty Cycle Factor

2. The maximum antenna gain is 2.28dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = $10 \cdot \log(N_{ANT}/N_{SS})$ dB.

So: Directional gain = $G_{ANT} + \text{Array Gain} = 1.89 + 10 \cdot \log(2/1) = 5.29\text{dBi} < 6\text{dBi}$, no RF outpower limit was reduced.

5250-5350MHz

Mode	Frequency (MHz)	PSD							Limit (dBm/MHz)	Verdict
		Chain 0			Chain 1			Total (dBm/MHz)		
		Reading (dBm/MHz)	Duty Cycle Factor (dB)	Result (dBm/MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Result (dBm/MHz)			
802.11a	5260	-0.85	0.30	-0.55	-4.23	0.30	-3.93	/	11	Pass
	5300	-1.21	0.30	-0.91	-4.78	0.30	-4.48	/	11	Pass
	5320	-1.05	0.30	-0.75	-5.12	0.30	-4.82	/	11	Pass
802.11ac20	5260	-2.43	0.32	-2.11	-3.71	0.32	-3.39	0.31	11	Pass
	5300	-2.76	0.32	-2.44	-4.12	0.32	-3.80	-0.06	11	Pass
	5320	-2.60	0.32	-2.28	-4.11	0.32	-3.79	0.04	11	Pass
802.11ac40	5270	-10.22	0.62	-9.60	-11.75	0.62	-11.13	-7.29	11	Pass
	5310	-10.57	0.62	-9.95	-12.48	0.62	-11.86	-7.79	11	Pass
802.11ac80	5290	-14.02	1.16	-12.86	-15.89	1.16	-14.73	-10.68	11	Pass
802.11ax20	5260	-2.35	0.40	-1.95	-3.17	0.41	-2.76	0.67	11	Pass
	5300	-2.39	0.40	-1.99	-4.00	0.41	-3.59	0.29	11	Pass
	5320	-2.25	0.40	-1.85	-4.48	0.41	-4.07	0.19	11	Pass
802.11ax40	5270	-10.14	0.74	-9.40	-11.76	0.74	-11.02	-7.12	11	Pass
	5310	-10.47	0.74	-9.73	-12.31	0.74	-11.57	-7.54	11	Pass
802.11ax80	5290	-13.98	1.29	-12.69	-15.45	1.29	-14.16	-10.35	11	Pass

Note:

1. Result=Reading+ Duty Cycle Factor

2. The maximum antenna gain is 2.72dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = $10 \cdot \log(N_{\text{ANT}}/N_{\text{SS}})$ dB.So: Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 2.0 + 10 \cdot \log(2/1) = 5.73\text{dBi} < 6\text{dBi}$, no RF outpower limit was reduced.

5470-5725MHz

Mode	Frequency (MHz)	PSD							Limit (dBm/MHz)	Verdict
		Chain 0			Chain 1			Total (dBm/MHz)		
		Reading (dBm/MHz)	Duty Cycle Factor (dB)	Result (dBm/MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Result (dBm/MHz)			
802.11a	5500	-6.47	0.30	-6.17	-5.72	0.30	-5.42	/	11	Pass
	5600	-5.87	0.30	-5.57	-6.66	0.30	-6.36	/	11	Pass
	5700	-5.78	0.30	-5.48	-6.64	0.30	-6.34	/	11	Pass
	5720	-6.09	0.30	-5.79	-7.07	0.30	-6.77	/	11	Pass
802.11ac20	5500	-6.61	0.32	-6.29	-6.09	0.32	-5.77	-3.01	11	Pass
	5600	-6.15	0.32	-5.83	-6.49	0.32	-6.17	-2.99	11	Pass
	5700	-5.97	0.32	-5.65	-6.74	0.32	-6.42	-3.01	11	Pass
	5720	-6.05	0.32	-5.73	-7.28	0.32	-6.96	-3.29	11	Pass
802.11ac40	5510	-10.27	0.62	-9.65	-9.82	0.62	-9.20	-6.41	11	Pass
	5590	-9.61	0.62	-8.99	-9.70	0.62	-9.08	-6.02	11	Pass
	5670	-9.58	0.62	-8.96	-10.03	0.62	-9.41	-6.17	11	Pass
	5710	-10.08	0.62	-9.46	-11.25	0.62	-10.63	-7.00	11	Pass
802.11ac80	5530	-14.49	1.16	-13.33	-13.47	1.16	-12.31	-9.78	11	Pass
	5610	-13.38	1.16	-12.22	-13.11	1.16	-11.95	-9.07	11	Pass
	5690	-14.22	1.16	-13.06	-14.22	1.16	-13.06	-10.05	11	Pass
802.11ax20	5500	-6.49	0.41	-6.08	-5.73	0.41	-5.32	-2.67	11	Pass
	5600	-5.64	0.41	-5.23	-6.63	0.41	-6.22	-2.69	11	Pass
	5700	-6.03	0.41	-5.62	-6.41	0.41	-6.00	-2.80	11	Pass
	5720	-6.16	0.41	-5.75	-7.07	0.41	-6.66	-3.17	11	Pass
802.11ax40	5510	-10.59	0.73	-9.86	-10.06	0.74	-9.32	-6.57	11	Pass
	5590	-9.91	0.73	-9.18	-10.23	0.74	-9.49	-6.32	11	Pass
	5670	-9.81	0.73	-9.08	-10.25	0.74	-9.51	-6.28	11	Pass
	5710	-10.37	0.73	-9.64	-11.36	0.74	-10.62	-7.09	11	Pass
802.11ax80	5530	-14.43	1.29	-13.14	-13.90	1.29	-12.61	-9.86	11	Pass
	5610	-13.08	1.29	-11.79	-13.03	1.29	-11.74	-8.75	11	Pass
	5690	-13.88	1.29	-12.59	-14.21	1.29	-12.92	-9.74	11	Pass

Note:

1. Result=Reading+ Duty Cycle Factor

2. The maximum antenna gain is 2.67dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = $10 \cdot \log(N_{\text{ANT}}/N_{\text{SS}})$ dB.So: Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 2.06 + 10 \cdot \log(2/1) = 5.68\text{dBi} < 6\text{dBi}$, no RF outpower limit was reduced.

5725-5850MHz

Mode	Frequency (MHz)	PSD							Limit (dBm/500 kHz)	Verdict
		Chain 0			Chain 1			Total (dBm/500kHz z)		
		Reading (dBm/50 0kHz)	Duty Cycle Factor (dB)	Result (dBm/50 0kHz)	Reading (dBm/500 kHz)	Duty Cycle Factor (dB)	Result (dBm/500k Hz)			
802.11a	5745	-2.33	0.30	-2.03	-3.21	0.30	-2.91	/	30	Pass
	5785	-2.19	0.30	-1.89	-3.18	0.30	-2.88	/	30	Pass
	5825	-1.75	0.30	-1.45	-2.53	0.30	-2.23	/	30	Pass
802.11ac20	5745	-2.61	0.32	-2.29	-3.52	0.32	-3.20	0.29	30	Pass
	5785	-2.39	0.32	-2.07	-3.51	0.32	-3.19	0.42	30	Pass
	5824	-2.25	0.32	-1.93	-2.58	0.32	-2.26	0.92	30	Pass
802.11ac40	5755	-6.08	0.62	-5.46	-7.60	0.62	-6.98	-3.14	30	Pass
	5795	-6.07	0.62	-5.45	-7.10	0.62	-6.48	-2.92	30	Pass
802.11ac80	5775	-10.53	1.17	-9.36	-11.58	1.16	-10.42	-6.85	30	Pass
802.11ac20	5745	-2.59	0.41	-2.18	-3.33	0.41	-2.92	0.48	30	Pass
	5785	-2.26	0.41	-1.85	-3.18	0.41	-2.77	0.72	30	Pass
	5824	-1.88	0.41	-1.47	-2.83	0.41	-2.42	1.09	30	Pass
802.11ac40	5755	-6.24	0.74	-5.50	-7.48	0.74	-6.74	-3.07	30	Pass
	5795	-6.01	0.74	-5.27	-6.80	0.74	-6.06	-2.64	30	Pass
802.11ac80	5775	-10.48	1.29	-9.19	-11.96	1.29	-10.67	-6.86	30	Pass

Note:


1. Result=Reading+ Duty Cycle Factor

2. The maximum antenna gain is 2.67dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

Array Gain = $10 \cdot \log(N_{\text{ANT}}/N_{\text{SS}})$ dB.So: Directional gain = $G_{\text{ANT}} + \text{Array Gain} = 2.67 + 10 \cdot \log(2/1) = 5.68\text{dBi} < 6\text{dBi}$, no RF outpower limit was reduced.


5150-5250MHz Band:

802.11a_5180MHz_Chain 0

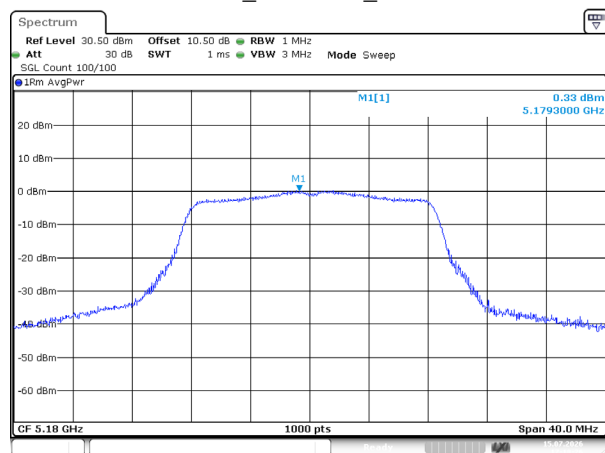


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:18:26

802.11a_5200MHz_Chain 0

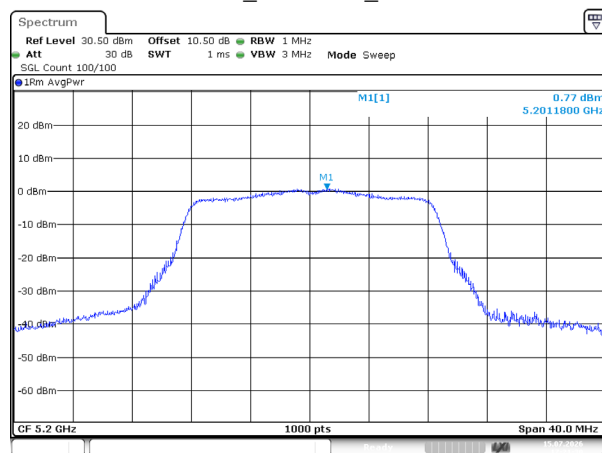


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:21:30

802.11a_5240MHz_Chain 0

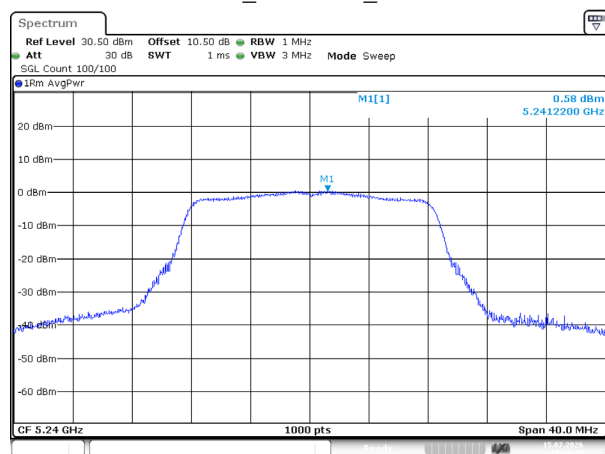


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:24:35

802.11a_5180MHz_Chain 1

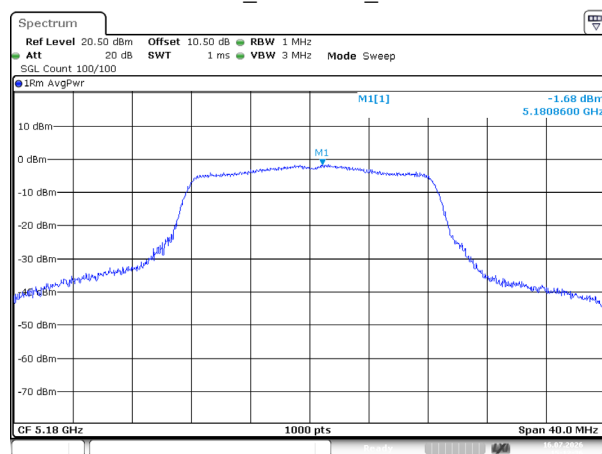


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 15:12:36

802.11a_5200MHz_Chain 1

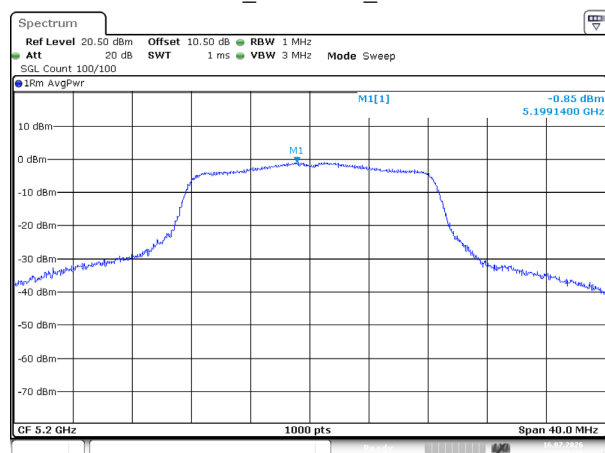


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 15:41:41

802.11a_5240MHz_Chain 1

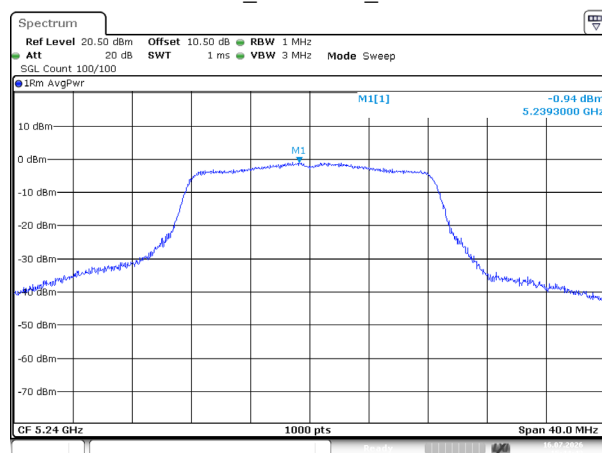


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 15:44:43

802.11ac20_5180MHz_Chain 0

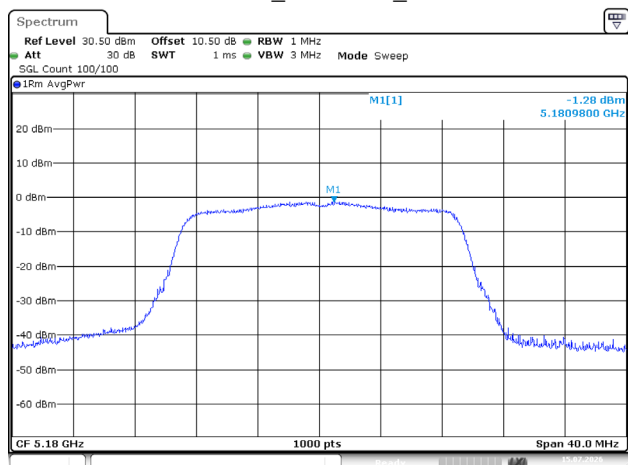


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:28:19

802.11ac20_5200MHz_Chain 0

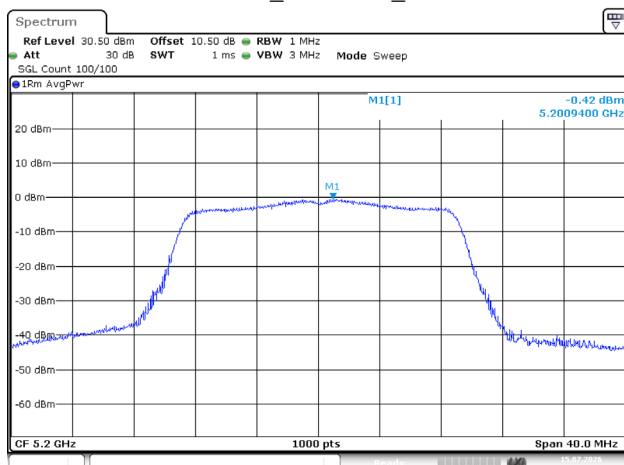


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:32:24

802.11ac20_5240MHz_Chain 0

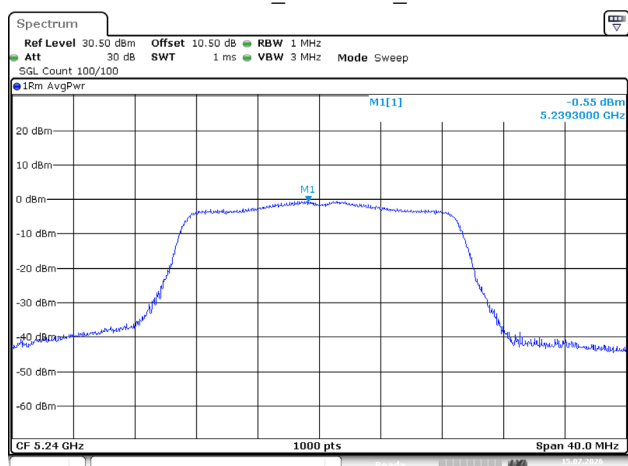


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:35:37

802.11ac20_5180MHz_Chain 1

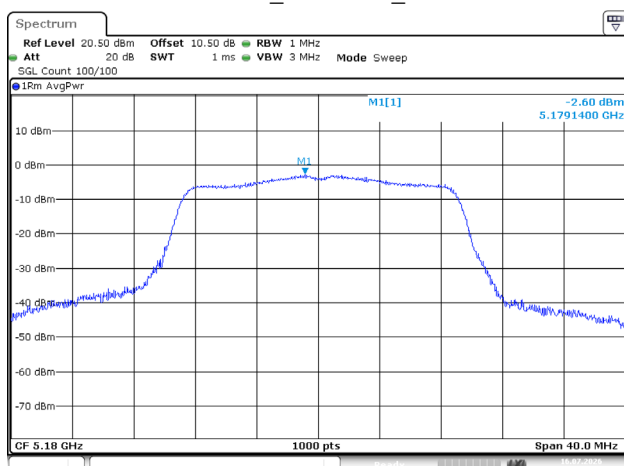


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 15:48:40

802.11ac20_5200MHz_Chain 1

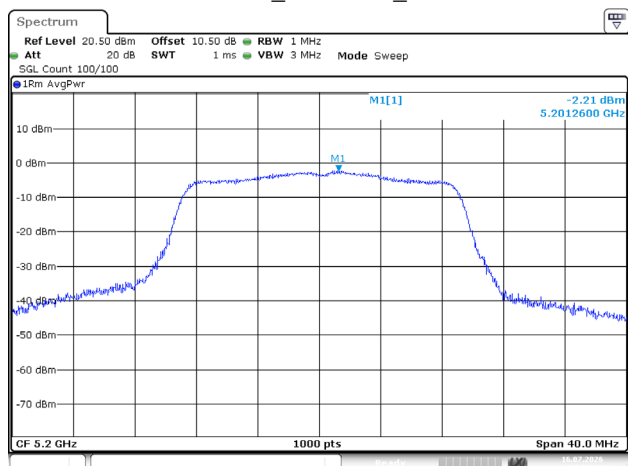


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 15:51:45

802.11ac20_5240MHz_Chain 1

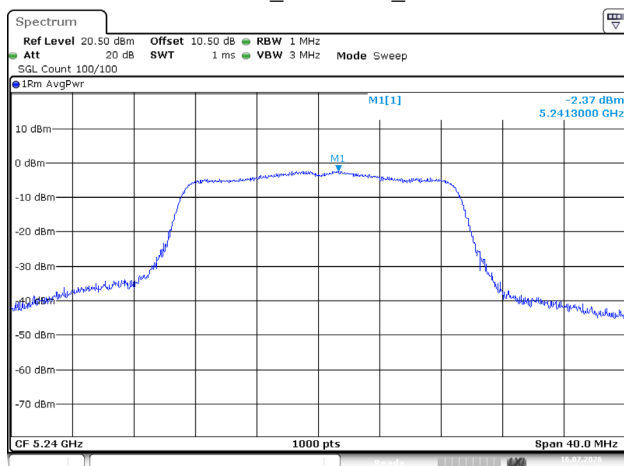


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 15:54:50

802.11ac40_5190MHz_Chain 0

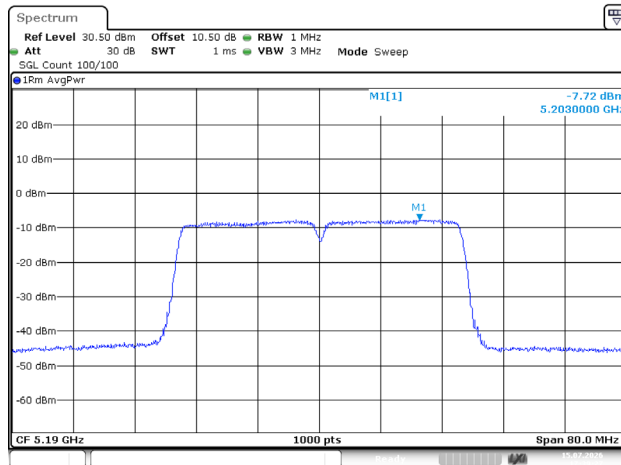


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:39:27

802.11ac40_5230MHz_Chain 0

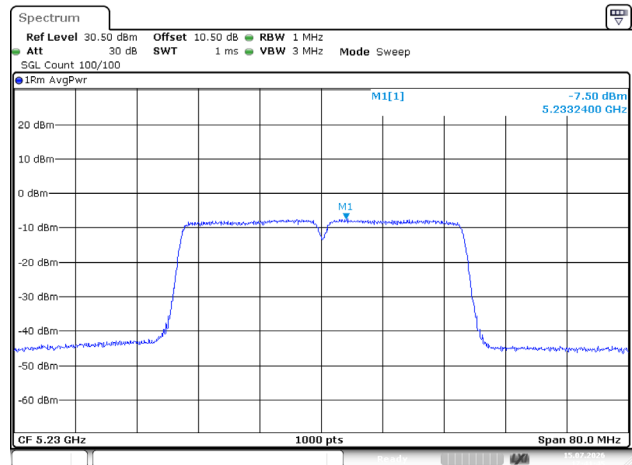


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:41:45

802.11ac40_5190MHz_Chain 1

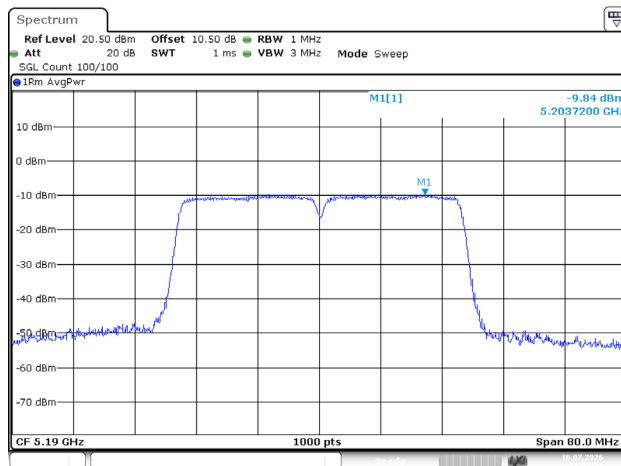


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 15:57:21

802.11ac40_5230MHz_Chain 1

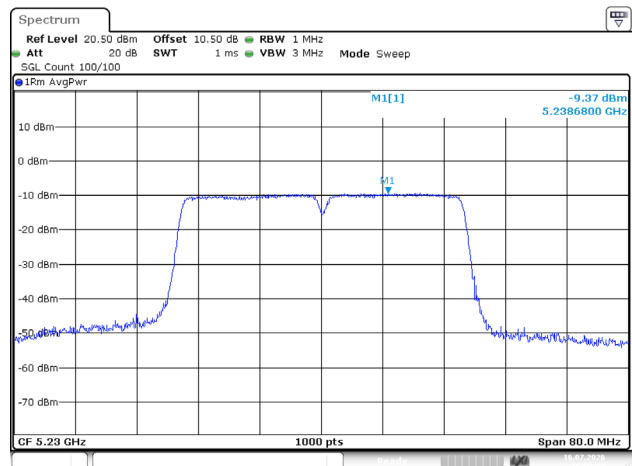


ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 16:00:14

802.11ac80_5210MHz_Chain 0

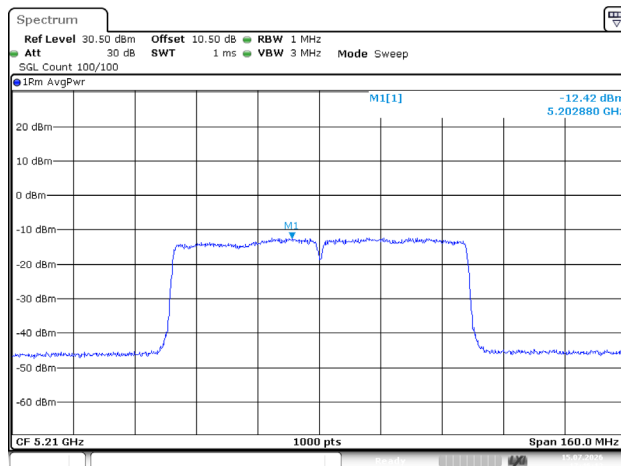

ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 15.JUL.2026 17:46:12

802.11ac80_5210MHz_Chain 1

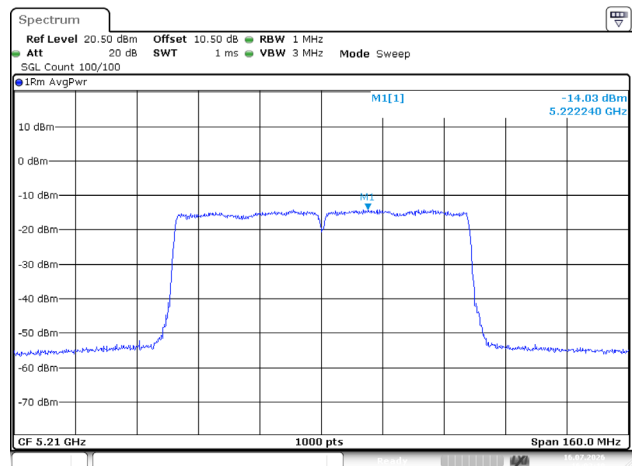

ProjectNo.:RKSA260622001 Tester:Neil Zhou
Date: 16.JUL.2026 16:03:10