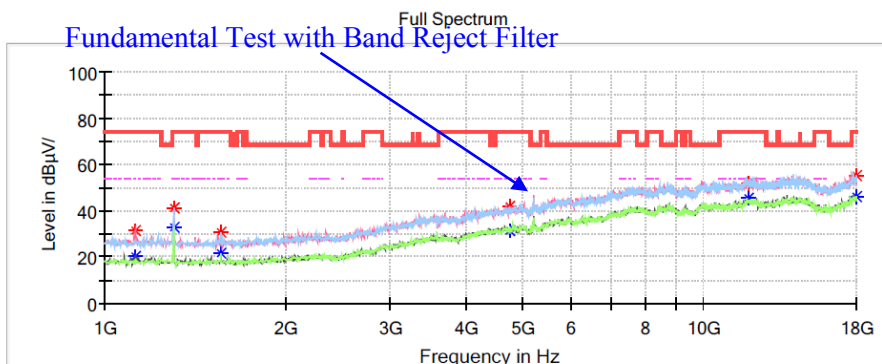


**Middle Channel: 5200MHz****Common Information**

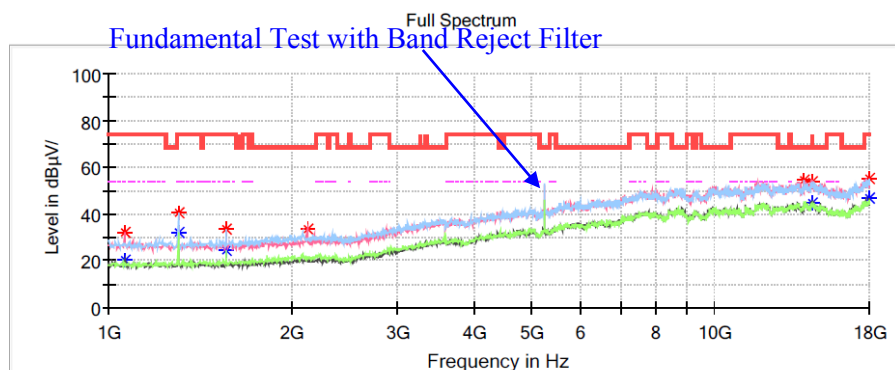
Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11a mode Middle Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6℃  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1122.400000     | ---                    | 20.36                  | 54.00                | 33.64       | V   | -15.6        |
| 1122.400000     | 31.56                  | ---                    | 74.00                | 42.44       | V   | -15.6        |
| 1302.600000     | ---                    | 32.68                  | 54.00                | 21.32       | H   | -14.9        |
| 1302.600000     | 41.50                  | ---                    | 74.00                | 32.50       | H   | -14.9        |
| 1564.400000     | ---                    | 21.64                  | 54.00                | 32.36       | H   | -13.8        |
| 1564.400000     | 31.07                  | ---                    | 74.00                | 42.93       | H   | -13.8        |
| 4733.200000     | ---                    | 31.35                  | 54.00                | 22.65       | V   | -3.6         |
| 4733.200000     | 42.24                  | ---                    | 74.00                | 31.76       | V   | -3.6         |
| 11856.200000    | 52.05                  | ---                    | 74.00                | 21.95       | V   | 8.8          |
| 11856.200000    | ---                    | 45.60                  | 54.00                | 8.40        | V   | 8.8          |
| 17986.400000    | ---                    | 46.49                  | 54.00                | 7.51        | V   | 13.7         |
| 17986.400000    | 55.25                  | ---                    | 74.00                | 18.75       | V   | 13.7         |

**High Channel: 5240MHz****Common Information**

Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11a mode High Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6℃  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1061.200000     | ---                    | 20.16                  | 54.00                | 33.84       | V   | -15.9        |
| 1061.200000     | 32.26                  | ---                    | 74.00                | 41.74       | V   | -15.9        |
| 1302.600000     | 40.67                  | ---                    | 74.00                | 33.33       | H   | -14.9        |
| 1302.600000     | ---                    | 31.90                  | 54.00                | 22.10       | H   | -14.9        |
| 1564.400000     | 33.79                  | ---                    | 74.00                | 40.21       | H   | -13.8        |
| 1564.400000     | ---                    | 24.81                  | 54.00                | 29.19       | H   | -13.8        |
| 2125.400000     | 33.60                  | ---                    | 68.20                | 34.60       | H   | -11.3        |
| 14056.000000    | 54.79                  | ---                    | 68.20                | 13.41       | H   | 10.7         |
| 14484.400000    | ---                    | 45.01                  | 54.00                | 8.99        | V   | 11.1         |
| 14484.400000    | 53.84                  | ---                    | 74.00                | 20.16       | V   | 11.1         |
| 17996.600000    | 55.05                  | ---                    | 74.00                | 18.95       | V   | 13.8         |
| 17996.600000    | ---                    | 46.63                  | 54.00                | 7.37        | V   | 13.8         |

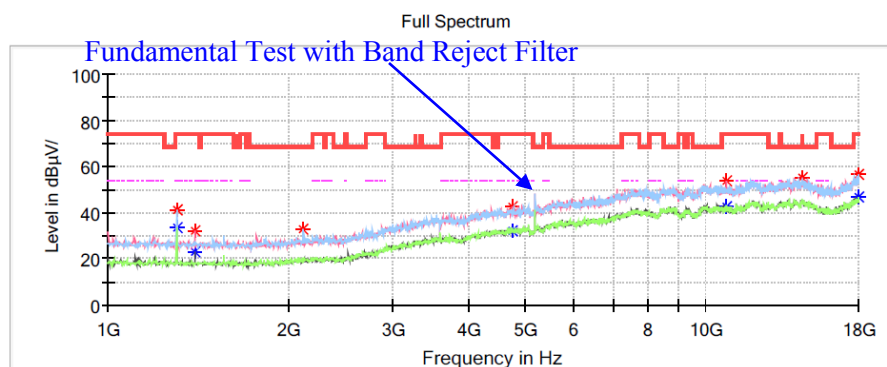
## Chain 1

## 802.11a Mode:

## Low Channel: 5180MHz

## Common Information

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11a mode Low Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

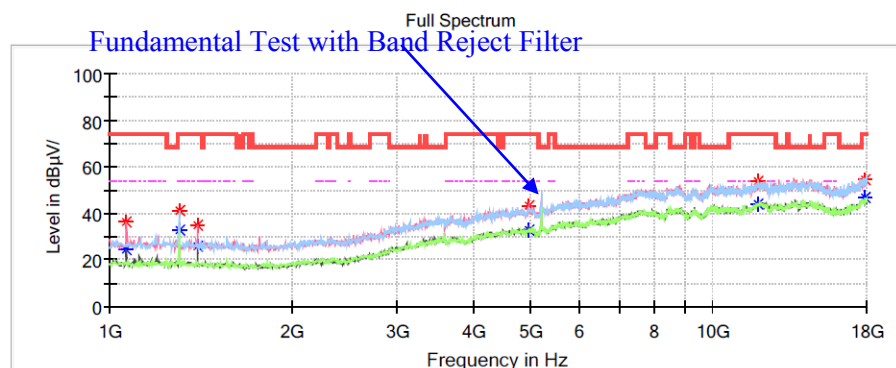


## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | ---                | 33.23              | 54.00            | 20.77       | H   | -14.9        |
| 1302.600000     | 41.13              | ---                | 74.00            | 32.87       | H   | -14.9        |
| 1397.800000     | ---                | 23.33              | 54.00            | 30.67       | V   | -14.5        |
| 1397.800000     | 31.95              | ---                | 74.00            | 42.05       | V   | -14.5        |
| 2122.000000     | 32.84              | ---                | 68.20            | 35.36       | V   | -11.3        |
| 4746.800000     | ---                | 32.13              | 54.00            | 21.87       | V   | -3.6         |
| 4746.800000     | 42.31              | ---                | 74.00            | 31.69       | V   | -3.6         |
| 10829.400000    | 53.58              | ---                | 74.00            | 20.42       | V   | 6.7          |
| 10829.400000    | ---                | 42.88              | 54.00            | 11.12       | V   | 6.7          |
| 14450.400000    | 55.01              | ---                | 68.20            | 13.19       | V   | 11.1         |
| 17996.600000    | ---                | 47.12              | 54.00            | 6.88        | H   | 13.8         |
| 17996.600000    | 56.31              | ---                | 74.00            | 17.69       | H   | 13.8         |

**Middle Channel: 5200MHz****Common Information**

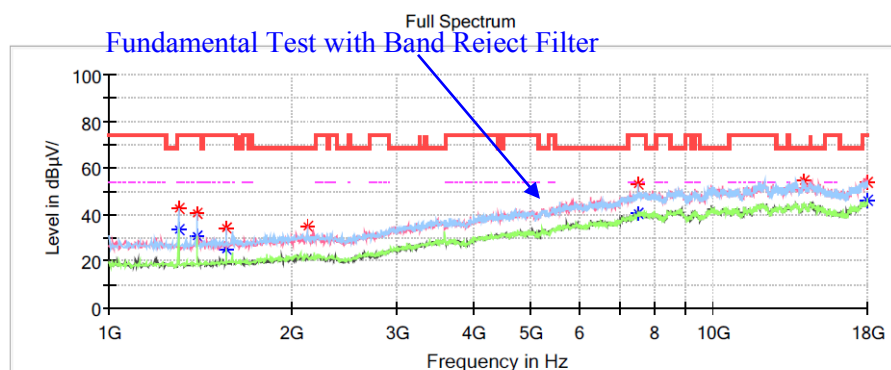
|                       |                                                     |
|-----------------------|-----------------------------------------------------|
| Project No.:          | RKSA260622001                                       |
| EUT Model:            | SRP2504A                                            |
| Test Mode:            | 5G WIFI 802.11a mode Middle Channel                 |
| Standard:             | FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209 |
| Test Equipment:       | ESU40,3115,PAM-0118P                                |
| Receiver Setting:     | RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto              |
| Temperature:          | 23.6°C                                              |
| Humidity:             | 41%                                                 |
| Atmospheric Pressure: | 100.8kPa                                            |
| Test Engineer:        | Destine Hu                                          |
| Check by:             | Bard Liu                                            |
| Test Date:            | 2026/7/11                                           |

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1064.600000     | 36.41                  | ---                    | 74.00                | 37.59       | V   | -15.9        |
| 1064.600000     | ---                    | 24.55                  | 54.00                | 29.45       | V   | -15.9        |
| 1302.600000     | 41.04                  | ---                    | 74.00                | 32.96       | H   | -14.9        |
| 1302.600000     | ---                    | 32.88                  | 54.00                | 21.12       | H   | -14.9        |
| 1397.800000     | 35.11                  | ---                    | 74.00                | 38.89       | V   | -14.5        |
| 1397.800000     | ---                    | 26.06                  | 54.00                | 27.94       | V   | -14.5        |
| 4940.600000     | 43.22                  | ---                    | 74.00                | 30.78       | V   | -3.0         |
| 4940.600000     | ---                    | 32.87                  | 54.00                | 21.13       | V   | -3.0         |
| 11890.200000    | ---                    | 43.90                  | 54.00                | 10.10       | H   | 8.8          |
| 11890.200000    | 53.79                  | ---                    | 74.00                | 20.21       | H   | 8.8          |
| 17932.000000    | ---                    | 46.87                  | 54.00                | 7.13        | H   | 13.4         |
| 17932.000000    | 54.66                  | ---                    | 74.00                | 19.34       | H   | 13.4         |

**High Channel: 5240MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11a mode High Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Critical Freqs**

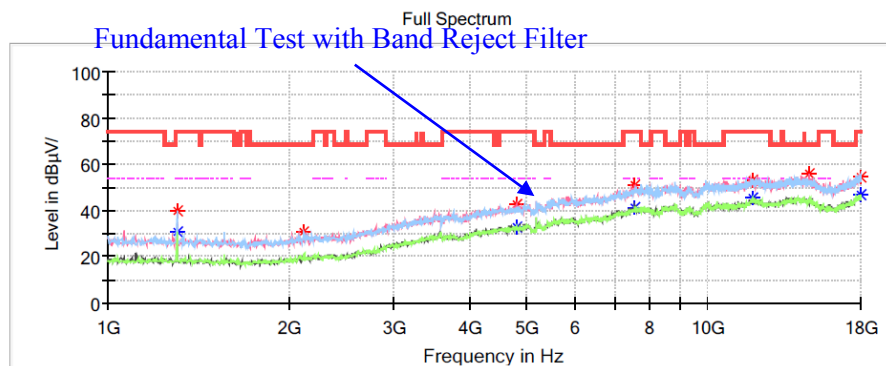
| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | 42.61              | ---                | 74.00            | 31.39       | H   | -14.9        |
| 1302.600000     | ---                | 33.37              | 54.00            | 20.63       | H   | -14.9        |
| 1397.800000     | 40.29              | ---                | 74.00            | 33.71       | H   | -14.5        |
| 1397.800000     | ---                | 30.62              | 54.00            | 23.38       | H   | -14.5        |
| 1564.400000     | 34.26              | ---                | 74.00            | 39.74       | V   | -13.8        |
| 1564.400000     | ---                | 24.88              | 54.00            | 29.12       | V   | -13.8        |
| 2128.800000     | 35.04              | ---                | 68.20            | 33.16       | V   | -11.3        |
| 7521.200000     | ---                | 40.56              | 54.00            | 13.44       | H   | 3.3          |
| 7521.200000     | 53.11              | ---                | 74.00            | 20.89       | H   | 3.3          |
| 14096.800000    | 54.27              | ---                | 68.20            | 13.93       | H   | 10.7         |
| 17996.600000    | 54.07              | ---                | 74.00            | 19.93       | H   | 13.8         |
| 17996.600000    | ---                | 46.20              | 54.00            | 7.80        | H   | 13.8         |

**MIMO (Chain 0+Chain 1):**  
**802.11ac20 Mode:**

**Low Channel: 5180MHz**

**Common Information**

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Project No.:          | RKSA260622001                                     |
| EUT Model:            | SRP2504A                                          |
| Test Mode:            | 5G WIFI 802.11ac20 mode Low Channel               |
| Standard:             | FCC Part 15.407& FCC Part 15.205& FCC Part 15.209 |
| Test Equipment:       | ESU40,3115,PAM-0118P                              |
| Receiver Setting:     | RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto            |
| Temperature:          | 23.6°C                                            |
| Humidity:             | 41%                                               |
| Atmospheric Pressure: | 100.8kPa                                          |
| Test Engineer:        | Destine Hu                                        |
| Check by:             | Bard Liu                                          |
| Test Date:            | 2026/7/11                                         |

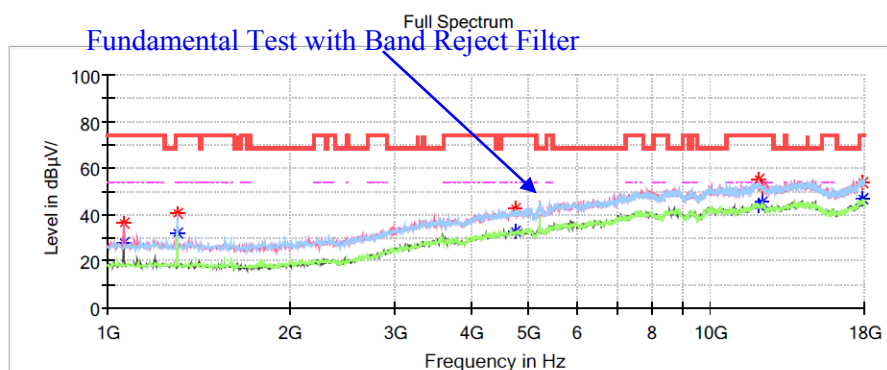


**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1302.600000     | 39.93                  | ---                    | 74.00                | 34.07       | H   | -14.9        |
| 1302.600000     | ---                    | 31.10                  | 54.00                | 22.90       | H   | -14.9        |
| 2122.000000     | 31.08                  | ---                    | 68.20                | 37.12       | H   | -11.3        |
| 4791.000000     | ---                    | 32.58                  | 54.00                | 21.42       | H   | -3.5         |
| 4791.000000     | 42.82                  | ---                    | 74.00                | 31.18       | H   | -3.5         |
| 7565.400000     | ---                    | 41.55                  | 54.00                | 12.45       | V   | 3.3          |
| 7565.400000     | 50.71                  | ---                    | 74.00                | 23.29       | V   | 3.3          |
| 11866.400000    | 53.17                  | ---                    | 74.00                | 20.83       | V   | 8.8          |
| 11866.400000    | ---                    | 45.62                  | 54.00                | 8.38        | V   | 8.8          |
| 14770.000000    | 55.89                  | ---                    | 68.20                | 12.31       | V   | 10.2         |
| 17966.000000    | ---                    | 46.89                  | 54.00                | 7.11        | H   | 13.6         |
| 17966.000000    | 54.42                  | ---                    | 74.00                | 19.58       | H   | 13.6         |

**Middle Channel: 5200MHz****Common Information**

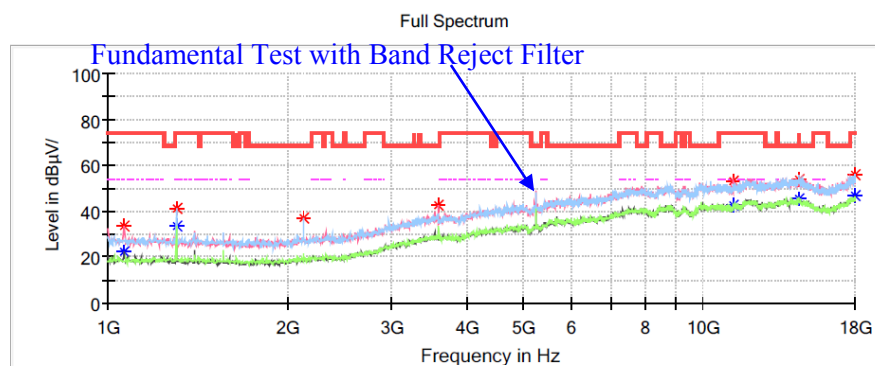
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac20 mode Middle Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1061.200000     | 36.65              | ---                | 74.00            | 37.35       | V   | -15.9        |
| 1061.200000     | ---                | 28.09              | 54.00            | 25.91       | V   | -15.9        |
| 1302.600000     | 40.70              | ---                | 74.00            | 33.30       | H   | -14.9        |
| 1302.600000     | ---                | 32.14              | 54.00            | 21.86       | H   | -14.9        |
| 4743.400000     | ---                | 33.09              | 54.00            | 20.91       | V   | -3.6         |
| 4743.400000     | 42.64              | ---                | 74.00            | 31.36       | V   | -3.6         |
| 12009.200000    | ---                | 43.86              | 54.00            | 10.14       | H   | 9.0          |
| 12009.200000    | 55.31              | ---                | 74.00            | 18.69       | H   | 9.0          |
| 12165.600000    | ---                | 45.20              | 54.00            | 8.80        | V   | 8.9          |
| 12165.600000    | 51.91              | ---                | 74.00            | 22.09       | V   | 8.9          |
| 17918.400000    | 54.02              | ---                | 74.00            | 19.98       | H   | 13.3         |
| 17918.400000    | ---                | 46.98              | 54.00            | 7.02        | H   | 13.3         |

**High Channel: 5240MHz****Common Information**

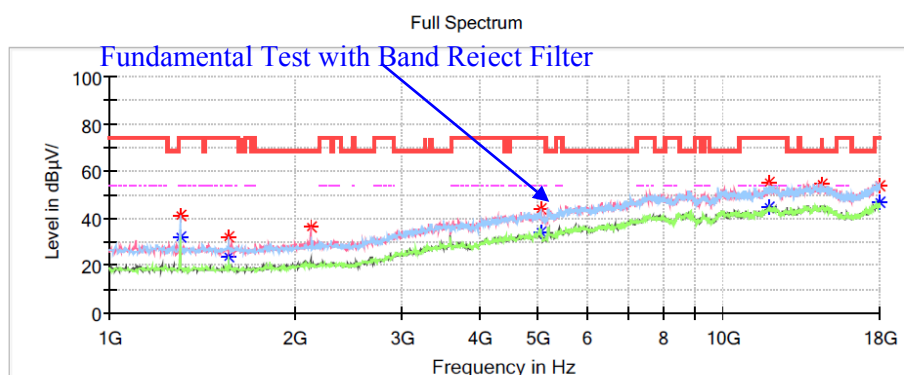
Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ac20 mode High Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6℃  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1064.600000     | 33.79              | ---                | 74.00            | 40.21       | V   | -15.9        |
| 1064.600000     | ---                | 22.39              | 54.00            | 31.61       | V   | -15.9        |
| 1302.600000     | ---                | 33.22              | 54.00            | 20.78       | H   | -14.9        |
| 1302.600000     | 41.57              | ---                | 74.00            | 32.43       | H   | -14.9        |
| 2132.200000     | 36.98              | ---                | 68.20            | 31.22       | H   | -11.3        |
| 3594.200000     | 42.99              | ---                | 68.20            | 25.21       | H   | -6.0         |
| 11268.000000    | ---                | 42.89              | 54.00            | 11.11       | V   | 7.5          |
| 11268.000000    | 53.49              | ---                | 74.00            | 20.51       | V   | 7.5          |
| 14484.400000    | 53.70              | ---                | 74.00            | 20.30       | H   | 11.1         |
| 14484.400000    | ---                | 45.20              | 54.00            | 8.80        | H   | 11.1         |
| 17996.600000    | 55.80              | ---                | 74.00            | 18.20       | V   | 13.8         |
| 17996.600000    | ---                | 46.67              | 54.00            | 7.33        | V   | 13.8         |

**802.11ac40 Mode:****Channel: 5190MHz****Common Information**

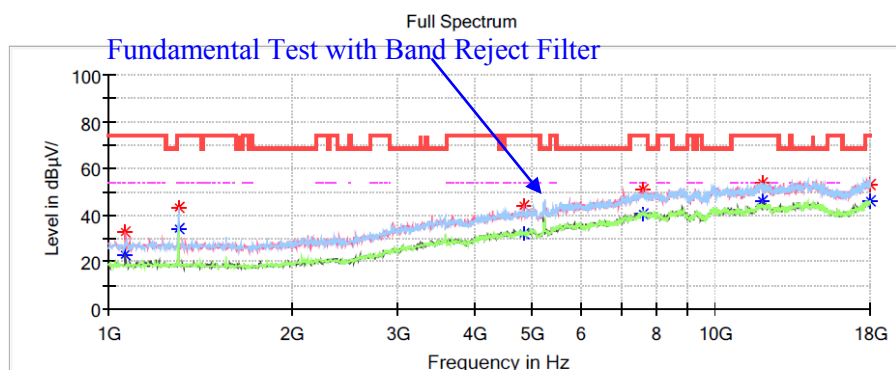
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac40 mode Low Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6℃  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | ---                | 32.32              | 54.00            | 21.68       | H   | -14.9        |
| 1302.600000     | 41.08              | ---                | 74.00            | 32.92       | H   | -14.9        |
| 1564.400000     | ---                | 23.78              | 54.00            | 30.22       | H   | -13.8        |
| 1564.400000     | 32.45              | ---                | 74.00            | 41.55       | H   | -13.8        |
| 2125.400000     | 36.58              | ---                | 68.20            | 31.62       | V   | -11.3        |
| 5052.800000     | ---                | 34.00              | 54.00            | 20.00       | V   | -2.7         |
| 5052.800000     | 43.77              | ---                | 74.00            | 30.23       | V   | -2.7         |
| 11869.800000    | ---                | 44.47              | 54.00            | 9.53        | V   | 8.8          |
| 11869.800000    | 55.49              | ---                | 74.00            | 18.51       | V   | 8.8          |
| 14521.800000    | 54.84              | ---                | 68.20            | 13.36       | V   | 11.0         |
| 17996.600000    | 53.77              | ---                | 74.00            | 20.23       | H   | 13.8         |
| 17996.600000    | ---                | 46.61              | 54.00            | 7.39        | H   | 13.8         |

**Channel: 5230MHz****Common Information**

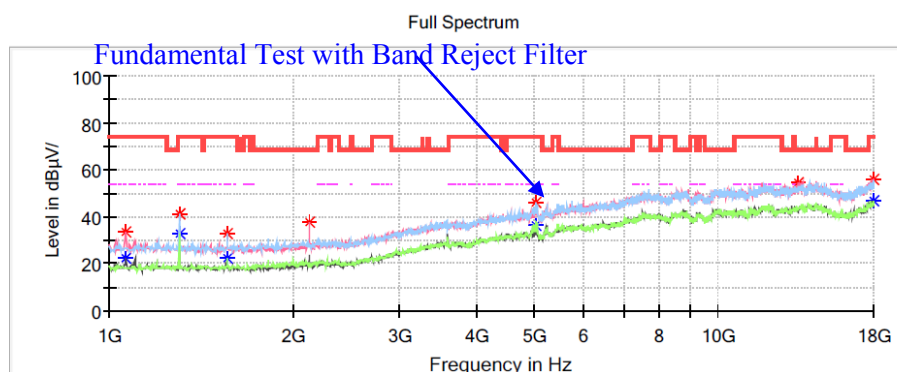
Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ac40 mode High Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6℃  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1064.600000     | 32.67                  | ---                    | 74.00                | 41.33       | V   | -15.9        |
| 1064.600000     | ---                    | 22.88                  | 54.00                | 31.12       | V   | -15.9        |
| 1302.600000     | 43.26                  | ---                    | 74.00                | 30.74       | H   | -14.9        |
| 1302.600000     | ---                    | 34.16                  | 54.00                | 19.84       | H   | -14.9        |
| 4842.000000     | 43.98                  | ---                    | 74.00                | 30.02       | V   | -3.3         |
| 4842.000000     | ---                    | 31.99                  | 54.00                | 22.01       | V   | -3.3         |
| 7599.400000     | ---                    | 40.36                  | 54.00                | 13.64       | H   | 3.3          |
| 7599.400000     | 51.02                  | ---                    | 74.00                | 22.98       | H   | 3.3          |
| 11982.000000    | ---                    | 45.89                  | 54.00                | 8.11        | V   | 9.0          |
| 11982.000000    | 53.84                  | ---                    | 74.00                | 20.16       | V   | 9.0          |
| 17966.000000    | ---                    | 46.48                  | 54.00                | 7.52        | V   | 13.6         |
| 17966.000000    | 53.25                  | ---                    | 74.00                | 20.75       | V   | 13.6         |

**802.11ac80 Mode:****Channel: 5210MHz****Common Information**

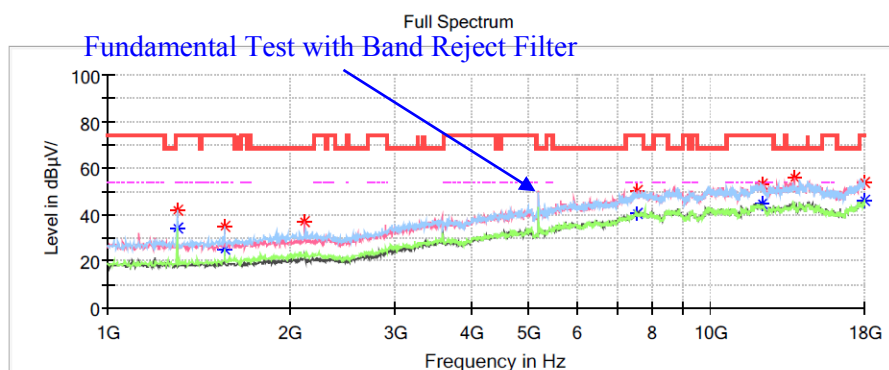
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac80  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1064.600000     | ---                | 22.13              | 54.00            | 31.87       | V   | -15.9        |
| 1064.600000     | 33.79              | ---                | 74.00            | 40.21       | V   | -15.9        |
| 1302.600000     | ---                | 33.05              | 54.00            | 20.95       | H   | -14.9        |
| 1302.600000     | 41.06              | ---                | 74.00            | 32.94       | H   | -14.9        |
| 1564.400000     | ---                | 22.25              | 54.00            | 31.75       | H   | -13.8        |
| 1564.400000     | 32.86              | ---                | 74.00            | 41.14       | H   | -13.8        |
| 2128.800000     | 37.46              | ---                | 68.20            | 30.74       | H   | -11.3        |
| 5025.600000     | 46.28              | ---                | 74.00            | 27.72       | H   | -2.7         |
| 5025.600000     | ---                | 36.70              | 54.00            | 17.30       | H   | -2.7         |
| 13539.200000    | 54.65              | ---                | 68.20            | 13.55       | H   | 9.7          |
| 17993.200000    | ---                | 47.11              | 54.00            | 6.89        | V   | 13.8         |
| 17993.200000    | 56.06              | ---                | 74.00            | 17.94       | V   | 13.8         |

**802.11ax20 Mode:****Low Channel: 5180MHz****Common Information**

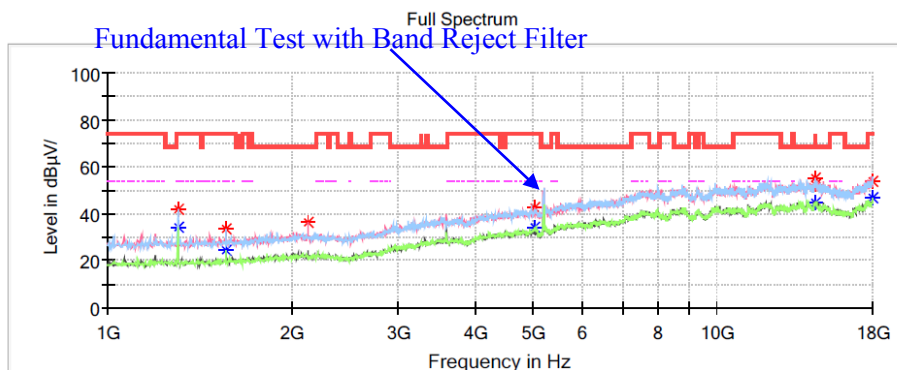
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ax20 mode Low Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | ---                | 34.14              | 54.00            | 19.86       | H   | -14.9        |
| 1302.600000     | 42.08              | ---                | 74.00            | 31.92       | H   | -14.9        |
| 1564.400000     | ---                | 24.90              | 54.00            | 29.10       | H   | -13.8        |
| 1564.400000     | 34.63              | ---                | 74.00            | 39.37       | H   | -13.8        |
| 2122.000000     | 36.96              | ---                | 68.20            | 31.24       | V   | -11.3        |
| 7541.600000     | ---                | 40.64              | 54.00            | 13.36       | V   | 3.3          |
| 7541.600000     | 50.55              | ---                | 74.00            | 23.45       | V   | 3.3          |
| 12189.400000    | ---                | 44.82              | 54.00            | 9.18        | H   | 8.9          |
| 12189.400000    | 53.01              | ---                | 74.00            | 20.99       | H   | 8.9          |
| 13756.800000    | 55.84              | ---                | 68.20            | 12.36       | V   | 10.2         |
| 17996.600000    | 53.56              | ---                | 74.00            | 20.44       | V   | 13.8         |
| 17996.600000    | ---                | 46.35              | 54.00            | 7.65        | V   | 13.8         |

**Middle Channel: 5200MHz****Common Information**

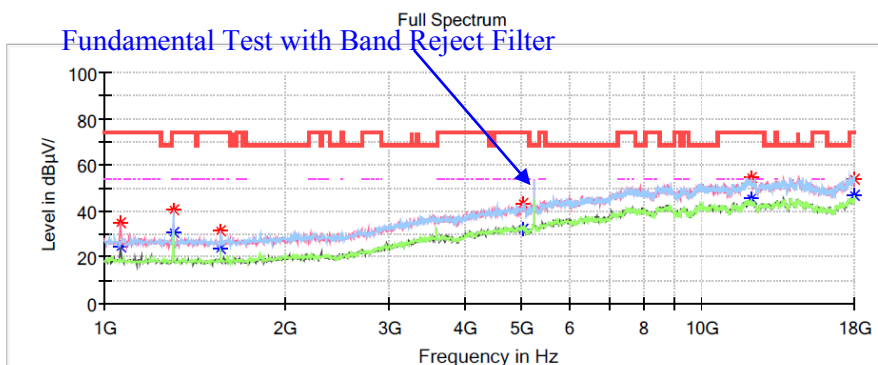
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ax20 mode Middle Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6℃  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | ---                | 34.03              | 54.00            | 19.97       | H   | -14.9        |
| 1302.600000     | 42.06              | ---                | 74.00            | 31.94       | H   | -14.9        |
| 1564.400000     | ---                | 24.16              | 54.00            | 29.84       | H   | -13.8        |
| 1564.400000     | 33.85              | ---                | 74.00            | 40.15       | H   | -13.8        |
| 2128.800000     | 36.25              | ---                | 68.20            | 31.95       | V   | -11.3        |
| 5015.400000     | ---                | 33.97              | 54.00            | 20.03       | V   | -2.7         |
| 5015.400000     | 42.62              | ---                | 74.00            | 31.38       | V   | -2.7         |
| 14498.000000    | ---                | 44.97              | 54.00            | 9.03        | H   | 11.1         |
| 14498.000000    | 52.78              | ---                | 74.00            | 21.22       | H   | 11.1         |
| 14501.400000    | 55.30              | ---                | 68.20            | 12.90       | H   | 11.1         |
| 17983.000000    | 53.88              | ---                | 74.00            | 20.12       | V   | 13.7         |
| 17983.000000    | ---                | 46.57              | 54.00            | 7.43        | V   | 13.7         |

**High Channel: 5240MHz****Common Information**

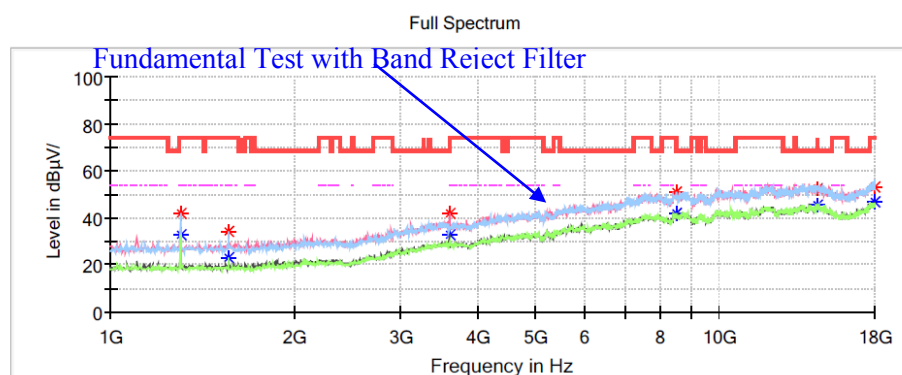
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ax20 mode High Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6℃  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1061.200000     | ---                | 24.78              | 54.00            | 29.22       | V   | -15.9        |
| 1061.200000     | 35.14              | ---                | 74.00            | 38.86       | V   | -15.9        |
| 1302.600000     | ---                | 30.89              | 54.00            | 23.11       | H   | -14.9        |
| 1302.600000     | 40.84              | ---                | 74.00            | 33.16       | H   | -14.9        |
| 1564.400000     | ---                | 23.59              | 54.00            | 30.41       | H   | -13.8        |
| 1564.400000     | 31.58              | ---                | 74.00            | 42.42       | H   | -13.8        |
| 5008.600000     | ---                | 32.06              | 54.00            | 21.94       | V   | -2.8         |
| 5008.600000     | 43.28              | ---                | 74.00            | 30.72       | V   | -2.8         |
| 12090.800000    | ---                | 45.22              | 54.00            | 8.78        | H   | 9.0          |
| 12090.800000    | 54.40              | ---                | 74.00            | 19.60       | H   | 9.0          |
| 17996.600000    | 53.70              | ---                | 74.00            | 20.30       | V   | 13.8         |
| 17996.600000    | ---                | 46.74              | 54.00            | 7.26        | V   | 13.8         |

**802.11ax40 Mode:****Channel: 5190MHz****Common Information**

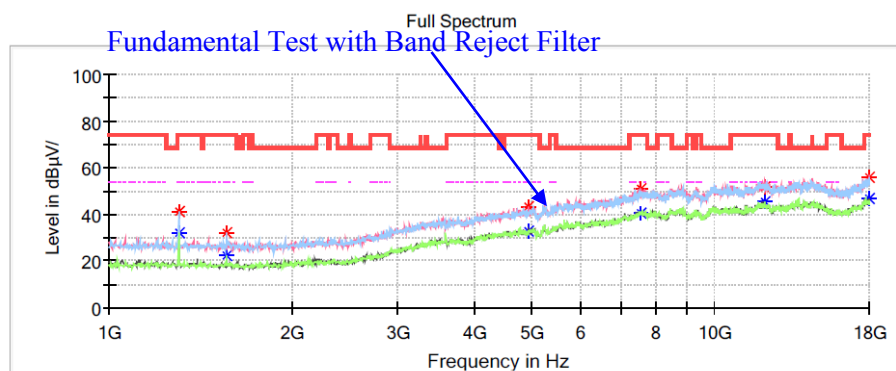
Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ax40 mode Low Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6°C  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | 41.64              | ---                | 74.00            | 32.36       | H   | -14.9        |
| 1302.600000     | ---                | 33.02              | 54.00            | 20.98       | H   | -14.9        |
| 1564.400000     | 34.31              | ---                | 74.00            | 39.69       | H   | -13.8        |
| 1564.400000     | ---                | 22.77              | 54.00            | 31.23       | H   | -13.8        |
| 3601.000000     | ---                | 32.87              | 54.00            | 21.13       | V   | -6.0         |
| 3601.000000     | 41.66              | ---                | 74.00            | 32.34       | V   | -6.0         |
| 8476.600000     | ---                | 42.10              | 54.00            | 11.90       | V   | 4.7          |
| 8476.600000     | 51.26              | ---                | 74.00            | 22.74       | V   | 4.7          |
| 14494.600000    | ---                | 45.13              | 54.00            | 8.87        | H   | 11.1         |
| 14494.600000    | 52.61              | ---                | 74.00            | 21.39       | H   | 11.1         |
| 17955.800000    | ---                | 46.90              | 54.00            | 7.10        | V   | 13.6         |
| 17955.800000    | 53.32              | ---                | 74.00            | 20.68       | V   | 13.6         |

**Channel: 5230MHz****Common Information**

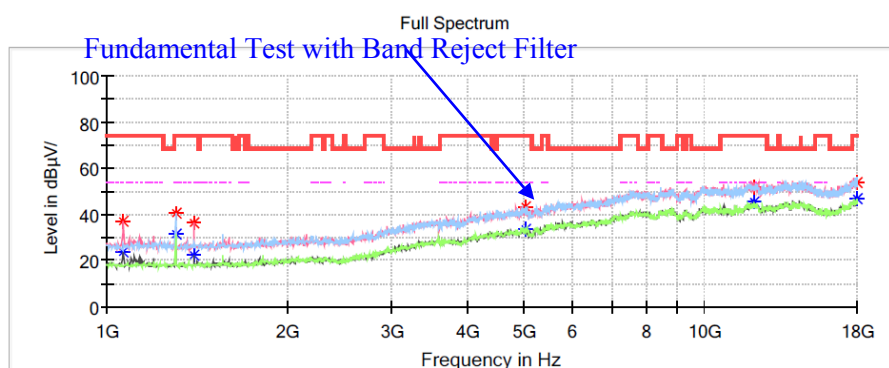
Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ax40 mode High Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6°C  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1302.600000     | 41.01                  | ---                    | 74.00                | 32.99       | H   | -14.9        |
| 1302.600000     | ---                    | 32.46                  | 54.00                | 21.54       | H   | -14.9        |
| 1564.400000     | 32.04                  | ---                    | 74.00                | 41.96       | H   | -13.8        |
| 1564.400000     | ---                    | 22.58                  | 54.00                | 31.42       | H   | -13.8        |
| 4933.800000     | ---                    | 32.63                  | 54.00                | 21.37       | V   | -3.0         |
| 4933.800000     | 43.38                  | ---                    | 74.00                | 30.62       | V   | -3.0         |
| 7541.600000     | ---                    | 40.70                  | 54.00                | 13.30       | V   | 3.3          |
| 7541.600000     | 51.02                  | ---                    | 74.00                | 22.98       | V   | 3.3          |
| 12121.400000    | 51.57                  | ---                    | 74.00                | 22.43       | H   | 9.0          |
| 12121.400000    | ---                    | 45.43                  | 54.00                | 8.57        | H   | 9.0          |
| 17996.600000    | ---                    | 46.55                  | 54.00                | 7.45        | V   | 13.8         |
| 17996.600000    | 55.70                  | ---                    | 74.00                | 18.30       | V   | 13.8         |

**802.11ax80 Mode:****Channel: 5210MHz****Common Information**

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Project No.:          | RKSA260622001                                     |
| EUT Model:            | SRP2504A                                          |
| Test Mode:            | 5G WIFI 802.11ax80                                |
| Standard:             | FCC Part 15.407& FCC Part 15.205& FCC Part 15.209 |
| Test Equipment:       | ESU40,3115,PAM-0118P                              |
| Receiver Setting:     | RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto            |
| Temperature:          | 23.6°C                                            |
| Humidity:             | 41%                                               |
| Atmospheric Pressure: | 100.8kPa                                          |
| Test Engineer:        | Destine Hu                                        |
| Check by:             | Bard Liu                                          |
| Test Date:            | 2026/7/11                                         |

**Critical Freqs**

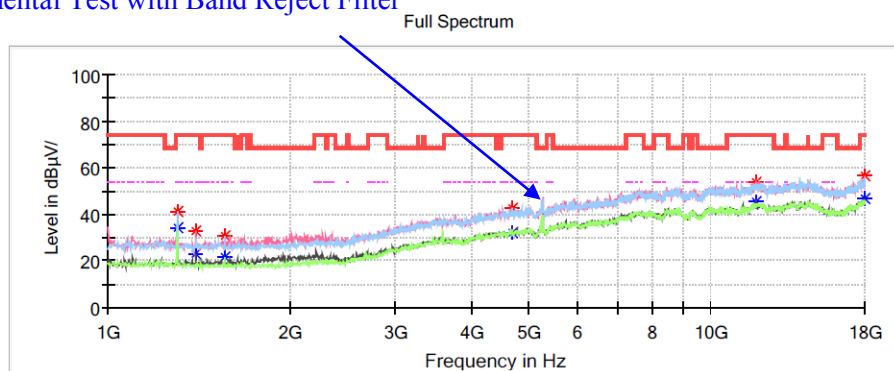
| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1064.600000     | 37.12              | ---                | 74.00            | 36.88       | V   | -15.9        |
| 1064.600000     | ---                | 23.97              | 54.00            | 30.03       | V   | -15.9        |
| 1302.600000     | 40.54              | ---                | 74.00            | 33.46       | H   | -14.9        |
| 1302.600000     | ---                | 31.49              | 54.00            | 22.51       | H   | -14.9        |
| 1397.800000     | 36.04              | ---                | 74.00            | 37.96       | V   | -14.5        |
| 1397.800000     | ---                | 22.31              | 54.00            | 31.69       | V   | -14.5        |
| 5025.600000     | ---                | 33.61              | 54.00            | 20.39       | H   | -2.7         |
| 5025.600000     | 43.17              | ---                | 74.00            | 30.83       | H   | -2.7         |
| 12070.400000    | 51.93              | ---                | 74.00            | 22.07       | V   | 9.0          |
| 12070.400000    | ---                | 45.42              | 54.00            | 8.58        | V   | 9.0          |
| 17969.400000    | ---                | 46.67              | 54.00            | 7.33        | H   | 13.6         |
| 17969.400000    | 54.19              | ---                | 74.00            | 19.81       | H   | 13.6         |

**1GHz-18GHz(5250-5350MHz Band):**

Chain 0:

**802.11a Mode:****Low Channel: 5260MHz****Common Information**

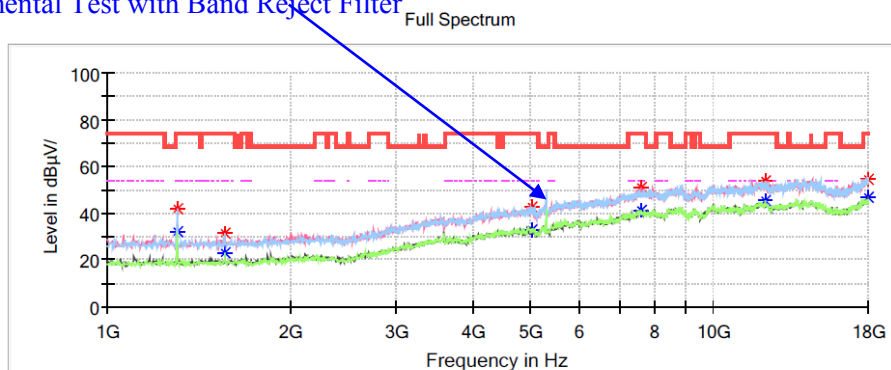
|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Project No.:          | RKSA260622001                                     |
| EUT Model:            | SRP2504A                                          |
| Test Mode:            | 5G WIFI 802.11a mode Low Channel                  |
| Standard:             | FCC Part 15.407& FCC Part 15.205& FCC Part 15.209 |
| Test Equipment:       | ESU40,3115,PAM-0118P                              |
| Receiver Setting:     | RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto            |
| Temperature:          | 23.6°C                                            |
| Humidity:             | 41%                                               |
| Atmospheric Pressure: | 100.8kPa                                          |
| Test Engineer:        | Destine Hu                                        |
| Check by:             | Bard Liu                                          |
| Test Date:            | 2026/7/11                                         |

**Fundamental Test with Band Reject Filter****Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1302.600000     | ---                    | 34.23                  | 54.00                | 19.77       | H   | -14.9        |
| 1302.600000     | 41.51                  | ---                    | 74.00                | 32.49       | H   | -14.9        |
| 1397.800000     | ---                    | 22.93                  | 54.00                | 31.07       | V   | -14.5        |
| 1397.800000     | 33.13                  | ---                    | 74.00                | 40.87       | V   | -14.5        |
| 1564.400000     | ---                    | 21.45                  | 54.00                | 32.55       | H   | -13.8        |
| 1564.400000     | 31.10                  | ---                    | 74.00                | 42.90       | H   | -13.8        |
| 4678.800000     | ---                    | 32.06                  | 54.00                | 21.94       | V   | -3.8         |
| 4678.800000     | 42.97                  | ---                    | 74.00                | 31.03       | V   | -3.8         |
| 11842.600000    | 53.77                  | ---                    | 74.00                | 20.23       | V   | 8.8          |
| 11842.600000    | ---                    | 45.18                  | 54.00                | 8.82        | V   | 8.8          |
| 17993.200000    | 56.40                  | ---                    | 74.00                | 17.60       | V   | 13.8         |
| 17993.200000    | ---                    | 46.57                  | 54.00                | 7.43        | V   | 13.8         |

**Middle Channel: 5300MHz****Common Information**

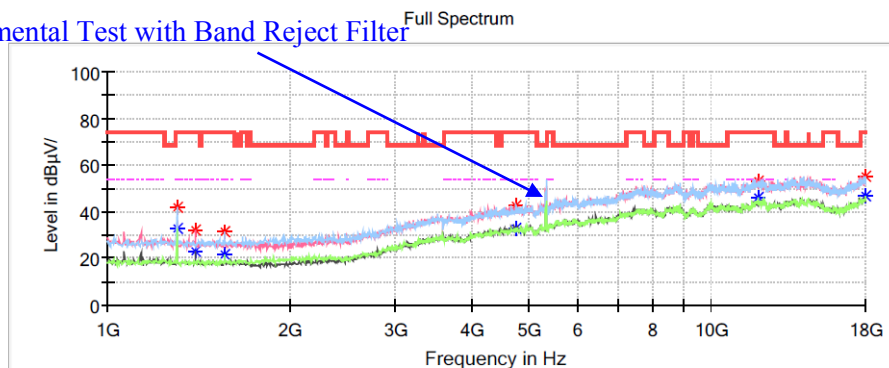
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11a mode Middle Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter****Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | ---                | 32.18              | 54.00            | 21.82       | H   | -14.9        |
| 1302.600000     | 41.82              | ---                | 74.00            | 32.18       | H   | -14.9        |
| 1564.400000     | ---                | 22.86              | 54.00            | 31.14       | H   | -13.8        |
| 1564.400000     | 31.67              | ---                | 74.00            | 42.33       | H   | -13.8        |
| 5018.800000     | 42.80              | ---                | 74.00            | 31.20       | H   | -2.7         |
| 5018.800000     | ---                | 32.52              | 54.00            | 21.48       | H   | -2.7         |
| 7585.800000     | ---                | 40.92              | 54.00            | 13.08       | V   | 3.3          |
| 7585.800000     | 51.00              | ---                | 74.00            | 23.00       | V   | 3.3          |
| 12186.000000    | 53.85              | ---                | 74.00            | 20.15       | H   | 8.9          |
| 12186.000000    | ---                | 45.18              | 54.00            | 8.82        | H   | 8.9          |
| 17996.600000    | 54.51              | ---                | 74.00            | 19.49       | V   | 13.8         |
| 17996.600000    | ---                | 46.64              | 54.00            | 7.36        | V   | 13.8         |

**High Channel: 5320MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11a mode High Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6℃  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

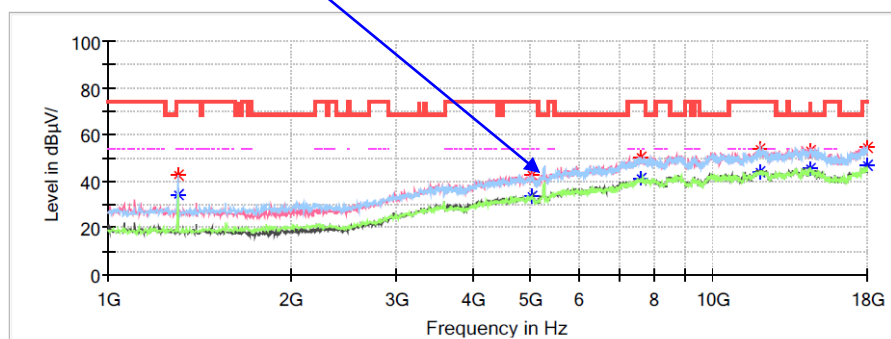
**Fundamental Test with Band Reject Filter****Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | ---                | 33.03              | 54.00            | 20.97       | H   | -14.9        |
| 1302.600000     | 42.25              | ---                | 74.00            | 31.75       | H   | -14.9        |
| 1397.800000     | ---                | 23.25              | 54.00            | 30.75       | V   | -14.5        |
| 1397.800000     | 32.19              | ---                | 74.00            | 41.81       | V   | -14.5        |
| 1564.400000     | ---                | 21.98              | 54.00            | 32.02       | H   | -13.8        |
| 1564.400000     | 31.16              | ---                | 74.00            | 42.84       | H   | -13.8        |
| 4757.000000     | ---                | 32.76              | 54.00            | 21.24       | H   | -3.6         |
| 4757.000000     | 42.92              | ---                | 74.00            | 31.08       | H   | -3.6         |
| 11941.200000    | 53.49              | ---                | 74.00            | 20.51       | V   | 8.9          |
| 11941.200000    | ---                | 45.98              | 54.00            | 8.02        | V   | 8.9          |
| 17996.600000    | 55.06              | ---                | 74.00            | 18.94       | H   | 13.8         |
| 17996.600000    | ---                | 46.63              | 54.00            | 7.37        | H   | 13.8         |

Chain 1:

**802.11a Mode:****Low Channel: 5260MHz****Common Information**

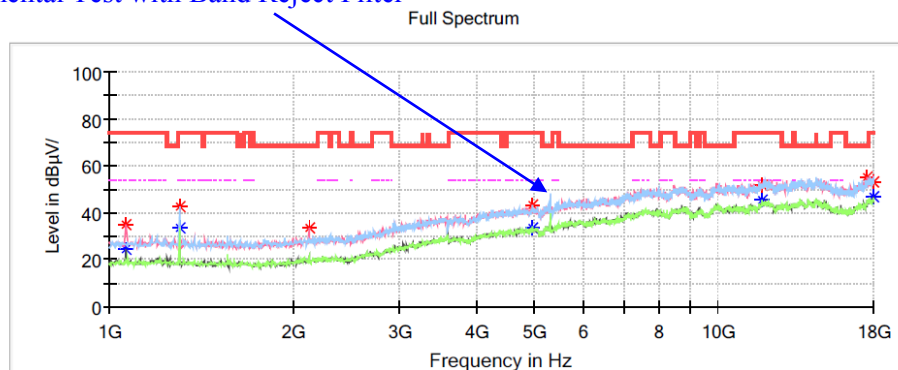
|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Project No.:          | RKSA260622001                                     |
| EUT Model:            | SRP2504A                                          |
| Test Mode:            | 5G WIFI 802.11a mode Low Channel                  |
| Standard:             | FCC Part 15.407& FCC Part 15.205& FCC Part 15.209 |
| Test Equipment:       | ESU40,3115,PAM-0118P                              |
| Receiver Setting:     | RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto            |
| Temperature:          | 23.6°C                                            |
| Humidity:             | 41%                                               |
| Atmospheric Pressure: | 100.8kPa                                          |
| Test Engineer:        | Destine Hu                                        |
| Check by:             | Bard Liu                                          |
| Test Date:            | 2026/7/11                                         |

**Fundamental Test with Band Reject Filter** Full Spectrum**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | 42.52              | ---                | 74.00            | 31.48       | H   | -14.9        |
| 1302.600000     | ---                | 34.17              | 54.00            | 19.83       | H   | -14.9        |
| 5001.800000     | 42.95              | ---                | 74.00            | 31.05       | V   | -2.8         |
| 5001.800000     | ---                | 33.86              | 54.00            | 20.14       | V   | -2.8         |
| 7596.000000     | ---                | 41.14              | 54.00            | 12.86       | V   | 3.3          |
| 7596.000000     | 50.35              | ---                | 74.00            | 23.65       | V   | 3.3          |
| 11988.800000    | ---                | 43.74              | 54.00            | 10.26       | H   | 9.0          |
| 11988.800000    | 54.10              | ---                | 74.00            | 19.90       | H   | 9.0          |
| 14474.200000    | 52.86              | ---                | 74.00            | 21.14       | V   | 11.1         |
| 14474.200000    | ---                | 45.47              | 54.00            | 8.53        | V   | 11.1         |
| 17993.200000    | 54.25              | ---                | 74.00            | 19.75       | H   | 13.8         |
| 17993.200000    | ---                | 46.97              | 54.00            | 7.03        | H   | 13.8         |

**Middle Channel: 5300MHz****Common Information**

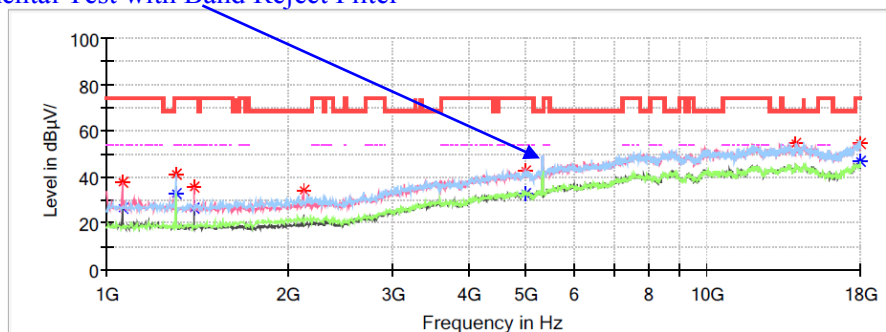
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11a mode Middle Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter****Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μV/m) | Average (dB μV/m) | Limit (dB μV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-------------------|-----------------|-------------|-----|--------------|
| 1064.600000     | 35.04             | ---               | 74.00           | 38.96       | V   | -15.9        |
| 1064.600000     | ---               | 24.81             | 54.00           | 29.19       | V   | -15.9        |
| 1302.600000     | 42.76             | ---               | 74.00           | 31.24       | H   | -14.9        |
| 1302.600000     | ---               | 33.88             | 54.00           | 20.12       | H   | -14.9        |
| 2125.400000     | 33.62             | ---               | 68.20           | 34.58       | V   | -11.3        |
| 4957.600000     | ---               | 33.33             | 54.00           | 20.67       | V   | -2.9         |
| 4957.600000     | 43.36             | ---               | 74.00           | 30.64       | V   | -2.9         |
| 11835.800000    | ---               | 45.18             | 54.00           | 8.82        | V   | 8.7          |
| 11835.800000    | 51.84             | ---               | 74.00           | 22.16       | V   | 8.7          |
| 17598.800000    | 55.12             | ---               | 68.20           | 13.08       | V   | 11.4         |
| 17962.600000    | ---               | 46.66             | 54.00           | 7.34        | H   | 13.6         |
| 17962.600000    | 53.20             | ---               | 74.00           | 20.80       | H   | 13.6         |

**High Channel: 5320MHz****Common Information**

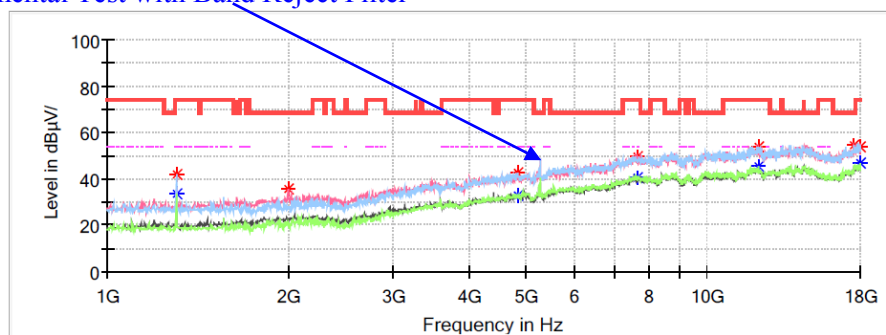
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11a mode High Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter** Full Spectrum**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1061.200000     | ---                | 26.77              | 54.00            | 27.23       | V   | -15.9        |
| 1061.200000     | 37.74              | ---                | 74.00            | 36.26       | V   | -15.9        |
| 1302.600000     | ---                | 32.72              | 54.00            | 21.28       | H   | -14.9        |
| 1302.600000     | 41.53              | ---                | 74.00            | 32.47       | H   | -14.9        |
| 1397.800000     | ---                | 26.55              | 54.00            | 27.45       | V   | -14.5        |
| 1397.800000     | 35.48              | ---                | 74.00            | 38.52       | V   | -14.5        |
| 2128.800000     | 33.97              | ---                | 68.20            | 34.23       | H   | -11.3        |
| 4971.200000     | 42.97              | ---                | 74.00            | 31.03       | H   | -2.9         |
| 4971.200000     | ---                | 32.59              | 54.00            | 21.41       | H   | -2.9         |
| 14066.200000    | 54.70              | ---                | 68.20            | 13.50       | H   | 10.7         |
| 17986.400000    | 54.72              | ---                | 74.00            | 19.28       | H   | 13.7         |
| 17986.400000    | ---                | 46.64              | 54.00            | 7.36        | H   | 13.7         |

**MIMO(Chain 0+Chain 1):  
802.11ac 20 Mode:****Low Channel: 5260MHz****Common Information**

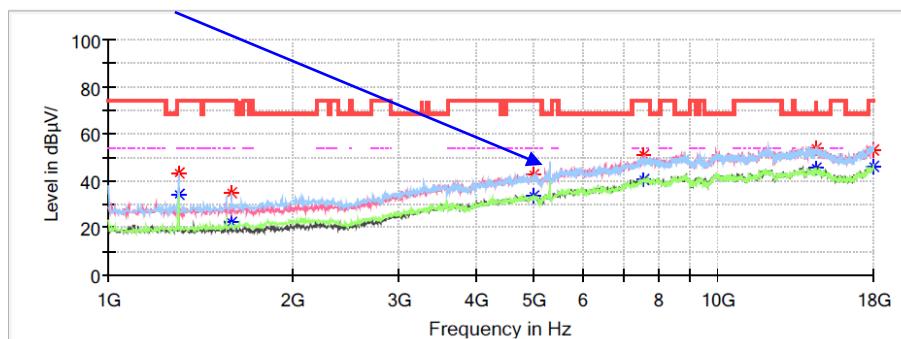
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac20 mode Low Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter** Full Spectrum**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|------------|
| 1302.600000     | ---                | 33.35              | 54.00            | 20.65       | H   | -14.9      |
| 1302.600000     | 41.87              | ---                | 74.00            | 32.13       | H   | -14.9      |
| 1999.600000     | 35.69              | ---                | 68.20            | 32.51       | H   | -11.7      |
| 4831.800000     | ---                | 32.68              | 54.00            | 21.32       | H   | -3.3       |
| 4831.800000     | 42.65              | ---                | 74.00            | 31.35       | H   | -3.3       |
| 7630.000000     | ---                | 40.82              | 54.00            | 13.18       | V   | 3.3        |
| 7630.000000     | 49.89              | ---                | 74.00            | 24.11       | V   | 3.3        |
| 12162.200000    | ---                | 45.50              | 54.00            | 8.50        | H   | 8.9        |
| 12162.200000    | 53.55              | ---                | 74.00            | 20.45       | H   | 8.9        |
| 17605.600000    | 54.65              | ---                | 68.20            | 13.55       | H   | 11.4       |
| 17959.200000    | ---                | 46.97              | 54.00            | 7.03        | H   | 13.6       |
| 17959.200000    | 53.93              | ---                | 74.00            | 20.07       | H   | 13.6       |

**Middle Channel: 5300MHz****Common Information**

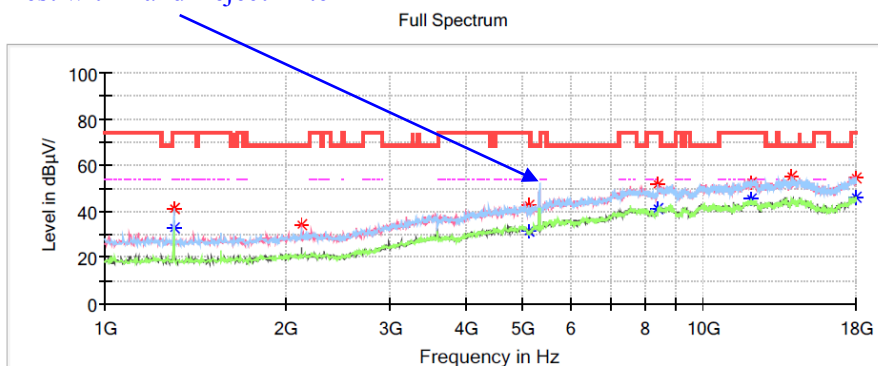
Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ac20 mode Middle Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6℃  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter** Full Spectrum**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | 43.31              | ---                | 74.00            | 30.69       | H   | -14.9        |
| 1302.600000     | ---                | 34.40              | 54.00            | 19.60       | H   | -14.9        |
| 1591.600000     | 34.66              | ---                | 74.00            | 39.34       | H   | -13.6        |
| 1591.600000     | ---                | 22.19              | 54.00            | 31.81       | H   | -13.6        |
| 4981.400000     | ---                | 33.53              | 54.00            | 20.47       | V   | -2.8         |
| 4981.400000     | 42.79              | ---                | 74.00            | 31.21       | V   | -2.8         |
| 7555.200000     | 51.37              | ---                | 74.00            | 22.63       | V   | 3.3          |
| 7555.200000     | ---                | 40.54              | 54.00            | 13.46       | V   | 3.3          |
| 14491.200000    | 53.56              | ---                | 74.00            | 20.44       | V   | 11.1         |
| 14491.200000    | ---                | 45.28              | 54.00            | 8.72        | V   | 11.1         |
| 17979.600000    | 53.43              | ---                | 74.00            | 20.57       | H   | 13.7         |
| 17979.600000    | ---                | 46.37              | 54.00            | 7.63        | H   | 13.7         |

**High Channel: 5320MHz****Common Information**

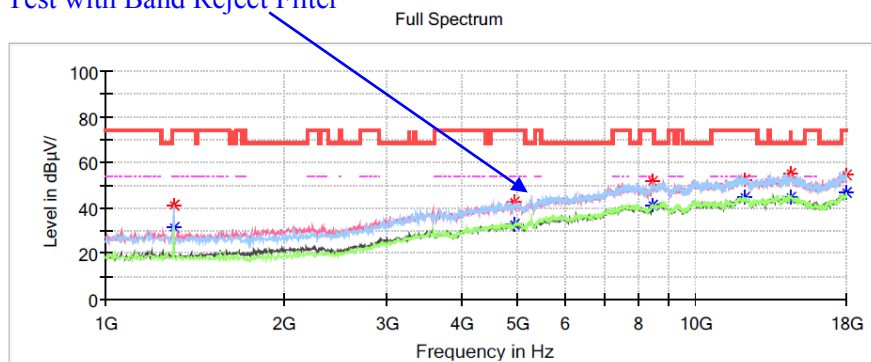
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac20 mode High Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter****Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | 41.24              | ---                | 74.00            | 32.76       | H   | -14.9        |
| 1302.600000     | ---                | 32.84              | 54.00            | 21.16       | H   | -14.9        |
| 2128.800000     | 34.23              | ---                | 68.20            | 33.97       | V   | -11.3        |
| 5097.000000     | ---                | 31.57              | 54.00            | 22.43       | V   | -2.5         |
| 5097.000000     | 42.76              | ---                | 74.00            | 31.24       | V   | -2.5         |
| 8405.200000     | ---                | 41.31              | 54.00            | 12.69       | V   | 4.5          |
| 8405.200000     | 51.49              | ---                | 74.00            | 22.51       | V   | 4.5          |
| 12002.400000    | ---                | 45.27              | 54.00            | 8.73        | H   | 9.0          |
| 12002.400000    | 52.11              | ---                | 74.00            | 21.89       | H   | 9.0          |
| 14042.400000    | 54.90              | ---                | 68.20            | 13.30       | H   | 10.7         |
| 17993.200000    | 54.83              | ---                | 74.00            | 19.17       | V   | 13.8         |
| 17993.200000    | ---                | 46.38              | 54.00            | 7.62        | V   | 13.8         |

**802.11ac40 Mode:****Low Channel: 5270MHz****Common Information**

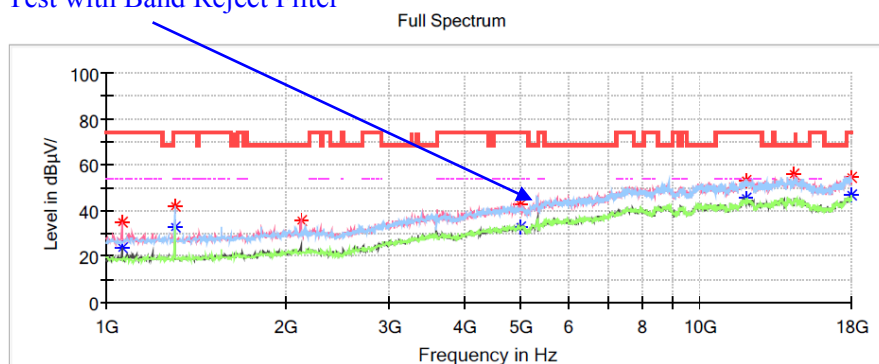
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac40 mode Low Channel  
Standard: FCC Part 15.407 & FCC Part 15.205 & FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter****Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB µV/m) | Average (dB µV/m) | Limit (dB µV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-------------------|-----------------|-------------|-----|--------------|
| 1302.600000     | ---               | 31.35             | 54.00           | 22.65       | H   | -14.9        |
| 1302.600000     | 41.11             | ---               | 74.00           | 32.89       | H   | -14.9        |
| 4937.200000     | 42.49             | ---               | 74.00           | 31.51       | H   | -3.0         |
| 4937.200000     | ---               | 33.08             | 54.00           | 20.92       | H   | -3.0         |
| 8439.200000     | ---               | 40.98             | 54.00           | 13.02       | V   | 4.6          |
| 8439.200000     | 51.42             | ---               | 74.00           | 22.58       | V   | 4.6          |
| 12073.800000    | ---               | 44.94             | 54.00           | 9.06        | V   | 9.0          |
| 12073.800000    | 52.69             | ---               | 74.00           | 21.31       | V   | 9.0          |
| 14491.200000    | ---               | 44.88             | 54.00           | 9.12        | H   | 11.1         |
| 14491.200000    | 55.51             | ---               | 74.00           | 18.49       | H   | 11.1         |
| 17993.200000    | 54.64             | ---               | 74.00           | 19.36       | H   | 13.8         |
| 17993.200000    | ---               | 46.65             | 54.00           | 7.35        | H   | 13.8         |

**High Channel: 5310MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac40 mode High Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6℃  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

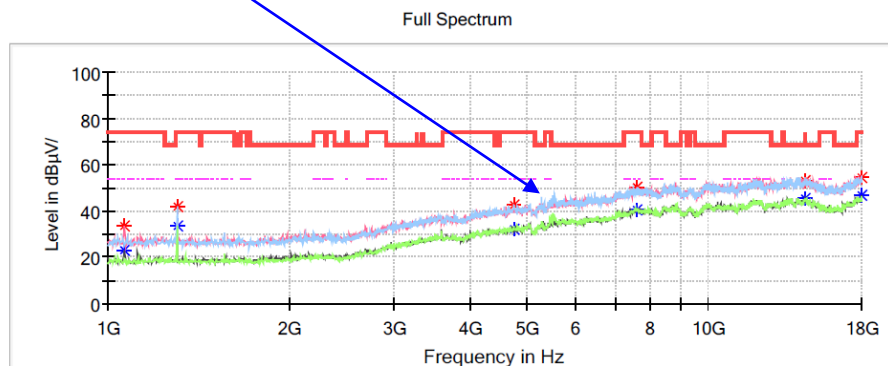
**Fundamental Test with Band Reject Filter****Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1061.200000     | ---                    | 23.79                  | 54.00                | 30.21       | V   | -15.9        |
| 1061.200000     | 34.99                  | ---                    | 74.00                | 39.01       | V   | -15.9        |
| 1302.600000     | ---                    | 33.18                  | 54.00                | 20.82       | H   | -14.9        |
| 1302.600000     | 42.22                  | ---                    | 74.00                | 31.78       | H   | -14.9        |
| 2125.400000     | 35.90                  | ---                    | 68.20                | 32.30       | V   | -11.3        |
| 4978.000000     | 42.53                  | ---                    | 74.00                | 31.47       | V   | -2.9         |
| 4978.000000     | ---                    | 32.80                  | 54.00                | 21.20       | H   | -2.9         |
| 11968.400000    | 53.34                  | ---                    | 74.00                | 20.66       | H   | 9.0          |
| 11968.400000    | ---                    | 45.18                  | 54.00                | 8.82        | H   | 9.0          |
| 14430.000000    | 55.85                  | ---                    | 68.20                | 12.35       | H   | 11.0         |
| 17993.200000    | 54.55                  | ---                    | 74.00                | 19.45       | V   | 13.8         |
| 17993.200000    | ---                    | 47.10                  | 54.00                | 6.90        | V   | 13.8         |

**802.11ac80 Mode:****Channel: 5290MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac80  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6°C  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

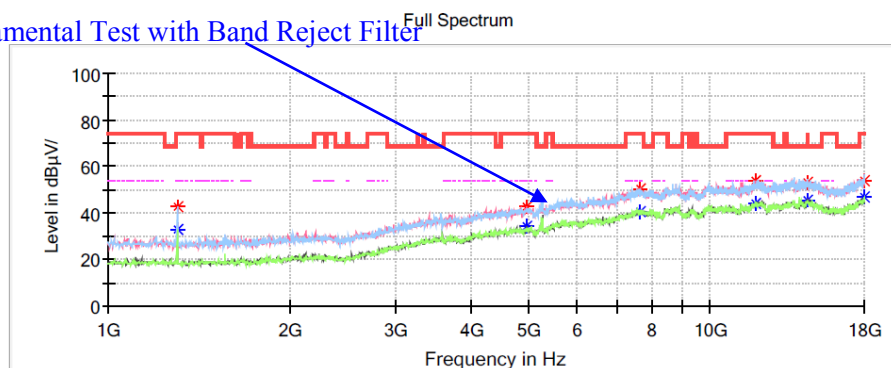
Fundamental Test with Band Reject Filter

**Critical Freqs**

| e            | MaxPeak<br>(dB μ V/m) | Average<br>(dB μ V/m) | Limit<br>(dB μ V/m) | Margin<br>(dB) | Pol | Corr.<br>(dB/m) |
|--------------|-----------------------|-----------------------|---------------------|----------------|-----|-----------------|
| 1064.600000  | ---                   | 22.73                 | 54.00               | 31.27          | V   | -15.9           |
| 1064.600000  | 33.28                 | ---                   | 74.00               | 40.72          | V   | -15.9           |
| 1302.600000  | ---                   | 33.33                 | 54.00               | 20.67          | H   | -14.9           |
| 1302.600000  | 42.17                 | ---                   | 74.00               | 31.83          | H   | -14.9           |
| 4743.400000  | ---                   | 32.30                 | 54.00               | 21.70          | H   | -3.6            |
| 4743.400000  | 42.67                 | ---                   | 74.00               | 31.33          | H   | -3.6            |
| 7616.400000  | 50.03                 | ---                   | 74.00               | 23.97          | V   | 3.3             |
| 7616.400000  | ---                   | 40.30                 | 54.00               | 13.70          | V   | 3.3             |
| 14498.000000 | ---                   | 45.64                 | 54.00               | 8.36           | V   | 11.1            |
| 14498.000000 | 53.49                 | ---                   | 74.00               | 20.51          | V   | 11.1            |
| 17993.200000 | 54.23                 | ---                   | 74.00               | 19.77          | V   | 13.8            |
| 17993.200000 | ---                   | 46.51                 | 54.00               | 7.49           | V   | 13.8            |

**802.11ax 20 Mode:****Low Channel: 5260MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ax20 mode Low Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6℃  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter****Critical Freqs**

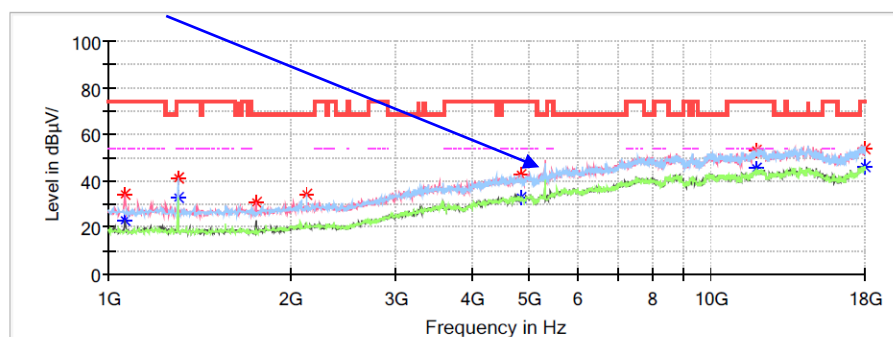
| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | ---                | 32.77              | 54.00            | 21.23       | H   | -14.9        |
| 1302.600000     | 42.52              | ---                | 74.00            | 31.48       | H   | -14.9        |
| 4957.600000     | ---                | 33.95              | 54.00            | 20.05       | V   | -2.9         |
| 4957.600000     | 42.40              | ---                | 74.00            | 31.60       | V   | -2.9         |
| 7647.000000     | ---                | 40.23              | 54.00            | 13.77       | V   | 3.3          |
| 7647.000000     | 50.67              | ---                | 74.00            | 23.33       | V   | 3.3          |
| 11897.000000    | ---                | 44.06              | 54.00            | 9.94        | V   | 8.8          |
| 11897.000000    | 53.99              | ---                | 74.00            | 20.01       | V   | 8.8          |
| 14498.000000    | ---                | 45.62              | 54.00            | 8.38        | H   | 11.1         |
| 14498.000000    | 53.03              | ---                | 74.00            | 20.97       | H   | 11.1         |
| 17966.000000    | ---                | 46.98              | 54.00            | 7.02        | H   | 13.6         |
| 17966.000000    | 54.12              | ---                | 74.00            | 19.88       | H   | 13.6         |

**Middle Channel: 5300MHz****Common Information**

Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ax20 mode Middle Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6℃  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter**

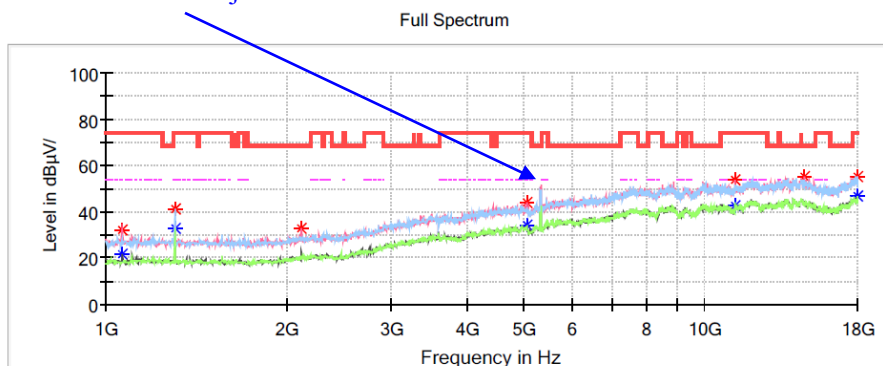
Full Spectrum

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1064.600000     | ---                | 22.96              | 54.00            | 31.04       | V   | -15.9        |
| 1064.600000     | 34.45              | ---                | 74.00            | 39.55       | V   | -15.9        |
| 1302.600000     | ---                | 33.19              | 54.00            | 20.81       | H   | -14.9        |
| 1302.600000     | 41.50              | ---                | 74.00            | 32.50       | H   | -14.9        |
| 1754.800000     | 30.72              | ---                | 68.20            | 37.48       | H   | -12.8        |
| 2132.200000     | 34.00              | ---                | 68.20            | 34.20       | H   | -11.3        |
| 4831.800000     | ---                | 33.01              | 54.00            | 20.99       | H   | -3.3         |
| 4831.800000     | 42.64              | ---                | 74.00            | 31.36       | H   | -3.3         |
| 11852.800000    | ---                | 45.22              | 54.00            | 8.78        | V   | 8.8          |
| 11852.800000    | 52.87              | ---                | 74.00            | 21.13       | V   | 8.8          |
| 17993.200000    | 53.70              | ---                | 74.00            | 20.30       | H   | 13.8         |
| 17993.200000    | ---                | 46.39              | 54.00            | 7.61        | H   | 13.8         |

**High Channel: 5320MHz****Common Information**

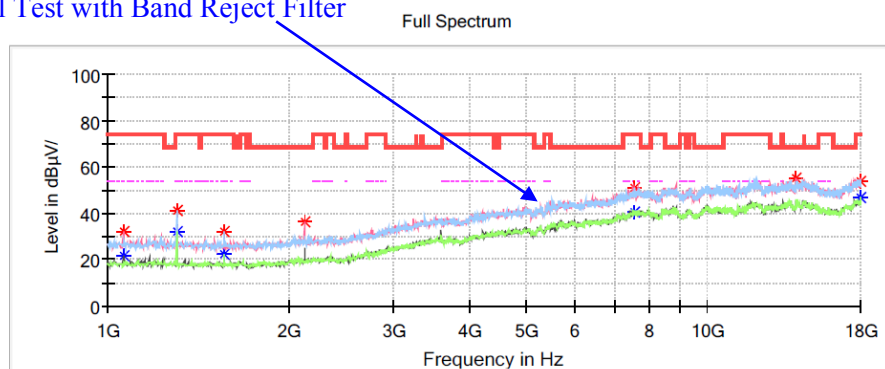
Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ax20 mode High Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6°C  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter****Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1064.600000     | 32.27                  | ---                    | 74.00                | 41.73       | V   | -15.9        |
| 1064.600000     | ---                    | 21.58                  | 54.00                | 32.42       | V   | -15.9        |
| 1302.600000     | ---                    | 32.61                  | 54.00                | 21.39       | H   | -14.9        |
| 1302.600000     | 41.32                  | ---                    | 74.00                | 32.68       | H   | -14.9        |
| 2122.000000     | 32.54                  | ---                    | 68.20                | 35.66       | V   | -11.3        |
| 5046.000000     | 43.84                  | ---                    | 74.00                | 30.16       | V   | -2.7         |
| 5046.000000     | ---                    | 33.95                  | 54.00                | 20.05       | V   | -2.7         |
| 11261.200000    | 53.65                  | ---                    | 74.00                | 20.35       | V   | 7.5          |
| 11261.200000    | ---                    | 42.70                  | 54.00                | 11.30       | V   | 7.5          |
| 14691.800000    | 55.26                  | ---                    | 68.20                | 12.94       | V   | 10.4         |
| 17989.800000    | 55.26                  | ---                    | 74.00                | 18.74       | H   | 13.8         |
| 17989.800000    | ---                    | 46.85                  | 54.00                | 7.15        | H   | 13.8         |

**802.11ax40 Mode:****Low Channel: 5270MHz****Common Information**

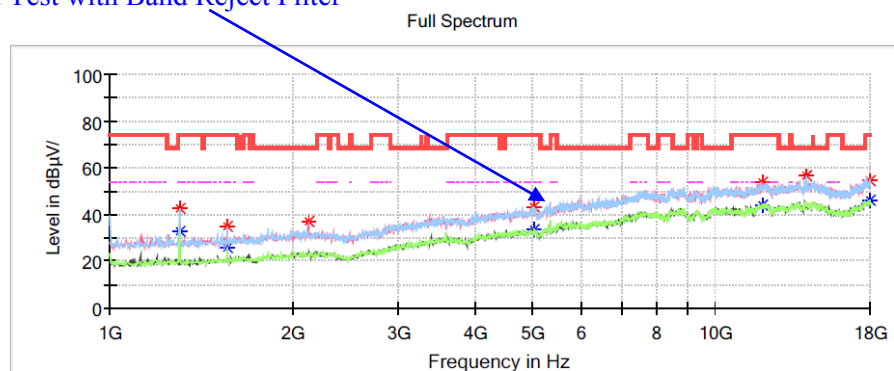
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ax40 mode Low Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6℃  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

**Fundamental Test with Band Reject Filter****Critical Freqs**

| Frequency (MHz) | MaxPeak (dB µ V/m) | Average (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1061.200000     | ---                | 21.52              | 54.00            | 32.48       | V   | -15.9        |
| 1061.200000     | 32.34              | ---                | 74.00            | 41.66       | V   | -15.9        |
| 1302.600000     | ---                | 32.05              | 54.00            | 21.95       | H   | -14.9        |
| 1302.600000     | 41.08              | ---                | 74.00            | 32.92       | H   | -14.9        |
| 1564.400000     | ---                | 22.64              | 54.00            | 31.36       | H   | -13.8        |
| 1564.400000     | 32.48              | ---                | 74.00            | 41.52       | H   | -13.8        |
| 2128.800000     | 36.56              | ---                | 68.20            | 31.64       | H   | -11.3        |
| 7568.800000     | ---                | 40.30              | 54.00            | 13.70       | H   | 3.3          |
| 7568.800000     | 51.08              | ---                | 74.00            | 22.92       | H   | 3.3          |
| 14022.000000    | 55.22              | ---                | 68.20            | 12.98       | H   | 10.7         |
| 17986.400000    | 54.15              | ---                | 74.00            | 19.85       | H   | 13.7         |
| 17986.400000    | ---                | 46.61              | 54.00            | 7.39        | H   | 13.7         |

**High Channel: 5310MHz****Common Information**

Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ax40 mode High Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 23.6°C  
 Humidity: 41%  
 Atmospheric Pressure: 100.8kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/11

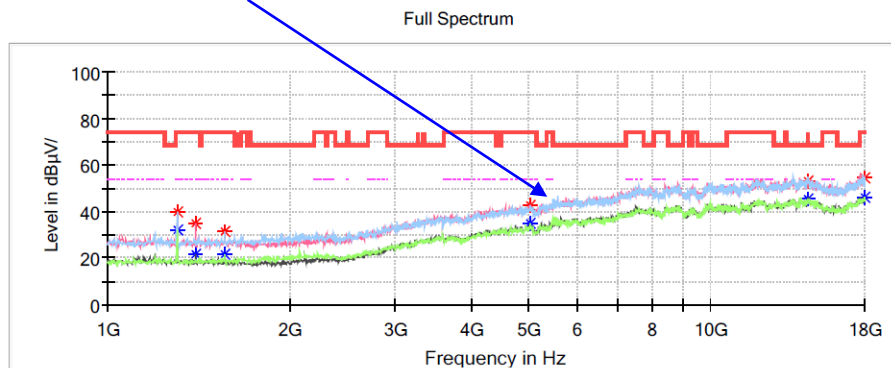
**Fundamental Test with Band Reject Filter****Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μV/m) | Average (dB μV/m) | Limit (dB μV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-------------------|-----------------|-------------|-----|--------------|
| 1302.600000     | ---               | 32.65             | 54.00           | 21.35       | H   | -14.9        |
| 1302.600000     | 42.58             | ---               | 74.00           | 31.42       | H   | -14.9        |
| 1564.400000     | ---               | 25.80             | 54.00           | 28.20       | H   | -13.8        |
| 1564.400000     | 35.21             | ---               | 74.00           | 38.79       | H   | -13.8        |
| 2128.800000     | 37.19             | ---               | 68.20           | 31.01       | H   | -11.3        |
| 5029.000000     | ---               | 33.26             | 54.00           | 20.74       | H   | -2.7         |
| 5029.000000     | 43.29             | ---               | 74.00           | 30.71       | H   | -2.7         |
| 11941.200000    | ---               | 44.13             | 54.00           | 9.87        | V   | 8.9          |
| 11941.200000    | 54.17             | ---               | 74.00           | 19.83       | V   | 8.9          |
| 14100.200000    | 56.73             | ---               | 68.20           | 11.47       | V   | 10.7         |
| 17993.200000    | 54.39             | ---               | 74.00           | 19.61       | V   | 13.8         |
| 17993.200000    | ---               | 46.26             | 54.00           | 7.74        | V   | 13.8         |

**802.11ax80 Mode:****Channel: 5290MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ax80  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 23.6℃  
Humidity: 41%  
Atmospheric Pressure: 100.8kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/11

Fundamental Test with Band Reject Filter

**Critical Freqs**

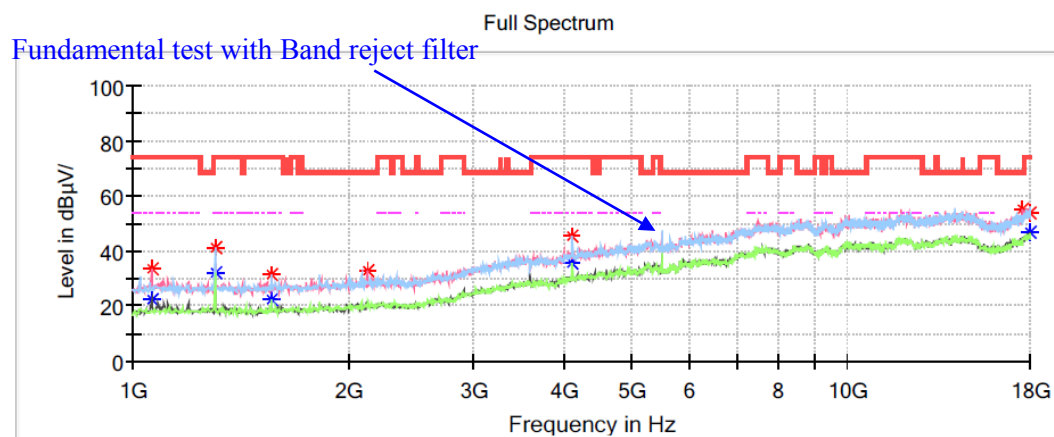
| Frequency (MHz) | MaxPeak (dB μV/m) | Average (dB μV/m) | Limit (dB μV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-------------------|-----------------|-------------|-----|--------------|
| 1302.600000     | 39.97             | ---               | 74.00           | 34.03       | H   | -14.9        |
| 1302.600000     | ---               | 32.25             | 54.00           | 21.75       | H   | -14.9        |
| 1397.800000     | 34.69             | ---               | 74.00           | 39.31       | V   | -14.5        |
| 1397.800000     | ---               | 22.01             | 54.00           | 31.99       | V   | -14.5        |
| 1564.400000     | 31.67             | ---               | 74.00           | 42.33       | H   | -13.8        |
| 1564.400000     | ---               | 21.85             | 54.00           | 32.15       | H   | -13.8        |
| 5012.000000     | 42.85             | ---               | 74.00           | 31.15       | H   | -2.8         |
| 5012.000000     | ---               | 34.63             | 54.00           | 19.37       | H   | -2.8         |
| 14477.600000    | 53.03             | ---               | 74.00           | 20.97       | H   | 11.1         |
| 14477.600000    | ---               | 45.45             | 54.00           | 8.55        | H   | 11.1         |
| 17996.600000    | ---               | 46.38             | 54.00           | 7.62        | H   | 13.8         |
| 17996.600000    | 54.53             | ---               | 74.00           | 19.47       | H   | 13.8         |

**1GHz-18GHz(5470-5725MHz Band):**

Chain 0

**802.11a Mode:****Low Channel: 5500MHz****Common Information**

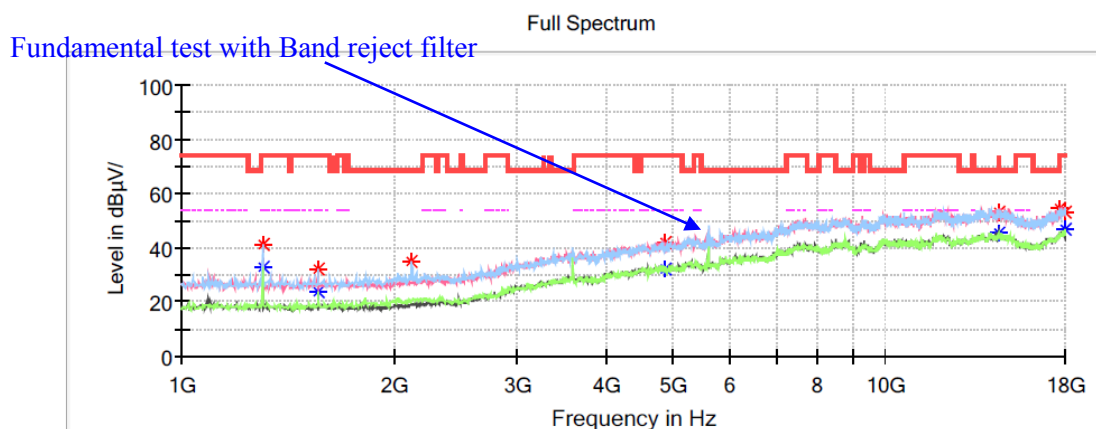
|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Project No.:          | RKSA260622001                                     |
| EUT Model:            | SRP2504A                                          |
| Test Mode:            | 5G WIFI 802.11a mode Low Channel                  |
| Standard:             | FCC Part 15.407& FCC Part 15.205& FCC Part 15.209 |
| Test Equipment:       | ESU40,3115,PAM-0118P                              |
| Receiver Setting:     | RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto            |
| Temperature:          | 25.3°C                                            |
| Humidity:             | 42%                                               |
| Atmospheric Pressure: | 100.1kPa                                          |
| Test Engineer:        | Destine Hu                                        |
| Check by:             | Bard Liu                                          |
| Test Date:            | 2026/7/13                                         |

**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1061.200000     | 33.47                  | ---                    | 74.00                | 40.53       | V   | -15.9        |
| 1061.200000     | ---                    | 22.20                  | 54.00                | 31.80       | V   | -15.9        |
| 1302.600000     | 41.13                  | ---                    | 74.00                | 32.87       | H   | -14.9        |
| 1302.600000     | ---                    | 31.92                  | 54.00                | 22.08       | H   | -14.9        |
| 1564.400000     | ---                    | 22.71                  | 54.00                | 31.29       | H   | -13.8        |
| 1564.400000     | 31.77                  | ---                    | 74.00                | 42.23       | H   | -13.8        |
| 2125.400000     | 32.85                  | ---                    | 68.20                | 35.35       | H   | -11.3        |
| 4124.600000     | ---                    | 36.01                  | 54.00                | 17.99       | H   | -4.8         |
| 4124.600000     | 45.72                  | ---                    | 74.00                | 28.28       | H   | -4.8         |
| 17605.600000    | 55.16                  | ---                    | 68.20                | 13.04       | H   | 11.4         |
| 17993.200000    | ---                    | 46.99                  | 54.00                | 7.01        | H   | 13.8         |
| 17993.200000    | 54.14                  | ---                    | 74.00                | 19.86       | H   | 13.8         |

**Middle Channel: 5600MHz****Common Information**

Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11a mode Middle Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 25.3℃  
 Humidity: 42%  
 Atmospheric Pressure: 100.1kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/13

**Critical\_Freqs**

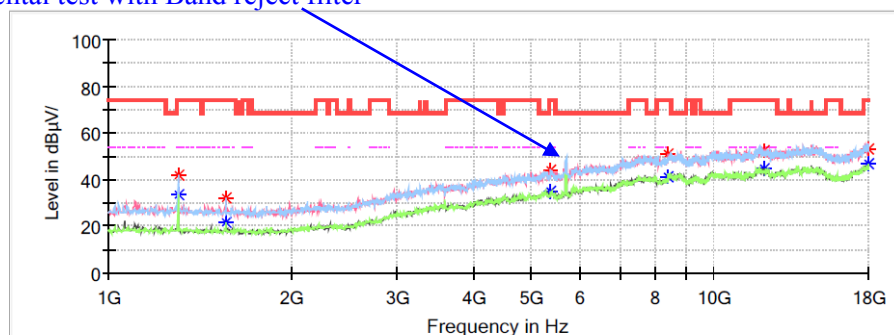
| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1302.600000     | 41.41                  | ---                    | 74.00                | 32.59       | H   | -14.9        |
| 1302.600000     | ---                    | 32.88                  | 54.00                | 21.12       | H   | -14.9        |
| 1564.400000     | 32.49                  | ---                    | 74.00                | 41.51       | H   | -13.8        |
| 1564.400000     | ---                    | 23.46                  | 54.00                | 30.54       | H   | -13.8        |
| 2122.000000     | 34.84                  | ---                    | 68.20                | 33.36       | H   | -11.3        |
| 4862.400000     | ---                    | 31.89                  | 54.00                | 22.11       | H   | -3.2         |
| 4862.400000     | 42.18                  | ---                    | 74.00                | 31.82       | H   | -3.2         |
| 14498.000000    | 53.26                  | ---                    | 74.00                | 20.74       | V   | 11.1         |
| 14498.000000    | ---                    | 45.45                  | 54.00                | 8.55        | V   | 11.1         |
| 17694.000000    | 54.84                  | ---                    | 68.20                | 13.36       | V   | 12.0         |
| 17966.000000    | ---                    | 46.74                  | 54.00                | 7.26        | V   | 13.6         |
| 17966.000000    | 53.44                  | ---                    | 74.00                | 20.56       | V   | 13.6         |

**High Channel: 5700MHz****Common Information**

Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11a mode High Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 25.3℃  
 Humidity: 42%  
 Atmospheric Pressure: 100.1kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/13

**Fundamental test with Band reject filter**

Full Spectrum

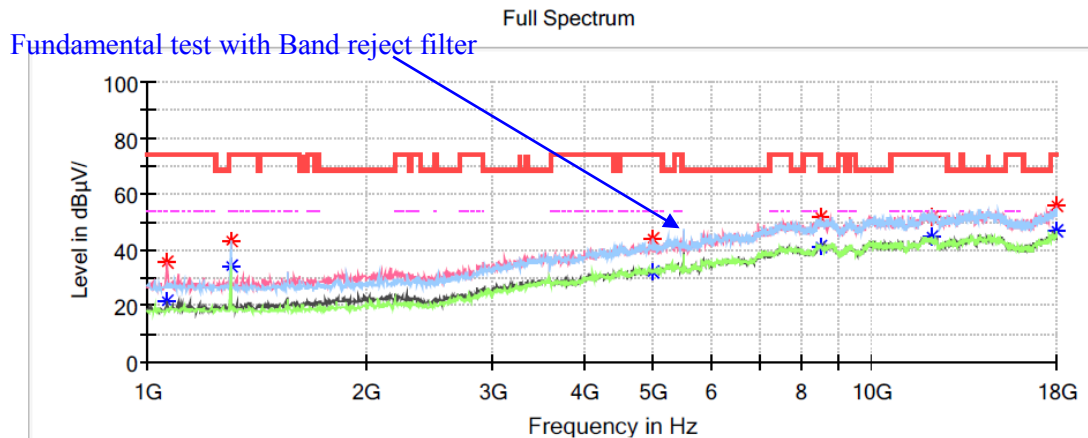
**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μV/m) | Average (dB μV/m) | Limit (dB μV/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|-------------------|-------------------|-----------------|-------------|-----|--------------|
| 1302.600000     | ---               | 33.58             | 54.00           | 20.42       | H   | -14.9        |
| 1302.600000     | 41.83             | ---               | 74.00           | 32.17       | H   | -14.9        |
| 1564.400000     | ---               | 22.00             | 54.00           | 32.00       | H   | -13.8        |
| 1564.400000     | 31.86             | ---               | 74.00           | 42.14       | H   | -13.8        |
| 5379.200000     | ---               | 35.25             | 54.00           | 18.75       | H   | -1.9         |
| 5379.200000     | 44.38             | ---               | 74.00           | 29.62       | H   | -1.9         |
| 8415.400000     | ---               | 41.56             | 54.00           | 12.44       | V   | 4.5          |
| 8415.400000     | 51.23             | ---               | 74.00           | 22.77       | V   | 4.5          |
| 12073.800000    | 52.62             | ---               | 74.00           | 21.38       | V   | 9.0          |
| 12073.800000    | ---               | 44.99             | 54.00           | 9.01        | V   | 9.0          |
| 17979.600000    | 53.48             | ---               | 74.00           | 20.52       | V   | 13.7         |
| 17979.600000    | ---               | 46.96             | 54.00           | 7.04        | V   | 13.7         |

Chain 1

**802.11a Mode:****Low Channel: 5500MHz****Common Information**

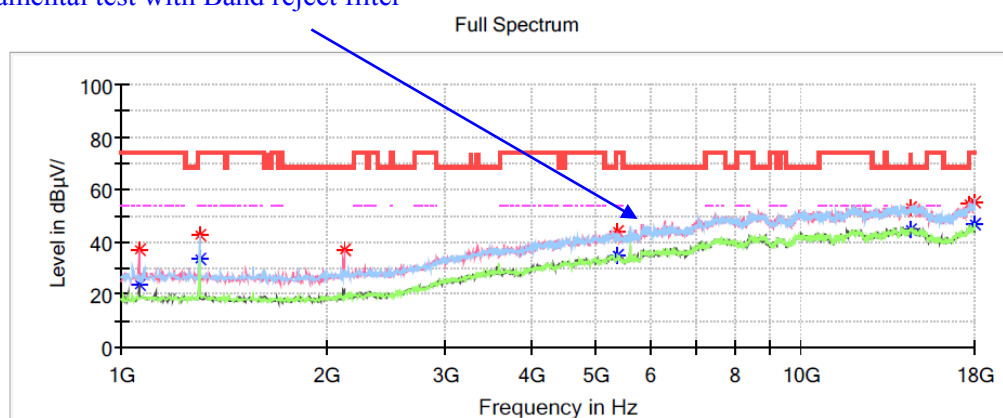
Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11a mode Low Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 25.3°C  
Humidity: 42%  
Atmospheric Pressure: 100.1kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/13

**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1064.600000     | 35.53                  | ---                    | 74.00                | 38.47       | V   | -15.9        |
| 1064.600000     | ---                    | 21.78                  | 54.00                | 32.22       | V   | -15.9        |
| 1302.600000     | 43.03                  | ---                    | 74.00                | 30.97       | H   | -14.9        |
| 1302.600000     | ---                    | 34.28                  | 54.00                | 19.72       | H   | -14.9        |
| 4998.400000     | 44.18                  | ---                    | 74.00                | 29.82       | H   | -2.8         |
| 4998.400000     | ---                    | 32.50                  | 54.00                | 21.50       | H   | -2.8         |
| 8493.600000     | ---                    | 41.49                  | 54.00                | 12.51       | H   | 4.7          |
| 8493.600000     | 51.51                  | ---                    | 74.00                | 22.49       | H   | 4.7          |
| 12070.400000    | 52.06                  | ---                    | 74.00                | 21.94       | V   | 9.0          |
| 12070.400000    | ---                    | 45.09                  | 54.00                | 8.91        | V   | 9.0          |
| 17979.600000    | 55.85                  | ---                    | 74.00                | 18.15       | H   | 13.7         |
| 17979.600000    | ---                    | 46.81                  | 54.00                | 7.19        | H   | 13.7         |

**Middle Channel: 5600MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11a mode Middle Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 25.3°C  
Humidity: 42%  
Atmospheric Pressure: 100.1kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/13

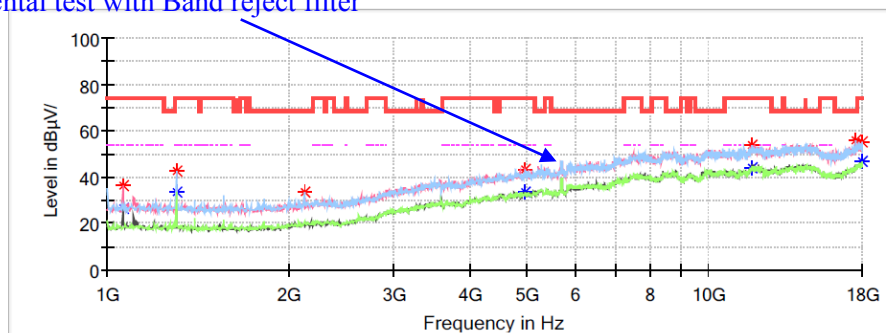
**Fundamental test with Band reject filter****Critical Freqs**

| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1061.200000     | ---                | 23.92              | 54.00            | 30.08       | V   | -15.9        |
| 1061.200000     | 36.90              | ---                | 74.00            | 37.10       | V   | -15.9        |
| 1302.600000     | 42.57              | ---                | 74.00            | 31.43       | V   | -14.9        |
| 1302.600000     | ---                | 33.50              | 54.00            | 20.50       | V   | -14.9        |
| 2128.800000     | 36.86              | ---                | 68.20            | 31.34       | V   | -11.3        |
| 5375.800000     | 44.32              | ---                | 74.00            | 29.68       | V   | -1.9         |
| 5375.800000     | ---                | 35.01              | 54.00            | 18.99       | V   | -1.9         |
| 14484.400000    | 52.83              | ---                | 74.00            | 21.17       | H   | 11.1         |
| 14484.400000    | ---                | 45.10              | 54.00            | 8.90        | H   | 11.1         |
| 17670.200000    | 54.58              | ---                | 68.20            | 13.62       | H   | 11.8         |
| 17976.200000    | ---                | 46.98              | 54.00            | 7.02        | H   | 13.7         |
| 17976.200000    | 55.42              | ---                | 74.00            | 18.58       | H   | 13.7         |

**High Channel: 5700MHz****Common Information**

Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11a mode High Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 25.3℃  
 Humidity: 42%  
 Atmospheric Pressure: 100.1kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/13

Fundamental test with Band reject filter Full Spectrum

**Critical\_Freqs**

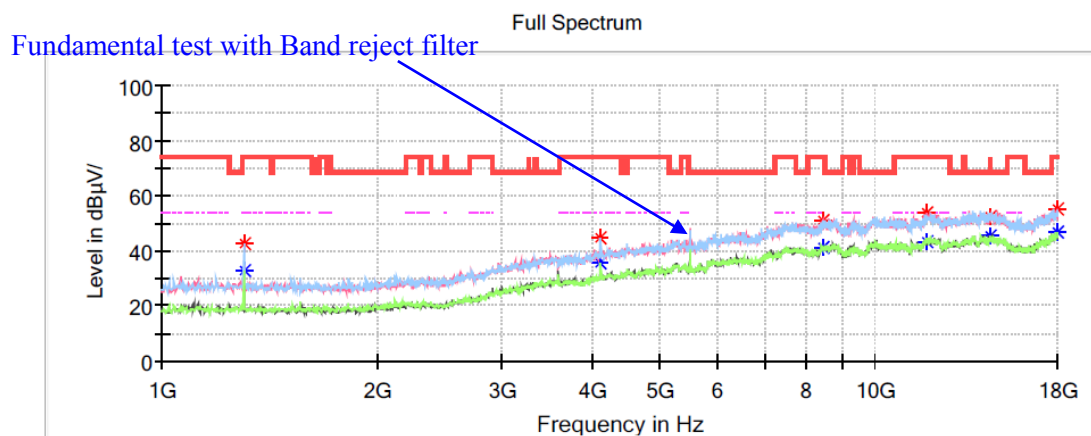
| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1061.200000     | ---                    | 26.23                  | 54.00                | 27.77       | V   | -15.9        |
| 1061.200000     | 36.21                  | ---                    | 74.00                | 37.79       | V   | -15.9        |
| 1302.600000     | ---                    | 33.68                  | 54.00                | 20.32       | H   | -14.9        |
| 1302.600000     | 42.43                  | ---                    | 74.00                | 31.57       | H   | -14.9        |
| 2125.400000     | 33.51                  | ---                    | 68.20                | 34.69       | H   | -11.3        |
| 4944.000000     | ---                    | 33.38                  | 54.00                | 20.62       | H   | -3.0         |
| 4944.000000     | 43.34                  | ---                    | 74.00                | 30.66       | H   | -3.0         |
| 11822.200000    | ---                    | 44.17                  | 54.00                | 9.83        | H   | 8.7          |
| 11822.200000    | 54.17                  | ---                    | 74.00                | 19.83       | H   | 8.7          |
| 17605.600000    | 55.65                  | ---                    | 68.20                | 12.55       | H   | 11.4         |
| 17993.200000    | 55.47                  | ---                    | 74.00                | 18.53       | V   | 13.8         |
| 17993.200000    | ---                    | 46.77                  | 54.00                | 7.23        | V   | 13.8         |

MIMO(Chain 0+Chain 1):  
802.11ac20 Mode:

Low Channel: 5500MHz

## Common Information

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac20 mode Low Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 25.3°C  
Humidity: 42%  
Atmospheric Pressure: 100.1kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/13



## Critical\_Freqs

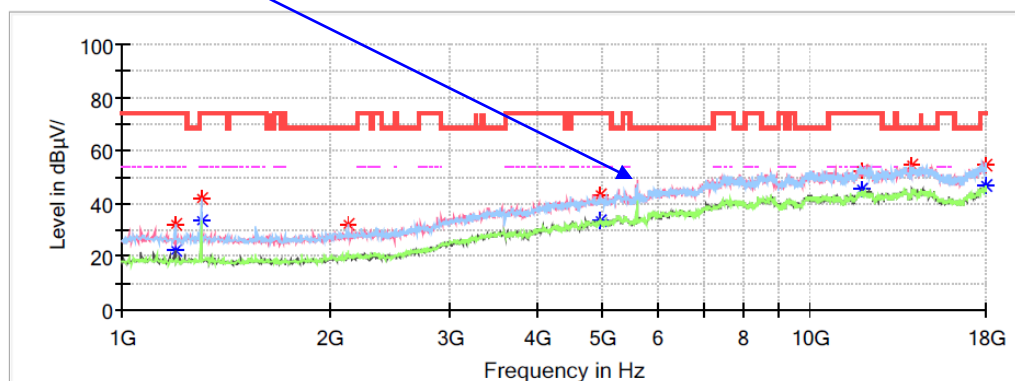
| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1302.600000     | 42.47              | ---                | 74.00            | 31.53       | H   | -14.9        |
| 1302.600000     | ---                | 33.20              | 54.00            | 20.80       | H   | -14.9        |
| 4124.600000     | 44.55              | ---                | 74.00            | 29.45       | H   | -4.8         |
| 4124.600000     | ---                | 35.73              | 54.00            | 18.27       | H   | -4.8         |
| 8422.200000     | 51.31              | ---                | 74.00            | 22.69       | V   | 4.5          |
| 8422.200000     | ---                | 41.17              | 54.00            | 12.83       | V   | 4.5          |
| 11774.600000    | ---                | 43.35              | 54.00            | 10.65       | V   | 8.6          |
| 11774.600000    | 53.89              | ---                | 74.00            | 20.11       | V   | 8.6          |
| 14481.000000    | 52.43              | ---                | 74.00            | 21.57       | H   | 11.1         |
| 14481.000000    | ---                | 45.20              | 54.00            | 8.80        | H   | 11.1         |
| 17966.000000    | ---                | 46.91              | 54.00            | 7.09        | V   | 13.6         |
| 17966.000000    | 55.02              | ---                | 74.00            | 18.98       | V   | 13.6         |

**Middle Channel: 5600MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac20 mode Middle Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 25.3℃  
Humidity: 42%  
Atmospheric Pressure: 100.1kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/13

Fundamental test with Band reject filter

Full Spectrum

**Critical Freqs**

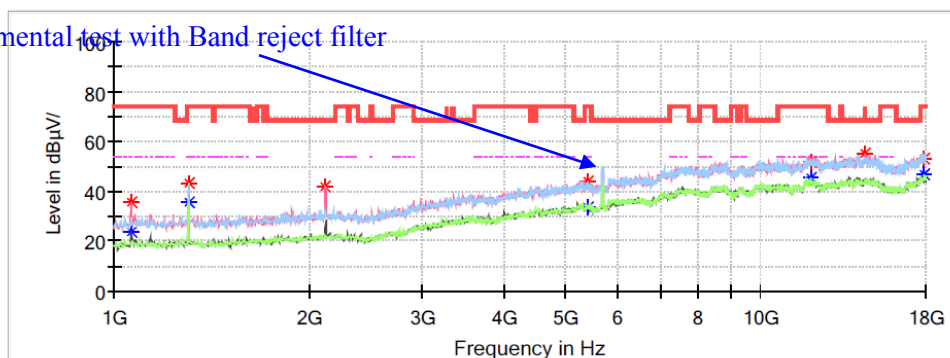
| Frequency (MHz) | MaxPeak (dB μ V/m) | Average (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|--------------------|--------------------|------------------|-------------|-----|--------------|
| 1193.800000     | ---                | 22.45              | 54.00            | 31.55       | V   | -15.3        |
| 1193.800000     | 32.37              | ---                | 74.00            | 41.63       | V   | -15.3        |
| 1302.600000     | ---                | 33.48              | 54.00            | 20.52       | H   | -14.9        |
| 1302.600000     | 41.82              | ---                | 74.00            | 32.18       | H   | -14.9        |
| 2128.800000     | 32.25              | ---                | 68.20            | 35.95       | V   | -11.3        |
| 4947.400000     | ---                | 33.88              | 54.00            | 20.12       | V   | -3.0         |
| 4947.400000     | 43.12              | ---                | 74.00            | 30.88       | V   | -3.0         |
| 11869.800000    | ---                | 45.44              | 54.00            | 8.56        | V   | 8.8          |
| 11869.800000    | 52.67              | ---                | 74.00            | 21.33       | V   | 8.8          |
| 14045.800000    | 54.76              | ---                | 68.20            | 13.44       | V   | 10.7         |
| 17996.600000    | 54.31              | ---                | 74.00            | 19.69       | V   | 13.8         |
| 17996.600000    | ---                | 46.79              | 54.00            | 7.21        | V   | 13.8         |

**High Channel: 5700MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac20 mode High Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 25.3°C  
Humidity: 42%  
Atmospheric Pressure: 100.1kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/13

Full Spectrum

Fundamental test with Band reject filter

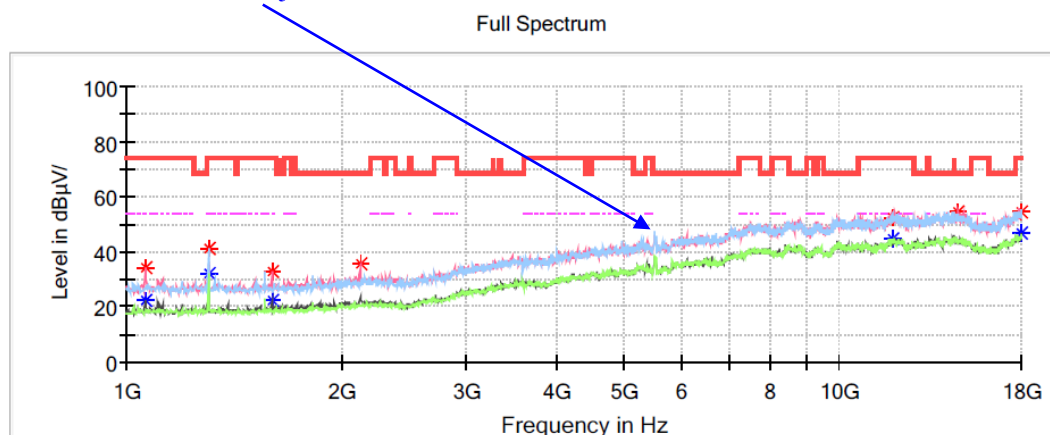
**Critical Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1061.200000     | 35.89                  | ---                    | 74.00                | 38.11       | V   | -15.9        |
| 1061.200000     | ---                    | 23.99                  | 54.00                | 30.01       | V   | -15.9        |
| 1302.600000     | 43.37                  | ---                    | 74.00                | 30.63       | H   | -14.9        |
| 1302.600000     | ---                    | 35.71                  | 54.00                | 18.29       | H   | -14.9        |
| 2122.000000     | 41.77                  | ---                    | 68.20                | 26.43       | H   | -11.3        |
| 5416.600000     | 44.21                  | ---                    | 74.00                | 29.79       | H   | -1.8         |
| 5416.600000     | ---                    | 33.52                  | 54.00                | 20.48       | H   | -1.8         |
| 11931.000000    | 51.44                  | ---                    | 74.00                | 22.56       | V   | 8.9          |
| 11931.000000    | ---                    | 45.16                  | 54.00                | 8.84        | V   | 8.9          |
| 14453.800000    | 55.28                  | ---                    | 68.20                | 12.92       | V   | 11.1         |
| 17881.000000    | ---                    | 46.75                  | 54.00                | 7.25        | V   | 13.1         |
| 17881.000000    | 53.40                  | ---                    | 74.00                | 20.60       | V   | 13.1         |

**802.11ac40 Mode:****Low Channel: 5510MHz****Common Information**

Project No.: RKSA260622001  
 EUT Model: SRP2504A  
 Test Mode: 5G WIFI 802.11ac40 mode Low Channel  
 Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
 Test Equipment: ESU40,3115,PAM-0118P  
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
 Temperature: 25.3°C  
 Humidity: 42%  
 Atmospheric Pressure: 100.1kPa  
 Test Engineer: Destine Hu  
 Check by: Bard Liu  
 Test Date: 2026/7/13

Fundamental test with Band reject filter

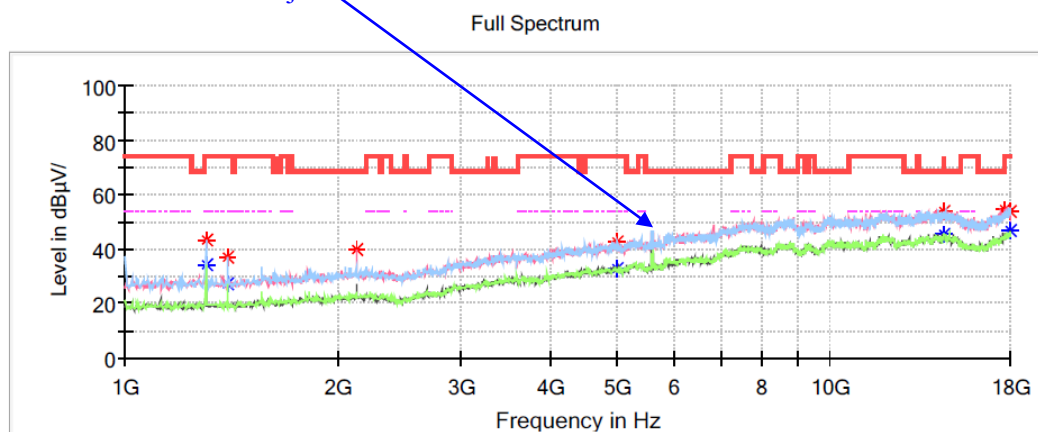
**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1061.200000     | 34.35                  | ---                    | 74.00                | 39.65       | V   | -15.9        |
| 1061.200000     | ---                    | 22.57                  | 54.00                | 31.43       | V   | -15.9        |
| 1302.600000     | 41.26                  | ---                    | 74.00                | 32.74       | H   | -14.9        |
| 1302.600000     | ---                    | 32.47                  | 54.00                | 21.53       | H   | -14.9        |
| 1598.400000     | 33.02                  | ---                    | 74.00                | 40.98       | V   | -13.6        |
| 1598.400000     | ---                    | 22.06                  | 54.00                | 31.94       | V   | -13.6        |
| 2132.200000     | 35.52                  | ---                    | 68.20                | 32.68       | V   | -11.3        |
| 11859.600000    | 52.43                  | ---                    | 74.00                | 21.57       | V   | 8.8          |
| 11859.600000    | ---                    | 45.00                  | 54.00                | 9.00        | V   | 8.8          |
| 14712.200000    | 54.70                  | ---                    | 68.20                | 13.50       | V   | 10.4         |
| 17996.600000    | 54.56                  | ---                    | 74.00                | 19.44       | V   | 13.8         |
| 17996.600000    | ---                    | 47.17                  | 54.00                | 6.83        | V   | 13.8         |

**Middle Channel: 5590MHz****Common Information**

Project No.: RKSA260622001  
EUT Model: SRP2504A  
Test Mode: 5G WIFI 802.11ac40 mode Middle Channel  
Standard: FCC Part 15.407& FCC Part 15.205& FCC Part 15.209  
Test Equipment: ESU40,3115,PAM-0118P  
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto  
Temperature: 25.3°C  
Humidity: 42%  
Atmospheric Pressure: 100.1kPa  
Test Engineer: Destine Hu  
Check by: Bard Liu  
Test Date: 2026/7/13

Fundamental test with Band reject filter

**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dB $\mu$ V/m) | Average (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Pol | Corr. (dB/m) |
|-----------------|------------------------|------------------------|----------------------|-------------|-----|--------------|
| 1302.600000     | ---                    | 34.09                  | 54.00                | 19.91       | H   | -14.9        |
| 1302.600000     | 43.40                  | ---                    | 74.00                | 30.60       | H   | -14.9        |
| 1397.800000     | ---                    | 27.42                  | 54.00                | 26.58       | H   | -14.5        |
| 1397.800000     | 37.33                  | ---                    | 74.00                | 36.67       | H   | -14.5        |
| 2128.800000     | 39.56                  | ---                    | 68.20                | 28.64       | H   | -11.3        |
| 4998.400000     | 42.62                  | ---                    | 74.00                | 31.38       | H   | -2.8         |
| 4998.400000     | ---                    | 33.15                  | 54.00                | 20.85       | H   | -2.8         |
| 14484.400000    | 53.50                  | ---                    | 74.00                | 20.50       | V   | 11.1         |
| 14484.400000    | ---                    | 45.70                  | 54.00                | 8.30        | V   | 11.1         |
| 17629.400000    | 54.31                  | ---                    | 68.20                | 13.89       | V   | 11.6         |
| 17993.200000    | 53.94                  | ---                    | 74.00                | 20.06       | V   | 13.8         |
| 17993.200000    | ---                    | 46.58                  | 54.00                | 7.42        | V   | 13.8         |