TEST REPORT

Product Name	:	The Smart Snoring Solution
Brand Mark	:	IntelliSnore
Model No.	:	IS100
FCC ID	:	2A9H5-IS100
Report Number	:	BLA-EMC-202210-A5802
Date of Sample Receipt	:	2022/10/24
Date of Test	:	2022/10/24 to 2022/11/8
Date of Issue	:	2022/11/8
Test Standard	:	47 CFR Part 15, Subpart C 15.247
Test Result	:	Pass

Prepared for:

Maverick Innovation LLC

740 4th St N,Suite 101,Saint Petersburg, FL 33701,USA

Prepared by:

BlueAsia Technical Services (Shenzhen) Co.,Ltd.

No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-23059481

Compiled by: charlie

Review by: Sweely

Approved by: Blue Zhong

Date: 2022/11/8

BlueAsia of Technical Services(Shenzhen) Co., Ltd. BLA

REPORT REVISE RECORD

Version No.	Date	Description
00	2022/11/8	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY 5

2 GENERAL INFORMATION 6

3 GENERAL DESCRIPTION OF E.U.T. 6

4 TEST ENVIRONMENT 7

5 TEST MODE 7

6 MEASUREMENT UNCERTAINTY 7

7 DESCRIPTION OF SUPPORT UNIT 8

8 LABORATORY LOCATION 8

9 TEST INSTRUMENTS LIST 9

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) 12

10.1 LIMITS 12
10.2 BLOCK DIAGRAM OF TEST SETUP 12
10.3 PROCEDURE 12
10.4 TEST DATA 14

11 CONDUCTED BAND EDGES MEASUREMENT 16

11.1 LIMITS 16
11.2 BLOCK DIAGRAM OF TEST SETUP 16
11.3 TEST DATA 17

12 ANTENNA REQUIREMENT 18

12.1 CONCLUSION 18

13 RADIATED SPURIOUS EMISSIONS 19

13.1 LIMITS 19
13.2 BLOCK DIAGRAM OF TEST SETUP 20
13.3 PROCEDURE 20
13.4 TEST DATA 22

14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS 30

14.1 LIMITS 30
14.2 BLOCK DIAGRAM OF TEST SETUP 31
14.3 PROCEDURE 31
14.4 TEST DATA 33

BlueAsia

15 CONDUCTED SPURIOUS EMISSIONS 37

15.1 LIMITS 37

15.2 BLOCK DIAGRAM OF TEST SETUP 37

15.3 TEST DATA 38

16 POWER SPECTRUM DENSITY 39

16.1 LIMITS 39

16.2 BLOCK DIAGRAM OF TEST SETUP 39

16.3 TEST DATA 39

17 CONDUCTED PEAK OUTPUT POWER 40

17.1 LIMITS 40

17.2 BLOCK DIAGRAM OF TEST SETUP 40

17.3 TEST DATA 41

18 MINIMUM 6DB BANDWIDTH 42

18.1 LIMITS 42

18.2 BLOCK DIAGRAM OF TEST SETUP 42

18.3 TEST DATA 42

19 APPENDIX 43

APPENDIX A: PHOTOGRAPHS OF TEST SETUP 58

APPENDIX B: PHOTOGRAPHS OF EUT 60

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

BlueAsia

2 GENERAL INFORMATION

Applicant	Maverick Innovation LLC
Address	740 4th St N,Suite 101,Saint Petersburg, FL 33701,USA
Manufacturer	VVFLY Electronics Co,Ltd
Address	Room 2103-2104,changhong Building,keji 12 th road South ,High-tech Industrial Park ,Nanshan District,Shenzhen city,Guangdong province,PR,China
Factory	DONGGUAN TOHEI E.M.C.CO.,LTD
Address	Qingfeng Road,Jinlong Industrial District,Qingxi,Dongguan Guangdong
Product Name	The Smart Snoring Solution
Test Model No.	IS100

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.0
Software Version	V1.0
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	Ceramic Antenna
Antenna Gain:	5.9dBi(Provided by the customer)

BlueAsia

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25℃	DC3.8V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
Remark:Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

BlueAsia

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

BlueAsia

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2023/08/16
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2023/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30

Test Equipment Of Radiated Spurious Emissions					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13

Test Equipment Of Conducted Spurious Emissions					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30

Test Equipment Of Power Spectrum Density					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30

Test Equipment Of Conducted Peak Output Power					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30

BlueAsia

Test Equipment Of Minimum 6dB Bandwidth					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30

Test Equipment Of Antenna Requirement					
Equipment	**Manufacturer**	**Model**	**S/N**	**Cal.Date**	**Cal.Due**

BlueAsia

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

10.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		

10.2 BLOCK DIAGRAM OF TEST SETUP

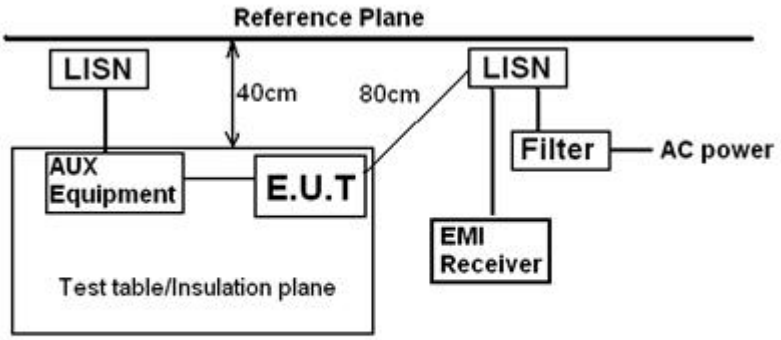

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m

10.3 PROCEDURE

1) The mains terminal disturbance voltage test was conducted in a shielded room.
2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

10.4 TEST DATA

[TestMode: TX]; [Line: Line];[Power:AC120V/60Hz]

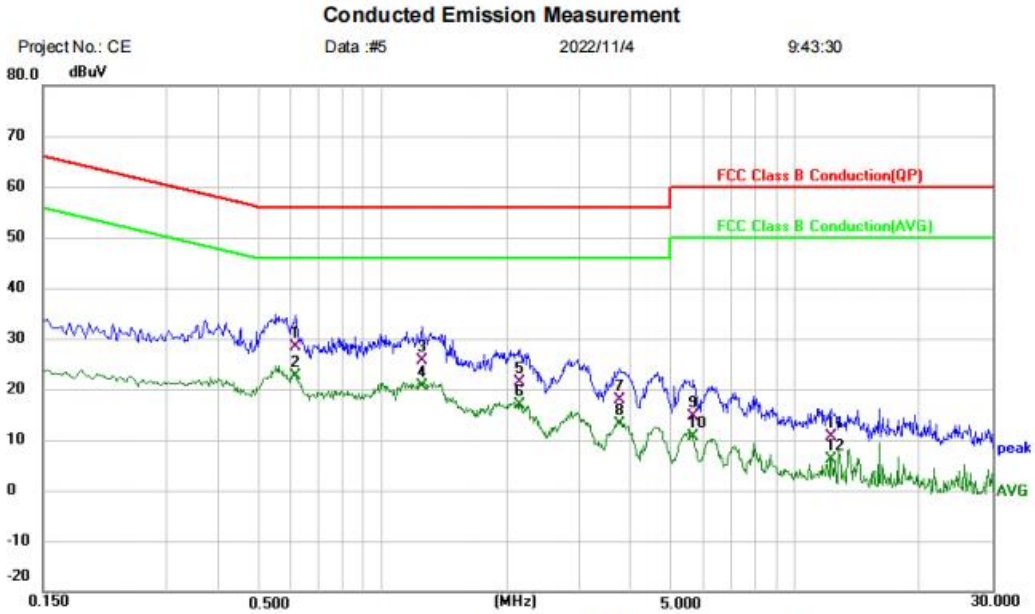

Site
Phase: *L1*
Temperature: (C)
Limit: FCC Class B Conduction(QP)
Power:
Humidity: %RH
EUT: The Smart Snoring Soiution
M/N: IS100
Mode: BLE TX mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.6140	18.33	10.08	28.41	56.00	-27.59	QP	
2	*	0.6140	12.65	10.08	22.73	46.00	-23.27	AVG	
3		1.2460	15.48	10.16	25.64	56.00	-30.36	QP	
4		1.2460	10.57	10.16	20.73	46.00	-25.27	AVG	
5		2.1500	10.99	10.29	21.28	56.00	-34.72	QP	
6		2.1500	6.49	10.29	16.78	46.00	-29.22	AVG	
7		3.7540	7.71	10.12	17.83	56.00	-38.17	QP	
8		3.7540	3.04	10.12	13.16	46.00	-32.84	AVG	
9		5.6620	4.63	10.03	14.66	60.00	-45.34	QP	
10		5.6620	0.54	10.03	10.57	50.00	-39.43	AVG	
11		12.1980	0.59	10.06	10.65	60.00	-49.35	QP	
12		12.1980	-3.94	10.06	6.12	50.00	-43.88	AVG	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX]; [Line: Nutral]; [Power:AC120V/60Hz]

Conducted Emission Measurement

Project No.: CE Data :#6 2022/10/27 15:50:39

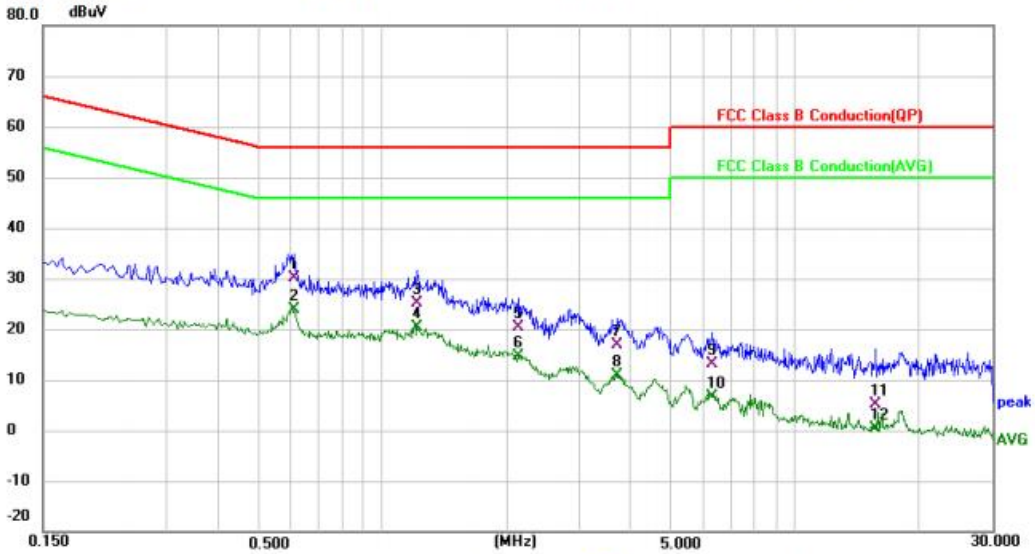

Site Phase: N Temperature: (C)
Limit: FCC Class B Conduction(QP) Power: Humidity: %RH
EUT: The Smart Snoring Soiution
M/N: IS100
Mode: BLE TX mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.6100	20.01	10.04	30.05	56.00	-25.95	QP	
2	*	0.6100	13.77	10.04	23.81	46.00	-22.19	AVG	
3		1.2100	14.98	10.03	25.01	56.00	-30.99	QP	
4		1.2100	10.38	10.03	20.41	46.00	-25.59	AVG	
5		2.1220	10.32	10.10	20.42	56.00	-35.58	QP	
6		2.1220	4.58	10.10	14.68	46.00	-31.32	AVG	
7		3.7140	6.97	9.94	16.91	56.00	-39.09	QP	
8		3.7140	0.87	9.94	10.81	46.00	-35.19	AVG	
9		6.2860	3.30	9.85	13.15	60.00	-46.85	QP	
10		6.2860	-3.31	9.85	6.54	50.00	-43.46	AVG	
11		15.6780	-4.97	10.04	5.07	60.00	-54.93	QP	
12		15.6780	-9.71	10.04	0.33	50.00	-49.67	AVG	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

11 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

11.2 BLOCK DIAGRAM OF TEST SETUP

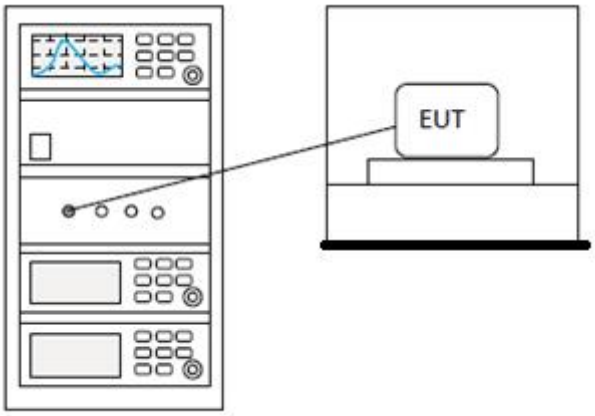

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

12 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

12.1 CONCLUSION

Standard Requirement:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 5.9dBi.

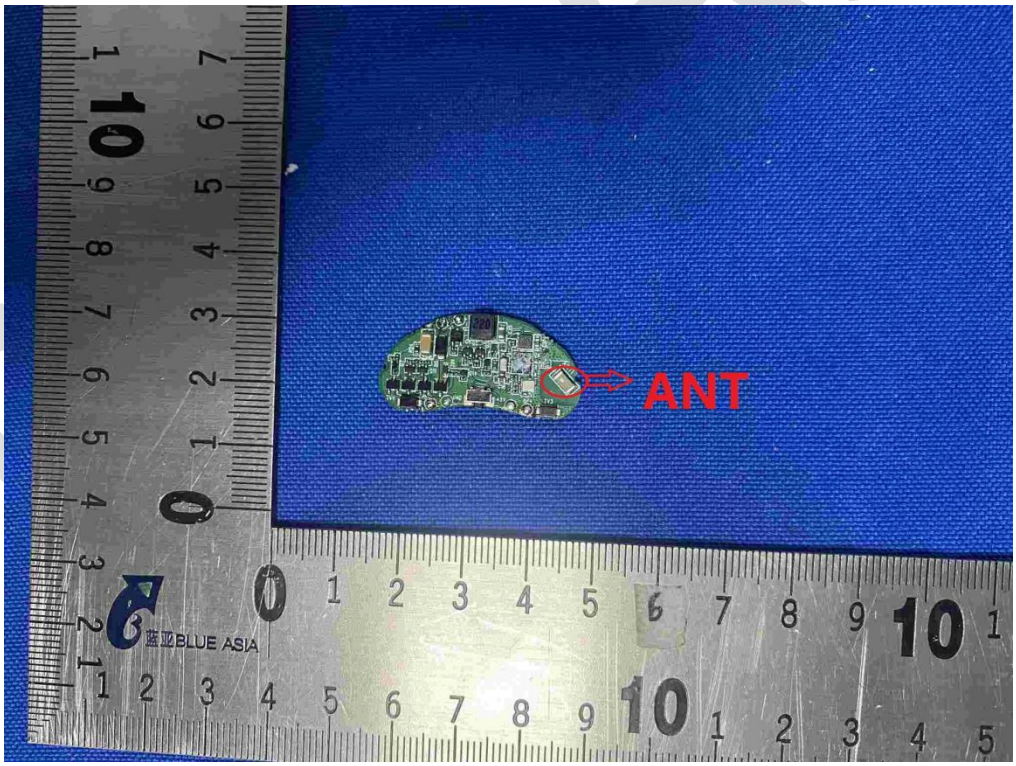

13 RADIATED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

13.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BlueAsia

13.2 BLOCK DIAGRAM OF TEST SETUP

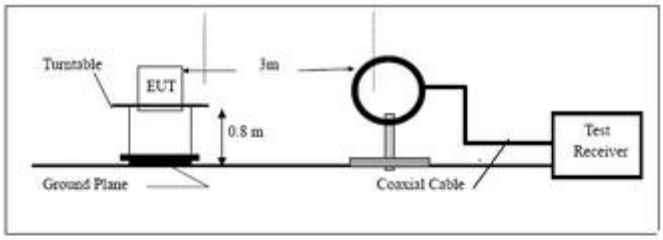

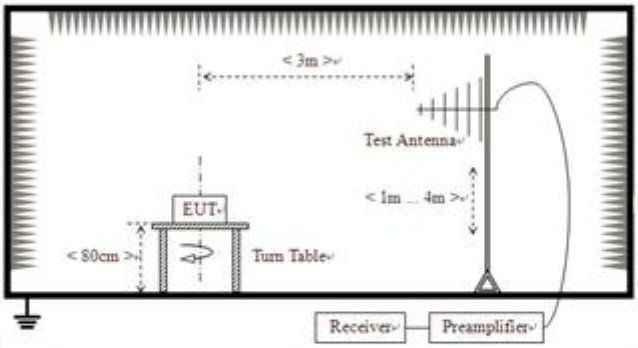

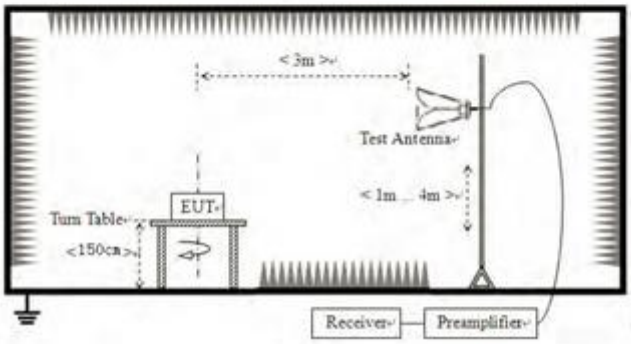

13.3 PROCEDURE

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
j. Repeat above procedures until all frequencies measured was complete.

Remark:
1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.fundamental frequency is blocked by filter, and only spurious emission is shown.
4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

13.4 TEST DATA

Below 1GHz

[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

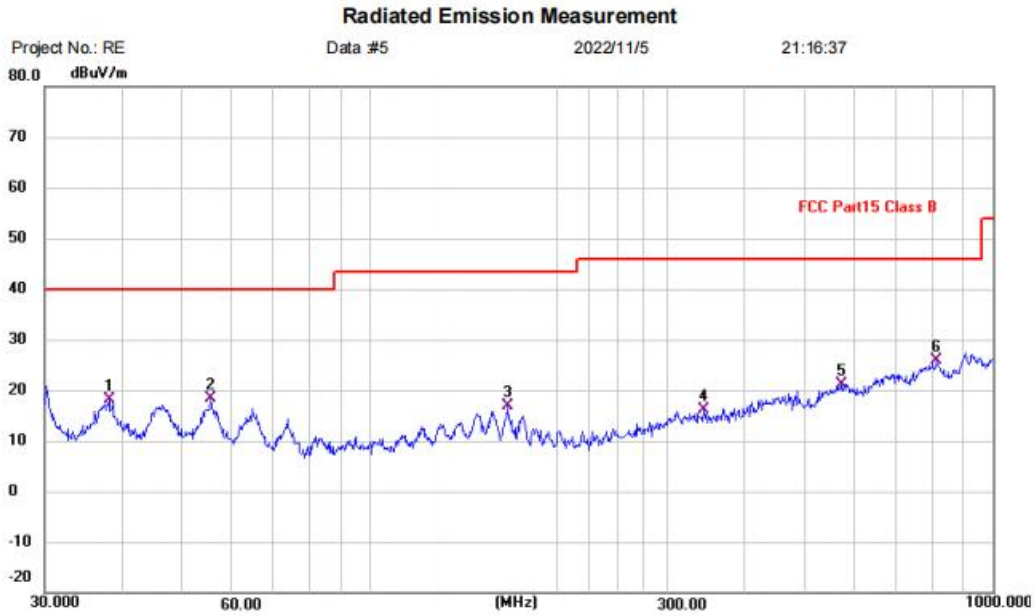

Site
Limit: FCC Part15 Class B
EUT: The Smart Snoring Soiution
M/N: IS100
Mode: BLE TX mode
Note:

Polarization: ***Horizontal***
Power:

Temperature: (C)
Humidity: %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	38.0782	24.31	-6.19	18.12	40.00	-21.88	QP	P	
2	55.4147	24.94	-6.65	18.29	40.00	-21.71	QP	P	
3	166.0680	22.81	-5.89	16.92	43.50	-26.58	QP	P	
4	343.1800	21.22	-5.04	16.18	46.00	-29.82	QP	P	
5	570.6100	20.46	0.75	21.21	46.00	-24.79	QP	P	
6 *	813.1115	20.62	5.19	25.81	46.00	-20.19	QP	P	

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

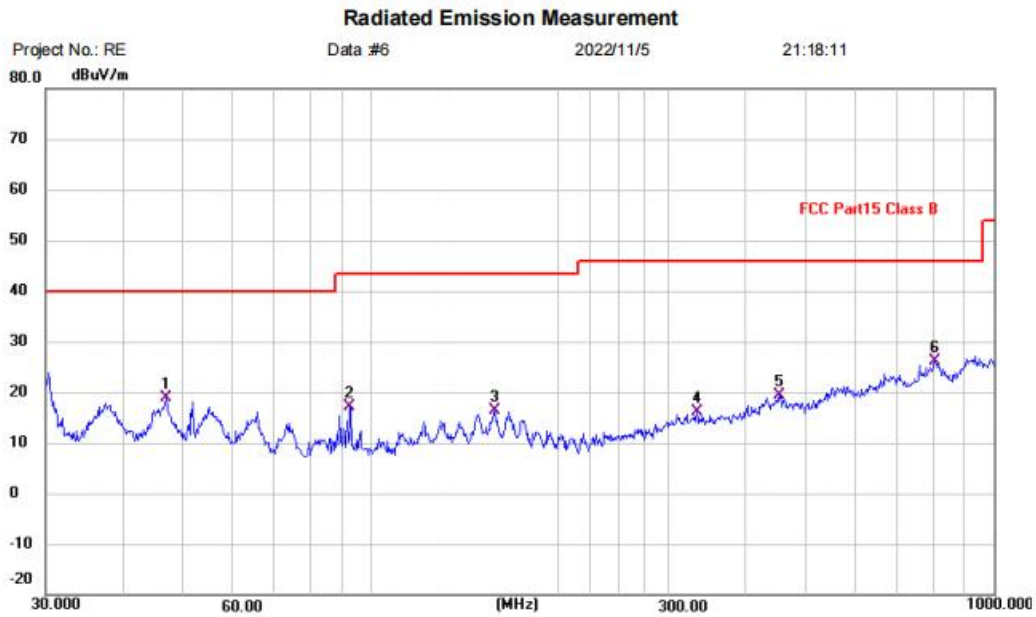

Site
Limit: FCC Part15 Class B
EUT: The Smart Snoring Soiution
M/N: IS100
Mode: BLE TX mode
Note:

Polarization: ***Vertical***
Power:

Temperature: (C)
Humidity: %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	46.8303	25.22	-6.34	18.88	40.00	-21.12	QP	P	
2	92.4624	27.58	-10.42	17.16	43.50	-26.34	QP	P	
3	158.1123	22.58	-6.13	16.45	43.50	-27.05	QP	P	
4	333.6867	21.40	-5.17	16.23	46.00	-29.77	QP	P	
5	452.7197	21.17	-1.85	19.32	46.00	-26.68	QP	P	
6 *	804.6028	21.55	4.60	26.15	46.00	-19.85	QP	P	

*:Maximum data x:Over limit !:over margin

Test Result: Pass

Above 1GHz

[TestMode: TX low channel]; [Polarity: Horizontal]

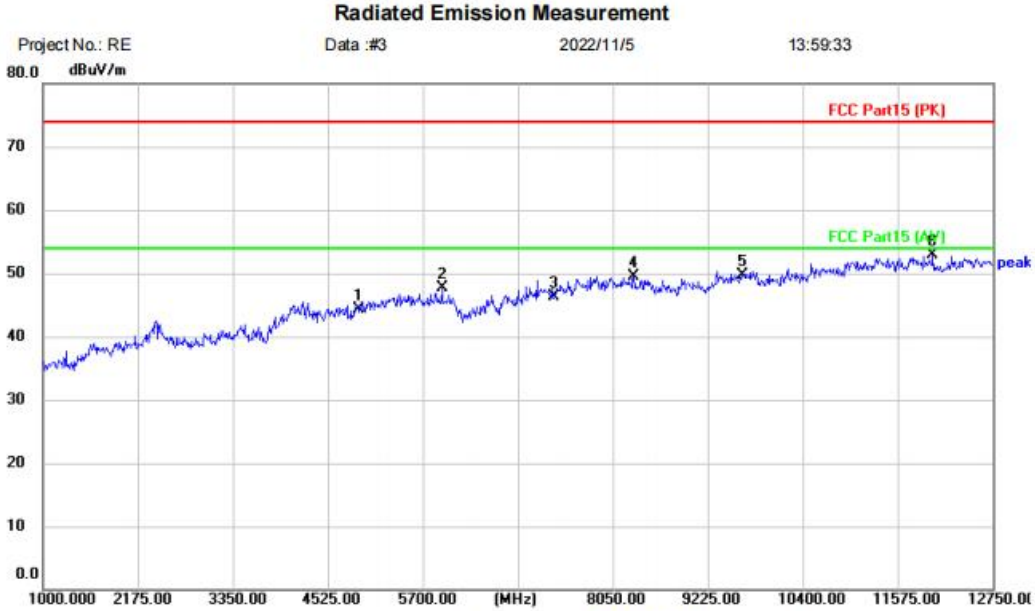

Site
Limit: FCC Part15 (PK)
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-L
Note:

Polarization: ***Horizontal***
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	39.43	4.82	44.25	74.00	-29.75	peak	
2		5935.000	40.76	6.91	47.67	74.00	-26.33	peak	
3		7326.000	38.04	8.21	46.25	74.00	-27.75	peak	
4		8308.500	40.54	9.04	49.58	74.00	-24.42	peak	
5		9648.000	38.79	11.01	49.80	74.00	-24.20	peak	
6	*	12009.750	38.99	13.90	52.89	74.00	-21.11	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

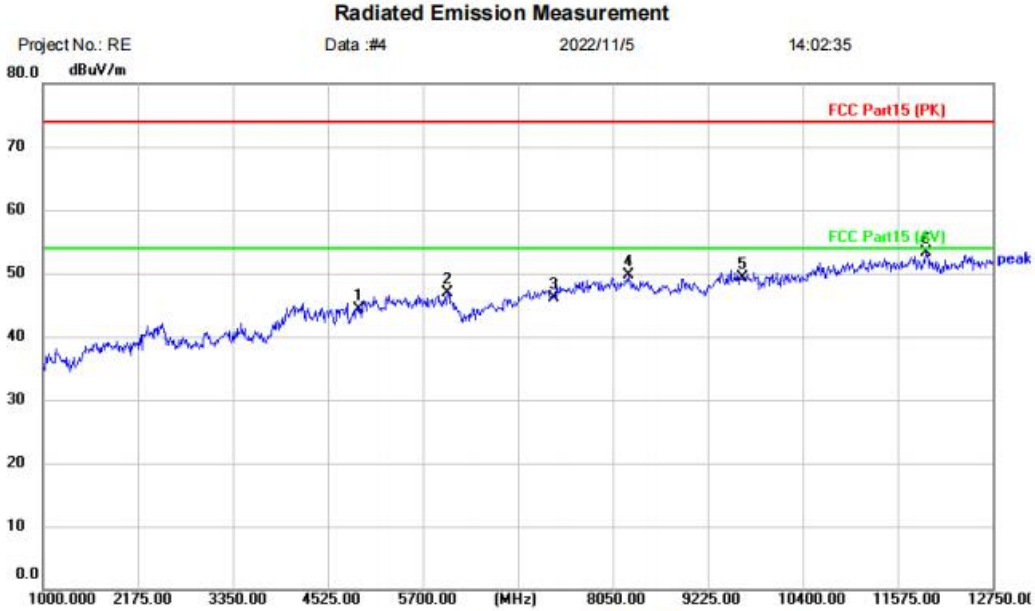

Site
Limit: FCC Part15 (PK)
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-L
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	39.51	4.82	44.33	74.00	-29.67	peak	
2		6005.500	42.91	3.92	46.83	74.00	-27.17	peak	
3		7326.000	37.99	8.21	46.20	74.00	-27.80	peak	
4		8238.000	40.71	9.00	49.71	74.00	-24.29	peak	
5		9648.000	38.33	11.01	49.34	74.00	-24.66	peak	
6	*	11927.500	39.40	13.86	53.26	74.00	-20.74	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

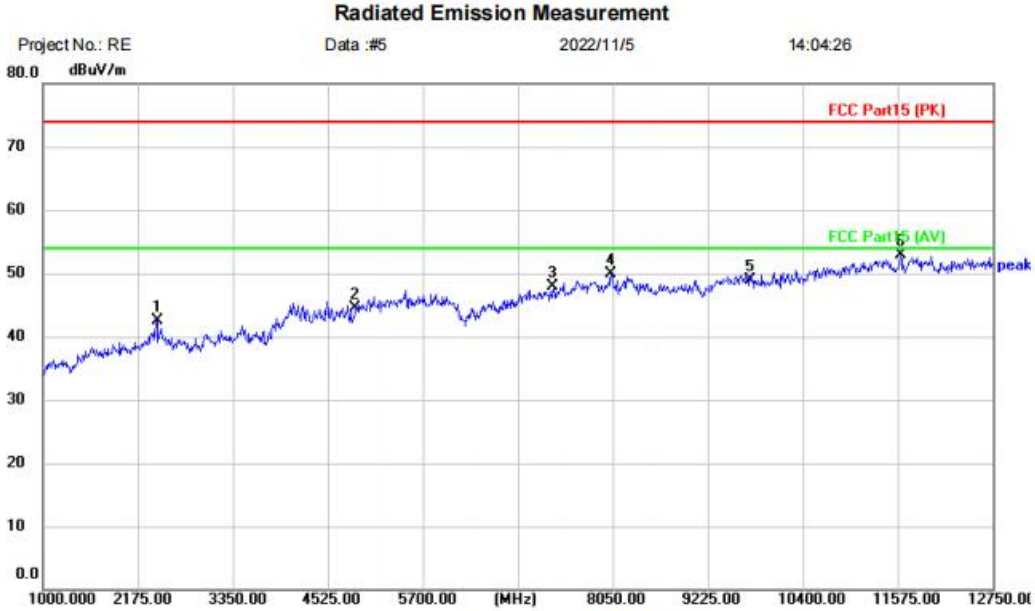

Site
Limit: FCC Part15 (PK)
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-M
Note:

Polarization: ***Horizontal***
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2410.000	43.84	-1.26	42.58	74.00	-31.42	peak	
2		4874.000	40.16	4.32	44.48	74.00	-29.52	peak	
3		7311.000	39.63	8.18	47.81	74.00	-26.19	peak	
4		8026.500	40.99	8.91	49.90	74.00	-24.10	peak	
5		9748.000	37.55	11.26	48.81	74.00	-25.19	peak	
6	*	11610.250	39.28	13.72	53.00	74.00	-21.00	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

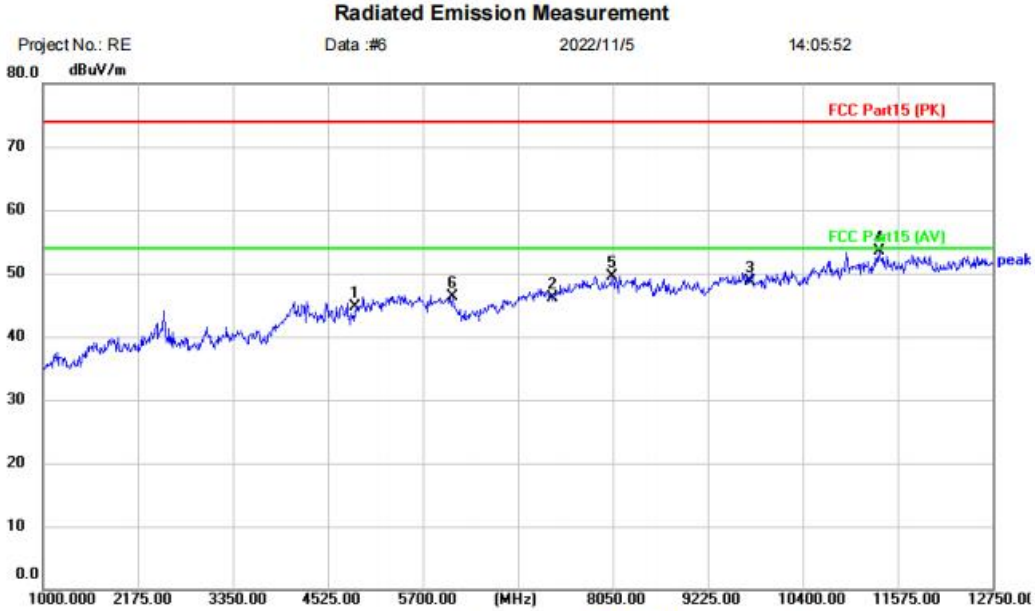

Site
Limit: FCC Part15 (PK)
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-M
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4874.000	40.36	4.32	44.68	74.00	-29.32	peak	
2		7311.000	37.99	8.18	46.17	74.00	-27.83	peak	
3		9748.000	37.35	11.26	48.61	74.00	-25.39	peak	
4	*	11340.000	39.97	13.60	53.57	74.00	-20.43	peak	
5		8038.250	40.65	8.91	49.56	74.00	-24.44	peak	
6		6064.250	42.10	4.16	46.26	74.00	-27.74	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

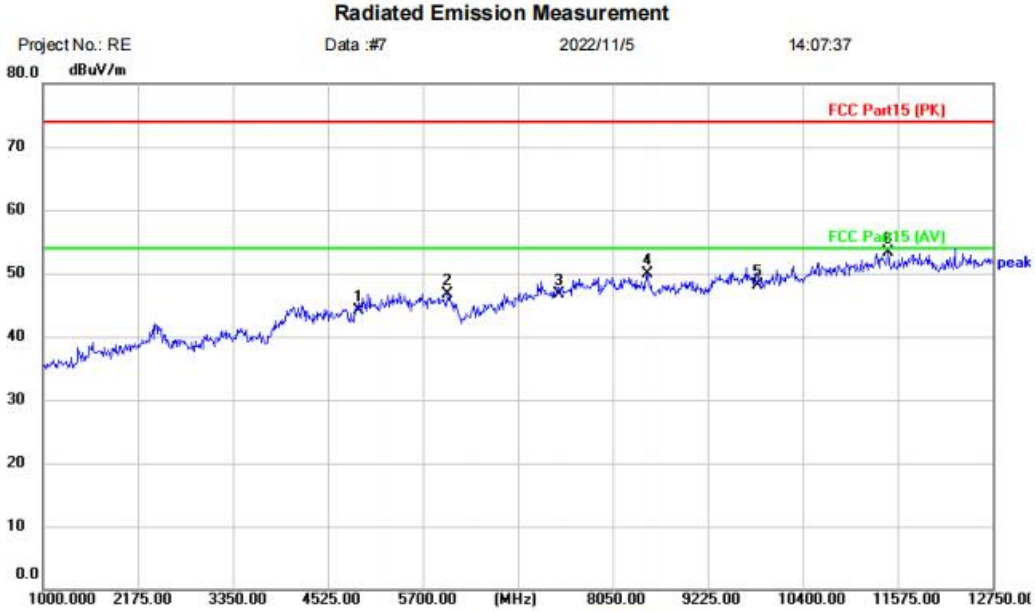

Site
Limit: FCC Part15 (PK)
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-H
Note:

Polarization: ***Horizontal***
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	39.21	4.82	44.03	74.00	-29.97	peak	
2		6005.500	42.82	3.92	46.74	74.00	-27.26	peak	
3		7386.000	38.30	8.36	46.66	74.00	-27.34	peak	
4		8473.000	40.72	9.12	49.84	74.00	-24.16	peak	
5		9848.000	36.67	11.52	48.19	74.00	-25.81	peak	
6	*	11457.500	39.69	13.66	53.35	74.00	-20.65	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

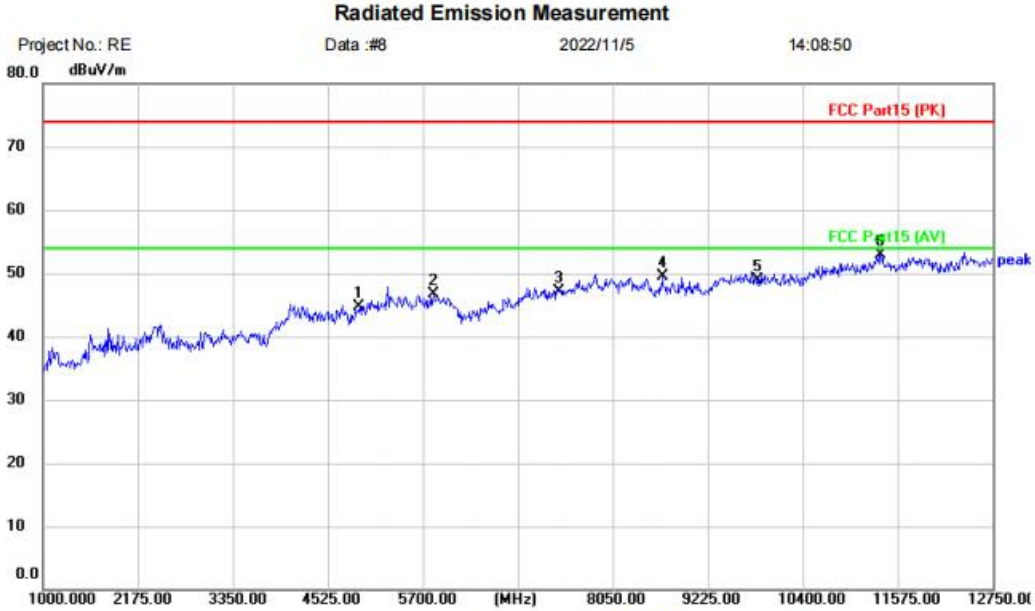

Site
Limit: FCC Part15 (PK)
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-H
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	39.89	4.82	44.71	74.00	-29.29	peak	
2		5829.250	39.83	6.78	46.61	74.00	-27.39	peak	
3		7386.000	38.66	8.36	47.02	74.00	-26.98	peak	
4		8661.000	40.25	9.20	49.45	74.00	-24.55	peak	
5		9848.000	37.44	11.52	48.96	74.00	-25.04	peak	
6	*	11363.500	39.38	13.62	53.00	74.00	-21.00	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

14.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

BlueAsia

14.2 BLOCK DIAGRAM OF TEST SETUP

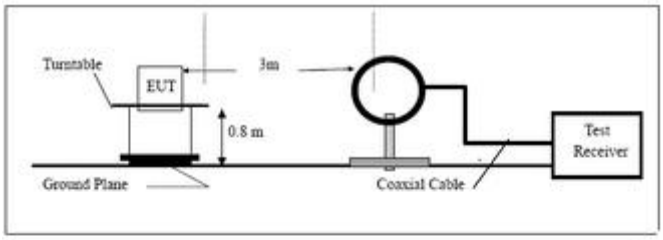

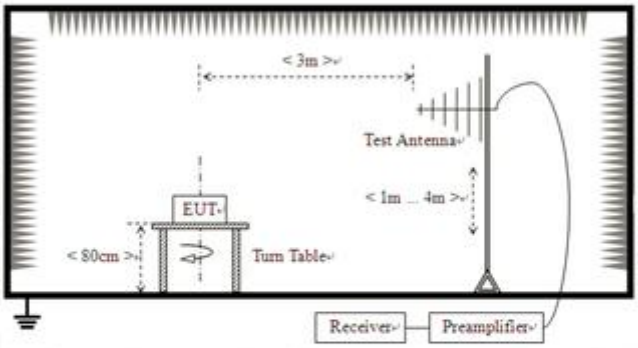

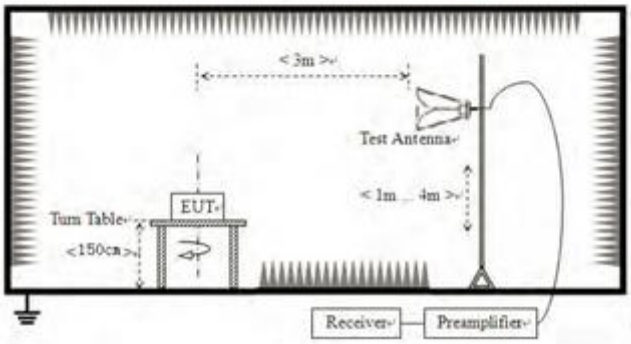

14.3 PROCEDURE

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
j. Repeat above procedures until all frequencies measured was complete.
Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

14.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

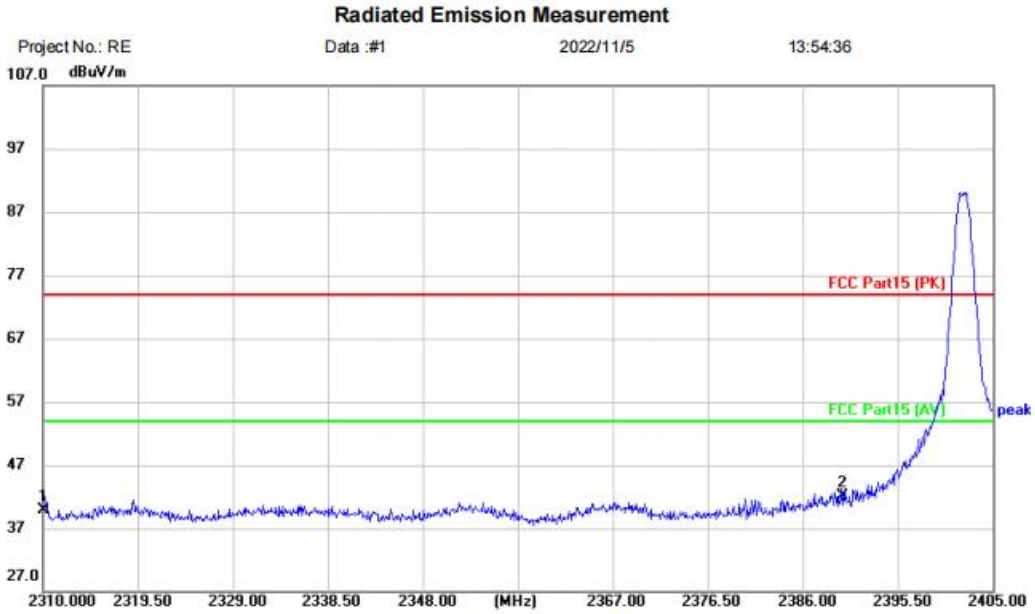

Site
Polarization: *Horizontal*
Temperature: (C)
Limit: FCC Part15 (PK)
Power:
Humidity: %RH
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	44.25	-4.27	39.98	74.00	-34.02	peak	
2	*	2390.000	45.91	-3.82	42.09	74.00	-31.91	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

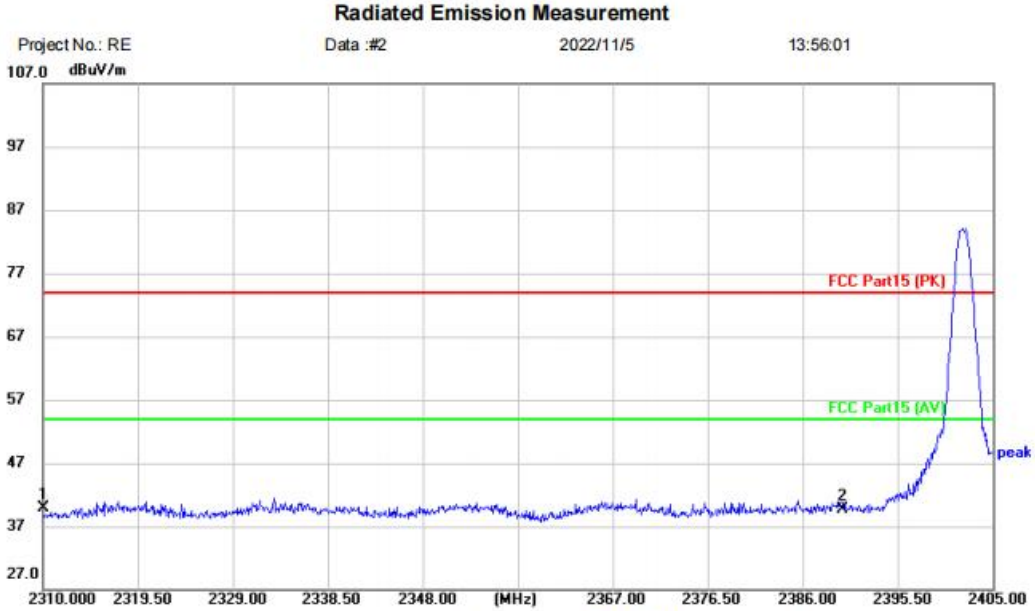

Site
Polarization: *Vertical*
Temperature: (C)
Limit: FCC Part15 (PK)
Power:
Humidity: %RH
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2310.000	44.22	-4.27	39.95	74.00	-34.05	peak	
2		2390.000	43.53	-3.82	39.71	74.00	-34.29	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

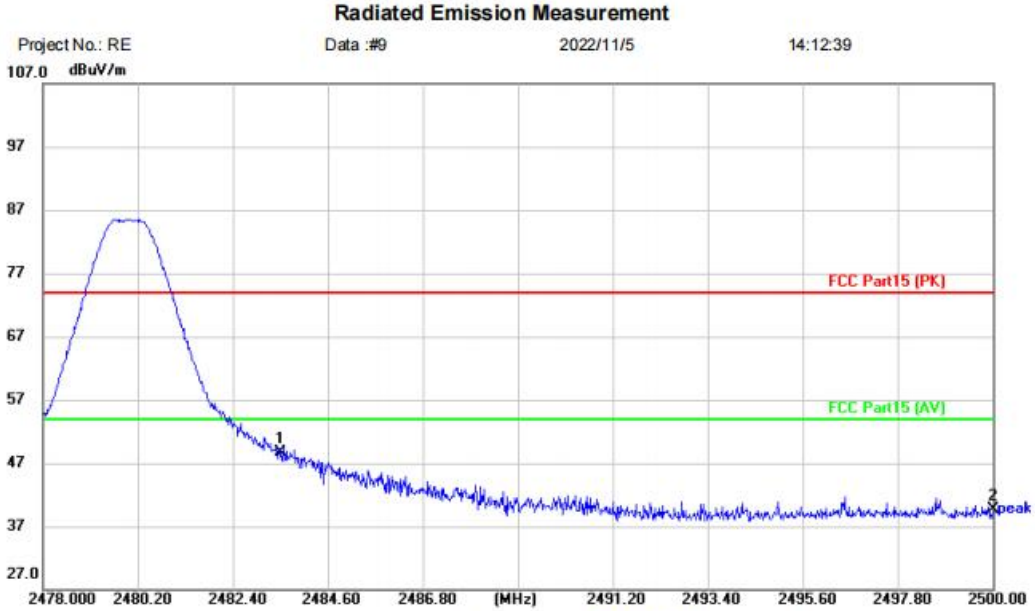

Site
Limit: FCC Part15 (PK)
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-H
Note:

Polarization: ***Horizontal***
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	52.60	-3.96	48.64	74.00	-25.36	peak	
2		2500.000	43.68	-4.00	39.68	74.00	-34.32	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

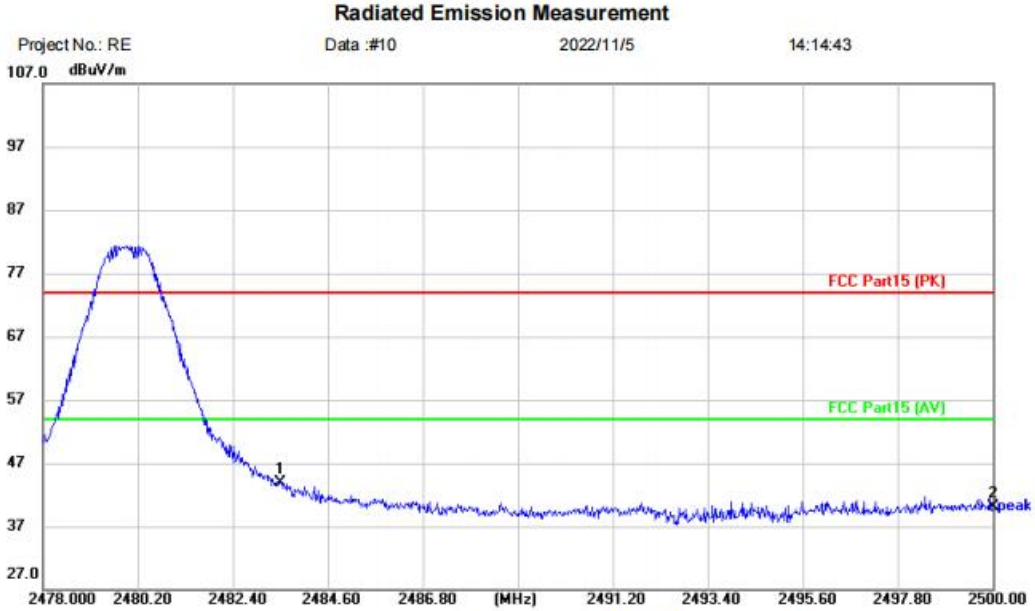

Site
Limit: FCC Part15 (PK)
EUT: The Smart Snoring Solution
M/N: IS100
Mode: BLE TX-H
Note:

Polarization: *Vertical*
Power:

Temperature: (C)
Humidity: %RH

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	47.94	-3.96	43.98	74.00	-30.02	peak	
2		2500.000	44.03	-4.00	40.03	74.00	-33.97	peak	

*:Maximum data x:Over limit !:over margin (Reference Only

Test Result: Pass

15 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

15.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

15.2 BLOCK DIAGRAM OF TEST SETUP

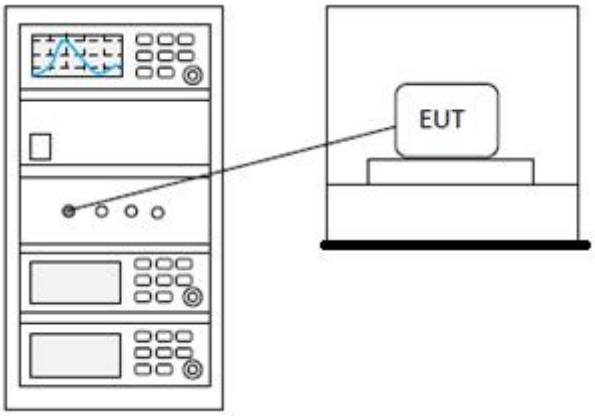

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

16 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

16.1 LIMITS

Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission

16.2 BLOCK DIAGRAM OF TEST SETUP

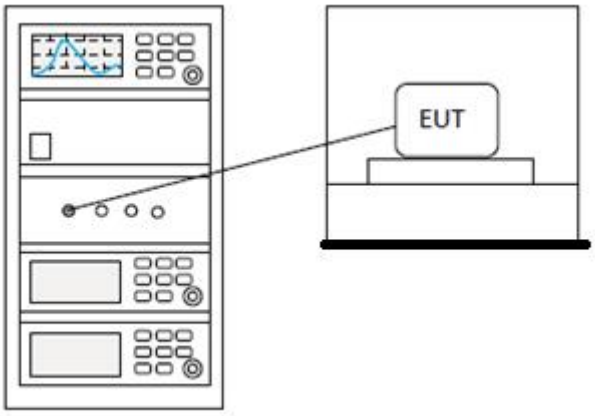

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

17 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

17.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥50 hopping channels
	0.25 for 25≤ hopping channels <50
	1 for digital modulation
2400-2483.5	1 for ≥75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

17.2 BLOCK DIAGRAM OF TEST SETUP

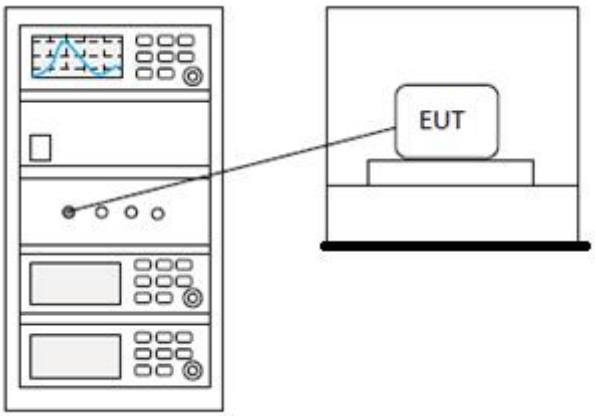

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

18 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

18.1 LIMITS

Limit:	≥500 kHz

18.2 BLOCK DIAGRAM OF TEST SETUP

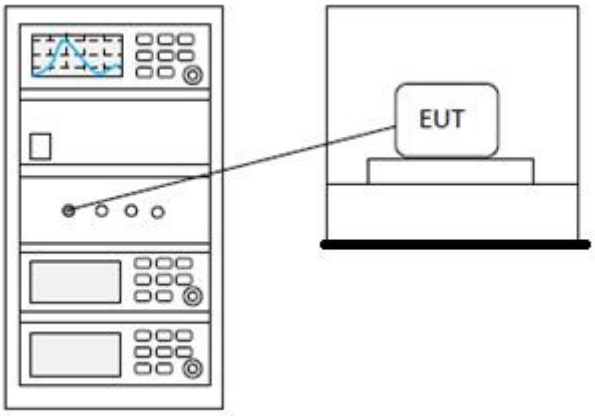

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

19 APPENDIX

Appendix1

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.184	30	Pass
NVNT	BLE 1M	2442	Ant1	-6.482	30	Pass
NVNT	BLE 1M	2480	Ant1	-7.603	30	Pass

Power NVNT BLE 1M 2402MHz Ant1

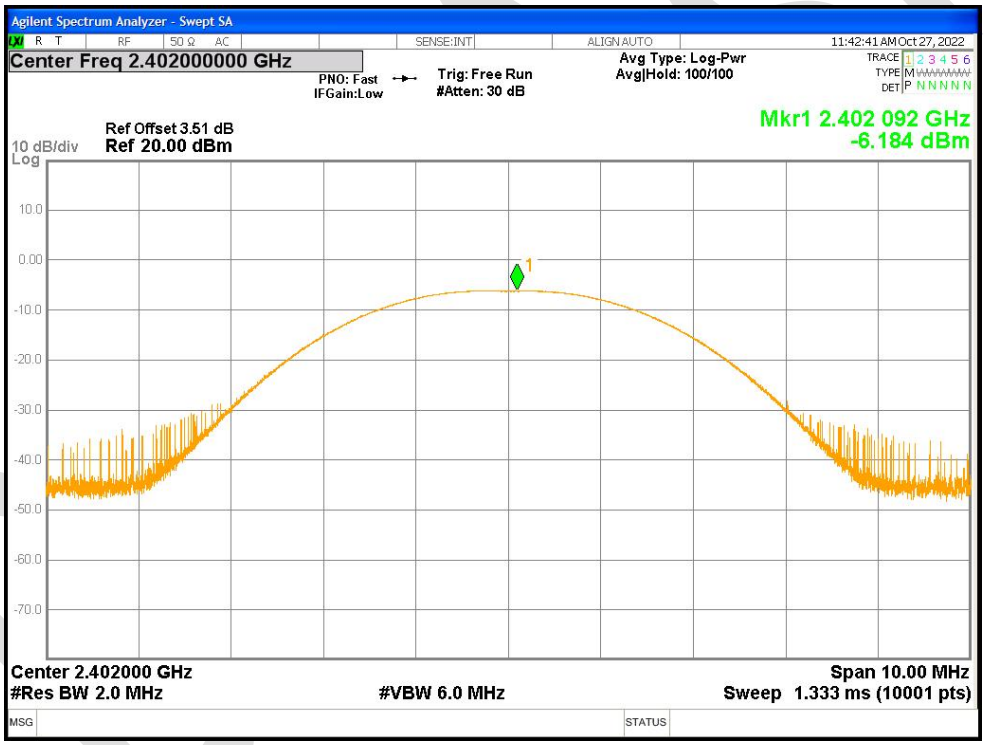

Power NVNT BLE 1M 2442MHz Ant1

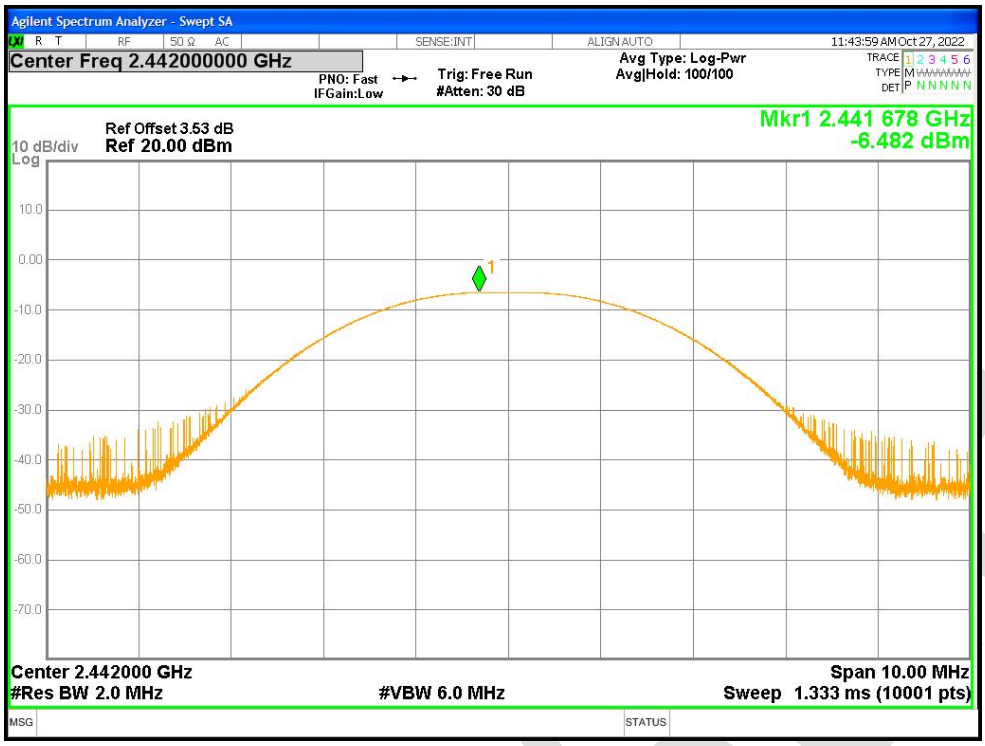

Power NVNT BLE 1M 2480MHz Ant1

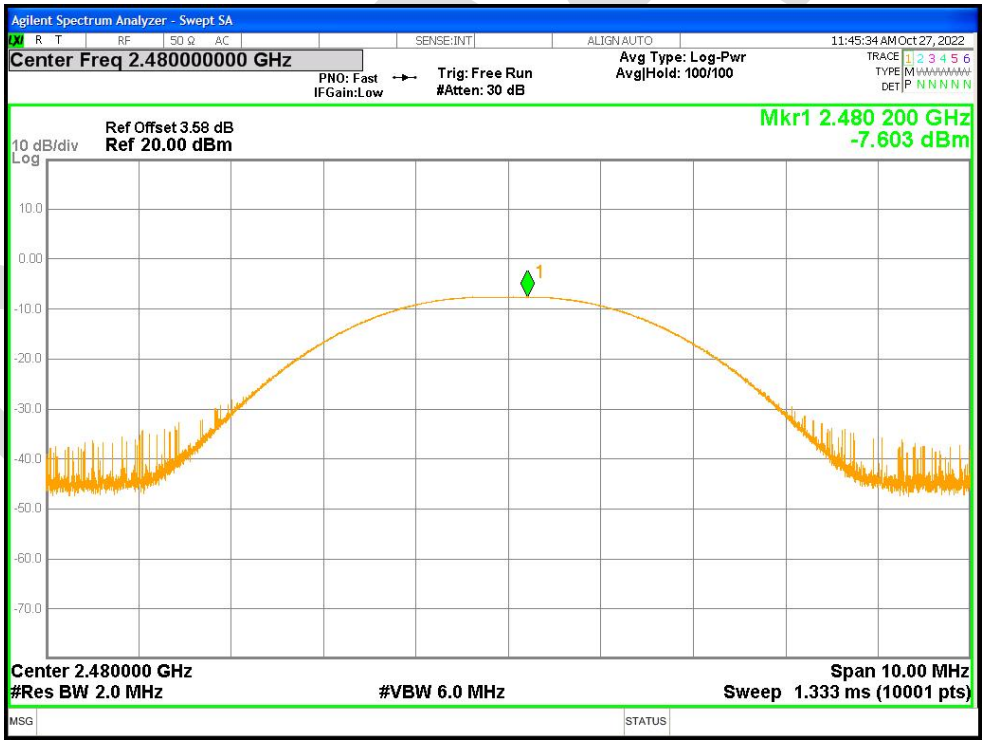

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.697	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.678	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.688	0.5	Pass

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

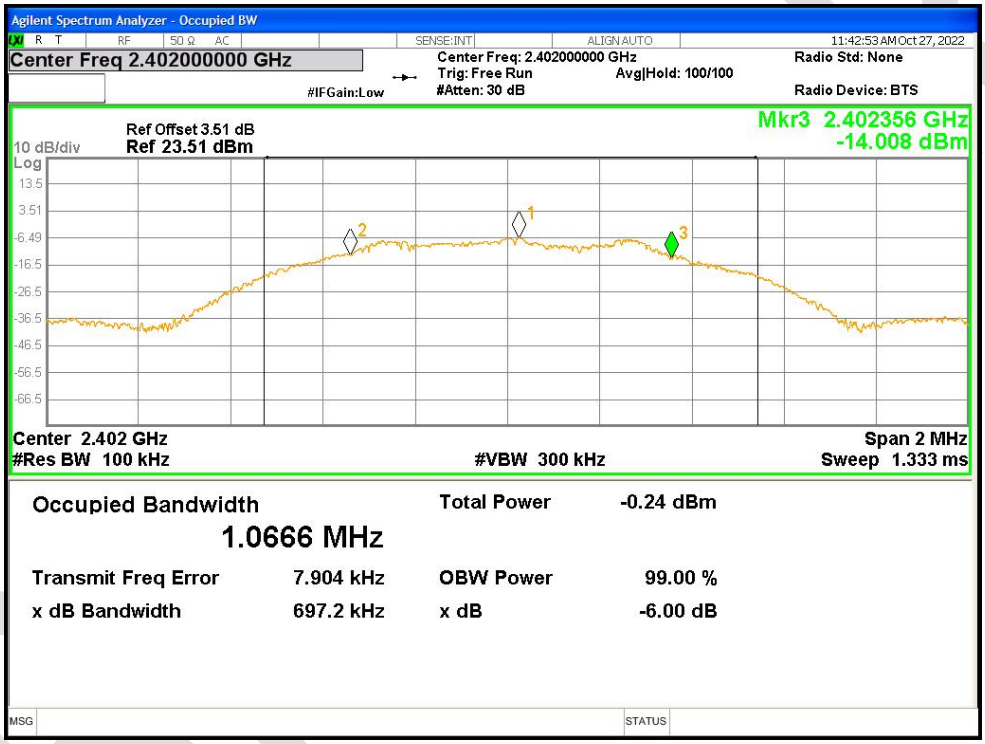

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

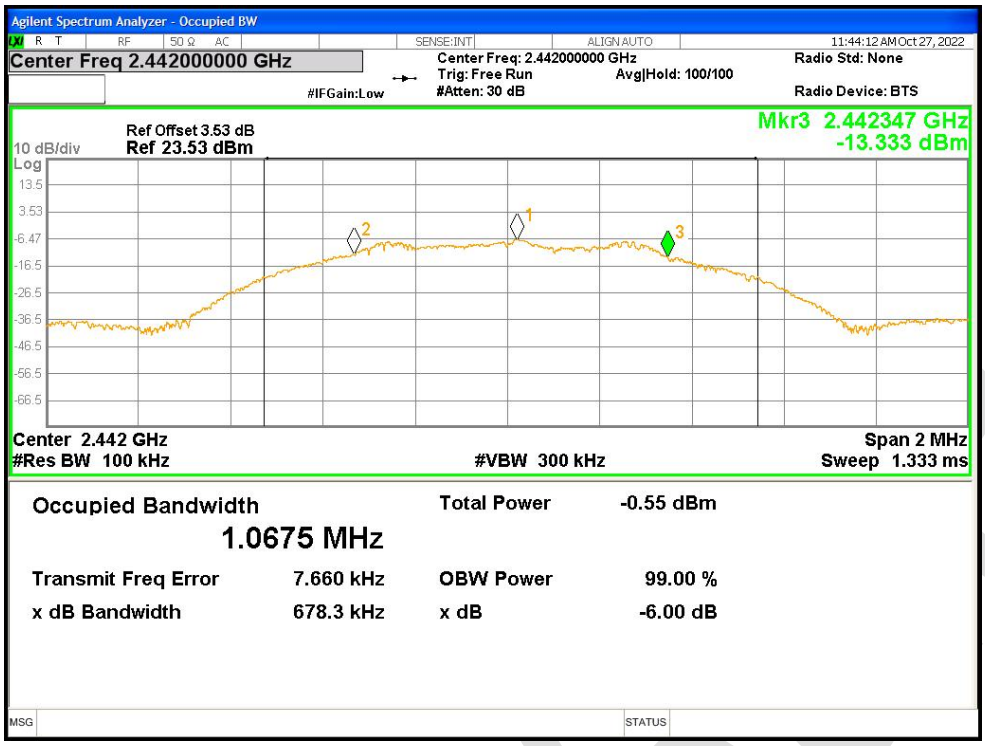

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

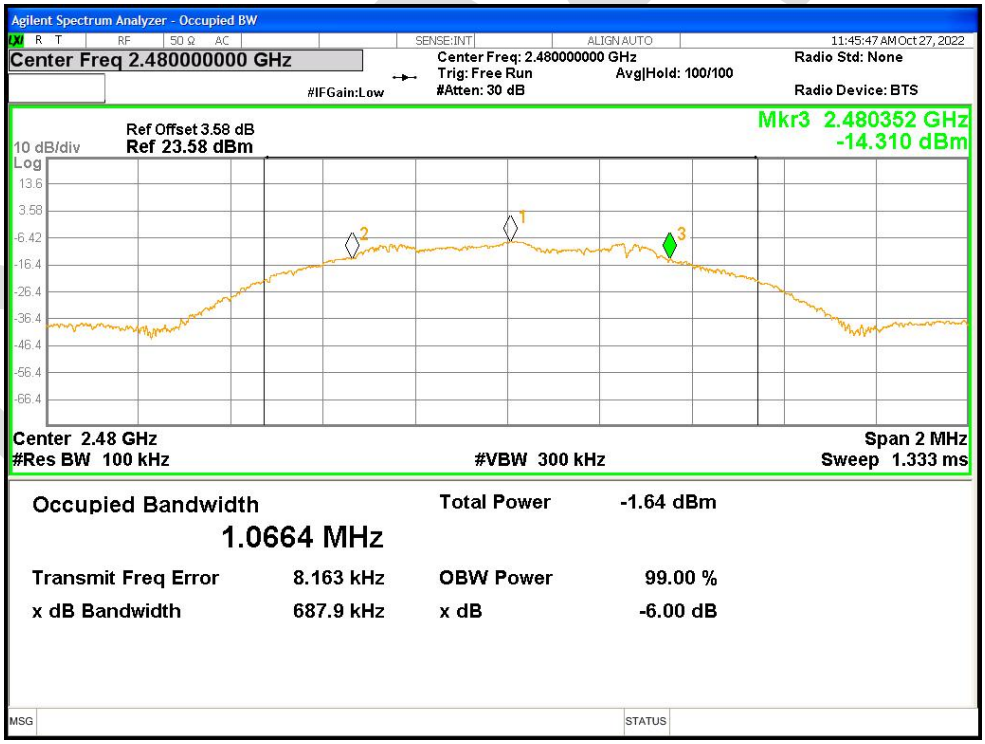

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0444
NVNT	BLE 1M	2442	Ant1	1.0456
NVNT	BLE 1M	2480	Ant1	1.0559

OBW NVNT BLE 1M 2402MHz Ant1

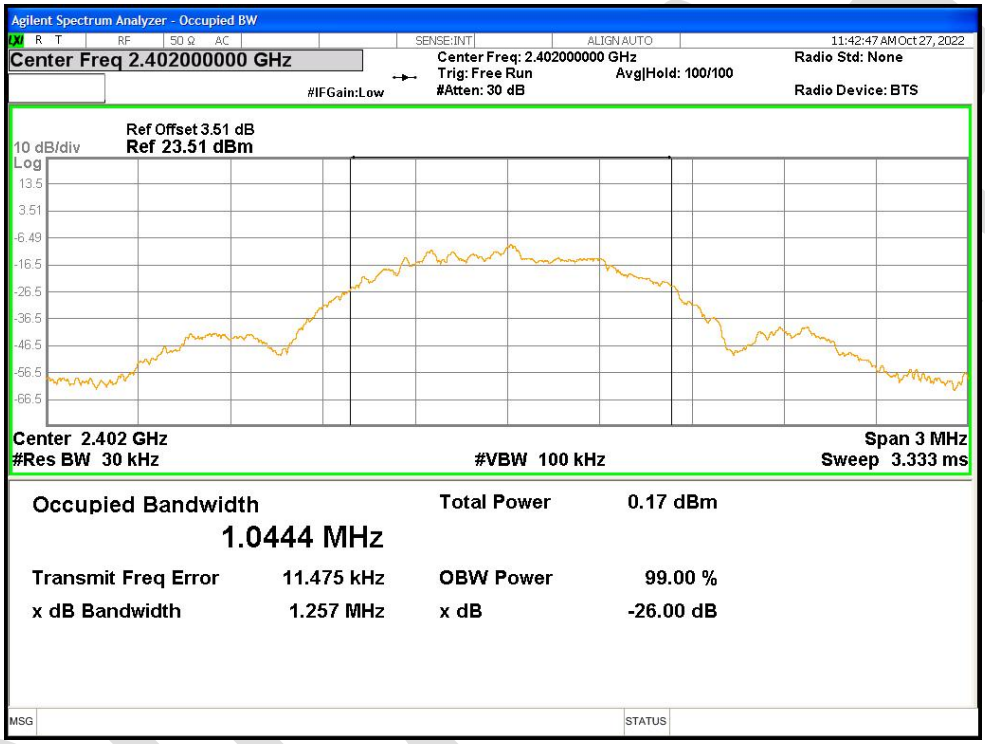

OBW NVNT BLE 1M 2442MHz Ant1

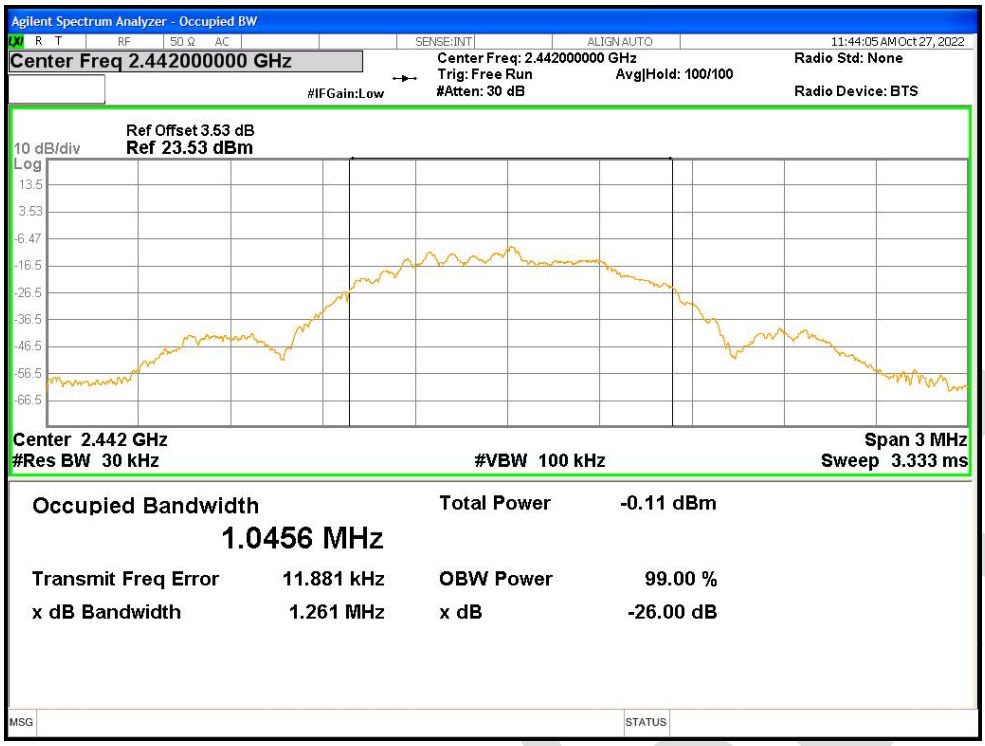

OBW NVNT BLE 1M 2480MHz Ant1

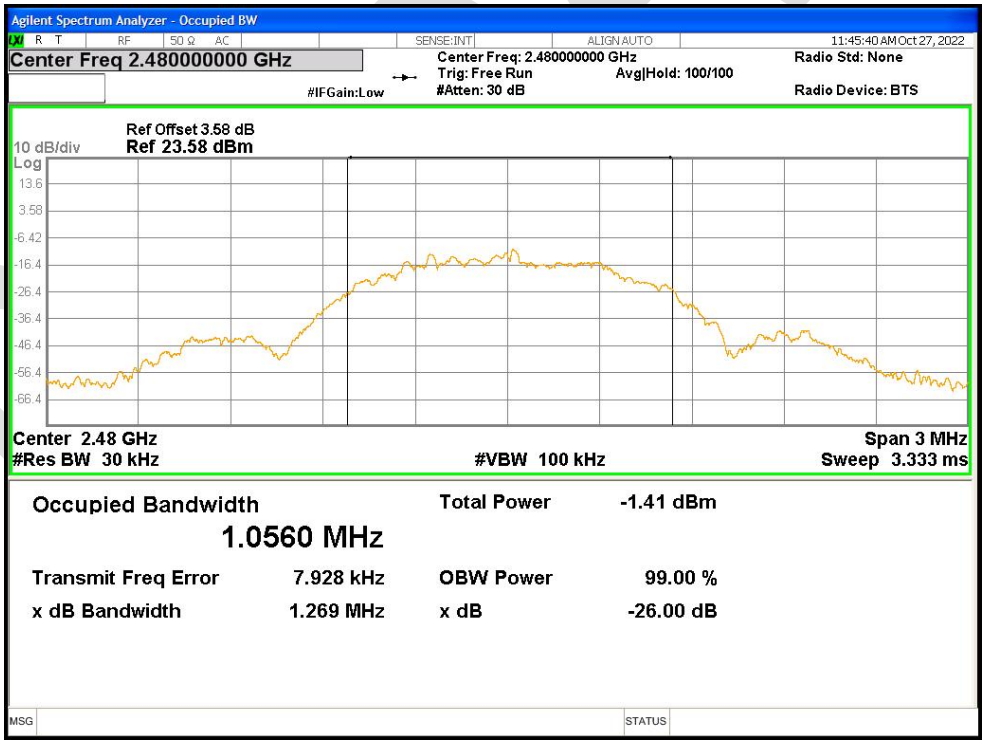

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.39	8	Pass
NVNT	BLE 1M	2442	Ant1	-6.752	8	Pass
NVNT	BLE 1M	2480	Ant1	-7.82	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

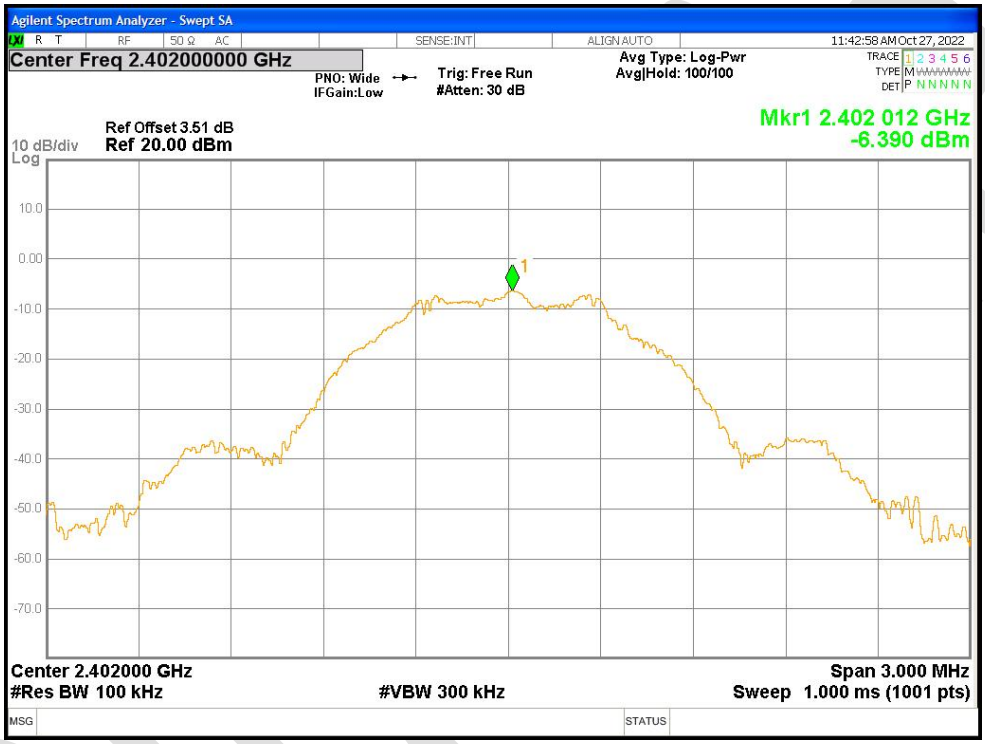

PSD NVNT BLE 1M 2442MHz Ant1

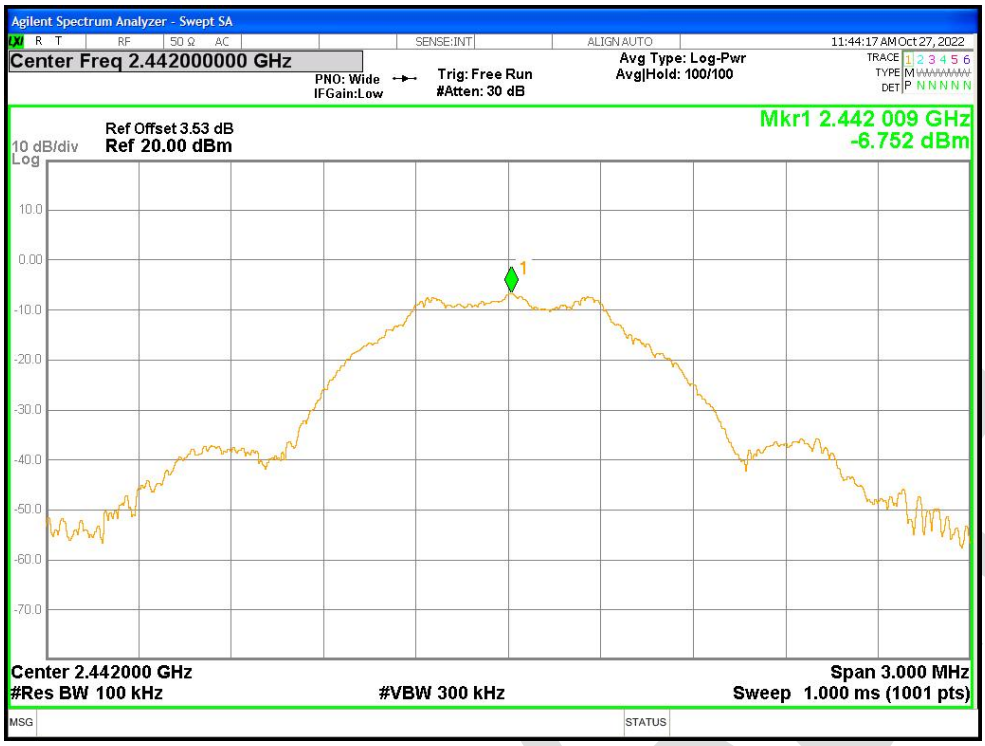

PSD NVNT BLE 1M 2480MHz Ant1

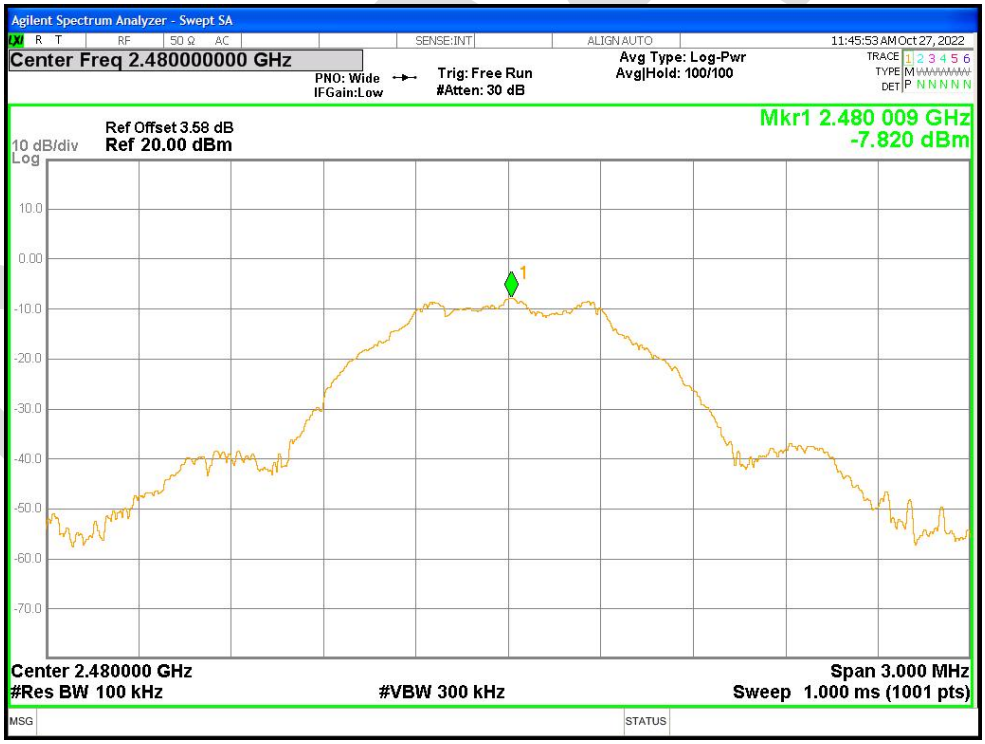

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-47.23	-30	Pass
NVNT	BLE 1M	2480	Ant1	-46.07	-30	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

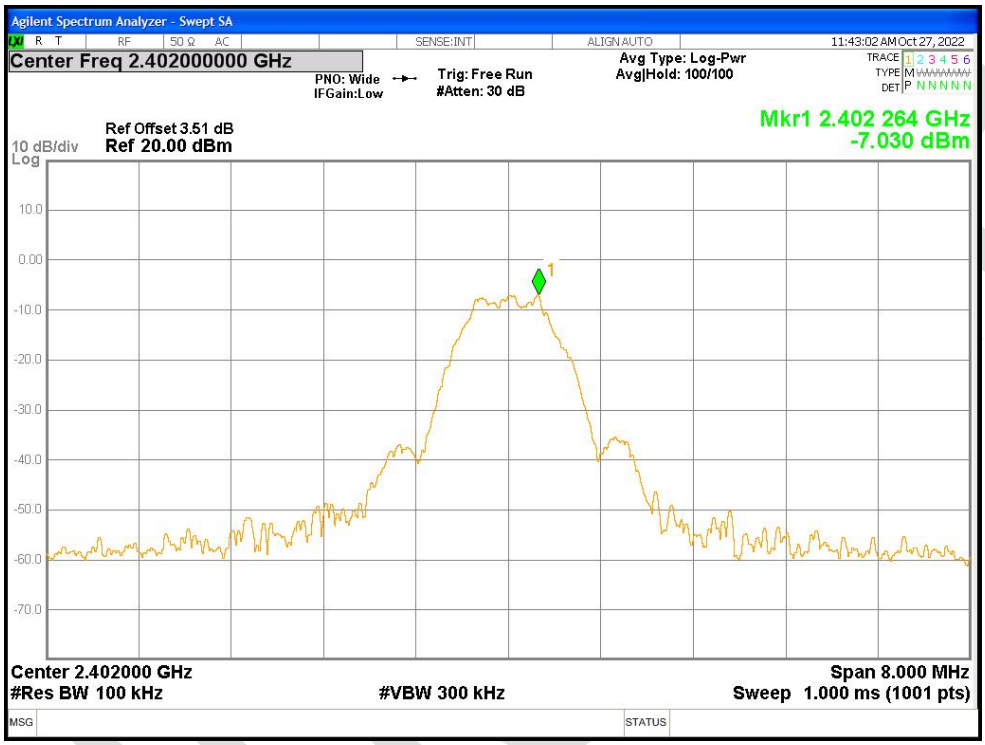

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

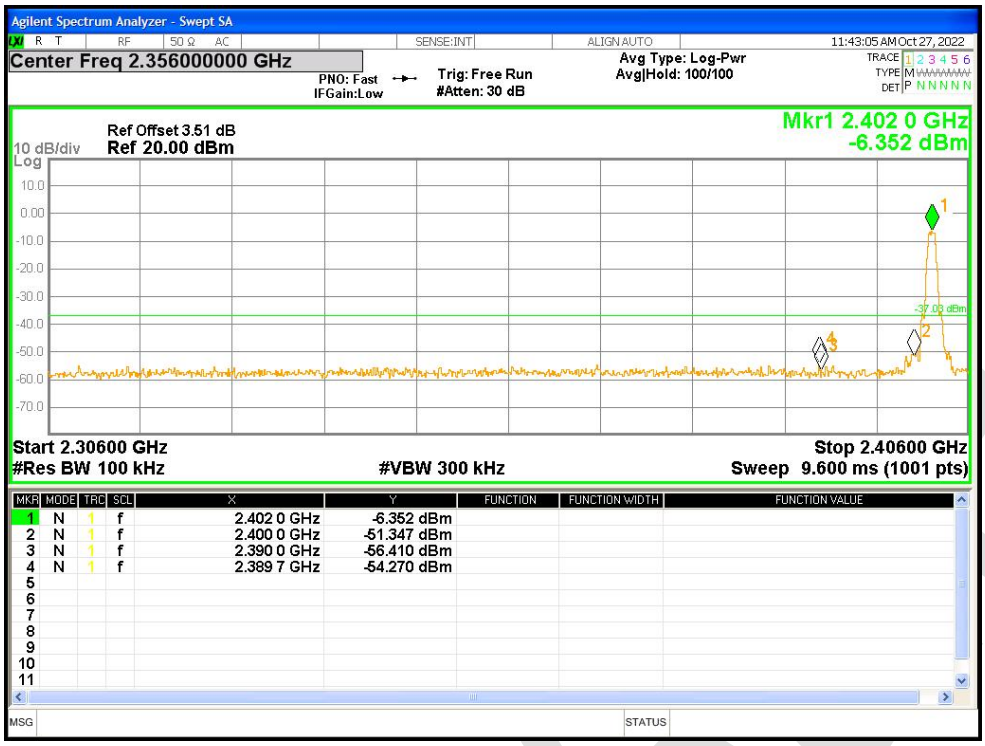

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

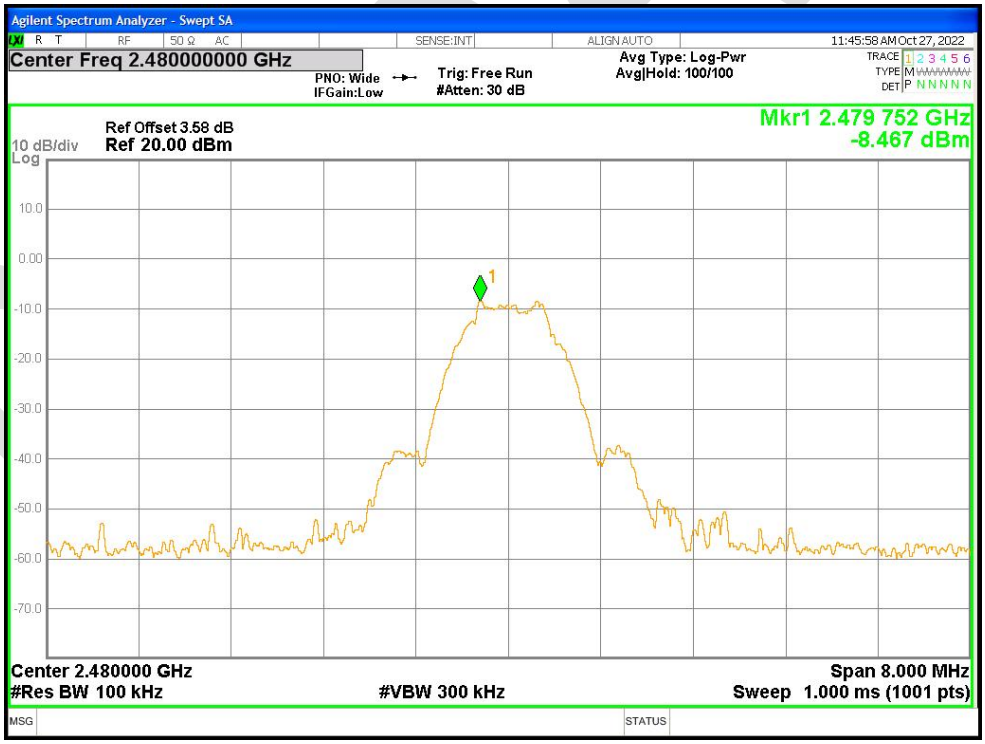

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission