


Features

- 1.Surface Mounted Devices with a small dimension of 1.6 x 0.8 x 0.8 mm meet future miniaturization trend.
- 2,Embedded and LTCC (low temperature co-fired ceramic) technology is able to integrate with system design as well as beautifying the housing of final product.
- 3.High stability and low tolerance.


Applications

1. Bluetooth
2. Wireless LAN
3. ISM band 2.4GHz wireless applications

Dimensions (Unit: mm)

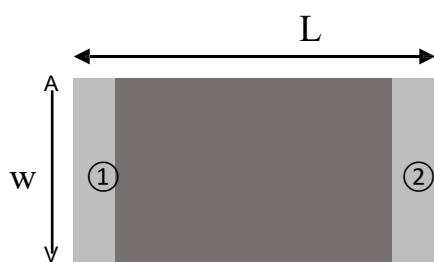

(Top View)

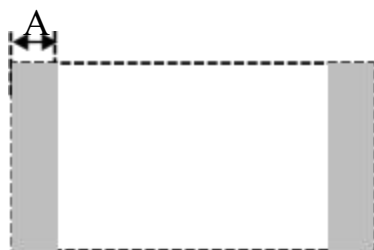

(Bottom View)

Number	Terminal Name
①	INPUT
②	NC





(Side View)

Symbols	L	W	T	A
Dimensions	1.60±0.20	0.80±0.20	0.80±0.20	0.30±0.10

Shenzhen Helixun Technology Co., Ltd.
Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang
Street, Bao'an District, Shenzhen City, Guangdong Province

Evaluation Board and Matching Circuits

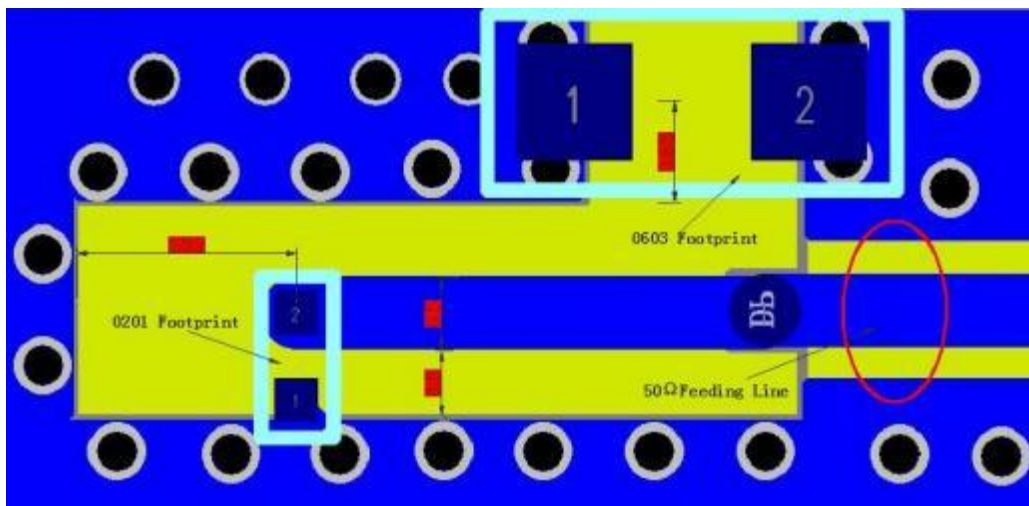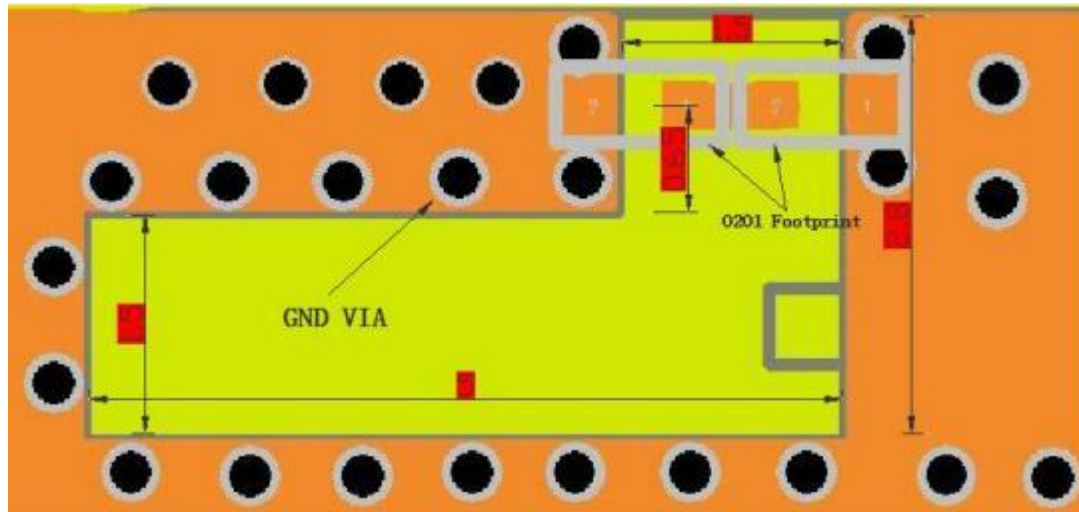


Shenzhen Helixun Technology Co., Ltd.
 Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang
 Street, Bao'an District, Shenzhen City, Guangdong Province

Electrical Characteristics

	Feature	Specification
1	Central frequency	2445MHz
2	Bandwidth	>100MHz
3	Peak gain	>3dBi
4	VSWR	<2
5	Polarization	Linear
6	Azimuth beamwidth	Omnidirectional
7	Impedance	50 Ω



Characteristic curve

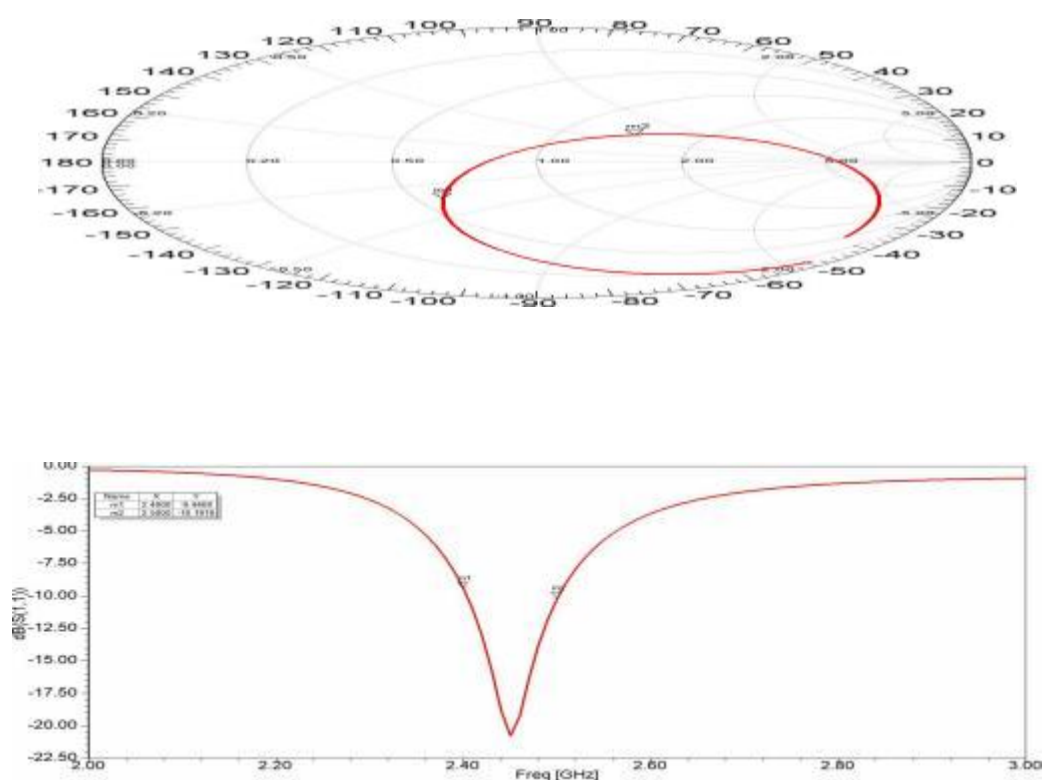


Shenzhen Helixun Technology Co., Ltd.
Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang
Street, Bao'an District, Shenzhen City, Guangdong Province

Radiation Pattern


coordinates:

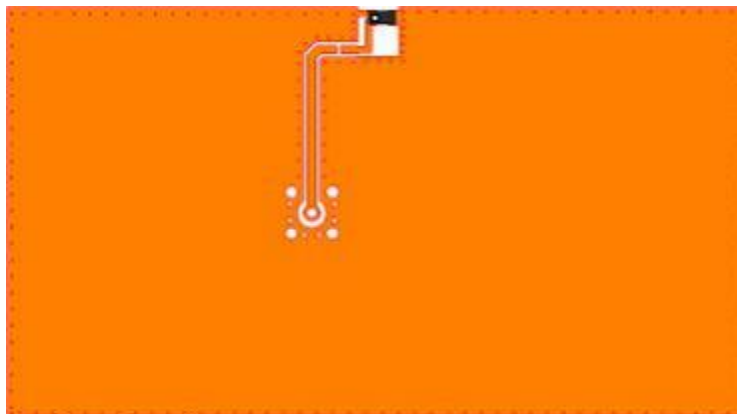

Y-Z Plane

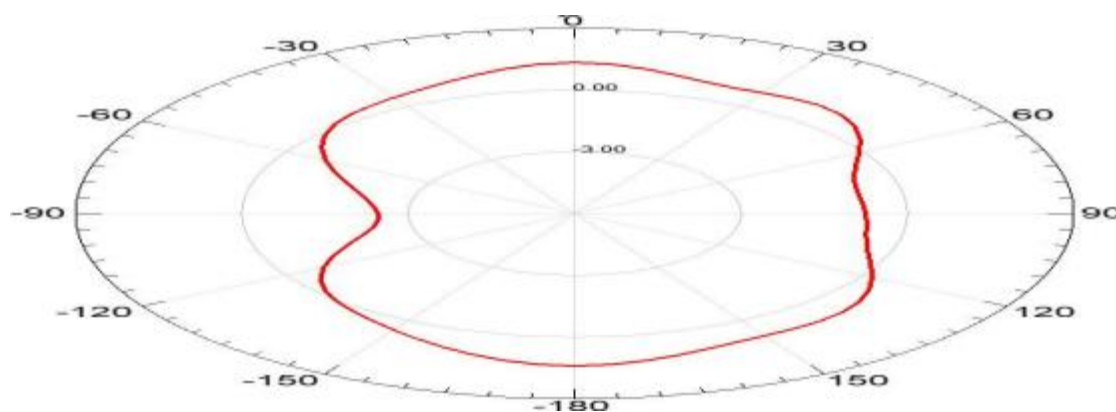


X-Z Plane

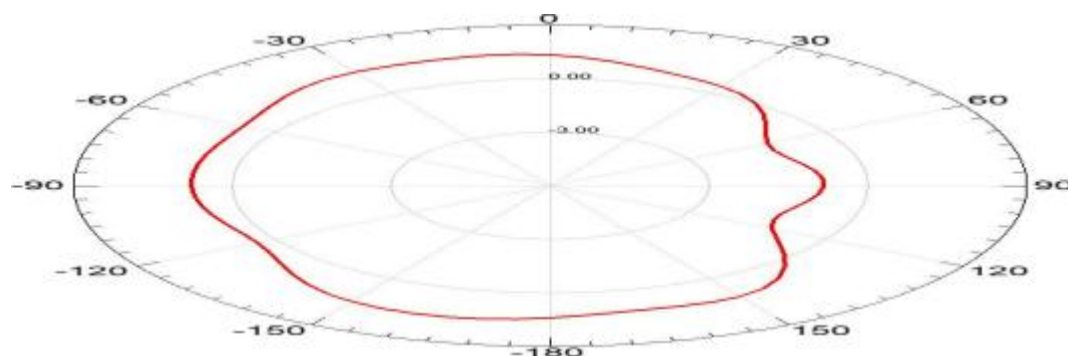


Shenzhen Helixun Technology Co., Ltd.
Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang
Street, Bao'an District, Shenzhen City, Guangdong Province

X-Y Plane

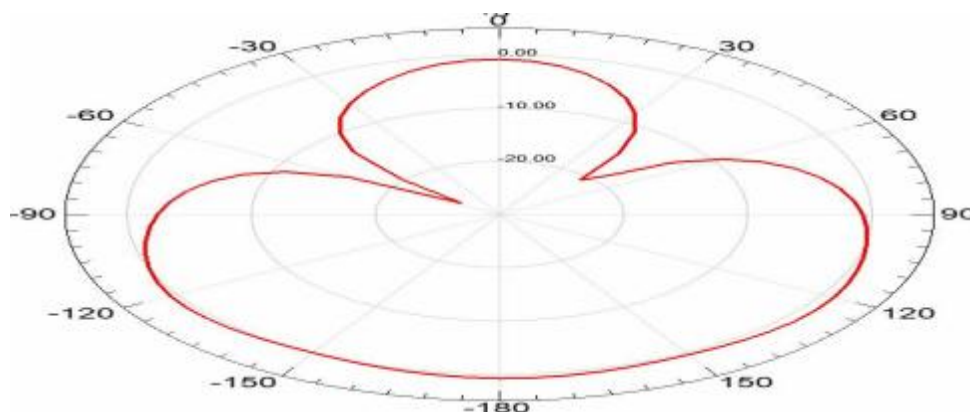

3D Radiation Pattern

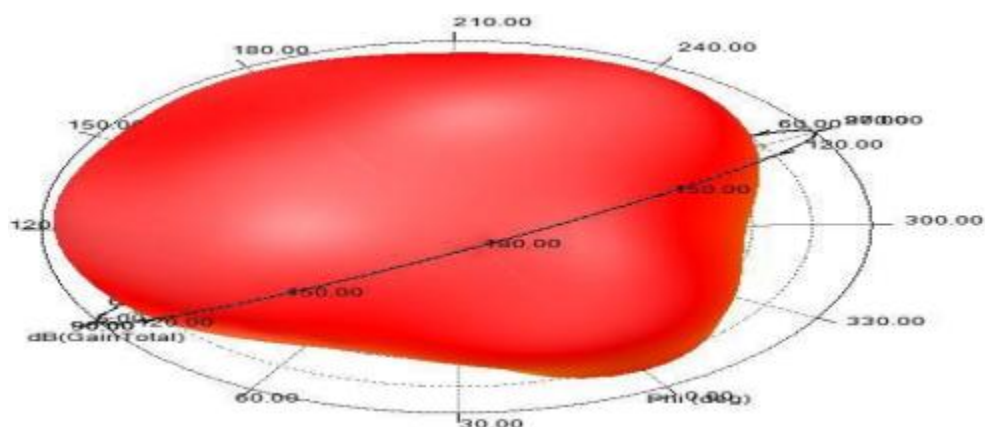

Frequency	2400MHz	2450MHz	2500MHz
Avg. gain	-1.14	-0.85	-1.30
Peak gain	2	3.4	2.5
Efficiency	77%	82%	78%

Shenzhen Helixun Technology Co., Ltd.
 Room 1004, JinhuanYu Building, No. 56 Tiezai Road, Xixiang
 Street, Bao'an District, Shenzhen City, Guangdong Province

Dependability Test

Test Temperature:	25°C±3°C
Operating Temperature	-25°C~+85°C
Temperature	5~40°C
Relative Humidity	20~70%

Moisture Proof

Temperature: 40±2°C Humidity: 90~95%RH

Duration: 500h

Recovery conditions: Room temperature Recovery Time: 24h (Class1) or 48h (Class2)


Solderability

At least 95% of the terminal electrode is covered by new solder. Preheating conditions: 80 to 120°C; 10~30s.

Solder Temperature: 235±5°C Duration: 2±0.5s, Solder Temperature: 245±5°C Duration: 2±0.5s

Optimum Solder Amount for Reflow Soldering

Too much solder

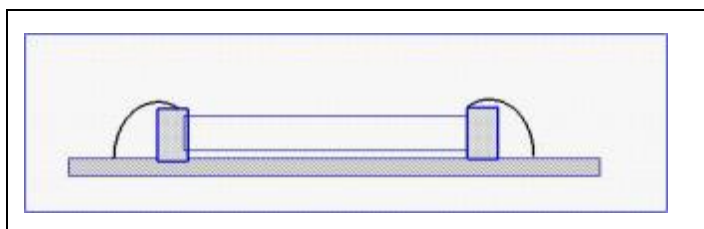

Cracks tend to occur due to large stress.


Not enough solder




Weak holding force may cause bad connection between the capacitor and PCB.

Recommended Soldering amounts

The optimal solder fillet amounts for re-flow soldering

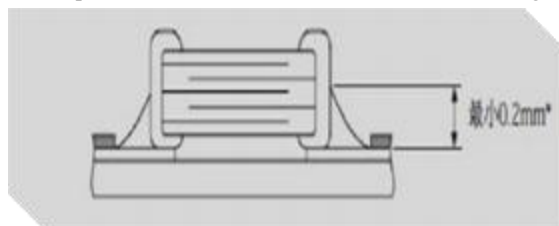

The optimal solder fillet amounts for wave soldering

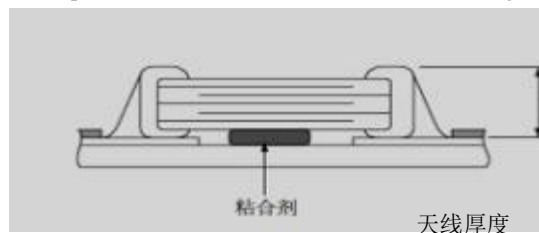

Shenzhen Helixun Technology Co., Ltd.
Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang
Street, Bao'an District, Shenzhen City, Guangdong Province

Temperature Cycle Test

10±1S Applied Force: 5N Duration: 10±1S

Preheating conditions: up-category temperature, 1 h

Recovery time: 24 ± 1 h

Initial Measurement

Cycling Times: 5 times, 1 cycle, 4 steps:

阶段	温度 (℃)	时间 (分钟)
第1步	下限温度(NPOX/REX/YSX46/ASR-55) Y2V-25 (Z10-30)	30
第2步	常温 (+20)	2~3
第3步	上限温度(NPOX/REX/YS-125 Y2V(Z10)/XSR-85 XGR-105)	30
第4步	常温 (+20)	2~3

Resistanceto SolderingHeat

Preheating: 80 to 120°C; 10~30s. Solder Temperature: 235±5°C Duration: 2±0.5s, Solder Temperature: 245±5°C

Duration: 2 ± 0.5 s, Preheating 100 to 200°C ; 10 ± 2 min.


Solder Temperature: $265 \pm 5^\circ\text{C}$ Duration: $10 \pm 1\text{s}$

Clean the capacitor with solvent and examine it with a 10X(min.) microscope.

Recovery Time: 24±2h

Recovery condition: Room temperature

Resistance to Flexure of Substrate

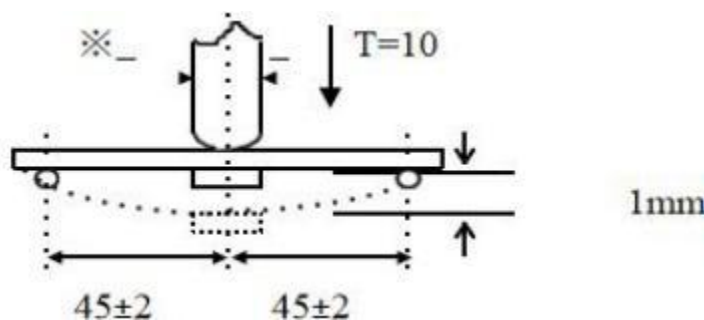


Test Board: Al₂O₃ or PCB Warp: 1mm Speed: 0.5mm/sec.

Unit: mm

The measurement should be made with the board in the bending position.


Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang Street, Bao'an District, Shenzhen City, Guangdong Province

The temperature profile for soldering

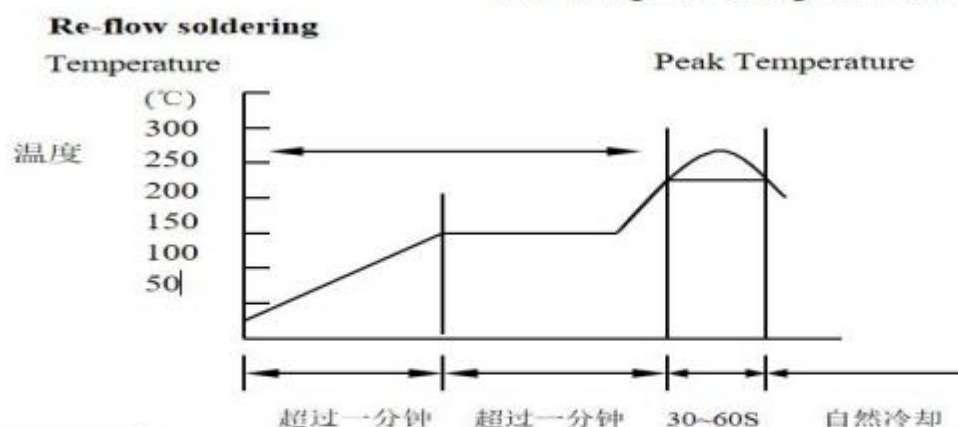

	Pb-Sn 焊接 Pb-Sn soldering	无铅焊接 Lead-free soldering
尖峰温度 Peak temperature	230℃~250℃	240℃~260℃


While in preheating, please keep the temperature difference between soldering temperature and surface temperature of chips as: $T \leq 150^{\circ}\text{C}$.

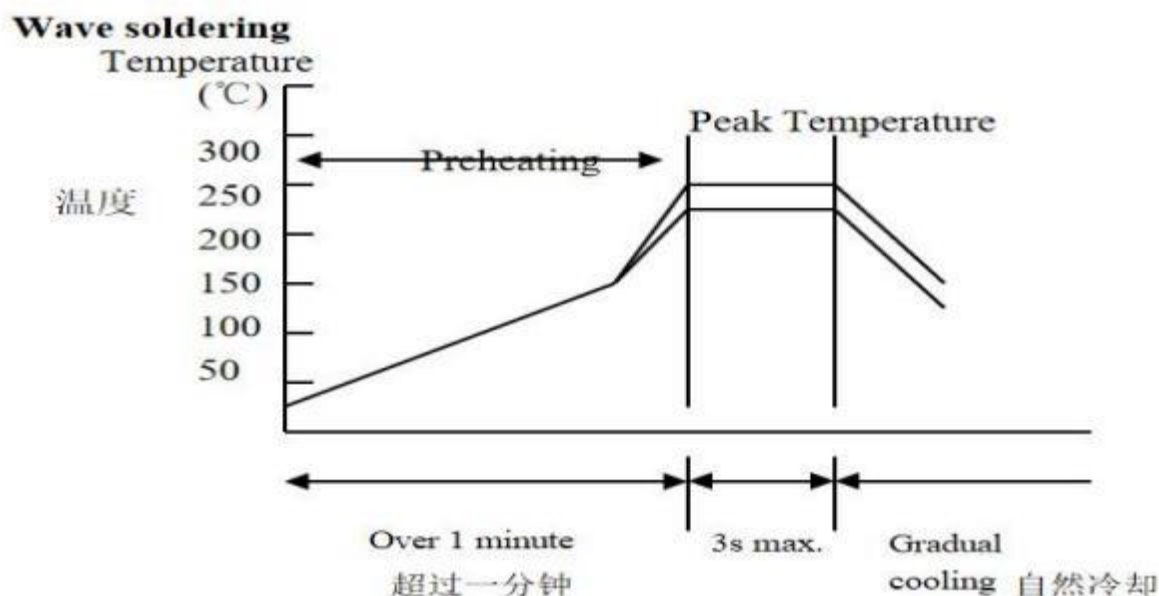

	Pb-Sn 焊接 Pb-Sn soldering	无铅焊接 Lead-free soldering
尖峰温度 Peak temperature	230℃~260℃	240℃~270℃

Shenzhen Helixun Technology Co., Ltd.
Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang Street, Bao'an District, Shenzhen City, Guangdong Province

Dimensions of paper taping for 0603types

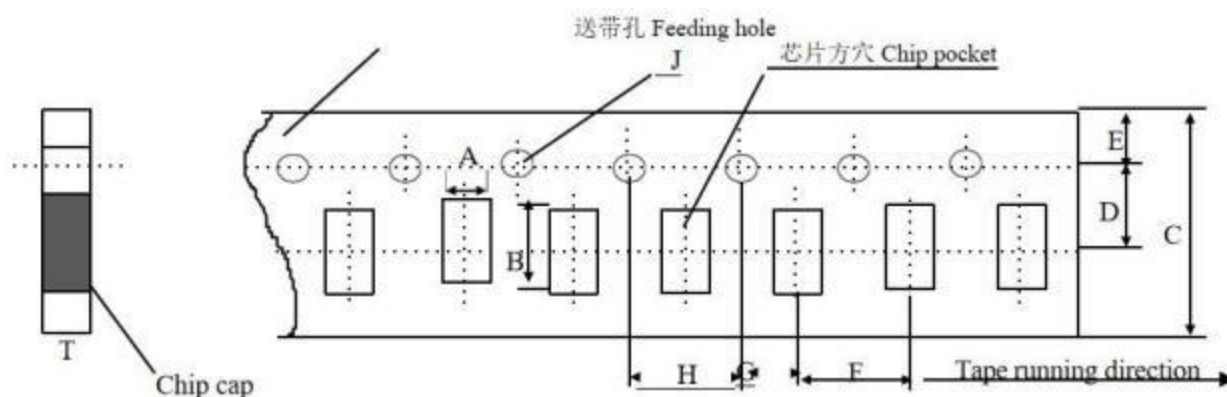


Unit: mm

代号 Code 纸带规格 papersize	A	B	C	D*	E	F	G*	H	J	T
0603	1.10 ±0.10	1.90 ±0.10	8.00 ±0.10	3.50 ±0.05	1.75 ±0.10	4.00 ±0.10	2.00 ±0.10	4.00 ±0.10	1.50 -0/+0.10	1.10 Max

Reel (4000 pcs/Reel)

Note: The place with means where needs exactly dimensions.

EMBOSED TAPING

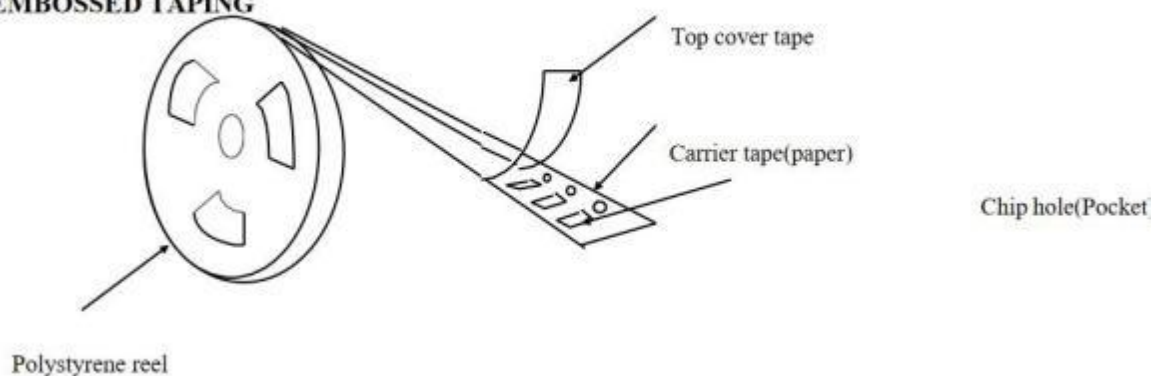

Storage Per iod

The guaranteed period for solderability is 6 months (Under deliver package condition). Temperature 5~40℃ /Relative Humidity20~70%

Shenzhen Helixun Technology Co., Ltd.
Room 1004, Jinhuan Yu Building, No. 56 Tiezai Road, Xixiang
Street, Bao'an District, Shenzhen City, Guangdong Province