FCC TEST REPORT

For

JinXuan Electronics (Hong Kong) Company Limited

MAGNETIC POWER BANK

Test Model: BAT102

Prepared for	:	JinXuan Electronics (Hong Kong) Company Limited
Address	:	ROOM 07 7/F PROSPER COMM BLDG 9 YIN CHONG STREET KL
Prepared by	:	Guangzhou LCS Compliance Testing Laboratory Ltd.
Address	:	No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China
Tel	:	(+86) 020-39166689
Fax	:	(+86) 020-39166619
Web	:	www.LCS-cert.com
Mail	:	webmaster@LCS-cert.com
Date of receipt of test sample	:	January 17, 2026
Number of tested samples	:	2
Sample No.	:	C251222008-1(Engineer sample), C251222008-2(Normal sample)
Date of Test	:	January 17, 2026 ~ January 20, 2026
Date of Report	:	January 20, 2026

FCC TEST REPORT KDB 680106 D01 Wireless Power Transfer v04		
Report Reference No.	**:**	**LCSC12225023EB**
Date of Issue	:	January 20, 2026
Testing Laboratory Name.....	**:**	**Guangzhou LCS Compliance Testing Laboratory Ltd.**
Address	:	No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China Baoan District, Shenzhen, China
Testing Location/ Procedure	:	Full application of Harmonised standards ■ Partial application of Harmonised standards □ Other standard testing method □
Applicant's Name	**:**	**JinXuan Electronics (Hong Kong) Company Limited**
Address	:	ROOM 07 7/F PROSPER COMM BLDG 9 YIN CHONG STREET KL
Test Specification		
Standard	:	FCC CFR 47 PART 1, § 1.1310 KDB 680106 D01 Wireless Power Transfer v04
Test Report Form No.....	**:**	LCSEMC-1.0
TRF Originator.....	:	Guangzhou LCS Compliance Testing Laboratory Ltd.
Master TRF.....	:	Dated 2023-12
Guangzhou LCS Compliance Testing Laboratory Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Guangzhou LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Guangzhou LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.		
EUT Description.	**:**	**MAGNETIC POWER BANK**
Trade Mark	:	1Hora
Test Model.....	:	BAT102
Ratings	:	Please Refer to Page 6
Result	:	**PASS**

Compiled by:	**Supervised by:**	**Approved by:**
Lifeng Le/ Administrators	Justin Zhu/ Technique Director	Gavin Liang/ Manager

ISED -- TEST REPORT

Test Report No. : **LCSC12225023EB**	January 20, 2026 Date of issue

Test Model.....	: BAT102
EUT.....	: MAGNETIC POWER BANK
Applicant.....	**: JinXuan Electronics (Hong Kong) Company Limited**
Address.....	: ROOM 07 7/F PROSPER COMM BLDG 9 YIN CHONG STREET KL
Telephone.....	: /
Fax.....	: /
Manufacturer.....	**: Jinxuan Electronics(Shenzhen) Co., Ltd.**
Address.....	: Room 901, Block A, Phase Ⅰ, Galaxy World, Longgang District, Shenzhen City, Guangdong Province, China
Telephone.....	: /
Fax.....	: /
Factory.....	**: ShenZhen Firstar Battery Co., Ltd**
Address.....	: Building 3 and Building 5, Jinxiu Industrial Park, Xitian Community, Gongming Sub-district, Guangming District, Shenzhen City
Telephone.....	: /
Fax.....	: /

Test Result	**PASS**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	January 20, 2026	Initial Issue	--

TABLE OF CONTENTS

1. GENERAL INFORMATION 6
1.1. DESCRIPTION OF DEVICE (EUT) 6
1.2. SUPPORT EQUIPMENT LIST 6
1.3 EXTERNAL I/O CABLE 6
1.4. DESCRIPTION OF TEST FACILITY 6
1.5. TEST EQUIPMENT 7
1.6. MEASUREMENT UNCERTAINTY 7
1.7. DESCRIPTION OF TEST MODES 7
1.8. COIL DESCRIPTION 8
1.10. COIL SPECIFICATIONS 8
1.11. DUTY CYCLE 8
2. TEST METHODOLOGY 10
2.1. REFERENCE EVALUATION METHOD 10
2.2. LIMIT 10
2.3. TEST SETUP DIAGRAM 10
2.4. MEASUREMENT PROCEDURE 11
2.5. EQUIPMENT APPROVAL CONSIDERATIONS OF KDB 680106 D01V04 12
3. TEST RESULTS 13
3.3 CONCLUSION 17
4. TEST SETUP PHOTOS 18

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	MAGNETIC POWER BANK
Test Model	:	BAT102
Ratings	:	Battery Capacity: 3.85V, 10000mAh Type-C Input: 5V⎓3A, 9V⎓2A Type-C Output: 5V⎓3A, 9V⎓2.22A, 10V⎓2.25A, 12V⎓1.67A WIRELESS POWER: 15W / 10W / 7.5W / 5W
Hardware Version	:	/
Software Version	:	/
Wireless Charging	:	
Operating Frequency	:	110.0-150.0KHz
Modulation Type	:	ASK
Antenna Type	:	Coil Antenna

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.

1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Huawei	Adapter	HW-200500C02	--	FCC
Samsung	Mobile phone	Galaxy S25	--	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C USB Port	1	N/A

1.4. Description of Test Facility

Site Description

EMC Lab. : CNAS Registration Number is L11555
A2LA Certificate Number: 5099.01
FCC Designation Number is CN1379
Test Firm Registration Number: 729882

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2025-11-10	2026-11-09
B-Field Probe	Narda	100cm²	M-1154	2025-09-27	2026-09-26

Exposure Level Tester ELT-400 detailed parameters are as follows:

Common parameter	
Operating temperature	-10 °C ~ +50 °C
Operation humidity	< 95 % (30 °C) or < 29 g/m³
Weight	910 g
Size	180 mm x 100 mm x 55 mm(Main engine) / 290 mm x 125 mm Ø (Probe)
Display	LCD backlit display, 4 refresh rates per second
Battery	Nimh battery (4 x Mignon, AA), rechargeable
Operating time, typical	12 h
Power supply	100 ~240 V AC / 47 ~ 63 Hz
Charging time, typical	2 hours
Recommended calibration cycle	24 months
Country of origin	Germany

1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Field Strength Uncertainty	:	1Hz~400KHz	1%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Modes		
Mode 1	AC/DC Adapter (9V/2A) + EUT + Mobile phone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (9V/2A) + EUT + Mobile phone (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter (9V/2A) + EUT + Mobile phone (Battery Status: 100%)	Record
Mode 4	AC/DC Adapter (5V/3A) + EUT + Mobile phone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (5V/3A) + EUT + Mobile phone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (5V/3A) + EUT + Mobile phone (Battery Status: 100%)	Pre-tested
Note: All test modes were pre-tested for ac and dc mode, but we only recorded the worst case in this report for ac mode.		

1.8. Coil Description

Config.	Mode	Descriptions
1	Standby (Flatbed Position) @125.5kHz	EUT Alone powered by AC/DC adapter
2	Operating (Flatbed Position) (Phone @125.5KHz ~10%, 20~50%, and >75% Power Charging)	EUT with lightning to AC/DC Adapter & Wireless Charging to WPT Client. 15W: Direct Contact 15W: 2mm Airgap, 2mm Shift Top as Worst-Case Position

1.9. Coil Size

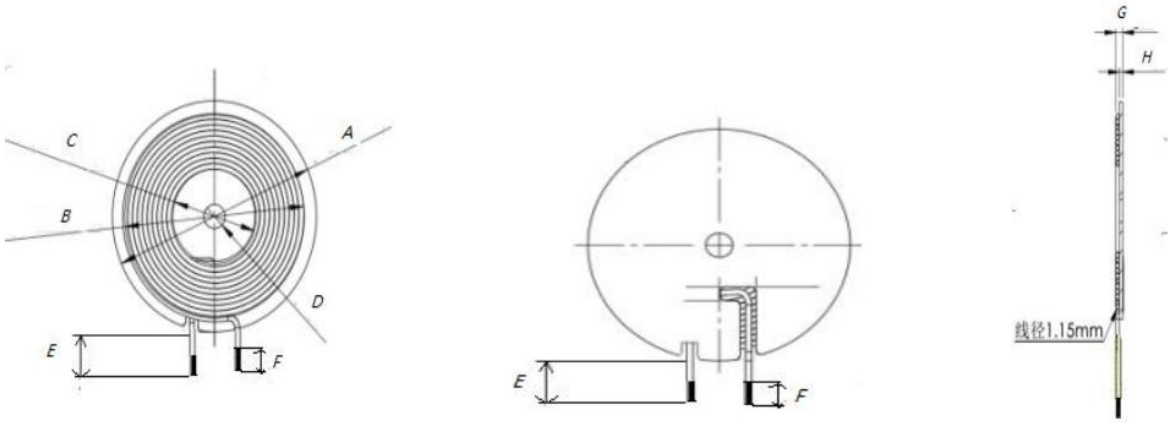

标准	A	B	C	D	E	F	G	
STD	43.5±0.5	40.5±1	17.5±0.3	5.3±0.5	46±2	3±1	2.2±0.3	

单位： MM

(Unit: mm)

1.10. Coil Specifications

Item	Parameter
Input inductance:	Transmitter 1: 6.5 μH±10%
Material of enclosure(s):	Multiple strands of enamelled wire
Number of turns:	Transmitter 1: 10 turns

1.11. Duty Cycle

Mode	ON Time (ms)	Period (ms)	Duty Cycle (%)
Operating (110.0-150.0kHz)	/	/	100

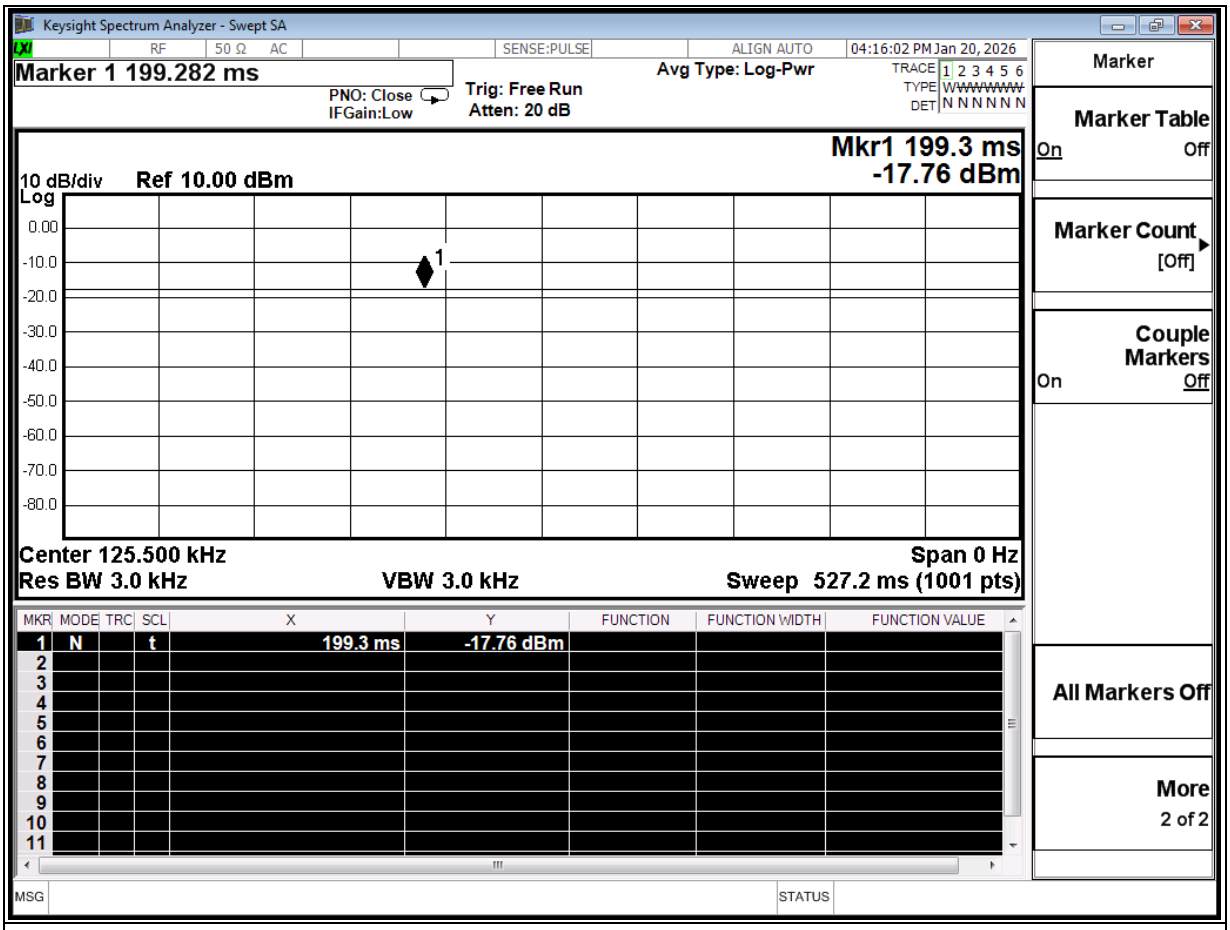

(110.0-150.0kHz)

2. TEST METHODOLOGY

2.1. Reference Evaluation Method

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v04: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1093: Radiofrequency radiation exposure evaluation: portable devices

FCC CFR 47 part 18.107: Indusial, Scientific, and Medical Equipment

April 2024 TCBC Workshop: Part 18 Wireless Power Transfer Devices: Clarifications on KDB 680106v04 and ECR Processes

2.2. Limit

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm^2)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	**614**	**1.63**	***(100)**	**≤6**
3.0-30	**1842/f**	**4.89/f**	***(900/f2)**	**<6**
30-300	**61.4**	**0.163**	**1.0**	**<6**
300-1500	**/**	**/**	**f/300**	**<6**
1500-100000	**/**	**/**	**5**	**<6**
mits fo(ii) Lir General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f^2)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/1500	<30
1500-100000	/	/	1.0	<30

f = frequency in MHz
* = Plane-wave equivalent power density
Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.
Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

2.3. Test Setup Diagram

Mobile Exposure Conditions

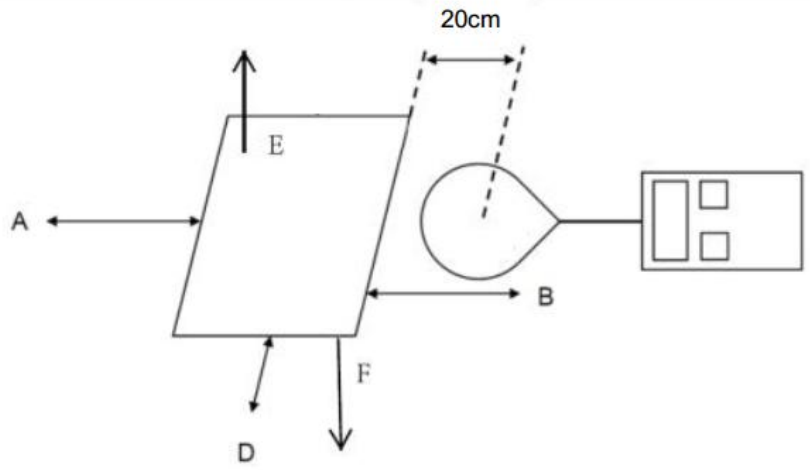

Note: The distance of the points A/B/C/D/E is 20cm.

Portable Exposure Conditions:

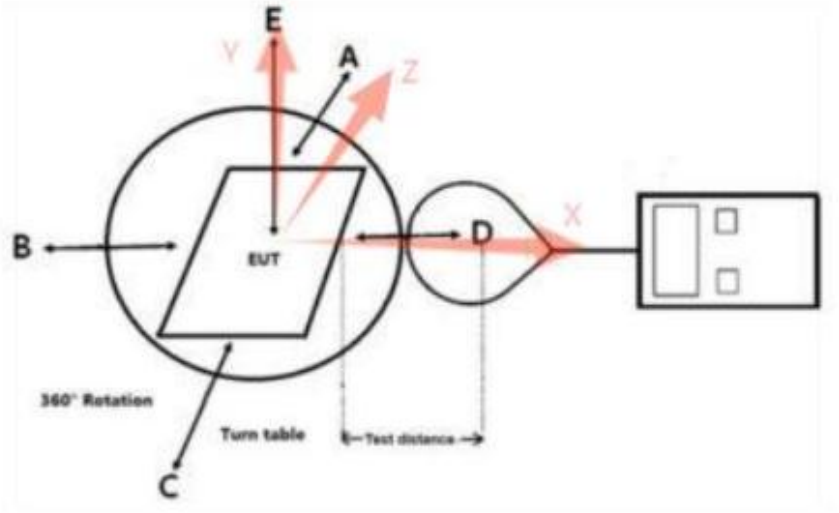

Note: The distance of the points A/B/C/D/E/F is 0,2,4,6,8,10,12,14,16,18, 20cm.
The values tested by the probe are X, Y, and Z on three axes perpendicular to the edge of the device. Top and bottom side coincident with the axis(Y) of the main coil.

2.4. Measurement Procedure

Mobile Exposure Conditions

a. The RF exposure test was performed in anechoic chamber.

b. E and H-field measurements should be made with the center of the probe at 20 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.

c. The highest emission level was recorded and compared with limit.

d. The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

Portable Exposure Conditions

a. The RF exposure test was performed in anechoic chamber.

b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm

c. The highest emission level was recorded and compared with limit.
d. The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

2.5. Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operates in the frequency range 110.0-150.0kHz
The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes	The maximum output power of each primary coil is 15W.
A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes	Client device is placed directly in contact with the transmitter.
Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	No	Mixed mobile and portable exposure conditions
The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes	The E-field and H-field strengths from all simultaneous transmitting coils are demonstrated to less than 50% of the MPE limit.
For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested	Yes	Only one radiating structure and tested at maximum Output Power

3. TEST RESULTS

For portable exposure condition

(1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.

(2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

(3) Test performed with all the radiating structures operating at maximum power at the same time.

(4) H-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.

(5) Validation of Field Estimates

(a) If R is the probe radius and the probe tip is in contact with the coil, then the probe center is R cm from the coil surface as bellowing picture

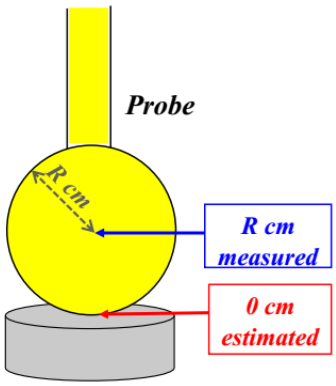

(b) The probe then is measuring the field correctly at R cm from the surface, and only estimating the field at the 0 cm point of contact with the coil surface.

(c) The validation requires showing that the model used to estimate the field provides data within 30% accuracy for at least the two, 2-cm-spaced closest points to where the estimates were made.

(d) If there is only one estimated value, then a single validation point is sufficient.

(e) Validation Example for 4 cm Probe Radius as following

Step 1

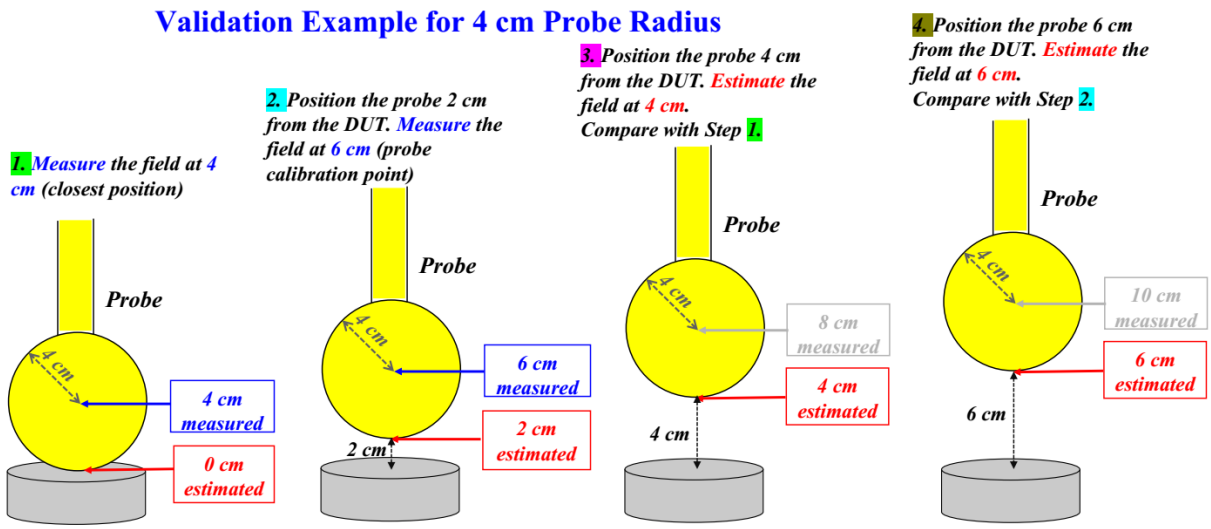

Step 2

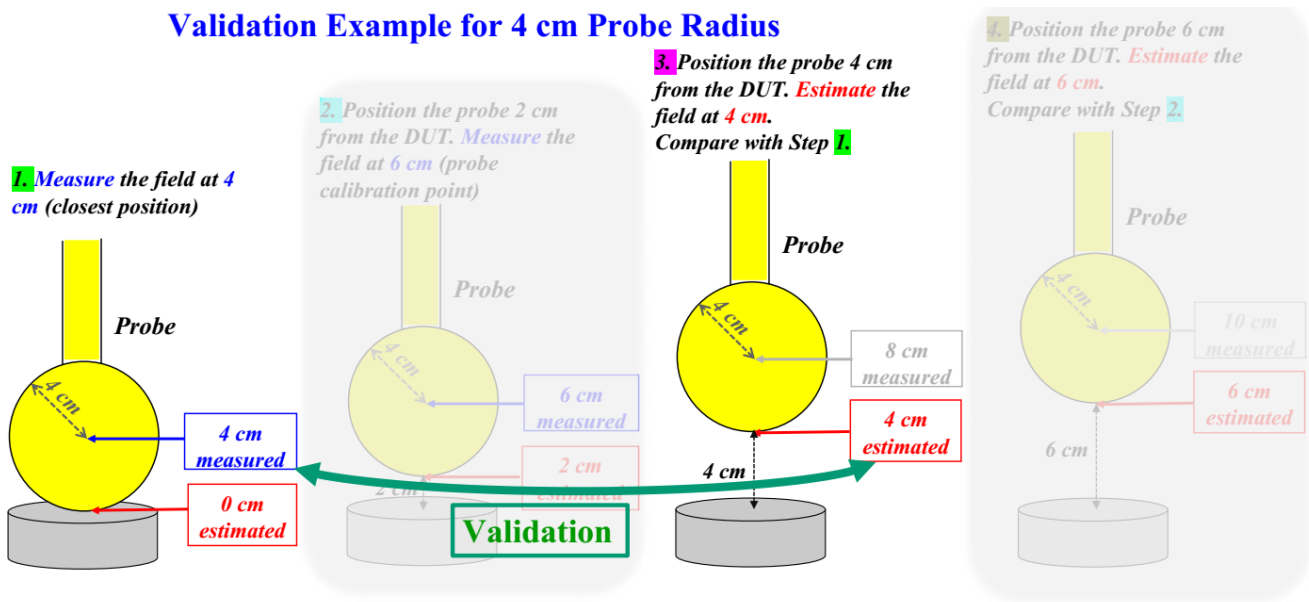

Step 3

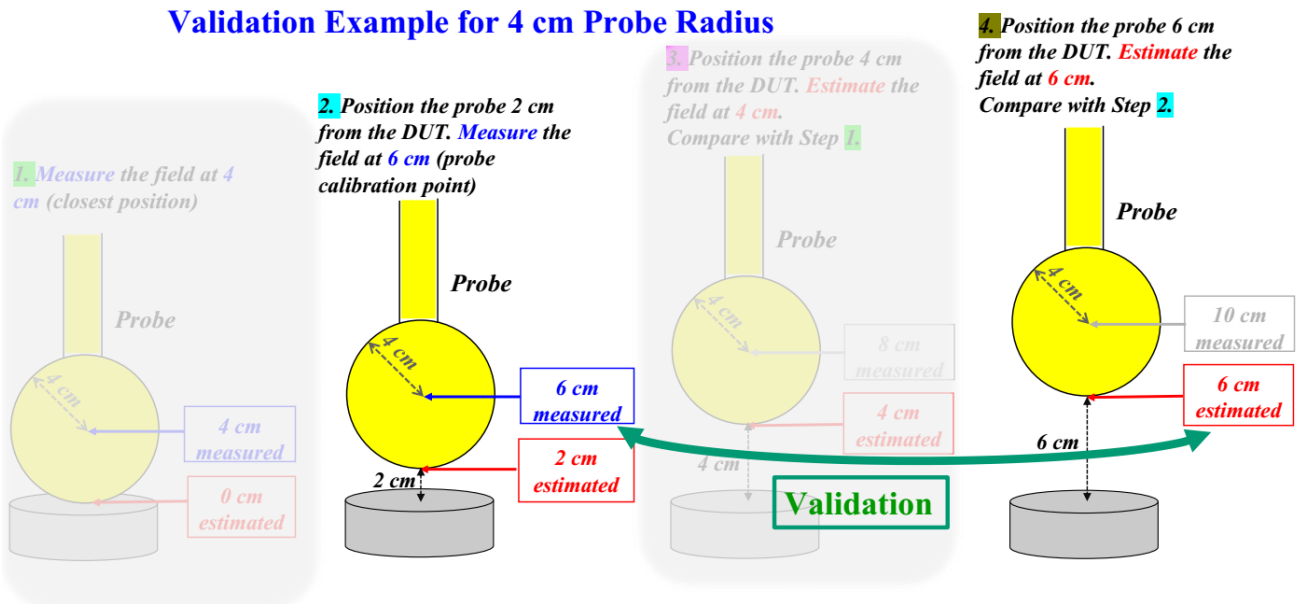

Description of the Validation Example for 4 cm Probe Radius

- Assume that R=4 cm. The field at 0 cm can only be estimated, but the field at 4 cm is measured exactly (at the center of the probe).
- Move the probe at 2 cm from the surface. The field at 2 cm can still only be estimated, but the field at 6 cm is measured exactly.
- Compare the estimates with the values at the same positions where the field was measured exactly (i.e., 4 cm and 6 cm)
- The difference between measurements and estimates needs to be no more than 30%.
- That validation of the estimates needs to be for the two closest points to the coil, but at least 2 cm apart (in this case they are). This is to avoid a validation at, say 2 cm and another one at 2.1 cm, that is essentially a repetition

(6) According to Calibration information and specification about ETL-400 Probe (the B-Field Probe size is 100cm^2, the probe radius is 6.25cm), The Probe ETL-400 Probe's sensitive elements center is located in the probe's center, and the distance from the sensitive elements center to the tip of probe is 6.25cm.

(7) The actual 0cm, 2cm, 4cm and 6cm field strengths need to be estimated for the positions that are not

reachable via numerical calculation.

(8) Use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

Top & Bottom Side:

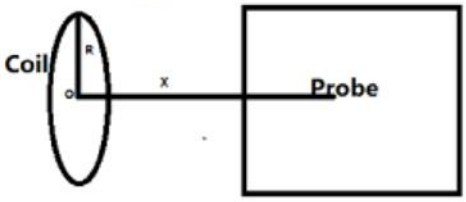

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

Front, left, right & rear Side:

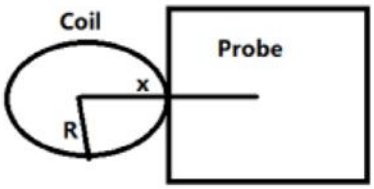

$$B = \frac{\mu_0 * I * N}{2 * x}$$

B(Unit:A/m): means H-field value;

μ0 is space permeability; **μ**0=4π*10^{-7};

I(Unit:A): A current element passing through a radiated coil;

R(Unit:m): means the Radius of radiated coil, according to provided Antenna specification: R=0.0212m;

Test Distance(Unit:m): The distance from the sensing element of the probe to the edge of the device surface.

x(Unit:m): means the center of the coil to the sensing elements of the probe. (x=test distance+R)

N: Number of turns, according to providing “Antenna specification” files: N=10.

(9) For validation purposes: If the value to show a 30% agreement between the mode and the probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

(10) Validation E-Field and H-Field as bellowing;

Validation Mode: TM1 Unit: Agreement(%); H-Field(A/m)							
	Top	Bottom	Left	Right	Front	Back	Conclusion
Estimated Distance: 6.25 cm	0.4980	0.5320	0.4228	0.4869	0.3847	0.5376	PASS
Measured Distance: 6.25 cm	0.4493	0.5418	0.3914	0.4677	0.3093	0.4959	
contrast(%)	10.84	-1.81	8.02	4.11	24.38	8.41	
Estimated Distance: 8.25 cm	0.2883	0.2515	0.3143	0.2152	0.4496	0.2813	PASS
Measured Distance: 8.25 cm	0.3278	0.2338	0.2970	0.2700	0.4381	0.2382	
contrast(%)	-12.05	7.57	5.82	-20.30	2.62	18.09	
Estimated Distance: 10.25 cm	0.0929	0.6506	0.1725	0.2296	0.2809	0.1937	PASS
Measured Distance: 10.25 cm	0.1244	0.5461	0.2260	0.1198	0.2581	0.1494	
contrast(%)	-25.32	19.14	-23.67	91.65	8.83	29.65	

Validation Mode: TM1 Unit: Agreement(%); E-Field(V/m)							
	Top	Bottom	Left	Right	Front	Back	Conclusion
Estimated Distance: 6.25 cm	30.5606	29.3458	28.9609	25.7801	25.2873	24.1081	PASS
Measured Distance: 6.25 cm	28.9196	26.8321	27.7487	23.7862	22.8608	22.5172	
contrast(%)	5.67	9.37	4.37	8.38	10.61	7.07	
Estimated Distance: 8.25 cm	28.2224	26.6196	26.0875	22.2851	21.5244	21.2670	PASS
Measured Distance: 8.25 cm	24.4782	23.1033	23.6504	20.7616	19.4729	19.2816	
contrast(%)	15.30	15.22	10.30	7.34	10.54	10.30	
Estimated Distance: 10.25 cm	25.6843	23.4219	24.2625	20.9010	20.0492	18.1997	PASS
Measured Distance: 10.25 cm	22.4008	21.2493	21.6859	17.6744	16.2400	16.4310	
contrast(%)	14.66	10.22	11.88	18.26	23.46	10.76	

Note 1: The compliance location as probe tip;
Note 2: The format of difference is;
The E Validation Difference = $(E_{Estimated\ Distance} - E_{Measured\ Distance})/ E_{Measured\ Distance}$ *100%
The H Validation Difference = $(H_{Estimated\ Distance} - H_{Measured\ Distance})/ H_{Measured\ Distance}$ *100%

H-Field and E-Field Emission level with a combination of measured and estimated results.

Test condition: Mode 1

Distance(cm)	H-Field Result(A/m)							Limit(A/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	0.8198	0.8043	0.6393	0.4080	0.6391	0.4200	1.63
2	Estimate	0.7710	0.5857	0.6382	0.4884	0.5869	0.5286	1.63
4	Estimate	0.5871	0.6193	0.6664	0.6966	0.5539	0.5085	1.63
6	Estimate	0.4493	0.5418	0.3914	0.4677	0.3093	0.4959	1.63
8	Measured	0.2883	0.2515	0.3143	0.2152	0.4496	0.2813	1.63
10	Measured	0.1244	0.5461	0.2260	0.1198	0.2581	0.1494	1.63
12	Measured	0.1923	0.2362	0.2421	0.1527	0.2492	0.2221	1.63
14	Measured	0.2648	0.1709	0.1900	0.2603	0.1199	0.1965	1.63
16	Measured	0.1410	0.2035	0.2044	0.1661	0.2876	0.2836	1.63
18	Measured	0.0973	0.1290	0.1804	0.1239	0.2711	0.1834	1.63
20	Measured	0.1681	0.2044	0.1183	0.2310	0.2610	0.1968	1.63

Distance(cm)	E-Field Result(V/m)							Limit(V/m)
	Type	Top	Bottom	Left	Right	Front	Back	
0	Estimate	37.6925	36.2890	36.3628	32.1993	31.7355	31.4009	613
2	Estimate	34.5115	34.2219	33.7983	30.8787	29.7221	29.2188	613
4	Estimate	31.3791	30.6944	31.0337	27.7857	27.1314	26.6231	613
6	Estimate	28.9196	26.8321	27.7487	23.7862	22.8608	22.5172	613
8	Measured	24.4782	23.1033	23.6504	20.7616	19.4729	19.2816	613
10	Measured	22.4008	21.2493	21.6859	17.6744	16.2400	16.4310	613
12	Measured	20.2058	19.1677	19.7433	15.4795	13.6316	13.4057	613
14	Measured	17.2474	16.8386	16.9708	13.2039	11.6351	11.3947	613
16	Measured	15.8021	14.8361	15.4337	10.1904	9.3334	9.2318	613
18	Measured	12.5817	11.4970	12.2459	8.5325	7.5876	7.2855	613
20	Measured	7.6267	7.3320	7.5870	5.3683	4.3077	3.8274	613

3.3 Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure. The detected emissions are below the limitations according FCC KDB 680106.

4. TEST SETUP PHOTOS

(The separation distance from the geometric center of the probe to the edge of the device is 6.25cm)

0cm-Left

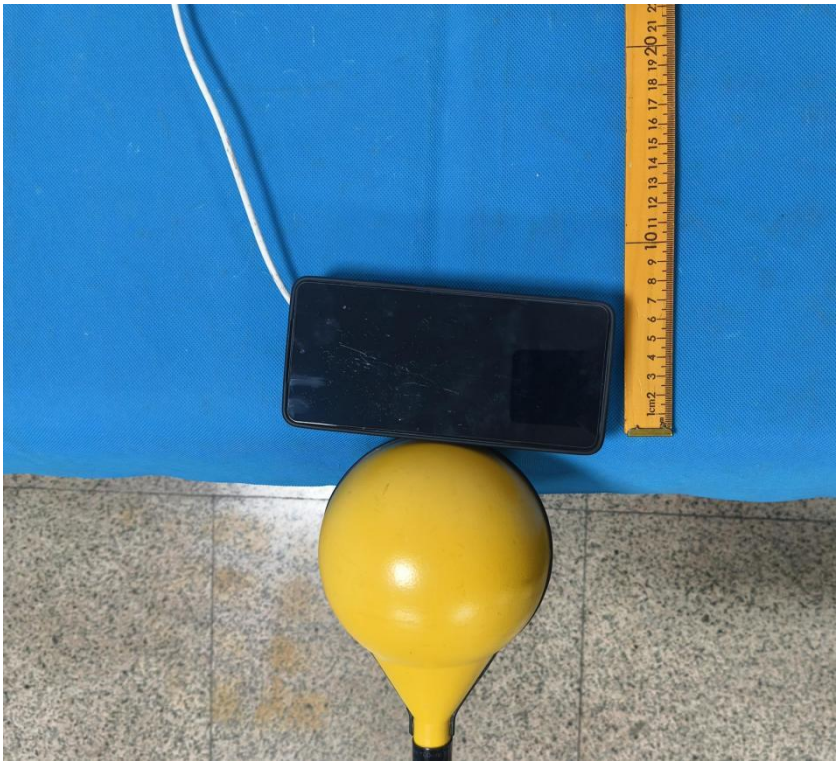

0cm-Right

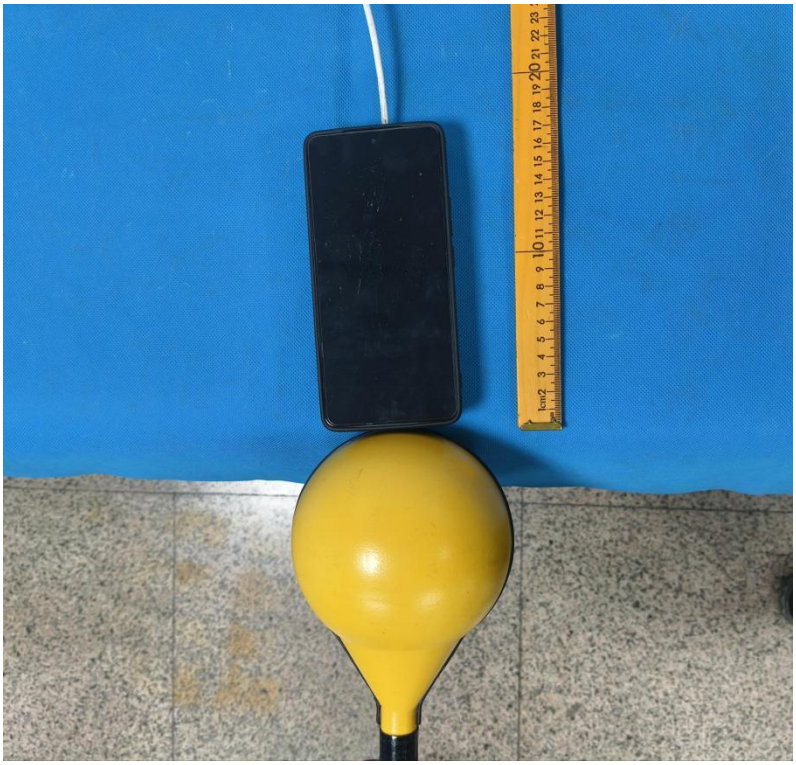

0cm-Top

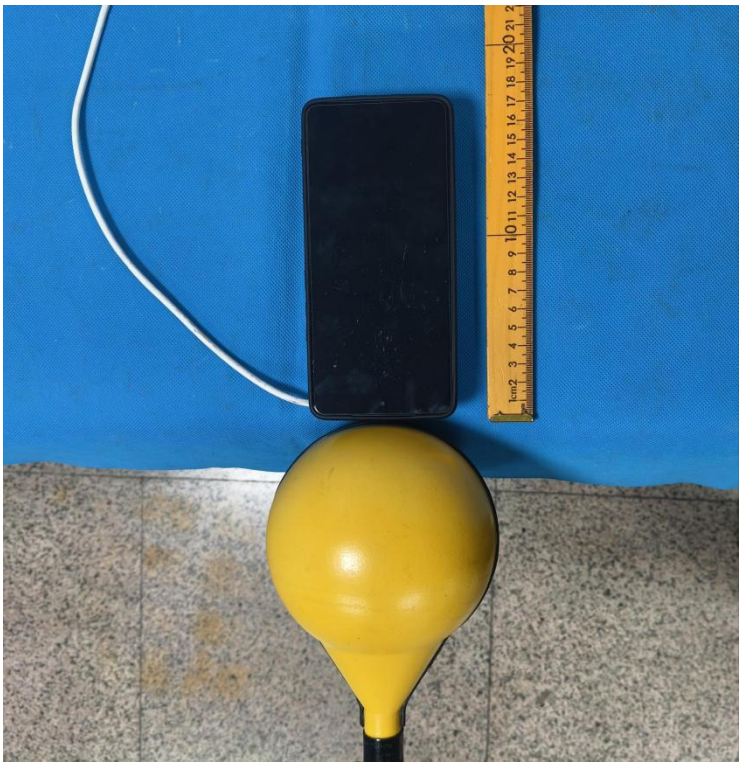

0cm-Bottom

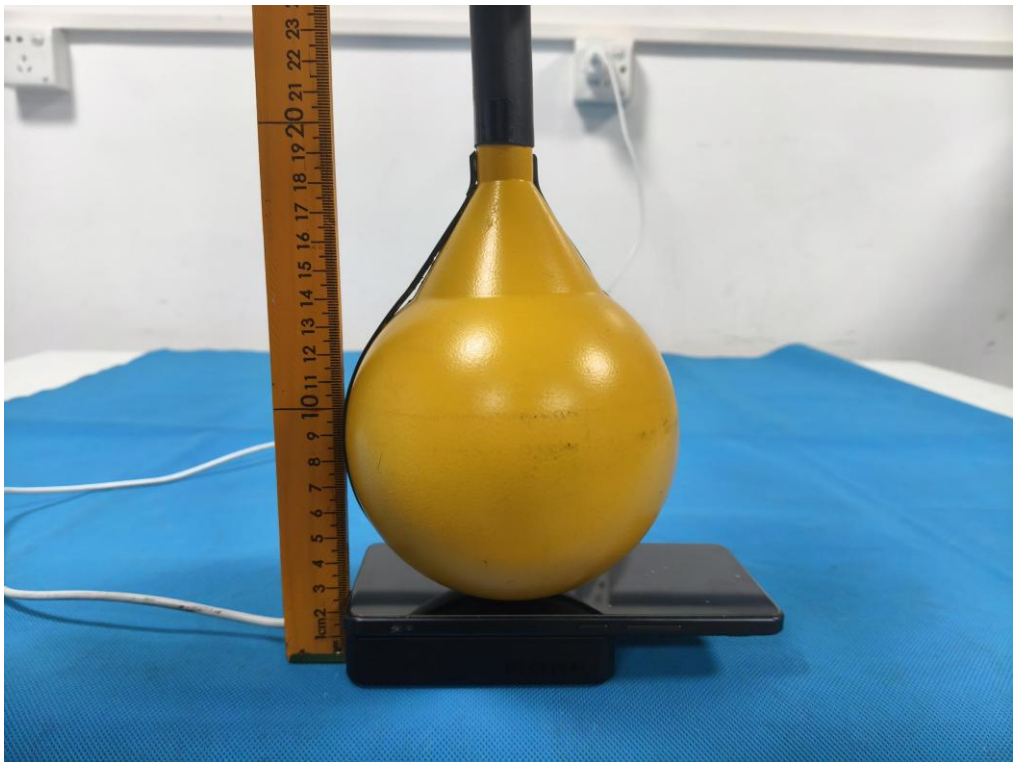

0cm-Front

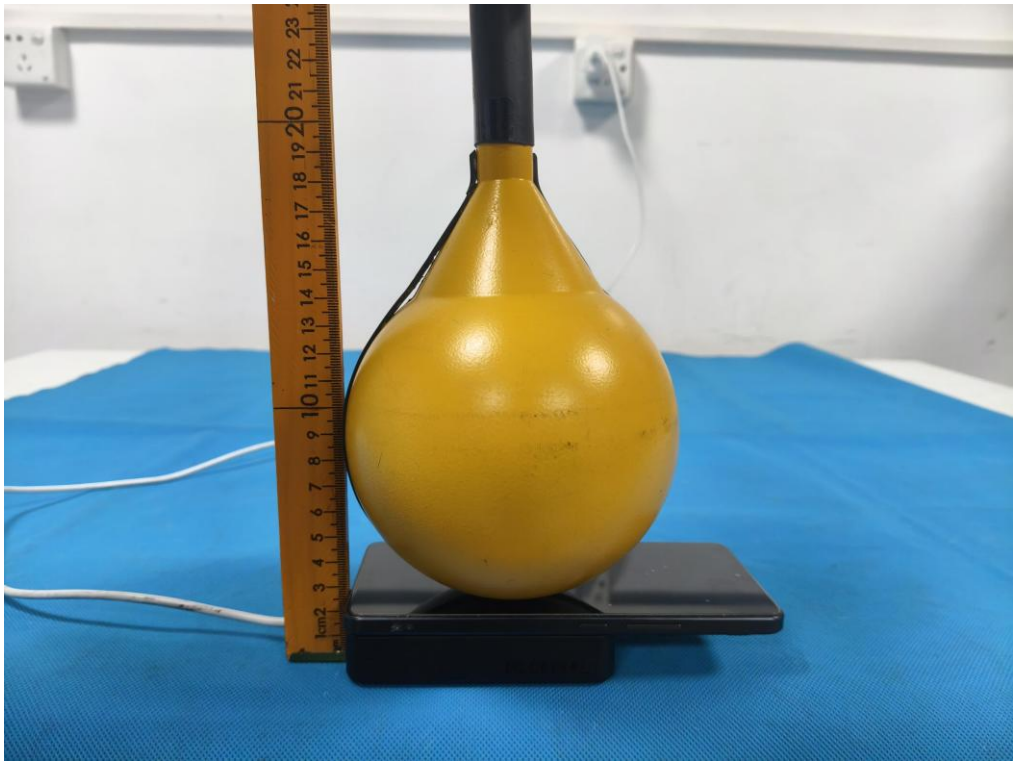

0cm-Back

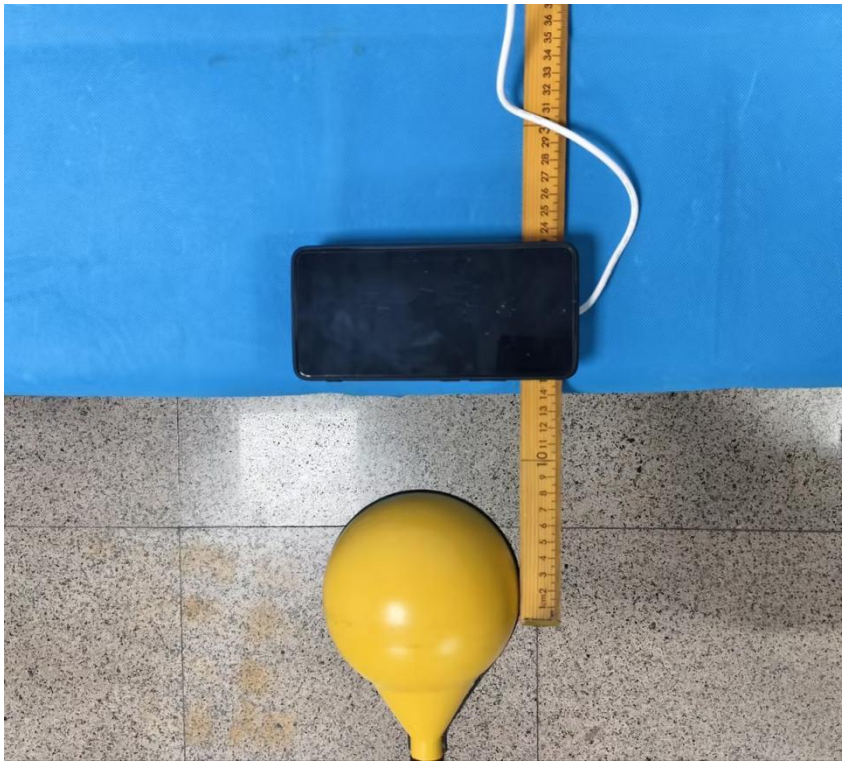

20cm-Left

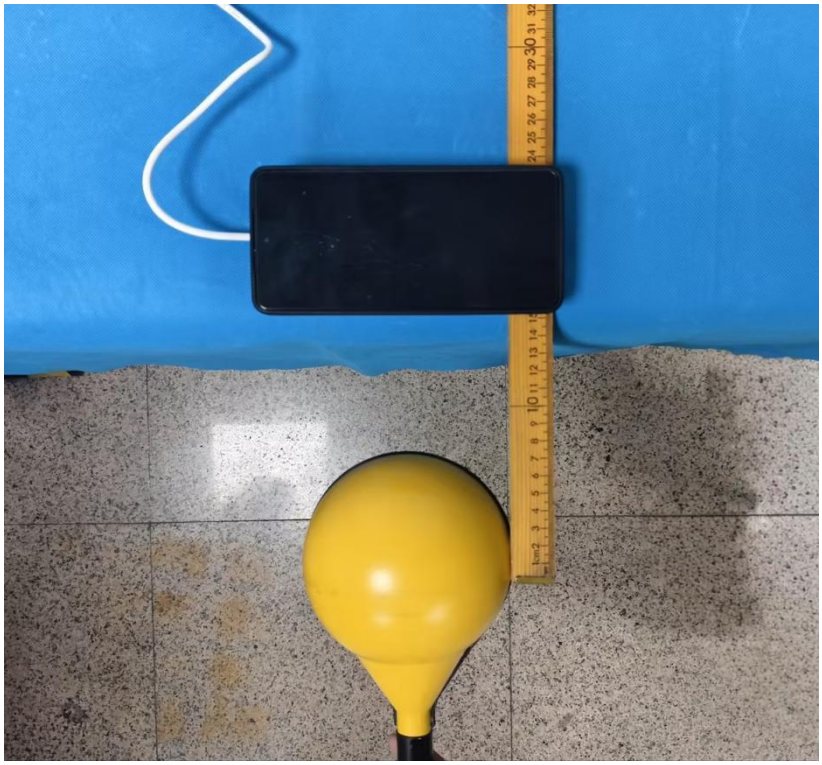

20cm-Right

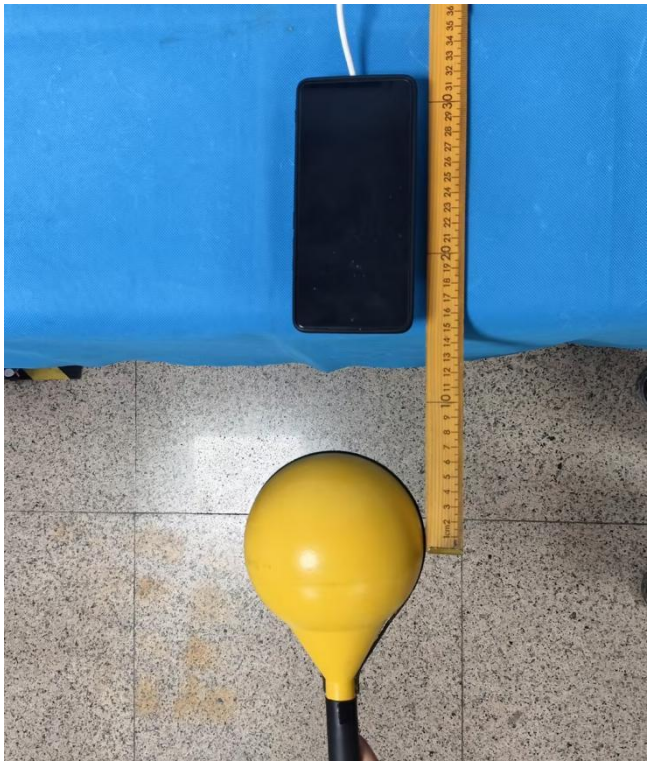

20cm-Top

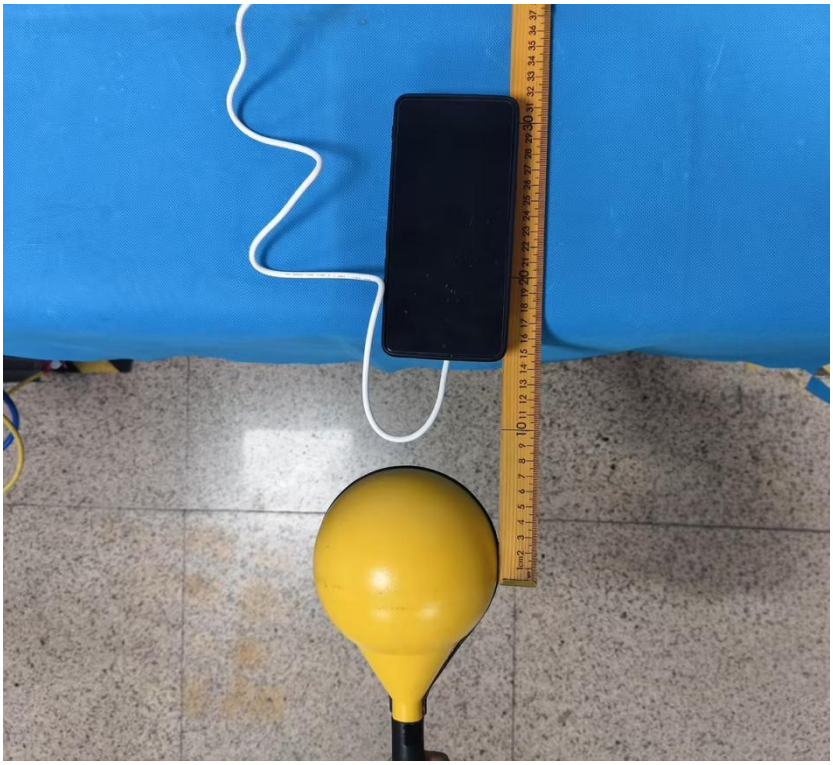

20cm-Bottom

20cm-Front

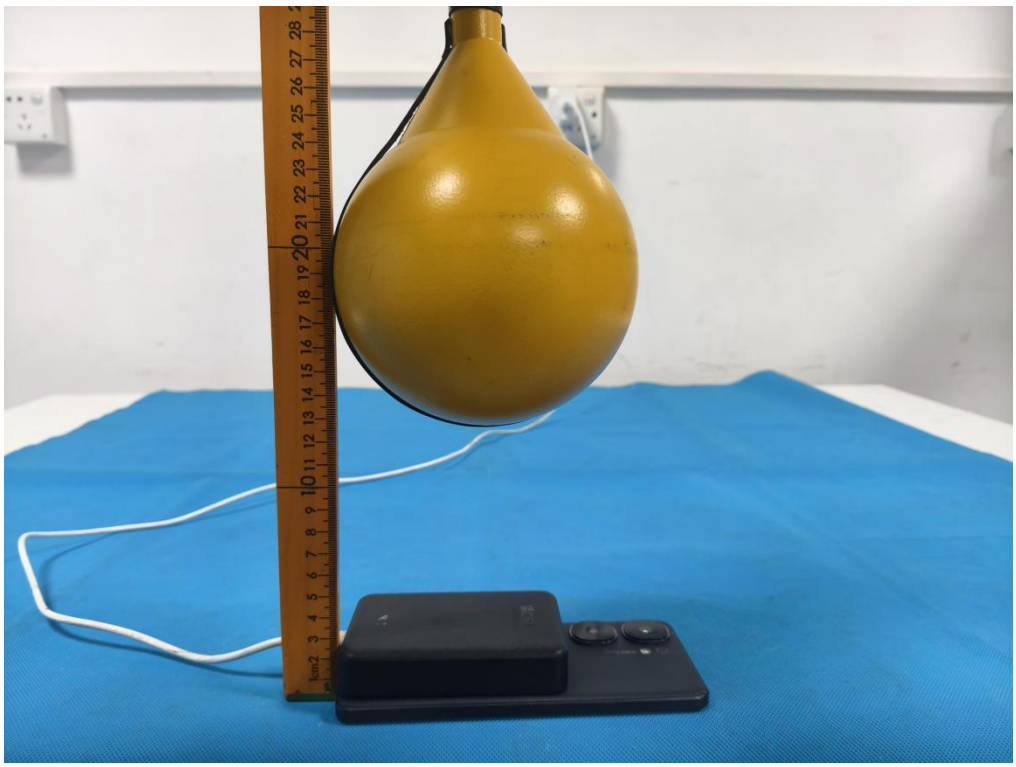

20cm-Back

----------THE END OF REPORT----------