

10. Frequency Stability Measurement

10.1. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


10.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

10.3. Test procedures

- (1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- (2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.
- (3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

10.4. Test setup

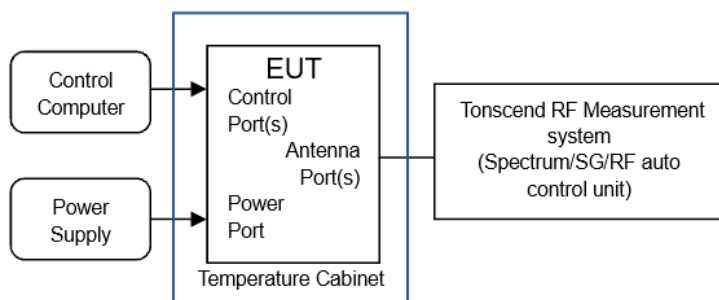

10.5. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.6°C, 45.1%RH	Test Date:	2025.08.13
Test Power Supply:	DC 12V	Sample Number:	S24031305-002

Voltage								
Test Mode	Antenna	Frequency [MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5745	NV	NT	-20000.00	-3.481288	20	PASS
			LV	NT	-20000.00	-3.481288	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5785	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5825	NV	NT	-20000.00	-3.433476	20	PASS
			LV	NT	-20000.00	-3.433476	20	PASS
			HV	NT	-20000.00	-3.433476	20	PASS
11N40SISO	Ant1	5755	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
		5795	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS
11AC80SISO	Ant1	5775	NV	NT	0.00	0.000000	20	PASS
			LV	NT	0.00	0.000000	20	PASS
			HV	NT	0.00	0.000000	20	PASS

Temperature								
Test Mode	Antenna	Frequency [MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5745	NV	-20	0.00	0.000000	20	PASS
			NV	-10	-20000.00	-3.481288	20	PASS
			NV	0	-20000.00	-3.481288	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	-20000.00	-3.481288	20	PASS
			NV	40	-20000.00	-3.481288	20	PASS
			NV	50	-20000.00	-3.481288	20	PASS
			NV	60	-20000.00	-3.481288	20	PASS
			NV	70	-20000.00	-3.481288	20	PASS
		5785	NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
			NV	60	0.00	0.000000	20	PASS
			NV	70	-20000.00	-3.481288	20	PASS
		5825	NV	-20	0.00	0.000000	20	PASS
			NV	-10	-20000.00	-3.433476	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	-20000.00	-3.433476	20	PASS
			NV	50	0.00	0.000000	20	PASS
			NV	60	0.00	0.000000	20	PASS
			NV	70	0.00	0.000000	20	PASS
11N40SISO	Ant1	5755	NV	-20	0.00	0.000000	20	PASS

			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
			NV	60	0.00	0.000000	20	PASS
			NV	70	0.00	0.000000	20	PASS
		5795	NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
			NV	60	0.00	0.000000	20	PASS
			NV	70	0.00	0.000000	20	PASS
11AC80SIS O	Ant1	5775	NV	-20	0.00	0.000000	20	PASS
			NV	-10	0.00	0.000000	20	PASS
			NV	0	0.00	0.000000	20	PASS
			NV	10	0.00	0.000000	20	PASS
			NV	20	0.00	0.000000	20	PASS
			NV	30	0.00	0.000000	20	PASS
			NV	40	0.00	0.000000	20	PASS
			NV	50	0.00	0.000000	20	PASS
			NV	60	0.00	0.000000	20	PASS
			NV	70	0.00	0.000000	20	PASS

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

11.2. Result



The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


12. Radiated Emission

12.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28	1 Year
Radiation disturbance fully automated test software	Tonscend	JS32-RE	DDT-ZC02739	/	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2026/07/06	1 Year
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	/	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28	1 Year

12.2. Block diagram of test setup

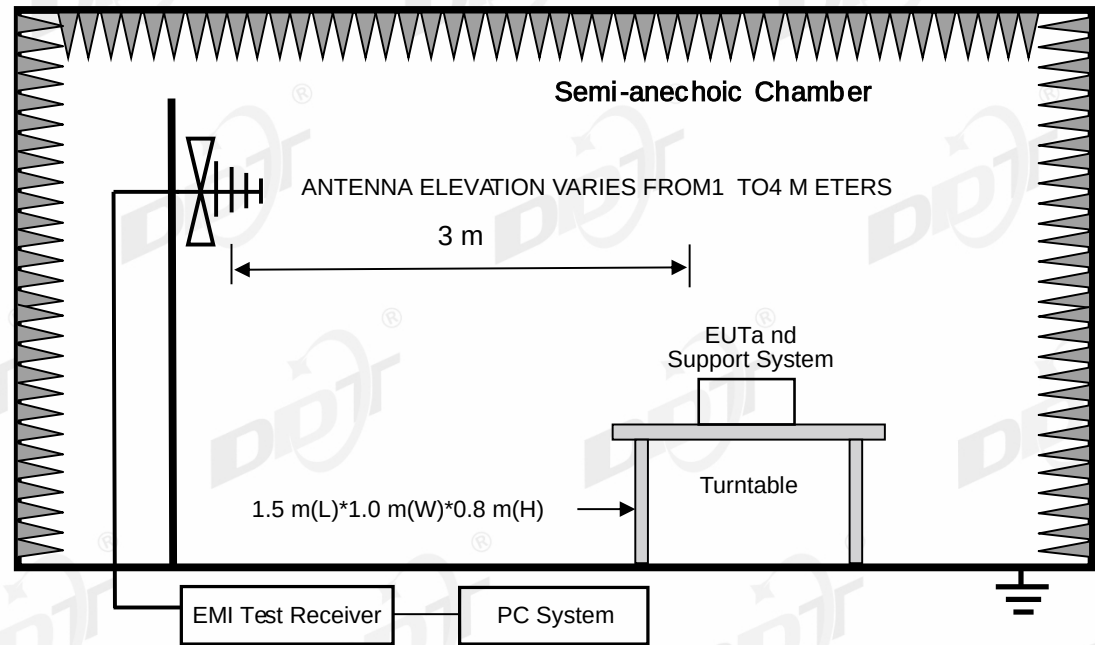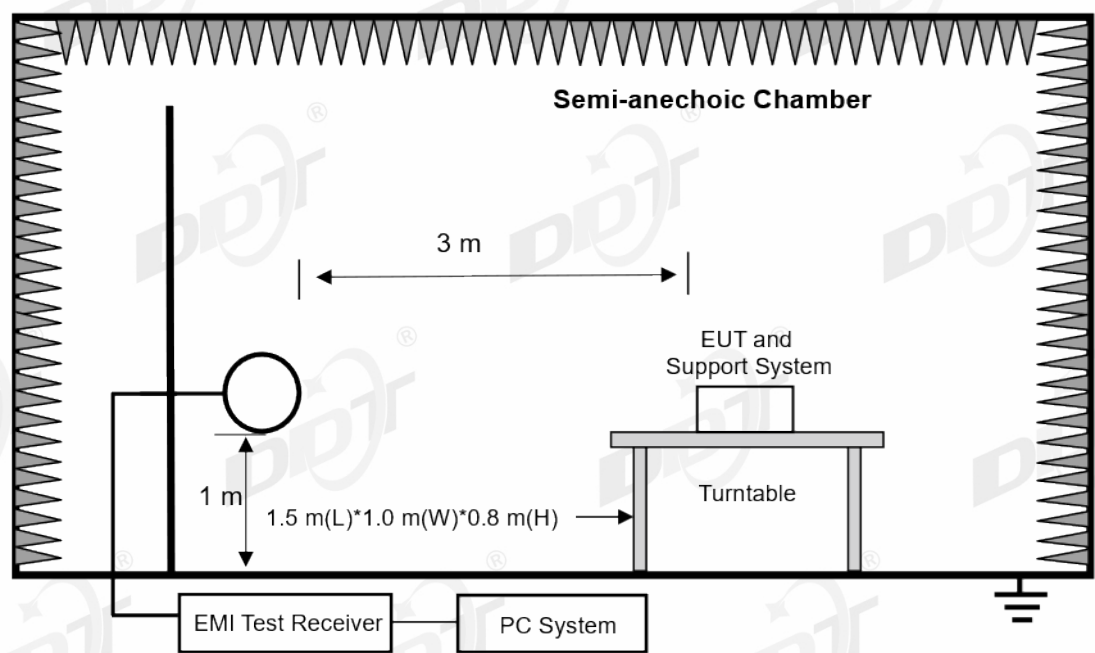

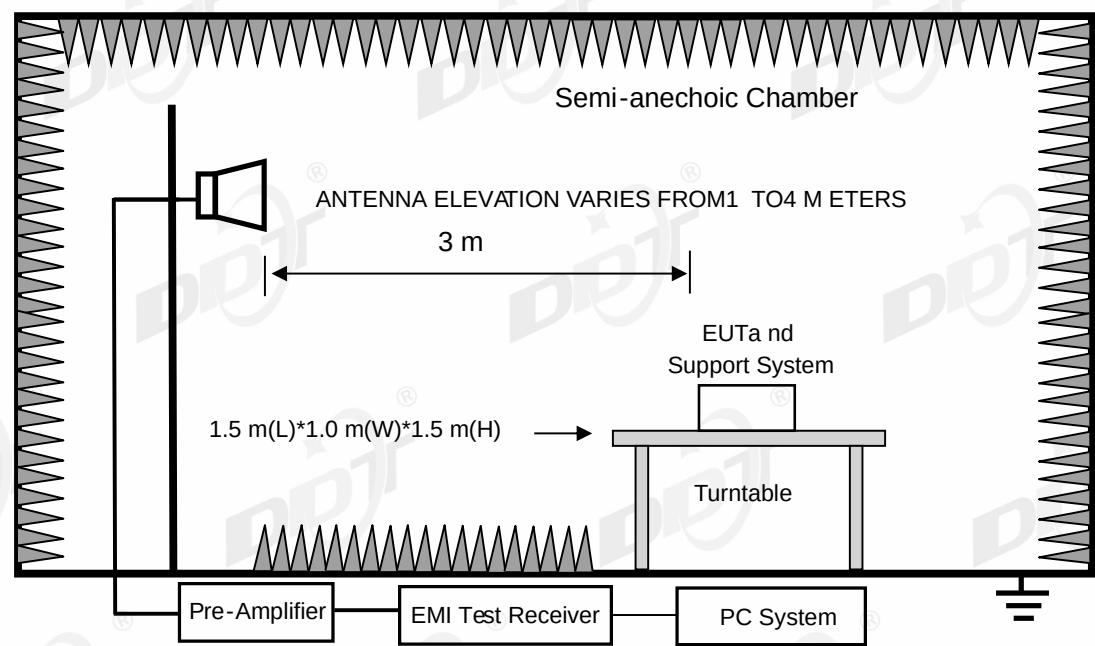

12.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit & RSS-Gen section 8.9 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\log(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

12.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

12.5. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz-40 GHz)	1 m

According ANSI C63.10:2020 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2020 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

(9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

(10) For 30 MHz ~ 25 GHz: (The worst case is record and reported)

(11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

12.6. Test result

PASS. (See below detailed test result)

12.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

TX 11n20 5875 Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC BELOW1G\9

Memo:

Sample Number:S24031305-003 Power Setting:63

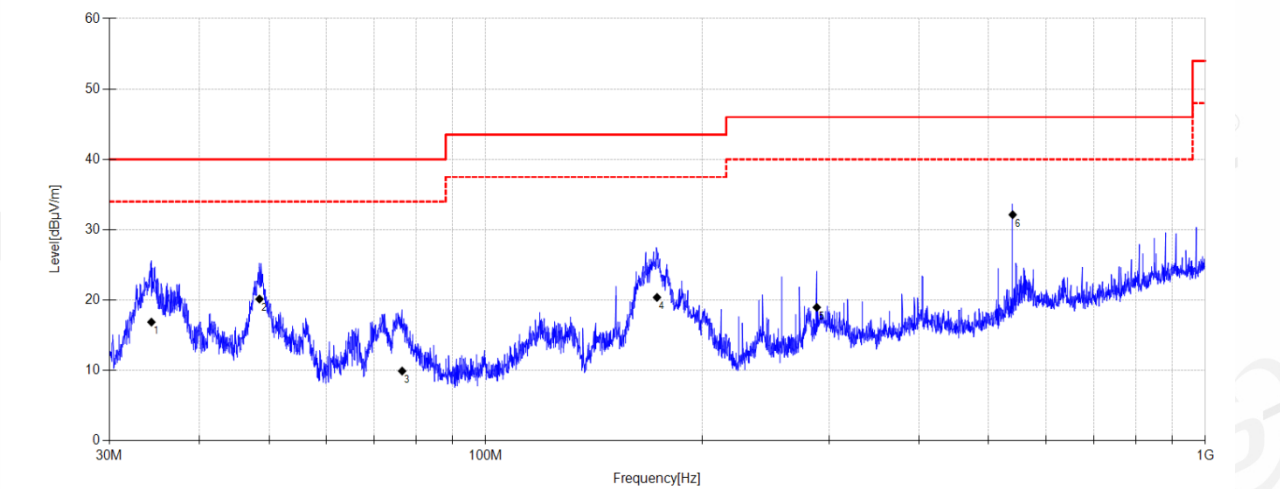

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	34.323	34.12	11.30	3.75	16.87	40.00	23.13	QP	Horizontal
2	48.497	35.17	13.40	3.87	20.14	40.00	19.86	QP	Horizontal
3	76.551	30.25	7.92	4.04	9.91	40.00	30.09	QP	Horizontal
4	173.023	38.57	9.79	4.39	20.38	43.50	23.12	QP	Horizontal
5	288.466	33.21	13.10	5.06	18.97	46.00	27.03	QP	Horizontal
6	539.923	41.37	17.40	6.06	32.13	46.00	13.87	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

TX 11n20 5875 Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC BELOW1G\10

Memo:

Sample Number:S24031305-003 Power Setting:63

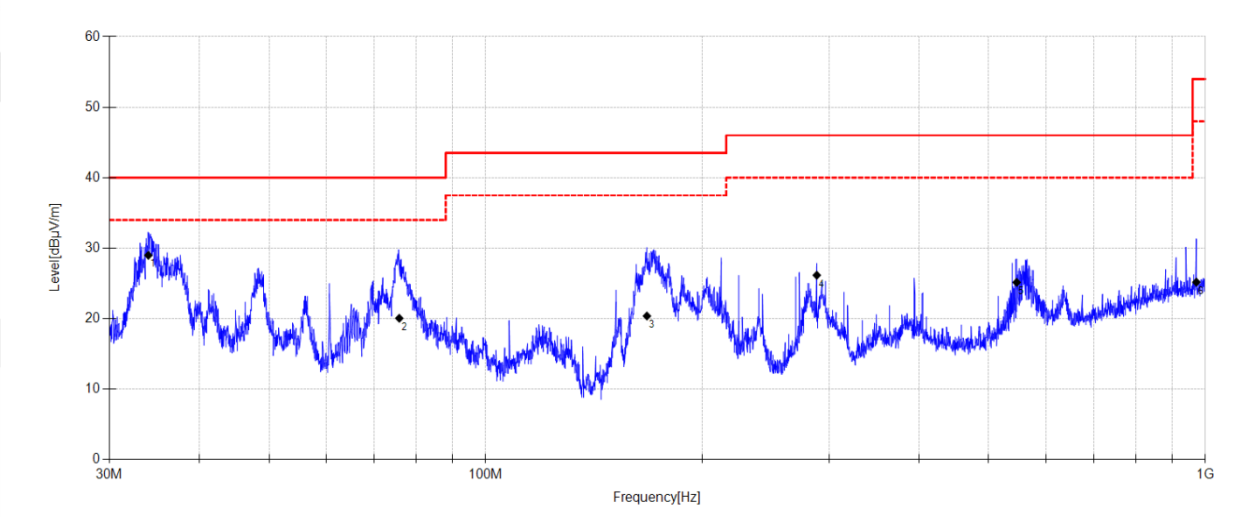

Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	33.988	46.23	11.30	3.75	28.98	40.00	11.02	QP	Vertical
2	75.857	40.57	7.74	4.04	20.05	40.00	19.95	QP	Vertical
3	167.531	39.23	9.13	4.38	20.37	43.50	23.13	QP	Vertical
4	288.466	40.4	13.10	5.06	26.16	46.00	19.84	QP	Vertical
5	546.780	34.54	17.25	6.08	25.15	46.00	20.85	QP	Vertical
6	971.661	27.42	22.00	7.23	25.18	54.00	28.82	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5745MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\1

Memo:

Sample Number:S24031305-003 Power Setting:63

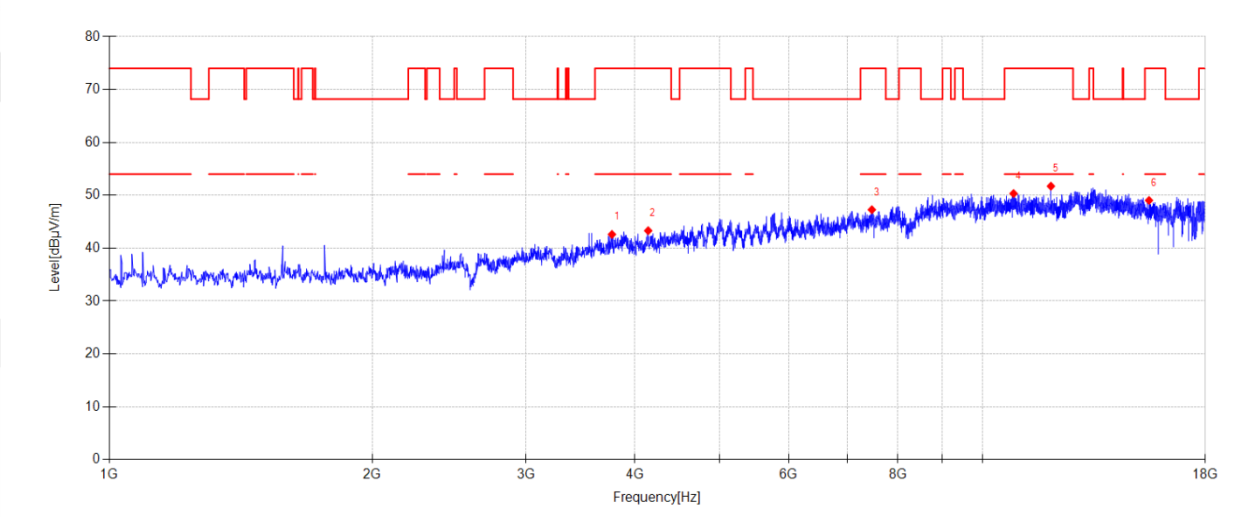

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3764.200	46.42	30.56	5.24	-39.62	42.60	74.00	31.40	PK	Horizontal
2	4141.600	46.31	31.18	5.48	-39.67	43.30	74.00	30.70	PK	Horizontal
3	7470.200	43.76	36.56	7.53	-40.58	47.27	74.00	26.73	PK	Horizontal
4	10854.900	41.70	39.35	8.37	-39.09	50.33	74.00	23.67	PK	Horizontal
5	11978.600	43.55	39.14	9.01	-39.98	51.72	74.00	22.28	PK	Horizontal
6	15516.300	39.64	38.77	10.02	-39.40	49.03	74.00	24.97	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5745MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\2

Memo:

Sample Number:S24031305-003 Power Setting:63

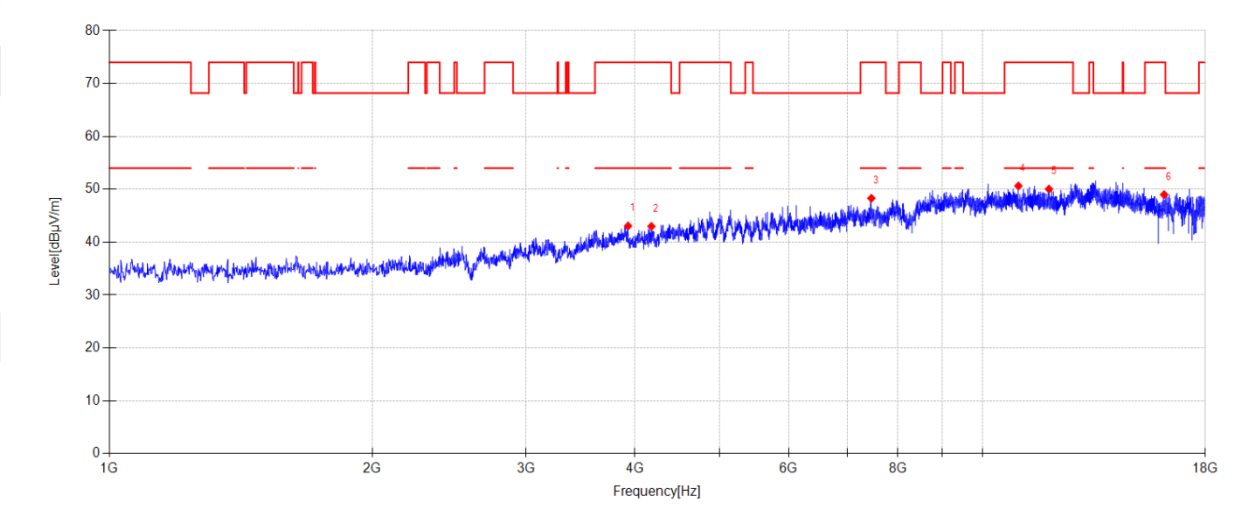

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3927.400	46.28	31.15	5.29	-39.66	43.06	74.00	30.94	PK	Vertical
2	4177.300	45.94	31.20	5.52	-39.67	42.99	74.00	31.01	PK	Vertical
3	7460.000	44.79	36.58	7.52	-40.59	48.30	74.00	25.70	PK	Vertical
4	10994.300	41.92	39.30	8.42	-39.00	50.64	74.00	23.36	PK	Vertical
5	11917.400	42.04	38.95	8.97	-39.92	50.04	74.00	23.96	PK	Vertical
6	16145.300	40.30	37.85	10.35	-39.50	49.00	74.00	25.00	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5785MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\3

Memo:

Sample Number:S24031305-003 Power Setting:63

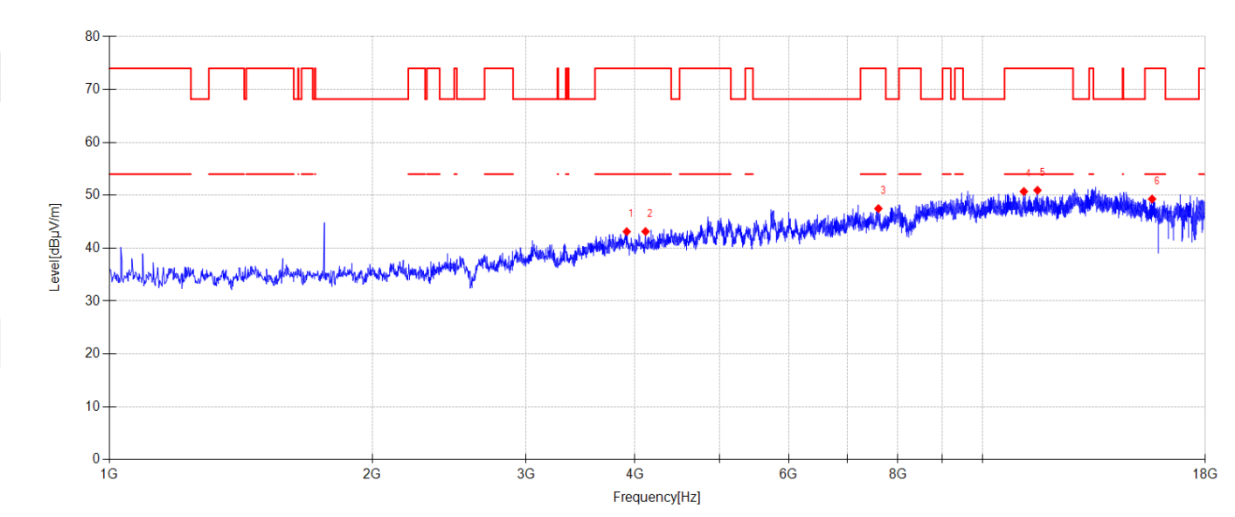

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3913.800	46.34	31.17	5.28	-39.66	43.13	74.00	30.87	PK	Horizontal
2	4112.700	46.24	31.13	5.44	-39.67	43.14	74.00	30.86	PK	Horizontal
3	7601.100	43.83	36.50	7.61	-40.46	47.48	74.00	26.52	PK	Horizontal
4	11154.100	42.11	39.25	8.51	-39.15	50.72	74.00	23.28	PK	Horizontal
5	11562.100	42.67	39.08	8.76	-39.56	50.95	74.00	23.05	PK	Horizontal
6	15640.400	40.06	38.56	10.08	-39.40	49.30	74.00	24.70	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5785MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\4

Memo:

Sample Number:S24031305-003 Power Setting:63

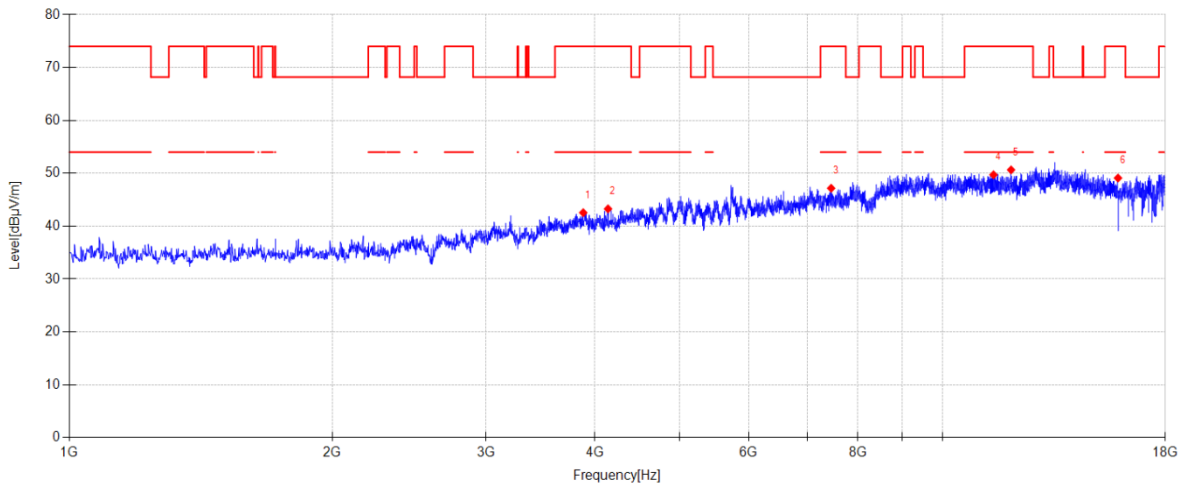

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3878.100	45.86	31.07	5.27	-39.65	42.55	74.00	31.45	PK	Vertical
2	4139.900	46.28	31.18	5.48	-39.67	43.27	74.00	30.73	PK	Vertical
3	7456.600	43.65	36.59	7.52	-40.59	47.17	74.00	26.83	PK	Vertical
4	11441.400	41.21	39.26	8.68	-39.44	49.71	74.00	24.29	PK	Vertical
5	11983.700	42.47	39.15	9.01	-39.98	50.65	74.00	23.35	PK	Vertical
6	15886.900	40.18	38.13	10.19	-39.40	49.10	74.00	24.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5825MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\5

Memo:

Sample Number:S24031305-003 Power Setting:63

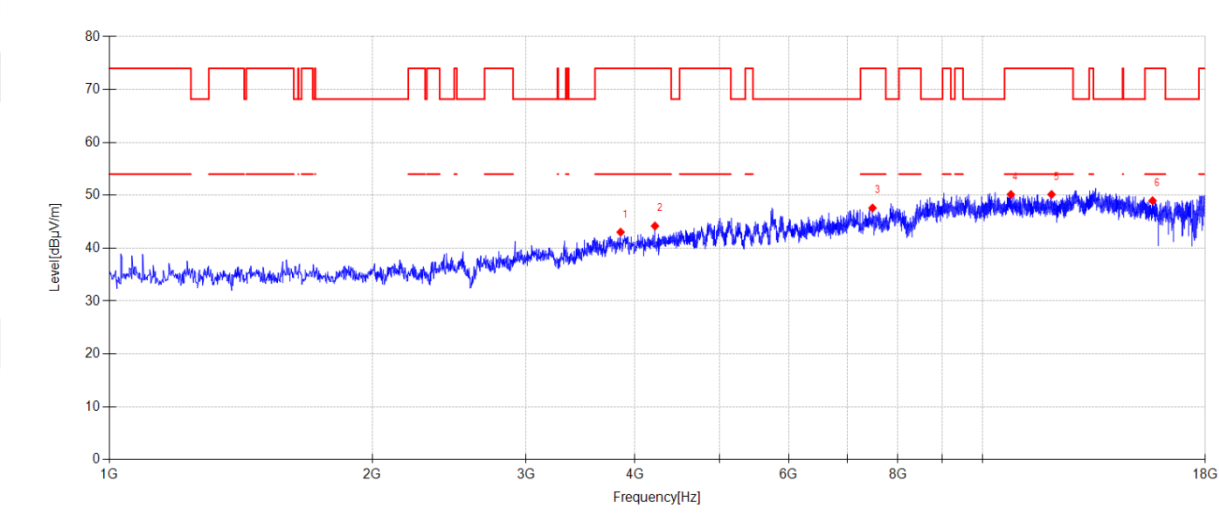

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3850.900	46.50	30.91	5.26	-39.64	43.03	74.00	30.97	PK	Horizontal
2	4216.400	47.01	31.27	5.57	-39.66	44.19	74.00	29.81	PK	Horizontal
3	7483.800	44.09	36.53	7.54	-40.56	47.60	74.00	26.40	PK	Horizontal
4	10778.400	41.53	39.40	8.35	-39.13	50.15	74.00	23.85	PK	Horizontal
5	11997.300	41.95	39.19	9.02	-40.00	50.16	74.00	23.84	PK	Horizontal
6	15662.500	39.75	38.54	10.09	-39.40	48.98	74.00	25.02	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5825MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\6

Memo:

Sample Number:S24031305-003 Power Setting:63

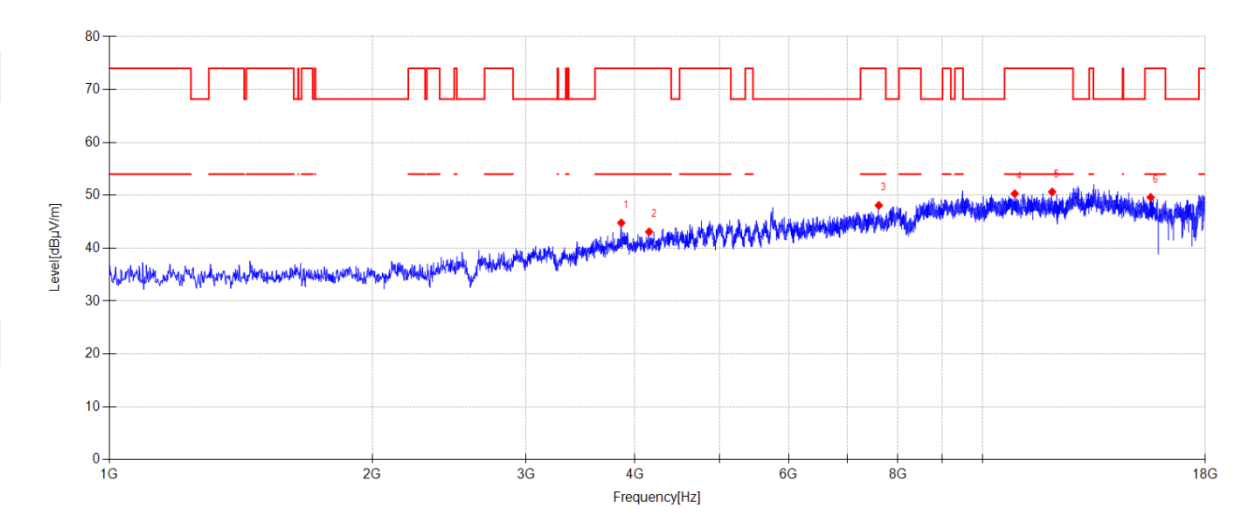

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3857.700	48.21	30.95	5.27	-39.65	44.78	74.00	29.22	PK	Vertical
2	4151.800	46.07	31.20	5.49	-39.67	43.09	74.00	30.91	PK	Vertical
3	7607.900	44.40	36.52	7.62	-40.45	48.09	74.00	25.91	PK	Vertical
4	10890.600	41.68	39.31	8.38	-39.07	50.30	74.00	23.70	PK	Vertical
5	12017.700	42.40	39.22	9.03	-40.00	50.65	74.00	23.35	PK	Vertical
6	15582.600	40.33	38.63	10.05	-39.40	49.61	74.00	24.39	PK	Vertical

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To	Cal. Interval
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28	1 Year
Radiation disturbance fully automated test software	Tonscend	JS32-RE	DDT-ZC02739	/	/
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2026/07/06	1 Year
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28	1 Year
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28	1 Year
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	/	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28	1 Year
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28	1 Year
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10	1 Year
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/	/
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28	1 Year
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28	1 Year
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25	1 Year
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11	1 Year
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2026/08/18	1 Year
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28	1 Year

13.2. Block diagram of test setup

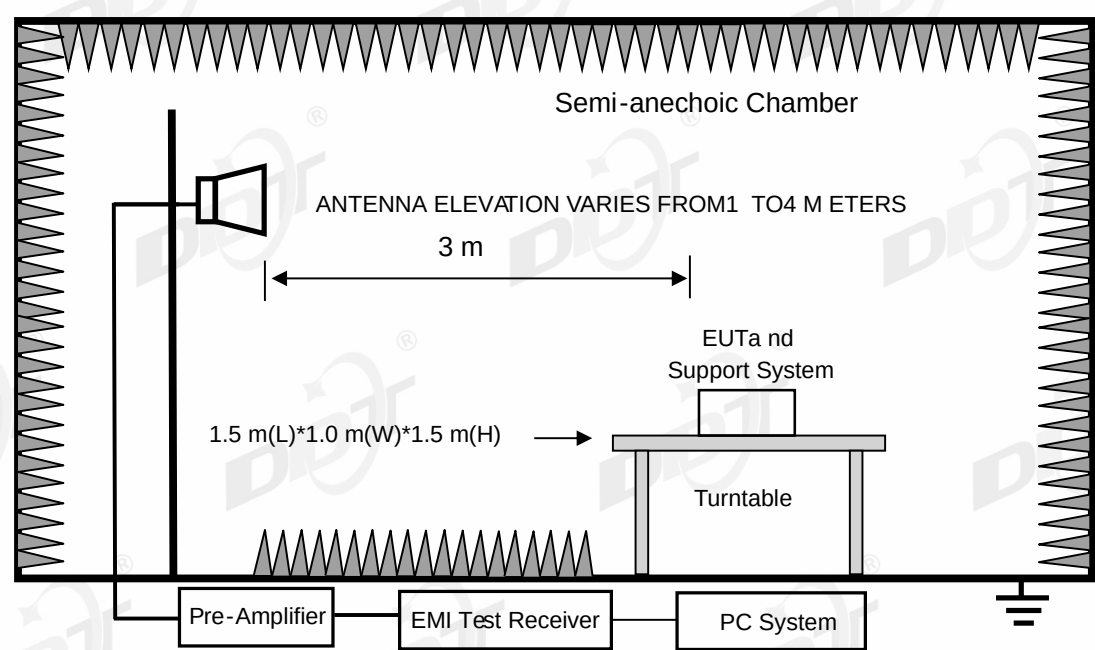

13.3. Limits

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Emissions in Restricted Frequency Bands except change investigated frequency range from 5.725-5.85 GHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5745MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\7

Memo:

Sample Number:S24031305-003 Power Setting:63

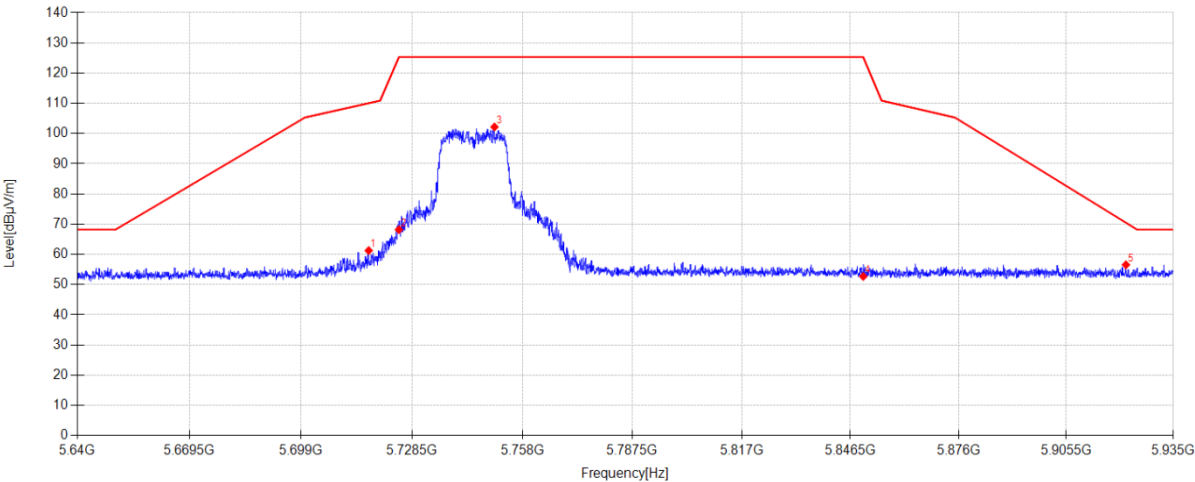

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5716.966	51.13	33.70	6.03	-29.60	61.26	110.05	48.79	PK	Horizontal
2	5725.000	58.01	33.75	6.03	-29.60	68.19	125.30	57.11	PK	Horizontal
3	5750.507	91.84	33.90	6.05	-29.60	102.19	125.30	23.11	PK	Horizontal
4	5850.000	42.19	34.00	6.10	-29.60	52.69	125.30	72.61	PK	Horizontal
5	5921.932	45.87	34.14	6.14	-29.60	56.55	70.48	13.93	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5745MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\8

Memo:

Sample Number:S24031305-003 Power Setting:63

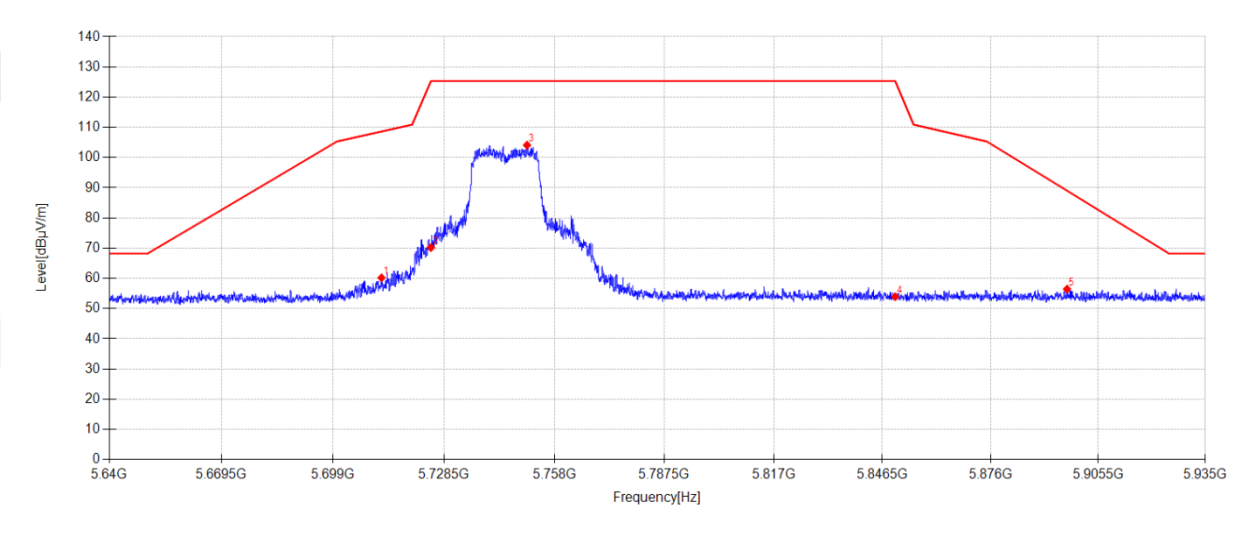

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.862	50.09	33.67	6.03	-29.60	60.19	108.62	48.43	PK	Vertical
2	5725.000	60.01	33.75	6.03	-29.60	70.19	125.30	55.11	PK	Vertical
3	5750.655	93.75	33.90	6.05	-29.60	104.10	125.30	21.20	PK	Vertical
4	5850.000	43.44	34.00	6.10	-29.60	53.94	125.30	71.36	PK	Vertical
5	5896.945	45.83	34.09	6.13	-29.60	56.45	89.02	32.57	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5785MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\9

Memo:

Sample Number:S24031305-003 Power Setting:63

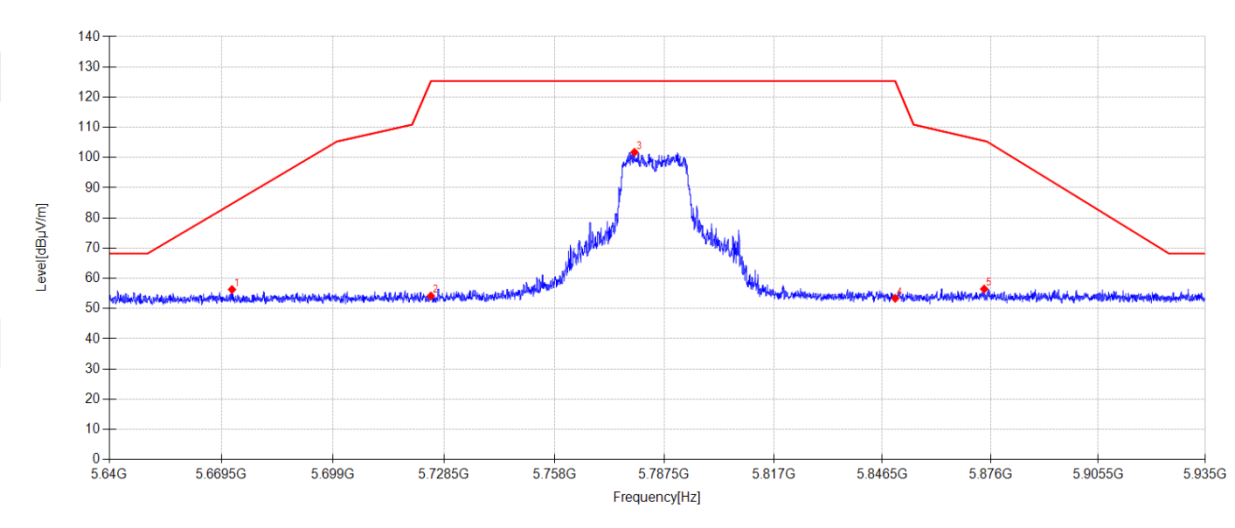

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5672.273	46.40	33.49	6.01	-29.60	56.30	84.73	28.43	PK	Horizontal
2	5725.000	44.00	33.75	6.03	-29.60	54.18	125.30	71.12	PK	Horizontal
3	5779.476	91.20	34.08	6.06	-29.60	101.74	125.30	23.56	PK	Horizontal
4	5850.000	42.90	34.00	6.10	-29.60	53.40	125.30	71.90	PK	Horizontal
5	5874.260	45.92	34.05	6.11	-29.60	56.48	105.51	49.03	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5785MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\10

Memo:

Sample Number:S24031305-003 Power Setting:63

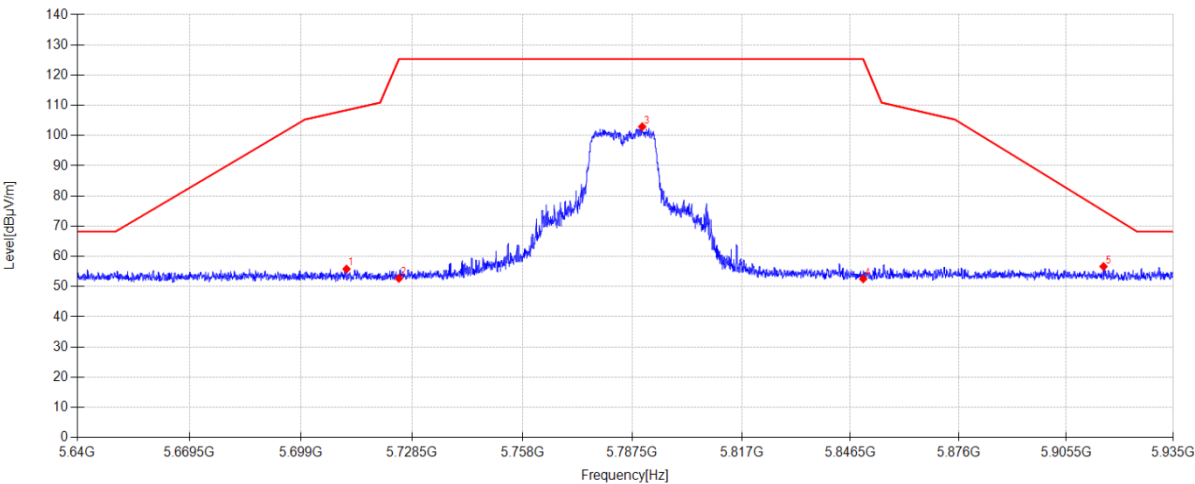

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5711.066	45.71	33.67	6.03	-29.60	55.81	108.40	52.59	PK	Vertical
2	5725.000	42.52	33.75	6.03	-29.60	52.70	125.30	72.60	PK	Vertical
3	5790.155	92.31	34.14	6.07	-29.60	102.92	125.30	22.38	PK	Vertical
4	5850.000	42.04	34.00	6.10	-29.60	52.54	125.30	72.76	PK	Vertical
5	5915.766	45.97	34.13	6.14	-29.60	56.64	75.05	18.41	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5825MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\11

Memo:

Sample Number:S24031305-003 Power Setting:63

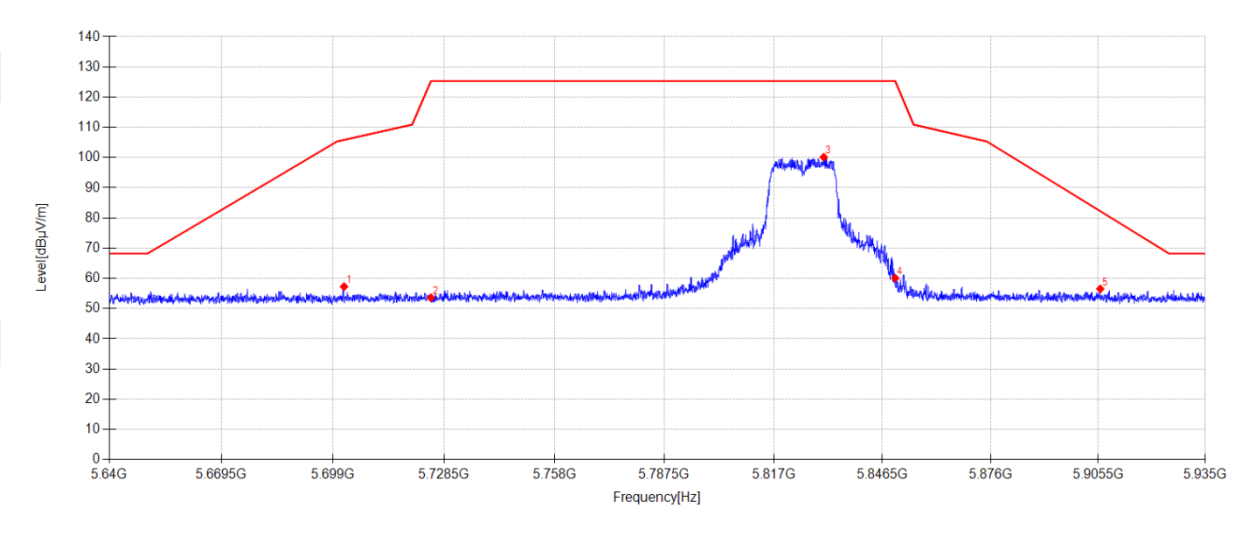

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5701.921	47.25	33.61	6.02	-29.60	57.28	105.84	48.56	PK	Horizontal
2	5725.000	43.41	33.75	6.03	-29.60	53.59	125.30	71.71	PK	Horizontal
3	5830.570	89.55	34.08	6.09	-29.60	100.12	125.30	25.18	PK	Horizontal
4	5850.000	49.59	34.00	6.10	-29.60	60.09	125.30	65.21	PK	Horizontal
5	5906.061	45.88	34.11	6.13	-29.60	56.52	82.25	25.73	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N20 TX 5825MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\12

Memo:

Sample Number:S24031305-003 Power Setting:63

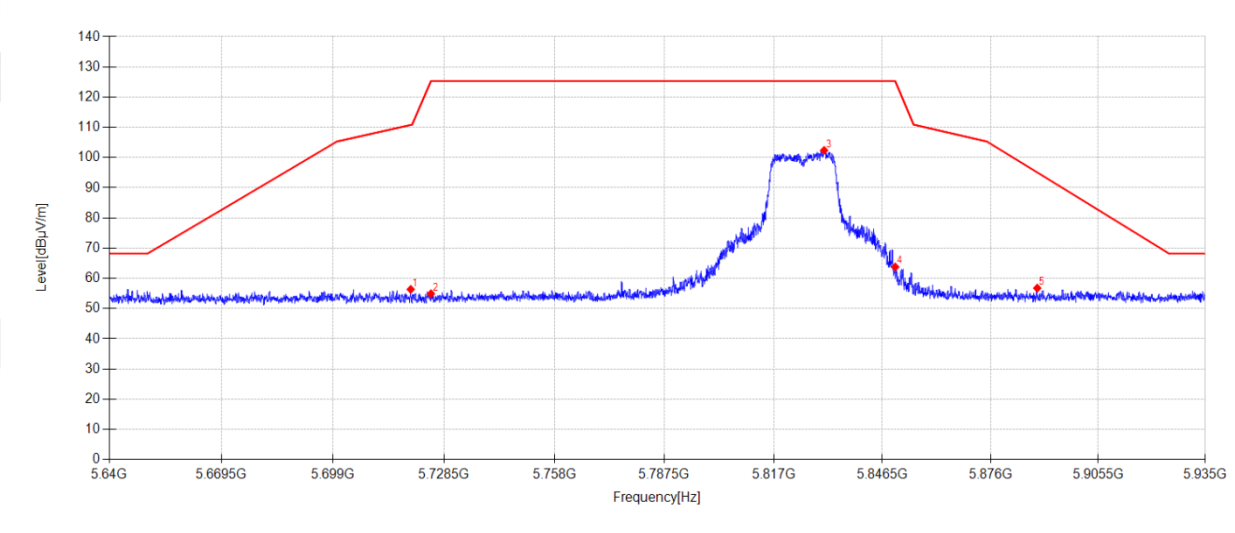

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5719.621	46.21	33.72	6.03	-29.60	56.36	110.79	54.43	PK	Vertical
2	5725.000	44.72	33.75	6.03	-29.60	54.90	125.30	70.40	PK	Vertical
3	5830.688	91.81	34.08	6.09	-29.60	102.38	125.30	22.92	PK	Vertical
4	5850.000	53.28	34.00	6.10	-29.60	63.78	125.30	61.52	PK	Vertical
5	5888.774	46.17	34.08	6.12	-29.60	56.77	95.08	38.31	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-08-26

Tested By:Nan Zhong

EUT:Meter

Model Number:6AQ2-61

Test Mode:11A TX 5745MHz Mode


Power Supply:DC 12V

Condition:Temp:21.9°C;Humi:51.0%

Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\13

Memo:Sample Number:S24031305-003 Power Setting:63

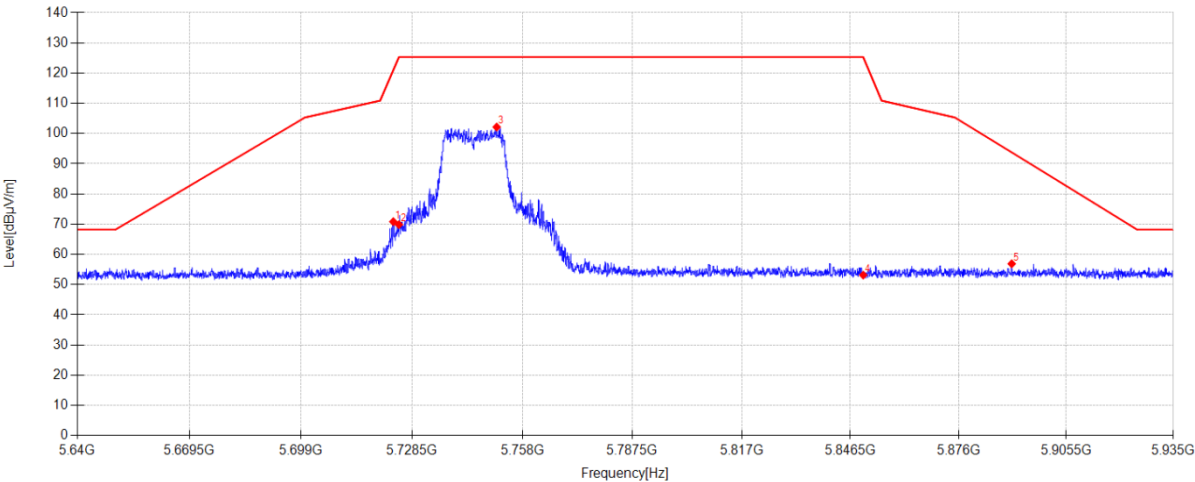

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.515	60.66	33.74	6.03	-29.60	70.83	121.02	50.19	PK	Horizontal
2	5725.000	59.68	33.75	6.03	-29.60	69.86	125.30	55.44	PK	Horizontal
3	5751.097	91.78	33.91	6.05	-29.60	102.14	125.30	23.16	PK	Horizontal
4	5850.000	42.64	34.00	6.10	-29.60	53.14	125.30	72.16	PK	Horizontal
5	5890.544	46.28	34.08	6.12	-29.60	56.88	93.77	36.89	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11A TX 5745MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\14

Memo:

Sample Number:S24031305-003 Power Setting:63

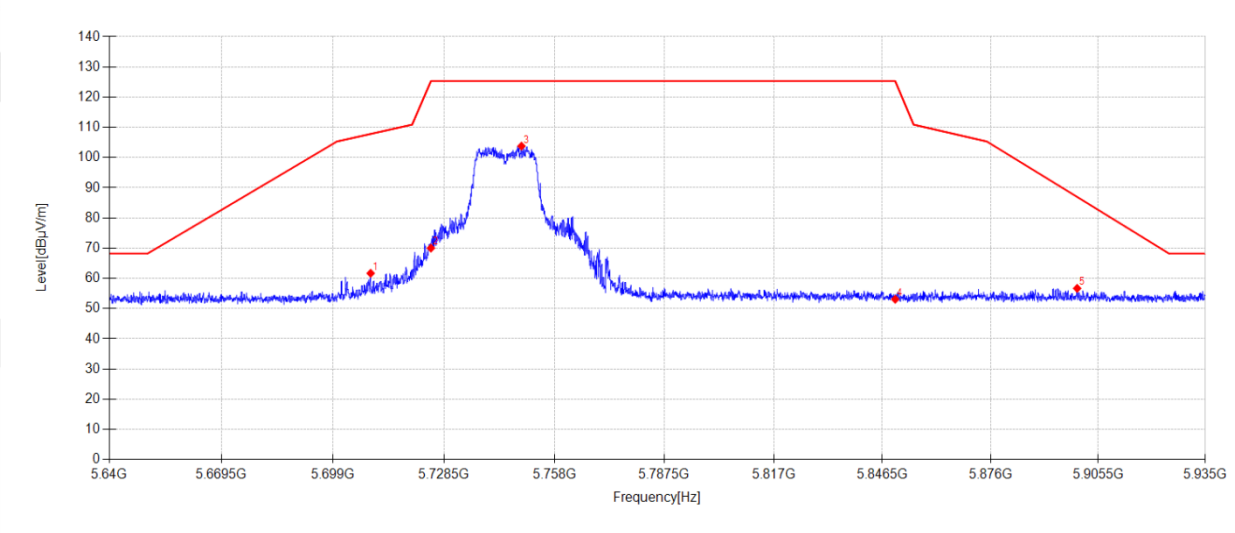

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5708.971	51.59	33.65	6.03	-29.60	61.67	107.81	46.14	PK	Vertical
2	5725.000	59.84	33.75	6.03	-29.60	70.02	125.30	55.28	PK	Vertical
3	5749.180	93.43	33.90	6.05	-29.60	103.78	125.30	21.52	PK	Vertical
4	5850.000	42.58	34.00	6.10	-29.60	53.08	125.30	72.22	PK	Vertical
5	5899.718	46.06	34.10	6.13	-29.60	56.69	86.96	30.27	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:2025-08-26

Tested By:Nan Zhong

EUT:Meter

Model Number:6AQ2-61

Test Mode:11A TX 5785MHz Mode


Power Supply:DC 12V

Condition:Temp:21.9°C;Humi:51.0%

Test Site:DDT 3# Chamber

File Path:d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\19

Memo:Sample Number:S24031305-003 Power Setting:63

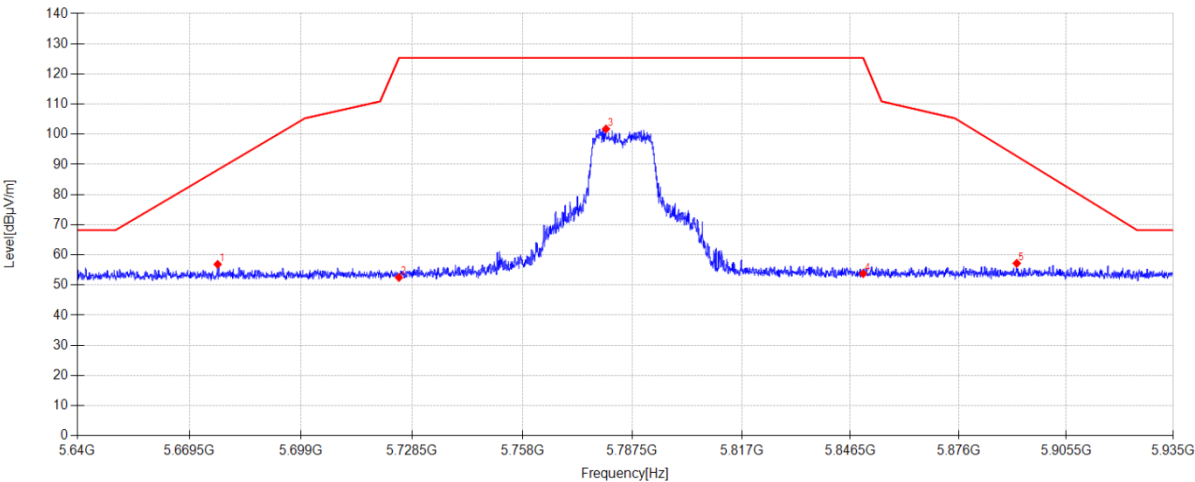

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5676.934	46.95	33.51	6.01	-29.60	56.87	88.19	31.32	PK	Horizontal
2	5725.000	42.33	33.75	6.03	-29.60	52.51	125.30	72.79	PK	Horizontal
3	5780.420	91.23	34.08	6.06	-29.60	101.77	125.30	23.53	PK	Horizontal
4	5850.000	43.29	34.00	6.10	-29.60	53.79	125.30	71.51	PK	Horizontal
5	5891.930	46.60	34.08	6.12	-29.60	57.20	92.74	35.54	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11A TX 5785MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\20

Memo:

Sample Number:S24031305-003 Power Setting:63

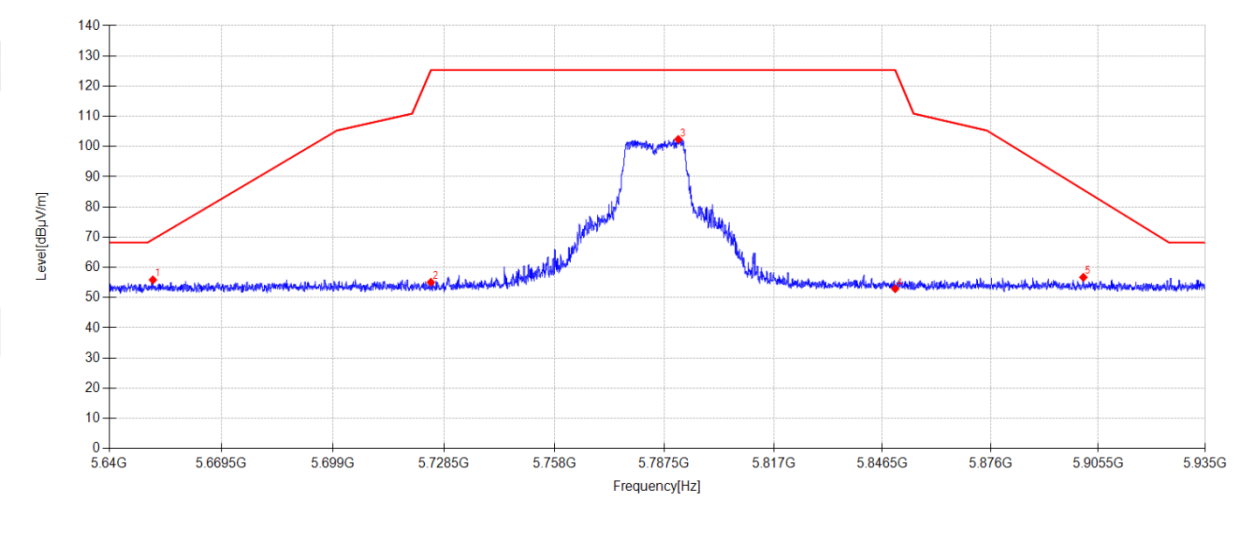

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5651.446	46.05	33.41	6.00	-29.60	55.86	69.27	13.41	PK	Vertical
2	5725.000	44.88	33.75	6.03	-29.60	55.06	125.30	70.24	PK	Vertical
3	5791.276	91.75	34.15	6.07	-29.60	102.37	125.30	22.93	PK	Vertical
4	5850.000	42.44	34.00	6.10	-29.60	52.94	125.30	72.36	PK	Vertical
5	5901.429	46.07	34.10	6.13	-29.60	56.70	85.69	28.99	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11A TX 5825MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\21

Memo:

Sample Number:S24031305-003 Power Setting:63

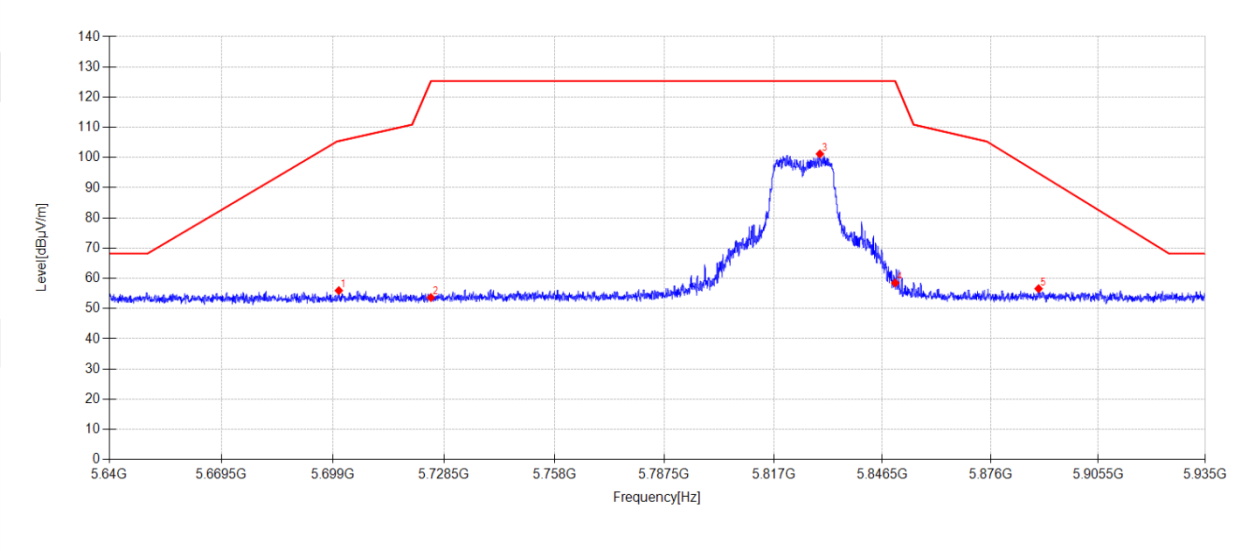

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5700.534	45.93	33.60	6.02	-29.60	55.95	105.45	49.50	PK	Horizontal
2	5725.000	43.46	33.75	6.03	-29.60	53.64	125.30	71.66	PK	Horizontal
3	5829.538	90.62	34.08	6.09	-29.60	101.19	125.30	24.11	PK	Horizontal
4	5850.000	47.98	34.00	6.10	-29.60	58.48	125.30	66.82	PK	Horizontal
5	5889.157	45.98	34.08	6.12	-29.60	56.58	94.80	38.22	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11A2 TX 5825MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\22

Memo:

Sample Number:S24031305-003 Power Setting:63

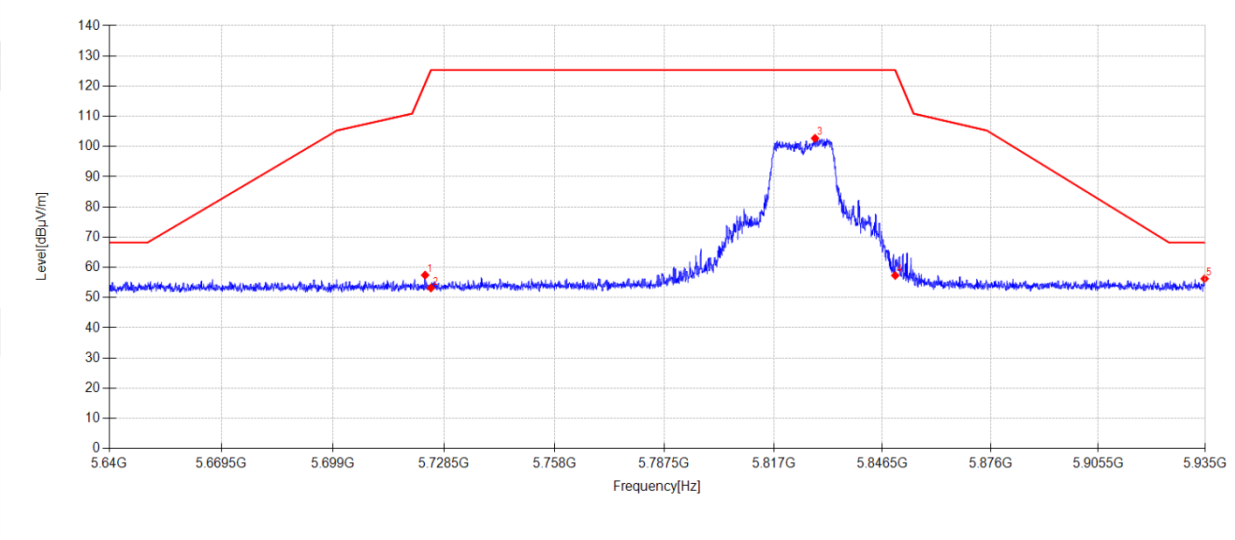

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5723.456	47.26	33.74	6.03	-29.60	57.43	120.85	63.42	PK	Vertical
2	5725.000	43.00	33.75	6.03	-29.60	53.18	125.30	72.12	PK	Vertical
3	5828.210	92.16	34.09	6.09	-29.60	102.74	125.30	22.56	PK	Vertical
4	5850.000	46.82	34.00	6.10	-29.60	57.32	125.30	67.98	PK	Vertical
5	5934.823	45.52	34.17	6.15	-29.60	56.24	68.20	11.96	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC20 TX 5745MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\25

Memo:

Sample Number:S24031305-003 Power Setting:63

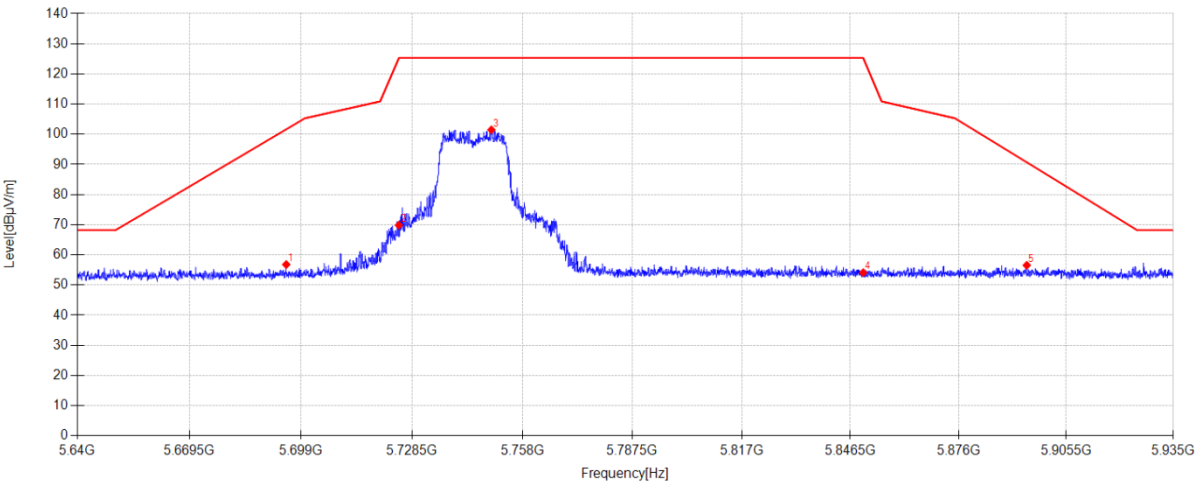

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5695.077	46.80	33.58	6.02	-29.60	56.80	101.65	44.85	PK	Horizontal
2	5725.000	59.66	33.75	6.03	-29.60	69.84	125.30	55.46	PK	Horizontal
3	5749.681	91.12	33.90	6.05	-29.60	101.47	125.30	23.83	PK	Horizontal
4	5850.000	43.60	34.00	6.10	-29.60	54.10	125.30	71.20	PK	Horizontal
5	5894.674	45.94	34.09	6.12	-29.60	56.55	90.70	34.15	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC20 TX 5745MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\26

Memo:

Sample Number:S24031305-003 Power Setting:63

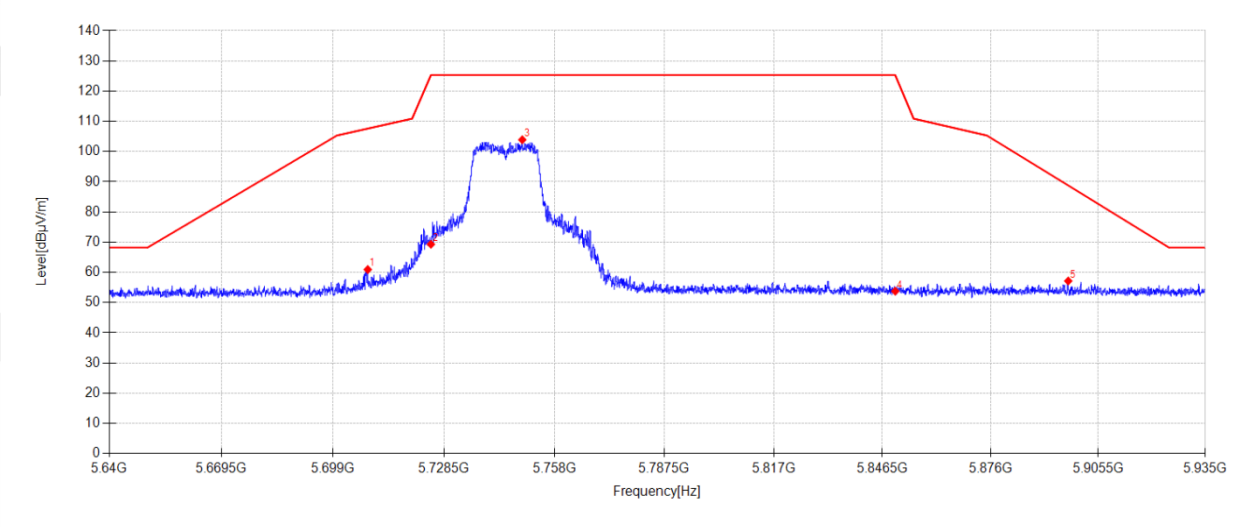

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5708.204	50.85	33.65	6.03	-29.60	60.93	107.60	46.67	PK	Vertical
2	5725.000	59.12	33.75	6.03	-29.60	69.30	125.30	56.00	PK	Vertical
3	5749.386	93.55	33.90	6.05	-29.60	103.90	125.30	21.40	PK	Vertical
4	5850.000	43.28	34.00	6.10	-29.60	53.78	125.30	71.52	PK	Vertical
5	5897.270	46.53	34.09	6.13	-29.60	57.15	88.78	31.63	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC20 TX 5785MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\27

Memo:

Sample Number:S24031305-003 Power Setting:63

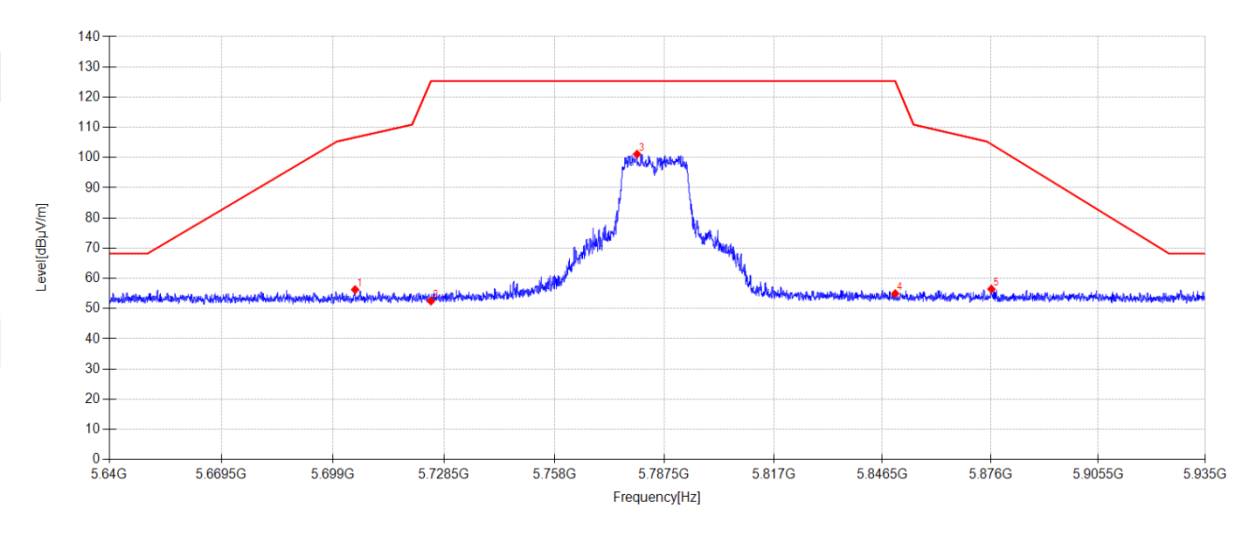

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5704.841	46.22	33.63	6.02	-29.60	56.27	106.66	50.39	PK	Horizontal
2	5725.000	42.29	33.75	6.03	-29.60	52.47	125.30	72.83	PK	Horizontal
3	5780.155	90.60	34.08	6.06	-29.60	101.14	125.30	24.16	PK	Horizontal
4	5850.000	44.46	34.00	6.10	-29.60	54.96	125.30	70.34	PK	Horizontal
5	5876.236	45.89	34.05	6.11	-29.60	56.45	104.38	47.93	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC20 TX 5785MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\28

Memo:

Sample Number:S24031305-003 Power Setting:63

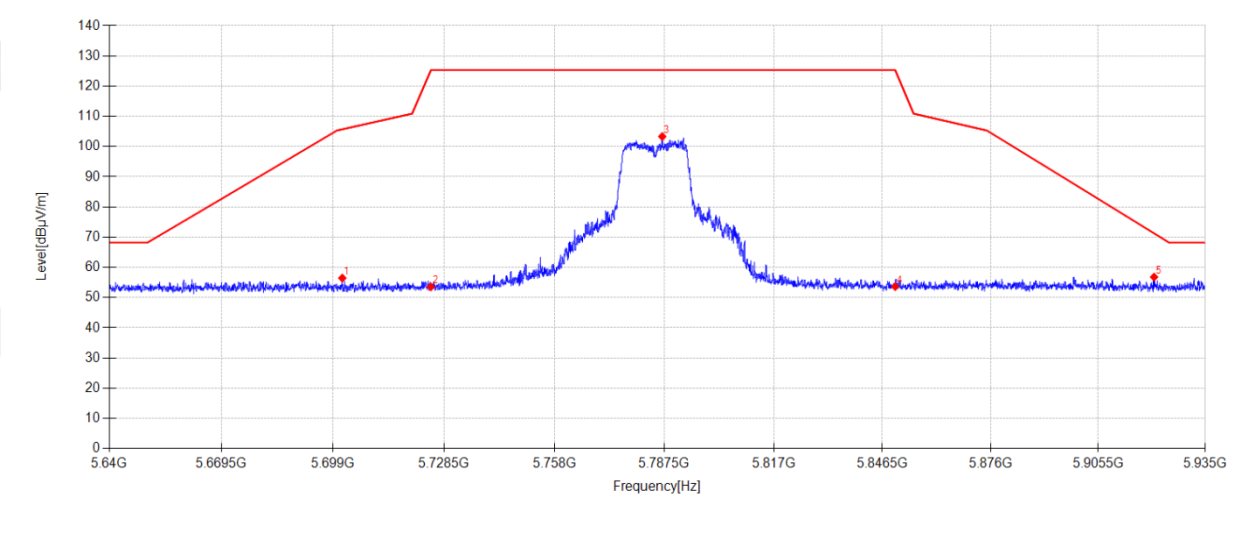

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5701.449	46.43	33.61	6.02	-29.60	56.46	105.71	49.25	PK	Vertical
2	5725.000	43.37	33.75	6.03	-29.60	53.55	125.30	71.75	PK	Vertical
3	5786.940	92.73	34.12	6.07	-29.60	103.32	125.30	21.98	PK	Vertical
4	5850.000	43.15	34.00	6.10	-29.60	53.65	125.30	71.65	PK	Vertical
5	5920.870	46.11	34.14	6.14	-29.60	56.79	71.26	14.47	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC20 TX 5825MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\29

Memo:

Sample Number:S24031305-003 Power Setting:63

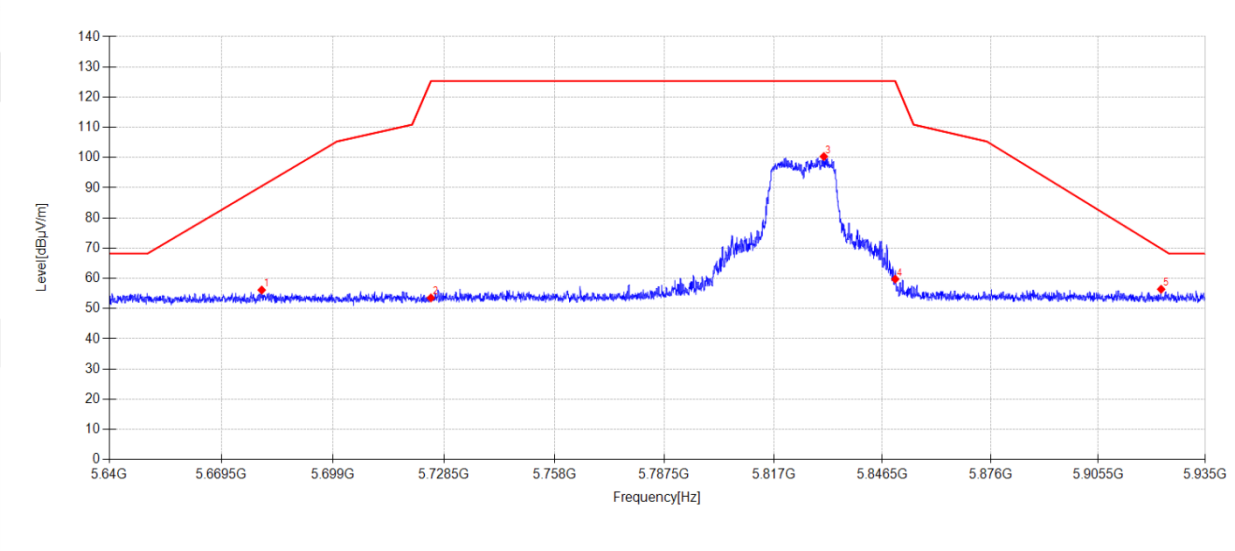

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5680.120	46.21	33.52	6.01	-29.60	56.14	90.55	34.41	PK	Horizontal
2	5725.000	43.36	33.75	6.03	-29.60	53.54	125.30	71.76	PK	Horizontal
3	5830.600	89.77	34.08	6.09	-29.60	100.34	125.30	24.96	PK	Horizontal
4	5850.000	49.25	34.00	6.10	-29.60	59.75	125.30	65.55	PK	Horizontal
5	5922.817	45.71	34.15	6.14	-29.60	56.40	69.82	13.42	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC20 TX 5825MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\30

Memo:

Sample Number:S24031305-003 Power Setting:63

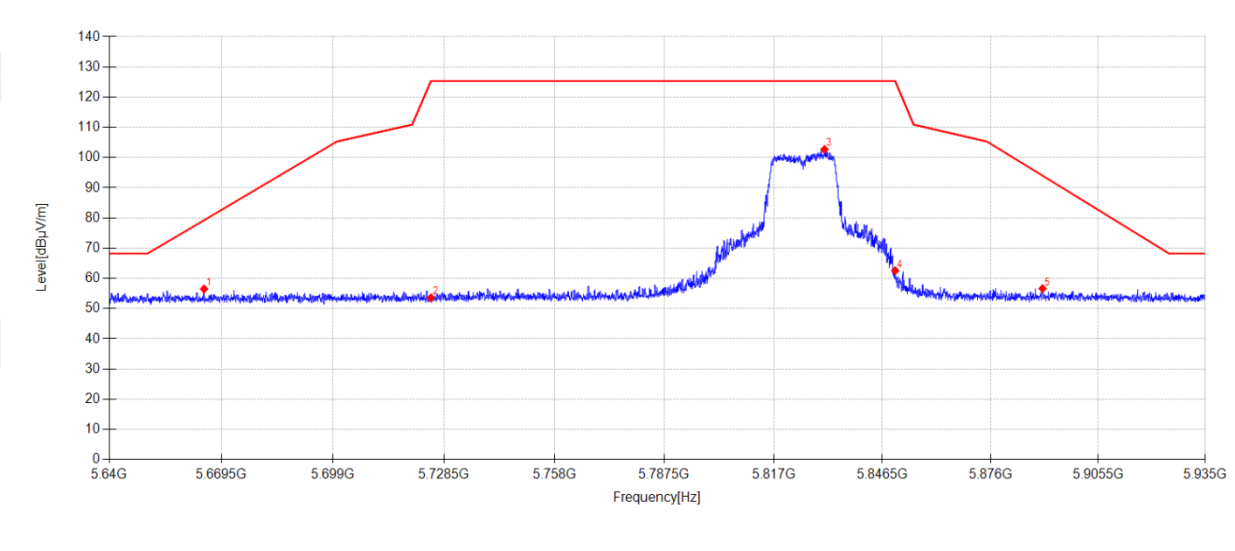

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5664.928	46.63	33.46	6.00	-29.60	56.49	79.28	22.79	PK	Vertical
2	5725.000	43.41	33.75	6.03	-29.60	53.59	125.30	71.71	PK	Vertical
3	5830.777	92.13	34.08	6.09	-29.60	102.70	125.30	22.60	PK	Vertical
4	5850.000	52.05	34.00	6.10	-29.60	62.55	125.30	62.75	PK	Vertical
5	5890.219	46.04	34.08	6.12	-29.60	56.64	94.01	37.37	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N40 TX 5755MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\31

Memo:

Sample Number:S24031305-003 Power Setting:63

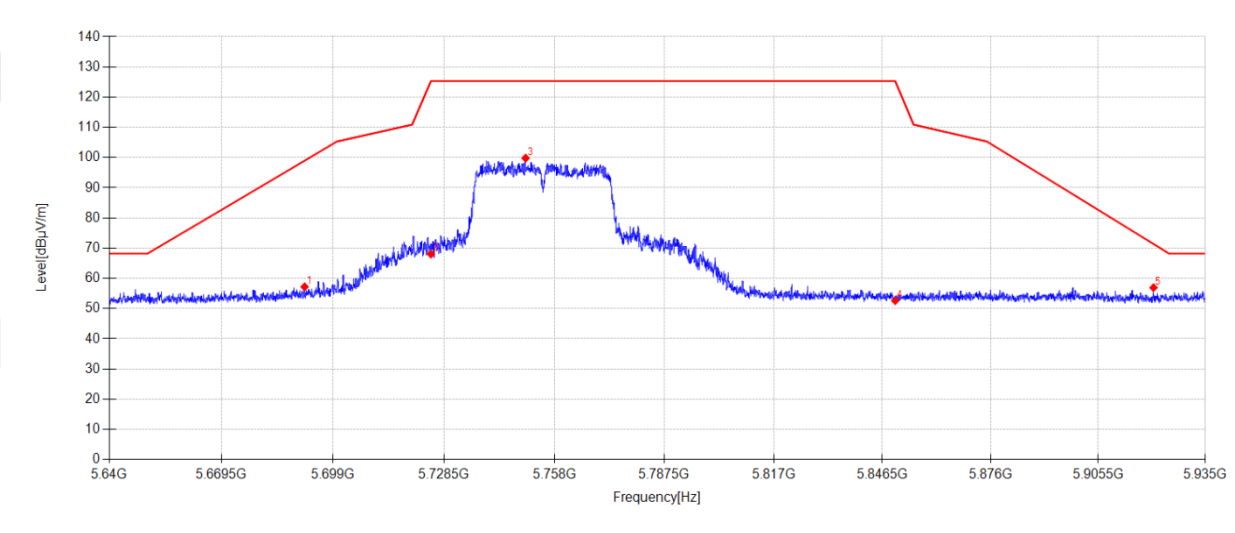

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5691.448	47.21	33.57	6.02	-29.60	57.20	98.95	41.75	PK	Horizontal
2	5725.000	57.85	33.75	6.03	-29.60	68.03	125.30	57.27	PK	Horizontal
3	5750.271	89.45	33.90	6.05	-29.60	99.80	125.30	25.50	PK	Horizontal
4	5850.000	42.12	34.00	6.10	-29.60	52.62	125.30	72.68	PK	Horizontal
5	5920.722	46.25	34.14	6.14	-29.60	56.93	71.37	14.44	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N40 TX 5755MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\32

Memo:

Sample Number:S24031305-003 Power Setting:63

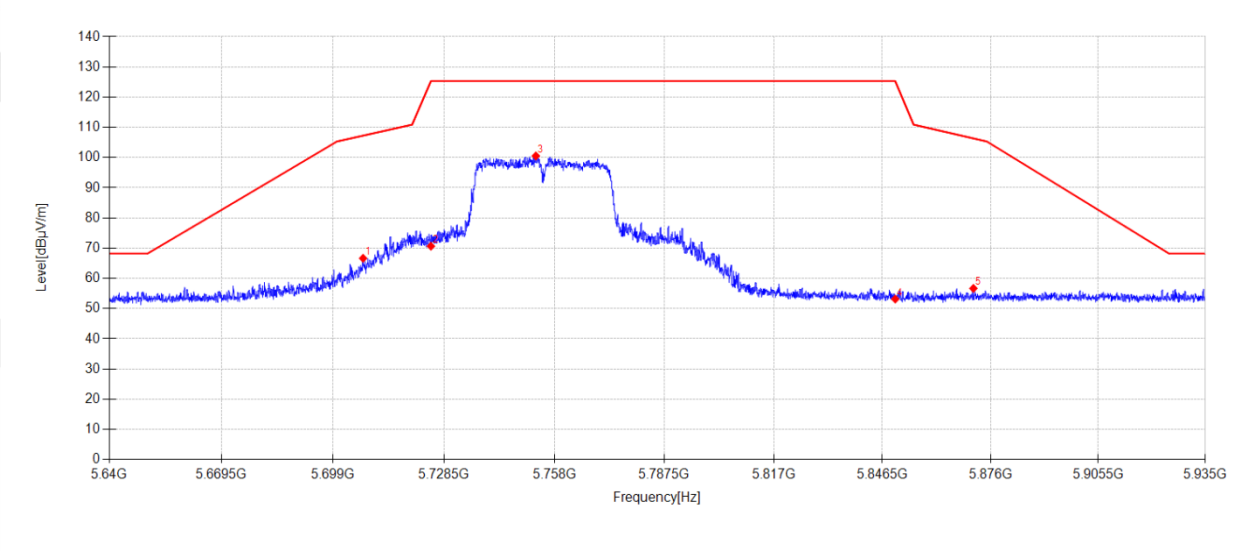

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5706.965	56.58	33.64	6.02	-29.60	66.64	107.25	40.61	PK	Vertical
2	5725.000	60.47	33.75	6.03	-29.60	70.65	125.30	54.65	PK	Vertical
3	5753.015	90.16	33.92	6.05	-29.60	100.53	125.30	24.77	PK	Vertical
4	5850.000	42.66	34.00	6.10	-29.60	53.16	125.30	72.14	PK	Vertical
5	5871.310	46.13	34.04	6.11	-29.60	56.68	106.33	49.65	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N40 TX 5795MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\33

Memo:

Sample Number:S24031305-003 Power Setting:63

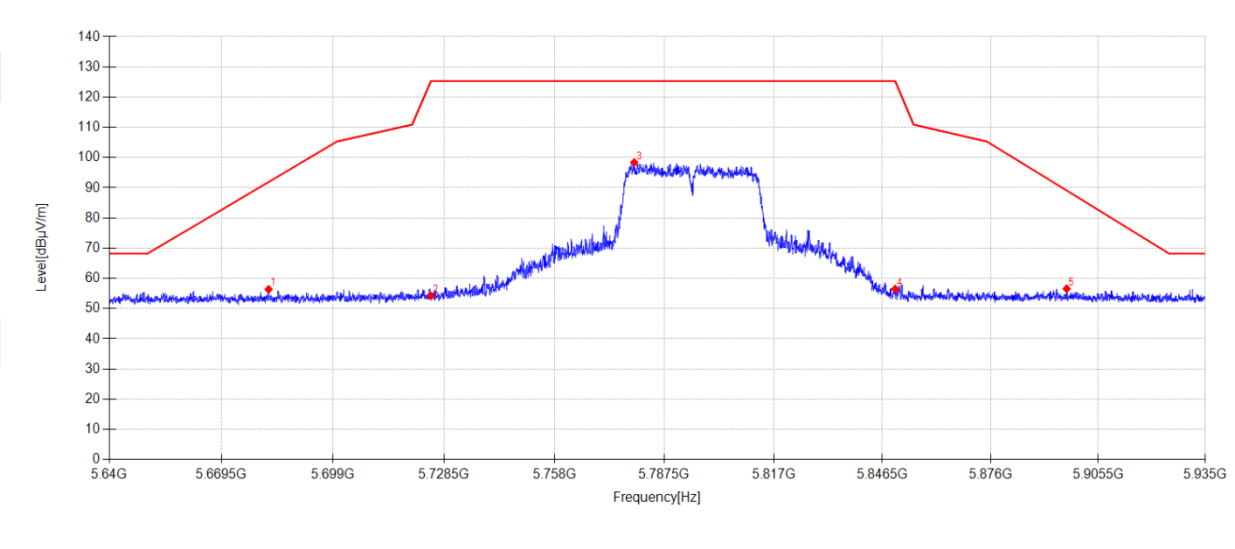

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5681.949	46.43	33.53	6.01	-29.60	56.37	91.91	35.54	PK	Horizontal
2	5725.000	43.99	33.75	6.03	-29.60	54.17	125.30	71.13	PK	Horizontal
3	5779.417	87.84	34.08	6.06	-29.60	98.38	125.30	26.92	PK	Horizontal
4	5850.000	45.96	34.00	6.10	-29.60	56.46	125.30	68.84	PK	Horizontal
5	5896.857	45.95	34.09	6.13	-29.60	56.57	89.08	32.51	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11N40 TX 5795MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\34

Memo:

Sample Number:S24031305-003 Power Setting:63

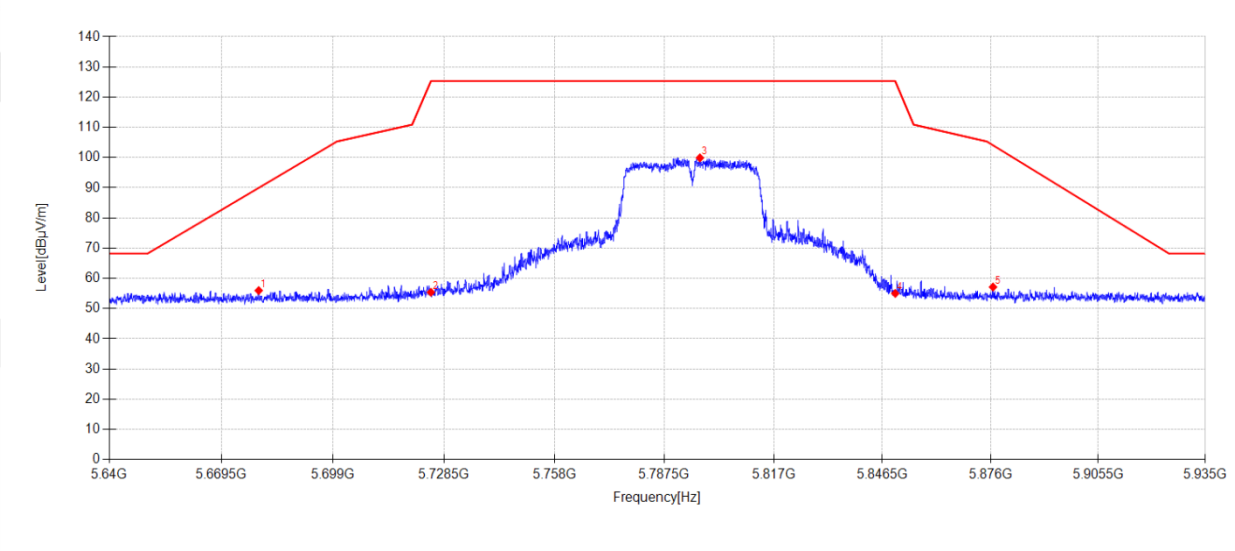

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5679.324	46.04	33.52	6.01	-29.60	55.97	89.96	33.99	PK	Vertical
2	5725.000	45.22	33.75	6.03	-29.60	55.40	125.30	69.90	PK	Vertical
3	5797.088	89.24	34.18	6.07	-29.60	99.89	125.30	25.41	PK	Vertical
4	5850.000	44.51	34.00	6.10	-29.60	55.01	125.30	70.29	PK	Vertical
5	5876.679	46.57	34.05	6.11	-29.60	57.13	104.05	46.92	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC40 TX 5755MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\35

Memo:

Sample Number:S24031305-003 Power Setting:63

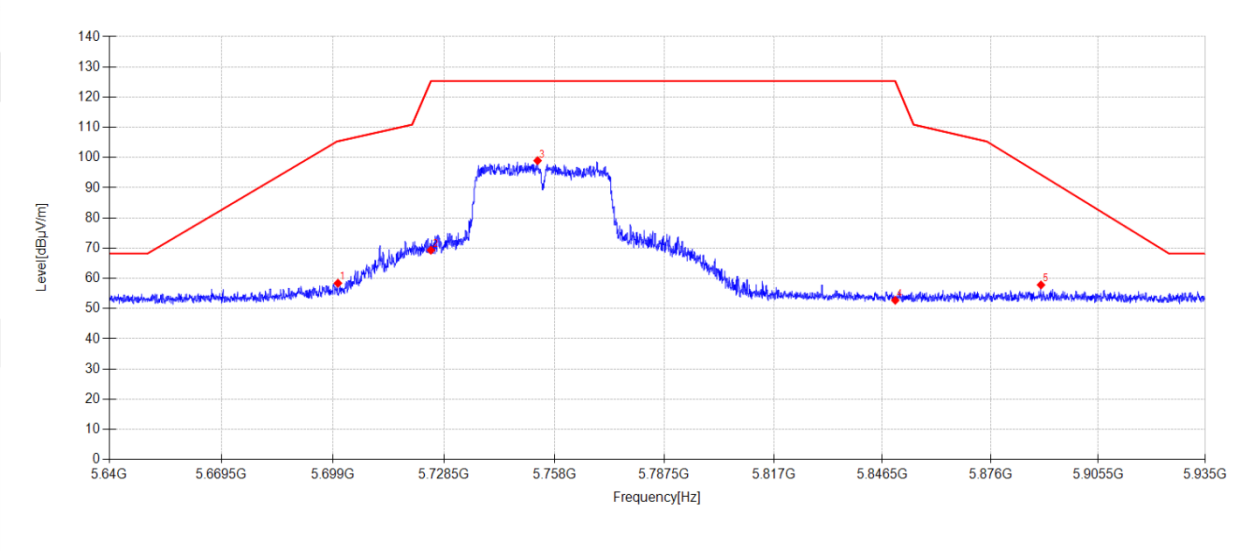

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5700.298	48.37	33.60	6.02	-29.60	58.39	105.38	46.99	PK	Horizontal
2	5725.000	59.15	33.75	6.03	-29.60	69.33	125.30	55.97	PK	Horizontal
3	5753.487	88.60	33.92	6.05	-29.60	98.97	125.30	26.33	PK	Horizontal
4	5850.000	42.23	34.00	6.10	-29.60	52.73	125.30	72.57	PK	Horizontal
5	5889.806	47.23	34.08	6.12	-29.60	57.83	94.31	36.48	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC40 TX 5755MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\36

Memo:

Sample Number:S24031305-003 Power Setting:63

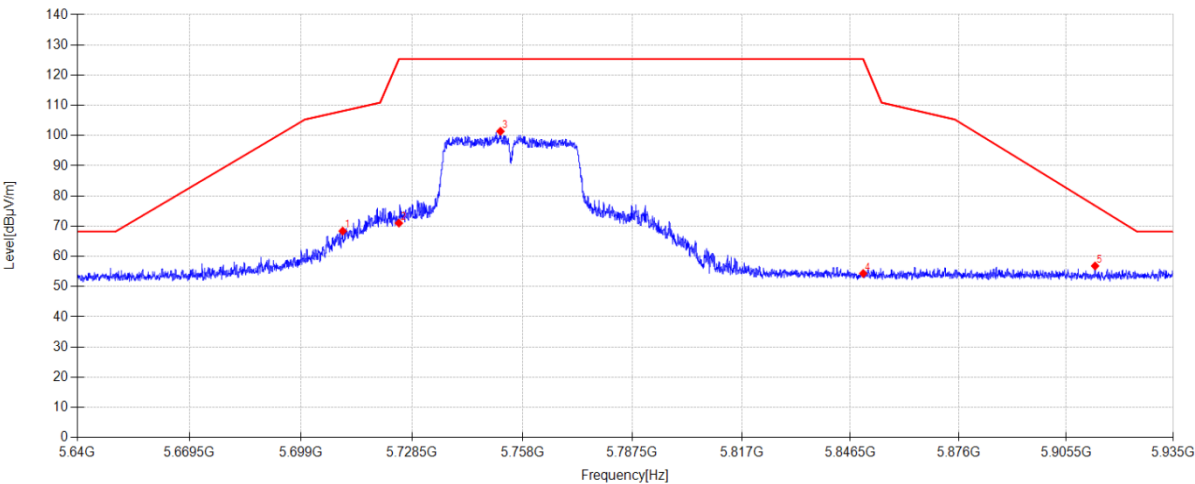

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5710.063	58.28	33.66	6.03	-29.60	68.37	108.12	39.75	PK	Vertical
2	5725.000	60.83	33.75	6.03	-29.60	71.01	125.30	54.29	PK	Vertical
3	5752.100	91.03	33.91	6.05	-29.60	101.39	125.30	23.91	PK	Vertical
4	5850.000	43.83	34.00	6.10	-29.60	54.33	125.30	70.97	PK	Vertical
5	5913.436	46.17	34.13	6.13	-29.60	56.83	76.78	19.95	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC40 TX 5795MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\37

Memo:

Sample Number:S24031305-003 Power Setting:63

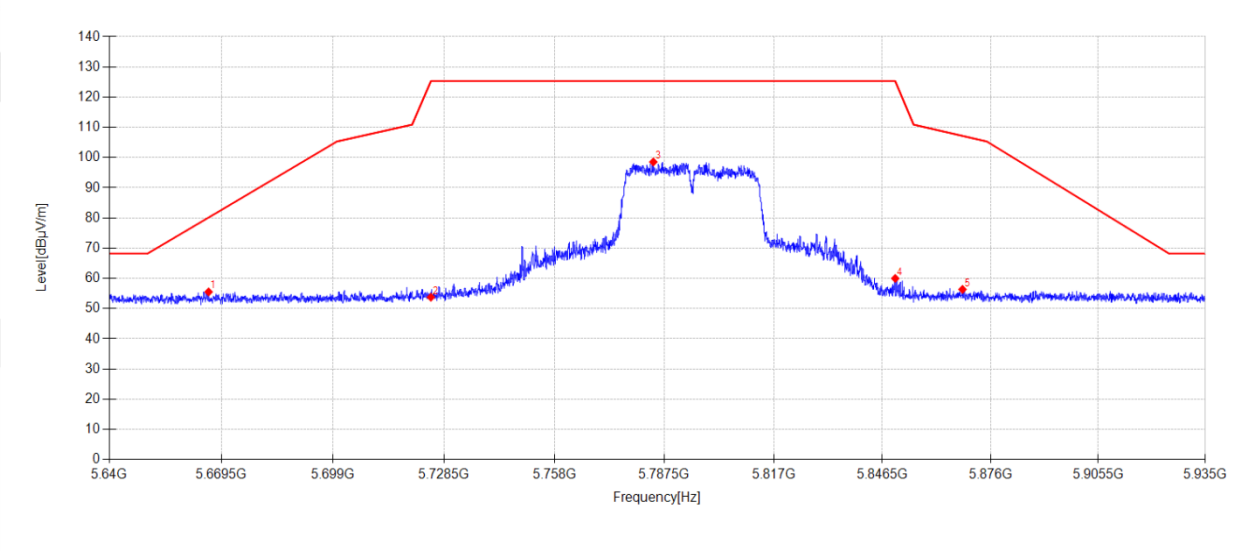

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5666.108	45.66	33.46	6.00	-29.60	55.52	80.15	24.63	PK	Horizontal
2	5725.000	43.59	33.75	6.03	-29.60	53.77	125.30	71.53	PK	Horizontal
3	5784.550	87.96	34.11	6.07	-29.60	98.54	125.30	26.76	PK	Horizontal
4	5850.000	49.48	34.00	6.10	-29.60	59.98	125.30	65.32	PK	Horizontal
5	5868.330	45.80	34.04	6.11	-29.60	56.35	107.17	50.82	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC40 TX 5795MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\38

Memo:

Sample Number:S24031305-003 Power Setting:63

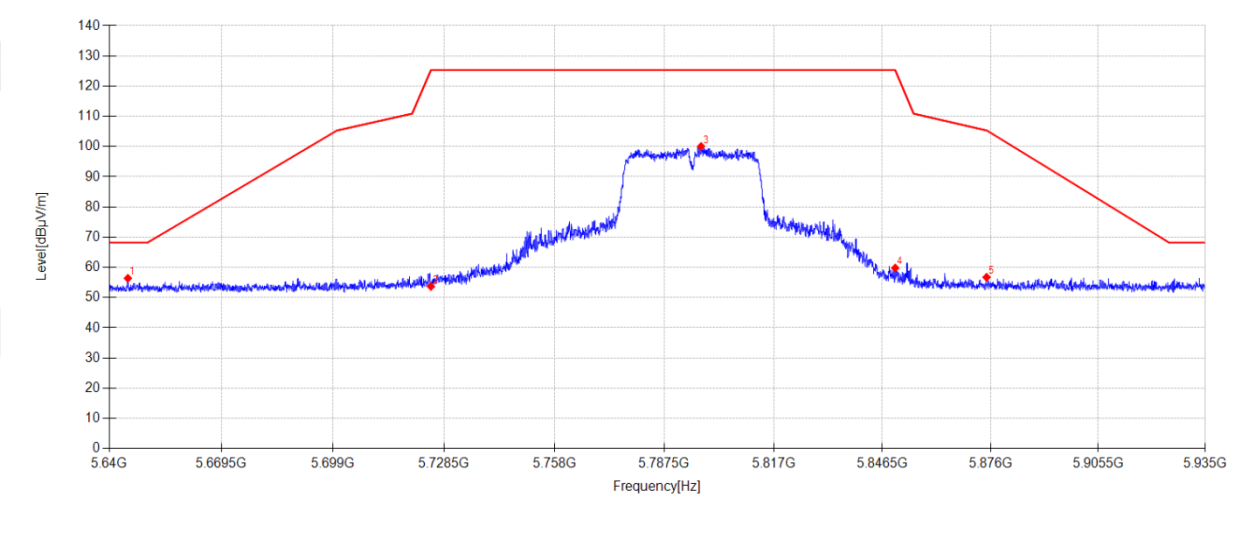

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5644.868	46.60	33.39	5.99	-29.60	56.38	68.20	11.82	PK	Vertical
2	5725.000	43.49	33.75	6.03	-29.60	53.67	125.30	71.63	PK	Vertical
3	5797.412	89.39	34.18	6.07	-29.60	100.04	125.30	25.26	PK	Vertical
4	5850.000	49.28	34.00	6.10	-29.60	59.78	125.30	65.52	PK	Vertical
5	5874.909	46.17	34.05	6.11	-29.60	56.73	105.33	48.60	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC80 TX 5775MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\39

Memo:

Sample Number:S24031305-003 Power Setting:63

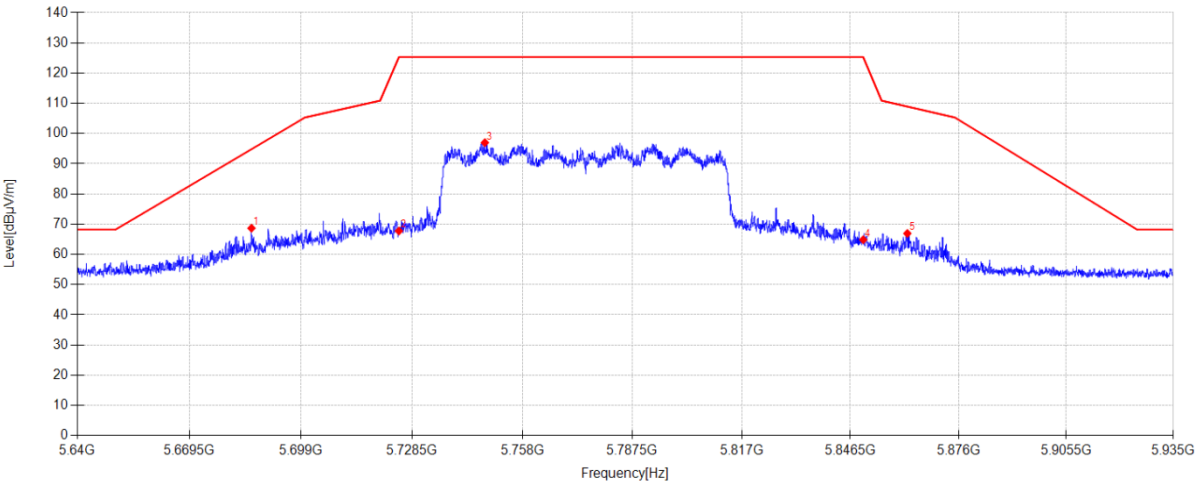

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5685.873	58.72	33.54	6.01	-29.60	68.67	94.82	26.15	PK	Horizontal
2	5725.000	57.57	33.75	6.03	-29.60	67.75	125.30	57.55	PK	Horizontal
3	5747.941	86.65	33.89	6.05	-29.60	96.99	125.30	28.31	PK	Horizontal
4	5850.000	54.35	34.00	6.10	-29.60	64.85	125.30	60.45	PK	Horizontal
5	5862.017	56.40	34.02	6.11	-29.60	66.93	108.94	42.01	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-08-26

Tested By:

Nan Zhong

EUT:

Meter

Model Number:

6AQ2-61

Test Mode:

11AC80 TX 5775MHz Mode

Power Supply:

DC 12V

Condition:

Temp:21.9°C;Humi:51.0%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2024 report data\Q24031305-2E\FCC ABOVE1G 5.8G\40

Memo:

Sample Number:S24031305-003 Power Setting:63

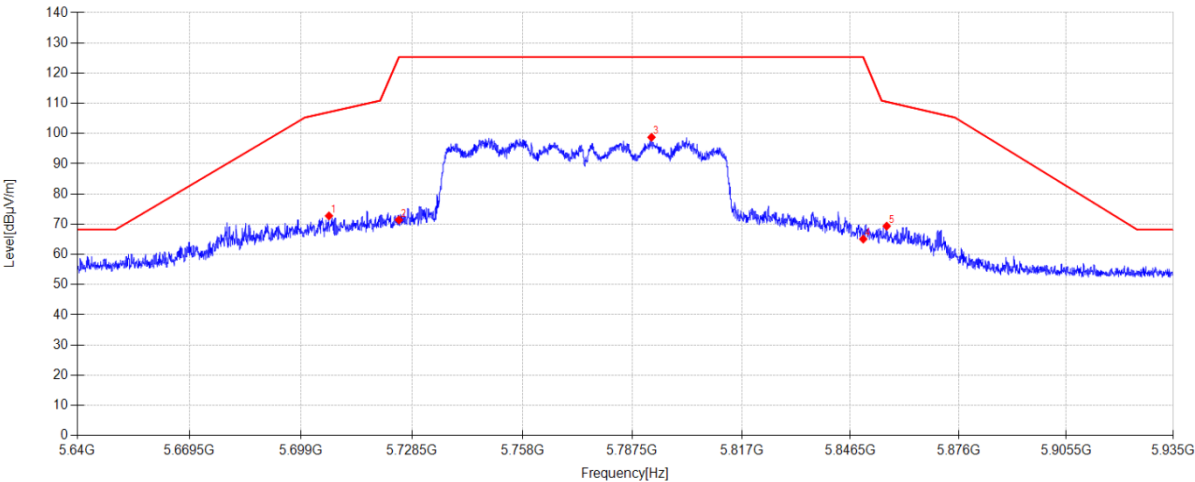

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5706.405	62.68	33.64	6.02	-29.60	72.74	107.09	34.35	PK	Vertical
2	5725.000	61.22	33.75	6.03	-29.60	71.40	125.30	53.90	PK	Vertical
3	5792.663	88.13	34.16	6.07	-29.60	98.76	125.30	26.54	PK	Vertical
4	5850.000	54.57	34.00	6.10	-29.60	65.07	125.30	60.23	PK	Vertical
5	5856.383	58.84	34.01	6.10	-29.60	69.35	110.51	41.16	PK	Vertical

Note:


- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
/	/	/	/	/

14.2. Block diagram of test setup

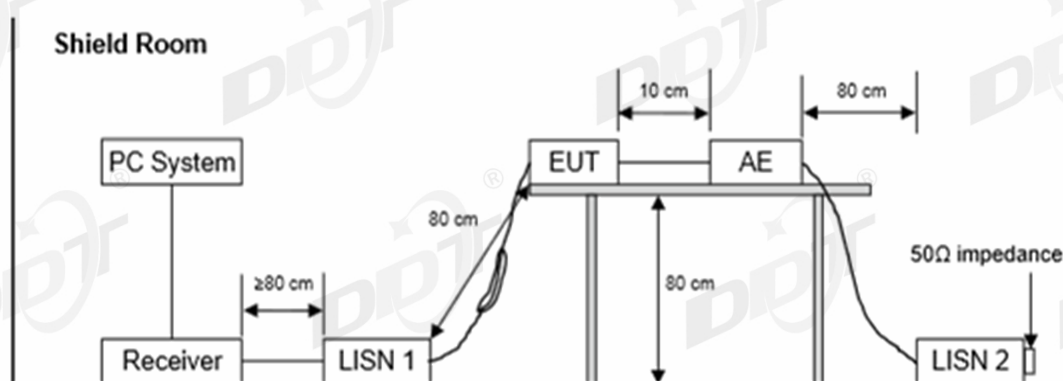

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

Not applicable. The product is DC powered.

16. Photos of the EUT

Please refer to DDT-Q24031305-1E appendix I

-----End Report-----