



产品承认书

SPECIFICATION FOR APPROVED

版本: REV. A1

客 户

Customer

1917

客户料号

Customer's P/N

品 名

Description

Wireless Power Charging Transmitter Coil

产品型号

Specification

CKWRD5010L-10uH/K-L15/L12(SP)

图纸编号

Drawing No.

SP-CK112-GXA25387

产品编号

Product code.

出图

DRAWING

制表

审核

批准

Prepared By

Checked By

Approved By

覃玉云

马爱善

范成焱

DATE:

2024/7/4

承认

CUSTOMER APPROVAL

DATE:



岑科科技(深圳)集团有限公司

SHENZHEN CENKER TECHNOLOGY GROUP CO., LTD.

地址:深圳市龙华区大浪街道恒大时尚慧谷6栋A区11楼

Address: Floor 11, Building 6A, Evergrande Shishang
Huigu Building, Longhua District, Shenzhen

TEL: 0755-89808755 FAX: 0755-27525256

SPECIFICATION FOR APPROVAL

**RoHS
COMPLIANT**

CUSTOMER	1917	CUSTOMER P/N	
CENKER P/N	CKWRD5010L-10uH/K-L15/L12(SP)	DRAWING No.	SP-CK112-GXA25387
ISSUE DATE	2024/7/4	VERSION	A1

MODIFY RECORD

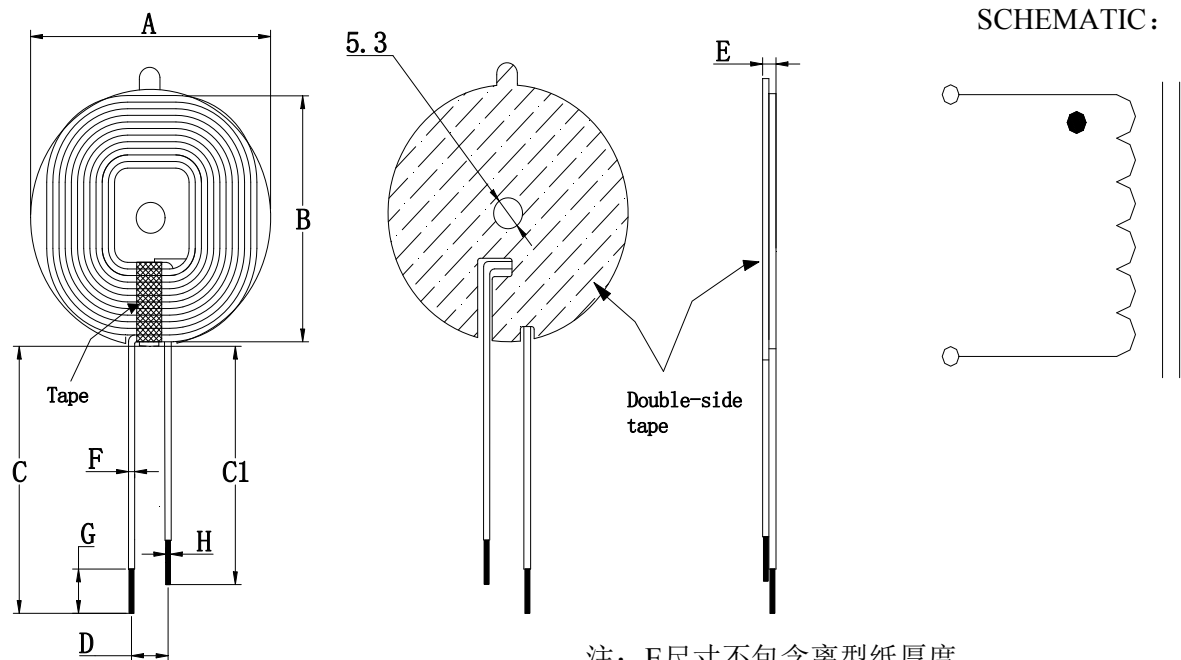
[illegible]

SPECIFICATION FOR APPROVAL

RoHS
COMPLIANT

CUSTOMER	1917	CUSTOMER No.		REF No.		PAGE
ITEM	Wireless Power Charging Transmitter Coil		DRAWING No.	SP-CK112-GXA25387		1/4
DESCRIPTION	CKWRD5010L-10uH/K-L15/L12(SP)		ISSUE DATE	2024/7/4	VERSION	A1

1、DIMENSION(mm):



注：E尺寸不包含离型纸厚度

A	B	C	C1	D	E	F	G	H
50.0±1.0	48.0±1.0	15.0±2.0	12.0±2.0	8.5±2.0	4.1-4.7	1.2Ref	3.0±1.0	2.0Max

CKWR D5010L 10uH K L15/L12 (SP)

TOLERANCE

INDUCTANCE

SIZE CODE

SERIES NAME

2.TEMPERATURE RATING:

Operating Temperature	-20℃ ~ +105℃			
Storage Temperature	-20℃ ~ +60℃			
 SHENZHEN CENKER TECHNOLOGY GROUP CO., LTD. TEL:0755-89808755 FAX:0755-27525256 地址:深圳市龙华区大浪街道恒大时尚慧谷 6栋A区11楼	PREPARED	CHECKED	APPROVED	
	覃玉云	马爱善	范成焱	

SPECIFICATION FOR APPROVAL

RoHS
COMPLIANT

CUSTOMER	1917	CUSTOMER No.		REF No.		PAGE
ITEM	Wireless Power Charging Transmitter Coil		DRAWING No.	SP-CK112-GXA25387		2/4
DESCRIPTION	CKWRD5010L-10uH/K-L15/L12(SP)		ISSUE DATE	2024/7/4	VERSION	A1

3、ELECTRICAL REQUIREMENTS:

ITEM	SPEC	TOLERANCE	TEST FREQUENCY	TEST EQUIPMENT
INDUCTANCE	10uH	±10%	100kHz/1V	HP-4284A
DCR	60mΩ	Max.	at 25℃	CH-502A

4、MATERIAL LIST:

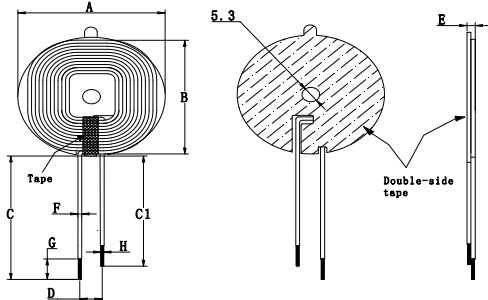
No.	Material	Specification	Supplier	UL No.
1	Magnet core	50mm*1.0mm	JR/XY Y	
2	Wire	Litz Wire	FJ(HY)	E345710
3	Solder	99.9% (Sn99.9)	CS	
4	Adhesive Tape	3M468	3M	
5	Adhesive2 +Release Tape	EVA Black ,H=2.0mm	HG	
6	Tape	PF*(d)(g), W=7mm	YH	E165111

	岑科科技(深圳)集团有限公司 SHENZHEN CENKER TECHNOLOGY GROUP CO., LTD. TEL:0755-89808755 FAX:0755-27525256 地址:深圳市龙华区大浪街道恒大时尚慧谷6栋A区11楼	PREPARED	CHECKED	APPROVED
		覃玉云	马爱善	范成焱

SPECIFICATION FOR APPROVAL

RoHS
COMPLIANT

PAGE:3/4

CUSTOMER	1917			LOT No.			
CUSTOMER No.				QUANTITY	10PCS	DATE	2024/7/4
DRAWING No.	SP-CK112-GXA25387			DIMENSION(UNIT: mm) 			
ITEM	Wireless Power Charging Transmitter Coil						
DESCRIPTION	CKWRD5010L-10uH/K-L15/L12(SP)						
TEST FREQ	100kHz/1V						
TEMPERATURE	25 °C	HUMIDITY	75%				

5.TESTING DATA:

ELECTRONICAL TEST DATA				OREALL DIMENSTON (UNIT: mm)								
	L	DCR		A	B	C	C1	D	E	F	G	H
SPEC	10uH ±10%	60mΩ Max.		50.0±1.0	48.0±1.0	15.0±2.0	12.0±2.0	8.5±2.0	4.1-4.7	1.2Ref	3.0±1.0	2.0Max
1	9.49	49.12		49.55	48.26	15.28	12.18	8.57	4.42	1.19	3.50	1.17
2	9.40	48.89		49.53	48.31	15.38	12.22	8.49	4.52	1.22	3.59	1.18
3	9.43	49.03		49.55	48.22	15.30	12.20	8.49	4.38	1.21	3.68	1.12
4	9.44	49.03		49.52	48.27	15.29	12.17	9.59	4.36	1.20	3.09	1.07
5	9.44	49.04		49.57	48.31	15.29	12.26	9.51	4.53	1.21	3.68	1.12
6	9.39	48.97		49.60	48.32	15.21	12.18	9.59	4.30	1.24	2.89	1.09
7	9.47	49.06		49.51	48.26	15.11	12.15	8.59	4.52	1.23	3.03	1.08
8	9.41	49.17		49.55	48.27	15.29	12.27	9.54	4.30	1.22	2.78	1.15
9	9.41	49.04		49.55	48.33	15.26	12.26	8.57	4.48	1.19	2.50	1.21
10	9.40	49.03		49.53	48.27	15.17	12.20	8.59	4.40	1.23	3.19	1.24
$\overline{X}$	9.43	49.04		49.55	48.28	15.26	12.21	8.95	4.42	1.21	3.19	1.14
R	0.10	0.28		0.09	0.11	0.27	0.12	1.10	0.23	0.05	1.18	0.17

TEST EQUIPMENT:	ALL JUDGE	☒ OK ☐ NG
-----------------	-----------	--

L	☐ CH-1062A ☒ HP-4284A
Q	☐ HM2801A ☐ HM9481 ☐ CJ2851
DCR	☒ CH-502A
SRF	☐ HM9460
IDC	☒ HP-4284A&HP-42841A

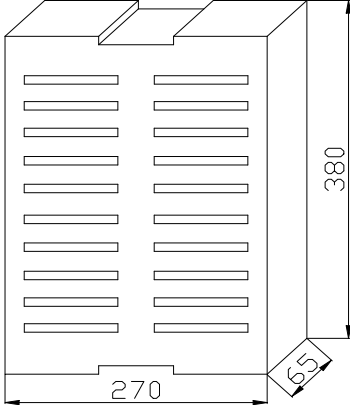
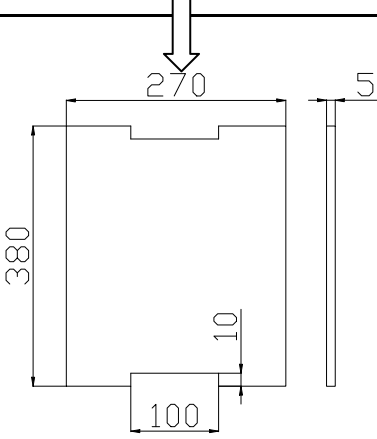
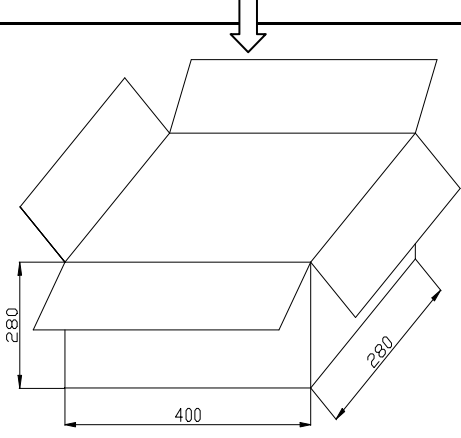
 岑科科技(深圳)集团有限公司 SHENZHEN CENKER TECHNOLOGY GROUP CO., LTD. TEL:0755-89808755 FAX:0755-27525256 地址:深圳市龙华区大浪街道恒大时尚慧谷6栋A区11楼	PREPARED	CHECKED	APPROVED
	覃玉云	马爱善	范成焱

SPECIFICATION FOR APPROVAL

RoHS
COMPLIANT

CUSTOMER	1917	CUSTOMER No.		REF No.		PAGE
ITEM	Wireless Power Charging Transmitter Coil		DRAWING No.	SP-CK112-GXA25387		4/4
DESCRIPTION	CKWRD5010L-10uH/K-L15/L12(SP)		ISSUE DATE	2024/7/4	VERSION	A1

10、PACKING(mm):

1.珍珠棉盒: 380*270*65mm，一盘20个孔，每个孔位按两个方向装8个，每盘装160pcs，4盘一扎，共640pcs。	
2.平卡: 380*270*5mm（每扎珍珠棉盒顶部放一张平卡）	
3.外箱尺寸: 400*280*280mm，每箱装1扎，640pcs/外箱	

 岑科科技(深圳)集团有限公司 SHENZHEN CENKER TECHNOLOGY GROUP CO., LTD. TEL:0755-89808755 FAX:0755-27525256 地址:深圳市龙华区大浪街道恒大大时尚慧谷6栋A区11楼	PREPARED	CHECKED	APPROVED
	覃玉云	马爱善	范成焱



使用注意事项 Matters needing attention



1. 在设计PCB时, 请考虑非磁屏蔽元器件的安装位置, 避免磁干扰引起的故障.
1. When designing the PCB, please consider the installation position of the non-magnetic shielded components to avoid failures caused by magnetic interference.
2. 请勿将本产品靠近磁铁或带有磁力的物体.
2. Do not place this product near magnets or objects with magnetic force.
3. 请勿将产品保存在高温、高湿、有灰尘、腐蚀环境（盐、酸、碱等）等不适合环境中.
3. Do not store the product in unsuitable environments such as high temperature, high humidity, dusty, corrosive environments (salt, acid, alkali, etc.).
4. 产品会因通电而自我发热（温度上升），在热设计方面需留有充分余量.
4. The product will self-heat (temperature rise) due to power-on, and sufficient margin should be left in thermal design.
5. 由于人体所带的静电会传到接地线上，因此请使用防静电腕带.
5. Since the static electricity carried by the human body will be transmitted to the ground wire, please use an anti-static wrist strap.
6. 人体手上有油脂可能导致可焊性下降. 请避免手直接接触端子.
6. Grease on human hands may lead to decreased solderability. Please avoid direct contact with the terminals.
7. 端子过度弯曲会导致断线, 请不要过度弯曲端子.
7. Excessive bending of the terminal will lead to disconnection, please do not bend the terminal excessively.
8. 产品对直接冲击很敏感, 冲击可能导致产品磁芯损伤及破损.
8. The product is very sensitive to direct impact, the impact may cause damage and breakage of the product's magnetic core.
9. 在客户使用时, 如果产品被灌封或胶固定, 必须注意:
9. When the customer uses, if the product is potted or glued, it must be noted:
 - 大部分灌封材料在硬化时都会收缩, 因此对塑胶骨架或磁芯有施加应力,
这种应力作用可以给电气特性带来负面影响, 极端情况下可能损坏磁芯或塑胶骨架的机械性能.
 - Most potting materials will shrink when hardened, so there is a stress on the plastic skeleton or magnetic core,
This stress action can negatively affect the electrical properties and in extreme cases can damage the mechanical properties of the magnetic core or plastic skeleton.
 - 必须检查使用灌封材料是否会导致漆包线的绝缘层, 塑胶骨架或胶水的性能降低甚至损坏.
 - It must be checked whether the use of potting materials will cause the insulation layer of the enameled wire, the performance of the plastic skeleton or the glue to be degraded or even damaged.
 - 灌封材料的影响可以改变磁性元器件的高频特性.
 - The effect of potting material can change the high frequency characteristics of magnetic components.



使用注意事项 Matters needing attention



10. 对于合金或非涂层产品,如果将产品长期放置在潮湿的环境中,产品的表面可能会生锈,但不会影响产品的特性。

10. For alloy or non-coated products, if the product is placed in a humid environment for a long time, the surface of the product may rust, But it will not affect the characteristics of the product.

11. 本产品是指在通用标准上用于影音娱乐,家电,计算机,办公自动化,通讯,电源模块,LED照明,测量设备,机械工具,工业控制板等一般电子设备中。并且该一般电子设备要在通常的操作和使用方法下使用。

11. This product refers to the general standard used in audio-visual entertainment, home appliances, computers, office automation, communications, power modules, LED lighting, measuring equipment,

Machine tools, industrial control panels and other general electronic equipment. And the general electronic equipment should be used under the usual operation and usage methods.

12. 当本产品使用在一般电子设备以外的场合,如:车载,交通工具控制设备,医疗设备,军用设备,航空航天设备,海底设备等,请务必联系本公司销售部门,本公司会配合客户需求,一起协商不同于本产品中所记载的使用用途。

12. When this product is used in occasions other than general electronic equipment, such as: Automotive Electronic products, medical equipment, military equipment, Aerospace equipment, submarine equipment, etc.,

please be sure to contact the company's sales department,
the company will cooperate with customer needs, and negotiate different intended use described in this product.

13. 保存时间为 12 个月以内,保存条件: 温度 $-10 \sim 40^{\circ}\text{C}$ 、湿度 70%RH 以下,需充分注意,若超过保存时间,端子电极的可焊性将可能变差。

13. Storage time is within 12 months, storage conditions: temperature $-10 \sim 40^{\circ}\text{C}$, humidity 70%RH Max.
It should be fully noted that if the storage time is exceeded, the solderability of the terminal electrodes may deteriorate.