






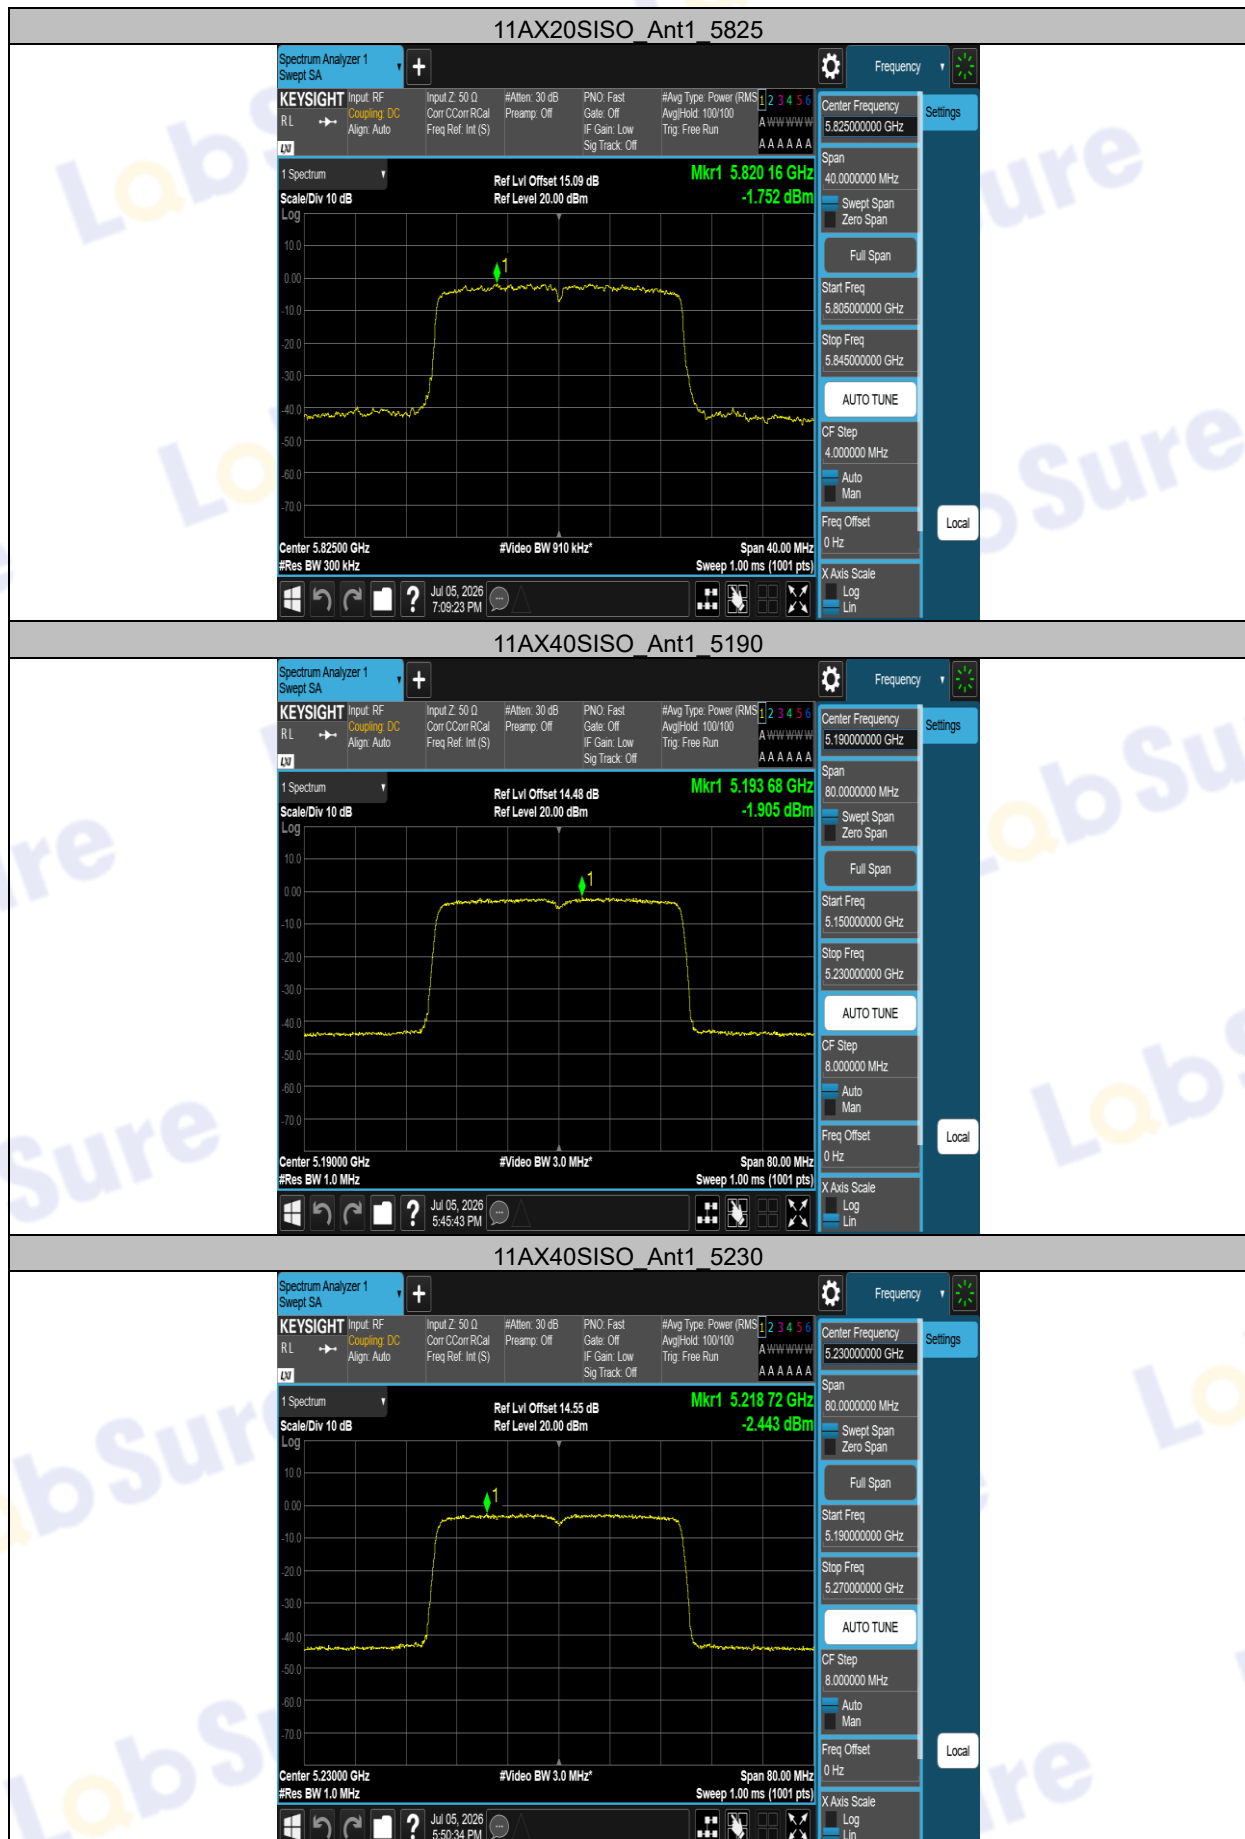

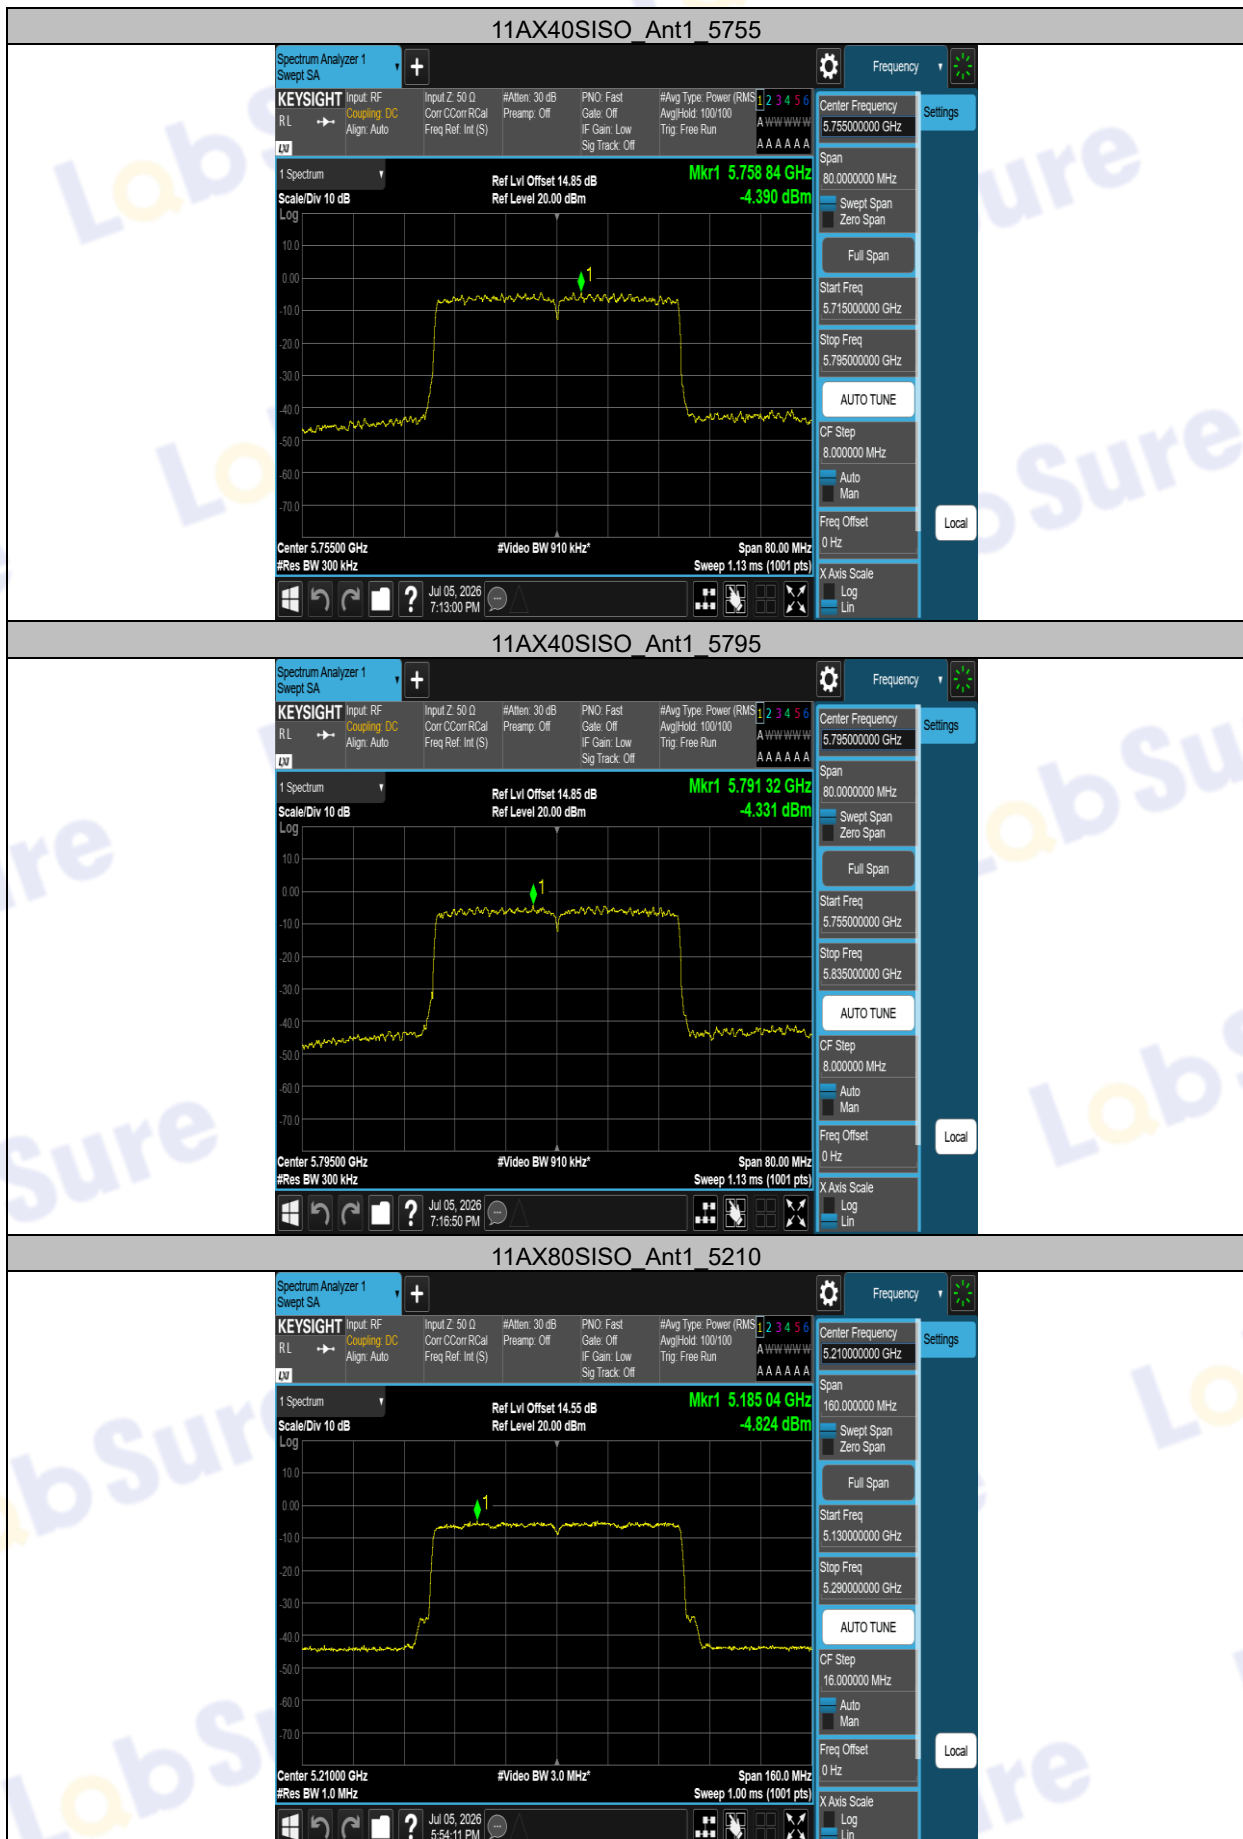

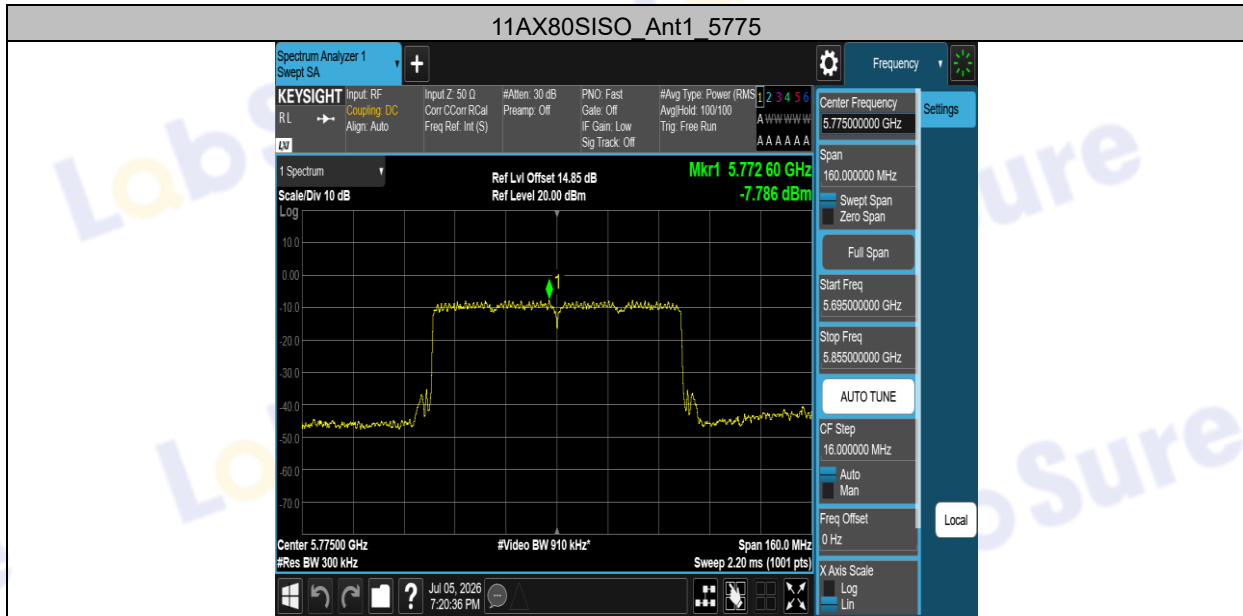

7. Frequency Stability Measurement

7.1. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


7.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

7.3. Test procedures

- (1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- (2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.
- (3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

7.4. Test setup

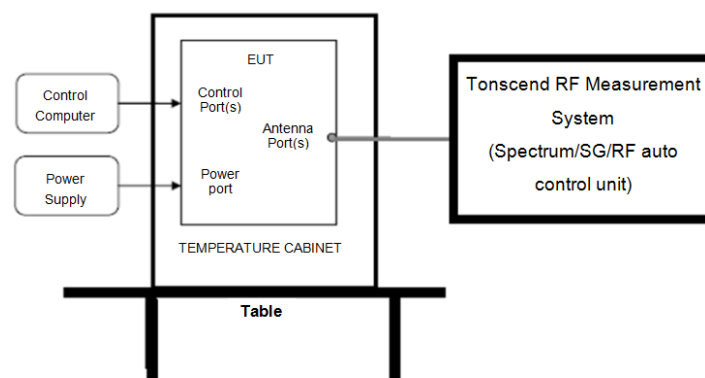

7.5. Test Environment

Temperature	24.6°C	Relative Humidity	54.1%
Atmosphere Pressure	100.9kPa	Test Voltage	DC 5V

7.6. Test result

Voltage							
Test Mode	Freq (MHz)	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11AX20SISO	5180	NV	NT	-21000.00	-4.054054	20	PASS
		LV	NT	-21000.00	-4.054054	20	PASS
		HV	NT	-21000.00	-4.054054	20	PASS
	5200	NV	NT	-20000.00	-3.846154	20	PASS
		LV	NT	-20000.00	-3.846154	20	PASS
		HV	NT	-21000.00	-4.038462	20	PASS
	5240	NV	NT	-20000.00	-3.816794	20	PASS
		LV	NT	-21000.00	-4.007634	20	PASS
		HV	NT	-21000.00	-4.007634	20	PASS
	5745	NV	NT	-23000.00	-4.003481	20	PASS
		LV	NT	-23000.00	-4.003481	20	PASS
		HV	NT	-23000.00	-4.003481	20	PASS
	5785	NV	NT	-23000.00	-3.975799	20	PASS
		LV	NT	-23000.00	-3.975799	20	PASS
		HV	NT	-23000.00	-3.975799	20	PASS
	5825	NV	NT	-23000.00	-3.948498	20	PASS
		LV	NT	-23000.00	-3.948498	20	PASS
		HV	NT	-23000.00	-3.948498	20	PASS
11AX40SISO	5190	NV	NT	-20000.00	-3.853565	20	PASS
		LV	NT	-20000.00	-3.853565	20	PASS
		HV	NT	-21000.00	-4.046243	20	PASS
	5230	NV	NT	-21000.00	-4.015296	20	PASS
		LV	NT	-21000.00	-4.015296	20	PASS
		HV	NT	-21000.00	-4.015296	20	PASS
	5755	NV	NT	-23000.00	-3.996525	20	PASS
		LV	NT	-23000.00	-3.996525	20	PASS
		HV	NT	-23000.00	-3.996525	20	PASS
5795	NV	NT	-22000.00	-3.796376	20	PASS	
	LV	NT	-23000.00	-3.968939	20	PASS	
	HV	NT	-23000.00	-3.968939	20	PASS	
11AX80SISO	5210	NV	NT	-21000.00	-4.030710	20	PASS
		LV	NT	-21000.00	-4.030710	20	PASS
		HV	NT	-21000.00	-4.030710	20	PASS
	5775	NV	NT	-23000.00	-3.982684	20	PASS
		LV	NT	-23000.00	-3.982684	20	PASS
		HV	NT	-23000.00	-3.982684	20	PASS

Remark: Pre-testing all test modes, only the data of the worst case is included in this report.


Temperature							
Test Mode	Freq (MHz)	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11AX20SISO	5180	NV	5	-20000.00	-3.861004	20	PASS
		NV	15	-21000.00	-4.054054	20	PASS
		NV	25	-20000.00	-3.861004	20	PASS
		NV	35	-20000.00	-3.861004	20	PASS
	5200	NV	5	-21000.00	-4.038462	20	PASS
		NV	15	-20000.00	-3.846154	20	PASS
		NV	25	-21000.00	-4.038462	20	PASS
		NV	35	-21000.00	-4.038462	20	PASS
	5240	NV	5	-21000.00	-4.007634	20	PASS
		NV	15	-21000.00	-4.007634	20	PASS
		NV	25	-21000.00	-4.007634	20	PASS
		NV	35	-21000.00	-4.007634	20	PASS
	5745	NV	5	-23000.00	-4.003481	20	PASS
		NV	15	-23000.00	-4.003481	20	PASS
		NV	25	-23000.00	-4.003481	20	PASS
		NV	35	-23000.00	-4.003481	20	PASS
	5785	NV	5	-23000.00	-3.975799	20	PASS
		NV	15	-23000.00	-3.975799	20	PASS
		NV	25	-23000.00	-3.975799	20	PASS
		NV	35	-23000.00	-3.975799	20	PASS
	5825	NV	5	-23000.00	-3.948498	20	PASS
		NV	15	-23000.00	-3.948498	20	PASS
		NV	25	-23000.00	-3.948498	20	PASS
		NV	35	-23000.00	-3.948498	20	PASS
11AX40SISO	5190	NV	5	-21000.00	-4.046243	20	PASS
		NV	15	-20000.00	-3.853565	20	PASS
		NV	25	-21000.00	-4.046243	20	PASS
		NV	35	-21000.00	-4.046243	20	PASS
	5230	NV	5	-21000.00	-4.015296	20	PASS
		NV	15	-21000.00	-4.015296	20	PASS
		NV	25	-21000.00	-4.015296	20	PASS
		NV	35	-21000.00	-4.015296	20	PASS
	5755	NV	5	-23000.00	-3.996525	20	PASS
		NV	15	-23000.00	-3.996525	20	PASS
		NV	25	-23000.00	-3.996525	20	PASS
		NV	35	-23000.00	-3.996525	20	PASS
11AX80SISO	5210	NV	5	-21000.00	-4.030710	20	PASS
		NV	15	-21000.00	-4.030710	20	PASS
		NV	25	-21000.00	-4.030710	20	PASS
		NV	35	-21000.00	-4.030710	20	PASS
	5775	NV	5	-23000.00	-3.982684	20	PASS

		NV	15	-23000.00	-3.982684	20	PASS
		NV	25	-23000.00	-3.982684	20	PASS
		NV	35	-23000.00	-3.982684	20	PASS


8. Emissions in restricted frequency bands

8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

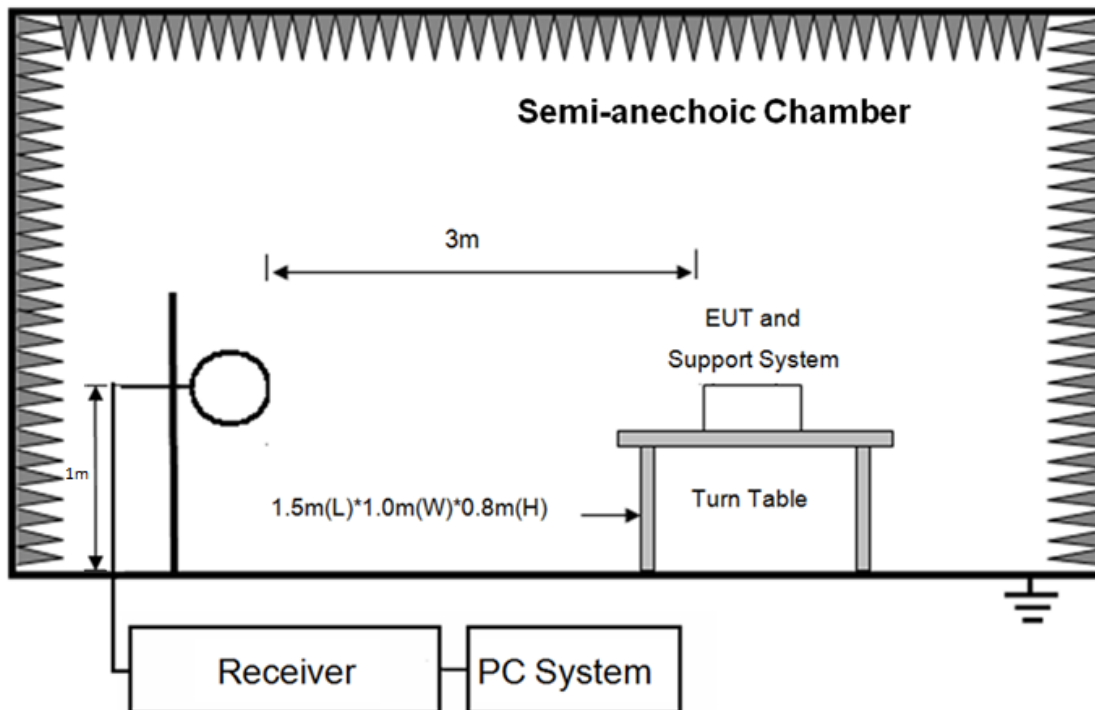

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

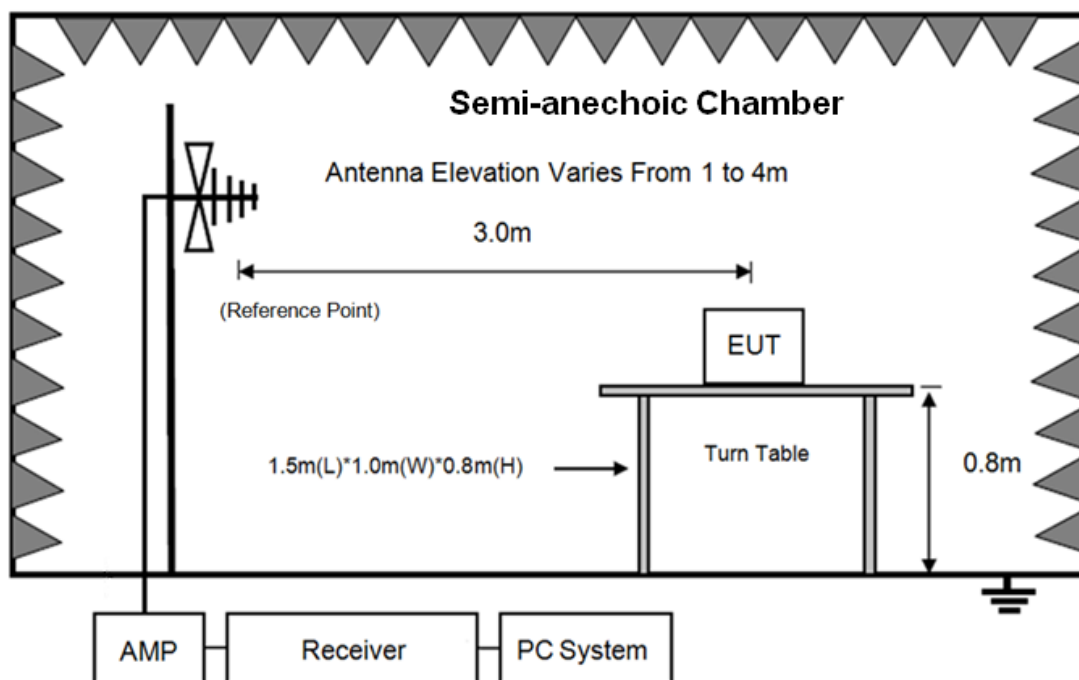

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

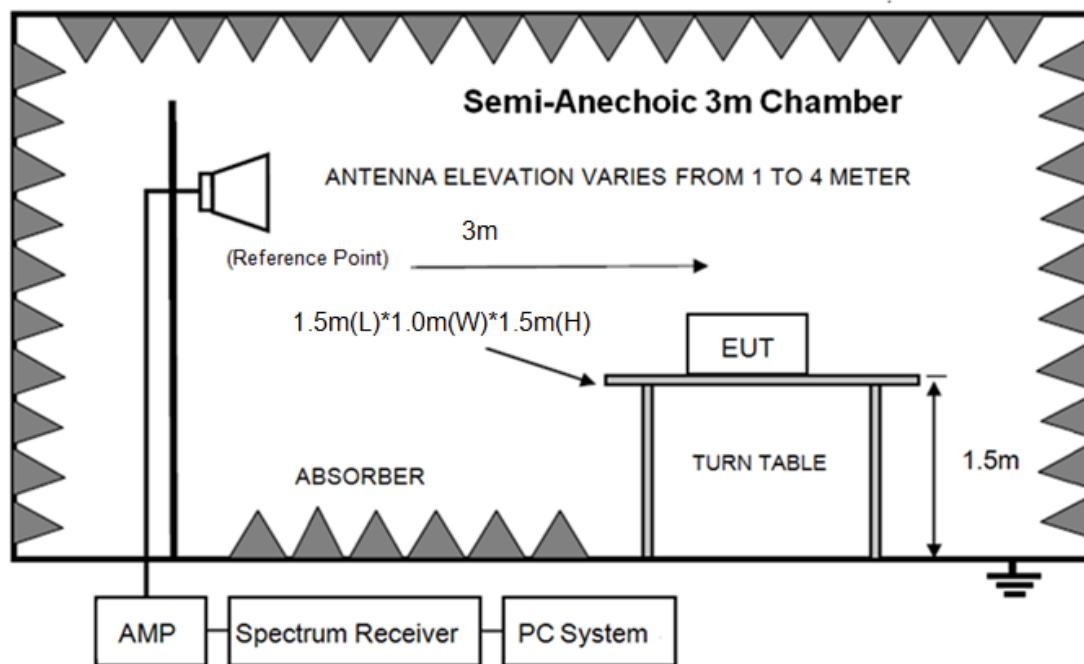

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) RSS-GEN Restricted frequency band*

MHz	MHz	MHz	GHz
0.090-0.110	12.57675-12.57725	399.9-410	7.25-7.75
0.495-0.505	13.36-13.41	608-614	8.025-8.5
2.1735-2.1905	16.42-16.423	960-1427	9.0-9.2
3.020-3.026	16.69475-16.69525	1435-1626.5	9.3-9.5
4.125-4.128	16.80425-16.80475	1645.5-1646.5	10.6-12.7
4.17725-4.17775	25.5-25.67	1660-1710	13.25-13.4
4.20725-4.20775	37.5-38.25	1718.8-1722.2	14.47-14.5
5.677-5.683	73-74.6	2200-2300	15.35-16.2
6.215-6.218	74.8-75.2	2310-2390	17.7-21.4
6.26775-6.26825	108-138	2483.5-2500	22.01-23.12
6.31175-6.31225	149.9-150.05	2655-2900	23.6-24.0
8.291-8.294	156.52475-156.52525	3260-3267	31.2-31.8
8.362-8.366	156.7-156.9	3332-3339	36.43-36.5
8.37625-8.38675	162.0125-167.17	3345.8-3358	Above 38.6
8.41425-8.41475	167.72-173.2	3500-4400	
12.29-12.293	240-285	4.5-5.15	
12.51975-12.52025	322-335.4	5.35-5.46	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(3) FCC 15.209 & RSS-GEN Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30m/3m)$$

8.3.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

8.3. Test procedure

- (1) EUT height should be 0.8 m for below 1 GHz at a semi - anechoic chamber while EUT height should be 1.5 m for above 1GHz at full chamber or semi - anechoic chamber ground with absorbers.
- (2) Setup EUT and assistant system according clause 2.3 and 8.2.
- (3) The antenna used as below table.

Test frequency range	Test antenna used	Test distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	3 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna was located 10 m, Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (4) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 40 GHz:
 - (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degrees, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground).
 - (b) Change work frequency or channel of device if practicable.
 - (c) Change modulation type of device if practicable.
 - (d) Change power supply range from 85% to 115% of the rated supply voltage.
 - (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 40 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz

to 40 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

- (5) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission.

Measurements in both horizontal and vertical polarities were made and the data was recorded.

In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.

- (6) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90kHz, 110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

- (7) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW:

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

- (8) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3MHz for Peak measure, the RBW is set at 1 MHz, VBW is set at 10 Hz for AV value.

8.4. Test result

PASS. (See below detailed test result)

Result Table:

1) For 1GHz~8.5GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	65.1%
Atmospheric Pressure:	101.1kPa
Temperature	23.4°C
Test Date	2026-07-07

Test Mode	Channel	P _u w(dBm)	Verdict
11A	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

Test Mode	Channel	Puw(dBm)	Verdict
11AC20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AC40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AC80	CH42	<Limit	PASS
	CH155	<Limit	PASS
11AX20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AX40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AX80	CH42	<Limit	PASS
	CH155	<Limit	PASS

2) For 8.5GHz~18GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	64.3%
Atmospheric Pressure:	100.7kPa
Temperature	23.8°C
Test Date	2026-07-14

Test Mode	Channel	Puw(dBm)	Verdict
11A	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AC20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AC40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AC80	CH42	<Limit	PASS
	CH155	<Limit	PASS
	LCH	<Limit	PASS

Test Mode	Channel	Puw(dBm)	Verdict
11AX20	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AX40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11AX80	CH42	<Limit	PASS
	CH155	<Limit	PASS

3) For 18GHz~40GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	64.3%
Atmospheric Pressure:	100.7kPa
Temperature	23.8°C
Test Date	2026-07-14

Test Mode	Channel	Puw(dBm)	Verdict
11A	CH165	<Limit	PASS

Remark: Through pre-testing all the test channels, but only the data of the worst case is included in this test report.

4) For 30MHz~1GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	64.3%
Atmospheric Pressure:	100.7kPa
Temperature	23.8°C
Test Date	2026-07-11

Test Mode	Channel	Puw(dBm)	Verdict
11A	CH165	<Limit	PASS

Remark: Remark: Through pre-testing all the test channels, but only the data of the worst case is included in this test report.

5) For 9KHz~30MHz

Environment Parameter	Selected Values During Tests
Relative Humidity	64.3%
Atmospheric Pressure:	100.7kPa
Temperature	23.8°C
Test Date	2026-07-11

Test Mode	Channel	Puw(dBm)	Verdict
11A	CH165	<Limit	PASS

Remark:


1) Through pre-testing all the test channels, but only the data of the worst case is included in this test report.

2) All the emissions except fundamental emission from 9 kHz to 40 GHz were comply with 15.209 limit.

1) For Radiated Emission test (1GHz -8.5GHz)

Radiated Emission Test Result

Memo : 11A 5180MHz

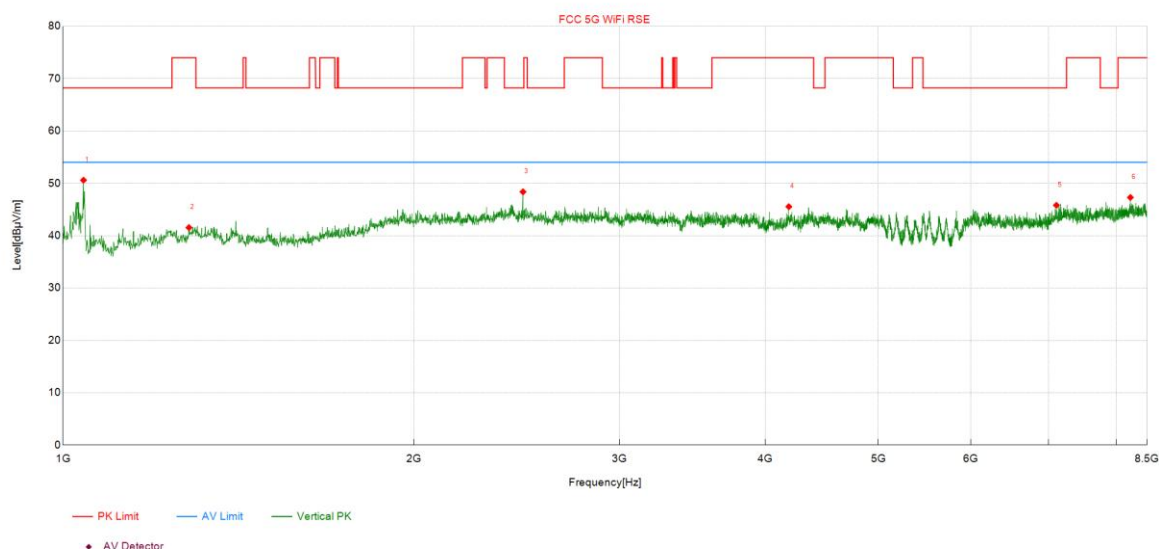

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1041.25	68.40	50.60	-17.80	68.20	17.60	Peak	VERTICAL
2	1282.19	56.42	41.55	-14.87	74.00	32.45	Peak	VERTICAL
3	2479.38	58.94	48.37	-10.57	68.20	19.83	Peak	VERTICAL
4	4190.31	54.72	45.54	-9.18	74.00	28.46	Peak	VERTICAL
5	7105.94	51.69	45.81	-5.88	68.20	22.39	Peak	VERTICAL
6	8223.44	52.11	47.30	-4.81	74.00	26.70	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5180MHz

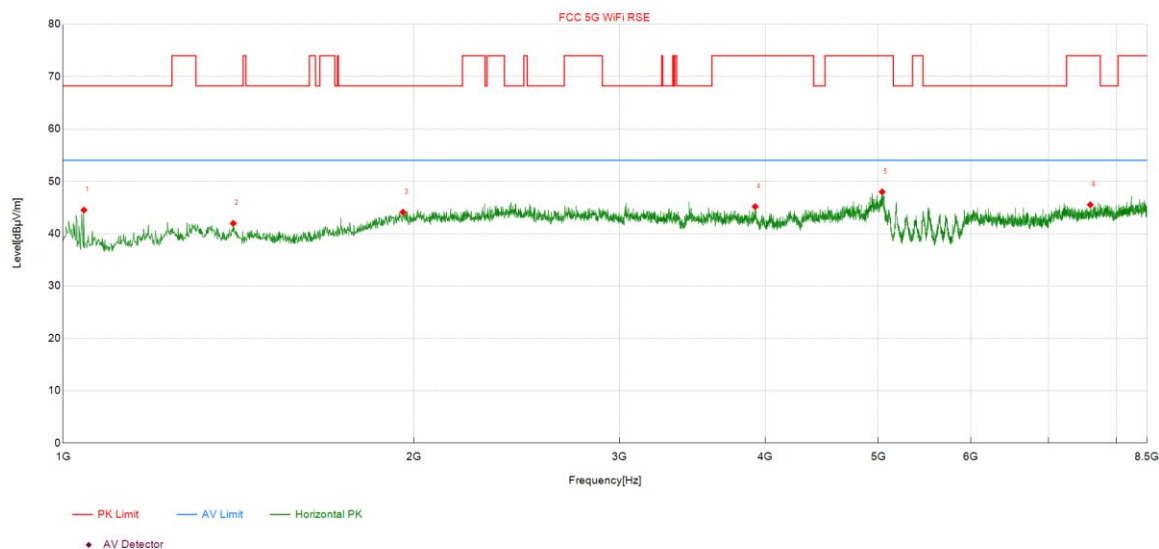

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1042.19	62.34	44.51	-17.83	68.20	23.69	Peak	HORIZONTAL
2	1399.38	57.43	41.97	-15.46	68.20	26.23	Peak	HORIZONTAL
3	1956.25	56.15	44.10	-12.05	68.20	24.10	Peak	HORIZONTAL
4	3921.25	54.57	45.16	-9.41	74.00	28.84	Peak	HORIZONTAL
5	5037.81	56.21	47.98	-8.23	74.00	26.02	Peak	HORIZONTAL
6	7599.06	51.06	45.52	-5.54	74.00	28.48	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5200MHz

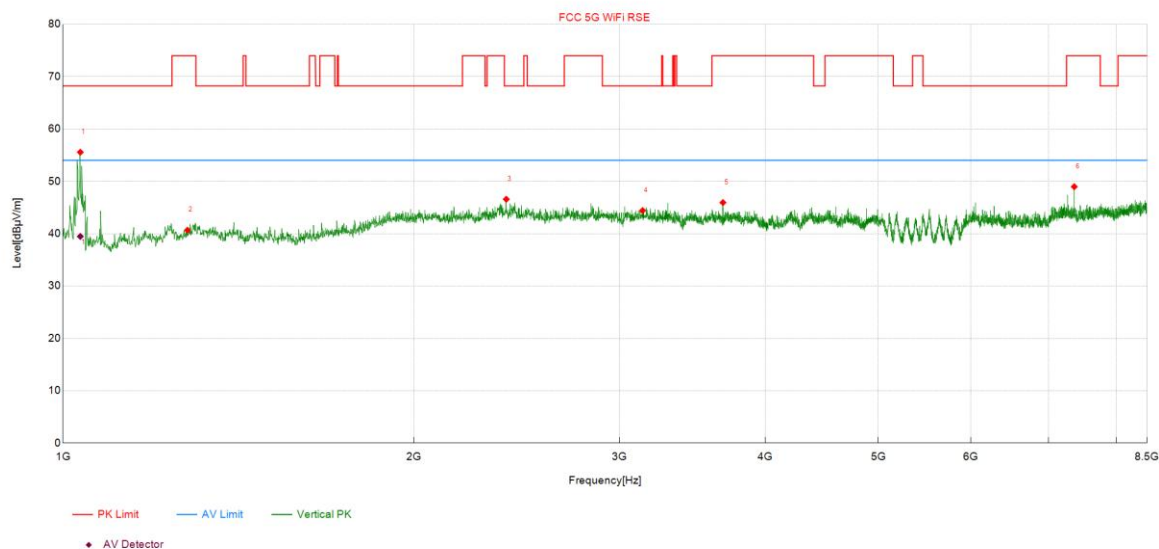

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1034.69	73.20	55.56	-17.64	68.20	12.64	Peak	VERTICAL
		57.12	39.48	-17.64	54.00	14.52	Average	VERTICAL
2	1278.44	55.56	40.67	-14.89	74.00	33.33	Peak	VERTICAL
3	2398.75	56.99	46.58	-10.41	68.20	21.62	Peak	VERTICAL
4	3139.38	54.64	44.42	-10.22	68.20	23.78	Peak	VERTICAL
5	3679.38	55.92	45.94	-9.98	74.00	28.06	Peak	VERTICAL
6	7360.94	54.82	48.97	-5.85	74.00	25.03	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5200MHz

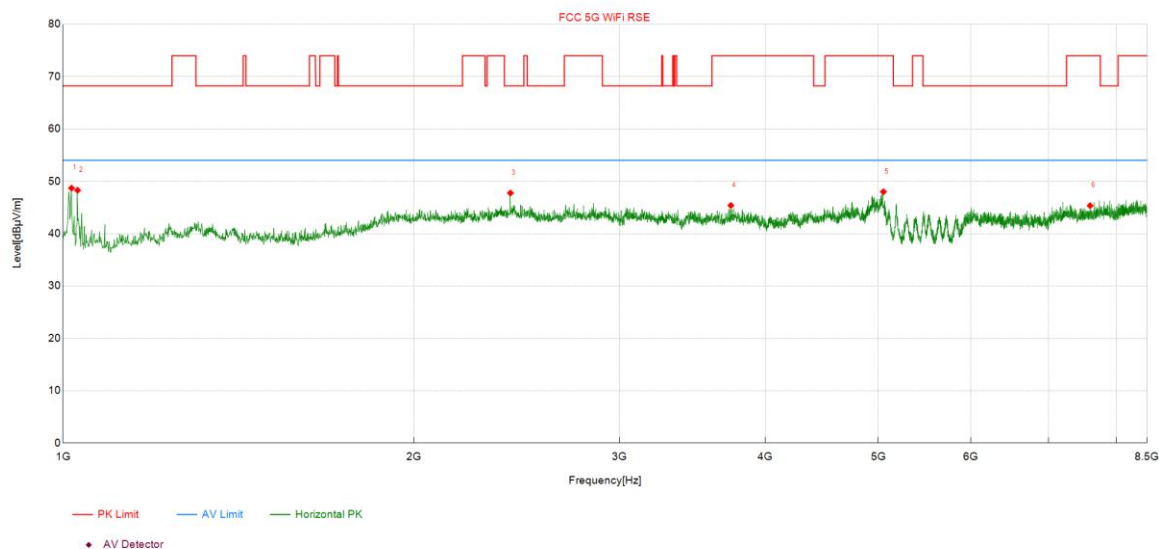

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1016.88	65.90	48.70	-17.20	68.20	19.50	Peak	HORIZONTAL
2	1029.06	65.79	48.29	-17.50	68.20	19.91	Peak	HORIZONTAL
3	2418.44	58.23	47.76	-10.47	68.20	20.44	Peak	HORIZONTAL
4	3737.50	55.02	45.39	-9.63	74.00	28.61	Peak	HORIZONTAL
5	5050.00	56.32	48.00	-8.32	74.00	26.00	Peak	HORIZONTAL
6	7595.31	50.88	45.35	-5.53	74.00	28.65	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5240MHz

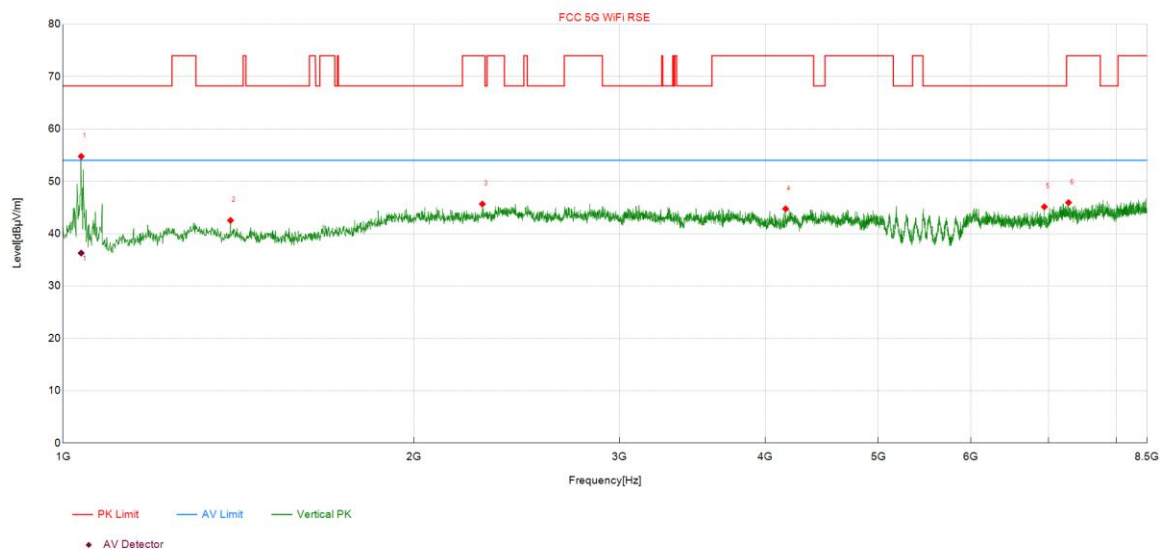

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1036.56	72.45	54.76	-17.69	68.20	13.44	Peak	VERTICAL
		53.99	36.30	-17.69	54.00	17.70	Average	VERTICAL
2	1391.88	57.94	42.53	-15.41	68.20	25.67	Peak	VERTICAL
3	2288.13	56.87	45.67	-11.20	74.00	28.33	Peak	VERTICAL
4	4164.06	54.16	44.74	-9.42	74.00	29.26	Peak	VERTICAL
5	6939.06	50.84	45.13	-5.71	68.20	23.07	Peak	VERTICAL
6	7278.44	51.65	45.93	-5.72	74.00	28.07	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5240MHz

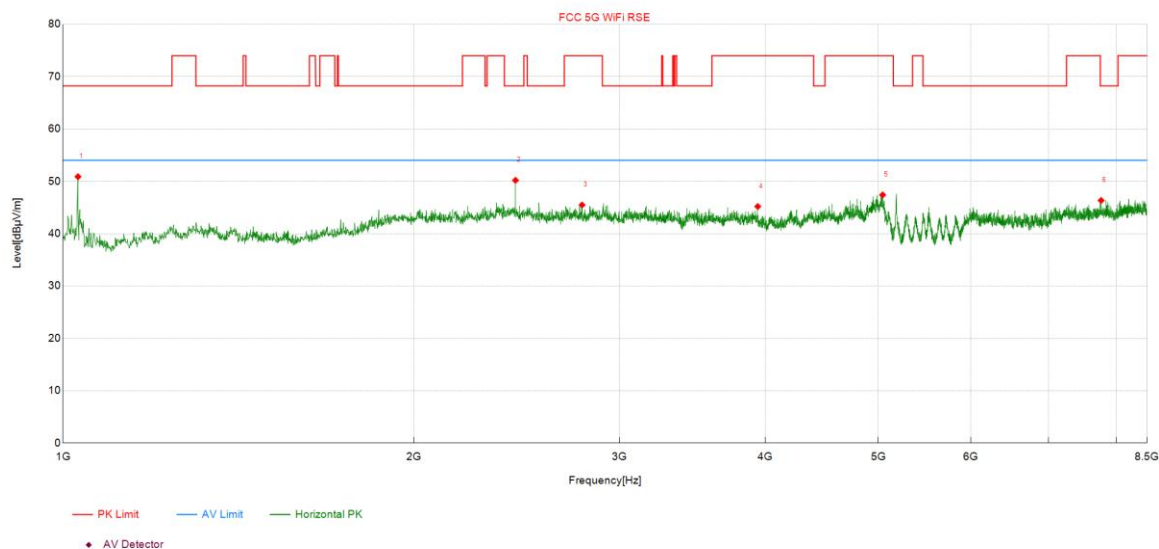

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1030.00	68.41	50.88	-17.53	68.20	17.32	Peak	HORIZONTAL
2	2442.81	60.74	50.19	-10.55	68.20	18.01	Peak	HORIZONTAL
3	2785.94	56.01	45.48	-10.53	74.00	28.52	Peak	HORIZONTAL
4	3940.94	54.63	45.19	-9.44	74.00	28.81	Peak	HORIZONTAL
5	5042.50	55.65	47.40	-8.25	74.00	26.60	Peak	HORIZONTAL
6	7762.19	51.47	46.34	-5.13	68.20	21.86	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5745MHz

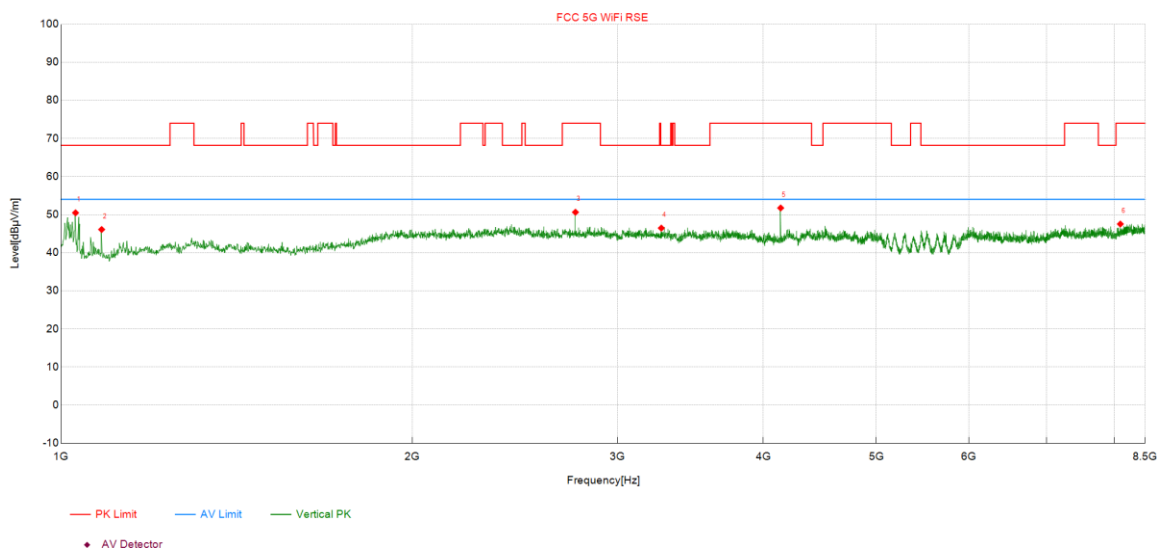

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1029.06	67.98	50.48	-17.50	68.20	17.72	Peak	VERTICAL
2	1083.44	64.40	46.09	-18.31	68.20	22.11	Peak	VERTICAL
3	2760.63	61.05	50.63	-10.42	74.00	23.37	Peak	VERTICAL
4	3270.63	56.70	46.47	-10.23	68.20	21.73	Peak	VERTICAL
5	4139.69	61.37	51.75	-9.62	74.00	22.25	Peak	VERTICAL
6	8094.06	52.48	47.54	-4.94	74.00	26.46	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5745MHz

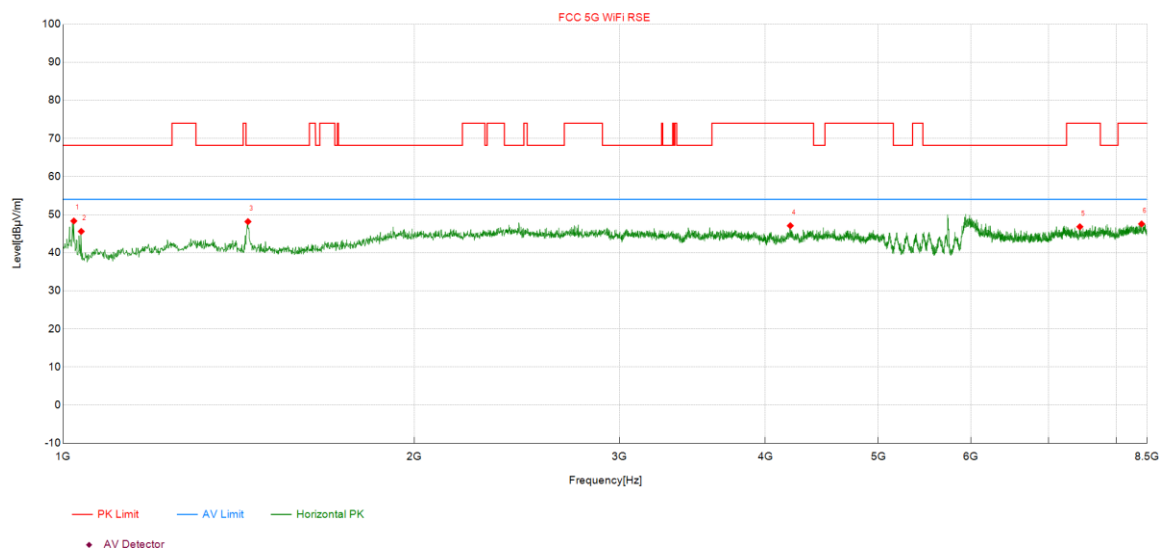

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1021.56	65.64	48.33	-17.31	68.20	19.87	Peak	HORIZONTAL
2	1036.56	63.29	45.60	-17.69	68.20	22.60	Peak	HORIZONTAL
3	1440.63	64.05	48.17	-15.88	68.20	20.03	Peak	HORIZONTAL
4	4202.50	56.17	47.09	-9.08	74.00	26.91	Peak	HORIZONTAL
5	7443.44	52.51	46.82	-5.69	74.00	27.18	Peak	HORIZONTAL
6	8407.19	52.07	47.56	-4.51	74.00	26.44	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5785MHz

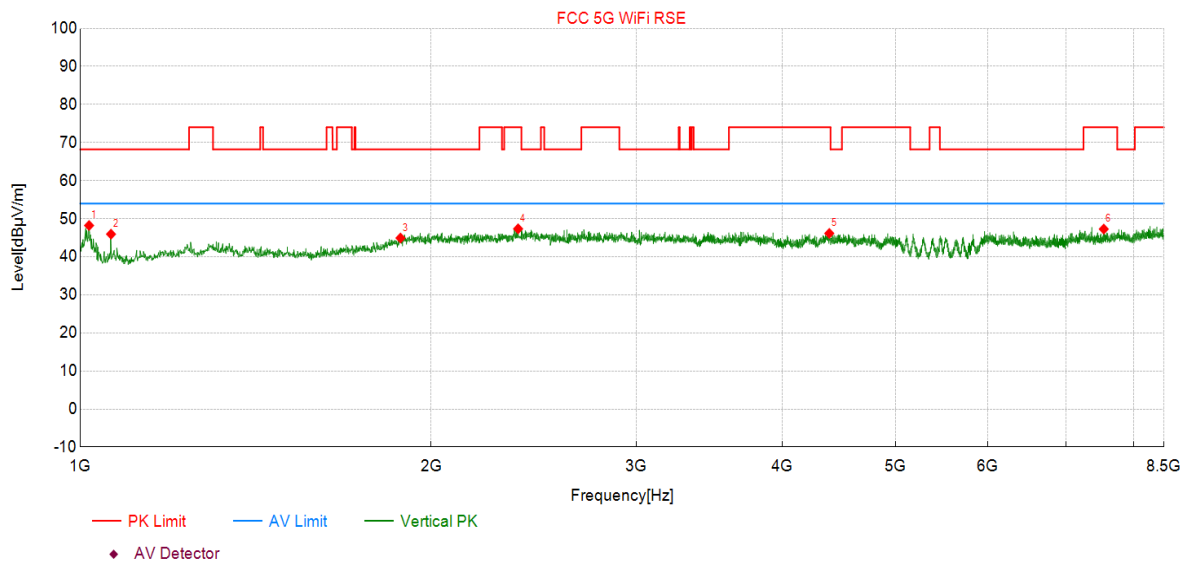

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1017.81	65.44	48.22	-17.22	68.20	19.98	Peak	VERTICAL
2	1062.81	64.08	45.95	-18.13	68.20	22.25	Peak	VERTICAL
3	1882.19	57.66	44.93	-12.73	68.20	23.27	Peak	VERTICAL
4	2374.38	58.01	47.35	-10.66	74.00	26.65	Peak	VERTICAL
5	4389.06	54.84	46.15	-8.69	74.00	27.85	Peak	VERTICAL
6	7546.56	52.79	47.28	-5.51	74.00	26.72	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5785MHz

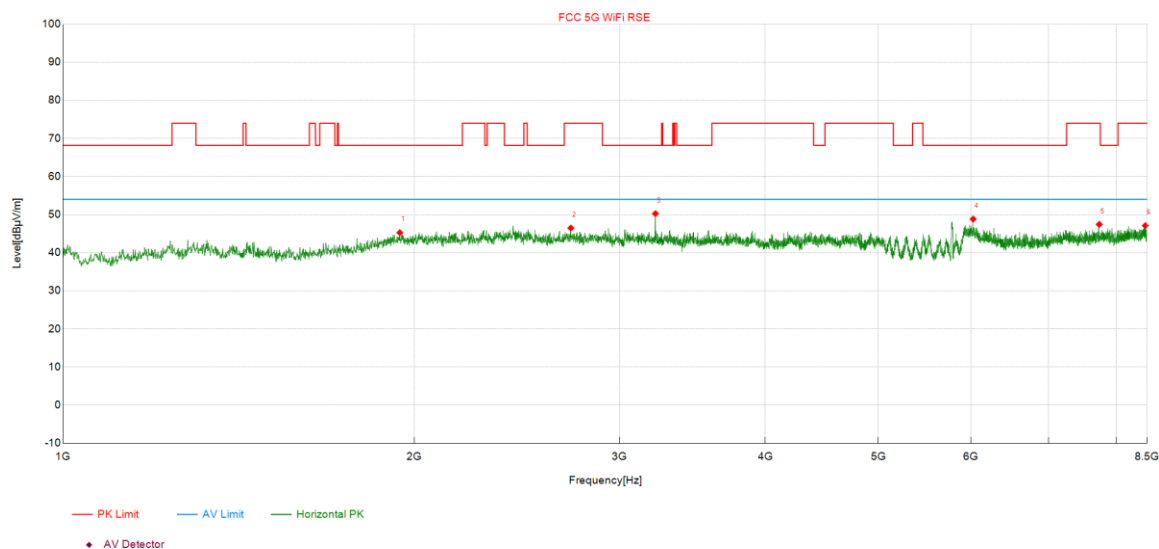

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1944.06	57.39	45.26	-12.13	68.20	22.94	Peak	HORIZONTAL
2	2725.00	56.88	46.47	-10.41	74.00	27.53	Peak	HORIZONTAL
3	3220.00	60.43	50.26	-10.17	68.20	17.94	Peak	HORIZONTAL
4	6029.69	55.19	48.84	-6.35	68.20	19.36	Peak	HORIZONTAL
5	7733.13	52.64	47.43	-5.21	74.00	26.57	Peak	HORIZONTAL
6	8470.00	51.40	47.11	-4.29	74.00	26.89	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5825MHz

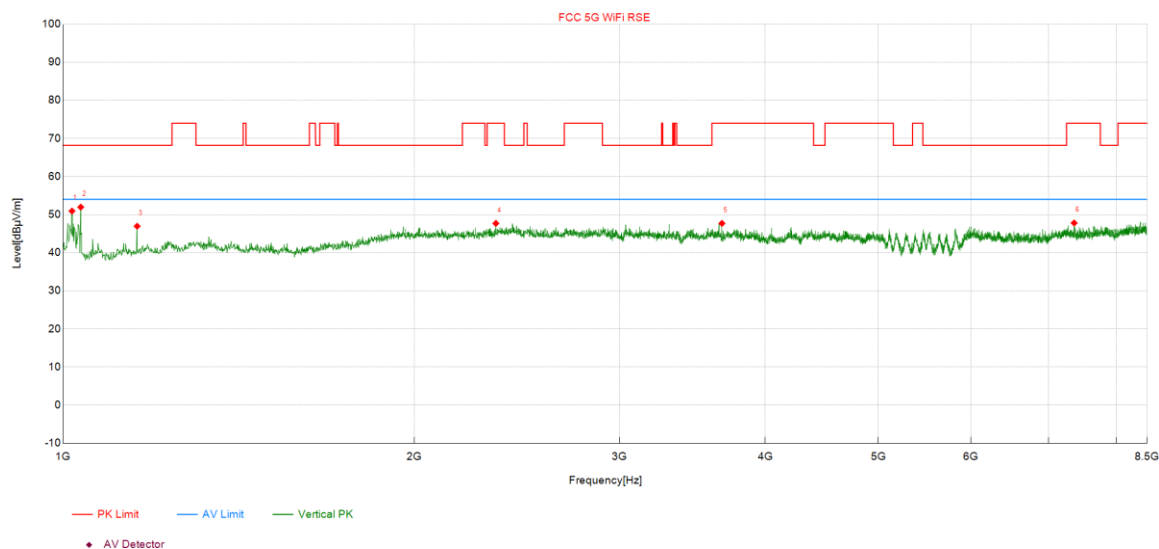

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1017.81	68.16	50.94	-17.22	68.20	17.26	Peak	VERTICAL
2	1035.63	69.64	51.97	-17.67	68.20	16.23	Peak	VERTICAL
3	1157.50	63.77	46.96	-16.81	68.20	21.24	Peak	VERTICAL
4	2350.00	58.61	47.71	-10.90	74.00	26.29	Peak	VERTICAL
5	3671.88	57.66	47.71	-9.95	74.00	26.29	Peak	VERTICAL
6	7360.00	53.66	47.81	-5.85	74.00	26.19	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11A 5825MHz

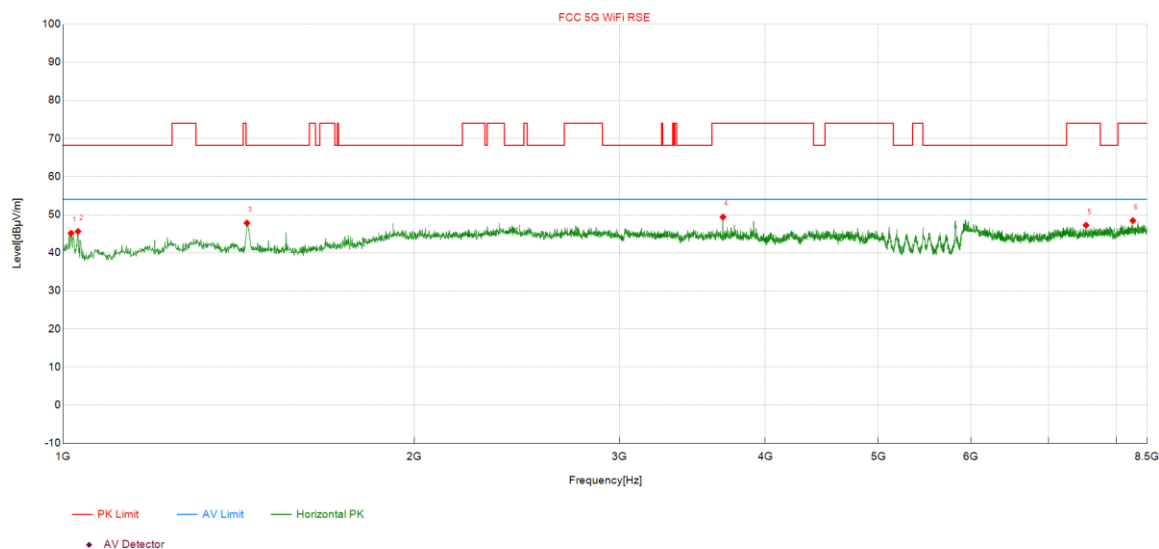

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1015.94	62.31	45.14	-17.17	68.20	23.06	Peak	HORIZONTAL
2	1030.00	63.12	45.59	-17.53	68.20	22.61	Peak	HORIZONTAL
3	1437.81	63.66	47.80	-15.86	68.20	20.40	Peak	HORIZONTAL
4	3679.38	59.35	49.37	-9.98	74.00	24.63	Peak	HORIZONTAL
5	7534.38	52.76	47.22	-5.54	74.00	26.78	Peak	HORIZONTAL
6	8263.75	53.30	48.44	-4.86	74.00	25.56	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5180MHz

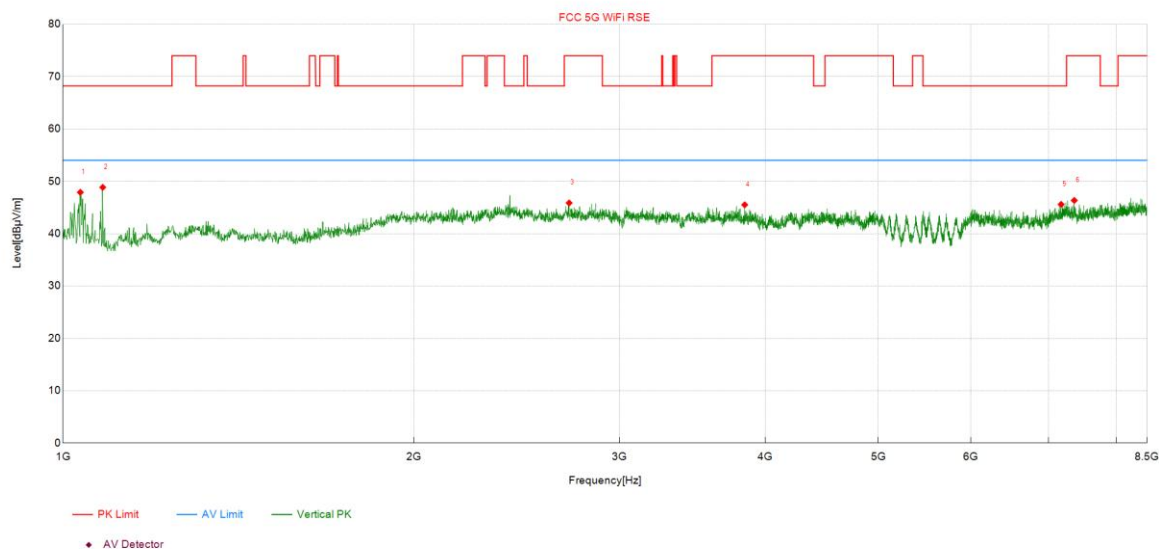

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1034.69	65.54	47.90	-17.64	68.20	20.30	Peak	VERTICAL
2	1081.56	67.14	48.85	-18.29	68.20	19.35	Peak	VERTICAL
3	2715.63	56.30	45.87	-10.43	74.00	28.13	Peak	VERTICAL
4	3840.63	54.95	45.51	-9.44	74.00	28.49	Peak	VERTICAL
5	7172.50	51.44	45.60	-5.84	68.20	22.60	Peak	VERTICAL
6	7360.94	52.20	46.35	-5.85	74.00	27.65	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5180MHz

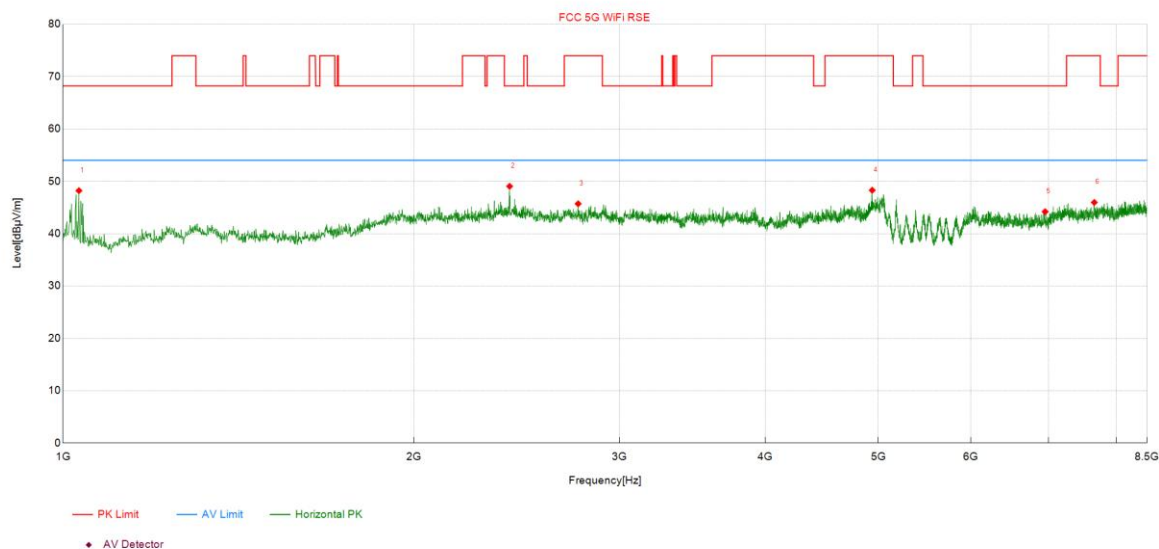

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1031.88	65.79	48.21	-17.58	68.20	19.99	Peak	HORIZONTAL
2	2414.69	59.50	49.05	-10.45	68.20	19.15	Peak	HORIZONTAL
3	2764.38	56.15	45.71	-10.44	74.00	28.29	Peak	HORIZONTAL
4	4940.31	56.28	48.30	-7.98	74.00	25.70	Peak	HORIZONTAL
5	6949.38	49.85	44.20	-5.65	68.20	24.00	Peak	HORIZONTAL
6	7658.13	51.43	45.97	-5.46	74.00	28.03	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5200MHz

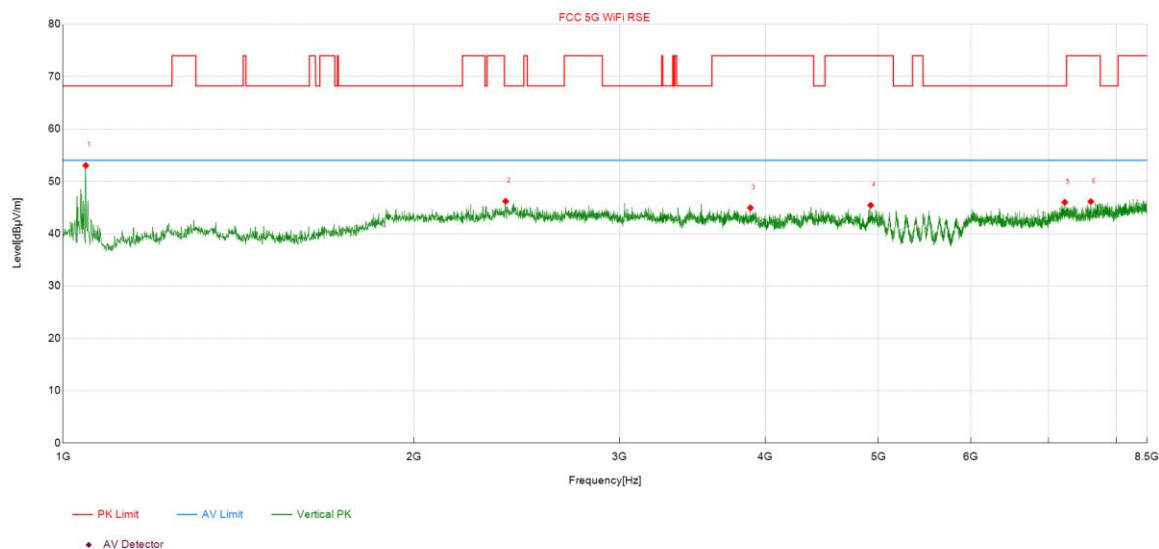

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1045.94	70.94	53.02	-17.92	68.20	15.18	Peak	VERTICAL
2	2395.94	56.62	46.18	-10.44	68.20	22.02	Peak	VERTICAL
3	3883.75	54.38	44.94	-9.44	74.00	29.06	Peak	VERTICAL
4	4925.31	53.46	45.43	-8.03	74.00	28.57	Peak	VERTICAL
5	7225.00	51.71	46.01	-5.70	68.20	22.19	Peak	VERTICAL
6	7605.63	51.66	46.13	-5.53	74.00	27.87	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5200MHz

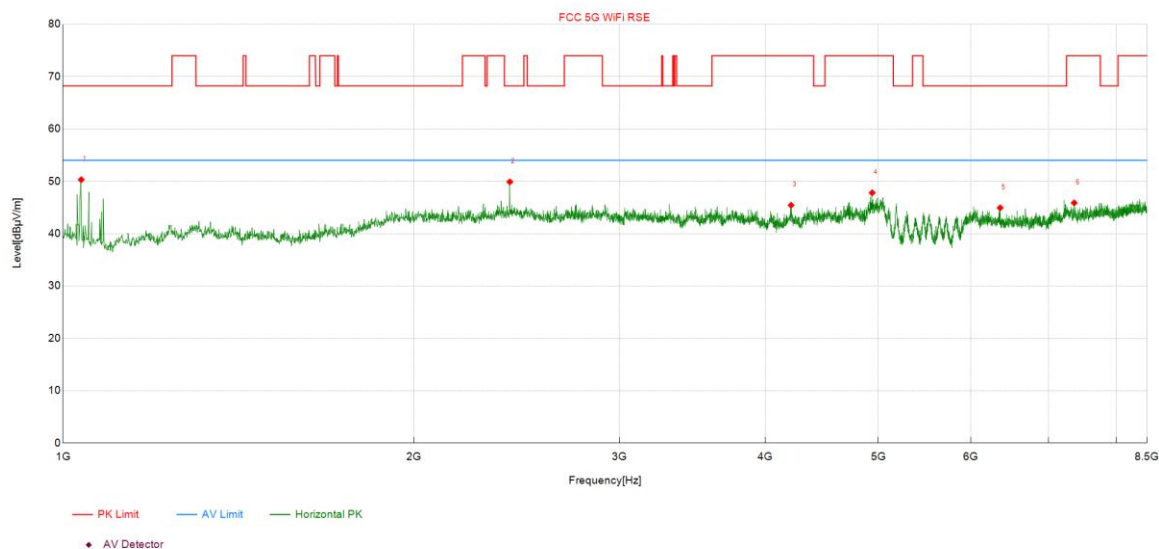

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1036.56	68.00	50.31	-17.69	68.20	17.89	Peak	HORIZONTAL
2	2415.63	60.36	49.90	-10.46	68.20	18.30	Peak	HORIZONTAL
3	4209.06	54.52	45.43	-9.09	74.00	28.57	Peak	HORIZONTAL
4	4939.38	55.80	47.81	-7.99	74.00	26.19	Peak	HORIZONTAL
5	6358.75	51.42	44.93	-6.49	68.20	23.27	Peak	HORIZONTAL
6	7360.00	51.73	45.88	-5.85	74.00	28.12	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5240MHz

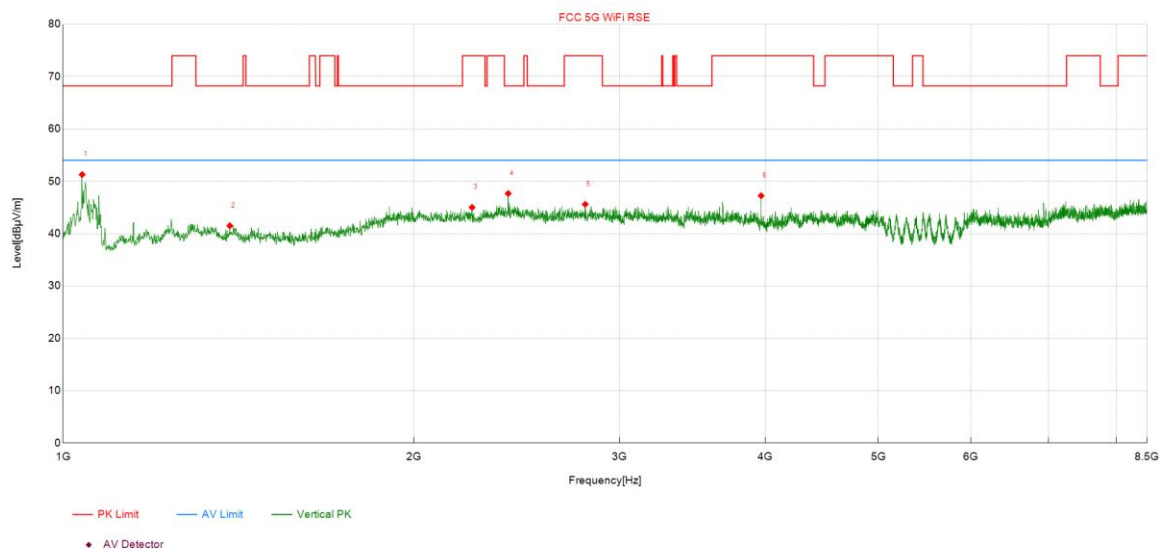

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1038.44	69.03	51.29	-17.74	68.20	16.91	Peak	VERTICAL
2	1390.00	56.92	41.52	-15.40	68.20	26.68	Peak	VERTICAL
3	2242.19	56.42	45.02	-11.40	74.00	28.98	Peak	VERTICAL
4	2408.13	58.09	47.67	-10.42	68.20	20.53	Peak	VERTICAL
5	2803.75	56.18	45.61	-10.57	74.00	28.39	Peak	VERTICAL
6	3967.19	56.84	47.25	-9.59	74.00	26.75	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5240MHz

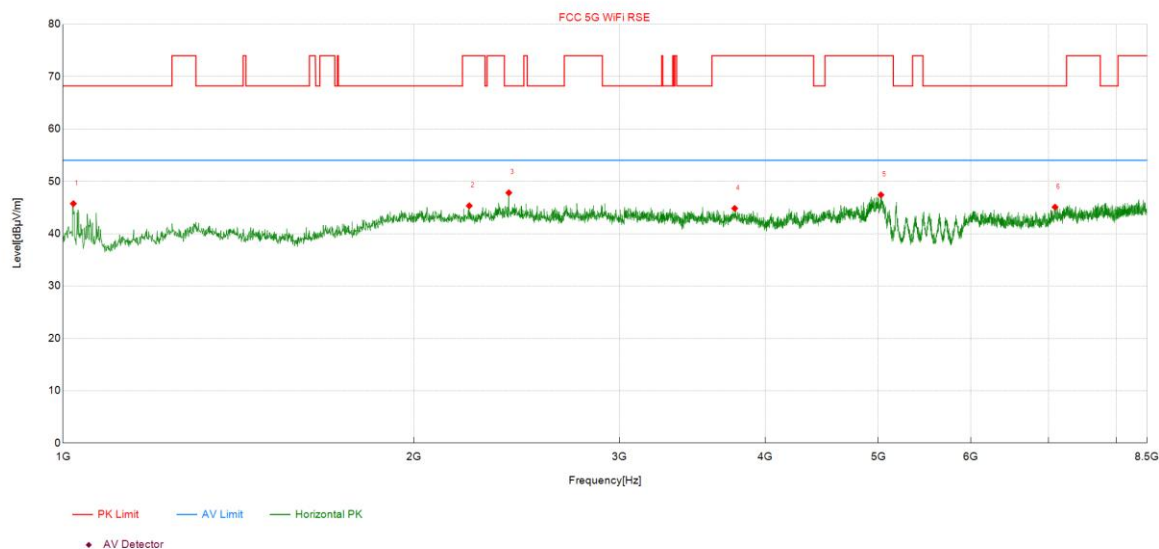

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1020.63	63.03	45.74	-17.29	68.20	22.46	Peak	HORIZONTAL
2	2230.00	56.77	45.32	-11.45	74.00	28.68	Peak	HORIZONTAL
3	2410.94	58.24	47.81	-10.43	68.20	20.39	Peak	HORIZONTAL
4	3765.63	54.20	44.83	-9.37	74.00	29.17	Peak	HORIZONTAL
5	5025.63	55.54	47.41	-8.13	74.00	26.59	Peak	HORIZONTAL
6	7087.19	50.98	45.07	-5.91	68.20	23.13	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5745MHz

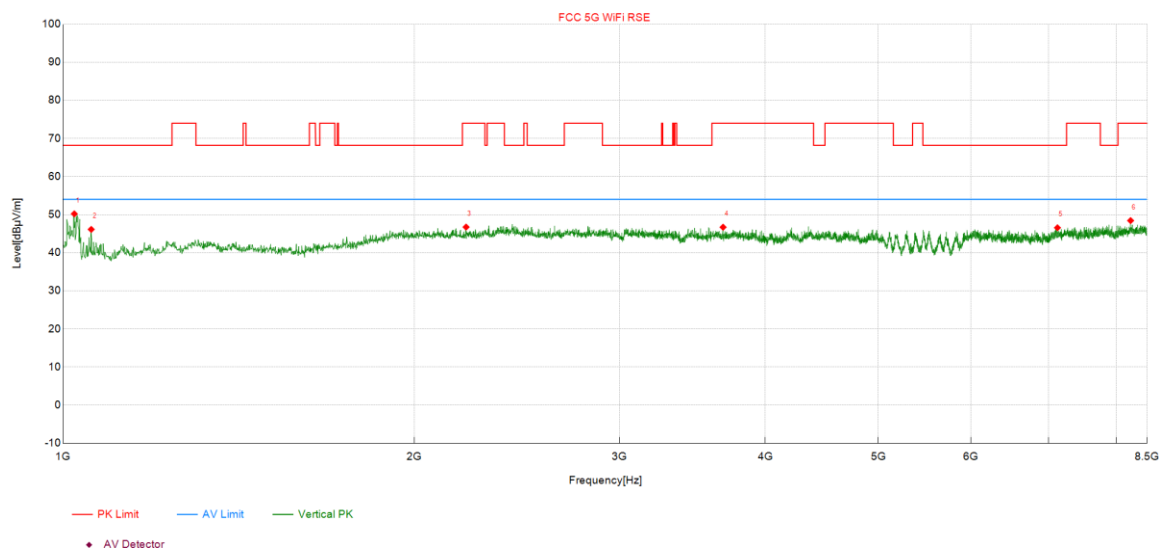

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1022.50	67.54	50.21	-17.33	68.20	17.99	Peak	VERTICAL
2	1057.19	64.21	46.12	-18.09	68.20	22.08	Peak	VERTICAL
3	2215.94	58.27	46.74	-11.53	74.00	27.26	Peak	VERTICAL
4	3680.31	56.69	46.70	-9.99	74.00	27.30	Peak	VERTICAL
5	7120.94	52.42	46.56	-5.86	68.20	21.64	Peak	VERTICAL
6	8227.19	53.25	48.44	-4.81	74.00	25.56	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5745MHz

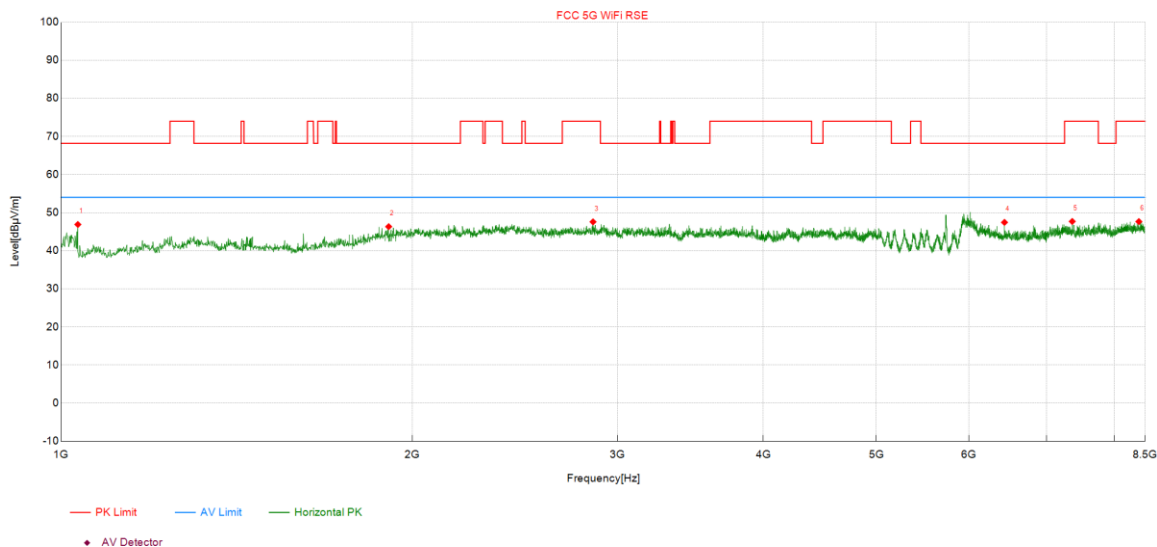

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1033.75	64.51	46.89	-17.62	68.20	21.31	Peak	HORIZONTAL
2	1909.38	58.70	46.32	-12.38	68.20	21.88	Peak	HORIZONTAL
3	2858.13	57.78	47.58	-10.20	74.00	26.42	Peak	HORIZONTAL
4	6439.38	54.02	47.45	-6.57	68.20	20.75	Peak	HORIZONTAL
5	7360.94	53.54	47.69	-5.85	74.00	26.31	Peak	HORIZONTAL
6	8395.00	52.19	47.65	-4.54	74.00	26.35	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5785MHz

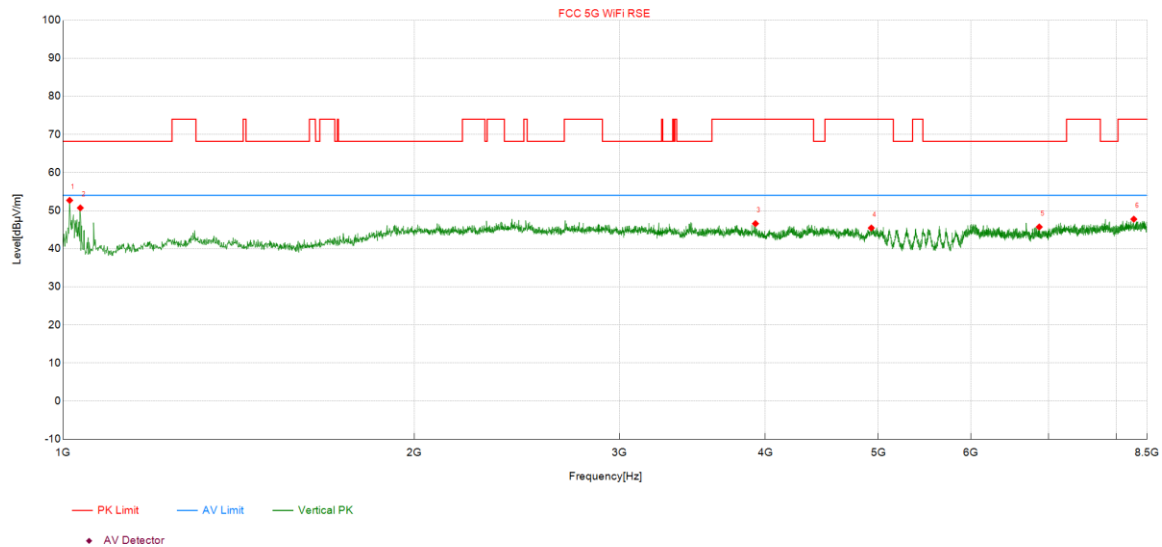

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	9852.56	49.20	47.21	-1.99	68.20	20.99	Peak	VERTICAL
2	11570.00	47.79	48.58	0.79	74.00	25.42	Peak	VERTICAL
3	13057.63	47.04	49.40	2.36	68.20	18.80	Peak	VERTICAL
4	15141.69	46.77	51.76	4.99	68.20	16.44	Peak	VERTICAL
5	16817.25	46.18	53.64	7.46	68.20	14.56	Peak	VERTICAL
6	17351.63	54.55	62.26	7.71	68.20	5.94	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5785MHz

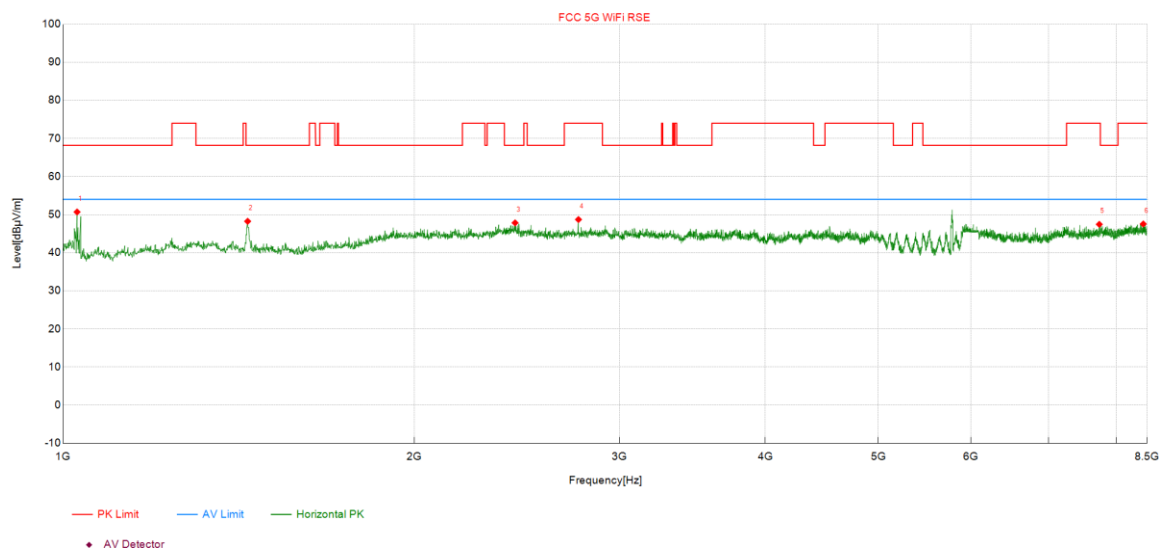

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1028.13	68.17	50.70	-17.47	68.20	17.50	Peak	HORIZONTAL
2	1439.69	64.13	48.25	-15.88	68.20	19.95	Peak	HORIZONTAL
3	2440.94	58.38	47.84	-10.54	68.20	20.36	Peak	HORIZONTAL
4	2766.25	59.17	48.72	-10.45	74.00	25.28	Peak	HORIZONTAL
5	7734.06	52.67	47.46	-5.21	74.00	26.54	Peak	HORIZONTAL
6	8435.31	51.94	47.55	-4.39	74.00	26.45	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5825MHz

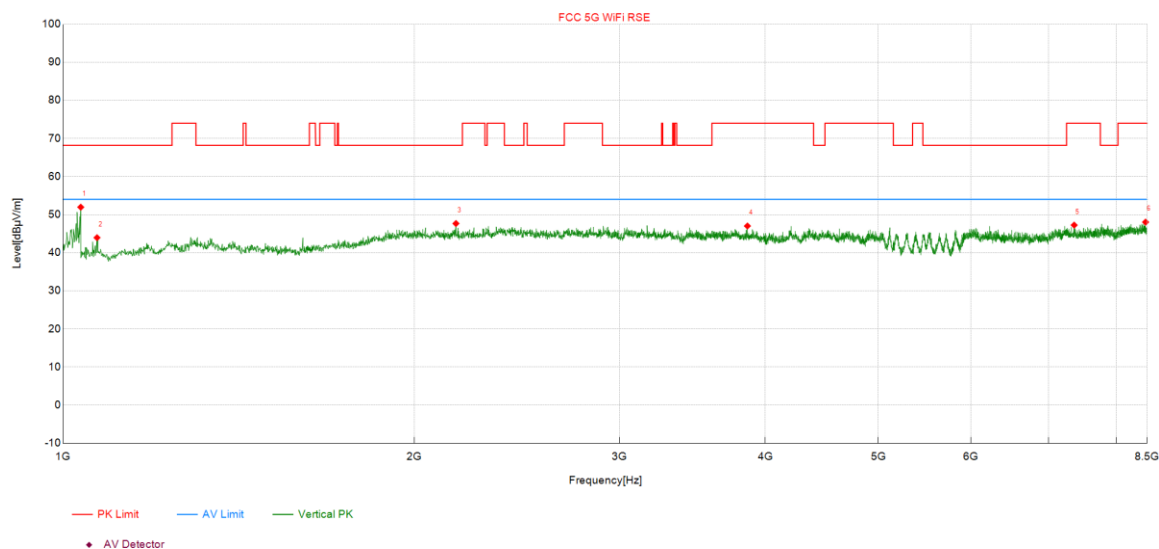

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1035.63	69.63	51.96	-17.67	68.20	16.24	Peak	VERTICAL
2	1069.38	62.13	43.95	-18.18	68.20	24.25	Peak	VERTICAL
3	2171.88	59.33	47.67	-11.66	68.20	20.53	Peak	VERTICAL
4	3861.25	56.50	47.02	-9.48	74.00	26.98	Peak	VERTICAL
5	7360.00	53.10	47.25	-5.85	74.00	26.75	Peak	VERTICAL
6	8473.75	52.34	48.04	-4.30	74.00	25.96	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N20 5825MHz

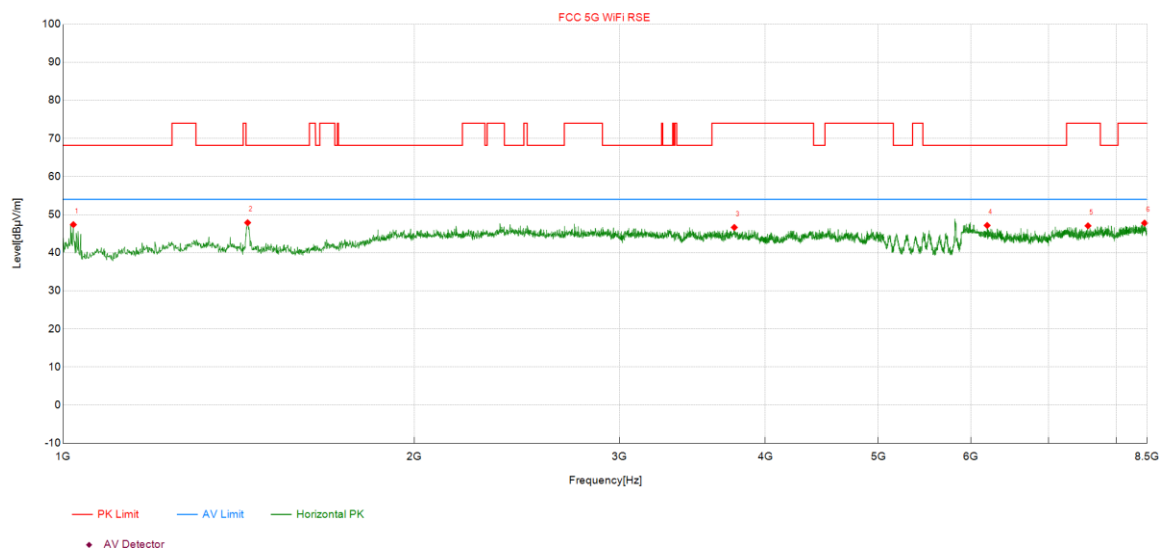

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1020.63	64.67	47.38	-17.29	68.20	20.82	Peak	HORIZONTAL
2	1439.69	63.77	47.89	-15.88	68.20	20.31	Peak	HORIZONTAL
3	3762.81	56.03	46.65	-9.38	74.00	27.35	Peak	HORIZONTAL
4	6198.44	54.00	47.17	-6.83	68.20	21.03	Peak	HORIZONTAL
5	7563.44	52.59	47.07	-5.52	74.00	26.93	Peak	HORIZONTAL
6	8456.88	52.12	47.80	-4.32	74.00	26.20	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5190MHz

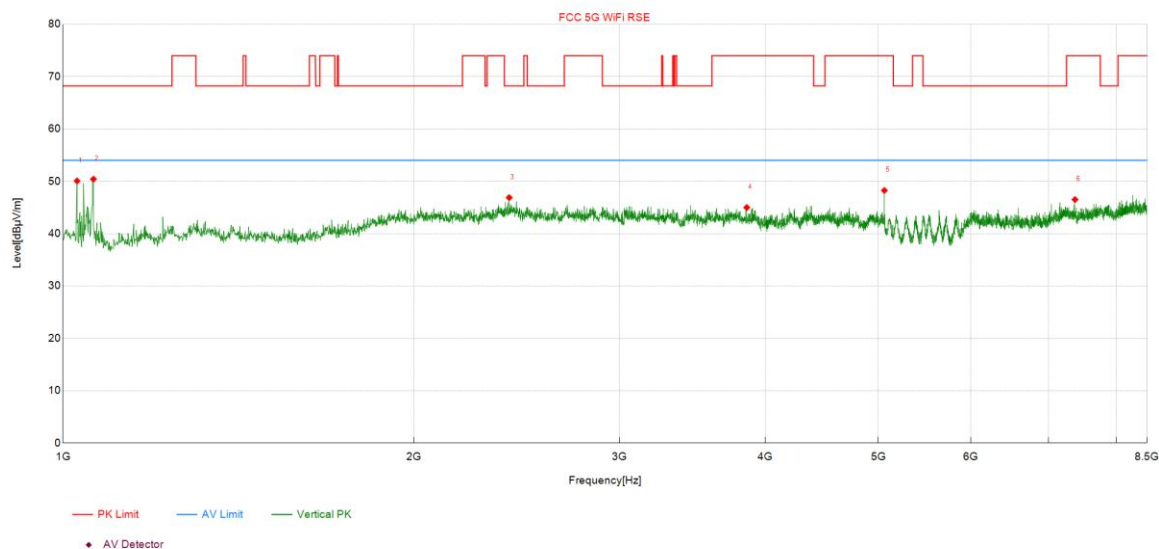

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1028.13	67.54	50.07	-17.47	68.20	18.13	Peak	VERTICAL
2	1061.88	68.53	50.41	-18.12	68.20	17.79	Peak	VERTICAL
3	2412.81	57.34	46.89	-10.45	68.20	21.31	Peak	VERTICAL
4	3856.56	54.49	45.00	-9.49	74.00	29.00	Peak	VERTICAL
5	5060.31	56.56	48.25	-8.31	74.00	25.75	Peak	VERTICAL
6	7372.19	52.38	46.51	-5.87	74.00	27.49	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5190MHz

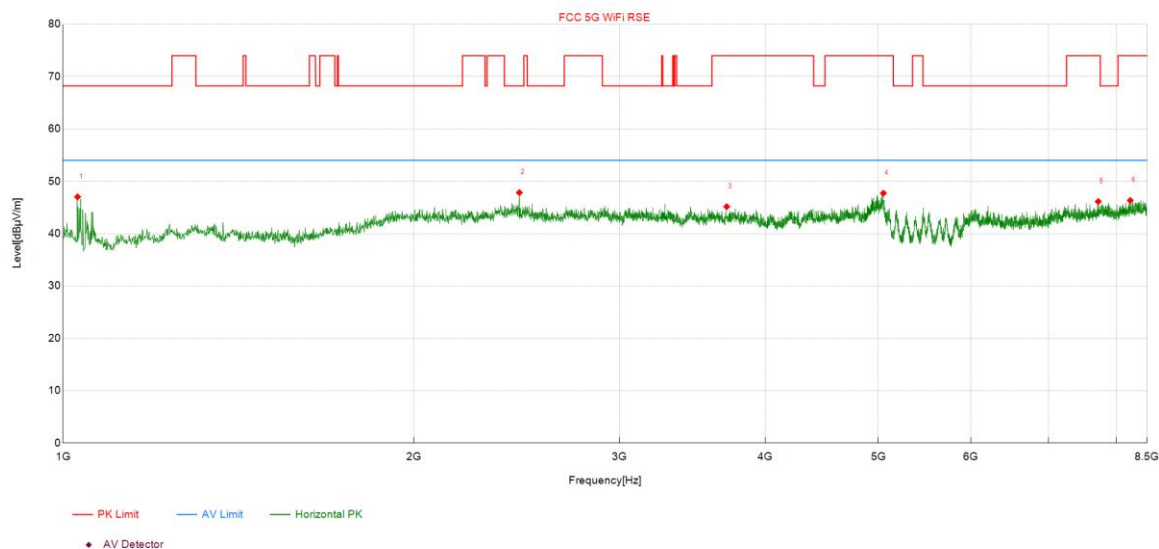

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1029.06	64.53	47.03	-17.50	68.20	21.17	Peak	HORIZONTAL
2	2461.56	58.40	47.84	-10.56	68.20	20.36	Peak	HORIZONTAL
3	3706.56	55.14	45.16	-9.98	74.00	28.84	Peak	HORIZONTAL
4	5050.00	56.04	47.72	-8.32	74.00	26.28	Peak	HORIZONTAL
5	7718.13	51.45	46.14	-5.31	74.00	27.86	Peak	HORIZONTAL
6	8221.56	51.14	46.34	-4.80	74.00	27.66	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5230MHz

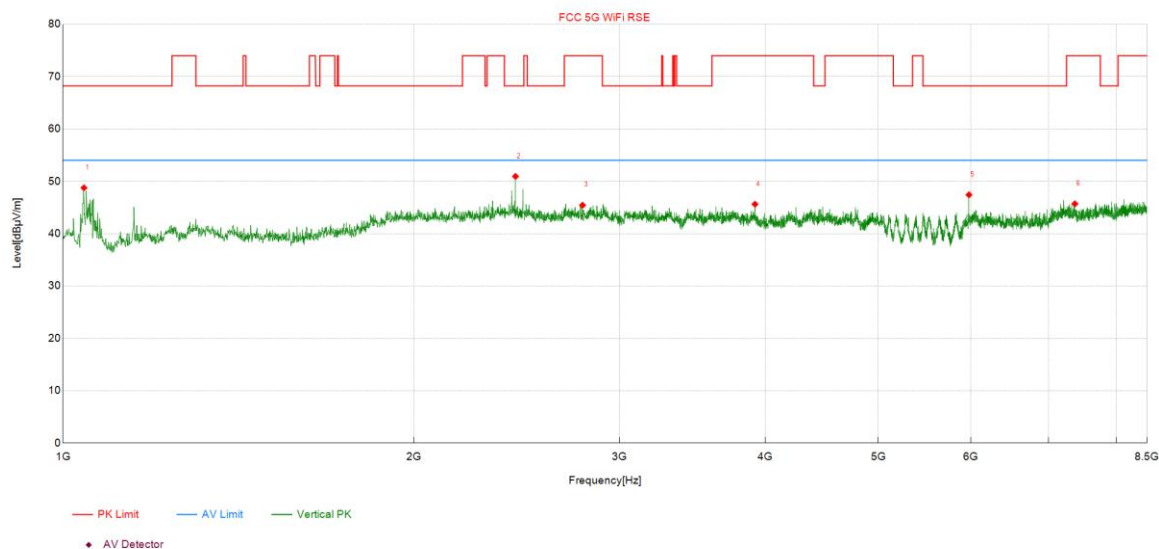

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1042.19	66.59	48.76	-17.83	68.20	19.44	Peak	VERTICAL
2	2442.81	61.48	50.93	-10.55	68.20	17.27	Peak	VERTICAL
3	2788.75	55.97	45.43	-10.54	74.00	28.57	Peak	VERTICAL
4	3919.38	55.05	45.63	-9.42	74.00	28.37	Peak	VERTICAL
5	5980.00	54.65	47.42	-7.23	68.20	20.78	Peak	VERTICAL
6	7370.31	51.56	45.70	-5.86	74.00	28.30	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5230MHz

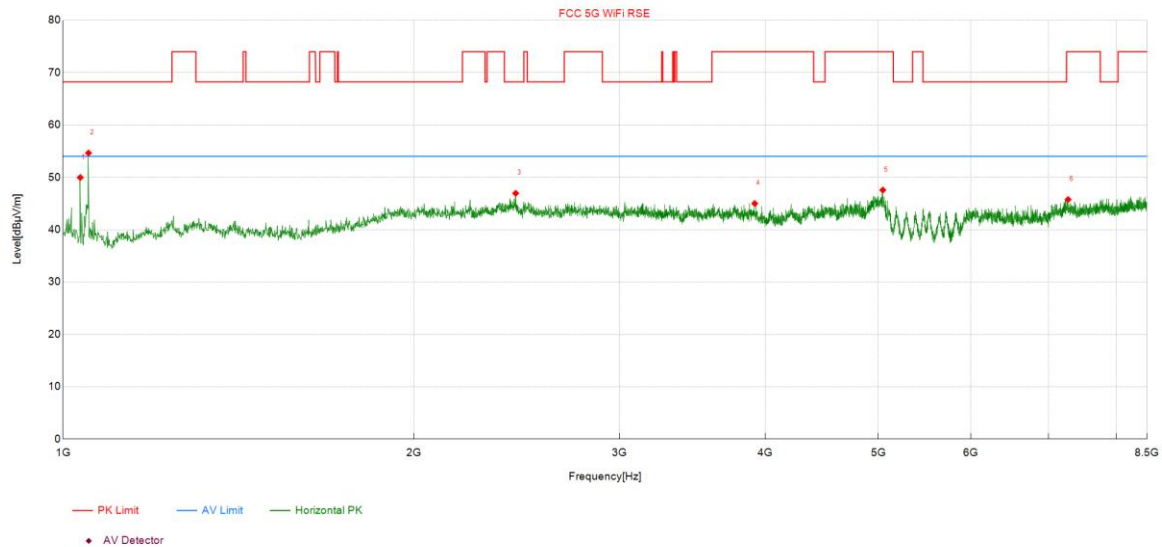

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1034.69	67.60	49.96	-17.64	68.20	18.24	Peak	HORIZONTAL
2	1051.56	72.68	54.64	-18.04	68.20	13.56	Peak	HORIZONTAL
3	2443.75	57.50	46.95	-10.55	68.20	21.25	Peak	HORIZONTAL
4	3917.50	54.42	45.00	-9.42	74.00	29.00	Peak	HORIZONTAL
5	5044.38	55.84	47.57	-8.27	74.00	26.43	Peak	HORIZONTAL
6	7271.88	51.44	45.76	-5.68	74.00	28.24	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5755MHz

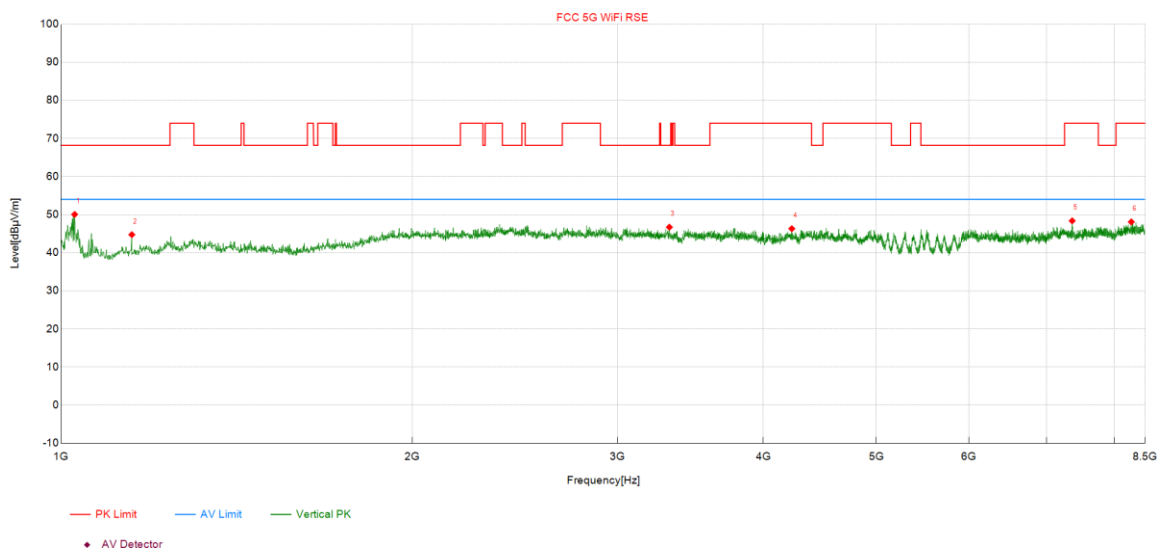

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1027.19	67.50	50.05	-17.45	68.20	18.15	Peak	VERTICAL
2	1150.00	61.65	44.75	-16.90	68.20	23.45	Peak	VERTICAL
3	3323.13	56.82	46.71	-10.11	68.20	21.49	Peak	VERTICAL
4	4231.56	55.41	46.31	-9.10	74.00	27.69	Peak	VERTICAL
5	7360.00	54.23	48.38	-5.85	74.00	25.62	Peak	VERTICAL
6	8271.25	52.97	48.10	-4.87	74.00	25.90	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5755MHz

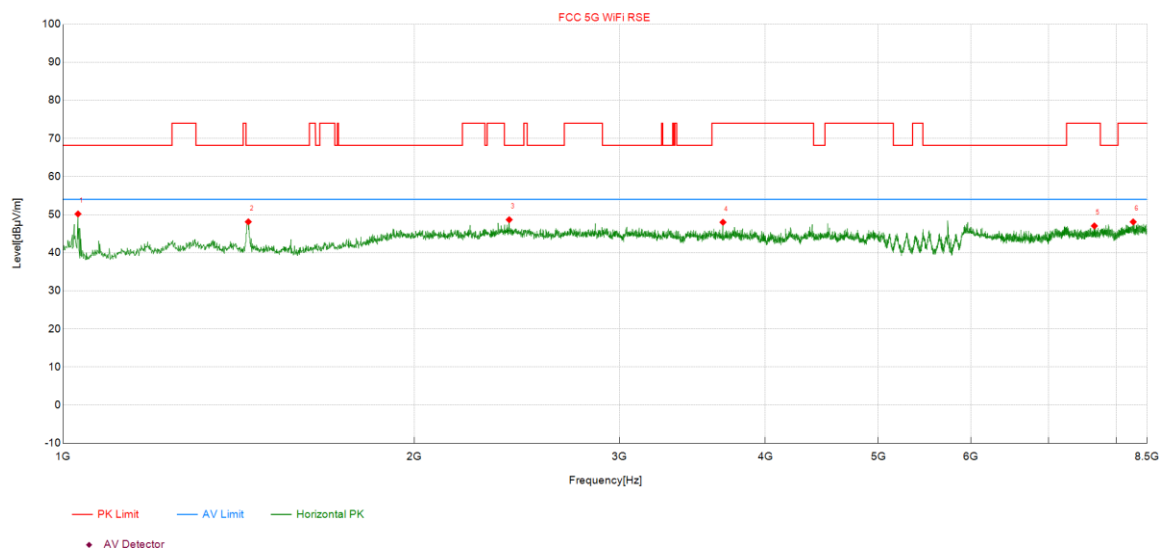

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1030.00	67.71	50.18	-17.53	68.20	18.02	Peak	HORIZONTAL
2	1441.56	64.01	48.12	-15.89	68.20	20.08	Peak	HORIZONTAL
3	2412.81	59.12	48.67	-10.45	68.20	19.53	Peak	HORIZONTAL
4	3679.38	57.98	48.00	-9.98	74.00	26.00	Peak	HORIZONTAL
5	7659.06	52.50	47.04	-5.46	74.00	26.96	Peak	HORIZONTAL
6	8269.38	52.96	48.10	-4.86	74.00	25.90	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5795MHz

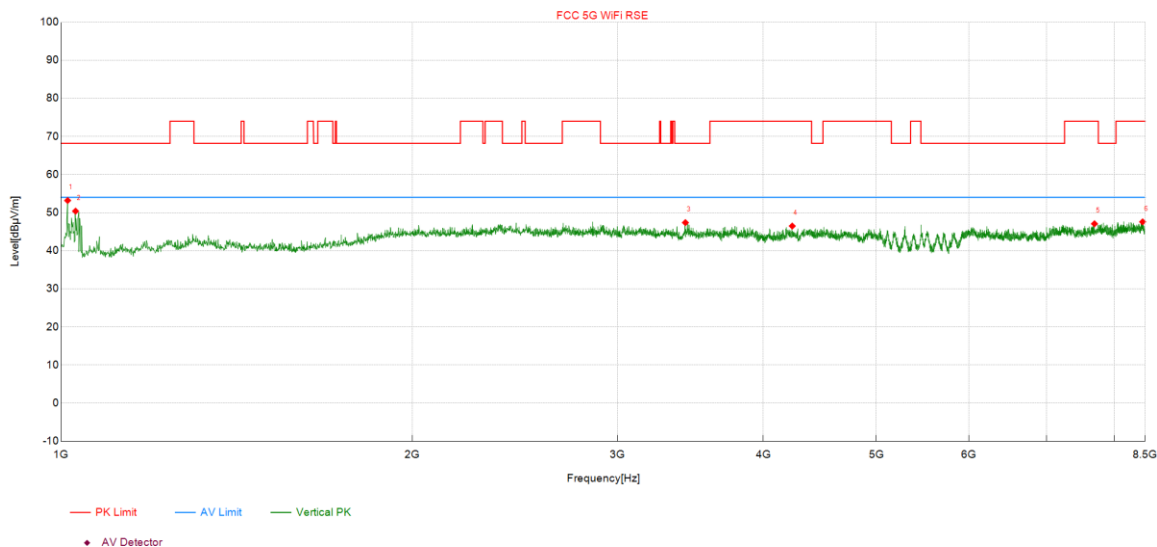

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1013.13	70.29	53.19	-17.10	68.20	15.01	Peak	VERTICAL
2	1029.06	67.89	50.39	-17.50	68.20	17.81	Peak	VERTICAL
3	3430.00	57.50	47.38	-10.12	68.20	20.82	Peak	VERTICAL
4	4235.31	55.58	46.48	-9.10	74.00	27.52	Peak	VERTICAL
5	7690.94	52.51	47.08	-5.43	74.00	26.92	Peak	VERTICAL
6	8457.81	51.90	47.58	-4.32	74.00	26.42	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11N40 5795MHz

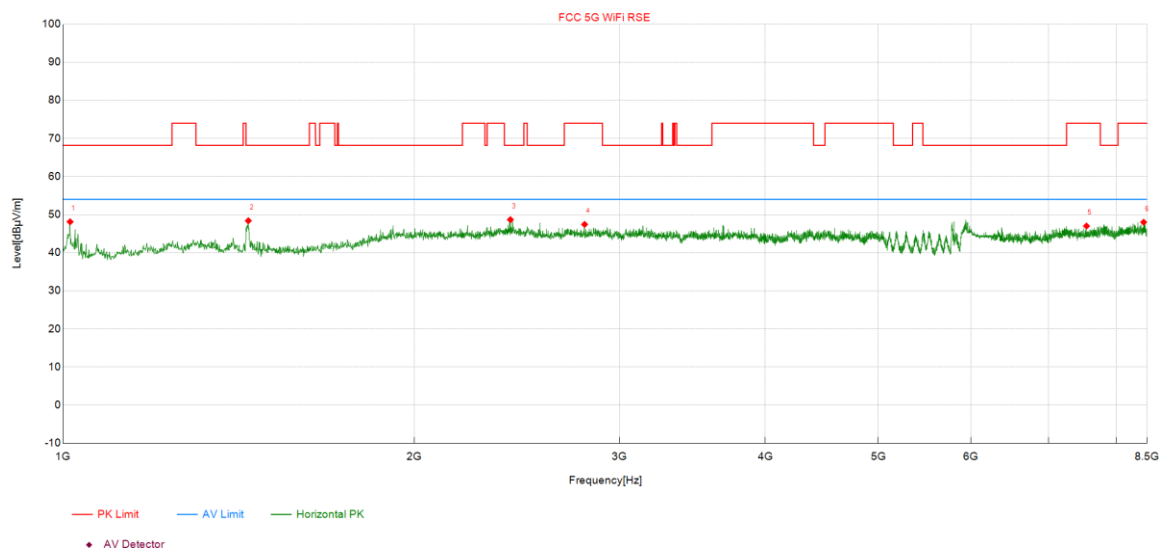

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1014.06	65.26	48.13	-17.13	68.20	20.07	Peak	HORIZONTAL
2	1441.56	64.29	48.40	-15.89	68.20	19.80	Peak	HORIZONTAL
3	2418.44	59.16	48.69	-10.47	68.20	19.51	Peak	HORIZONTAL
4	2800.00	58.03	47.44	-10.59	74.00	26.56	Peak	HORIZONTAL
5	7540.94	52.54	47.01	-5.53	74.00	26.99	Peak	HORIZONTAL
6	8441.88	52.38	48.02	-4.36	74.00	25.98	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5180MHz

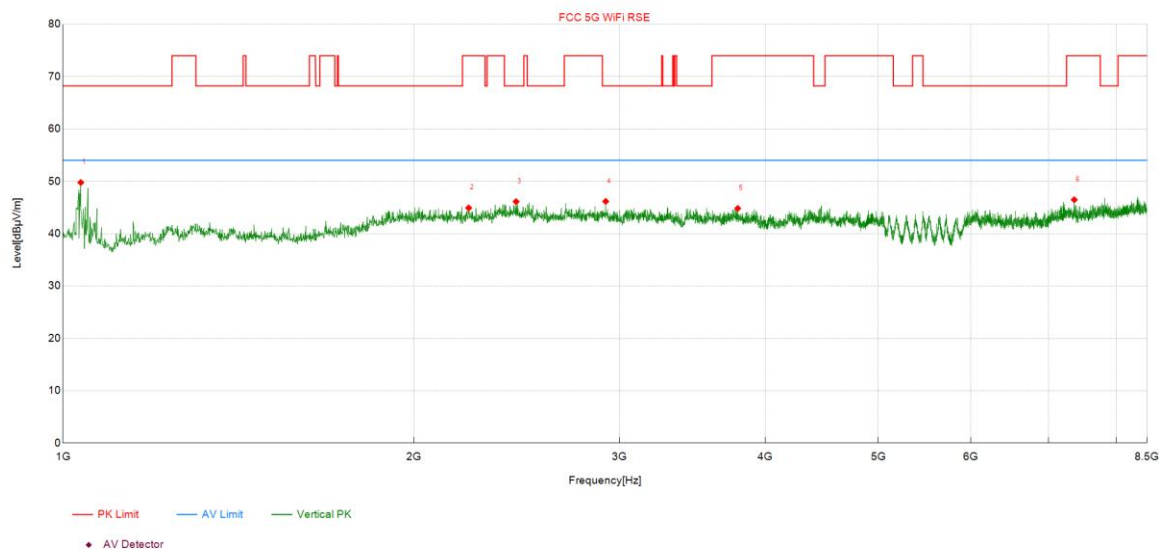

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1035.63	67.44	49.77	-17.67	68.20	18.43	Peak	VERTICAL
2	2227.19	56.38	44.91	-11.47	74.00	29.09	Peak	VERTICAL
3	2445.63	56.68	46.12	-10.56	68.20	22.08	Peak	VERTICAL
4	2919.06	56.17	46.17	-10.00	68.20	22.03	Peak	VERTICAL
5	3788.13	54.04	44.82	-9.22	74.00	29.18	Peak	VERTICAL
6	7360.94	52.33	46.48	-5.85	74.00	27.52	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5180MHz

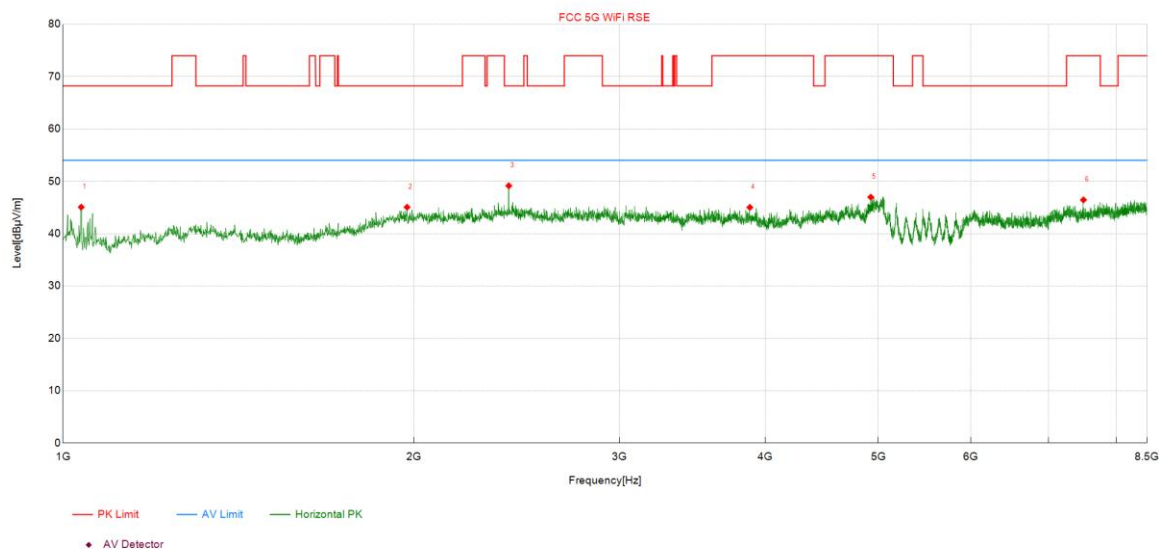

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1036.56	62.76	45.07	-17.69	68.20	23.13	Peak	HORIZONTAL
2	1972.19	57.00	45.05	-11.95	68.20	23.15	Peak	HORIZONTAL
3	2410.94	59.57	49.14	-10.43	68.20	19.06	Peak	HORIZONTAL
4	3880.00	54.47	45.02	-9.45	74.00	28.98	Peak	HORIZONTAL
5	4926.25	55.00	46.97	-8.03	74.00	27.03	Peak	HORIZONTAL
6	7495.94	52.05	46.45	-5.60	74.00	27.55	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5200MHz

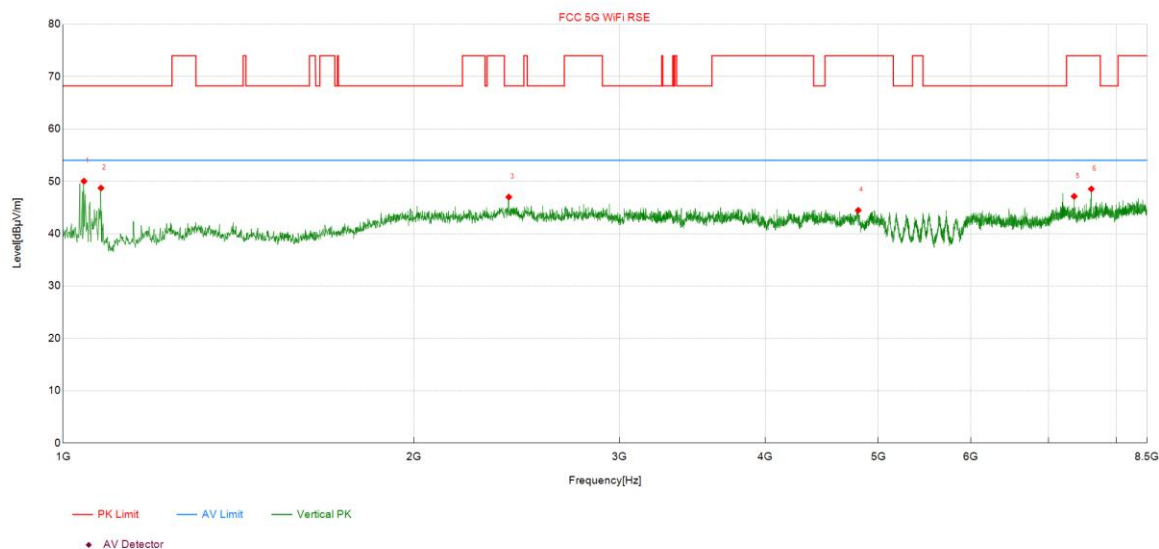

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1042.19	67.85	50.02	-17.83	68.20	18.18	Peak	VERTICAL
2	1077.81	66.97	48.71	-18.26	68.20	19.49	Peak	VERTICAL
3	2410.94	57.43	47.00	-10.43	68.20	21.20	Peak	VERTICAL
4	4805.31	53.11	44.46	-8.65	74.00	29.54	Peak	VERTICAL
5	7360.00	52.98	47.13	-5.85	74.00	26.87	Peak	VERTICAL
6	7613.13	54.05	48.53	-5.52	74.00	25.47	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5200MHz

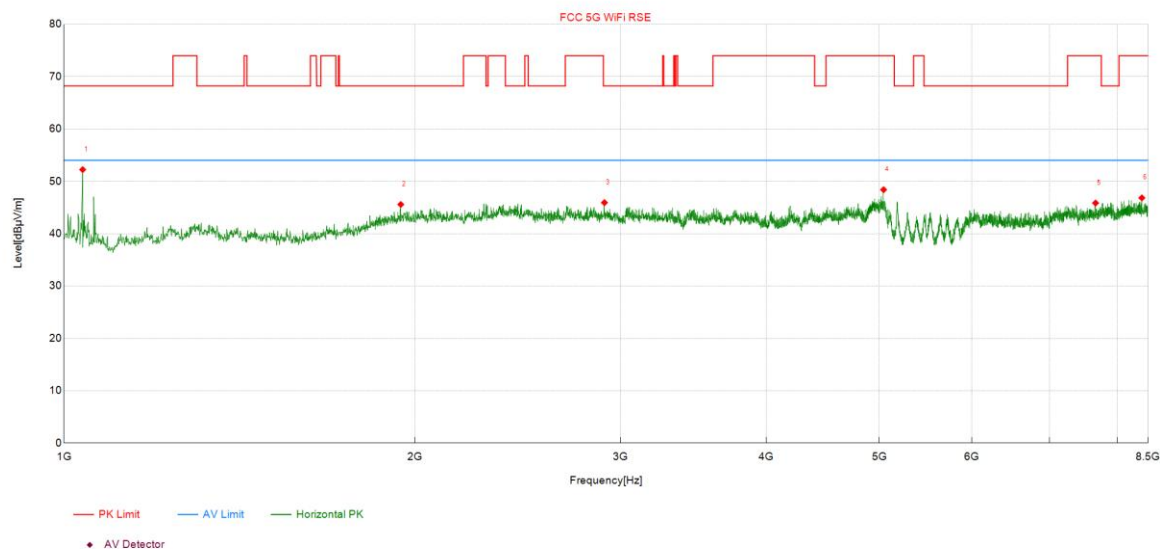

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1037.50	69.94	52.23	-17.71	68.20	15.97	Peak	HORIZONTAL
2	1944.06	57.71	45.58	-12.13	68.20	22.62	Peak	HORIZONTAL
3	2905.94	55.80	45.93	-9.87	68.20	22.27	Peak	HORIZONTAL
4	5042.50	56.65	48.40	-8.25	74.00	25.60	Peak	HORIZONTAL
5	7661.88	51.31	45.85	-5.46	74.00	28.15	Peak	HORIZONTAL
6	8395.00	51.38	46.84	-4.54	74.00	27.16	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5240MHz

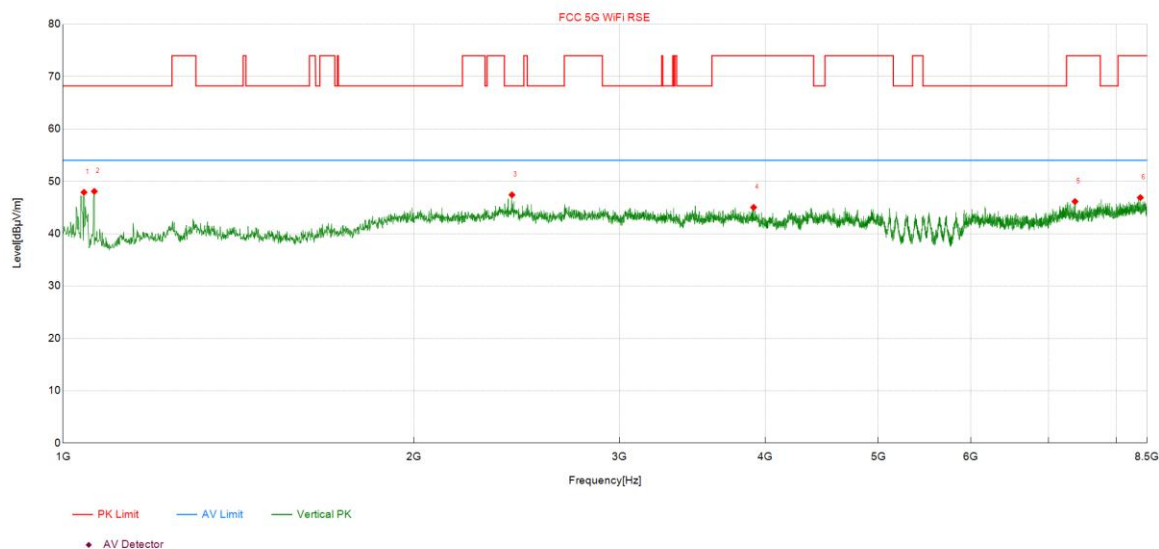

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1042.19	65.73	47.90	-17.83	68.20	20.30	Peak	VERTICAL
2	1063.75	66.21	48.08	-18.13	68.20	20.12	Peak	VERTICAL
3	2425.94	57.90	47.41	-10.49	68.20	20.79	Peak	VERTICAL
4	3909.06	54.44	45.02	-9.42	74.00	28.98	Peak	VERTICAL
5	7372.19	52.01	46.14	-5.87	74.00	27.86	Peak	VERTICAL
6	8386.56	51.43	46.89	-4.54	74.00	27.11	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5240MHz

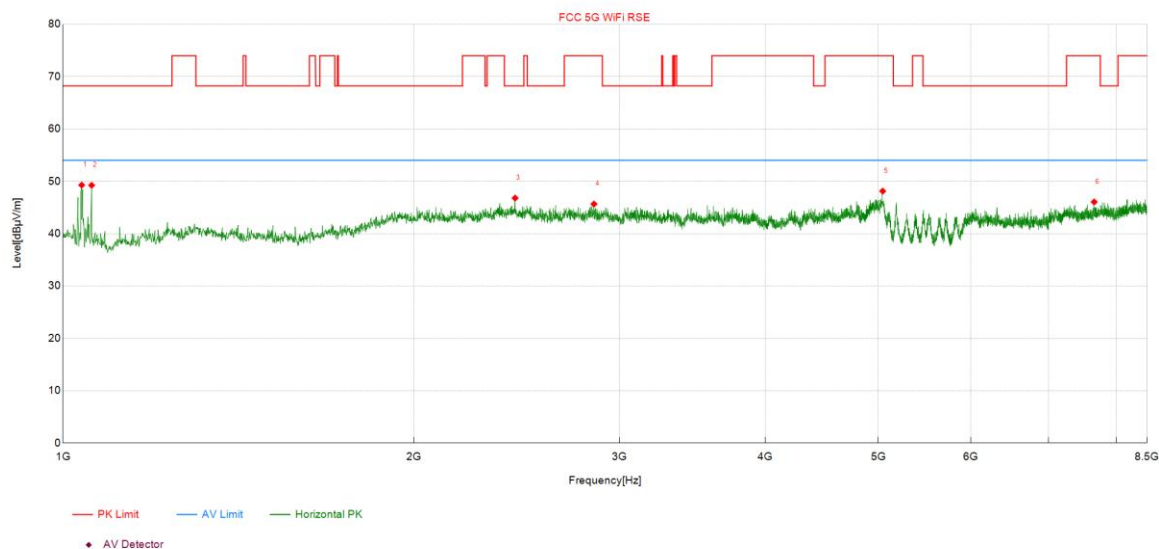

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1037.50	66.99	49.28	-17.71	68.20	18.92	Peak	HORIZONTAL
2	1058.13	67.34	49.24	-18.10	68.20	18.96	Peak	HORIZONTAL
3	2440.94	57.34	46.80	-10.54	68.20	21.40	Peak	HORIZONTAL
4	2852.50	55.92	45.66	-10.26	74.00	28.34	Peak	HORIZONTAL
5	5043.44	56.38	48.12	-8.26	74.00	25.88	Peak	HORIZONTAL
6	7656.25	51.52	46.06	-5.46	74.00	27.94	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5745MHz

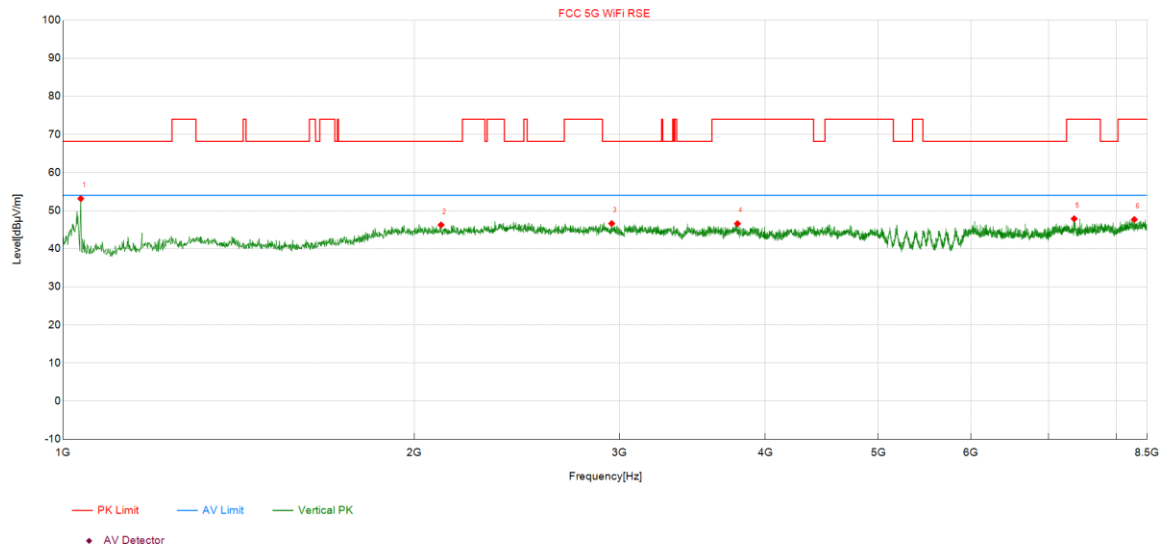

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1035.63	70.82	53.15	-17.67	68.20	15.05	Peak	VERTICAL
2	2109.06	57.94	46.24	-11.70	68.20	21.96	Peak	VERTICAL
3	2953.75	56.91	46.62	-10.29	68.20	21.58	Peak	VERTICAL
4	3786.25	55.81	46.58	-9.23	74.00	27.42	Peak	VERTICAL
5	7360.00	53.72	47.87	-5.85	74.00	26.13	Peak	VERTICAL
6	8288.13	52.55	47.68	-4.87	74.00	26.32	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5745MHz

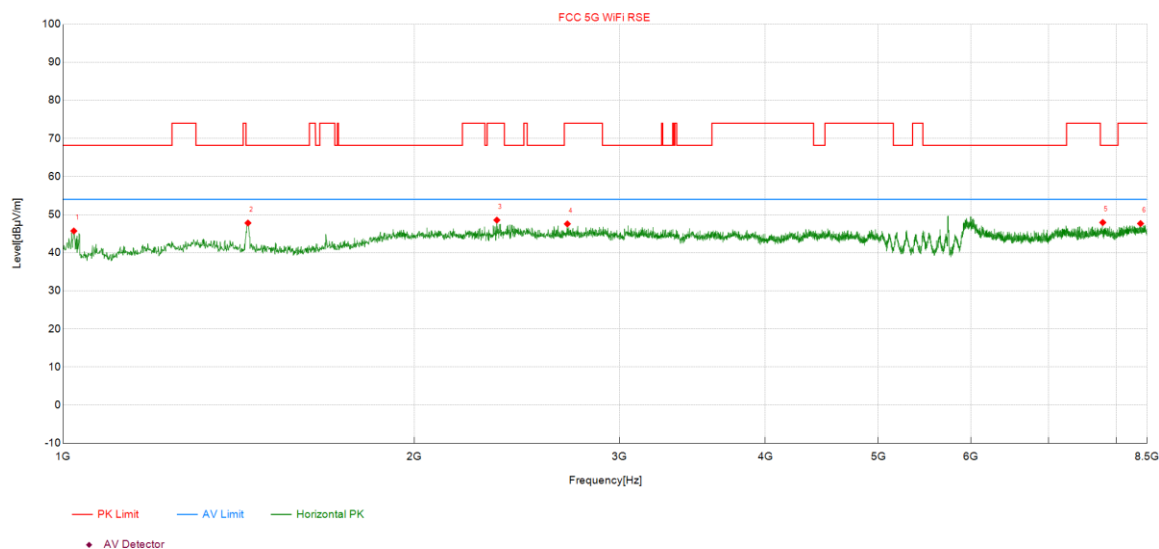

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1021.56	63.03	45.72	-17.31	68.20	22.48	Peak	HORIZONTAL
2	1440.63	63.69	47.81	-15.88	68.20	20.39	Peak	HORIZONTAL
3	2354.69	59.42	48.57	-10.85	74.00	25.43	Peak	HORIZONTAL
4	2706.25	57.99	47.57	-10.42	74.00	26.43	Peak	HORIZONTAL
5	7787.50	53.11	47.94	-5.17	68.20	20.26	Peak	HORIZONTAL
6	8390.31	52.20	47.66	-4.54	74.00	26.34	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5785MHz

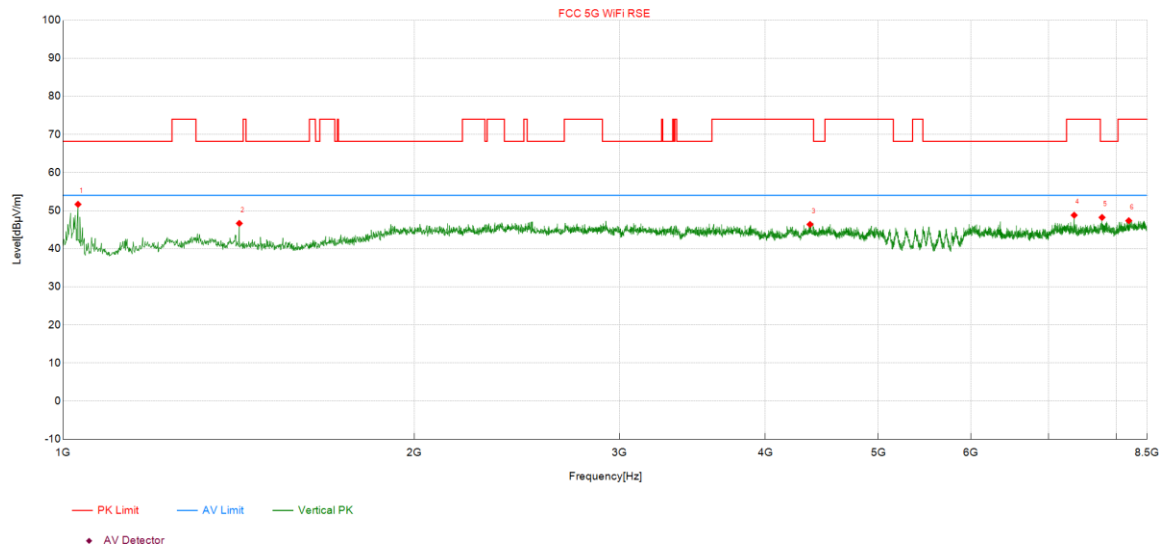

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1030.00	69.19	51.66	-17.53	68.20	16.54	Peak	VERTICAL
2	1416.25	62.29	46.66	-15.63	68.20	21.54	Peak	VERTICAL
3	4369.38	55.13	46.38	-8.75	74.00	27.62	Peak	VERTICAL
4	7360.00	54.65	48.80	-5.85	74.00	25.20	Peak	VERTICAL
5	7776.25	53.37	48.22	-5.15	68.20	19.98	Peak	VERTICAL
6	8198.13	52.12	47.36	-4.76	74.00	26.64	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5785MHz

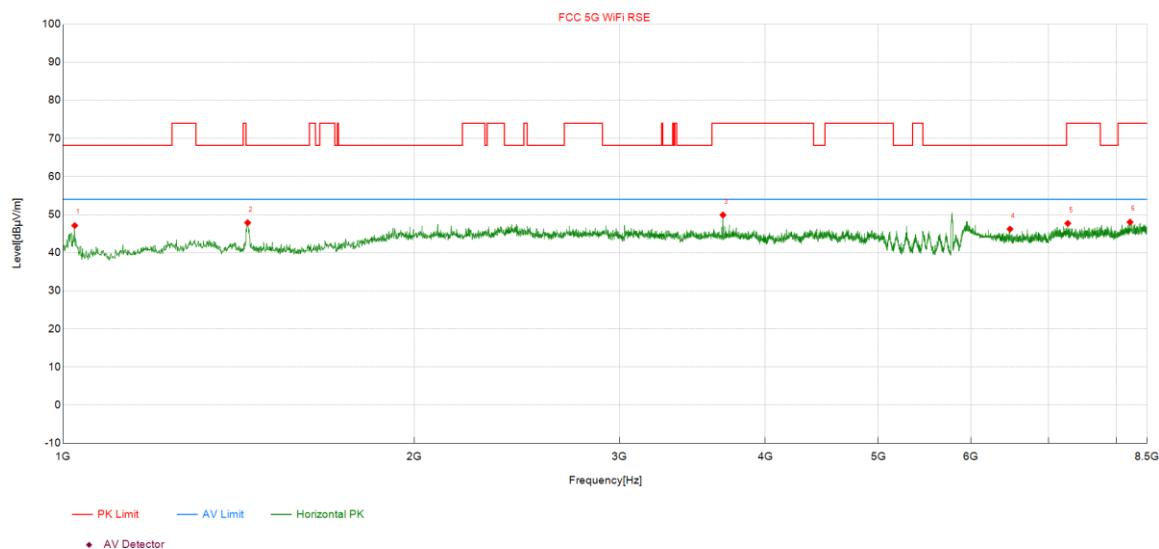

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1023.44	64.50	47.14	-17.36	68.20	21.06	Peak	HORIZONTAL
2	1439.69	63.76	47.88	-15.88	68.20	20.32	Peak	HORIZONTAL
3	3679.38	59.89	49.91	-9.98	74.00	24.09	Peak	HORIZONTAL
4	6484.38	52.68	46.20	-6.48	68.20	22.00	Peak	HORIZONTAL
5	7268.13	53.35	47.70	-5.65	74.00	26.30	Peak	HORIZONTAL
6	8217.81	52.84	48.04	-4.80	74.00	25.96	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5825MHz

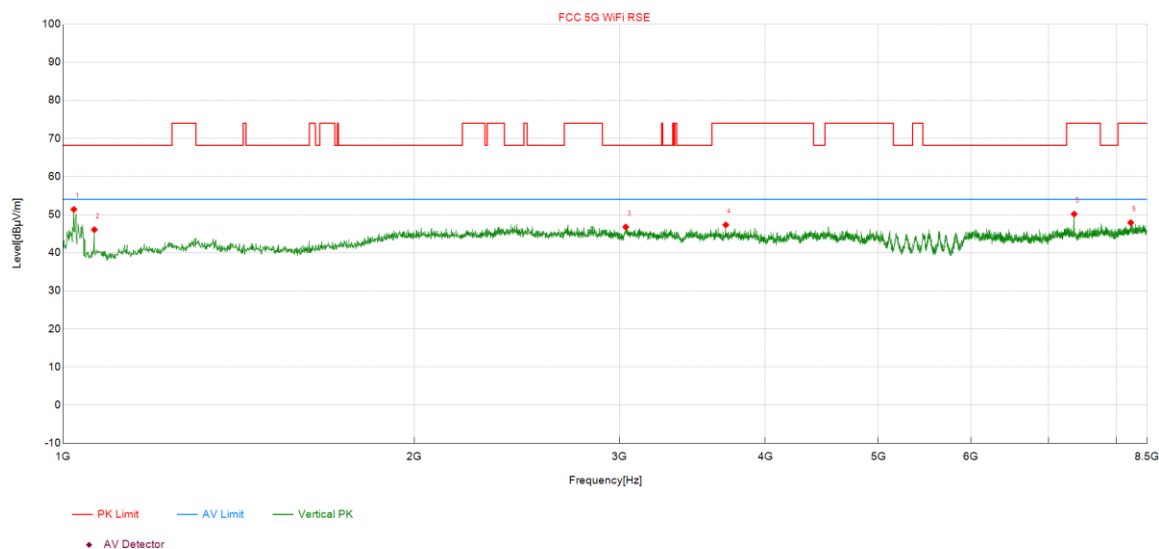

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1021.56	68.69	51.38	-17.31	68.20	16.82	Peak	VERTICAL
2	1063.75	64.18	46.05	-18.13	68.20	22.15	Peak	VERTICAL
3	3037.19	56.93	46.75	-10.18	68.20	21.45	Peak	VERTICAL
4	3700.00	57.35	47.29	-10.06	74.00	26.71	Peak	VERTICAL
5	7360.00	56.00	50.15	-5.85	74.00	23.85	Peak	VERTICAL
6	8229.06	52.71	47.89	-4.82	74.00	26.11	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC20 5825MHz

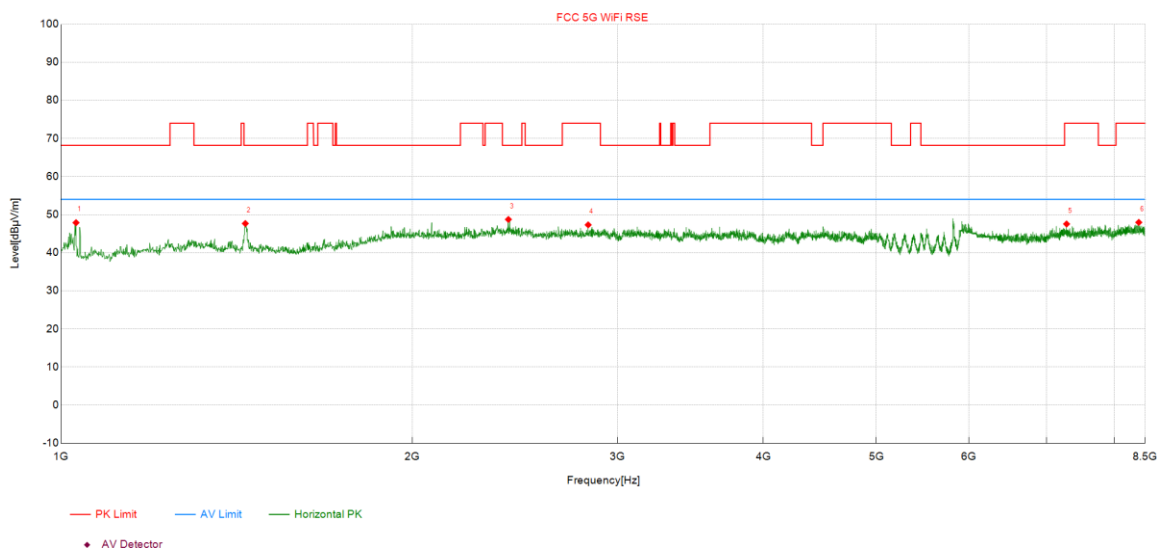

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1030.00	65.42	47.89	-17.53	68.20	20.31	Peak	HORIZONTAL
2	1438.75	63.55	47.68	-15.87	68.20	20.52	Peak	HORIZONTAL
3	2418.44	59.21	48.74	-10.47	68.20	19.46	Peak	HORIZONTAL
4	2830.94	57.72	47.32	-10.40	74.00	26.68	Peak	HORIZONTAL
5	7279.38	53.27	47.55	-5.72	74.00	26.45	Peak	HORIZONTAL
6	8394.06	52.50	47.96	-4.54	74.00	26.04	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC40 5190MHz

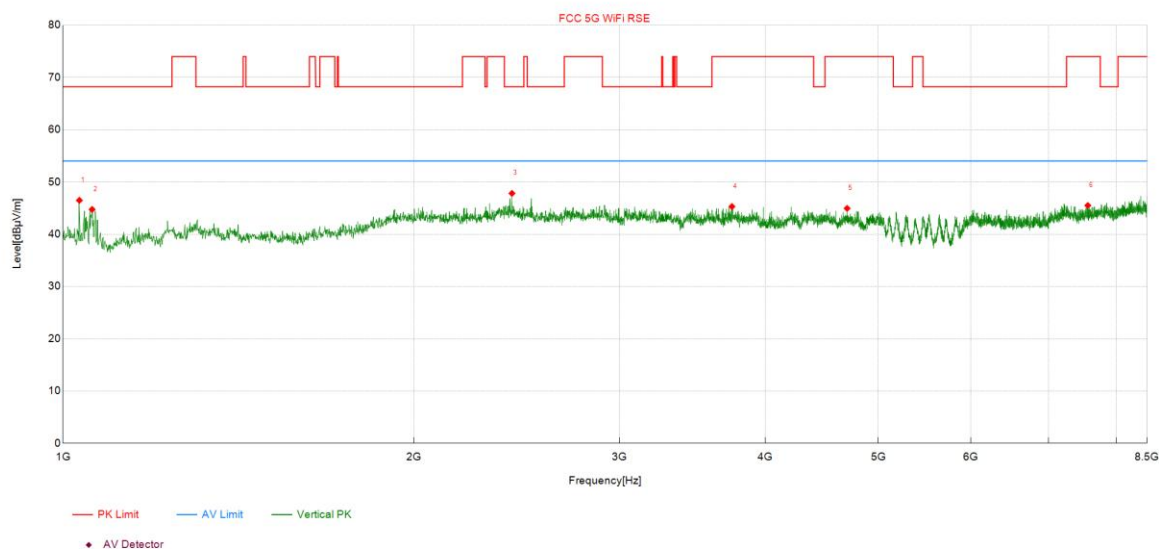

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1032.81	64.08	46.49	-17.59	68.20	21.71	Peak	VERTICAL
2	1059.06	62.85	44.75	-18.10	68.20	23.45	Peak	VERTICAL
3	2425.94	58.31	47.82	-10.49	68.20	20.38	Peak	VERTICAL
4	3745.00	54.83	45.30	-9.53	74.00	28.70	Peak	VERTICAL
5	4701.25	53.12	44.95	-8.17	74.00	29.05	Peak	VERTICAL
6	7560.63	51.02	45.50	-5.52	74.00	28.50	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC40 5190MHz

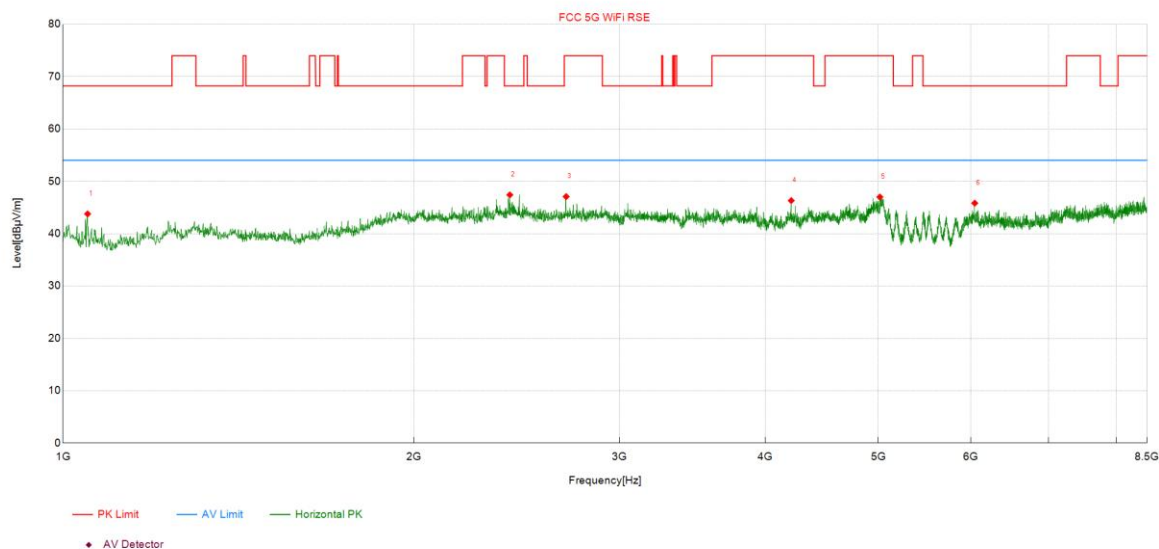

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1049.69	61.79	43.78	-18.01	68.20	24.42	Peak	HORIZONTAL
2	2415.63	57.87	47.41	-10.46	68.20	20.79	Peak	HORIZONTAL
3	2699.69	57.52	47.08	-10.44	74.00	26.92	Peak	HORIZONTAL
4	4210.00	55.41	46.32	-9.09	74.00	27.68	Peak	HORIZONTAL
5	5015.31	55.04	47.00	-8.04	74.00	27.00	Peak	HORIZONTAL
6	6048.44	51.65	45.83	-5.82	68.20	22.37	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC40 5230MHz

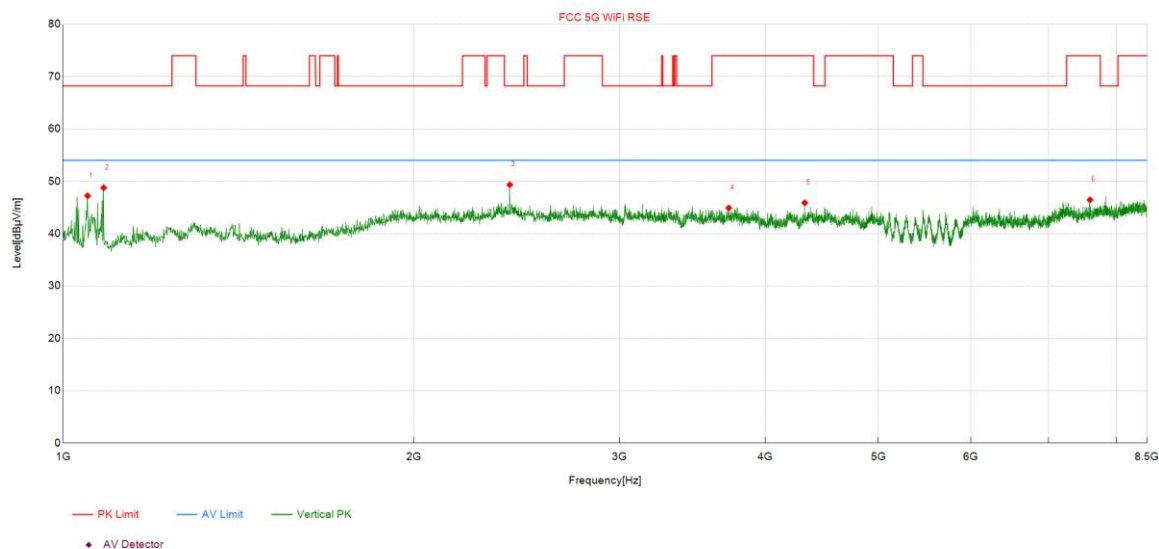

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1049.69	65.25	47.24	-18.01	68.20	20.96	Peak	VERTICAL
2	1083.44	67.07	48.76	-18.31	68.20	19.44	Peak	VERTICAL
3	2415.63	59.80	49.34	-10.46	68.20	18.86	Peak	VERTICAL
4	3721.56	54.72	44.90	-9.82	74.00	29.10	Peak	VERTICAL
5	4324.38	54.69	45.90	-8.79	74.00	28.10	Peak	VERTICAL
6	7593.44	52.00	46.46	-5.54	74.00	27.54	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC40 5230MHz

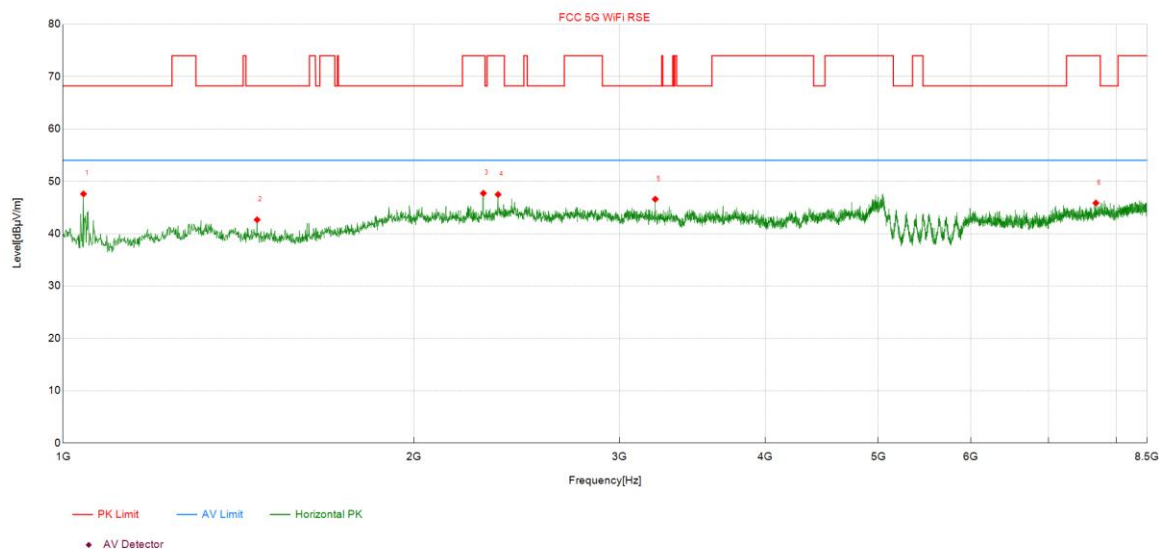

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1041.25	65.39	47.59	-17.80	68.20	20.61	Peak	HORIZONTAL
2	1466.88	58.69	42.65	-16.04	68.20	25.55	Peak	HORIZONTAL
3	2292.81	58.90	47.72	-11.18	74.00	26.28	Peak	HORIZONTAL
4	2360.31	58.27	47.48	-10.79	74.00	26.52	Peak	HORIZONTAL
5	3219.06	56.76	46.59	-10.17	68.20	21.61	Peak	HORIZONTAL
6	7682.50	51.29	45.85	-5.44	74.00	28.15	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC40 5755MHz

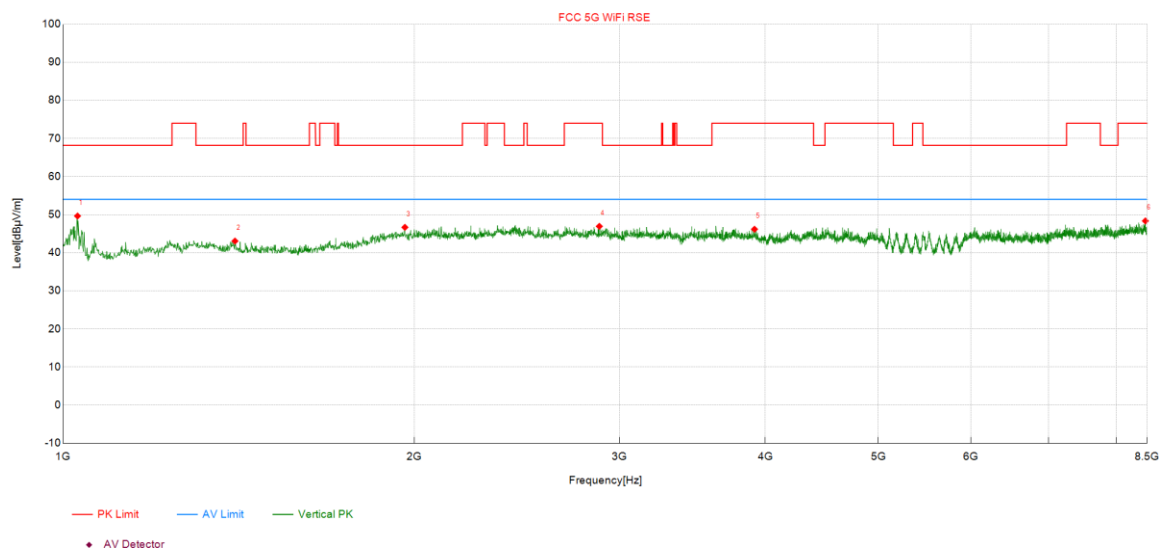

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1029.06	67.14	49.64	-17.50	68.20	18.56	Peak	VERTICAL
2	1404.06	58.56	43.06	-15.50	68.20	25.14	Peak	VERTICAL
3	1963.75	58.66	46.67	-11.99	68.20	21.53	Peak	VERTICAL
4	2882.50	56.90	46.93	-9.97	74.00	27.07	Peak	VERTICAL
5	3915.63	55.58	46.17	-9.41	74.00	27.83	Peak	VERTICAL
6	8470.94	52.65	48.35	-4.30	74.00	25.65	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC40 5755MHz

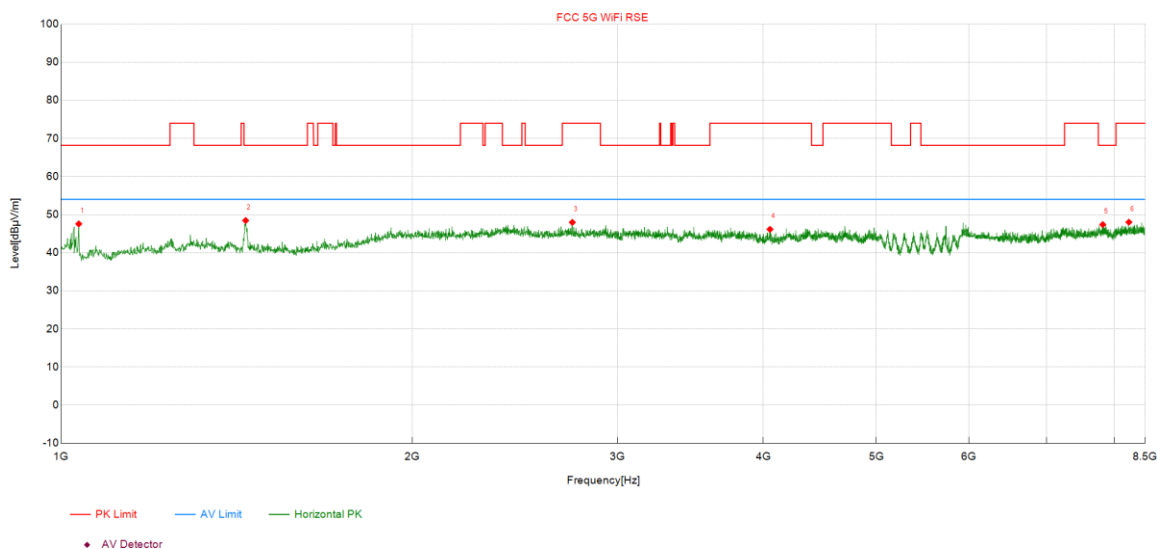

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1035.63	65.24	47.57	-17.67	68.20	20.63	Peak	HORIZONTAL
2	1439.69	64.34	48.46	-15.88	68.20	19.74	Peak	HORIZONTAL
3	2743.75	58.35	47.97	-10.38	74.00	26.03	Peak	HORIZONTAL
4	4053.44	55.92	46.14	-9.78	74.00	27.86	Peak	HORIZONTAL
5	7818.44	52.56	47.39	-5.17	68.20	20.81	Peak	HORIZONTAL
6	8231.88	52.85	48.02	-4.83	74.00	25.98	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC40 5795MHz

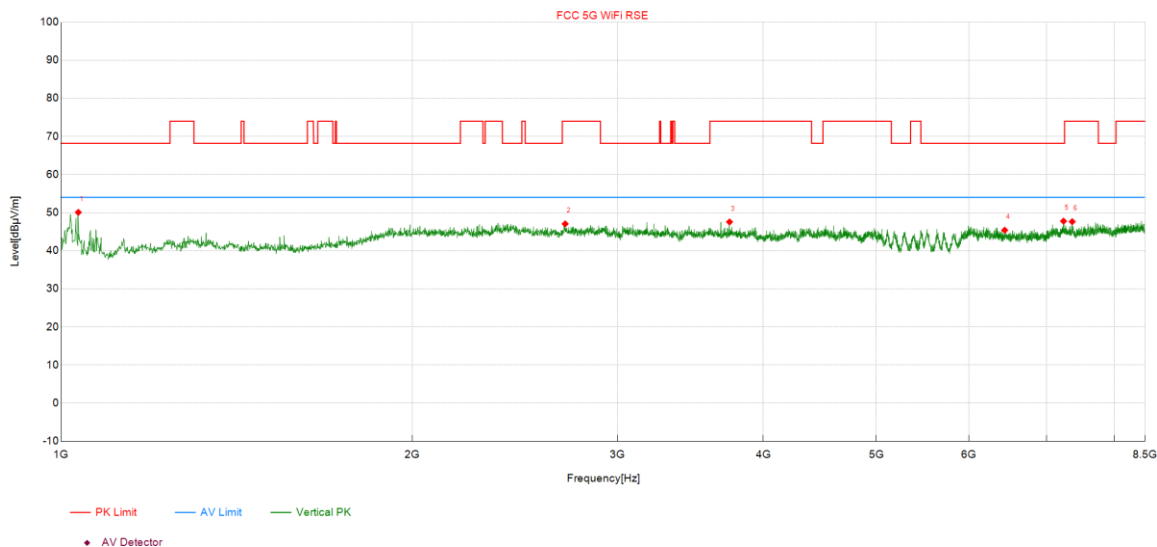

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1034.69	67.72	50.08	-17.64	68.20	18.12	Peak	VERTICAL
2	2705.31	57.48	47.05	-10.43	74.00	26.95	Peak	VERTICAL
3	3742.19	57.12	47.56	-9.56	74.00	26.44	Peak	VERTICAL
4	6442.19	51.97	45.40	-6.57	68.20	22.80	Peak	VERTICAL
5	7235.31	53.40	47.77	-5.63	68.20	20.43	Peak	VERTICAL
6	7360.00	53.48	47.63	-5.85	74.00	26.37	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC40 5795MHz

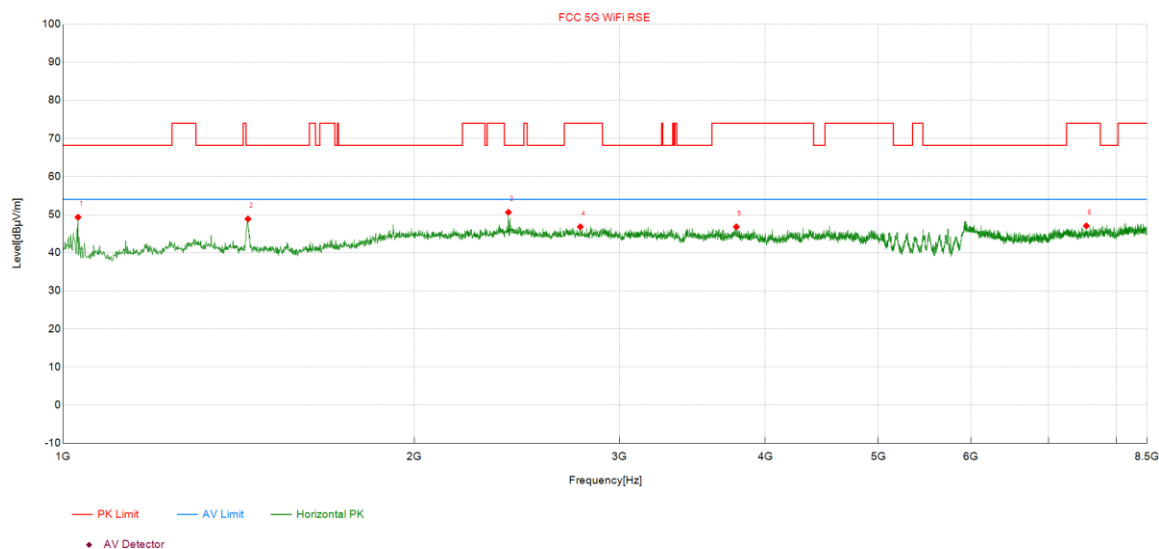

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1030.00	66.85	49.32	-17.53	68.20	18.88	Peak	HORIZONTAL
2	1440.63	64.75	48.87	-15.88	68.20	19.33	Peak	HORIZONTAL
3	2409.06	61.05	50.62	-10.43	68.20	17.58	Peak	HORIZONTAL
4	2776.56	57.30	46.81	-10.49	74.00	27.19	Peak	HORIZONTAL
5	3777.81	56.08	46.79	-9.29	74.00	27.21	Peak	HORIZONTAL
6	7538.13	52.58	47.05	-5.53	74.00	26.95	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC80 5210MHz

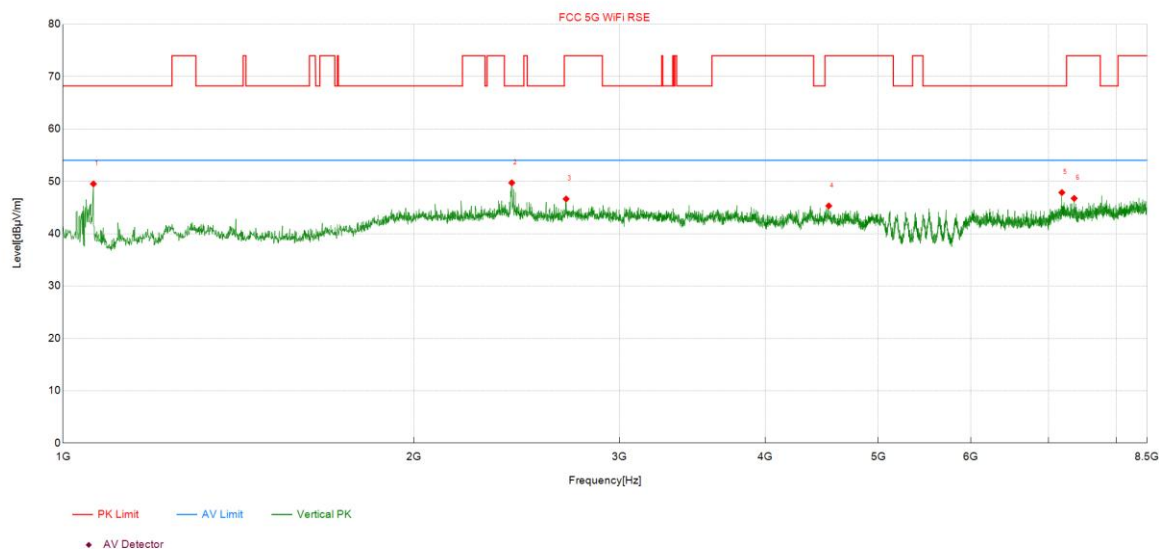

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1061.88	67.63	49.51	-18.12	68.20	18.69	Peak	VERTICAL
2	2425.00	60.19	49.71	-10.48	68.20	18.49	Peak	VERTICAL
3	2699.69	57.07	46.63	-10.44	74.00	27.37	Peak	VERTICAL
4	4534.38	53.84	45.31	-8.53	74.00	28.69	Peak	VERTICAL
5	7183.75	53.70	47.85	-5.85	68.20	20.35	Peak	VERTICAL
6	7360.00	52.59	46.74	-5.85	74.00	27.26	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC80 5210MHz

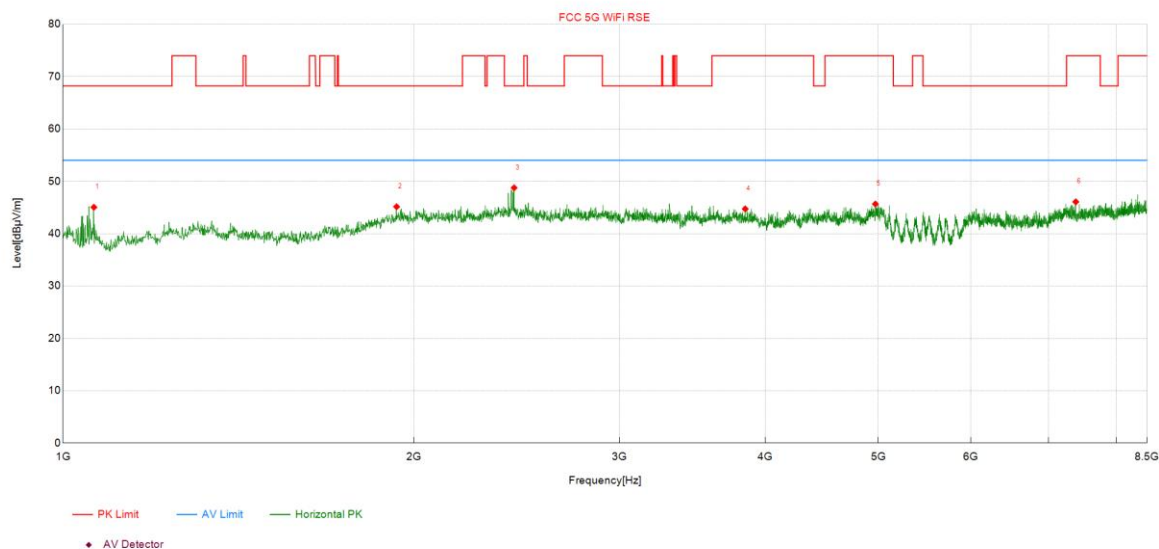

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1062.81	63.18	45.05	-18.13	68.20	23.15	Peak	HORIZONTAL
2	1931.88	57.37	45.15	-12.22	68.20	23.05	Peak	HORIZONTAL
3	2436.25	59.28	48.76	-10.52	68.20	19.44	Peak	HORIZONTAL
4	3844.38	54.20	44.74	-9.46	74.00	29.26	Peak	HORIZONTAL
5	4971.25	53.60	45.66	-7.94	74.00	28.34	Peak	HORIZONTAL
6	7383.44	51.96	46.08	-5.88	74.00	27.92	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC80 5775MHz

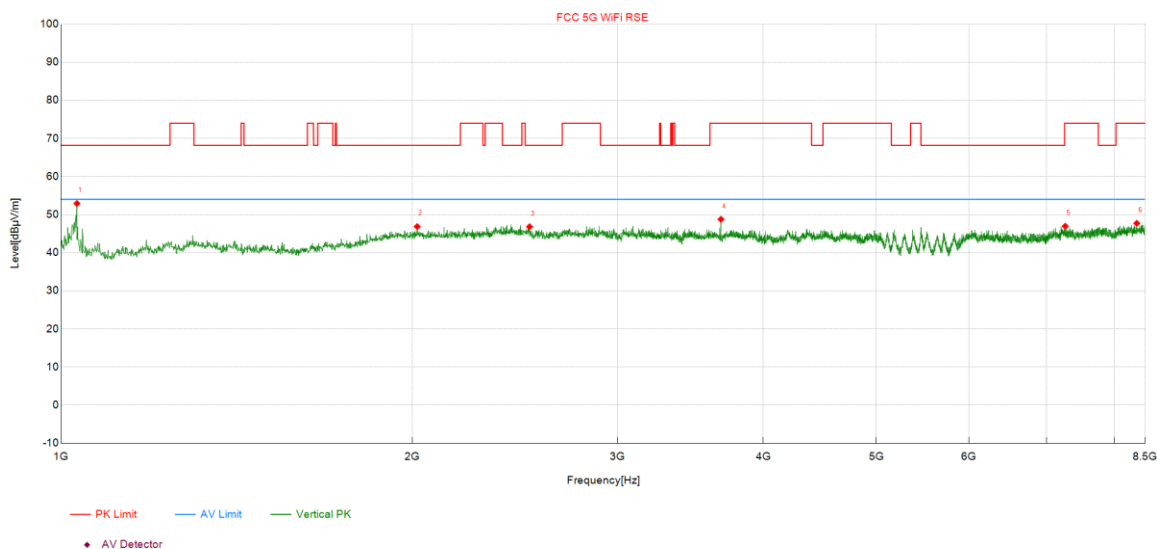

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1031.88	70.50	52.92	-17.58	68.20	15.28	Peak	VERTICAL
2	2020.00	58.63	46.86	-11.77	68.20	21.34	Peak	VERTICAL
3	2521.56	57.58	46.82	-10.76	68.20	21.38	Peak	VERTICAL
4	3679.38	58.75	48.77	-9.98	74.00	25.23	Peak	VERTICAL
5	7259.69	52.56	46.96	-5.60	74.00	27.04	Peak	VERTICAL
6	8361.25	52.26	47.72	-4.54	74.00	26.28	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AC80 5775MHz

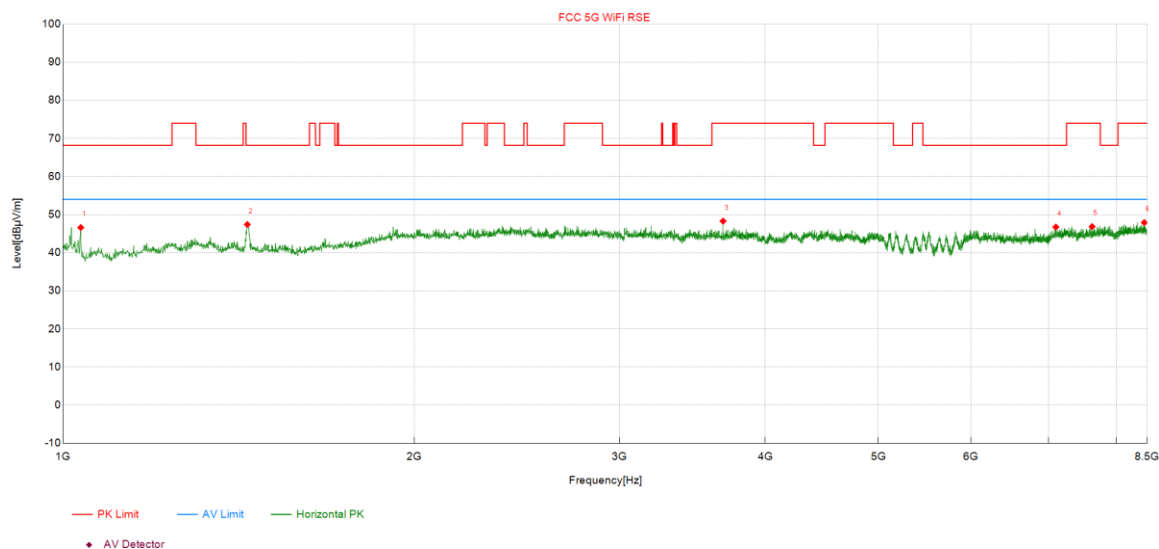

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1035.63	64.28	46.61	-17.67	68.20	21.59	Peak	HORIZONTAL
2	1438.75	63.29	47.42	-15.87	68.20	20.78	Peak	HORIZONTAL
3	3680.31	58.29	48.30	-9.99	74.00	25.70	Peak	HORIZONTAL
4	7098.44	52.63	46.74	-5.89	68.20	21.46	Peak	HORIZONTAL
5	7625.31	52.37	46.87	-5.50	74.00	27.13	Peak	HORIZONTAL
6	8453.13	52.25	47.92	-4.33	74.00	26.08	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX20 5180MHz

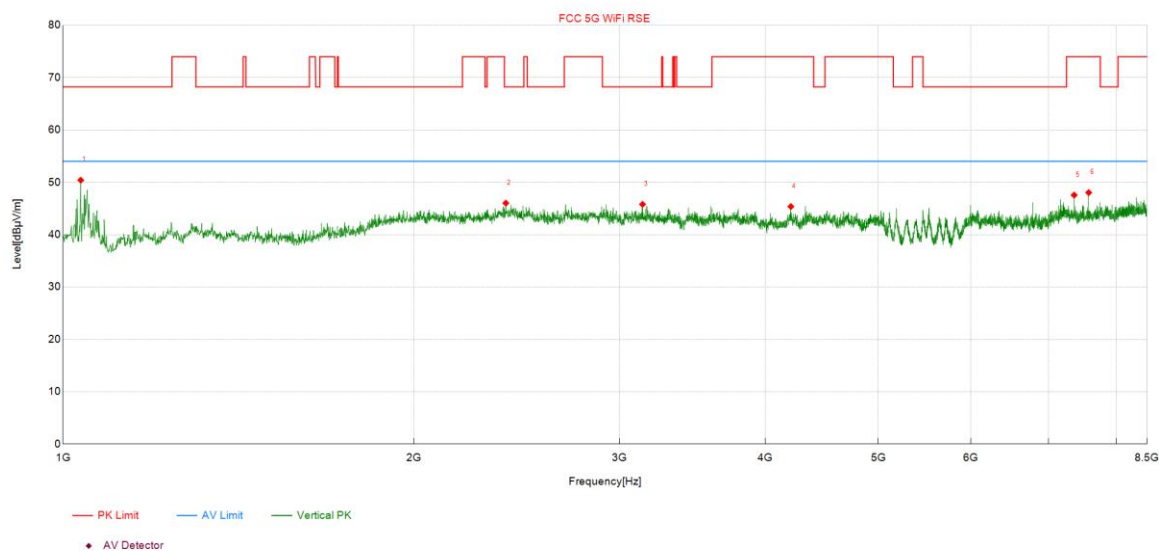

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1035.63	68.07	50.40	-17.67	68.20	17.80	Peak	VERTICAL
2	2396.88	56.45	46.02	-10.43	68.20	22.18	Peak	VERTICAL
3	3139.38	56.02	45.80	-10.22	68.20	22.40	Peak	VERTICAL
4	4207.19	54.46	45.37	-9.09	74.00	28.63	Peak	VERTICAL
5	7360.00	53.41	47.56	-5.85	74.00	26.44	Peak	VERTICAL
6	7573.75	53.57	48.04	-5.53	74.00	25.96	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX20 5180MHz

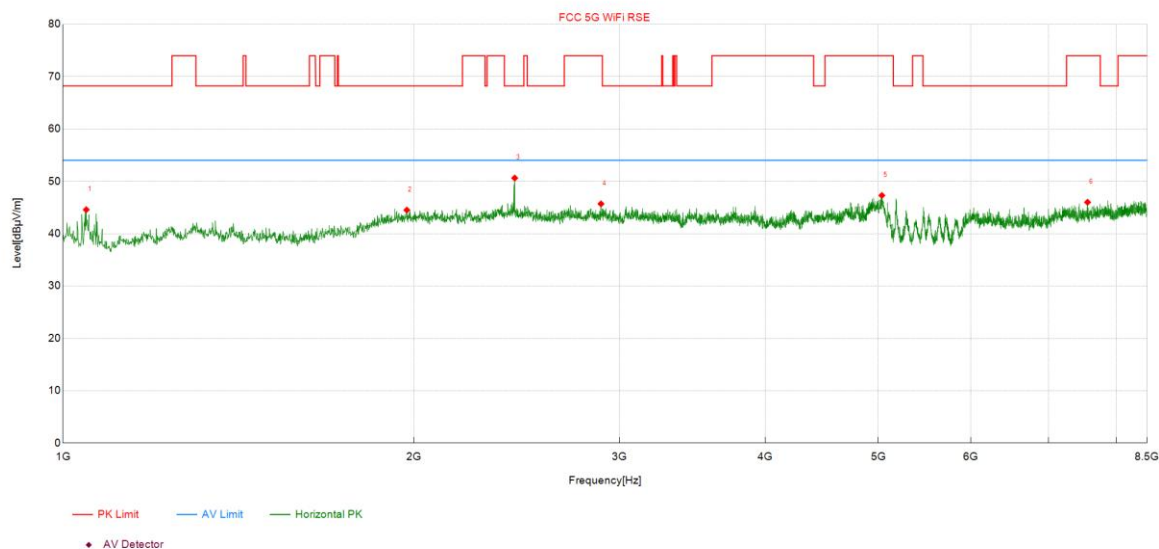

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1046.88	62.52	44.58	-17.94	68.20	23.62	Peak	HORIZONTAL
2	1971.25	56.46	44.51	-11.95	68.20	23.69	Peak	HORIZONTAL
3	2439.06	61.16	50.62	-10.54	68.20	17.58	Peak	HORIZONTAL
4	2891.88	55.59	45.70	-9.89	74.00	28.30	Peak	HORIZONTAL
5	5035.00	55.50	47.30	-8.20	74.00	26.70	Peak	HORIZONTAL
6	7556.88	51.51	46.00	-5.51	74.00	28.00	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX20 5200MHz

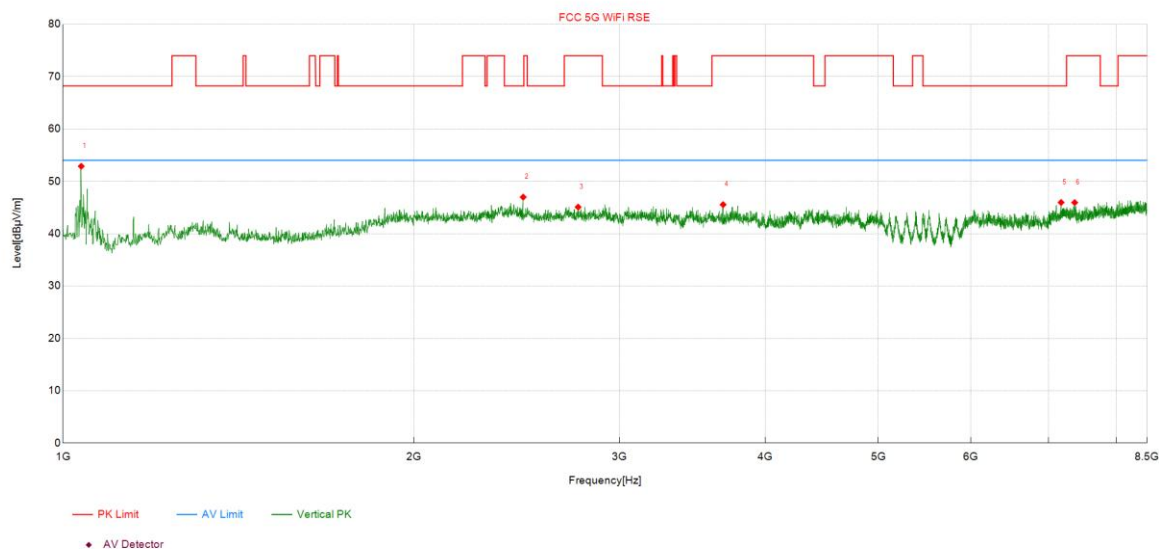

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1036.56	70.56	52.87	-17.69	68.20	15.33		
2	2480.31	57.55	46.98	-10.57	68.20	21.22	Peak	VERTICAL
3	2764.38	55.52	45.08	-10.44	74.00	28.92	Peak	VERTICAL
4	3680.31	55.54	45.55	-9.99	74.00	28.45	Peak	VERTICAL
5	7172.50	51.80	45.96	-5.84	68.20	22.24	Peak	VERTICAL
6	7367.50	51.80	45.94	-5.86	74.00	28.06	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX20 5200MHz

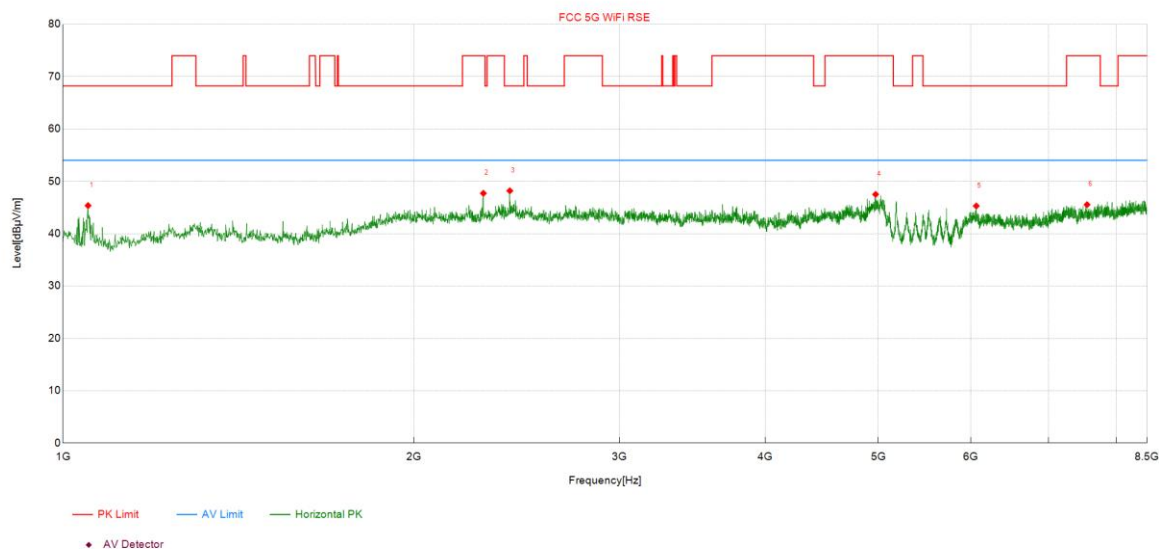

Suspected Data List								
Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Level (dBμV/m)	Factor [dB/m]	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1050.63	63.40	45.36	-18.04	68.20	22.84		
2	2292.81	58.89	47.71	-11.18	74.00	26.29	Peak	HORIZONTAL
3	2415.63	58.65	48.19	-10.46	68.20	20.01	Peak	HORIZONTAL
4	4973.13	55.44	47.50	-7.94	74.00	26.50	Peak	HORIZONTAL
5	6066.25	51.40	45.29	-6.11	68.20	22.91	Peak	HORIZONTAL
6	7549.38	51.05	45.54	-5.51	74.00	28.46	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.

Radiated Emission Test Result

Memo : 11AX20 5240MHz

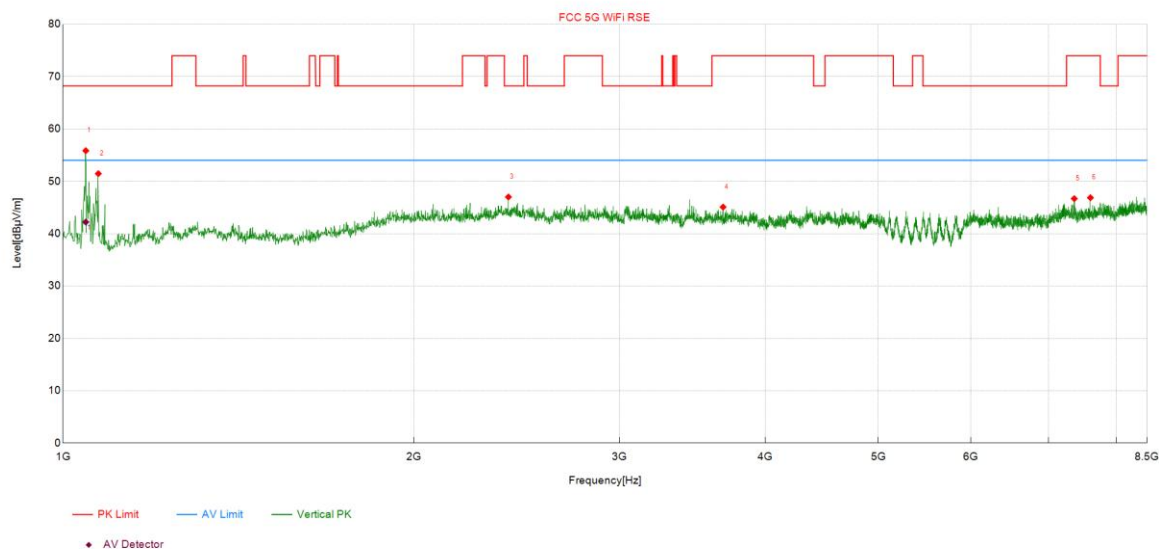

Suspected Data List								
Item	Freq.	Read Level	Level	Factor	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dBμV/m)	[dB/m]	(dBμV/m)	(dB)		
1	1045.94	73.77	55.85	-17.92	68.20	12.35	Peak	VERTICAL
		60.14	42.22	-17.92	54.00	11.78	Average	VERTICAL
2	1072.19	69.69	51.47	-18.22	68.20	16.73	Peak	VERTICAL
3	2409.06	57.44	47.01	-10.43	68.20	21.19	Peak	VERTICAL
4	3680.31	55.07	45.08	-9.99	74.00	28.92	Peak	VERTICAL
5	7360.94	52.54	46.69	-5.85	74.00	27.31	Peak	VERTICAL
6	7600.00	52.41	46.87	-5.54	74.00	27.13	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Margin = Result Level - Limit.