



P/N: HY160808 SRF08

Manufacturer: ShenZhen Hanyang Antenna Design Co., Ltd.

Address: R&D Center No. 9, Taohuayuan Science and Technology Innovation Park,
Tiegang Community, Xixiang Street, Bao'an District, Shenzhen


Features

1. Surface Mounted Devices with a small dimension of 1.6 x 0.8 x 0.8 mm meet future miniaturization trend.
2. Embedded and LTCC (low temperature co-fired ceramic) technology is able to integrate with system design as well as beautifying the housing of final product.
3. High stability and low tolerance.

Applications


1. Bluetooth
2. Wireless LAN
3. ISM band 2.4GHz wireless applications

Dimensions (Unit: mm)

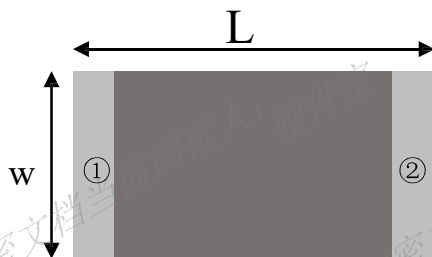


(Top View)

Number	Terminal Name
①	INPUT
②	NC

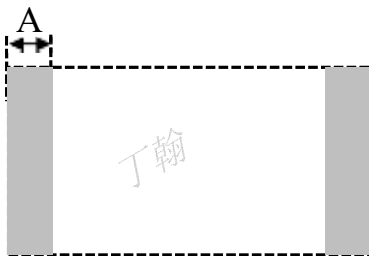

(Bottom View)





(Side View)

Symbols	L	W	T	A
Dimensions	1.60 ± 0.20	0.80 ± 0.20	0.80 ± 0.20	0.30 ± 0.10

Hanyang Antenna Co. Ltd. has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Hanyang Antenna Co. Ltd.



Evaluation Board and Matching Circuits

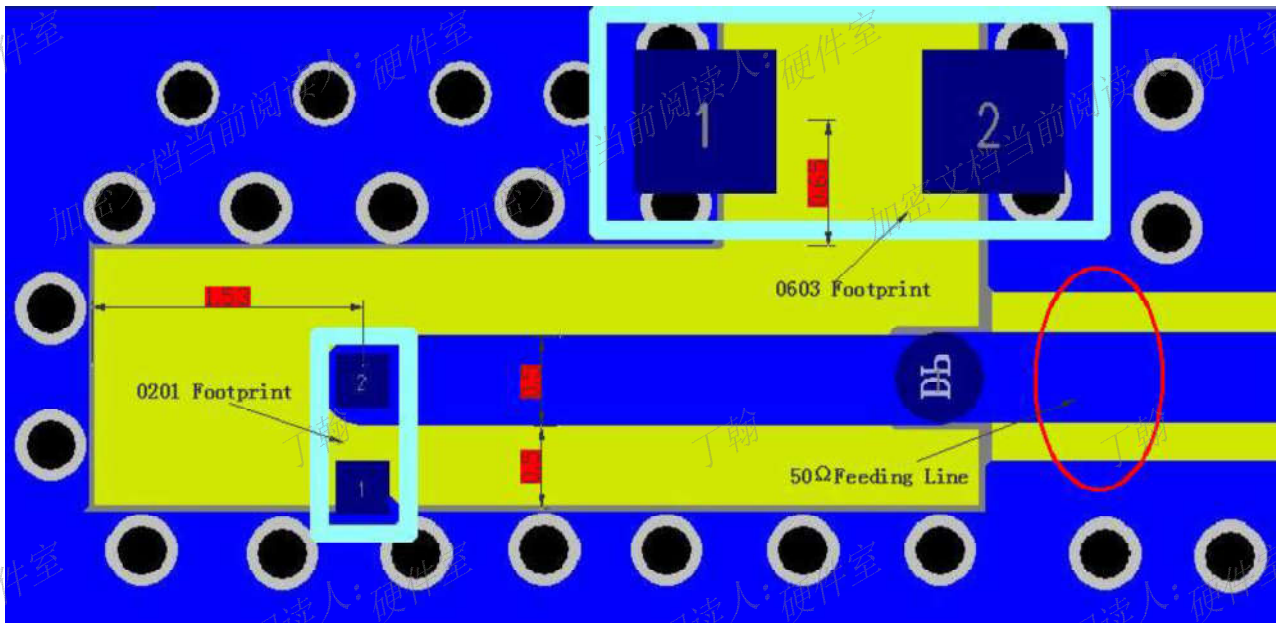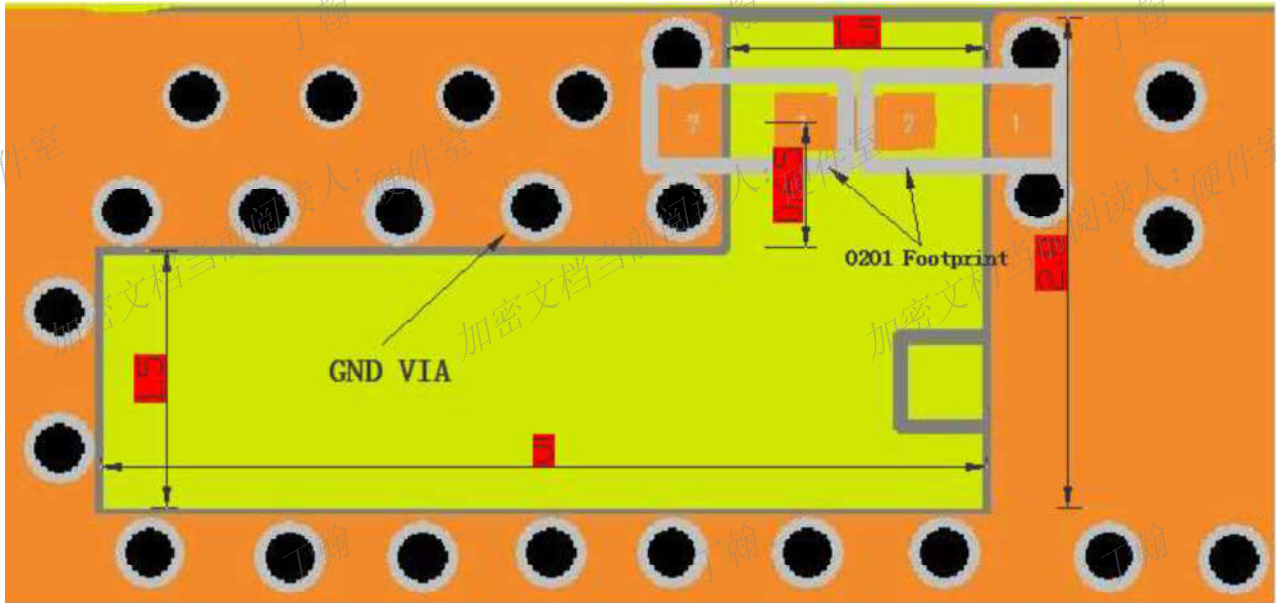

Unit:mm




P/N: HY160808 SRF08

Electrical Characteristics

	Feature	Specification
1	Central frequency	2.45GHz&5.5GHz
2	Bandwidth	>100MHz
3	Peak gain	>3dBi
4	VSWR	<2
5	Polarization	Linear
6	Azimuth beamwidth	Omnidirectional
7	Impedance	50 Ω


Characteristic Curves

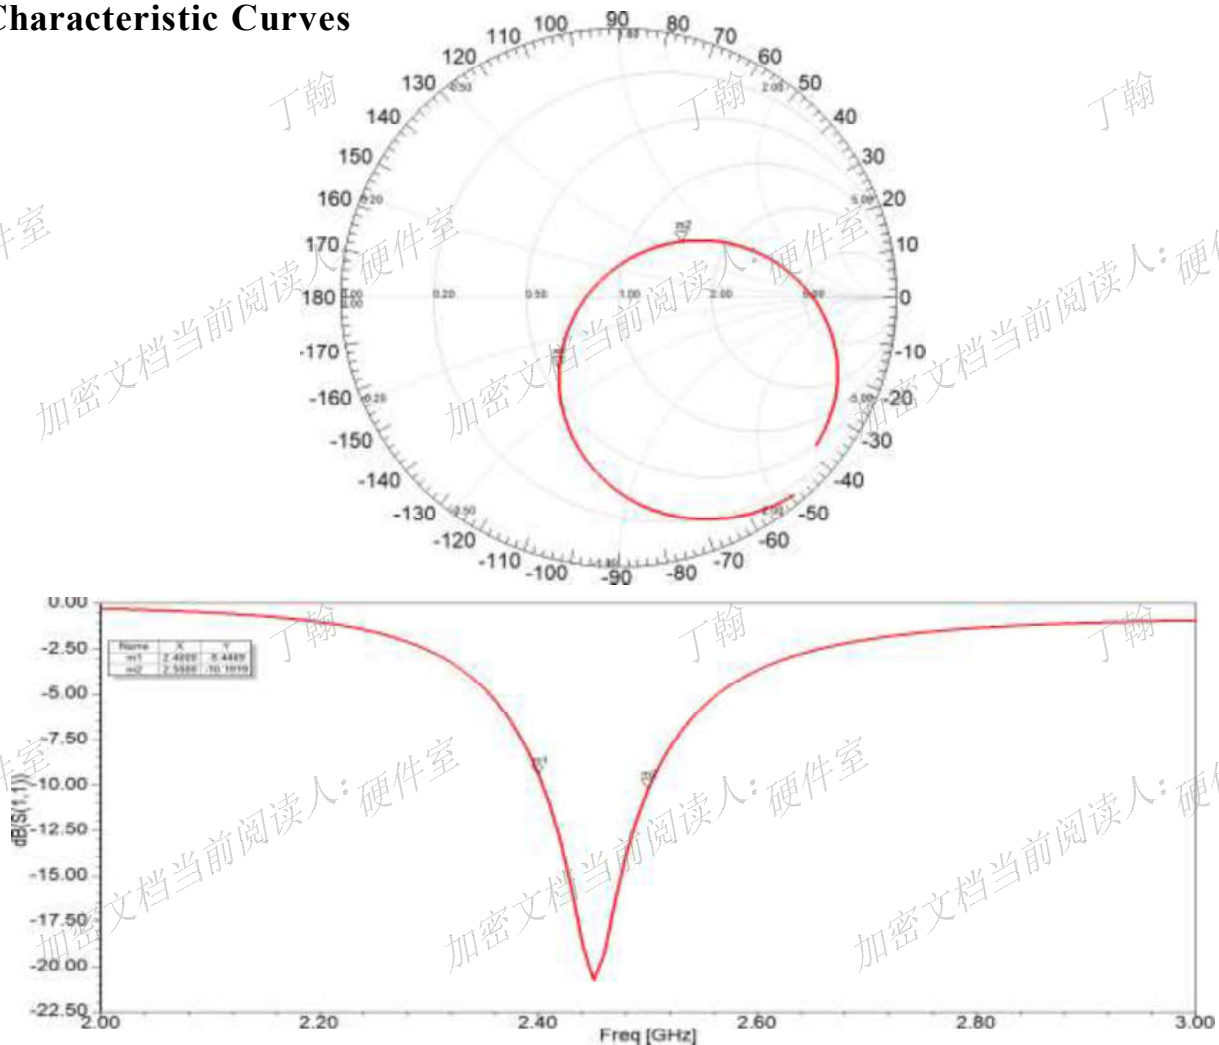

Hanyang Antenna Co. Ltd. has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Hanyang Antenna Co. Ltd.





P/N: HY160808 SRF08

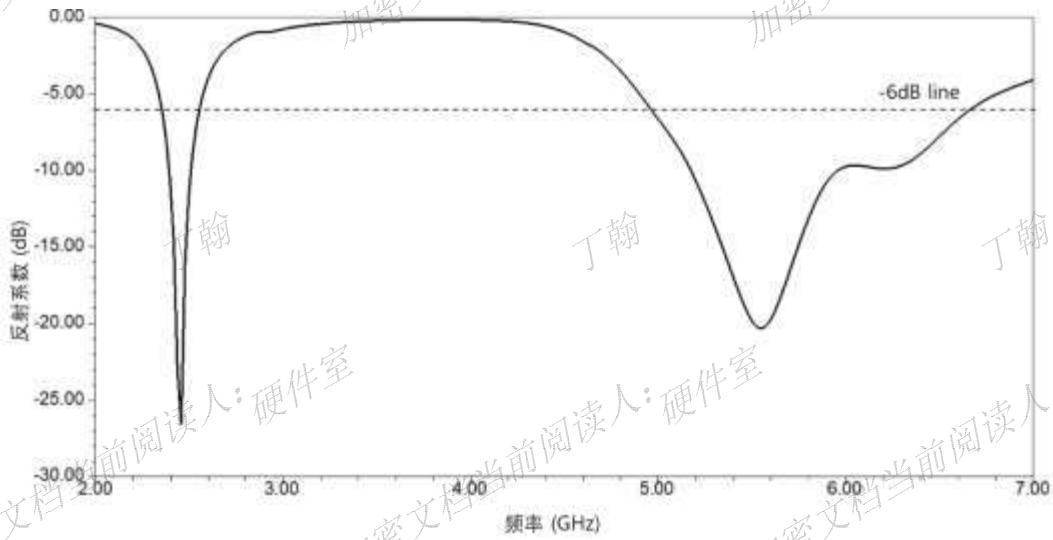


Radiation Pattern


coordinates :

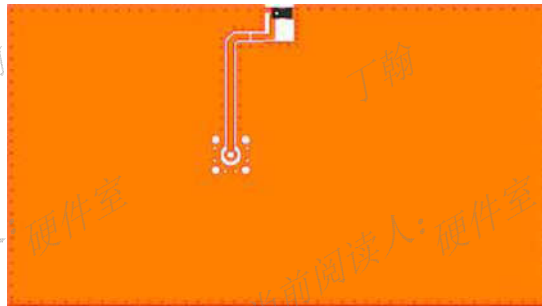

Y-Z Plane

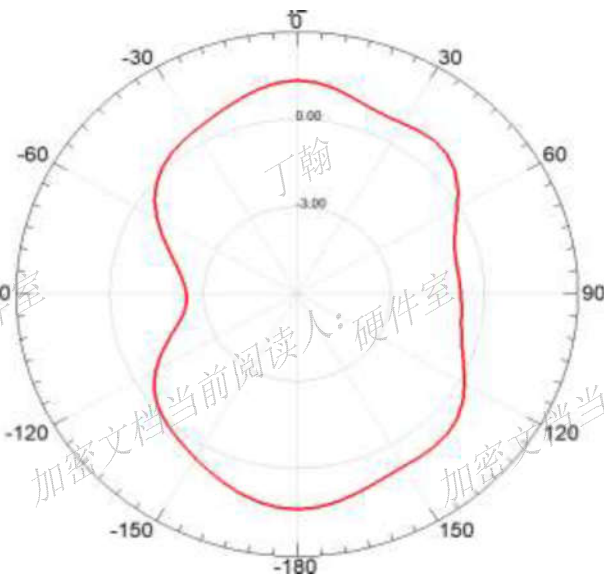


X-Z Plane

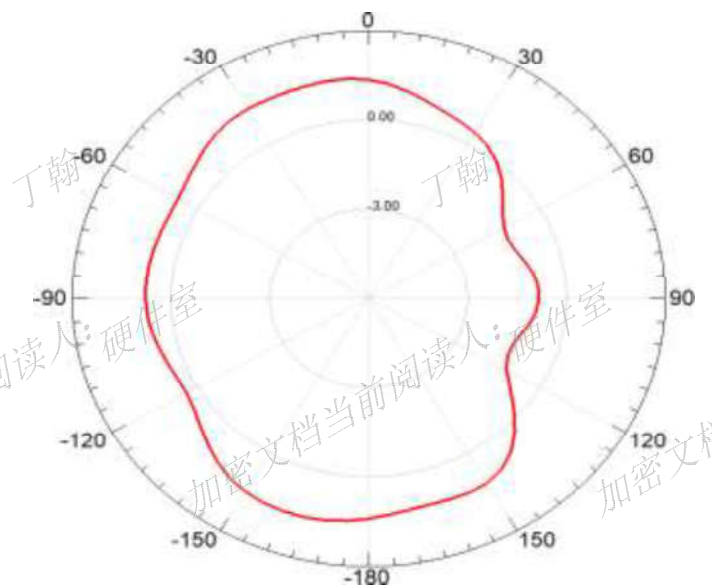




P/N: HY160808 SRF08

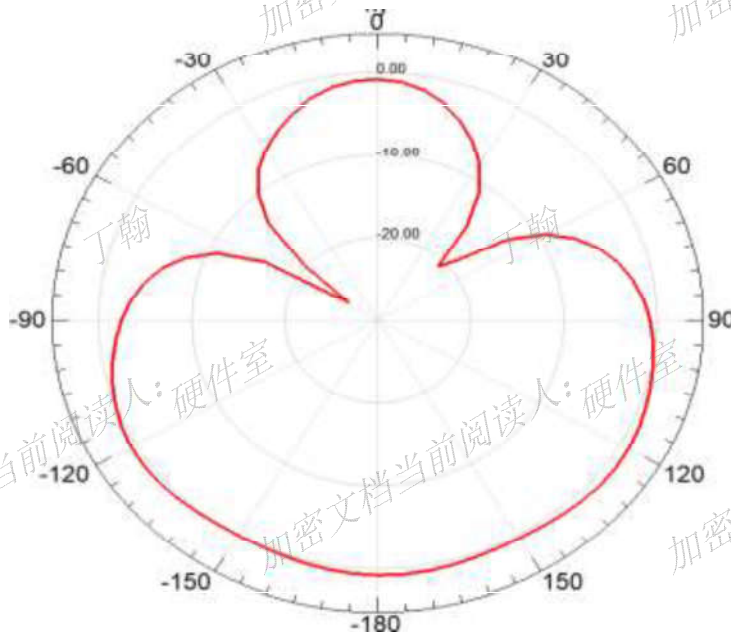

3D Radiation Pattern

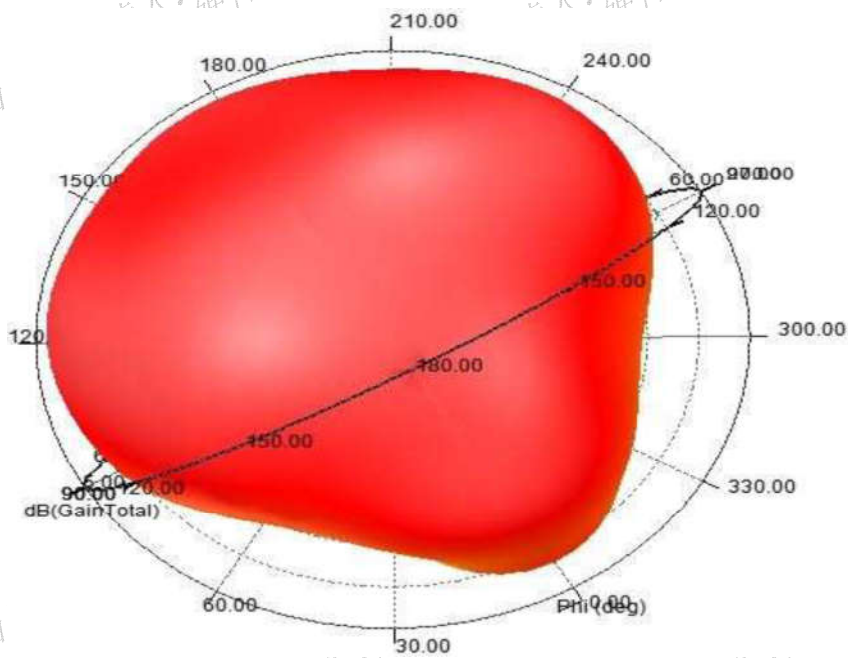



Dependability Test

Test Temperature	$25^{\circ}\text{C} \pm 3^{\circ}\text{C}$
Operating Temperature	$-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Temperature	$5 \sim 40^{\circ}\text{C}$
Relative Humidity	20~70%

Moisture Proof

Temperature: $40 \pm 2^{\circ}\text{C}$ Humidity: 90~95%RH
Duration: 500h
Recovery conditions: Room temperature Recovery Time: 24h (Class1) or 48h (Class2)

Solderability

At least 95% of the terminal electrode is covered by new solder. Preheating conditions: 80 to 120°C ; $10 \sim 30\text{s}$.
Solder Temperature: $235 \pm 5^{\circ}\text{C}$ Duration: $2 \pm 0.5\text{s}$, Solder Temperature: $245 \pm 5^{\circ}\text{C}$ Duration: $2 \pm 0.5\text{s}$

Optimum Solder Amount for Reflow Soldering

Too much solder



Cracks tend to occur due to large stress.


Not enough solder




Weak holding force may cause bad connection between the chip and PCB.

Recommended Soldering amounts

The optimal solder fillet amounts for re-flow soldering

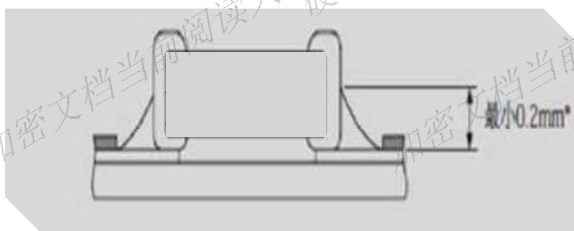

The optimal solder fillet amounts for wave soldering

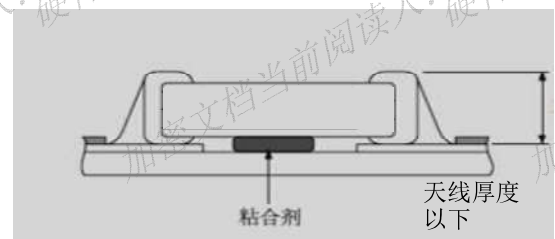



P/N: HY160808 SRF08

Temperature Cycle Test

10±1S Applied Force: 5N Duration: 10±1S

Preheating conditions: up-category temperature, 1h

Recovery time: 24±1h

Initial Measurement

Cycling Times: 5 times, 1 cycle, 4 steps:

阶段	温度 (℃)	时间 (分钟)
第1步	下限温度(NP03X7E/X7S/X6S/X5E-55) Y3V-2FZ5H-10	30
第2步	常温 (+20)	2~3
第3步	上限温度(NP03X7E/X7S-125 Y3V-25H/X5E-85 X6S-105)	30
第4步	常温 (+20)	2~3

Resistance to Soldering Heat

Preheating 80 to 120℃; 10~30s. Solder Temperature: 235±5℃ Duration: 2±0.5s, Solder Temperature: 245±5℃ Duration: 2±0.5s,

Preheating 100 to 200℃; 10±2min.


Solder Temperature: 265±5℃ Duration: 10±1s

Clean the capacitor with solvent and examine it with a 10X(min.) microscope.

Recovery Time: 24±2h

Recovery condition: Room temperature

Resistance to Flexure of Substrate

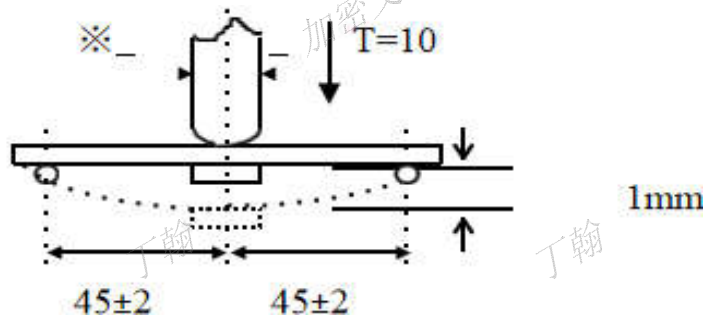

Test Board: Al₂O₃ or PCB Warp: 1mm Speed: 0.5mm/sec.

Unit: mm


The measurement should be made with the board in the bending position.



P/N: HY160808 SRF08

The temperature profile for soldering


Re-flow soldering

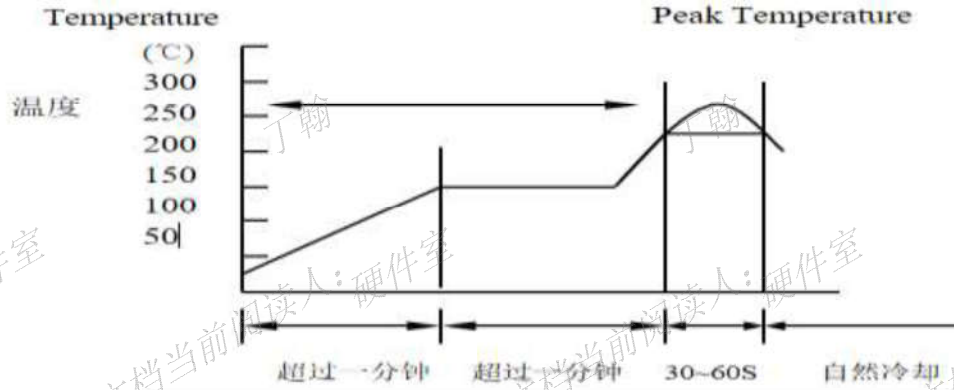

	Pb-Sn 焊接 Pb-Sn soldering	无铅焊接 Lead-free soldering
尖峰温度 Peak temperature	230°C~250°C	240°C~260°C

While in preheating, please keep the temperature difference between soldering temperature and surface temperature of chips as: $T \leq 150^{\circ}\text{C}$.

Wave soldering

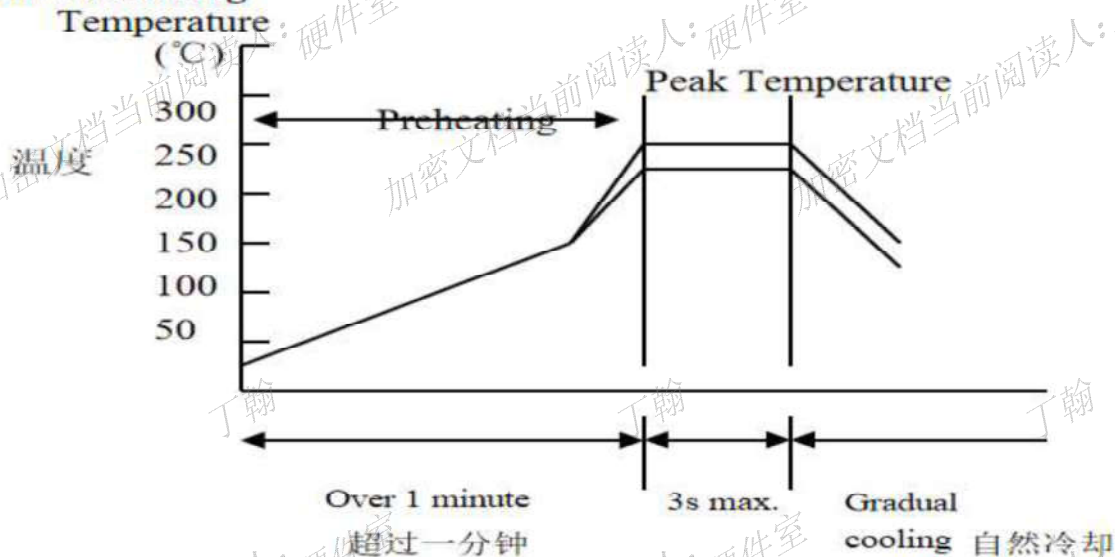


	Pb-Sn 焊接 Pb-Sn soldering	无铅焊接 Lead-free soldering
尖峰温度 Peak temperature	230°C~260°C	240°C~270°C



P/N: HY160808 SRF08


Dimensions of paper taping

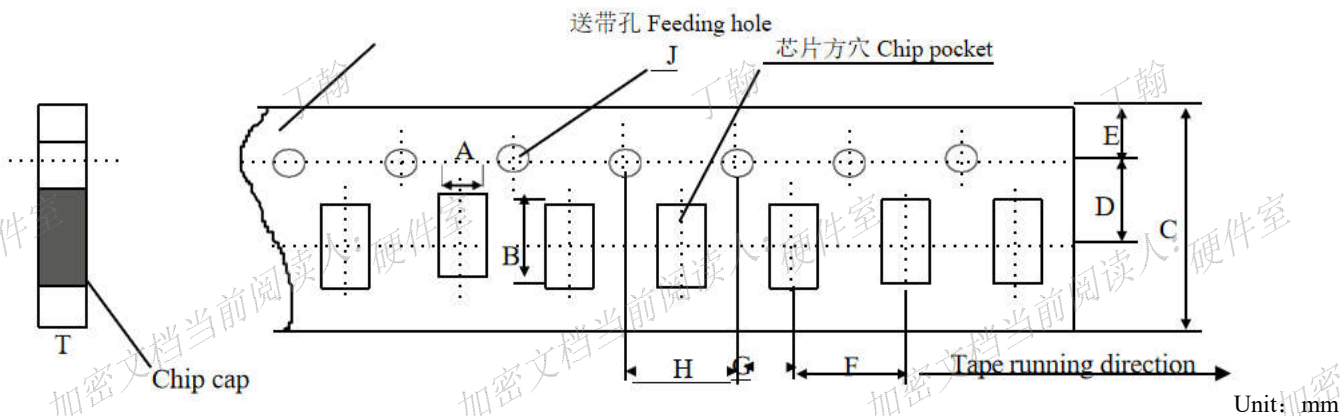

代号Code 纸带规格 papersize	A	B	C	D*	E	F	G*	H	J	T
尺寸	1.10 ±0.10	1.90 ±0.10	8.00 ±0.10	3.50 ±0.05	1.75 ±0.10	4.00 ±0.10	2.00 ±0.10	4.00 ±0.10	1.50 ±0.10	1.10 Max

Reel (4000 pcs/Reel)

EMBOSED TAPING

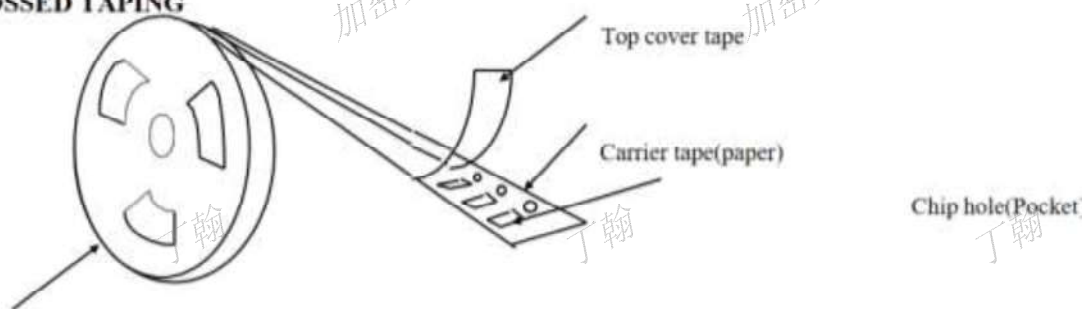

Polystyrene reel

Storage Period

The guaranteed period for solderability is 6 months (Under deliver package condition).

Temperature: 5~40°C /Relative Humidity: 20~70%


Hanyang Antenna Co. Ltd. has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of Hanyang Antenna Co. Ltd.



P/N: HY160808 SRF08

Freq	2425	2450	2475	2485	5200	5400	5600	5800
Efficiency_dB	-2.27	-1.98	-2.03	-2.07	-1.84	-2.15	-2.61	-2.42
Gain	2.79	3	2.91	2.89	3.5	3.1	2.2	2.9
Efficiency_Pcent	59.31	63.41	62.64	62.06	65.54	60.98	54.83	57.22

2.4G

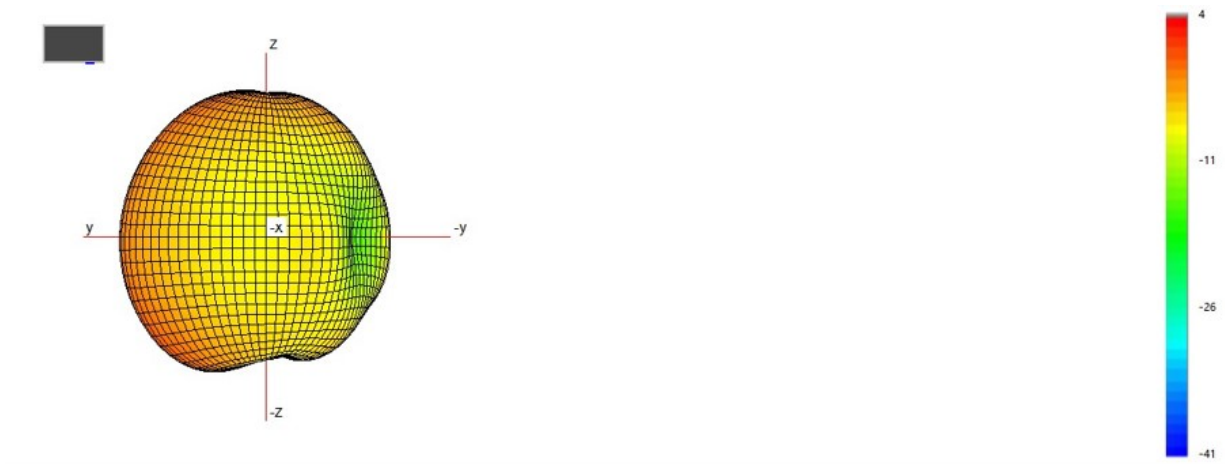

5.2G

