

ANTENNA SPECIFICATION0

CUS P/N : T2970
CREDITS P/N :

ApplicationDate: 2022-12-9
Editor:

Rev: R:A0
Page 1 of 7

Index

1.			General Description	1
2.			Electrical Specifications	2
	2-1		Set-up	2
		2-1-1	<i>Frequency Band</i>	2
		2-1-2	<i>Impedance</i>	2
		2-1-3	<i>Matching Requirements</i>	2
		2-1-4	<i>VSWR</i>	2
	2-2		Test Data	3to4
		2-2-1	<i>VSWR</i>	3
		2-2-2	<i>TRP&TIS</i>	4
3.			Mechanical Specification	5to7
	3-1		Mechanical Configuration	5
		3-1-1	Mechanical Configuration	5
		3-1-2	Mechanical Configuration	6
	3-2		Measurement Data	7
	3-3		Salt-Spray Test	7
4.			Environment Characteristics	7

ANTENNA SPECIFICATION0

CUS P/N : T2970
CREDITS P/N :

ApplicationDate: 2022-12-9
Editor:

Rev: R:A0
Page 2 of 7

1. General Description

This report summarizes the electrical performance results of the proposed Internal antenna to support the F12 (BT) program. The antenna is an assembly BT 2.4G.



2. Electrical Specifications

2-1 Set-up

2-1-1 Frequency Band

Frequency Band	Tx(MHz)	Rx(MHz)
GSM900	880 ~ 915	925 ~ 960
DCS1800	1710 ~ 1785	1805 ~ 1880
WIFI	2400-2450-2500	

2-1-2 Impedance

Nominal Impedance(including matching circuit) : **50** ohms

2-1-3 Matching Requirements

The matching circuit on the PCB of the handset is according to Figure 1

Optimum matching circuit is highly dependent on the handset and thus.

Final matching circuit layout and values will be defined when handset is available.

2-1-4 VSWR And GAIN

VSWR			GAIN			
Freq. Band	OPEN	SPEC	Band	Freq.	OPEN	SPEC

ANTENNA SPECIFICATION0

CUS P/N : T2970
CREDITS P/N :

ApplicationDate: 2022-12-9
Editor:

Rev: R:A0
Page 3 of 7

2400MHz	≤ 2.5	2400MHz	$\geq -1.0\text{dBi}$
2450MHz	≤ 2.0	2450MHz	$\geq 0.5\text{dBi}$
2500MHz	≤ 2.0	2500MHz	$\geq -1.0\text{dBi}$

※Measuring a 50Ω test jig is connected to a network analyzer to measure the VSWR

※※All test value is done in customer approval fixture.

2-2 Test Data

2-2-1 BT VSWR

Model No:	File:
CREDITS NO:	Note: BT-VSWR
Sample No:	
Test Condition: Free Space	Matching: 客供
Confirmation:	Engineer:

ANTENNA SPECIFICATION0

CUS P/N : T2970
CREDITS P/N :

ApplicationDate: 2022-12-9
Editor:

Rev: R:A0
Page 4 of 7

2-2-2 BT GAIN&EFF

Passive Test For BT								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
2400	38.15	-4.18	4.16	-1.15	16.755	21.397	1	-11.33
2410	37.93	-4.21	4.32	-1.17	16.611	21.323	0.98	-11.36
2420	36.91	-4.33	4.17	-1.24	16.003	20.912	0.91	-11.57
2430	35.46	-4.5	4.24	-1.39	15.253	20.212	0.76	-11.84
2440	35.09	-4.55	4.87	-1.43	15.089	20	0.72	-11.91
2450	35.57	-4.61	4.88	-1.46	14.837	19.732	0.69	-11.94
2460	33.34	-4.77	4.20	-1.6	14.206	19.138	0.55	-12.16
2470	33.25	-4.78	4.65	-1.6	14.145	19.101	0.55	-12.11
2480	32.71	-4.85	4.25	-1.67	13.964	18.746	0.48	-12.08
2490	31.93	-4.96	4.27	-1.75	13.566	18.364	0.4	-12.1
2500	32.01	-4.95	5.00	-1.71	13.496	18.512	0.44	-12.12




ANTENNA SPECIFICATION0

CUS P/N : T2970
CREDITS P/N :


ApplicationDate: 2022-12-9
Editor:

Rev: R:A0
Page 5 of 7


2400.000MHz

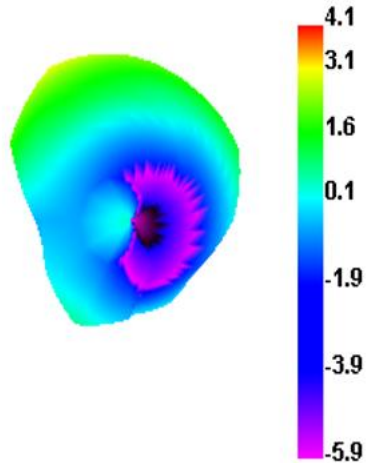


2400.000MHz H

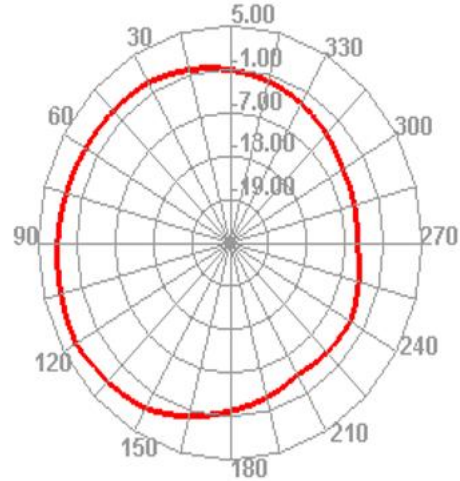

2400.000MHz E1

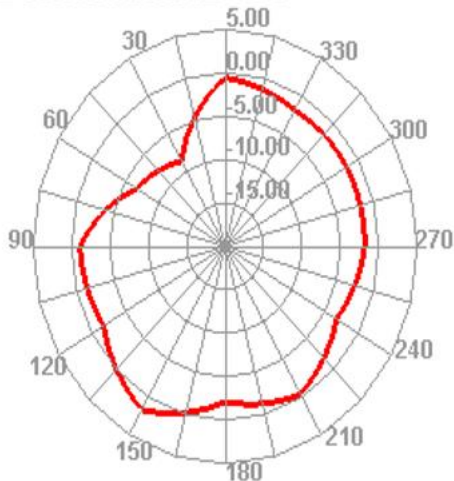

2400.000MHz E2

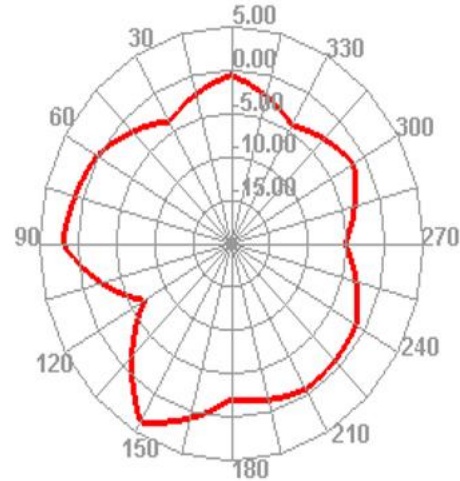


ANTENNA SPECIFICATION0

CUS P/N : T2970
CREDITS P/N :

ApplicationDate: 2022-12-9
Editor:

Rev: R:A0
Page 6 of 7

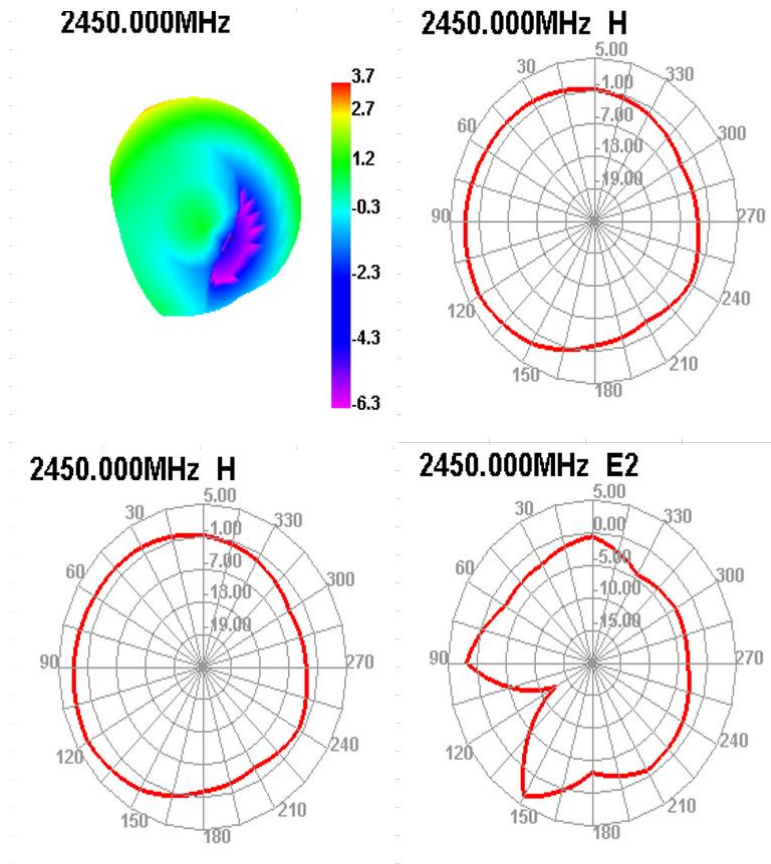


ANTENNA SPECIFICATION0

CUS P/N : T2970
CREDITS P/N :

ApplicationDate: 2022-12-9
Editor:

Rev: R:A0
Page 7 of 7

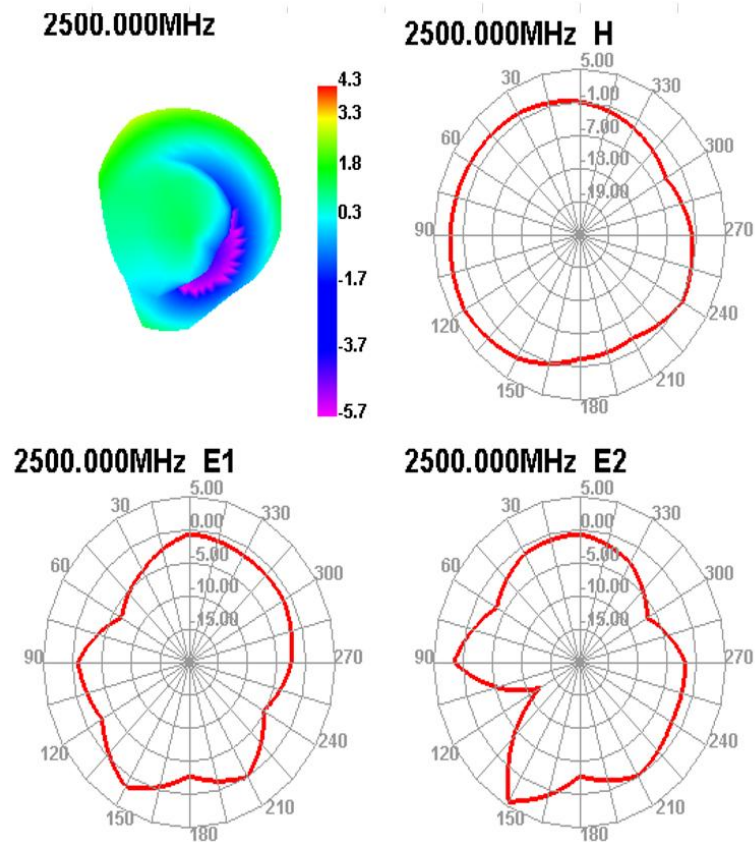

3. Mechanical Specification

3-1-1 Mechanical Configuration(组装图)

3-2 Measurement Data

3-3 Salt-Spray test

35°C, 85%RH, 48Hours(According to MIL-STD-810E)The

salt-spray is generated from a 5% salt solution., The VSWR, Gain, Radiation Pattern must be met specifications after the salt-spray test.

4. Environment Characteristic

NO.	ITEM	TEST CONDITION	SPECIFICATION
4-1	High Temperature/Humidity Storage Test(non operating)	1.Temperature: +70 ±2°C 2.Humidity: 90~95%RH 3.Time: 48hrs	No material deformation is allowed.

ANTENNA SPECIFICATION0

CUS P/N : T2970
CREDITS P/N :

ApplicationDate: 2022-12-9
Editor:

Rev: R:A0
Page 8 of 7

