


How to use

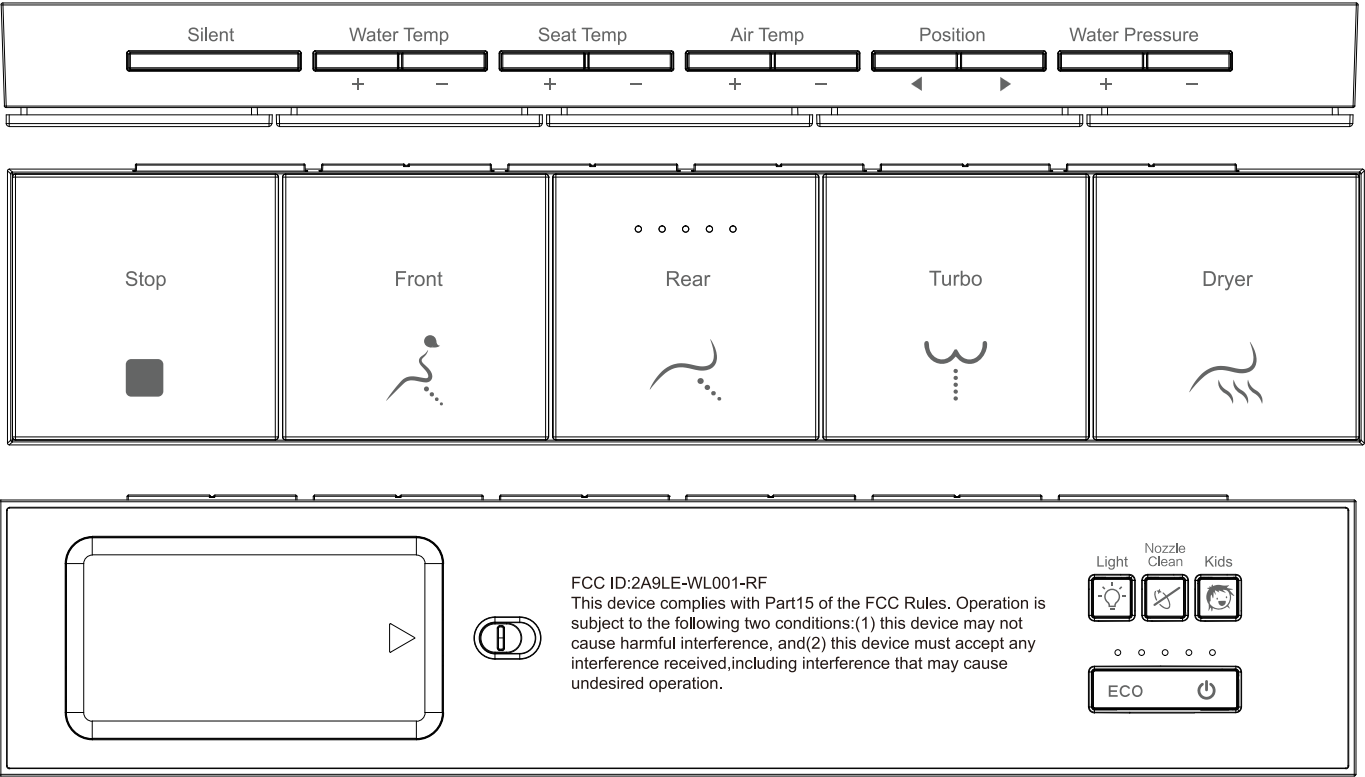

■ Stop	● Press the Stop button to end the running function such as 'Rear ', 'Front ', 'Dryer ' and 'Turbo '.
■ Nozzle Clean	● Press the Nozzle Clean button, and the nozzle will come out. Then the cleaning hole will spray water to clean the nozzle for 10 seconds. Press Stop button to stop it when it is running.
■ Turbo	● When the seat ring senses someone sitting: press Turbo button to initiate power washing function after a beep. It stops after 90 seconds. If the person leaves the seat ring, washing function also stops.
■ ECO	Press the ECO button to start power-saving function (the buzzer rings once); press the button again to stop the power-saving function (the buzzer rings twice for a short time). The seat temp will be 82.4°F /28°C in the ECO mode.
■ Kids	● Press the Kids Wash button in stop or other modes, it will start the washing function after a beep, and stop after 90 seconds. In the child wash mode, the water pressure is level 1, the position is level 3, the water temperature is level 1, and the seat ring is level 1 (People don't have to sit on the toilet seat when use this function).
■ Silent	● Press the Silent button to enable or disable silent mode.
■ Light	● Turn on or turn off the decorative light of the control knob.
■ Rear	● When the seat ring senses someone sitting: press Rear button to initiate rear washing function after a beep, press the button again to switch between moving and fixed washing state. It stops after 90 seconds. If the person leaves the seat ring, washing function also stops.
■ Front	● When the seat ring senses someone sitting: press Front button to initiate female front washing function after a beep, press the button again to switch between moving and fixed washing state. It stops after 90 seconds. If the person leaves the seat ring, washing function also stops.
■ Dryer	● When the seat ring senses someone sitting: press Dryer button to initiate drying function after a beep. It stops after 3 minutes. If the person leaves the seat ring, drying function also stops.
■	● Press the " " button to turn on/off the power of the toilet seat cover.

■ Water Temperature	● Press the Water Temp button to adjust the water temperature in the Rear and Front wash modes. There are 3 levels and a stand-by mode. Level 3 is the highest temperature.
■ Seat Temperature	● Press the Seat Temp button to adjust the seat ring temperature. There are 3 levels and a stand-by mode. Level 3 is the highest temperature.
■ Air Tempertature	● Press Air Temp button to adjust the air outlet temperature in drying mode. There are 3 levels and a stand-by mode. Level 3 is the highest temperature.
■ Position	● Press the Position button to change the water position.
■ Water Pressure	● Press the Water Pressure button to change the water pressure.
■ Code matching	● Press and hold the “Front ” button on remote control for 3 seconds, and the three indicators on the remote control will flash red. At the same time, the machine is powered on, and the buzzer will make a long beep to indicate that the code is successfully paired. Otherwise, repeat the above actions again.

Function description

Some models without this function

Function	Name	Description
Basic Function	Rear Wash	Wash people’s anus
	Female Wash	Special wash for women
	Power Wash	Special wash for Constipation
	Warm Air Drying	Blow warm air to dry people’s hip
	Water Pressure	Adjust the water volume and pressure
	Nozzle Position	Adjust the washing position
Convenient Function	Moving Washing	Moving the nozzle forth and back while washing
	Water Temperature	Adjust the water temperature
	Seat Temperature	Adjust the seat temperature
	Wind Temperature	Adjust the air temperature
	Remote	Convenient to use all function by a remote
Shortcut Function	Status Display	The decorative light of the knob glows white when no one is seated, red in rear wash function, blue in female wash function, and flashes red when a fault occurs
	ECO	Save power when not in use
	Care Function	
Care Function	Seat Heating	Make people not feel cold
	Lid Slow Close	The damping device is used to make the seat ring, the lid flips smoothly and the noise is small
	Decorative Light	Soft lighting
Safety Function	Overheating Protection	Thermal fuse to prevent the water temperature and air temperature from being too high
	Anti-scald System	After sitting for 15 minutes, the seat temperature will be automatically adjusted to level 1.
Secondary Function	Control Knob	The knobs and buttons on the side of the toilet lid can be used when the remote control fails
Clean Function	Troubleshooting	Sense abnormality and remind
	Nozzle Self-Cleaning	The nozzle will be cleaned by strong water pressure before and after use
	Nozzle Cleaning	Clean the nozzle

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:—

- Reorient or relocate the receiving antenna. —
 - Increase the separation between the equipment and receiver. —
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. —
 - Consult the dealer or an experienced radio/TV technician for help.
- The device has been evaluated to meet general R exposure requirement for frequency range: 20-2483 MHz
Modulation method: GFSK
Power level: 3 channels
Antenna Type: Internal Antenna
Antenna gain: 1.5 dBi