

TEST REPORT

Applicant: MEFERI TECHNOLOGIES CO.,LTD.
Address: 5F, A5, Tianfu Software Park, No. 1129, Century City Road, High-tech Zone, 610000, Chengdu, Sichuan, China
Equipment Type: Mobile Computer
Model Name: ME63 (refer to section 2.3)
Brand Name: MEFERI
FCC ID: 2A9LJ-ME63
Test Standard: 47 CFR Part 15 Subpart E (refer to section 3.1)
Sample Arrival Date: Aug. 20, 2025
Test Date: Aug. 21, 2025 – Sep. 16, 2025
Date of Issue: Dec. 01, 2025

ISSUED BY:

Shanghai Tejet Communications Technology Co., Ltd. Testing Center

Prepared by: Zhang Rujie

Reviewed by: Hai Su

Approved by: Zhang Yanqing
(Laboratory Manager)

Zhang Rujie

Hai Su

Zhang Yanqing

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Dec. 01, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information.....	5
2.3	General Description for Equipment under Test (EUT).....	5
2.4	Technical Information	6
2.5	Channel List	8
3	SUMMARY OF TEST RESULTS	12
3.1	Test Standards	12
3.2	Test Verdict	12
4	GENERAL TEST CONFIGURATIONS	13
4.1	Test Environments.....	13
4.2	Test Equipment List.....	13
4.3	Test Software List.....	13
4.4	Measurement Uncertainty	14
4.5	Decision Rule	15
4.6	Description of Test Setup	15
5	TEST ITEMS	18
5.1	RF Output Power	18
5.2	Emission Bandwidth and 99% Occupied Bandwidth	20
5.3	Power Spectral density (PSD)	21
5.4	Conducted Emission.....	22
5.5	Radiated Spurious Emissions and Band Edge (Restricted-band).....	23

5.6	Contention Based Protocol	27
5.7	In-Band Emissions.....	28
ANNEX A	TEST RESULT	30
A.1	RF Output Power	30
A.2	Emission Bandwidth & 99% Occupied Bandwidth.....	35
A.3	Power Spectral Density (PSD)	37
A.4	Conducted Emission.....	41
A.5	Radiated Spurious Emissions and Band Edge (Restricted-band).....	43
A.6	Contention Based Protocol	96
A.7	In-Band Emissions.....	112
ANNEX B	TEST SETUP PHOTOS	155
ANNEX C	EUT EXTERNAL PHOTOS.....	155
ANNEX D	EUT INTERNAL PHOTOS.....	155

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Address	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China

1.2 Test Location

Name	Shanghai Tejet Communications Technology Co., Ltd. Testing Center
Location	1-2/F., Building 1, No.222, Xuanlan Road, Xuanqiao, Pudong New District, Shanghai, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1352.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	MEFERI TECHNOLOGIES CO.,LTD.
Address	5F, A5, Tianfu Software Park, No. 1129,Century City Road, High-tech Zone,610000, Chengdu, Sichuan, China

2.2 Manufacturer Information

Manufacturer	MEFERI TECHNOLOGIES CO.,LTD.
Address	5F, A5, Tianfu Software Park, No. 1129,Century City Road, High-tech Zone,610000, Chengdu, Sichuan, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Mobile Computer
Model Name Under Test	ME63
Series Model Name	ME63P, ME63T, ME63H, ME63L, ME63S, ME63J, ME63_EEA, ME63_ROW
Description of Model name differentiation	All models are identical to each other construction and critical components, but only differ in colors and sales channels.
Sample Number	SC-SH2580050-S11(conducted) SC-SH2580050-S03(radiated) SC-SH2580050-S05(radiated)
Hardware Version	V1.0
Software Version	ME63_EN_GE_V01_Q3_H01
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 3G Network WCDMA Band 2/4/5 4G Network LTE FDD Band 2/4/5/7/12/13/17/19/25/26/66/71 LTE TDD Band 38/41/42/43 5G Network FDD NR n2/n5/n7/n25/n66/n71 TDD NR n38/n41/n77/n78 ENDC DC_2A_n77A, DC_2A_n78A, DC_5A_n41A, DC_5A_n77A, DC_5A_n78A, DC_7A_n77A, DC_7A_n78A, DC_26A_n41A, DC_26A_n78A, DC_38A_n78A, DC_41A_n77A, DC_41A_n78A, DC_66A_n77A, DC_66A_n78A, DC_71A_n41A, DC_71A_n77A, DC_71A_n78A Bluetooth 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40), 802.11ax(HE20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80/160), 802.11ax(HE20/40/80/160) 6G WIFI 802.11ax(HE20/40/80/160) GPS, GLONASS, BDS, Galileo, NFC
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	U-NII-5: 5925 MHz to 6425 MHz U-NII-6: 6425 MHz to 6525 MHz U-NII-7: 6525 MHz to 6875 MHz U-NII-8: 6875 MHz to 7125 MHz	
Modulation technology	OFDMA	
Modulation Type	1024QAM, 256QAM, 64QAM, 16QAM, BPSK, QPSK	
Transfer Rate (Mbps) (Single RF path)	802.11ax up to 1021 Mbps	
Channel Bandwidth	802.11ax: 20 MHz, 40 MHz, 80 MHz, 160MHz	
Maximum Output Power	U-NII-5: 18.37 dBm U-NII-6: 15.93 dBm U-NII-7: 16.28 dBm U-NII-8: 15.64 dBm	
Antenna System (eg., MIMO, Smart Antenna)	N/A	
Categorization as Correlated or Completely Uncorrelated	N/A	
Antenna Type	Main Antenna	PIFA Antenna
	Aux. Antenna	
Antenna Gain	Main Antenna	U-NII-5: 5925 MHz to 6425 MHz: 3.74 dBi U-NII-6: 6425 MHz to 6525 MHz: 3.74 dBi

		U-NII-7: 6525 MHz to 6875 MHz: 3.74 dBi U-NII-8: 6875 MHz to 7125 MHz: 3.74 dBi
	Aux. Antenna	U-NII-5: 5925 MHz to 6425 MHz: 2.97 dBi U-NII-6: 6425 MHz to 6525 MHz: 2.97 dBi U-NII-7: 6525 MHz to 6875 MHz: 2.97 dBi U-NII-8: 6875 MHz to 7125 MHz: 2.97 dBi
About the Product		The equipment is Mobile Computer, intended for used with information technology equipment.

Mode	Antenna		
	Main Antenna	Aux. Antenna	MIMO
802.11ax20	√	√	--
802.11ax40	√	√	--
802.11ax80	√	√	--
802.11ax160	√	√	--
Note: All the configurations were tested, but only the worst data was shown in this report.			

802.11ax RU configuration table								
Mode	Full RU	RU_26	RU_52	RU_106	RU_242	RU_484	RU_996	RU_966*2
802.11ax20	√	--	--	--	--	--	--	--
802.11ax40	√	--	--	--	--	--	--	--
802.11ax80	√	--	--	--	--	--	--	--
802.11ax160	√	--	--	--	--	--	--	--

2.5 Channel List

U-NII-5/6/7/8:

20 MHz		40 MHz		80 MHz		160 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	5955	3	5965	7	5985	15	6025
5	5975	11	6005	23	6065	47	6185
9	5995	19	6045	39	6145	79	6345
13	6015	27	6085	55	6225	111	6505
17	6035	35	6125	71	6305	143	6665
21	6055	43	6165	87	6385	175	6825
25	6075	51	6205	103	6465	207	6985
29	6095	59	6245	119	6545		
33	6115	67	6285	135	6625		
37	6135	75	6325	151	6705		
41	6155	83	6365	167	6785		
45	6175	91	6405	183	6865		
49	6195	99	6445	199	6945		
53	6215	107	6485	215	7025		
57	6235	115	6525				
61	6255	123	6565				
65	6275	131	6605				
69	6295	139	6645				
73	6315	147	6685				
77	6335	155	6725				
81	6355	163	6765				
85	6375	171	6805				
89	6395	179	6845				
93	6415	187	6885				
97	6435	195	6925				
101	6455	203	6965				
105	6475	211	7005				
109	6495	219	7045				
113	6515	227	7085				
117	6535						
121	6555						
125	6575						
129	6595						
133	6615						
137	6635						
141	6655						
145	6675						

149	6695						
153	6715						
157	6735						
161	6755						
165	6775						
169	6795						
173	6815						
177	6835						
181	6855						
185	6875						
189	6895						
193	6915						
197	6935						
201	6955						
205	6975						
209	6995						
213	7015						
217	7035						
221	7055						
225	7075						
229	7095						
233	7115						

The Lowest frequency, the middle frequency and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11ax(HE20)

U-NII-5 (5925 - 6425 MHz)			U-NII-6 (6425 - 6525 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
1	Low	5955	97	Low	6435
45	Mid	6175	105	Mid	6475
93	High	6415	113	High	6515

U-NII-7 (6525 - 6875 MHz)			U-NII-8 (6875 - 7125 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
117	Low	6535	185	Low	6875
153	Mid	6715	213	Mid	7015
181	High	6855	229	Mid	7095
			233	High	7115

For 802.11ax(HE40)

U-NII-5 (5925 - 6425 MHz)			U-NII-6 (6425 - 6525 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
3	Low	5965	99	Low	6445
43	Mid	6165	107	Mid	6485
91	High	6405	115	High	6525

U-NII-7 (6525 - 6875 MHz)			U-NII-8 (6875 - 7125 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
123	Low	6565	187	Low	6885
155	Mid	6725	211	Mid	7005
179	High	6845	227	High	7085

For 802.11ax(HE80)

U-NII-5 (5925 - 6425 MHz)			U-NII-6 (6425 - 6525 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
7	Low	5985	103	Low	6465
39	Mid	6145	119	High	6545
87	High	6385			

U-NII-7 (6525 - 6875 MHz)			U-NII-8 (6875 - 7125 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
135	Low	6625	183	Low	6865
151	Mid	6705	199	Mid	6945
167	High	6785	215	High	7025

For 802.11ax(HE160)

U-NII-5 (5925 - 6425 MHz)			U-NII-6 (6425 - 6525 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
15	Low	6025	111	Mid	6505
47	Mid	6185			
79	High	6345			

U-NII-7 (6525 - 6875 MHz)			U-NII-8 (6875 - 7125 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
143	Low	6665	207	Mid	6985
175	High	6825			

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Modulation Type	U-NII-5	U-NII-6	U-NII-7	U-NII-8
				Channel	Channel	Channel	Channel
RF Output Power	11ax(20 MHz)	8.6	OFDMA	1/45/93	97/105/113	117/153/181	185/213/229/233
	11ax(40 MHz)	17.2		3/43/91	99/107/115	123/155/179	187/211/227
	11ax(80 MHz)	36.0		7/39/87	103/119	135/151/167	183/199/215
	11ax(160 MHz)	72.1		15/47/79	111	143/175	207
Emission Bandwidth & 99% Occupied Bandwidth	11ax(20 MHz)	8.6	OFDMA	1/45/93	97/105/113	117/153/181	185/213/229/233
	11ax(40 MHz)	17.2		3/43/91	99/107/115	123/155/179	187/211/227
	11ax(80 MHz)	36.0		7/39/87	103/119	135/151/167	183/199/215
	11ax(160 MHz)	72.1		15/47/79	111	143/175	207
Power Spectral Density	11ax(20 MHz)	8.6	OFDMA	1/45/93	97/105/113	117/153/181	185/213/229/233
	11ax(40 MHz)	17.2		3/43/91	99/107/115	123/155/179	187/211/227
	11ax(80 MHz)	36.0		7/39/87	103/119	135/151/167	183/199/215
	11ax(160 MHz)	72.1		15/47/79	111	143/175	207
Radiated Spurious Emissions	11ax(20 MHz)	8.6	OFDMA	1/45/93	97/105/113	117/153/181	185/213/229/233
	11ax(40 MHz)	17.2		3/43/91	99/107/115	123/155/179	187/211/227
	11ax(80 MHz)	36.0		7/39/87	103/119	135/151/167	183/199/215
	11ax(160 MHz)	72.1		15/47/79	111	143/175	207
Band Edge (Restricted-band)	11ax(20 MHz)	8.6	OFDMA	1/45/93	97/105/113	117/153/181	185/213/229/233
	11ax(40 MHz)	17.2		3/43/91	99/107/115	123/155/179	187/211/227
	11ax(80 MHz)	36.0		7/39/87	103/119	135/151/167	183/199/215
	11ax(160 MHz)	72.1		15/47/79	111	143/175	207
Contention Based Protocol	11ax(20 MHz)	8.6	OFDMA	1/45/93	97/105/113	117/153/181	185/213/229/233
	11ax(40 MHz)	17.2		3/43/91	99/107/115	123/155/179	187/211/227
	11ax(80 MHz)	36.0		7/39/87	103/119	135/151/167	183/199/215
	11ax(160 MHz)	72.1		15/47/79	111	143/175	207
In-Band Emissions	11ax(20 MHz)	8.6	OFDMA	1/45/93	97/105/113	117/153/181	185/213/229/233
	11ax(40 MHz)	17.2		3/43/91	99/107/115	123/155/179	187/211/227
	11ax(80 MHz)	36.0		7/39/87	103/119	135/151/167	183/199/215
	11ax(160 MHz)	72.1		15/47/79	111	143/175	207

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E	Unlicensed National Information Infrastructure Devices
2	KDB Publication 789033 D02v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
3	KDB Publication 987594 D03v01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure 6 GHz (U-NII) Devices Part 15, Subpart E
4	ANSI C63.10-2020	American National Standard for Testing Unlicensed Wireless Devices

3.2 Test Verdict

No.	Description	FCC Part No.	RSS Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	--	Pass ^{Note1}
2	RF Output Power	15.407(a)	N/A	ANNEX A.1	Pass
3	Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	N/A	ANNEX A.2	Pass
4	Power Spectral Density	15.407(a)	N/A	ANNEX A.3	Pass
5	Conducted Emission	15.207	N/A	ANNEX A.4	Pass
6	Radiated Spurious Emissions and Band Edge (Restricted-band)	15.407(b)	N/A	ANNEX A.5	Pass
7	Contention Based Protocol	15.407(d)	N/A	ANNEX A.6	Pass
8	In-Band Emissions	15.407(b)	N/A	ANNEX A.7	Pass

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Under all normal operating conditions specified in the user manual, frequency stability can keep radiation within the operating frequency band.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	50% to 58%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+23.2°C to +24.7°C
	LT (Low Temperature)	0°C
	HT (High Temperature)	+45°C
Working Voltage of the EUT	NV (Normal Voltage)	3.80 V
	LV (Low Voltage)	3.60 V
	HV (High Voltage)	4.40 V

4.2 Test Equipment List

Description	Manufacturer	Model	Equipment No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	BH-EMC-L066	2025.02.12	2026.02.11
Spectrum Analyzer	KEYSIGHT	N9010B	BH-EMC-L099	2025.02.12	2026.02.11
Signal Generator	Anritsu	MG3710E	BH-EMC-L131	2025.02.12	2026.02.11
Wideband Radio Communication Tester	R&S	CMW500	BH-EMC-L094	2025.02.11	2026.02.10
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L015	2025.07.04	2026.07.03
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519 B	BH-EMC-L067	2024.03.11	2027.03.10
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	BH-EMC-L008	2024.03.11	2027.03.10
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	BH-EMC-L044	2024.03.11	2027.03.10
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400-KF	BH-EMC-L061	2024.03.11	2027.03.10
Anechoic Chamber	YiHeng	9m*6m*6m	BH-EMC-L001	2024.04.18	2027.04.17
EMI Receiver	KEYSIGHT	N9038A	BH-EMC-L127	2025.02.12	2026.02.11
LISN	SCHWARZBECK	NSLK 8127	BH-EMC-L011	2025.02.11	2026.02.10
10dB Limiter	SCHWARZBECK	VTSD 9561-F	BH-EMC-L014	2025.02.11	2026.02.10
Shielded Room	YiHeng	5m*4m*3.2m	BH-EMC-L006	2024.02.22	2027.02.21

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable Test Setup
BL410R	BALUN	V2.1.1.496	N/A	The section 4.6.1
BL410E	BALUN	V21.919	N/A	The section 4.6.2&4.6.3&4.6.4&4.6.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


Parameters	Uncertainty
Occupied Channel Bandwidth	2.4 %
RF output power, conducted	0.41 dB
Power Spectral Density, conducted	1.73 dB
Unwanted Emissions, conducted	1.73 dB
All emissions, radiated	3.70 dB
Temperature	0.82 °C
Humidity	4.1 %

4.5 Decision Rule

- ☐ No Need
- ☒ Use General conformity decision rule (Consider uncertainty or not ☒No ☐Yes)
- ☐ Use Special Conformity Decision Rule (Consider uncertainty or not ☐No ☐Yes)


4.6 Description of Test Setup

4.6.1 For Antenna Port Test

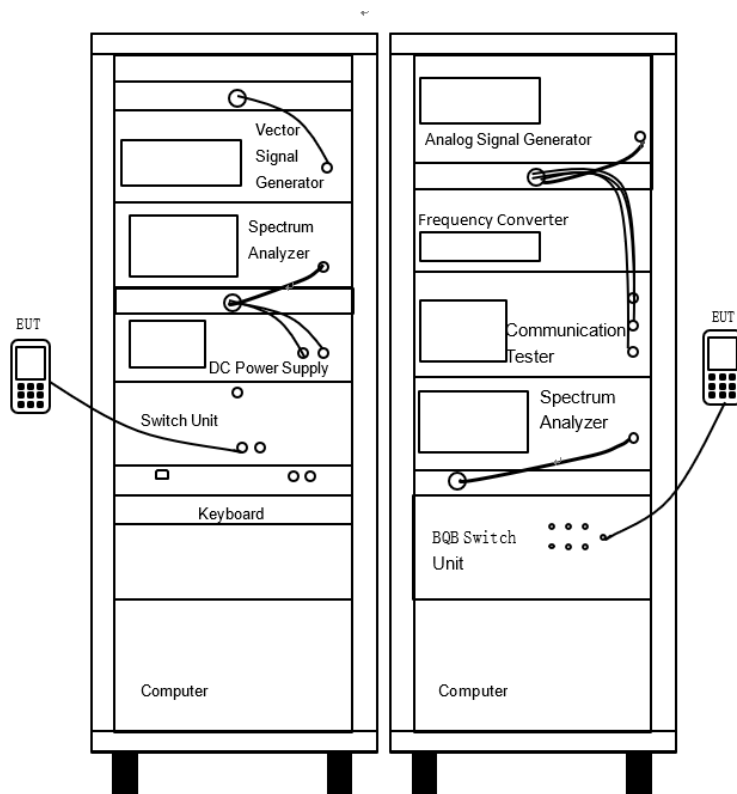


(Diagram 1)

4.6.2 For AC Power Supply Port Test

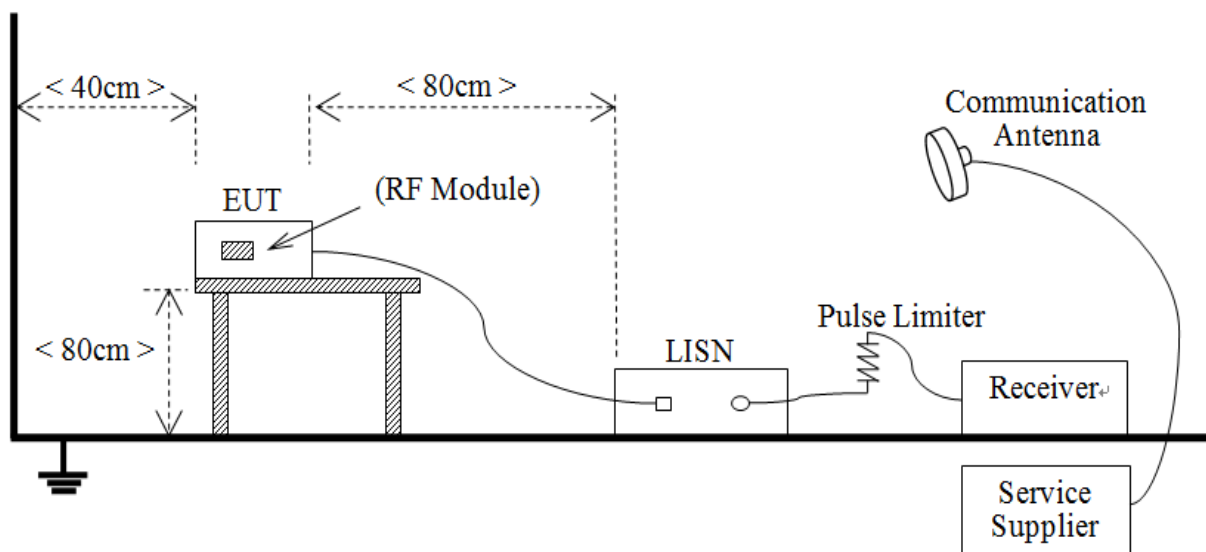


(Diagram 2)

4.6.3 For Radiated Test (Below 30 MHz)

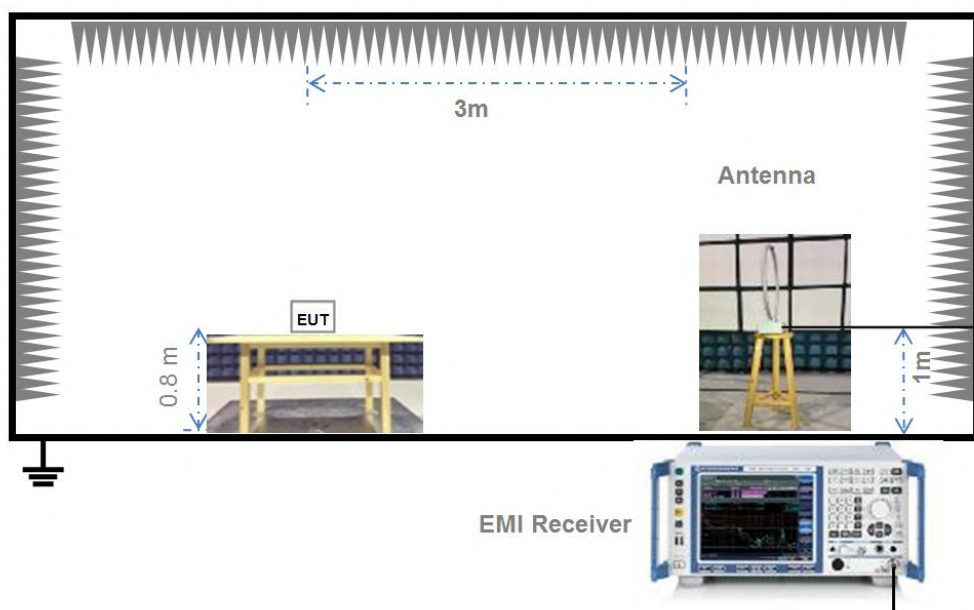


(Diagram 3)

4.6.4 For Radiated Test (30 MHz-1 GHz)

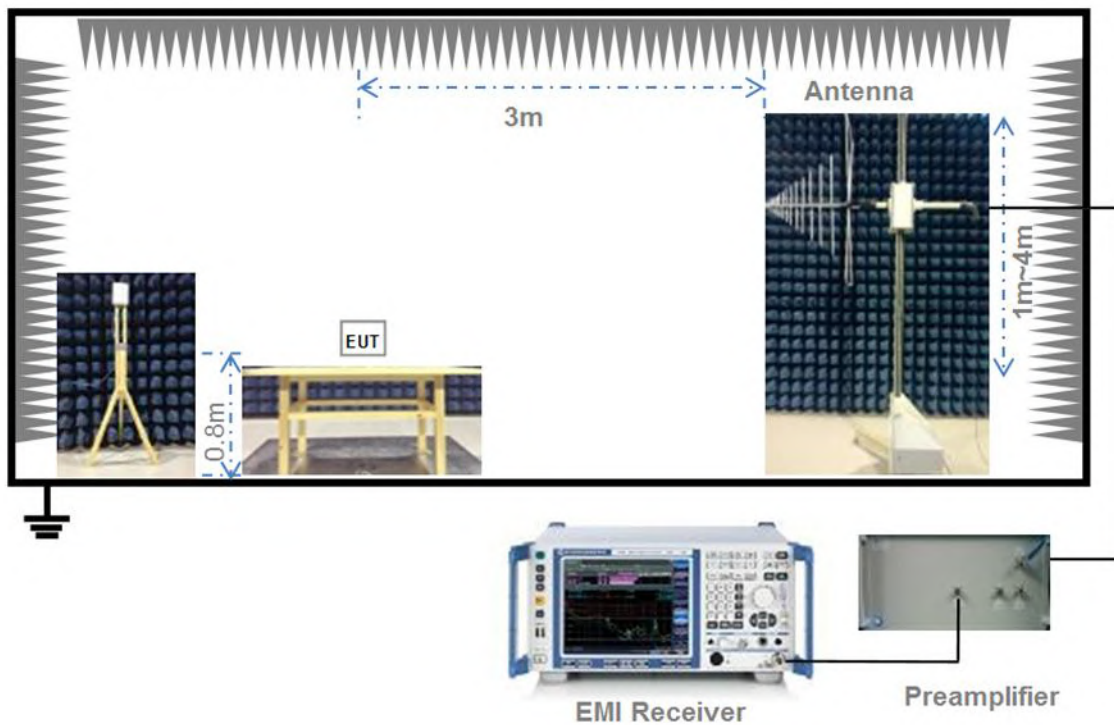

(Diagram 4)

4.6.5 For Radiated Test (Above 1 GHz)

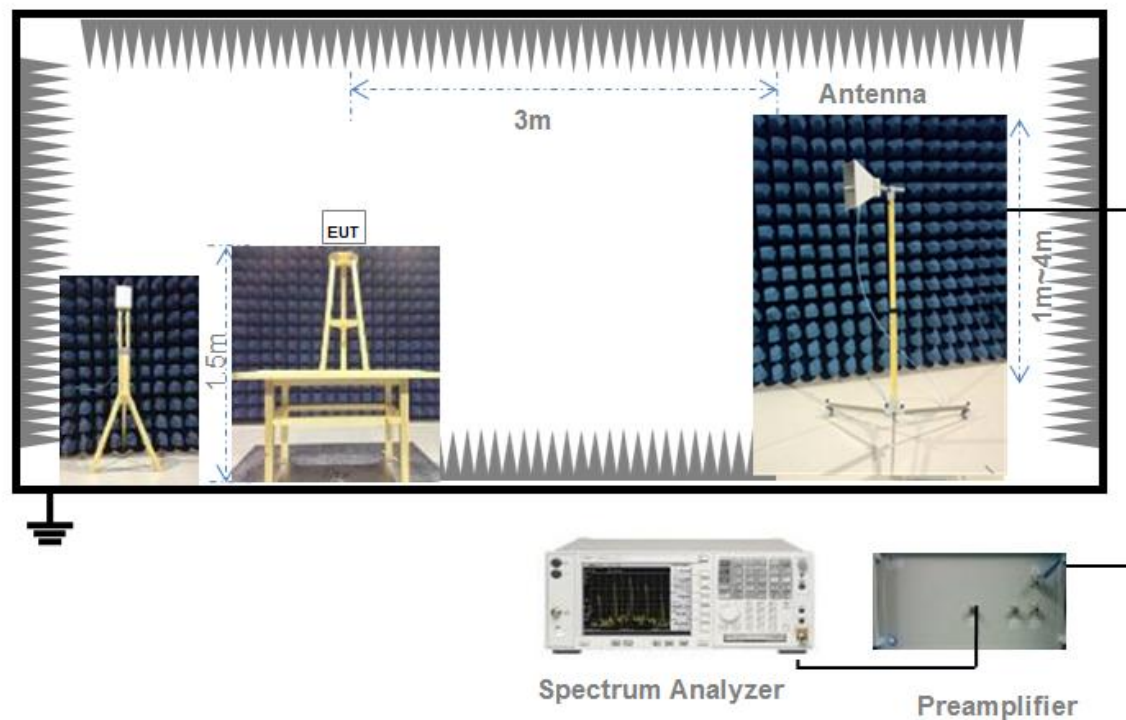

(Diagram 5)

5 TEST ITEMS

5.1 RF Output Power

5.1.1 Test Limit

FCC §15.407(a)

The maximum conducted output power should not exceed:

Frequency Band (MHz)	Limit
5925-7125	24 dBm (e.i.r.p.)
Note: Where "B" is the 26 dB emissions bandwidth in MHz.	

The maximum e.i.r.p. shall not exceed:

Frequency Band (MHz)	Limit
5925-7125	24 dBm
Note: Where "B" is the 99% emissions bandwidth in MHz.	

5.1.2 Test Setup

The section 4.6.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.1.3 Test Procedure

Maximum conducted (average) output power

a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.

Set VBW $\geq$ RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the

number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.) The E.I.R.P used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.1.4 Test Result

Please refer to ANNEX A.1.

5.2 Emission Bandwidth and 99% Occupied Bandwidth

5.2.1 Limit

FCC §15.407(a)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

5.2.2 Test Setup

The test setup photo please refer to 4.6.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Emission bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set VBW $\geq 3 \times$ RBW,
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set Span = 1.5 times to 5.0 times the OBW
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW $\geq 3 \times$ RBW, Detector = Peak.
4. Trace mode = Max hold.
5. Use the 99% power bandwidth function of the instrument.

6 dB bandwidth

1. Set RBW = 100 kHz, VBW = 300 kHz.
2. Detector = Peak. Trace mode = Max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2.4 Test Result

Please refer to ANNEX A.2.

5.3 Power Spectral density (PSD)

5.3.1 Limit

FCC §15.407(a)

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5925-7125	-1 dBm/MHz (e.i.r.p.)

The e.i.r.p. spectral density should not exceed:

Frequency Band (MHz)	Limit
5925-7125	-1 dBm/MHz

5.3.2 Test Setup

The section 4.6.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.

1. Set RBW = 1 MHz,
2. VBW $\geq 3 \times$ RBW,
3. Sweep time = Auto,
4. Detector = RMS.
5. Allow the sweeps to continue until the trace stabilizes.
6. Use the peak marker function to determine the maximum amplitude level.
7. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.3.4 Test Result

Please refer to ANNEX A.3.

5.4 Conducted Emission

5.4.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the U-NII-150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

5.4.2 Test Setup

The section 4.6.2 (Diagram 2) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.4.4 Test Result

Please refer to ANNEX A.4.

5.5 Radiated Spurious Emissions and Band Edge (Restricted-band)

5.5.1 Limit

FCC §15.209 & 15.407(b)

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note ¹: The Limit for radiated test was performed according to FCC Part 15C

Note ²: The tighter limit applies at the band edge.

Un-restricted band emissions	
Out Operating Band (MHz)	Limit
5925 - 7125	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength.

5.5.2 Test Setup

The section 4.6.3-4.6.5 (Diagram 3 - Diagram 5) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)

c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
 d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).

e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
 $E = \text{EIRP} - 20\log D + 104.8$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

f) Compare the resultant electric field strength level to the applicable limit.

g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

a) RBW = as specified in Table 1.

b) VBW $\geq 3 \times$ RBW.

c) Detector = Peak.

d) Sweep time = auto.

e) Trace mode = max hold.

f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits. The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.5.4 Test Result

Please refer to ANNEX A.5.

5.6 Contention Based Protocol

5.6.1 Limit

FCC §15.15.407(d)

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

5.6.2 Test Setup

The section 4.6.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The AWGN interference signal level is corrected according to the antenna gain, and the AWGN interference signal is modulated by the vector signal source. When AWGN interference exists, a spectrum analyzer is used to detect whether the EUT recognizes and stops transmission.

5.6.4 Test Result

Please refer to ANNEX A.6.

5.7 In-Band Emissions

5.7.1 Limit

FCC §15.15.407(b)

Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:

- a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
- b. Suppressed by 28 dB at one channel bandwidth from the channel center.
- c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

5.7.2 Test Setup

The section 4.6.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.

9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

5.7.4 Test Result

Please refer to ANNEX A.7.

ANNEX A TEST RESULT

A.1 RF Output Power

Note 1: For FCC standard, if transmitting antennas of directional gain greater than 6 dBi are used, all band maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note 2: All the configurations were tested, but only the worst data was shown in this report.

Duty Cycle

U-NII-5/6/7/8

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle	Duty Factor
11ax (HE20)	5.41	5.43	99.65%	0.02
11ax (HE40)	4.06	4.13	98.40%	0.07
11ax (HE80)	2.19	2.22	98.74%	0.06
11ax (HE160)	2.14	2.17	98.85%	0.05

Test DataConducted PowerMain Antenna

U-NII-5 (5925 - 6425MHz)					
Mode	Channel	EIRP (dBm)	EIRP (mW)	EIRP Limit (dBm)	Verdict
11ax (HE20) (SU)	CH1	10.31	10.73	24	Pass
11ax (HE20) (SU)	CH45	9.04	8.01	24	Pass
11ax (HE20) (SU)	CH93	8.62	7.27	24	Pass
11ax (HE40) (SU)	CH3	13.23	21.04	24	Pass
11ax (HE40) (SU)	CH43	11.86	15.35	24	Pass
11ax (HE40) (SU)	CH91	11.50	14.13	24	Pass
11ax (HE80) (SU)	CH7	16.34	43.00	24	Pass
11ax (HE80) (SU)	CH39	14.87	30.66	24	Pass
11ax (HE80) (SU)	CH87	14.76	29.89	24	Pass
11ax (HE160) (SU)	CH15	18.37	68.71	24	Pass
11ax (HE160) (SU)	CH47	15.76	37.67	24	Pass
11ax (HE160) (SU)	CH79	15.09	32.29	24	Pass

U-NII-6 (6425 - 6525MHz)					
Mode	Channel	EIRP (dBm)	EIRP (mW)	EIRP Limit (dBm)	Verdict
11ax (HE20) (SU)	CH97	7.95	6.23	24	Pass
11ax (HE20) (SU)	CH105	8.01	6.32	24	Pass
11ax (HE20) (SU)	CH113	7.81	6.03	24	Pass
11ax (HE40) (SU)	CH99	11.28	13.43	24	Pass
11ax (HE40) (SU)	CH107	11.08	12.82	24	Pass
11ax (HE40) (SU)	CH115	11.04	12.71	24	Pass
11ax (HE80) (SU)	CH103	14.45	27.83	24	Pass
11ax (HE80) (SU)	CH119	14.50	28.15	24	Pass
11ax (HE160) (SU)	CH111	15.93	39.18	24	Pass

U-NII-7 (6525 - 6825MHz)					
Mode	Channel	EIRP (dBm)	EIRP (mW)	EIRP Limit (dBm)	Verdict
11ax (HE20) (SU)	CH117	7.89	6.15	24	Pass
11ax (HE20) (SU)	CH153	7.75	5.95	24	Pass
11ax (HE20) (SU)	CH181	8.48	7.04	24	Pass
11ax (HE40) (SU)	CH123	11.28	13.43	24	Pass
11ax (HE40) (SU)	CH155	10.49	11.19	24	Pass
11ax (HE40) (SU)	CH179	10.71	11.78	24	Pass
11ax (HE80) (SU)	CH135	14.00	25.09	24	Pass
11ax (HE80) (SU)	CH151	13.58	22.78	24	Pass
11ax (HE80) (SU)	CH1167	13.69	23.36	24	Pass
11ax (HE160) (SU)	CH143	16.11	40.84	24	Pass
11ax (HE160) (SU)	CH175	16.28	42.47	24	Pass

U-NII-8 (6875 - 7125MHz)					
Mode	Channel	EIRP (dBm)	EIRP (mW)	EIRP Limit (dBm)	Verdict
11ax (HE20) (SU)	CH185	7.55	5.68	24	Pass
11ax (HE20) (SU)	CH213	5.55	3.59	24	Pass
11ax (HE20) (SU)	CH229	6.90	4.89	24	Pass
11ax (HE20) (SU)	CH233	7.01	5.02	24	Pass
11ax (HE40) (SU)	CH187	10.34	10.81	24	Pass
11ax (HE40) (SU)	CH211	8.60	7.24	24	Pass
11ax (HE40) (SU)	CH227	10.18	10.42	24	Pass
11ax (HE80) (SU)	CH183	13.57	22.73	24	Pass
11ax (HE80) (SU)	CH199	12.16	16.43	24	Pass
11ax (HE80) (SU)	CH215	12.29	16.92	24	Pass
11ax (HE160) (SU)	CH207	13.92	24.66	24	Pass

Aux. Antenna

U-NII-5 (5925 - 6425MHz)					
Mode	Channel	EIRP (dBm)	EIRP (mW)	EIRP Limit (dBm)	Verdict
11ax (HE20) (SU)	CH1	8.26	6.69	24	Pass
11ax (HE20) (SU)	CH45	6.01	3.99	24	Pass
11ax (HE20) (SU)	CH93	5.66	3.68	24	Pass
11ax (HE40) (SU)	CH3	10.82	12.08	24	Pass
11ax (HE40) (SU)	CH43	8.74	7.48	24	Pass
11ax (HE40) (SU)	CH91	8.21	6.62	24	Pass
11ax (HE80) (SU)	CH7	13.81	24.02	24	Pass
11ax (HE80) (SU)	CH39	12.15	16.39	24	Pass
11ax (HE80) (SU)	CH87	11.05	12.72	24	Pass
11ax (HE160) (SU)	CH15	16.06	40.37	24	Pass
11ax (HE160) (SU)	CH47	15.35	34.28	24	Pass
11ax (HE160) (SU)	CH79	11.93	15.61	24	Pass

U-NII-6 (6425 - 6525MHz)					
Mode	Channel	EIRP (dBm)	EIRP (mW)	EIRP Limit (dBm)	Verdict
11ax (HE20) (SU)	CH97	5.48	3.53	24	Pass
11ax (HE20) (SU)	CH105	6.04	4.01	24	Pass
11ax (HE20) (SU)	CH113	6.34	4.30	24	Pass
11ax (HE40) (SU)	CH99	8.90	7.76	24	Pass
11ax (HE40) (SU)	CH107	9.40	8.71	24	Pass
11ax (HE40) (SU)	CH115	9.69	9.31	24	Pass
11ax (HE80) (SU)	CH103	12.21	16.62	24	Pass
11ax (HE80) (SU)	CH119	12.72	18.69	24	Pass
11ax (HE160) (SU)	CH111	15.46	35.16	24	Pass

U-NII-7 (6525 - 6825MHz)					
Mode	Channel	EIRP (dBm)	EIRP (mW)	EIRP Limit (dBm)	Verdict
11ax (HE20) (SU)	CH117	6.41	4.37	24	Pass
11ax (HE20) (SU)	CH153	6.36	4.32	24	Pass
11ax (HE20) (SU)	CH181	6.53	4.49	24	Pass
11ax (HE40) (SU)	CH123	9.92	9.82	24	Pass
11ax (HE40) (SU)	CH155	10.10	10.23	24	Pass
11ax (HE40) (SU)	CH179	9.41	8.73	24	Pass
11ax (HE80) (SU)	CH135	13.05	20.16	24	Pass
11ax (HE80) (SU)	CH151	13.09	20.35	24	Pass
11ax (HE80) (SU)	CH1167	12.98	19.84	24	Pass
11ax (HE160) (SU)	CH143	16.15	41.21	24	Pass
11ax (HE160) (SU)	CH175	15.60	36.31	24	Pass

U-NII-8 (6875 - 7125MHz)					
Mode	Channel	EIRP (dBm)	EIRP (mW)	EIRP Limit (dBm)	Verdict
11ax (HE20) (SU)	CH185	7.00	5.01	24	Pass
11ax (HE20) (SU)	CH213	5.90	3.89	24	Pass
11ax (HE20) (SU)	CH229	5.99	3.97	24	Pass
11ax (HE20) (SU)	CH233	6.03	4.00	24	Pass
11ax (HE40) (SU)	CH187	9.92	9.82	24	Pass
11ax (HE40) (SU)	CH211	9.41	8.73	24	Pass
11ax (HE40) (SU)	CH227	9.35	8.61	24	Pass
11ax (HE80) (SU)	CH183	13.38	21.75	24	Pass
11ax (HE80) (SU)	CH199	12.60	18.18	24	Pass
11ax (HE80) (SU)	CH215	12.45	17.56	24	Pass
11ax (HE160) (SU)	CH207	15.64	36.65	24	Pass

A.2 Emission Bandwidth & 99% Occupied Bandwidth

Note ¹: All antenna were tested, but only the worst case has been reported in this report.

Note ²: Test plots please refer to the document “Annex No.: BL-SH2580913 Data Part 1.pdf”.

Test Data

U-NII-5 (5925 - 6425MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax (HE20) (SU)	CH1	20.91	18.91
11ax (HE20) (SU)	CH45	21.18	18.94
11ax (HE20) (SU)	CH93	21.58	18.93
11ax (HE40) (SU)	CH3	40.72	37.73
11ax (HE40) (SU)	CH43	40.82	37.75
11ax (HE40) (SU)	CH91	40.47	37.71
11ax (HE80) (SU)	CH7	82.67	77.20
11ax (HE80) (SU)	CH39	82.58	77.22
11ax (HE80) (SU)	CH87	82.88	77.22
11ax (HE160) (SU)	CH15	165.10	156.41
11ax (HE160) (SU)	CH47	165.80	156.05
11ax (HE160) (SU)	CH79	165.40	156.23

U-NII-6 (6425 - 6525MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax (HE20) (SU)	CH97	21.14	18.94
11ax (HE20) (SU)	CH105	21.20	18.93
11ax (HE20) (SU)	CH113	21.25	18.94
11ax (HE40) (SU)	CH99	40.65	37.72
11ax (HE40) (SU)	CH107	40.86	37.73
11ax (HE40) (SU)	CH115	40.84	37.73
11ax (HE80) (SU)	CH103	82.37	77.23
11ax (HE80) (SU)	CH119	82.81	77.18
11ax (HE160) (SU)	CH111	166.00	156.32

U-NII-7 (6525 - 6825MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax (HE20) (SU)	CH117	21.71	18.95
11ax (HE20) (SU)	CH153	21.12	18.92
11ax (HE20) (SU)	CH181	21.27	18.92
11ax (HE40) (SU)	CH123	40.89	37.73
11ax (HE40) (SU)	CH155	40.60	37.72
11ax (HE40) (SU)	CH179	40.50	37.70
11ax (HE80) (SU)	CH135	82.20	77.27
11ax (HE80) (SU)	CH151	82.77	77.21
11ax (HE80) (SU)	CH1167	82.28	77.24
11ax (HE160) (SU)	CH143	165.90	156.25
11ax (HE160) (SU)	CH175	165.90	156.38

U-NII-8 (6875 - 7125MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11ax (HE20) (SU)	CH185	21.15	18.92
11ax (HE20) (SU)	CH213	21.42	18.93
11ax (HE20) (SU)	CH229	21.22	18.93
11ax (HE20) (SU)	CH233	21.28	18.95
11ax (HE40) (SU)	CH187	40.76	37.70
11ax (HE40) (SU)	CH211	40.89	37.72
11ax (HE40) (SU)	CH227	40.59	37.73
11ax (HE80) (SU)	CH183	82.65	77.29
11ax (HE80) (SU)	CH199	82.65	77.26
11ax (HE80) (SU)	CH215	82.58	77.25
11ax (HE160) (SU)	CH207	165.90	156.30

A.3 Power Spectral Density (PSD)

Note 1: Test plots please refer to the document “Annex No.: BL-SH2580913-605 Data Part 2.pdf”.

Note 3: The PSD has considered the Duty Factor.

Test Data

Main Antenna

U-NII-5 (5925 - 6425MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE20) (SU)	CH1	-0.21	-1.00	Pass
11ax (HE20) (SU)	CH45	-3.00	-1.00	Pass
11ax (HE20) (SU)	CH93	-3.05	-1.00	Pass
11ax (HE40) (SU)	CH3	-1.51	-1.00	Pass
11ax (HE40) (SU)	CH43	-2.65	-1.00	Pass
11ax (HE40) (SU)	CH91	-3.14	-1.00	Pass
11ax (HE80) (SU)	CH7	-1.72	-1.00	Pass
11ax (HE80) (SU)	CH39	-3.24	-1.00	Pass
11ax (HE80) (SU)	CH87	-3.00	-1.00	Pass
11ax (HE160) (SU)	CH15	-3.69	-1.00	Pass
11ax (HE160) (SU)	CH47	-5.41	-1.00	Pass
11ax (HE160) (SU)	CH79	-6.20	-1.00	Pass

U-NII-6 (6425 - 6525MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE20) (SU)	CH97	-3.71	-1.00	Pass
11ax (HE20) (SU)	CH105	-3.72	-1.00	Pass
11ax (HE20) (SU)	CH113	-4.01	-1.00	Pass
11ax (HE40) (SU)	CH99	-3.71	-1.00	Pass
11ax (HE40) (SU)	CH107	-3.93	-1.00	Pass
11ax (HE40) (SU)	CH115	-3.96	-1.00	Pass
11ax (HE80) (SU)	CH103	-3.57	-1.00	Pass
11ax (HE80) (SU)	CH119	-3.61	-1.00	Pass
11ax (HE160) (SU)	CH111	-5.12	-1.00	Pass

U-NII-7 (6525 - 6825MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE20) (SU)	CH117	-3.70	-1.00	Pass
11ax (HE20) (SU)	CH153	-3.65	-1.00	Pass
11ax (HE20) (SU)	CH181	-3.15	-1.00	Pass
11ax (HE40) (SU)	CH123	-3.42	-1.00	Pass
11ax (HE40) (SU)	CH155	-6.00	-1.00	Pass
11ax (HE40) (SU)	CH179	-5.57	-1.00	Pass
11ax (HE80) (SU)	CH135	-6.32	-1.00	Pass
11ax (HE80) (SU)	CH151	-6.24	-1.00	Pass
11ax (HE80) (SU)	CH1167	-5.51	-1.00	Pass
11ax (HE160) (SU)	CH143	-6.90	-1.00	Pass
11ax (HE160) (SU)	CH175	-7.10	-1.00	Pass

U-NII-8 (6875 - 7125MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE20) (SU)	CH185	-6.16	-1.00	Pass
11ax (HE20) (SU)	CH213	-7.59	-1.00	Pass
11ax (HE20) (SU)	CH229	-7.46	-1.00	Pass
11ax (HE20) (SU)	CH233	-7.58	-1.00	Pass
11ax (HE40) (SU)	CH187	-6.12	-1.00	Pass
11ax (HE40) (SU)	CH211	-8.33	-1.00	Pass
11ax (HE40) (SU)	CH227	-7.93	-1.00	Pass
11ax (HE80) (SU)	CH183	-6.81	-1.00	Pass
11ax (HE80) (SU)	CH199	-7.85	-1.00	Pass
11ax (HE80) (SU)	CH215	-8.03	-1.00	Pass
11ax (HE160) (SU)	CH207	-7.29	-1.00	Pass

Aux. Antenna

U-NII-5 (5925 - 6425MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE20) (SU)	CH1	-3.95	-1.00	Pass
11ax (HE20) (SU)	CH45	-6.09	-1.00	Pass
11ax (HE20) (SU)	CH93	-6.50	-1.00	Pass
11ax (HE40) (SU)	CH3	-4.09	-1.00	Pass
11ax (HE40) (SU)	CH43	-5.93	-1.00	Pass
11ax (HE40) (SU)	CH91	-6.60	-1.00	Pass
11ax (HE80) (SU)	CH7	-3.95	-1.00	Pass
11ax (HE80) (SU)	CH39	-5.18	-1.00	Pass
11ax (HE80) (SU)	CH87	-6.77	-1.00	Pass
11ax (HE160) (SU)	CH15	-4.65	-1.00	Pass
11ax (HE160) (SU)	CH47	-5.26	-1.00	Pass
11ax (HE160) (SU)	CH79	-6.86	-1.00	Pass

U-NII-6 (6425 - 6525MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE20) (SU)	CH97	-6.39	-1.00	Pass
11ax (HE20) (SU)	CH105	-5.99	-1.00	Pass
11ax (HE20) (SU)	CH113	-5.72	-1.00	Pass
11ax (HE40) (SU)	CH99	-6.15	-1.00	Pass
11ax (HE40) (SU)	CH107	-5.79	-1.00	Pass
11ax (HE40) (SU)	CH115	-5.42	-1.00	Pass
11ax (HE80) (SU)	CH103	-5.64	-1.00	Pass
11ax (HE80) (SU)	CH119	-5.35	-1.00	Pass
11ax (HE160) (SU)	CH111	-5.38	-1.00	Pass

U-NII-7 (6525 - 6825MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE20) (SU)	CH117	-5.44	-1.00	Pass
11ax (HE20) (SU)	CH153	-5.35	-1.00	Pass
11ax (HE20) (SU)	CH181	-5.25	-1.00	Pass
11ax (HE40) (SU)	CH123	-5.25	-1.00	Pass
11ax (HE40) (SU)	CH155	-4.88	-1.00	Pass
11ax (HE40) (SU)	CH179	-5.35	-1.00	Pass
11ax (HE80) (SU)	CH135	-5.21	-1.00	Pass
11ax (HE80) (SU)	CH151	-5.02	-1.00	Pass
11ax (HE80) (SU)	CH1167	-4.81	-1.00	Pass
11ax (HE160) (SU)	CH143	-4.99	-1.00	Pass
11ax (HE160) (SU)	CH175	-4.96	-1.00	Pass

U-NII-8 (6875 - 7125MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11ax (HE20) (SU)	CH185	-5.58	-1.00	Pass
11ax (HE20) (SU)	CH213	-6.36	-1.00	Pass
11ax (HE20) (SU)	CH229	-5.82	-1.00	Pass
11ax (HE20) (SU)	CH233	-5.93	-1.00	Pass
11ax (HE40) (SU)	CH187	-5.50	-1.00	Pass
11ax (HE40) (SU)	CH211	-5.82	-1.00	Pass
11ax (HE40) (SU)	CH227	-5.46	-1.00	Pass
11ax (HE80) (SU)	CH183	-5.08	-1.00	Pass
11ax (HE80) (SU)	CH199	-5.84	-1.00	Pass
11ax (HE80) (SU)	CH215	-5.64	-1.00	Pass
11ax (HE160) (SU)	CH207	-5.80	-1.00	Pass


A.4 Conducted Emission

Note 1: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Test Data and Plots

PHASE L

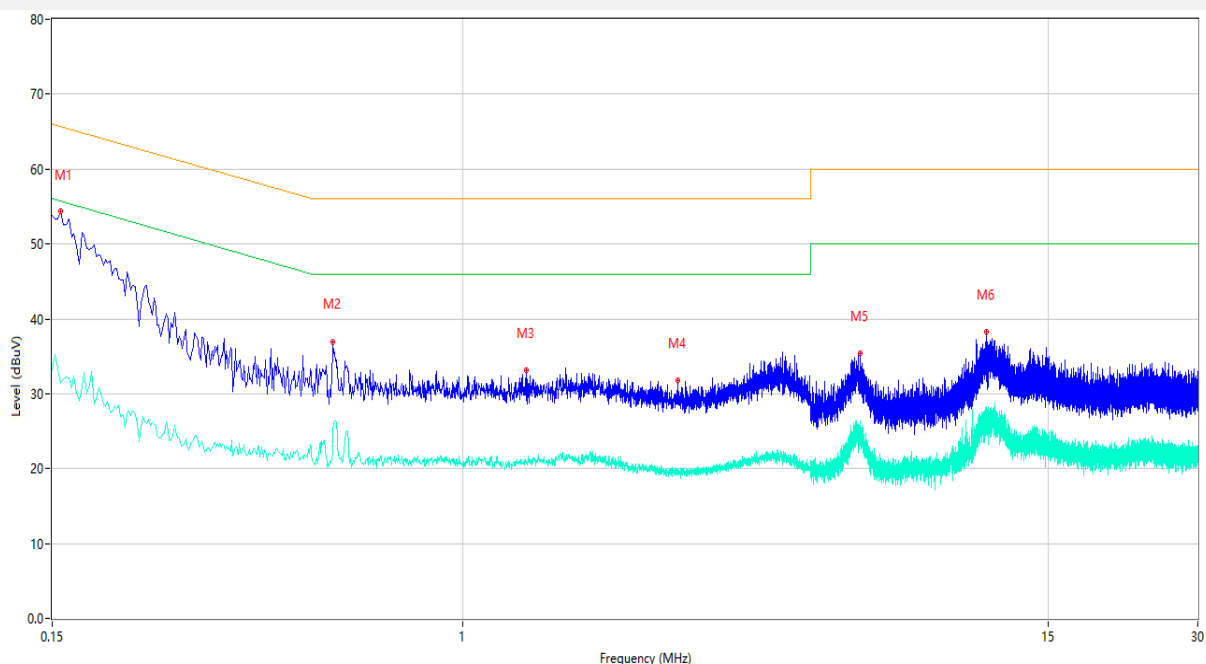

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.156	54.33	10.06	65.67	11.34	Peak	L	Pass
1**	0.156	31.49	10.06	55.67	24.18	AV	L	Pass
2	0.550	36.98	10.17	56.00	19.02	Peak	L	Pass
2**	0.550	25.27	10.17	46.00	20.73	AV	L	Pass
3	1.346	33.15	10.24	56.00	22.85	Peak	L	Pass
3**	1.346	20.79	10.24	46.00	25.21	AV	L	Pass
4	2.704	31.83	10.38	56.00	24.17	Peak	L	Pass
4**	2.704	19.55	10.38	46.00	26.45	AV	L	Pass
5	6.284	35.37	10.62	60.00	24.63	Peak	L	Pass
5**	6.284	26.30	10.62	50.00	23.70	AV	L	Pass
6	11.268	38.22	11.00	60.00	21.78	Peak	L	Pass
6**	11.268	26.72	11.00	50.00	23.28	AV	L	Pass

PHASE N

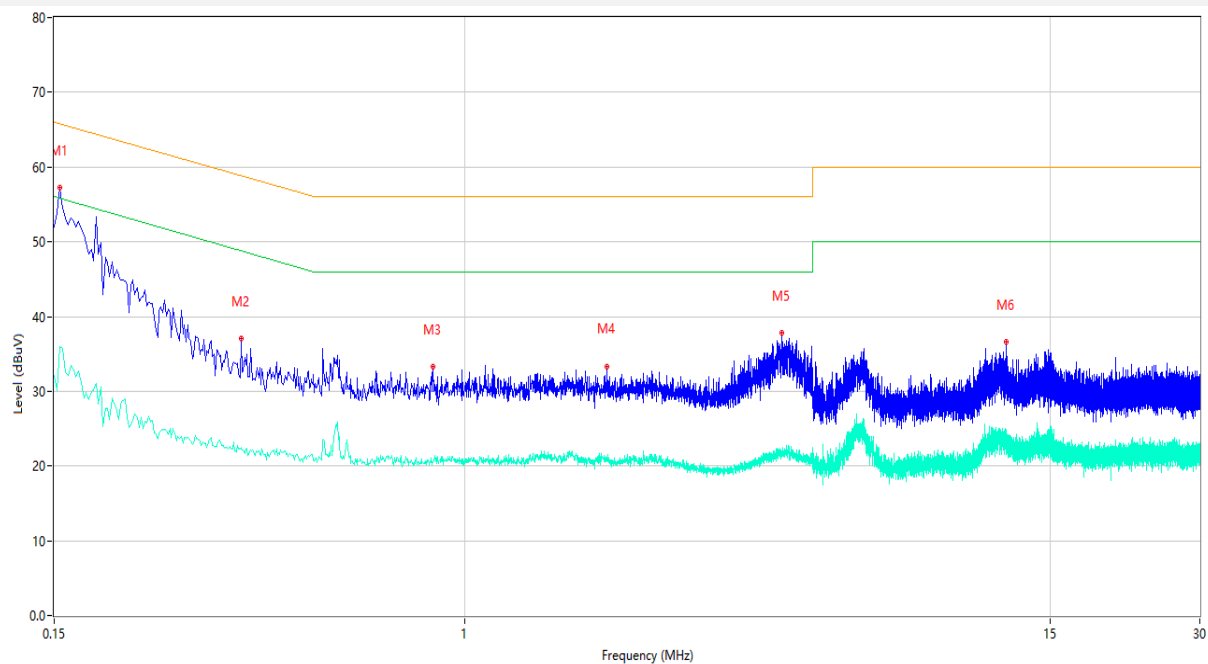

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	57.26	10.15	65.78	8.52	Peak	N	Pass
1**	0.154	36.01	10.15	55.78	19.77	AV	N	Pass
2	0.356	37.06	10.16	58.82	21.76	Peak	N	Pass
2**	0.356	22.41	10.16	48.82	26.41	AV	N	Pass
3	0.866	33.24	10.23	56.00	22.76	Peak	N	Pass
3**	0.866	20.43	10.23	46.00	25.57	AV	N	Pass
4	1.932	33.35	10.24	56.00	22.65	Peak	N	Pass
4**	1.932	20.90	10.24	46.00	25.10	AV	N	Pass
5	4.340	37.85	10.40	56.00	18.15	Peak	N	Pass
5**	4.340	22.00	10.40	46.00	24.00	AV	N	Pass
6	12.280	36.58	11.03	60.00	23.42	Peak	N	Pass
6**	12.280	24.80	11.03	50.00	25.20	AV	N	Pass

A.5 Radiated Spurious Emissions and Band Edge (Restricted-band)

A.5.1 Radiated Spurious Emissions

Note 1: The symbol of “--” in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.4, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Note ⁵: For Multiple transmitter output, the quantity $10 \log (NANT)$ dB is added to each spectrum value before comparing to the emission limit. When testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding $10 \log(NANT)$ if the measurements are made relative to the in-band emissions on the individual outputs.

Test Data


Main Antenna

30 MHz to 1 GHz, ANT H

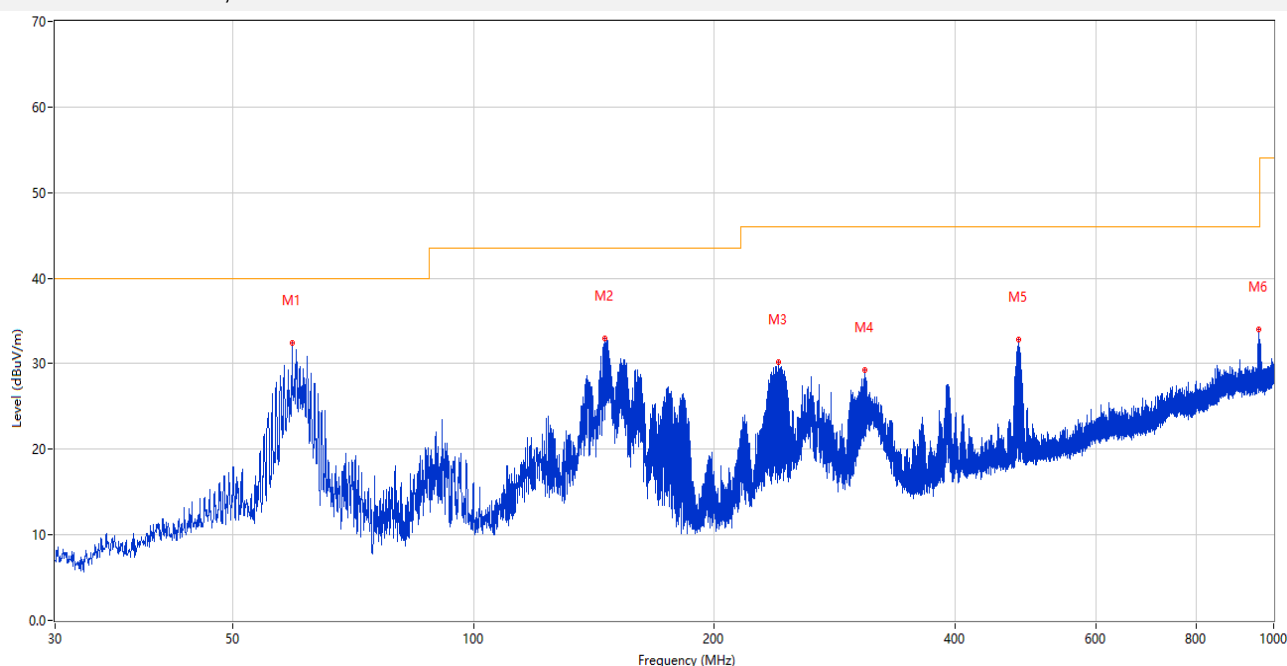

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	59.343	32.46	-25.88	40.0	7.54	Peak	222.00	200	Horizontal	Pass
2	146.109	32.91	-29.57	43.5	10.59	Peak	53.00	100	Horizontal	Pass
3	240.636	30.19	-24.43	46.0	15.81	Peak	102.00	200	Horizontal	Pass
4	308.584	29.23	-23.22	46.0	16.77	Peak	17.00	200	Horizontal	Pass
5	479.983	32.78	-18.70	46.0	13.22	Peak	306.00	200	Horizontal	Pass
6	958.630	33.99	-8.74	46.0	12.01	Peak	360.00	200	Horizontal	Pass


30 MHz to 1 GHz, ANT V

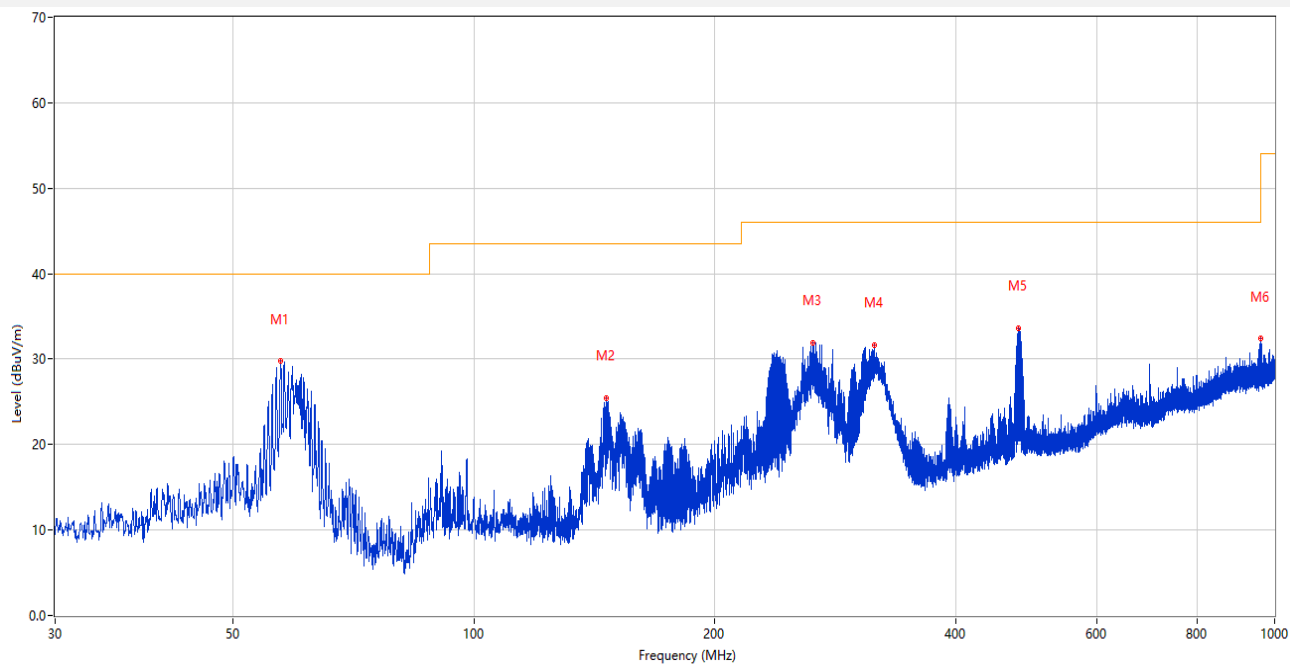

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	57.354	29.73	-25.49	40.0	10.27	Peak	106.00	100	Vertical	Pass
2	146.352	25.42	-29.57	43.5	18.08	Peak	101.00	200	Vertical	Pass
3	265.274	31.93	-24.13	46.0	14.07	Peak	346.00	100	Vertical	Pass
4	316.344	31.63	-22.91	46.0	14.37	Peak	22.00	100	Vertical	Pass
5	479.304	33.62	-18.76	46.0	12.38	Peak	22.00	200	Vertical	Pass
6	959.939	32.37	-8.72	46.0	13.63	Peak	348.00	200	Vertical	Pass


Aux. Antenna

30 MHz to 1 GHz, ANT H

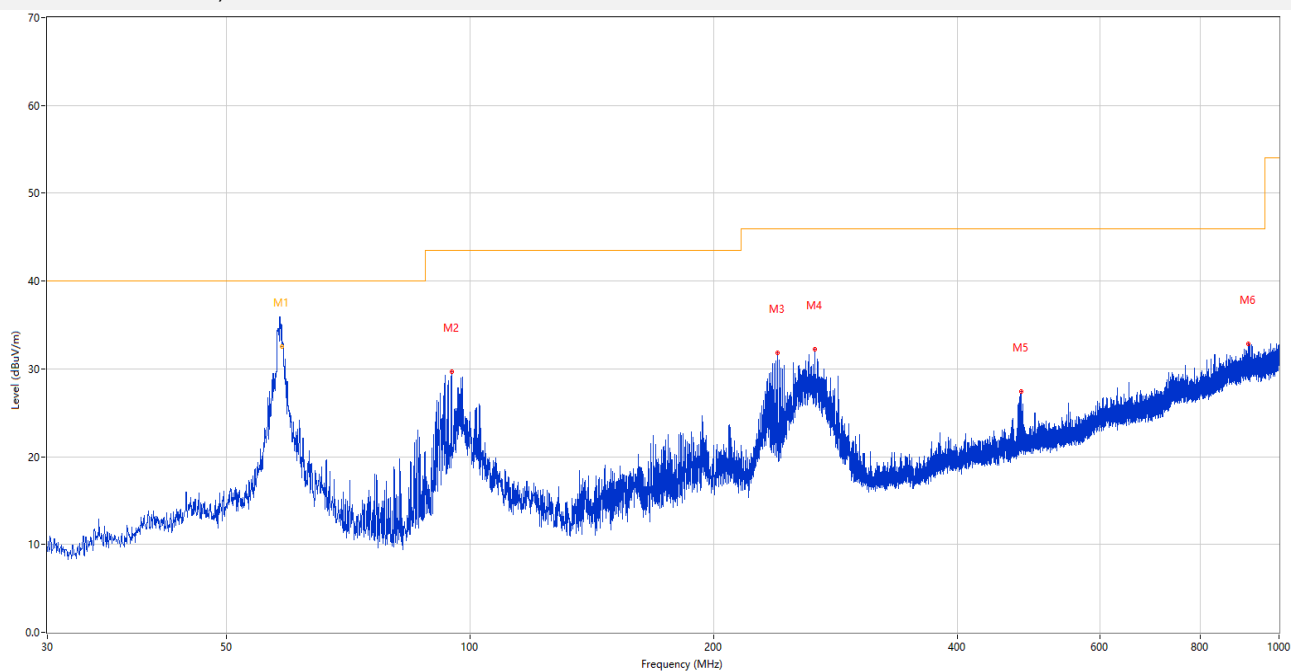

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	58.484	39.16	-25.66	40.0	0.84	Peak	154.00	178	Horizontal	N/A
1*	58.484	32.52	-25.66	40.0	7.48	QP	154.00	178	Horizontal	Pass
2	94.796	29.72	-26.79	43.5	13.78	Peak	360.00	200	Horizontal	Pass
3	240.005	31.86	-24.48	46.0	14.14	Peak	74.00	200	Horizontal	Pass
4	266.486	32.26	-24.11	46.0	13.74	Peak	360.00	200	Horizontal	Pass
5	479.983	27.45	-18.70	46.0	18.55	Peak	289.00	200	Horizontal	Pass
6	916.434	32.83	-9.20	46.0	13.17	Peak	98.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

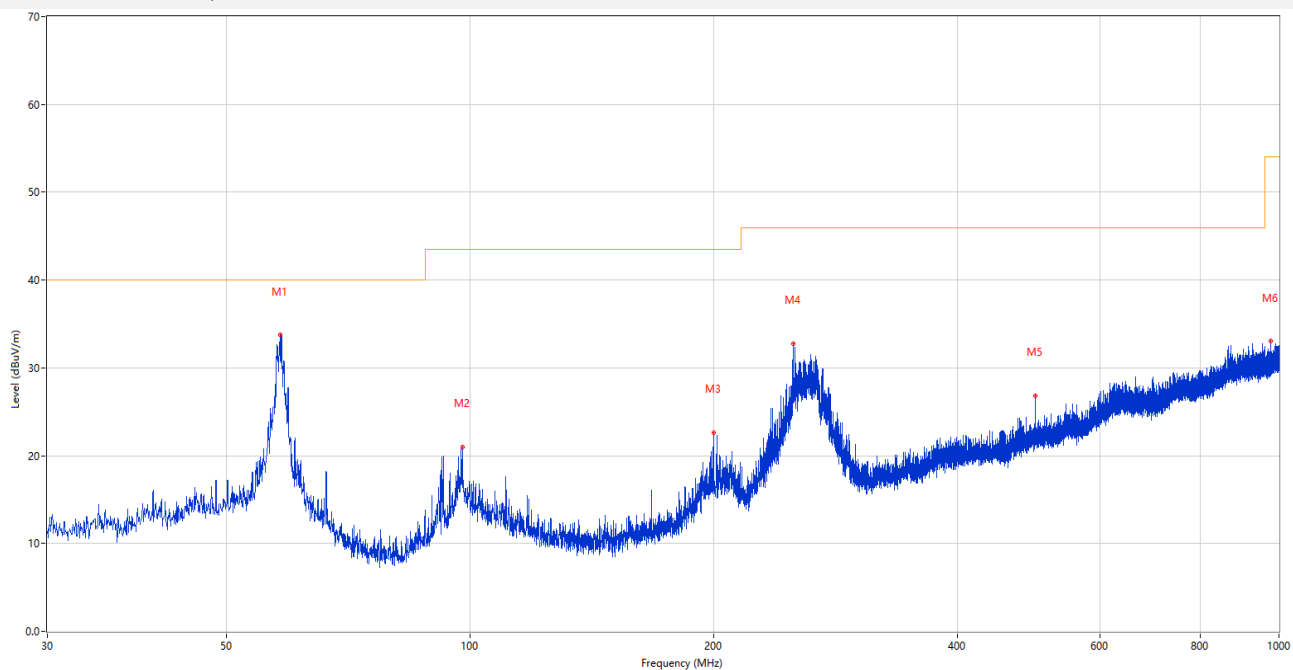


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	58.227	33.73	-25.67	40.0	6.27	Peak	230.00	200	Vertical	Pass
2	97.852	21.00	-26.26	43.5	22.50	Peak	70.00	100	Vertical	Pass
3	199.847	22.62	-25.75	43.5	20.88	Peak	270.00	100	Vertical	Pass
4	250.675	32.74	-24.05	46.0	13.26	Peak	276.00	100	Vertical	Pass
5	499.286	26.78	-18.13	46.0	19.22	Peak	246.00	100	Vertical	Pass
6	977.545	33.10	-8.52	54.0	20.90	Peak	71.00	200	Vertical	Pass

Note: The spurious above 18G is noise only, do not show on the report.

Main Antenna:

11ax20(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

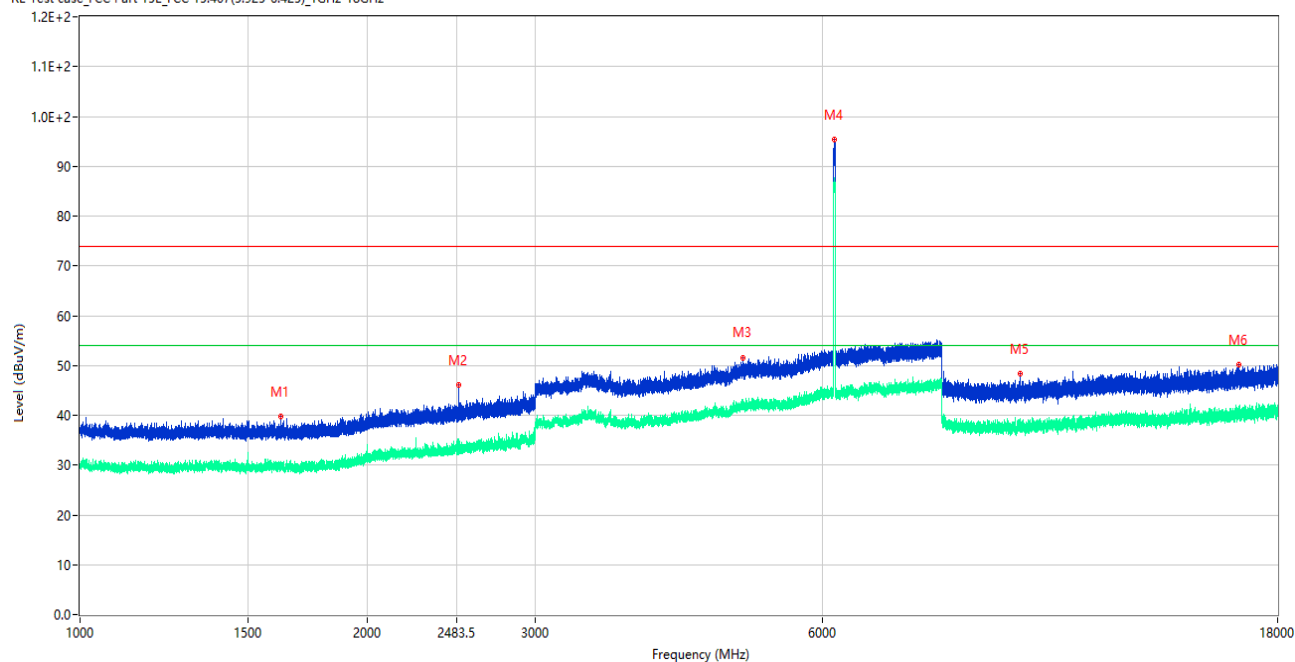

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1621.800	39.74	-16.01	74.0	34.26	Peak	64.00	150	Horizontal	Pass
1**	1621.800	29.66	-16.01	54.0	24.34	AV	64.00	150	Horizontal	Pass
2	2492.400	46.14	-11.93	74.0	27.86	Peak	359.00	150	Horizontal	Pass
2**	2492.400	33.60	-11.93	54.0	20.40	AV	359.00	150	Horizontal	Pass
3	4951.750	51.47	-1.69	74.0	22.53	Peak	360.00	150	Horizontal	Pass
3**	4951.750	42.73	-1.69	54.0	11.27	AV	360.00	150	Horizontal	Pass
4	6170.250	95.43	-0.41	74.0	-21.43	Peak	264.00	150	Horizontal	N/A
4**	6170.250	86.27	-0.41	54.0	-32.27	AV	264.00	150	Horizontal	N/A
5	9661.787	48.39	-3.14	74.0	25.61	Peak	335.00	150	Horizontal	Pass
5**	9661.787	37.78	-3.14	54.0	16.22	AV	335.00	150	Horizontal	Pass
6	16401.113	50.17	-1.66	74.0	23.83	Peak	360.00	150	Horizontal	Pass
6**	16401.113	40.11	-1.66	54.0	13.89	AV	360.00	150	Horizontal	Pass

11ax20(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

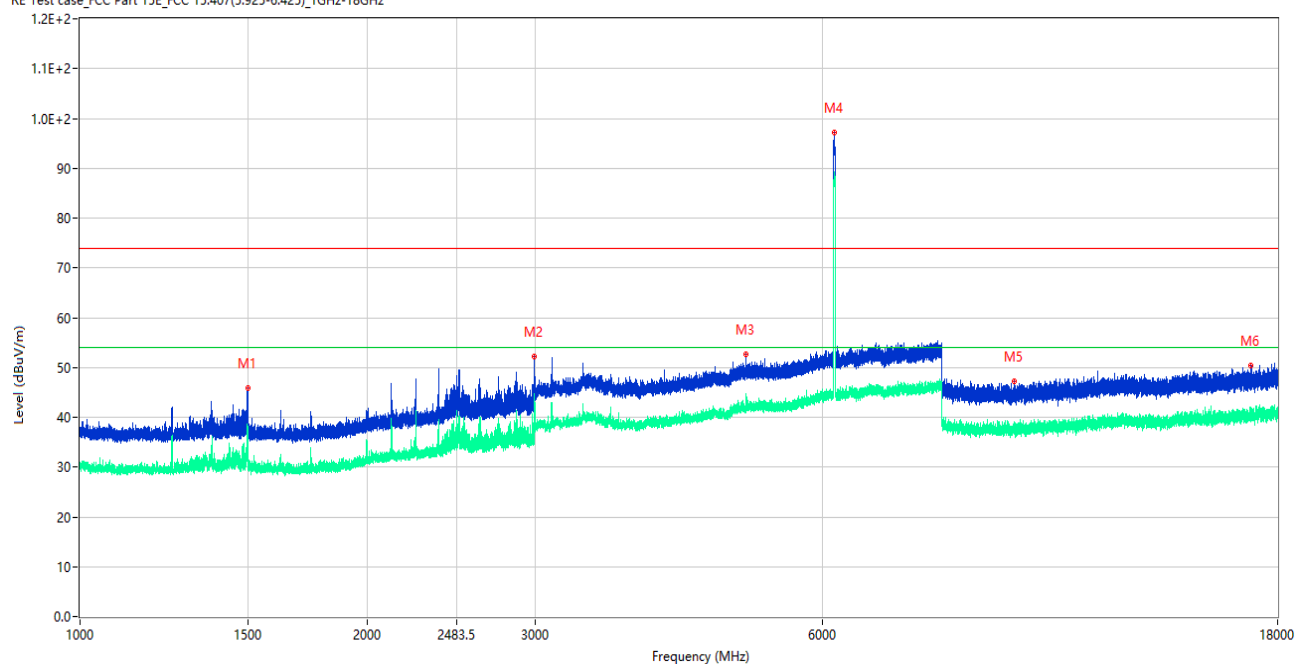

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1498.300	45.85	-16.14	74.0	28.15	Peak	129.00	150	Vertical	Pass
1**	1498.300	35.66	-16.14	54.0	18.34	AV	129.00	150	Vertical	Pass
2	2992.400	52.25	-9.04	74.0	21.75	Peak	136.00	150	Vertical	Pass
2**	2992.400	39.51	-9.04	54.0	14.49	AV	136.00	150	Vertical	Pass
3	4987.000	52.74	-2.44	74.0	21.26	Peak	96.00	150	Vertical	Pass
3**	4987.000	43.42	-2.44	54.0	10.58	AV	96.00	150	Vertical	Pass
4	6175.500	97.08	-0.53	74.0	-23.08	Peak	279.00	150	Vertical	N/A
4**	6175.500	87.08	-0.53	54.0	-33.08	AV	279.00	150	Vertical	N/A
5	9543.513	47.17	-2.77	74.0	26.83	Peak	193.00	150	Vertical	Pass
5**	9543.513	38.02	-2.77	54.0	15.98	AV	193.00	150	Vertical	Pass
6	16861.275	50.41	-0.95	74.0	23.59	Peak	360.00	150	Vertical	Pass
6**	16861.275	40.66	-0.95	54.0	13.34	AV	360.00	150	Vertical	Pass

11ax40(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

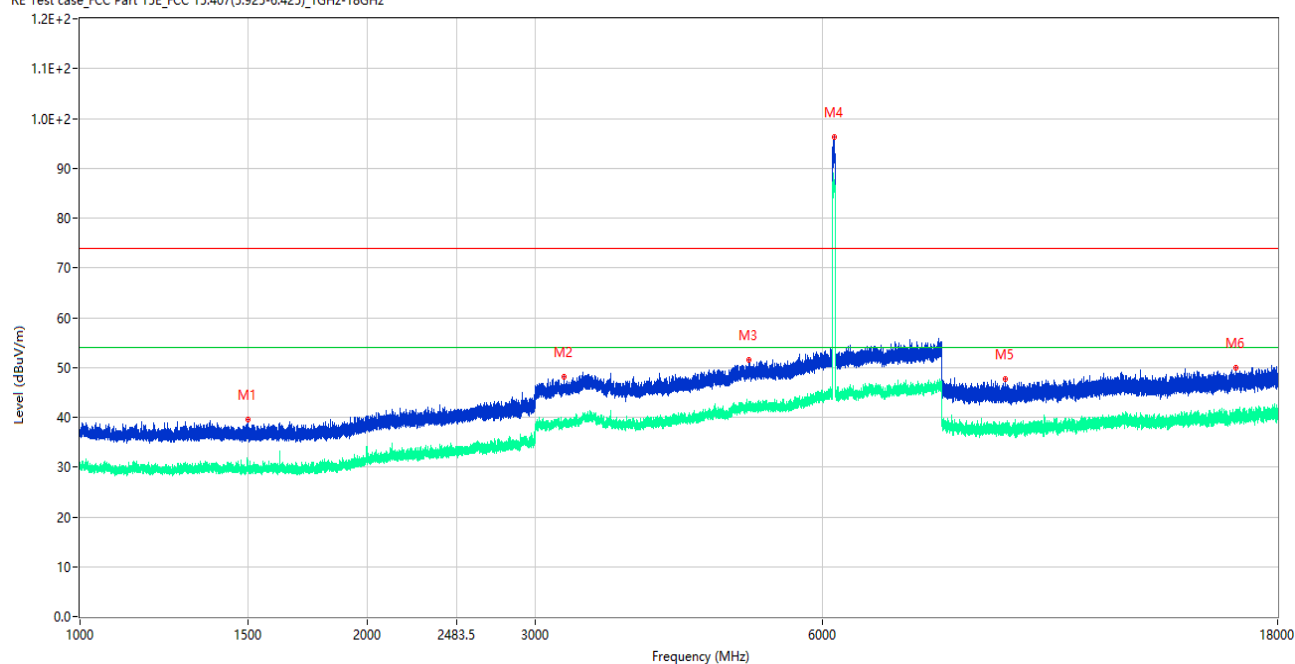

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1498.100	39.62	-16.14	74.0	34.38	Peak	228.00	150	Horizontal	Pass
1**	1498.100	30.50	-16.14	54.0	23.50	AV	228.00	150	Horizontal	Pass
2	3219.000	48.04	-6.41	74.0	25.96	Peak	360.00	150	Horizontal	Pass
2**	3219.000	38.92	-6.41	54.0	15.08	AV	360.00	150	Horizontal	Pass
3	5027.250	51.59	-2.11	74.0	22.41	Peak	246.00	150	Horizontal	Pass
3**	5027.250	41.73	-2.11	54.0	12.27	AV	246.00	150	Horizontal	Pass
4	6169.500	96.16	-0.39	74.0	-22.16	Peak	265.00	150	Horizontal	N/A
4**	6169.500	86.86	-0.39	54.0	-32.86	AV	265.00	150	Horizontal	N/A
5	9334.275	47.63	-5.05	74.0	26.37	Peak	120.00	150	Horizontal	Pass
5**	9334.275	37.57	-5.05	54.0	16.43	AV	120.00	150	Horizontal	Pass
6	16274.850	49.85	-1.81	74.0	24.15	Peak	360.00	150	Horizontal	Pass
6**	16274.850	39.71	-1.81	54.0	14.29	AV	360.00	150	Horizontal	Pass

11ax40(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

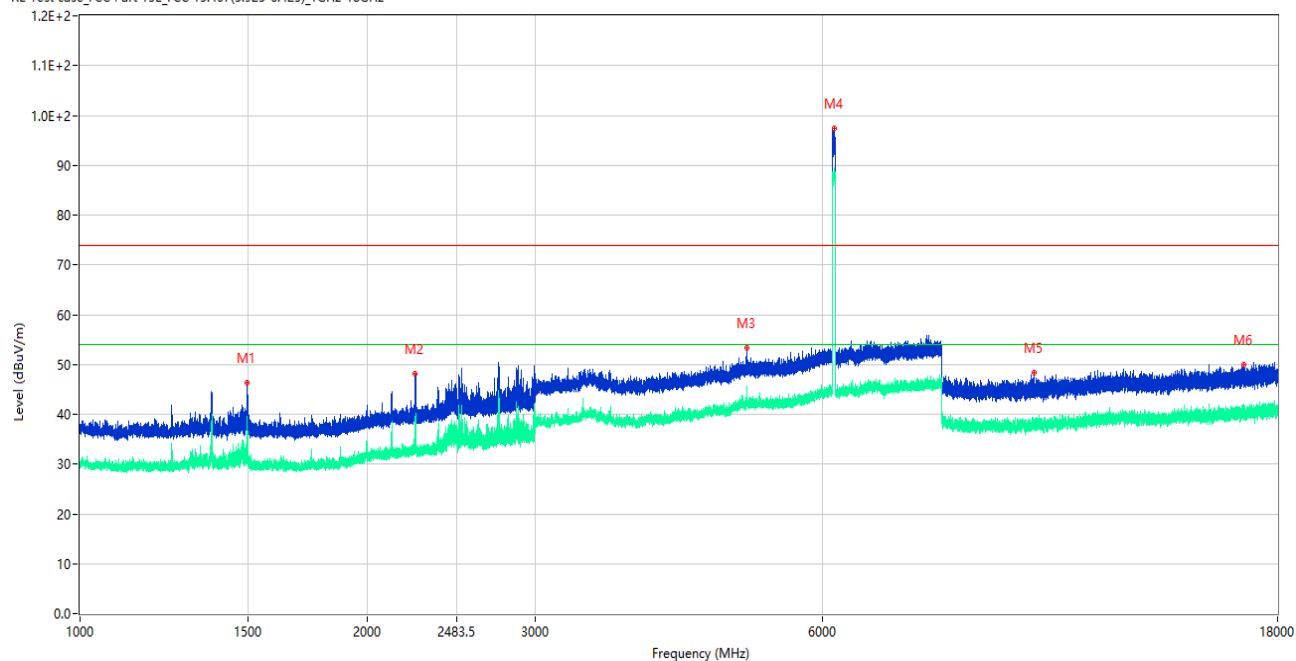

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1497.400	46.27	-16.14	74.0	27.73	Peak	85.00	150	Vertical	Pass
1**	1497.400	38.46	-16.14	54.0	15.54	AV	85.00	150	Vertical	Pass
2	2244.600	48.07	-12.88	74.0	25.93	Peak	63.00	150	Vertical	Pass
2**	2244.600	38.03	-12.88	54.0	15.97	AV	63.00	150	Vertical	Pass
3	4999.500	53.26	-2.21	74.0	20.74	Peak	108.00	150	Vertical	Pass
3**	4999.500	42.72	-2.21	54.0	11.28	AV	108.00	150	Vertical	Pass
4	6173.000	97.29	-0.45	74.0	-23.29	Peak	277.00	150	Vertical	N/A
4**	6173.000	88.10	-0.45	54.0	-34.10	AV	277.00	150	Vertical	N/A
5	10006.638	48.26	-4.24	74.0	25.74	Peak	0.00	150	Vertical	Pass
5**	10006.638	37.37	-4.24	54.0	16.63	AV	0.00	150	Vertical	Pass
6	16575.412	49.89	-0.71	74.0	24.11	Peak	175.00	150	Vertical	Pass
6**	16575.412	40.37	-0.71	54.0	13.63	AV	175.00	150	Vertical	Pass

11ax80(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

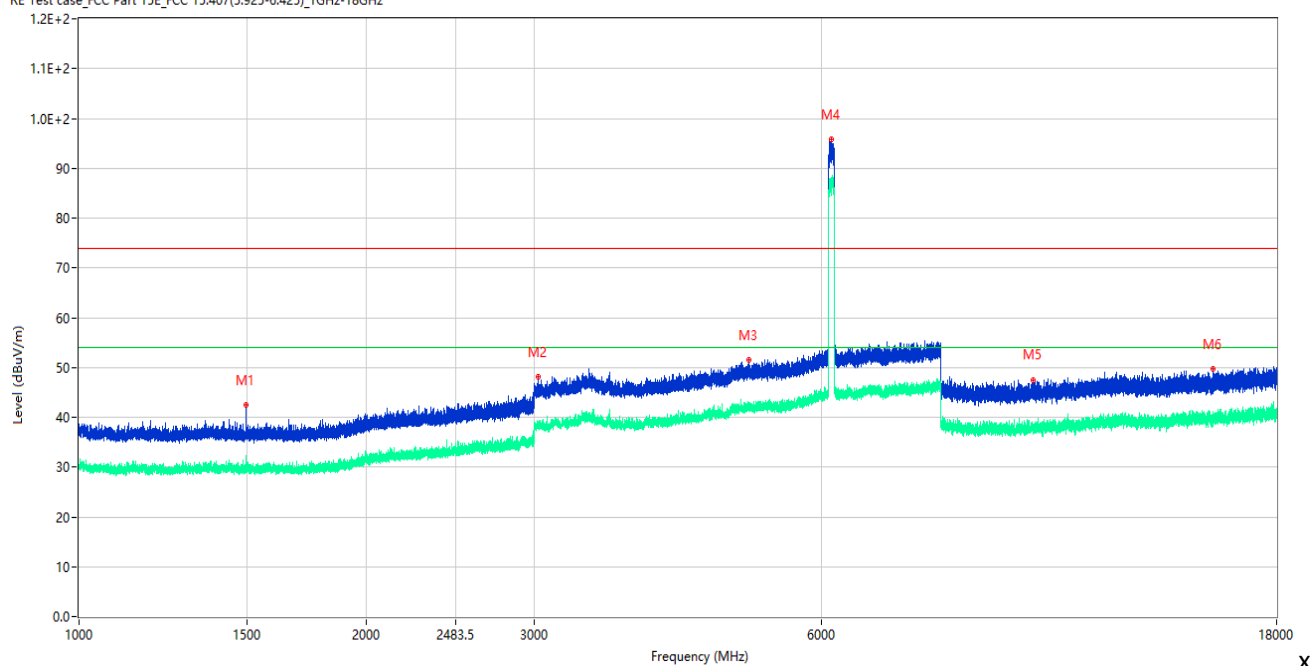

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1495.600	42.56	-16.17	74.0	31.44	Peak	228.00	150	Horizontal	Pass
1**	1495.600	29.94	-16.17	54.0	24.06	AV	228.00	150	Horizontal	Pass
2	3030.750	48.17	-7.78	74.0	25.83	Peak	1.00	150	Horizontal	Pass
2**	3030.750	38.82	-7.78	54.0	15.18	AV	1.00	150	Horizontal	Pass
3	5039.000	51.59	-2.39	74.0	22.41	Peak	360.00	150	Horizontal	Pass
3**	5039.000	42.21	-2.39	54.0	11.79	AV	360.00	150	Horizontal	Pass
4	6151.500	95.88	-0.18	74.0	-21.88	Peak	262.00	150	Horizontal	N/A
4**	6151.500	87.48	-0.18	54.0	-33.48	AV	262.00	150	Horizontal	N/A
5	9995.475	47.55	-3.92	74.0	26.45	Peak	27.00	150	Horizontal	Pass
5**	9995.475	38.57	-3.92	54.0	15.43	AV	27.00	150	Horizontal	Pass
6	15446.400	49.71	-1.74	74.0	24.29	Peak	107.00	150	Horizontal	Pass
6**	15446.400	40.55	-1.74	54.0	13.45	AV	107.00	150	Horizontal	Pass

11ax80(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

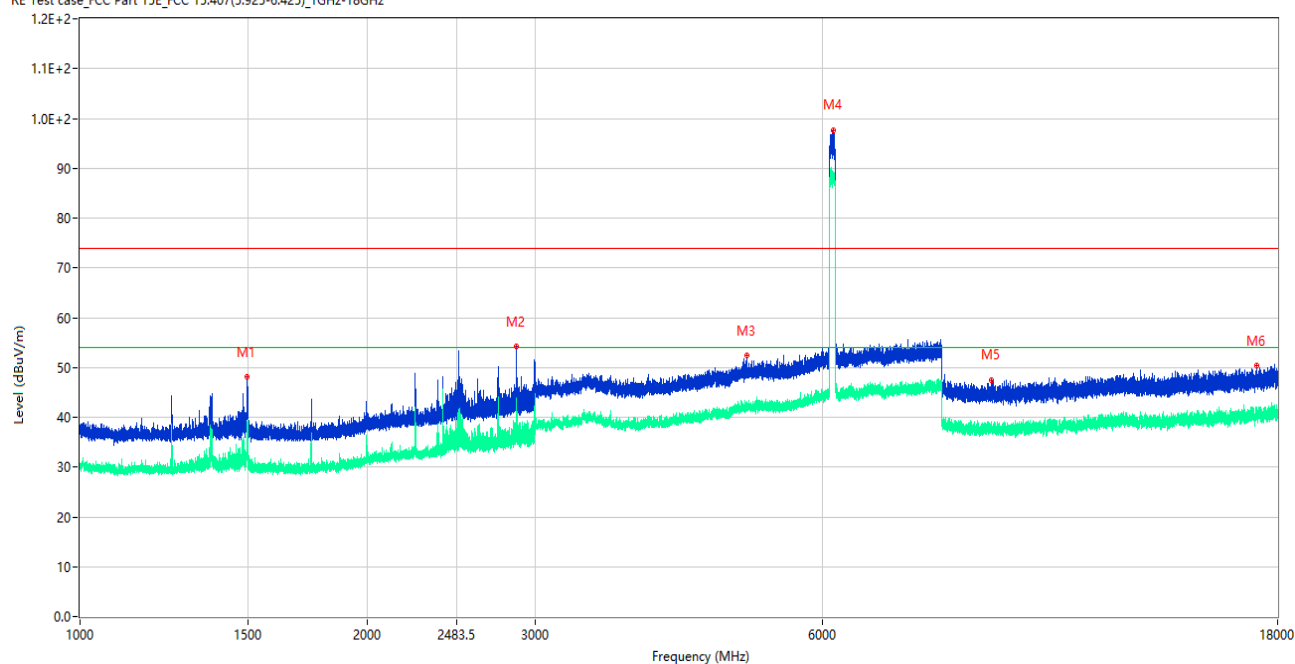

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1496.100	48.05	-16.17	74.0	25.95	Peak	126.00	150	Vertical	Pass
1**	1496.100	34.92	-16.17	54.0	19.08	AV	126.00	150	Vertical	Pass
2	2868.500	54.31	-9.69	74.0	19.69	Peak	112.00	150	Vertical	Pass
2**	2868.500	39.92	-9.69	54.0	14.08	AV	112.00	150	Vertical	Pass
3	4997.000	52.37	-2.24	74.0	21.63	Peak	62.00	150	Vertical	Pass
3**	4997.000	42.67	-2.24	54.0	11.33	AV	62.00	150	Vertical	Pass
4	6157.750	97.72	-0.21	74.0	-23.72	Peak	280.00	150	Vertical	N/A
4**	6157.750	88.03	-0.21	54.0	-34.03	AV	280.00	150	Vertical	N/A
5	9010.800	47.57	-4.54	74.0	26.43	Peak	241.00	150	Vertical	Pass
5**	9010.800	37.81	-4.54	54.0	16.19	AV	241.00	150	Vertical	Pass
6	17121.412	50.31	-0.14	74.0	23.69	Peak	346.00	150	Vertical	Pass
6**	17121.412	40.08	-0.14	54.0	13.92	AV	346.00	150	Vertical	Pass

11ax160(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

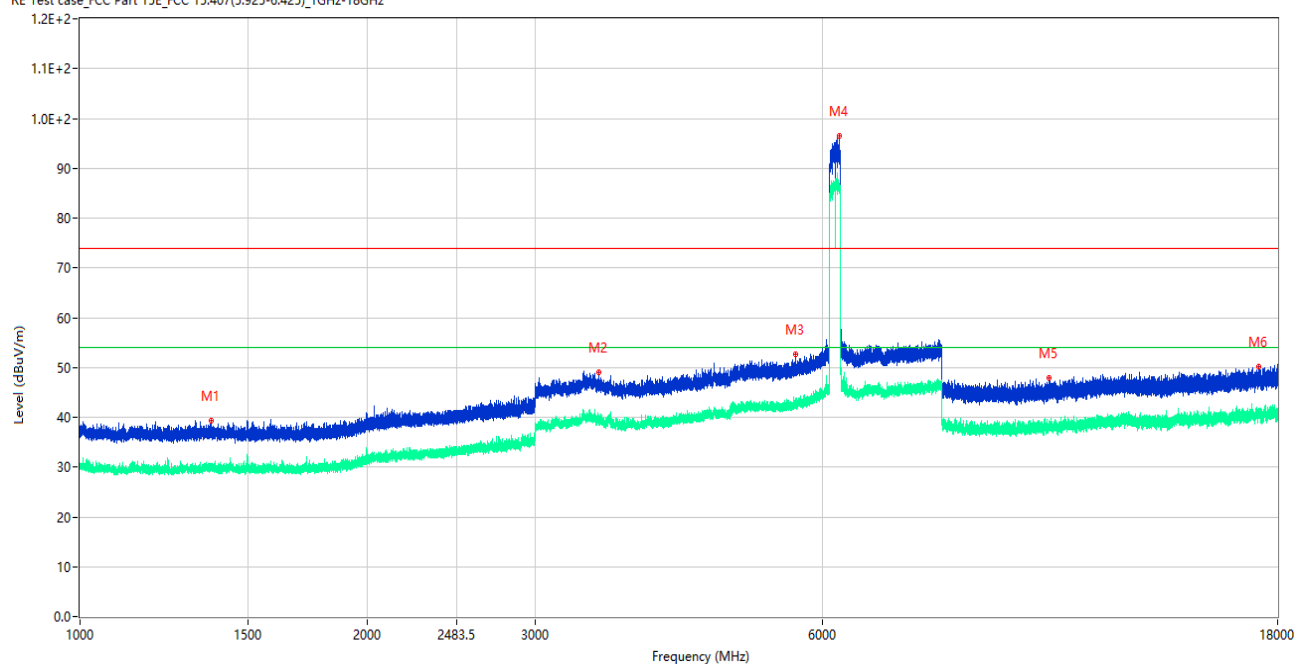

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.400	39.29	-15.95	74.0	34.71	Peak	359.00	150	Horizontal	Pass
1**	1371.400	29.47	-15.95	54.0	24.53	AV	359.00	150	Horizontal	Pass
2	3497.000	48.99	-5.86	74.0	25.01	Peak	347.00	150	Horizontal	Pass
2**	3497.000	39.26	-5.86	54.0	14.74	AV	347.00	150	Horizontal	Pass
3	5624.500	52.62	-2.38	74.0	21.38	Peak	1.00	150	Horizontal	Pass
3**	5624.500	42.95	-2.38	54.0	11.05	AV	1.00	150	Horizontal	Pass
4	6243.250	96.57	-0.94	74.0	-22.57	Peak	163.00	150	Horizontal	N/A
4**	6243.250	85.93	-0.94	54.0	-31.93	AV	163.00	150	Horizontal	N/A
5	10376.901	47.97	-3.42	74.0	26.03	Peak	360.00	150	Horizontal	Pass
5**	10376.901	37.97	-3.42	54.0	16.03	AV	360.00	150	Horizontal	Pass
6	17214.599	50.22	-0.65	74.0	23.78	Peak	211.00	150	Horizontal	Pass
6**	17214.599	40.37	-0.65	54.0	13.63	AV	211.00	150	Horizontal	Pass

11ax160(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

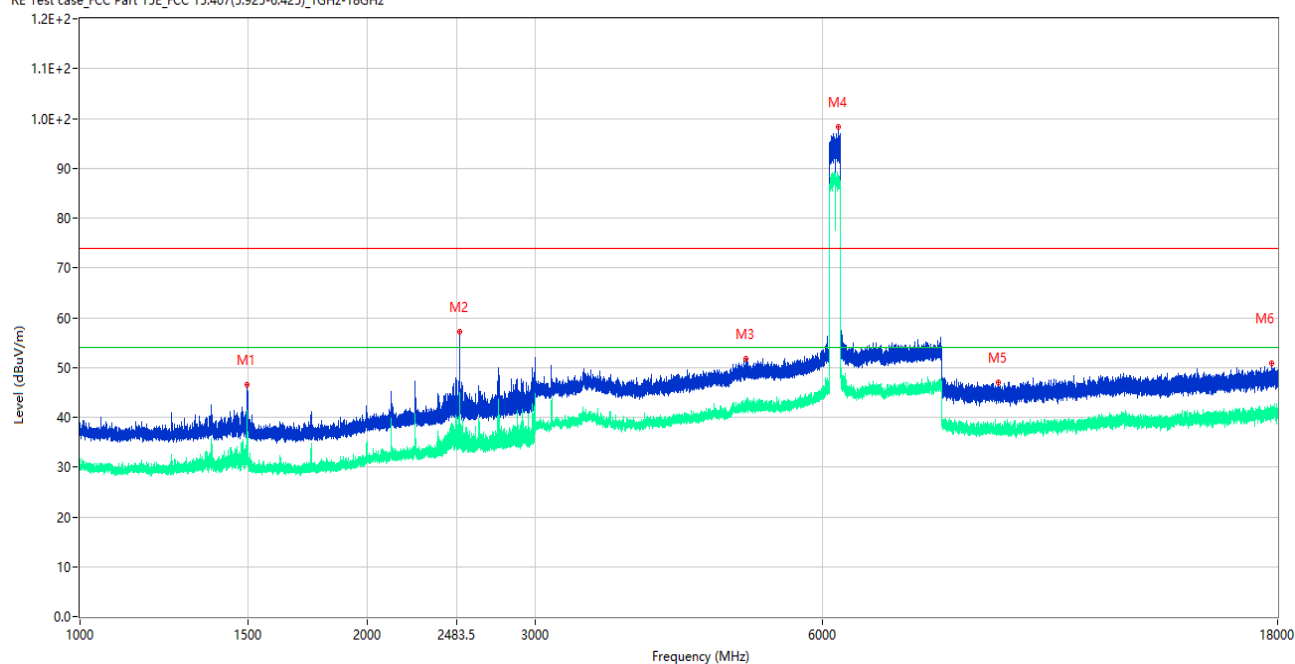

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1496.400	46.52	-16.17	74.0	27.48	Peak	125.00	150	Vertical	Pass
1**	1496.400	41.32	-16.17	54.0	12.68	AV	125.00	150	Vertical	Pass
2	2499.400	57.14	-12.02	74.0	16.86	Peak	118.00	150	Vertical	Pass
2**	2499.400	34.93	-12.02	54.0	19.07	AV	118.00	150	Vertical	Pass
3	4994.250	51.80	-2.25	74.0	22.20	Peak	279.00	150	Vertical	Pass
3**	4994.250	43.28	-2.25	54.0	10.72	AV	279.00	150	Vertical	Pass
4	6227.500	98.25	-1.03	74.0	-24.25	Peak	279.00	150	Vertical	N/A
4**	6227.500	86.99	-1.03	54.0	-32.99	AV	279.00	150	Vertical	N/A
5	9182.513	46.89	-5.33	74.0	27.11	Peak	312.00	150	Vertical	Pass
5**	9182.513	38.13	-5.33	54.0	15.87	AV	312.00	150	Vertical	Pass
6	17750.624	50.82	0.74	74.0	23.18	Peak	279.00	150	Vertical	Pass
6**	17750.624	40.97	0.74	54.0	13.03	AV	279.00	150	Vertical	Pass

11ax20(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

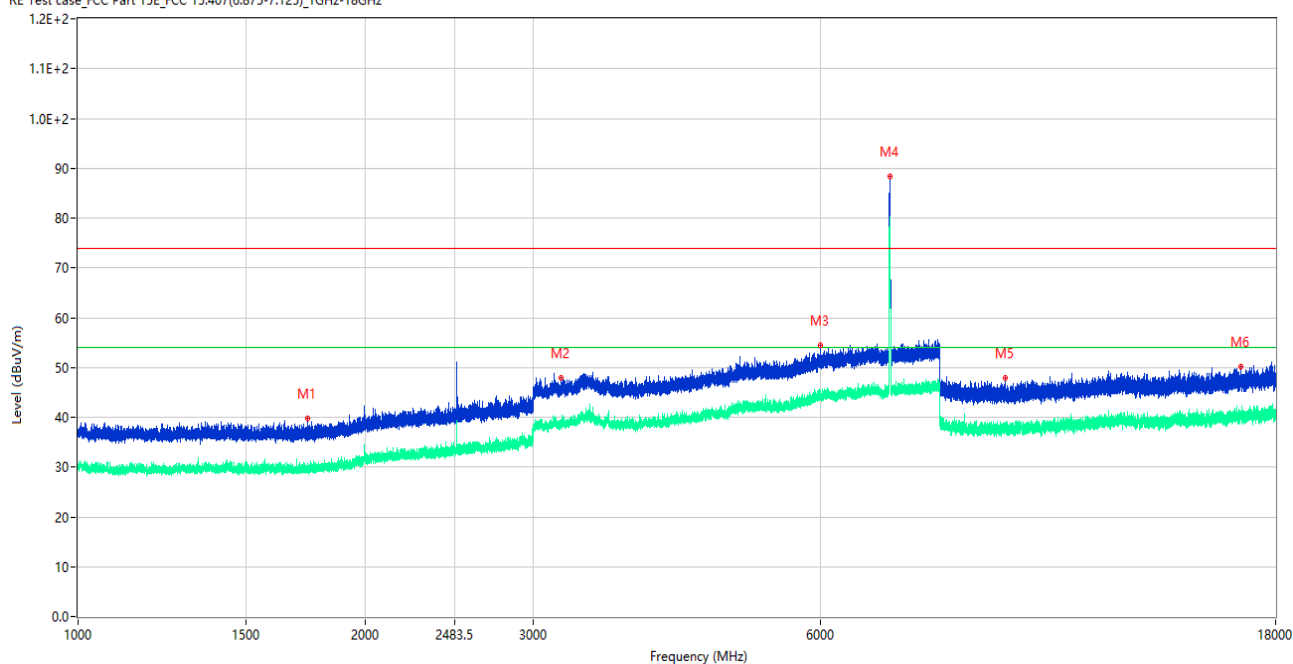

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1740.600	39.67	-16.22	74.0	34.33	Peak	2.00	150	Horizontal	Pass
1**	1740.600	29.92	-16.22	54.0	24.08	AV	2.00	150	Horizontal	Pass
2	3211.000	47.86	-6.83	74.0	26.14	Peak	360.00	150	Horizontal	Pass
2**	3211.000	38.16	-6.83	54.0	15.84	AV	360.00	150	Horizontal	Pass
3	5995.750	54.40	-0.08	74.0	19.60	Peak	312.00	150	Horizontal	Pass
3**	5995.750	44.79	-0.08	54.0	9.21	AV	312.00	150	Horizontal	Pass
4	7096.750	88.33	-0.21	74.0	-14.33	Peak	245.00	150	Horizontal	N/A
4**	7096.750	78.10	-0.21	54.0	-24.10	AV	245.00	150	Horizontal	N/A
5	9377.738	47.80	-4.67	74.0	26.20	Peak	359.00	150	Horizontal	Pass
5**	9377.738	37.60	-4.67	54.0	16.40	AV	359.00	150	Horizontal	Pass
6	16556.511	50.15	-0.88	74.0	23.85	Peak	243.00	150	Horizontal	Pass
6**	16556.511	40.41	-0.88	54.0	13.59	AV	243.00	150	Horizontal	Pass

11ax20(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

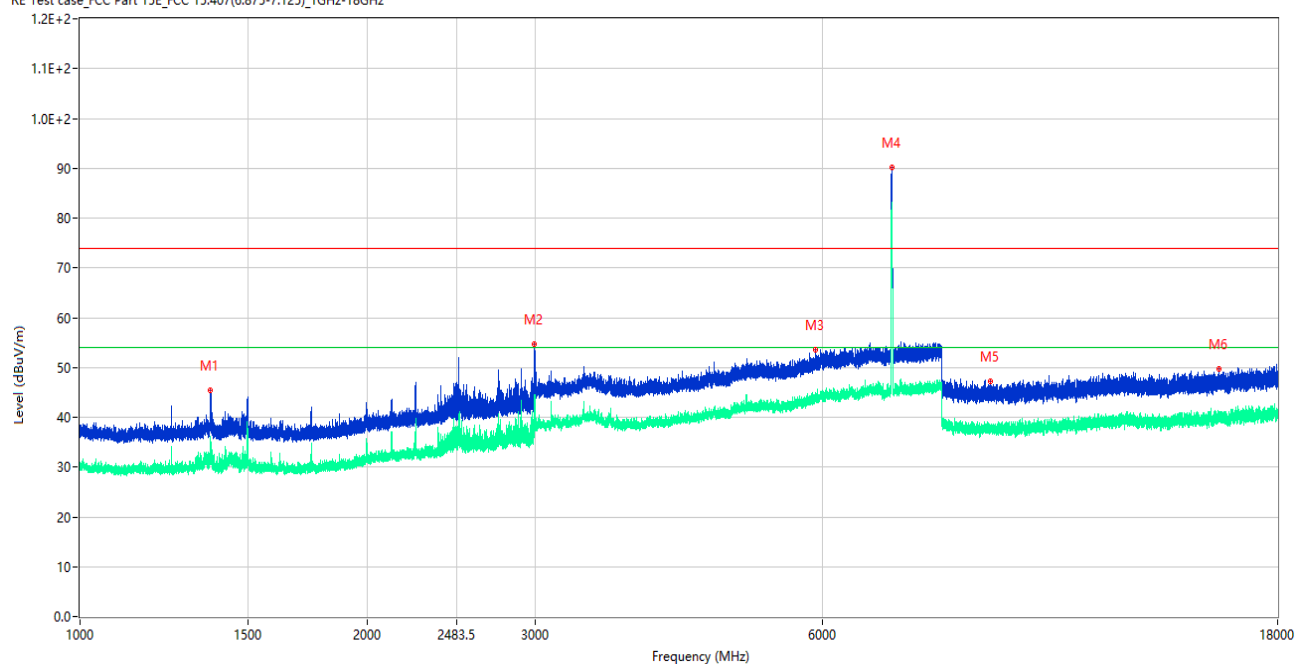

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1370.400	45.41	-15.92	74.0	28.59	Peak	104.00	150	Vertical	Pass
1**	1370.400	31.38	-15.92	54.0	22.62	AV	104.00	150	Vertical	Pass
2	2994.400	54.68	-8.92	74.0	19.32	Peak	125.00	150	Vertical	Pass
2**	2994.400	40.56	-8.92	54.0	13.44	AV	125.00	150	Vertical	Pass
3	5902.750	53.57	-0.22	74.0	20.43	Peak	27.00	150	Vertical	Pass
3**	5902.750	44.10	-0.22	54.0	9.90	AV	27.00	150	Vertical	Pass
4	7094.000	90.13	-0.13	74.0	-16.13	Peak	212.00	150	Vertical	N/A
4**	7094.000	81.21	-0.13	54.0	-27.21	AV	212.00	150	Vertical	N/A
5	9005.575	47.18	-4.59	74.0	26.82	Peak	190.00	150	Vertical	Pass
5**	9005.575	37.39	-4.59	54.0	16.61	AV	190.00	150	Vertical	Pass
6	15639.599	49.67	-1.81	74.0	24.33	Peak	178.00	150	Vertical	Pass
6**	15639.599	40.27	-1.81	54.0	13.73	AV	178.00	150	Vertical	Pass

11ax40(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

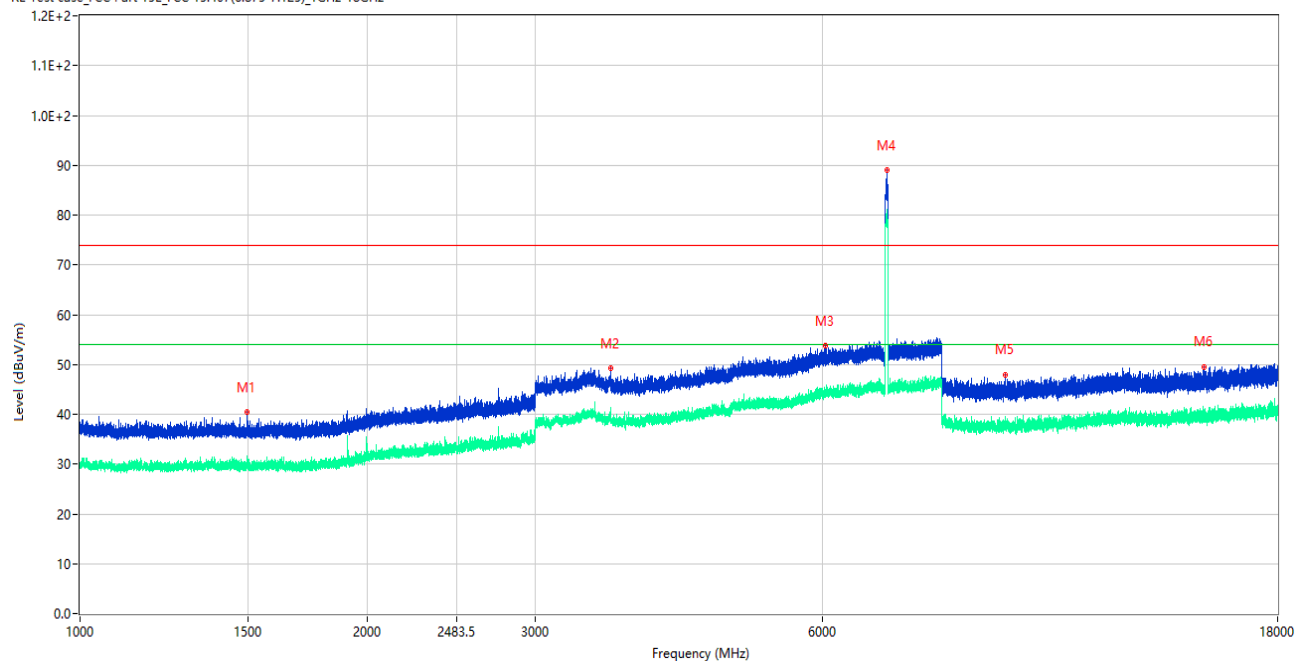

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1495.900	40.37	-16.17	74.0	33.63	Peak	233.00	150	Horizontal	Pass
1**	1495.900	31.18	-16.17	54.0	22.82	AV	233.00	150	Horizontal	Pass
2	3596.250	49.18	-5.12	74.0	24.82	Peak	297.00	150	Horizontal	Pass
2**	3596.250	40.55	-5.12	54.0	13.45	AV	297.00	150	Horizontal	Pass
3	6042.750	53.69	-0.56	74.0	20.31	Peak	264.00	150	Horizontal	Pass
3**	6042.750	43.87	-0.56	54.0	10.13	AV	264.00	150	Horizontal	Pass
4	7010.250	88.95	0.58	74.0	-14.95	Peak	247.00	150	Horizontal	N/A
4**	7010.250	78.47	0.58	54.0	-24.47	AV	247.00	150	Horizontal	N/A
5	9330.237	48.02	-5.00	74.0	25.98	Peak	358.00	150	Horizontal	Pass
5**	9330.237	37.77	-5.00	54.0	16.23	AV	358.00	150	Horizontal	Pass
6	15085.725	49.59	-1.82	74.0	24.41	Peak	71.00	150	Horizontal	Pass
6**	15085.725	39.70	-1.82	54.0	14.30	AV	71.00	150	Horizontal	Pass

11ax40(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

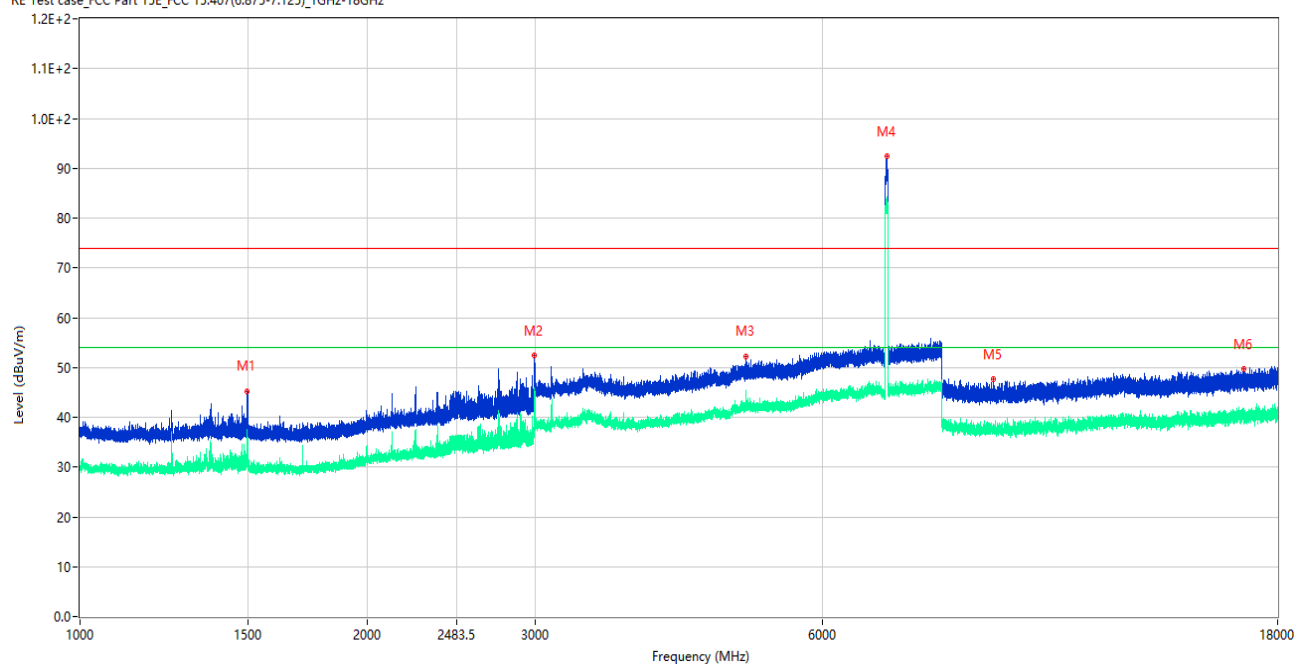

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1495.700	45.31	-16.17	74.0	28.69	Peak	138.00	150	Vertical	Pass
1**	1495.700	32.22	-16.17	54.0	21.78	AV	138.00	150	Vertical	Pass
2	2991.700	52.33	-9.08	74.0	21.67	Peak	119.00	150	Vertical	Pass
2**	2991.700	40.79	-9.08	54.0	13.21	AV	119.00	150	Vertical	Pass
3	4987.750	52.31	-2.41	74.0	21.69	Peak	95.00	150	Vertical	Pass
3**	4987.750	42.60	-2.41	54.0	11.40	AV	95.00	150	Vertical	Pass
4	7011.000	92.49	0.57	74.0	-18.49	Peak	313.00	150	Vertical	N/A
4**	7011.000	82.76	0.57	54.0	-28.76	AV	313.00	150	Vertical	N/A
5	9065.900	47.65	-4.59	74.0	26.35	Peak	0.00	150	Vertical	Pass
5**	9065.900	37.82	-4.59	54.0	16.18	AV	0.00	150	Vertical	Pass
6	16580.925	49.61	-0.98	74.0	24.39	Peak	312.00	150	Vertical	Pass
6**	16580.925	40.13	-0.98	54.0	13.87	AV	312.00	150	Vertical	Pass

11ax80(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

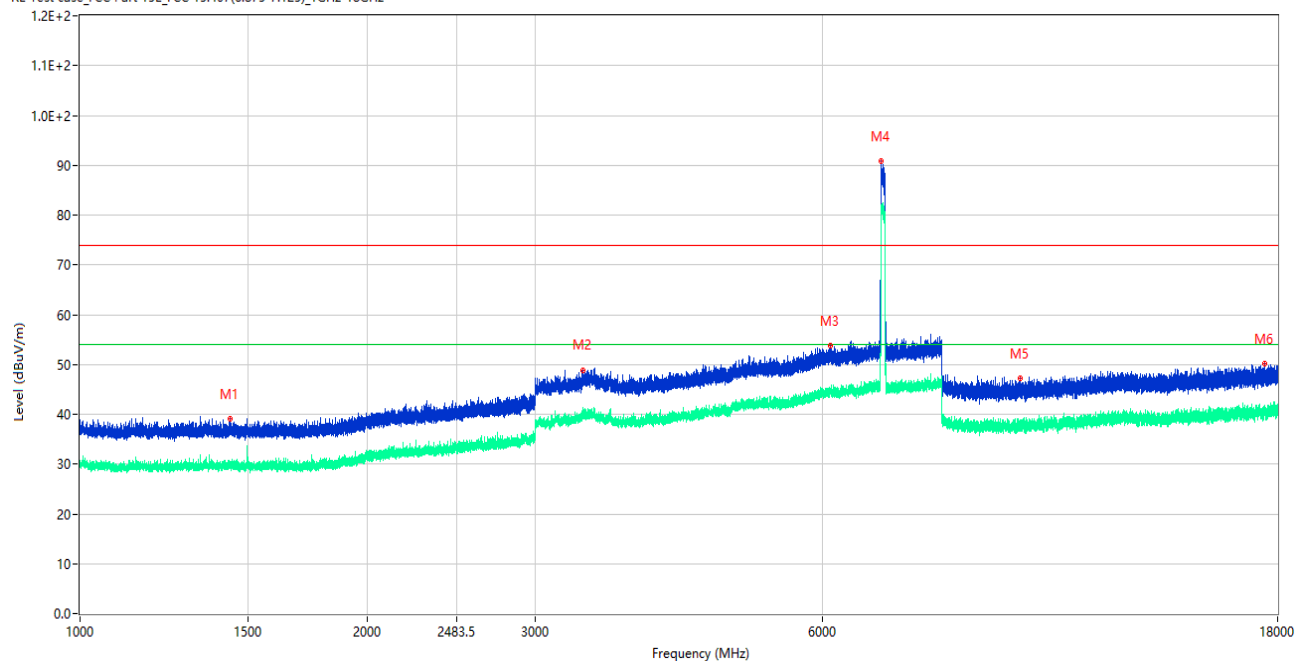

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1437.800	39.12	-15.98	74.0	34.88	Peak	0.00	150	Horizontal	Pass
1**	1437.800	30.37	-15.98	54.0	23.63	AV	0.00	150	Horizontal	Pass
2	3368.500	48.90	-4.93	74.0	25.10	Peak	329.00	150	Horizontal	Pass
2**	3368.500	39.19	-4.93	54.0	14.81	AV	329.00	150	Horizontal	Pass
3	6118.750	53.83	-0.07	74.0	20.17	Peak	262.00	150	Horizontal	Pass
3**	6118.750	44.83	-0.07	54.0	9.17	AV	262.00	150	Horizontal	Pass
4	6911.000	90.84	0.13	74.0	-16.84	Peak	246.00	150	Horizontal	N/A
4**	6911.000	80.79	0.13	54.0	-26.79	AV	246.00	150	Horizontal	N/A
5	9670.100	47.12	-3.50	74.0	26.88	Peak	360.00	150	Horizontal	Pass
5**	9670.100	37.94	-3.50	54.0	16.06	AV	360.00	150	Horizontal	Pass
6	17450.588	50.18	0.33	74.0	23.82	Peak	360.00	150	Horizontal	Pass
6**	17450.588	40.91	0.33	54.0	13.09	AV	360.00	150	Horizontal	Pass

11ax80(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

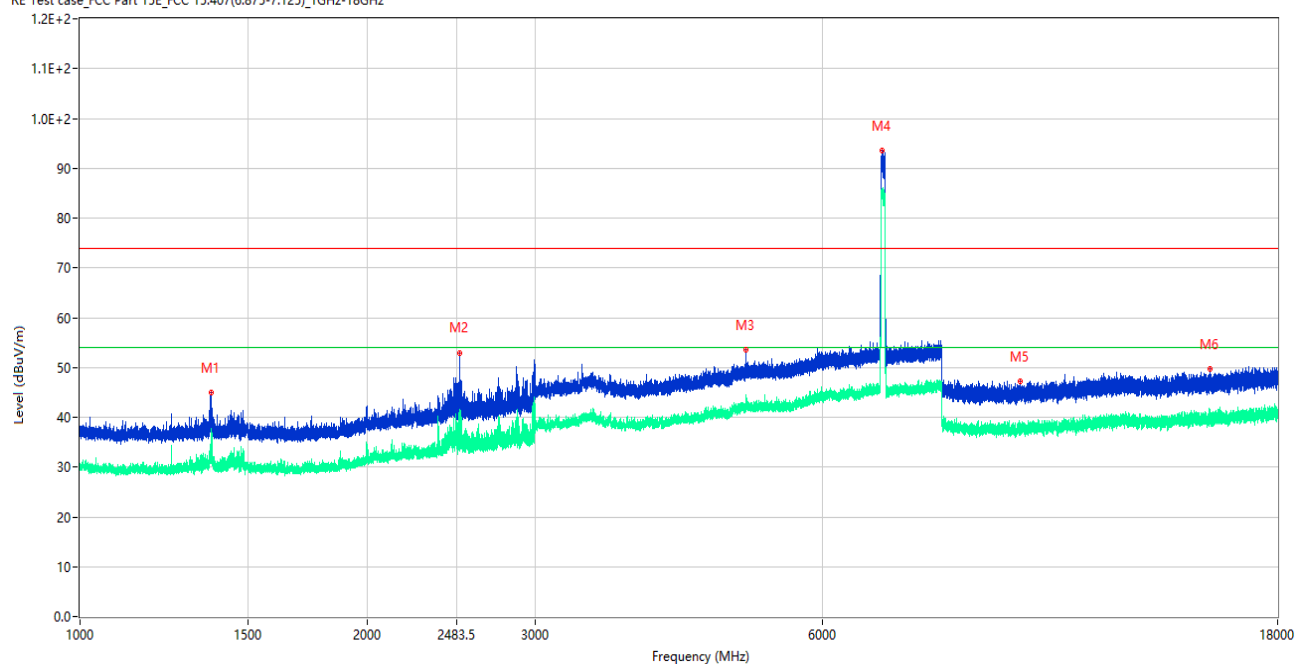

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.100	45.05	-15.94	74.0	28.95	Peak	92.00	150	Vertical	Pass
1**	1371.100	31.00	-15.94	54.0	23.00	AV	92.00	150	Vertical	Pass
2	2499.700	52.97	-12.02	74.0	21.03	Peak	124.00	150	Vertical	Pass
2**	2499.700	36.08	-12.02	54.0	17.92	AV	124.00	150	Vertical	Pass
3	4993.000	53.45	-2.29	74.0	20.55	Peak	298.00	150	Vertical	Pass
3**	4993.000	42.34	-2.29	54.0	11.66	AV	298.00	150	Vertical	Pass
4	6922.750	93.64	0.12	74.0	-19.64	Peak	333.00	150	Vertical	N/A
4**	6922.750	84.80	0.12	54.0	-30.80	AV	333.00	150	Vertical	N/A
5	9659.650	47.30	-3.19	74.0	26.70	Peak	215.00	150	Vertical	Pass
5**	9659.650	38.11	-3.19	54.0	15.89	AV	215.00	150	Vertical	Pass
6	15274.724	49.70	-1.48	74.0	24.30	Peak	150.00	150	Vertical	Pass
6**	15274.724	40.84	-1.48	54.0	13.16	AV	150.00	150	Vertical	Pass

11ax160(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

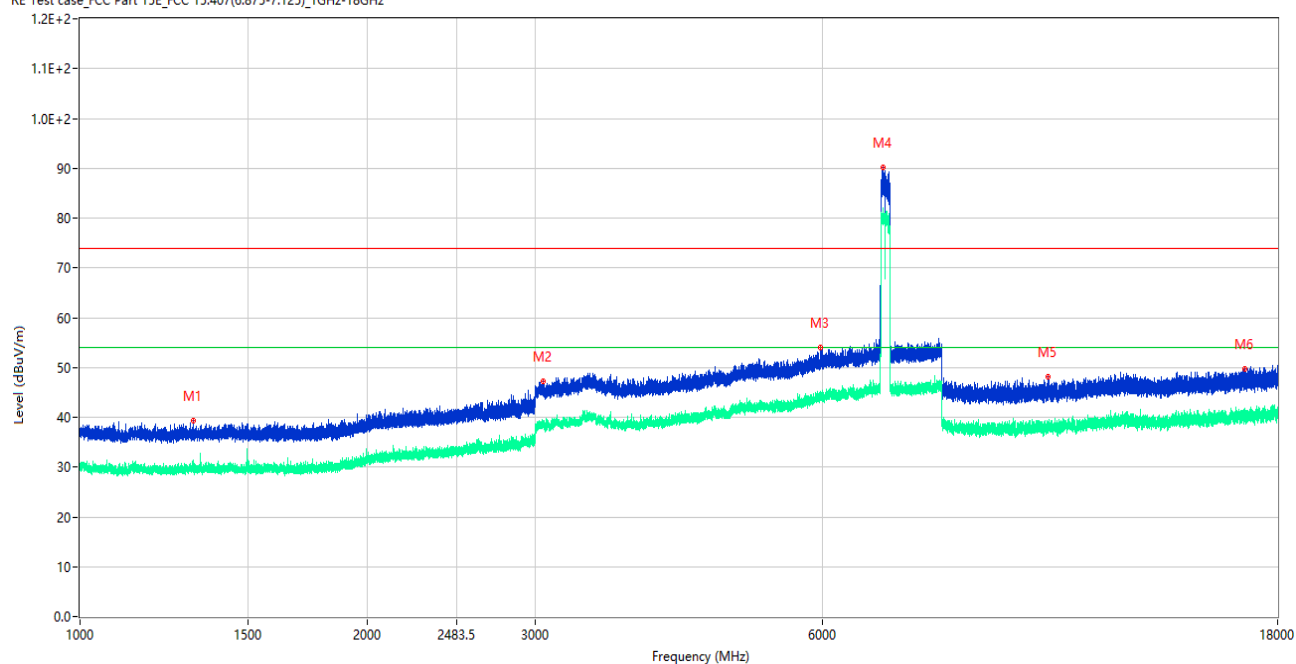

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1313.700	39.39	-15.85	74.0	34.61	Peak	21.00	150	Horizontal	Pass
1**	1313.700	30.24	-15.85	54.0	23.76	AV	21.00	150	Horizontal	Pass
2	3059.250	47.13	-7.37	74.0	26.87	Peak	359.00	150	Horizontal	Pass
2**	3059.250	38.16	-7.37	54.0	15.84	AV	359.00	150	Horizontal	Pass
3	5973.750	53.95	-0.09	74.0	20.05	Peak	181.00	150	Horizontal	Pass
3**	5973.750	44.50	-0.09	54.0	9.50	AV	181.00	150	Horizontal	Pass
4	6949.000	90.20	0.05	74.0	-16.20	Peak	265.00	150	Horizontal	N/A
4**	6949.000	81.71	0.05	54.0	-27.71	AV	265.00	150	Horizontal	N/A
5	10335.100	48.13	-3.19	74.0	25.87	Peak	192.00	150	Horizontal	Pass
5**	10335.100	38.44	-3.19	54.0	15.56	AV	192.00	150	Horizontal	Pass
6	16638.151	49.60	-1.02	74.0	24.40	Peak	149.00	150	Horizontal	Pass
6**	16638.151	40.09	-1.02	54.0	13.91	AV	149.00	150	Horizontal	Pass

11ax160(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

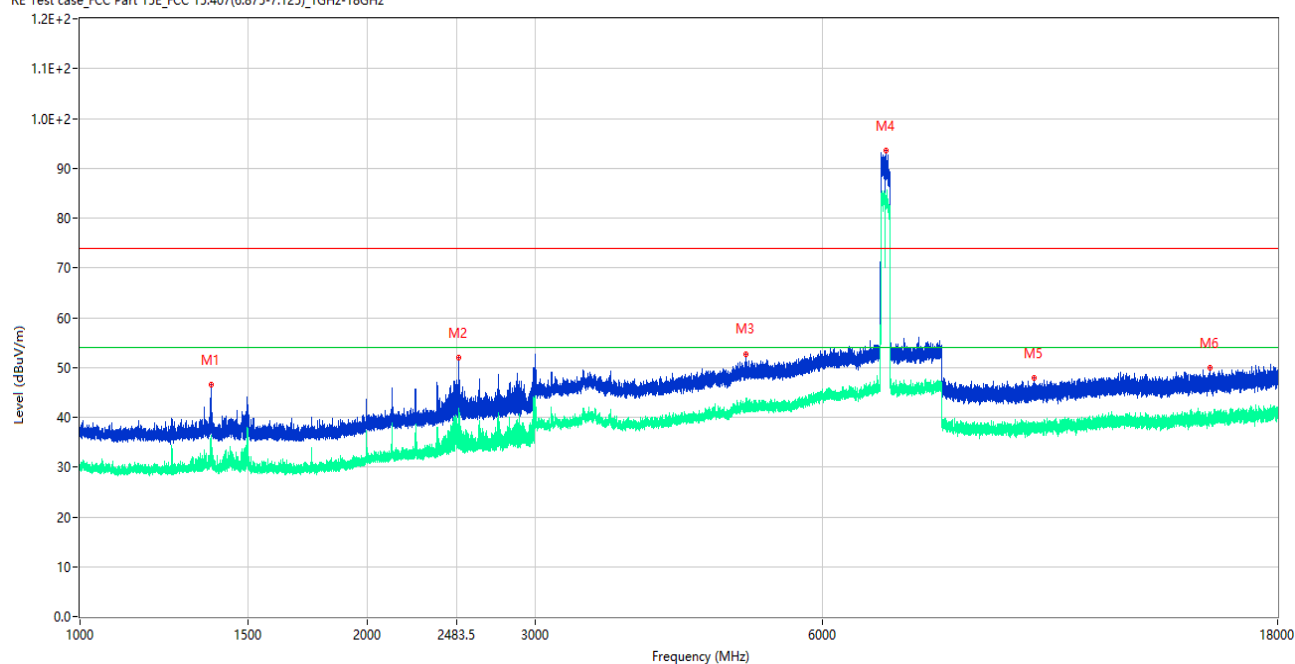

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1372.800	46.56	-15.96	74.0	27.44	Peak	84.00	150	Vertical	Pass
1**	1372.800	34.19	-15.96	54.0	19.81	AV	84.00	150	Vertical	Pass
2	2495.700	51.89	-12.01	74.0	22.11	Peak	305.00	150	Vertical	Pass
2**	2495.700	41.81	-12.01	54.0	12.19	AV	305.00	150	Vertical	Pass
3	4985.000	52.77	-2.51	74.0	21.23	Peak	113.00	150	Vertical	Pass
3**	4985.000	42.09	-2.51	54.0	11.91	AV	113.00	150	Vertical	Pass
4	6993.250	93.51	0.31	74.0	-19.51	Peak	328.00	150	Vertical	N/A
4**	6993.250	83.15	0.31	54.0	-29.15	AV	328.00	150	Vertical	N/A
5	9995.237	47.94	-3.90	74.0	26.06	Peak	27.00	150	Vertical	Pass
5**	9995.237	37.67	-3.90	54.0	16.33	AV	27.00	150	Vertical	Pass
6	15290.474	49.88	-1.71	74.0	24.12	Peak	114.00	150	Vertical	Pass
6**	15290.474	39.69	-1.71	54.0	14.31	AV	114.00	150	Vertical	Pass

Aux. Antenna:


11ax20(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT H

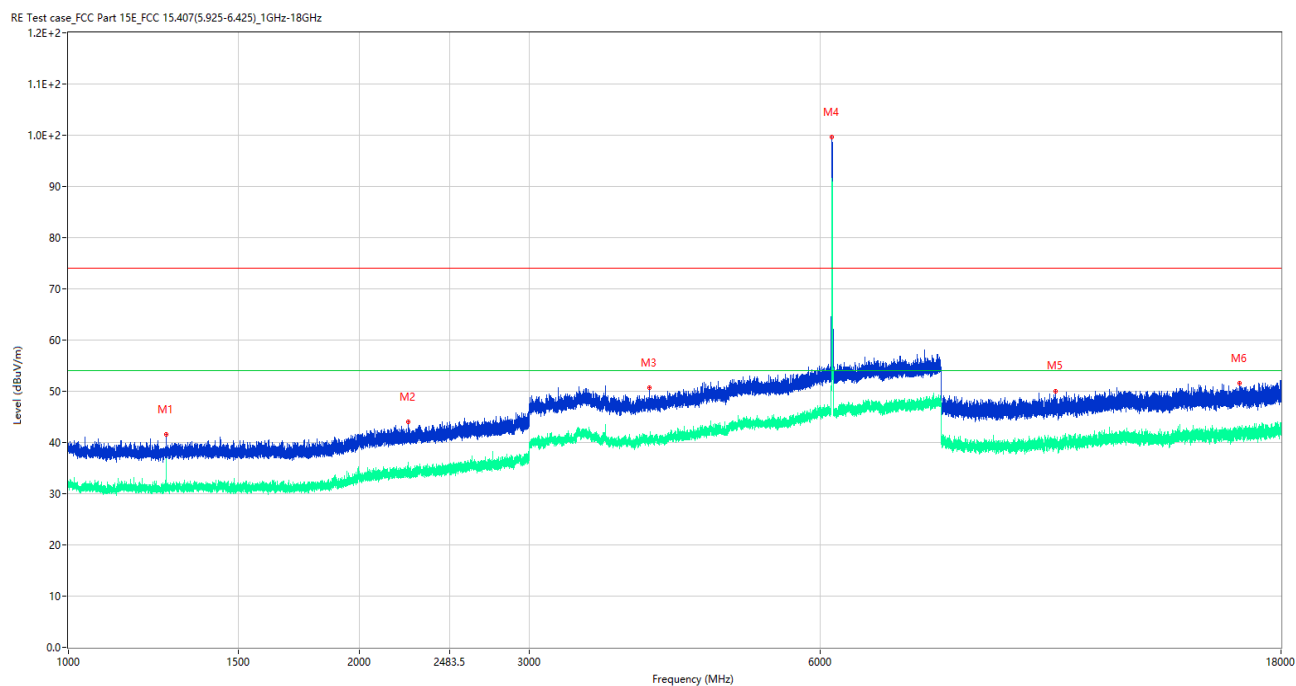

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1261.400	41.50	-16.00	74.0	32.50	Peak	89.00	150	Horizontal	Pass
1**	1261.400	31.32	-16.00	54.0	22.68	AV	89.00	150	Horizontal	Pass
2	2248.500	44.12	-12.87	74.0	29.88	Peak	27.00	150	Horizontal	Pass
2**	2248.500	34.69	-12.87	54.0	19.31	AV	27.00	150	Horizontal	Pass
3	3995.250	50.70	-4.82	74.0	23.30	Peak	209.00	150	Horizontal	Pass
3**	3995.250	40.51	-4.82	54.0	13.49	AV	209.00	150	Horizontal	Pass
4	6172.750	99.58	-0.45	74.0	-25.58	Peak	57.00	150	Horizontal	N/A
4**	6172.750	90.64	-0.45	54.0	-36.64	AV	57.00	150	Horizontal	N/A
5	10507.525	50.01	-3.33	74.0	23.99	Peak	51.00	150	Horizontal	Pass
5**	10507.525	39.61	-3.33	54.0	14.39	AV	51.00	150	Horizontal	Pass
6	16299.263	51.54	-1.51	74.0	22.46	Peak	40.00	150	Horizontal	Pass
6**	16299.263	41.99	-1.51	54.0	12.01	AV	40.00	150	Horizontal	Pass

11ax20(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

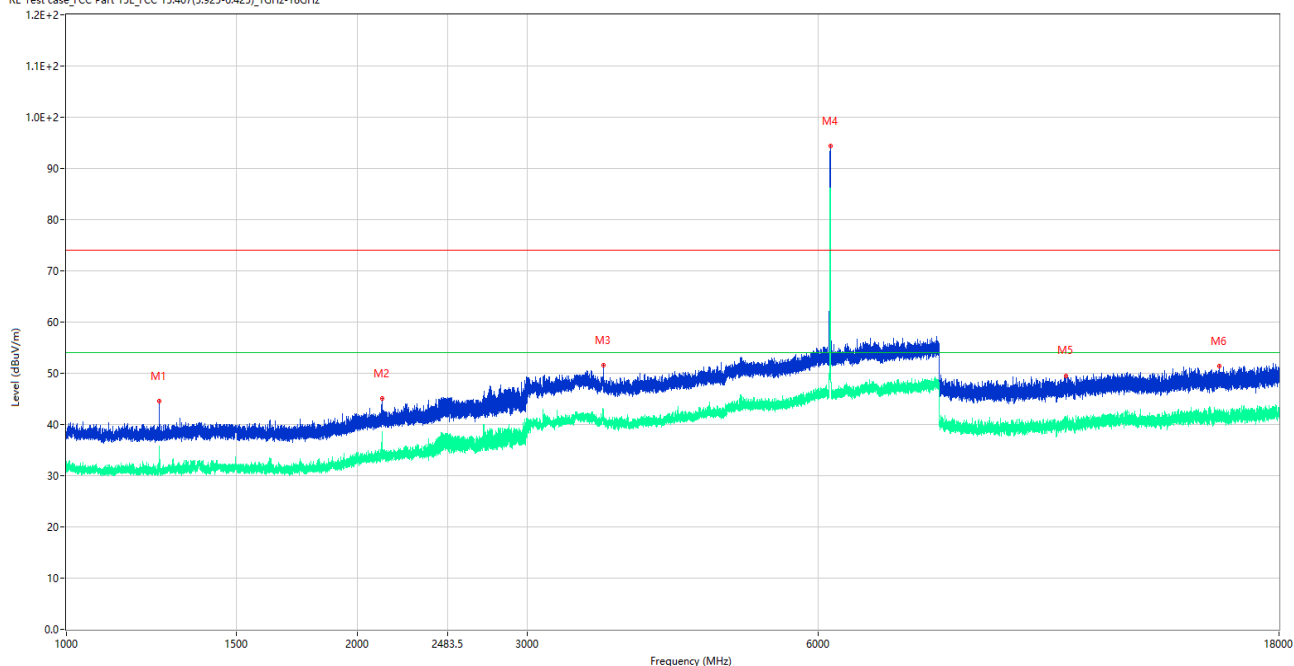

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1247.800	44.49	-16.16	74.0	29.51	Peak	121.00	150	Vertical	Pass
1**	1247.800	31.53	-16.16	54.0	22.47	AV	121.00	150	Vertical	Pass
2	2123.100	45.03	-13.28	74.0	28.97	Peak	273.00	150	Vertical	Pass
2**	2123.100	35.47	-13.28	54.0	18.53	AV	273.00	150	Vertical	Pass
3	3598.500	51.61	-5.07	74.0	22.39	Peak	59.00	150	Vertical	Pass
3**	3598.500	41.99	-5.07	54.0	12.01	AV	59.00	150	Vertical	Pass
4	6178.000	94.38	-0.62	74.0	-20.38	Peak	242.00	150	Vertical	N/A
4**	6178.000	84.23	-0.62	54.0	-30.23	AV	242.00	150	Vertical	N/A
5	10839.550	49.54	-3.41	74.0	24.46	Peak	0.00	150	Vertical	Pass
5**	10839.550	39.38	-3.41	54.0	14.62	AV	0.00	150	Vertical	Pass
6	15624.901	51.39	-1.57	74.0	22.61	Peak	313.00	150	Vertical	Pass
6**	15624.901	41.52	-1.57	54.0	12.48	AV	313.00	150	Vertical	Pass

11ax40(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

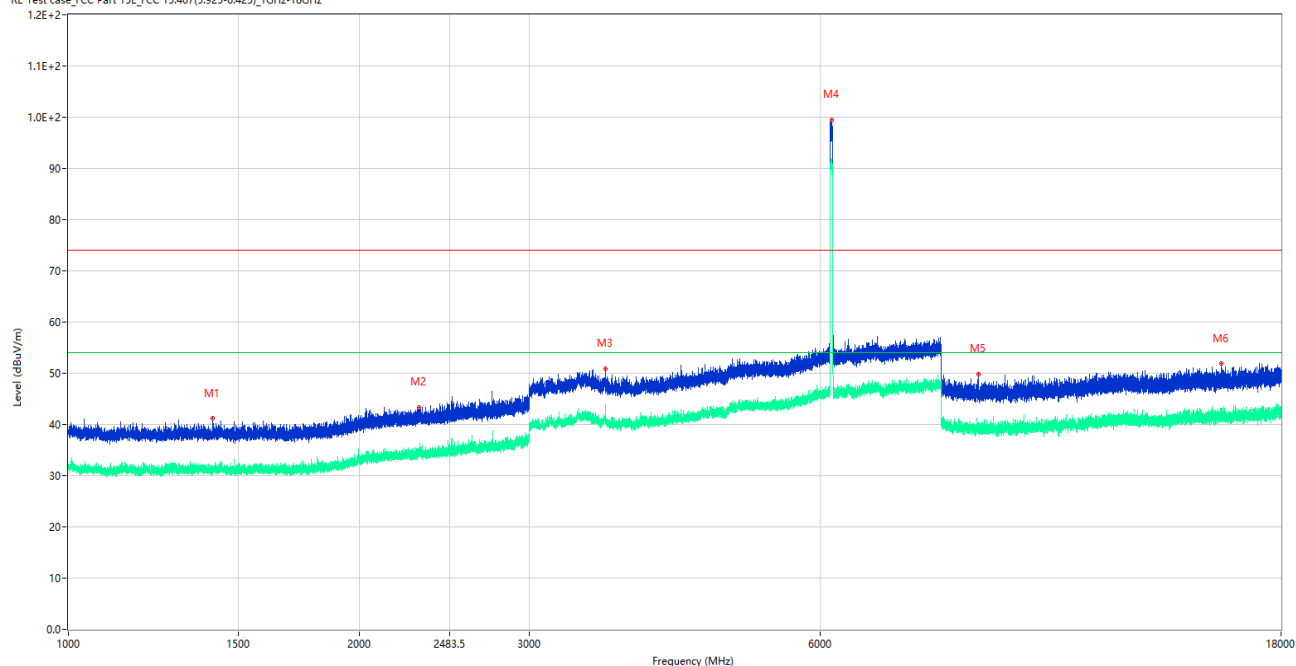

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1410.200	41.19	-15.98	74.0	32.81	Peak	157.00	150	Horizontal	Pass
1**	1410.200	30.89	-15.98	54.0	23.11	AV	157.00	150	Horizontal	Pass
2	2306.800	43.38	-12.63	74.0	30.62	Peak	107.00	150	Horizontal	Pass
2**	2306.800	34.12	-12.63	54.0	19.88	AV	107.00	150	Horizontal	Pass
3	3599.000	50.92	-5.03	74.0	23.08	Peak	107.00	150	Horizontal	Pass
3**	3599.000	42.70	-5.03	54.0	11.30	AV	107.00	150	Horizontal	Pass
4	6171.250	99.52	-0.42	74.0	-25.52	Peak	56.00	150	Horizontal	N/A
4**	6171.250	90.32	-0.42	54.0	-36.32	AV	56.00	150	Horizontal	N/A
5	8751.450	49.87	-5.01	74.0	24.13	Peak	352.00	150	Horizontal	Pass
5**	8751.450	39.59	-5.01	54.0	14.41	AV	352.00	150	Horizontal	Pass
6	15621.488	51.89	-1.78	74.0	22.11	Peak	175.00	150	Horizontal	Pass
6**	15621.488	41.97	-1.78	54.0	12.03	AV	175.00	150	Horizontal	Pass

11ax40(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

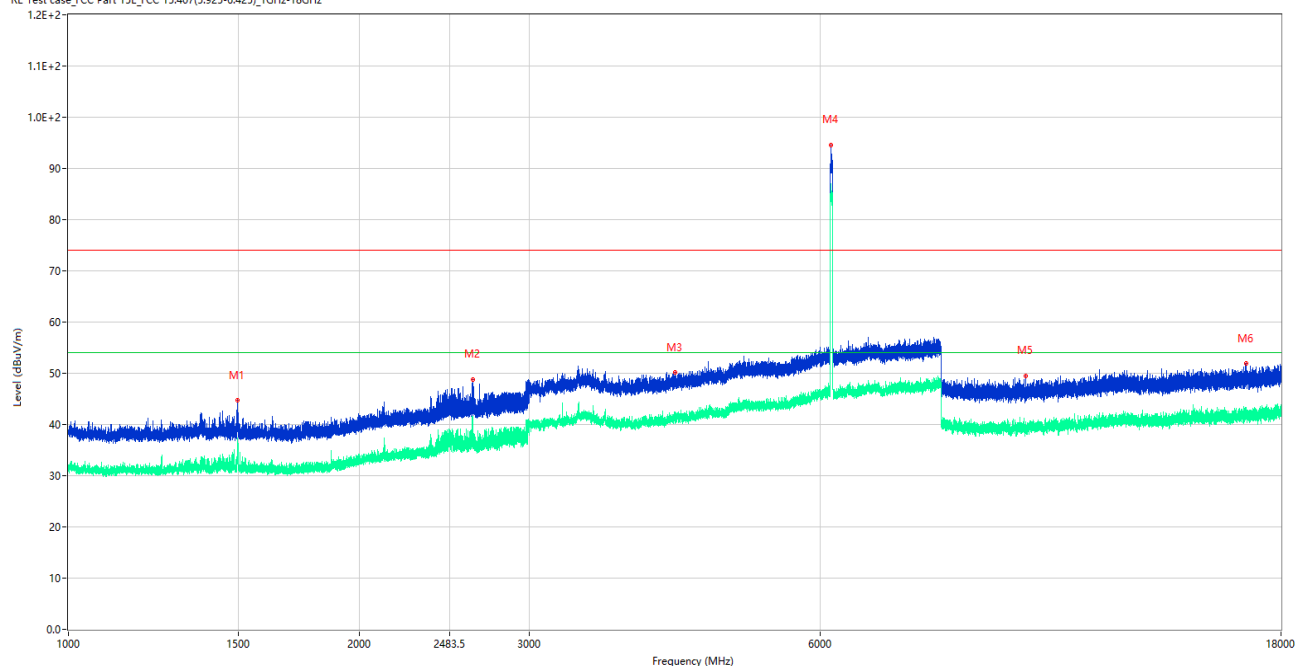

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1497.700	44.82	-16.14	74.0	29.18	Peak	103.00	150	Vertical	Pass
1**	1497.700	35.76	-16.14	54.0	18.24	AV	103.00	150	Vertical	Pass
2	2624.000	48.72	-9.91	74.0	25.28	Peak	103.00	150	Vertical	Pass
2**	2624.000	39.91	-9.91	54.0	14.09	AV	103.00	150	Vertical	Pass
3	4243.000	50.13	-3.40	74.0	23.87	Peak	345.00	150	Vertical	Pass
3**	4243.000	41.27	-3.40	54.0	12.73	AV	345.00	150	Vertical	Pass
4	6158.000	94.63	-0.21	74.0	-20.63	Peak	310.00	150	Vertical	N/A
4**	6158.000	84.86	-0.21	54.0	-30.86	AV	310.00	150	Vertical	N/A
5	9799.063	49.48	-3.43	74.0	24.52	Peak	242.00	150	Vertical	Pass
5**	9799.063	39.47	-3.43	54.0	14.53	AV	242.00	150	Vertical	Pass
6	16575.938	51.90	-0.72	74.0	22.10	Peak	9.00	150	Vertical	Pass
6**	16575.938	42.15	-0.72	54.0	11.85	AV	9.00	150	Vertical	Pass

11ax80(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

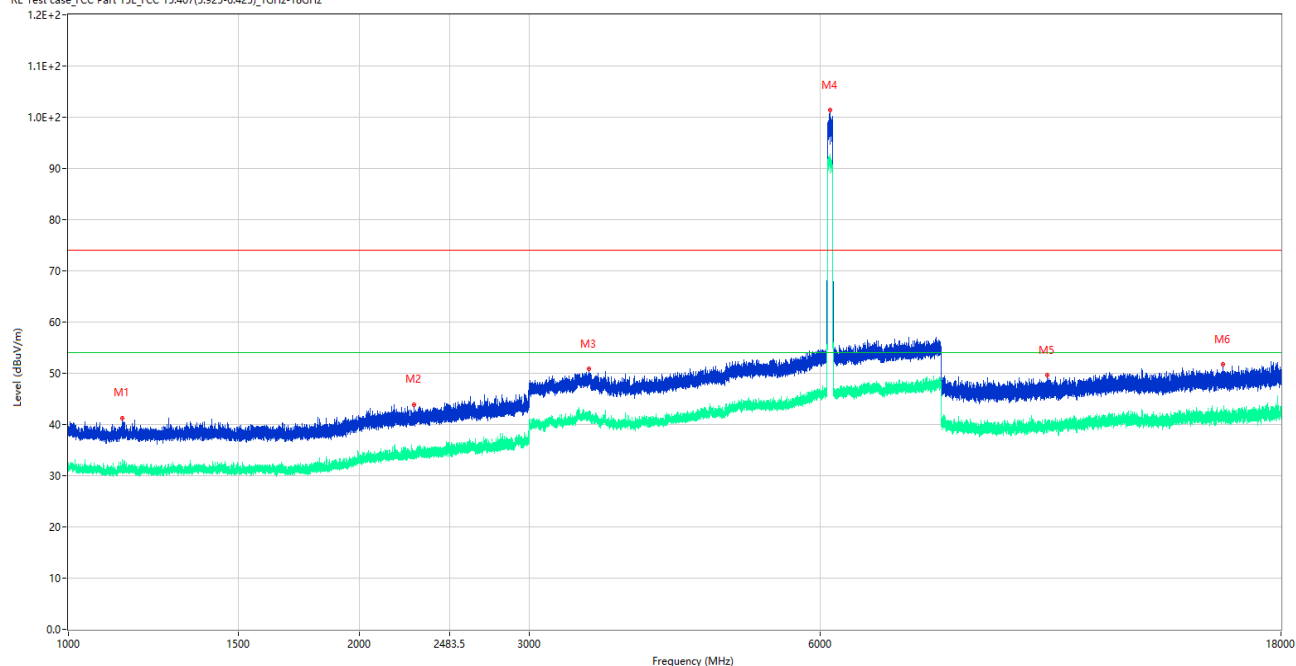

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1136.200	41.26	-15.53	74.0	32.74	Peak	59.00	150	Horizontal	Pass
1**	1136.200	30.87	-15.53	54.0	23.13	AV	59.00	150	Horizontal	Pass
2	2278.700	43.95	-12.72	74.0	30.05	Peak	71.00	150	Horizontal	Pass
2**	2278.700	34.76	-12.72	54.0	19.24	AV	71.00	150	Horizontal	Pass
3	3457.250	50.81	-4.92	74.0	23.19	Peak	360.00	150	Horizontal	Pass
3**	3457.250	41.85	-4.92	54.0	12.15	AV	360.00	150	Horizontal	Pass
4	6144.000	101.35	-0.28	74.0	-27.35	Peak	40.00	150	Horizontal	N/A
4**	6144.000	91.44	-0.28	54.0	-37.44	AV	40.00	150	Horizontal	N/A
5	10319.188	49.60	-3.20	74.0	24.40	Peak	28.00	150	Horizontal	Pass
5**	10319.188	39.65	-3.20	54.0	14.35	AV	28.00	150	Horizontal	Pass
6	15675.037	51.74	-1.56	74.0	22.26	Peak	279.00	150	Horizontal	Pass
6**	15675.037	40.86	-1.56	54.0	13.14	AV	279.00	150	Horizontal	Pass

11ax80(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

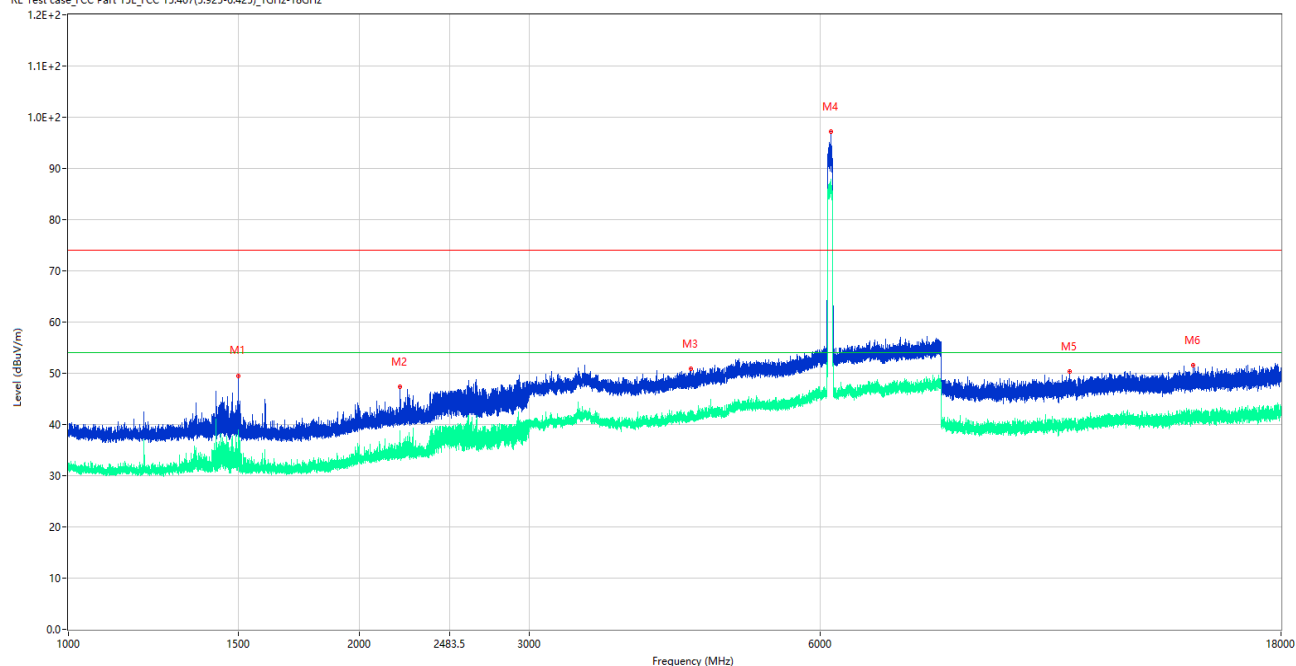

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1498.100	49.53	-16.14	74.0	24.47	Peak	118.00	150	Vertical	Pass
1**	1498.100	34.84	-16.14	54.0	19.16	AV	118.00	150	Vertical	Pass
2	2202.500	47.36	-13.34	74.0	26.64	Peak	60.00	150	Vertical	Pass
2**	2202.500	36.30	-13.34	54.0	17.70	AV	60.00	150	Vertical	Pass
3	4412.750	50.85	-2.86	74.0	23.15	Peak	112.00	150	Vertical	Pass
3**	4412.750	41.33	-2.86	54.0	12.67	AV	112.00	150	Vertical	Pass
4	6158.750	97.15	-0.20	74.0	-23.15	Peak	228.00	150	Vertical	N/A
4**	6158.750	85.94	-0.20	54.0	-31.94	AV	228.00	150	Vertical	N/A
5	10882.537	50.30	-3.20	74.0	23.70	Peak	262.00	150	Vertical	Pass
5**	10882.537	40.00	-3.20	54.0	14.00	AV	262.00	150	Vertical	Pass
6	14602.724	51.49	-2.63	74.0	22.51	Peak	310.00	150	Vertical	Pass
6**	14602.724	41.47	-2.63	54.0	12.53	AV	310.00	150	Vertical	Pass

11ax160(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

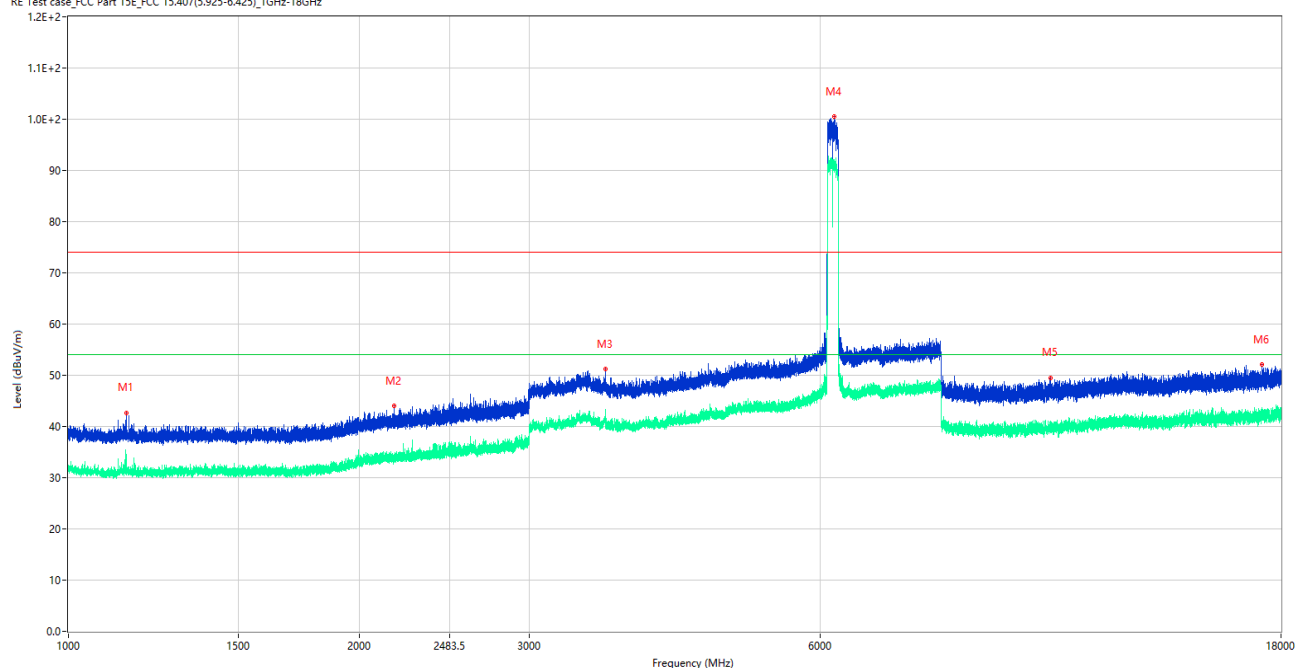

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1147.300	42.67	-15.67	74.0	31.33	Peak	0.00	150	Horizontal	Pass
1**	1147.300	30.91	-15.67	54.0	23.09	AV	0.00	150	Horizontal	Pass
2	2175.000	43.98	-12.93	74.0	30.02	Peak	164.00	150	Horizontal	Pass
2**	2175.000	33.90	-12.93	54.0	20.10	AV	164.00	150	Horizontal	Pass
3	3596.000	51.16	-5.13	74.0	22.84	Peak	261.00	150	Horizontal	Pass
3**	3596.000	41.70	-5.13	54.0	12.30	AV	261.00	150	Horizontal	Pass
4	6203.500	100.49	-0.84	74.0	-26.49	Peak	77.00	150	Horizontal	N/A
4**	6203.500	90.77	-0.84	54.0	-36.77	AV	77.00	150	Horizontal	N/A
5	10385.212	49.51	-3.36	74.0	24.49	Peak	6.00	150	Horizontal	Pass
5**	10385.212	39.65	-3.36	54.0	14.35	AV	6.00	150	Horizontal	Pass
6	17186.775	52.04	0.15	74.0	21.96	Peak	346.00	150	Horizontal	Pass
6**	17186.775	43.20	0.15	54.0	10.80	AV	346.00	150	Horizontal	Pass

11ax160(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(5.925-6.425)_1GHz-18GHz

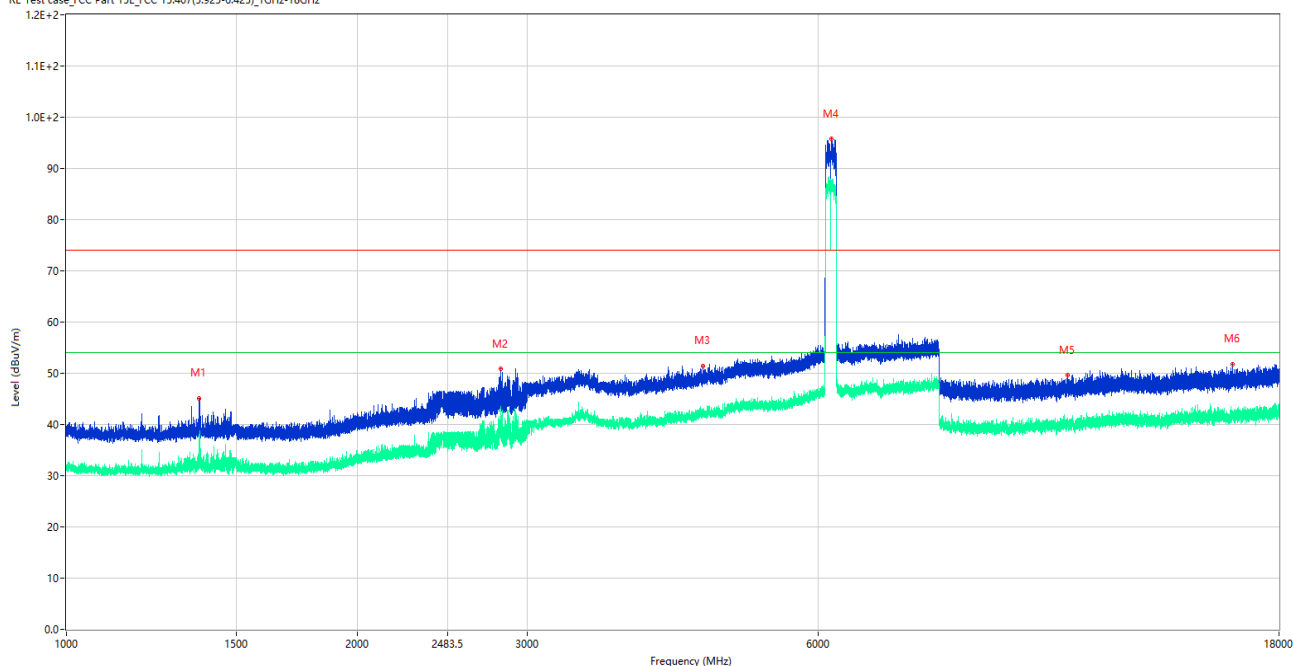

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1372.900	45.15	-15.96	74.0	28.85	Peak	81.00	150	Vertical	Pass
1**	1372.900	35.10	-15.96	54.0	18.90	AV	81.00	150	Vertical	Pass
2	2814.000	50.88	-9.97	74.0	23.12	Peak	117.00	150	Vertical	Pass
2**	2814.000	39.72	-9.97	54.0	14.28	AV	117.00	150	Vertical	Pass
3	4564.250	51.44	-2.82	74.0	22.56	Peak	58.00	150	Vertical	Pass
3**	4564.250	42.52	-2.82	54.0	11.48	AV	58.00	150	Vertical	Pass
4	6188.000	95.75	-0.65	74.0	-21.75	Peak	243.00	150	Vertical	N/A
4**	6188.000	87.13	-0.65	54.0	-33.13	AV	243.00	150	Vertical	N/A
5	10875.888	49.60	-3.24	74.0	24.40	Peak	99.00	150	Vertical	Pass
5**	10875.888	39.98	-3.24	54.0	14.02	AV	99.00	150	Vertical	Pass
6	16104.750	51.77	-1.45	74.0	22.23	Peak	313.00	150	Vertical	Pass
6**	16104.750	41.93	-1.45	54.0	12.07	AV	313.00	150	Vertical	Pass

11ax20(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

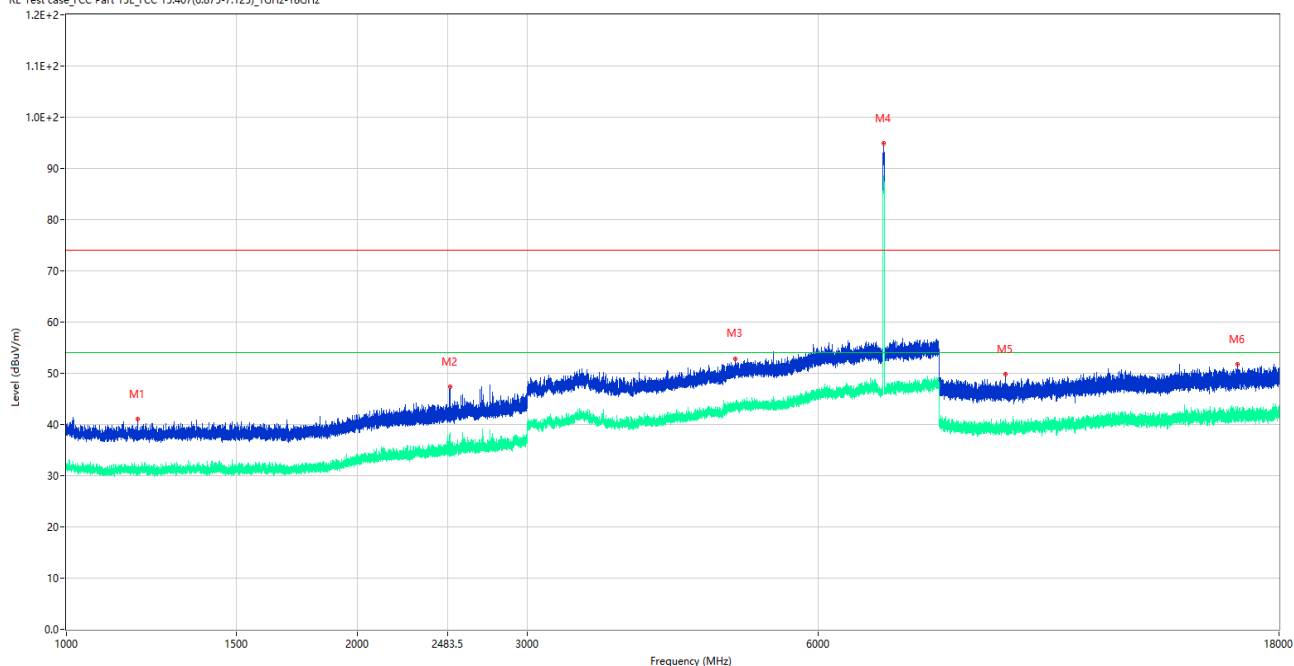

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1184.700	41.00	-15.89	74.0	33.00	Peak	0.00	150	Horizontal	Pass
1**	1184.700	31.14	-15.89	54.0	22.86	AV	0.00	150	Horizontal	Pass
2	2496.400	47.29	-12.02	74.0	26.71	Peak	16.00	150	Horizontal	Pass
2**	2496.400	34.76	-12.02	54.0	19.24	AV	16.00	150	Horizontal	Pass
3	4926.750	52.84	-2.29	74.0	21.16	Peak	360.00	150	Horizontal	Pass
3**	4926.750	43.43	-2.29	54.0	10.57	AV	360.00	150	Horizontal	Pass
4	7010.250	94.91	0.58	74.0	-20.91	Peak	57.00	150	Horizontal	N/A
4**	7010.250	86.12	0.58	54.0	-32.12	AV	57.00	150	Horizontal	N/A
5	9371.088	49.79	-4.91	74.0	24.21	Peak	6.00	150	Horizontal	Pass
5**	9371.088	39.59	-4.91	54.0	14.41	AV	6.00	150	Horizontal	Pass
6	16295.063	51.72	-1.58	74.0	22.28	Peak	346.00	150	Horizontal	Pass
6**	16295.063	42.26	-1.58	54.0	11.74	AV	346.00	150	Horizontal	Pass

11ax20(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

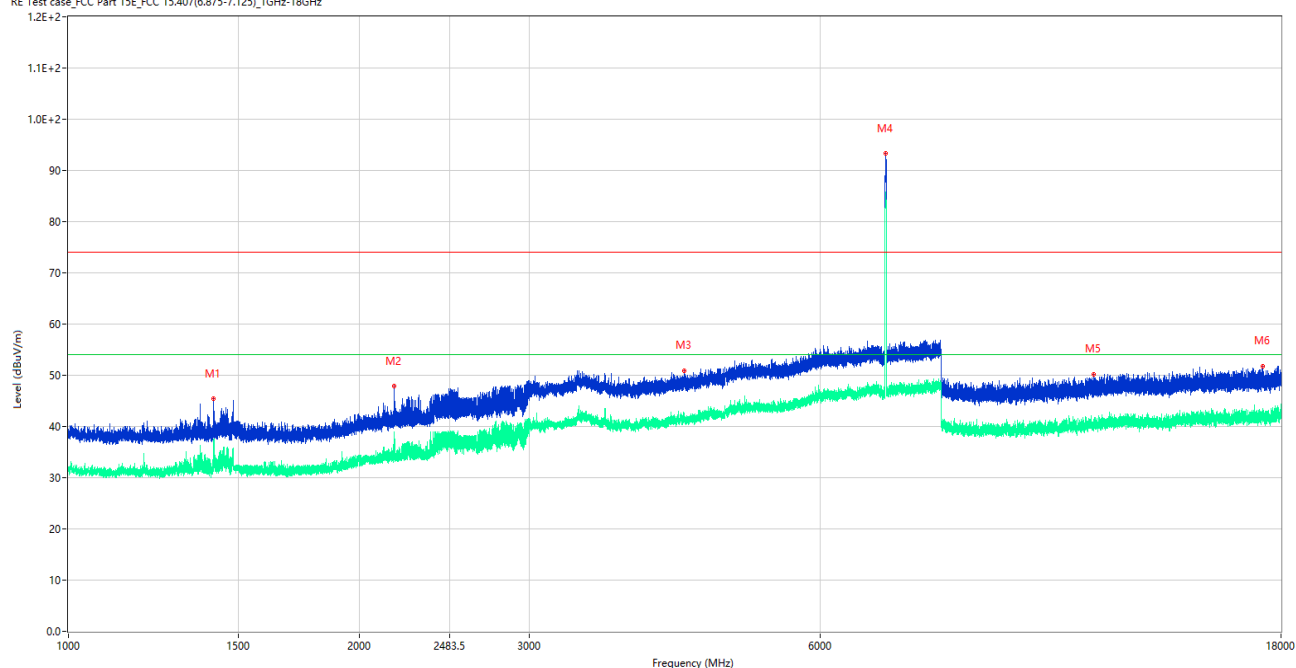

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1412.800	45.40	-15.94	74.0	28.60	Peak	98.00	150	Vertical	Pass
1**	1412.800	33.22	-15.94	54.0	20.78	AV	98.00	150	Vertical	Pass
2	2175.600	47.95	-12.92	74.0	26.05	Peak	46.00	150	Vertical	Pass
2**	2175.600	36.76	-12.92	54.0	17.24	AV	46.00	150	Vertical	Pass
3	4337.250	50.87	-3.13	74.0	23.13	Peak	75.00	150	Vertical	Pass
3**	4337.250	41.29	-3.13	54.0	12.71	AV	75.00	150	Vertical	Pass
4	7012.250	93.32	0.62	74.0	-19.32	Peak	229.00	150	Vertical	N/A
4**	7012.250	84.32	0.62	54.0	-30.32	AV	229.00	150	Vertical	N/A
5	11515.950	50.25	-2.81	74.0	23.75	Peak	352.00	150	Vertical	Pass
5**	11515.950	39.87	-2.81	54.0	14.13	AV	352.00	150	Vertical	Pass
6	17236.386	51.78	-0.66	74.0	22.22	Peak	279.00	150	Vertical	Pass
6**	17236.386	41.82	-0.66	54.0	12.18	AV	279.00	150	Vertical	Pass

11ax40(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

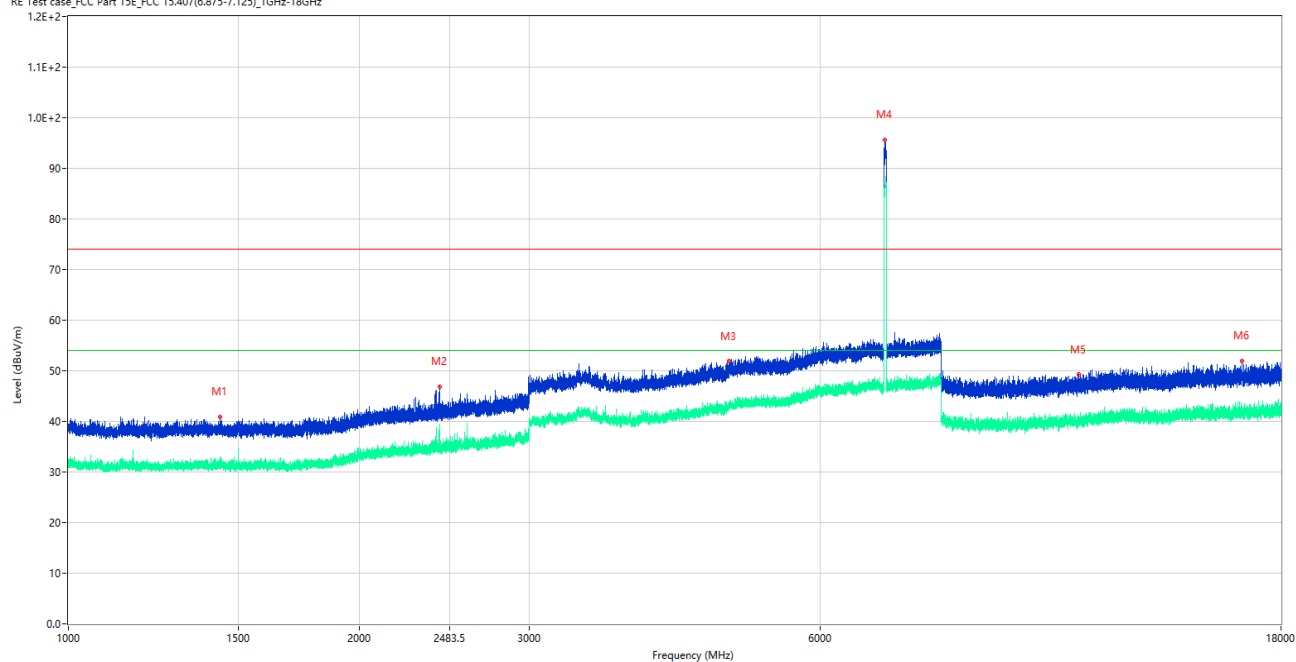

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1435.500	40.96	-15.98	74.0	33.04	Peak	175.00	150	Horizontal	Pass
1**	1435.500	31.76	-15.98	54.0	22.24	AV	175.00	150	Horizontal	Pass
2	2421.100	46.89	-12.34	74.0	27.11	Peak	23.00	150	Horizontal	Pass
2**	2421.100	37.94	-12.34	54.0	16.06	AV	23.00	150	Horizontal	Pass
3	4831.750	51.86	-2.35	74.0	22.14	Peak	278.00	150	Horizontal	Pass
3**	4831.750	43.68	-2.35	54.0	10.32	AV	278.00	150	Horizontal	Pass
4	7004.250	95.67	0.23	74.0	-21.67	Peak	58.00	150	Horizontal	N/A
4**	7004.250	86.72	0.23	54.0	-32.72	AV	58.00	150	Horizontal	N/A
5	11113.625	49.22	-4.04	74.0	24.78	Peak	99.00	150	Horizontal	Pass
5**	11113.625	40.12	-4.04	54.0	13.88	AV	99.00	150	Horizontal	Pass
6	16392.449	51.98	-1.22	74.0	22.02	Peak	72.00	150	Horizontal	Pass
6**	16392.449	42.04	-1.22	54.0	11.96	AV	72.00	150	Horizontal	Pass

11ax40(SU), U-NII-5, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

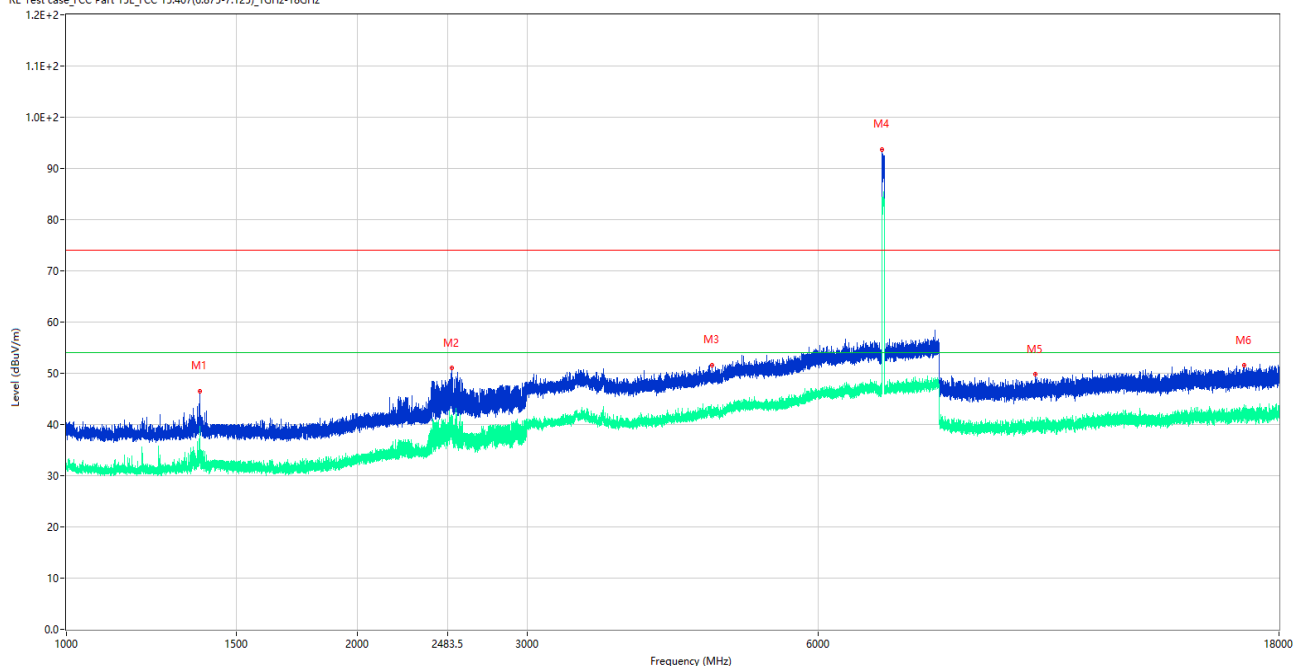

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1373.500	46.57	-15.98	74.0	27.43	Peak	107.00	150	Vertical	Pass
1**	1373.500	37.03	-15.98	54.0	16.97	AV	107.00	150	Vertical	Pass
2	2503.700	51.03	-11.95	74.0	22.97	Peak	86.00	150	Vertical	Pass
2**	2503.700	41.43	-11.95	54.0	12.57	AV	86.00	150	Vertical	Pass
3	4661.750	51.67	-3.42	74.0	22.33	Peak	277.00	150	Vertical	Pass
3**	4661.750	41.97	-3.42	54.0	12.03	AV	277.00	150	Vertical	Pass
4	6987.500	93.69	0.25	74.0	-19.69	Peak	227.00	150	Vertical	N/A
4**	6987.500	82.26	0.25	54.0	-28.26	AV	227.00	150	Vertical	N/A
5	10073.612	49.78	-3.84	74.0	24.22	Peak	360.00	150	Vertical	Pass
5**	10073.612	39.40	-3.84	54.0	14.60	AV	360.00	150	Vertical	Pass
6	16576.725	51.52	-0.74	74.0	22.48	Peak	243.00	150	Vertical	Pass
6**	16576.725	42.00	-0.74	54.0	12.00	AV	243.00	150	Vertical	Pass

11ax80(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

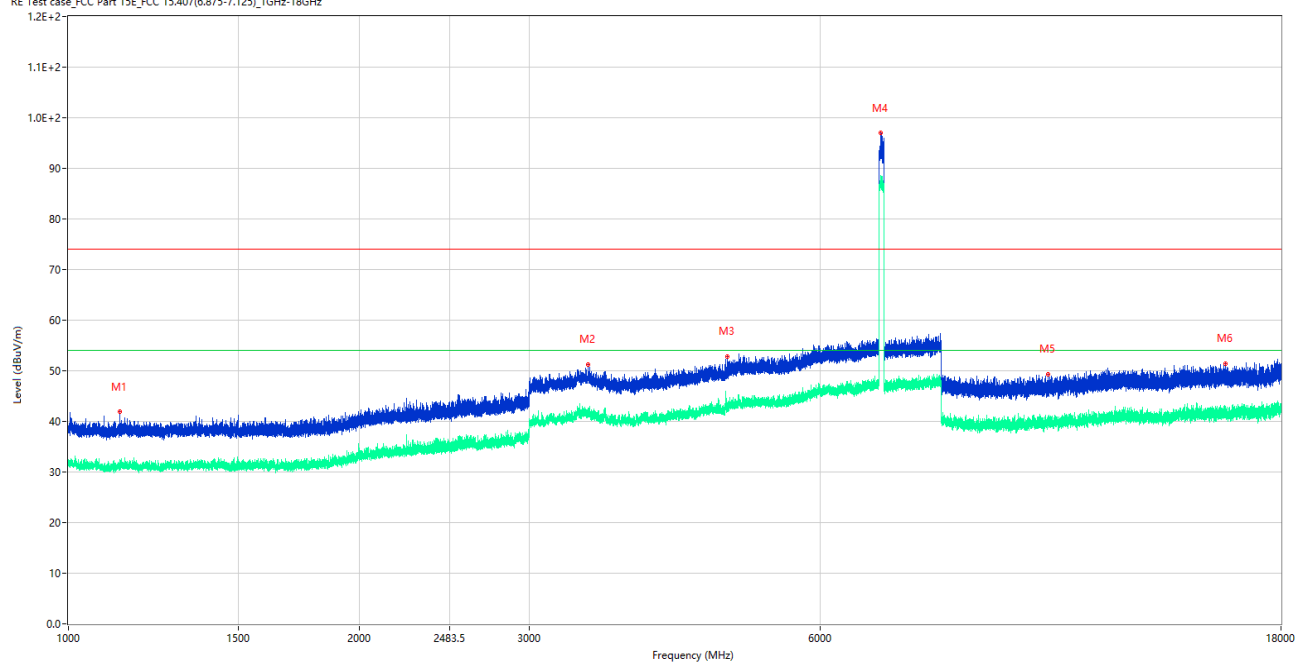

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1130.900	41.88	-15.55	74.0	32.12	Peak	40.00	150	Horizontal	Pass
1**	1130.900	31.25	-15.55	54.0	22.75	AV	40.00	150	Horizontal	Pass
2	3450.250	51.26	-4.99	74.0	22.74	Peak	295.00	150	Horizontal	Pass
2**	3450.250	41.70	-4.99	54.0	12.30	AV	295.00	150	Horizontal	Pass
3	4814.000	52.75	-2.40	74.0	21.25	Peak	40.00	150	Horizontal	Pass
3**	4814.000	43.24	-2.40	54.0	10.76	AV	40.00	150	Horizontal	Pass
4	6926.250	96.93	0.13	74.0	-22.93	Peak	40.00	150	Horizontal	N/A
4**	6926.250	86.99	0.13	54.0	-32.99	AV	40.00	150	Horizontal	N/A
5	10341.750	49.35	-3.41	74.0	24.65	Peak	338.00	150	Horizontal	Pass
5**	10341.750	39.90	-3.41	54.0	14.10	AV	338.00	150	Horizontal	Pass
6	15782.662	51.47	-1.99	74.0	22.53	Peak	139.00	150	Horizontal	Pass
6**	15782.662	41.40	-1.99	54.0	12.60	AV	139.00	150	Horizontal	Pass

11ax80(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT V


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

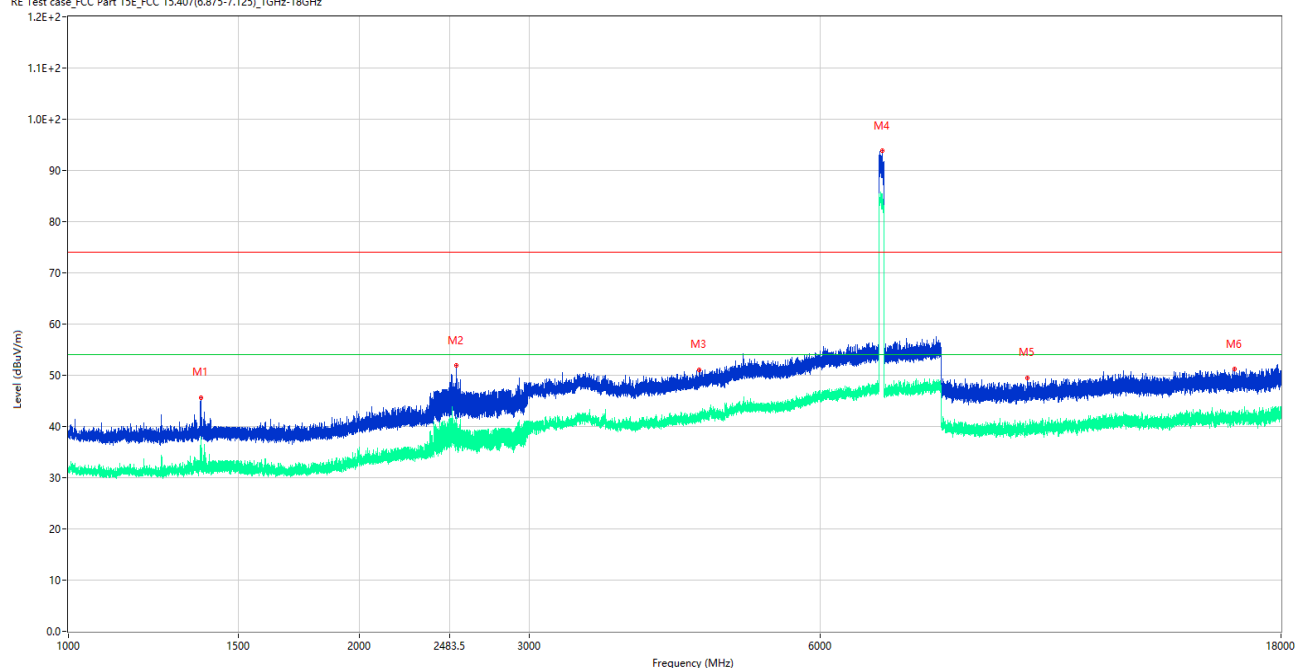

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.100	45.69	-15.94	74.0	28.31	Peak	111.00	150	Vertical	Pass
1**	1371.100	36.46	-15.94	54.0	17.54	AV	111.00	150	Vertical	Pass
2	2518.500	51.93	-12.10	74.0	22.07	Peak	111.00	150	Vertical	Pass
2**	2518.500	38.16	-12.10	54.0	15.84	AV	111.00	150	Vertical	Pass
3	4494.750	51.06	-3.23	74.0	22.94	Peak	5.00	150	Vertical	Pass
3**	4494.750	41.54	-3.23	54.0	12.46	AV	5.00	150	Vertical	Pass
4	6958.750	93.86	-0.32	74.0	-19.86	Peak	228.00	150	Vertical	N/A
4**	6958.750	84.25	-0.32	54.0	-30.25	AV	228.00	150	Vertical	N/A
5	9835.638	49.51	-3.81	74.0	24.49	Peak	359.00	150	Vertical	Pass
5**	9835.638	39.82	-3.81	54.0	14.18	AV	359.00	150	Vertical	Pass
6	16104.750	51.17	-1.45	74.0	22.83	Peak	1.00	150	Vertical	Pass
6**	16104.750	41.73	-1.45	54.0	12.27	AV	1.00	150	Vertical	Pass

11ax160(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT H


RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

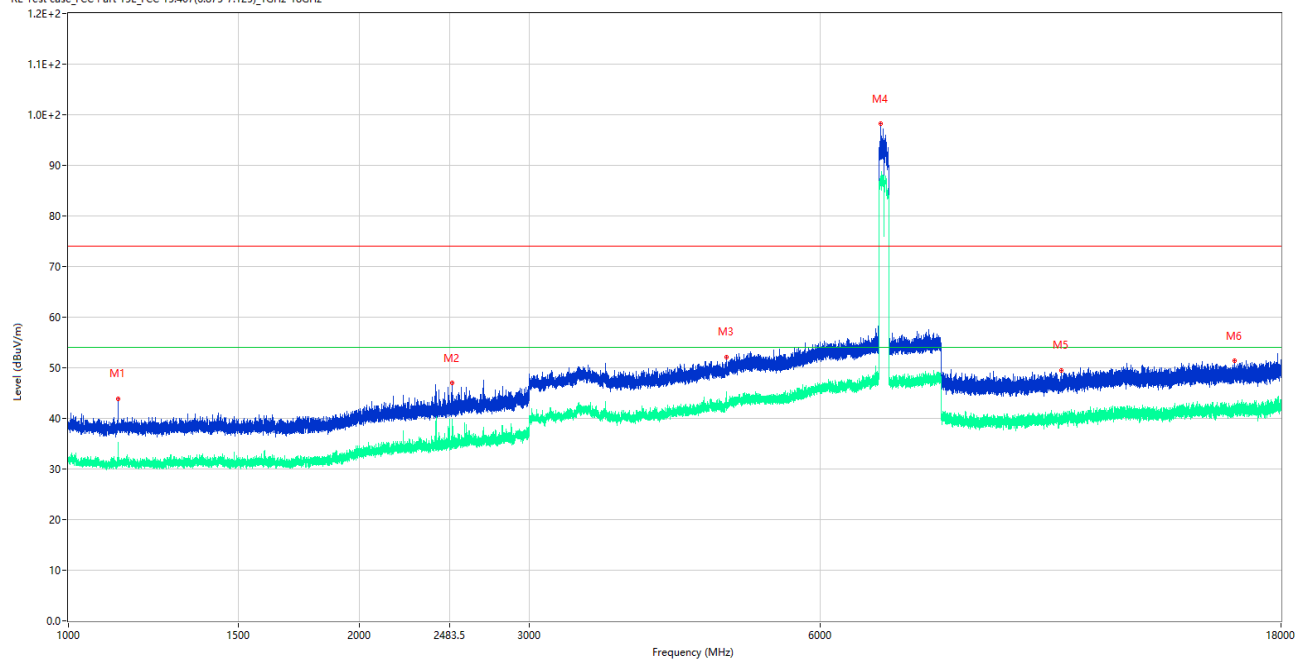

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1126.100	43.94	-15.62	74.0	30.06	Peak	39.00	150	Horizontal	Pass
1**	1126.100	31.78	-15.62	54.0	22.22	AV	39.00	150	Horizontal	Pass
2	2495.100	46.96	-11.99	74.0	27.04	Peak	17.00	150	Horizontal	Pass
2**	2495.100	38.53	-11.99	54.0	15.47	AV	17.00	150	Horizontal	Pass
3	4795.500	52.15	-3.09	74.0	21.85	Peak	358.00	150	Horizontal	Pass
3**	4795.500	43.19	-3.09	54.0	10.81	AV	358.00	150	Horizontal	Pass
4	6938.500	98.21	-0.22	74.0	-24.21	Peak	41.00	150	Horizontal	N/A
4**	6938.500	86.86	-0.22	54.0	-32.86	AV	41.00	150	Horizontal	N/A
5	10673.299	49.49	-4.13	74.0	24.51	Peak	241.00	150	Horizontal	Pass
5**	10673.299	38.78	-4.13	54.0	15.22	AV	241.00	150	Horizontal	Pass
6	16107.375	51.46	-1.33	74.0	22.54	Peak	0.00	150	Horizontal	Pass
6**	16107.375	41.89	-1.33	54.0	12.11	AV	0.00	150	Horizontal	Pass

11ax160(SU), U-NII-8, 1 GHz to 18 GHz, Middle Channel, ANT V

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

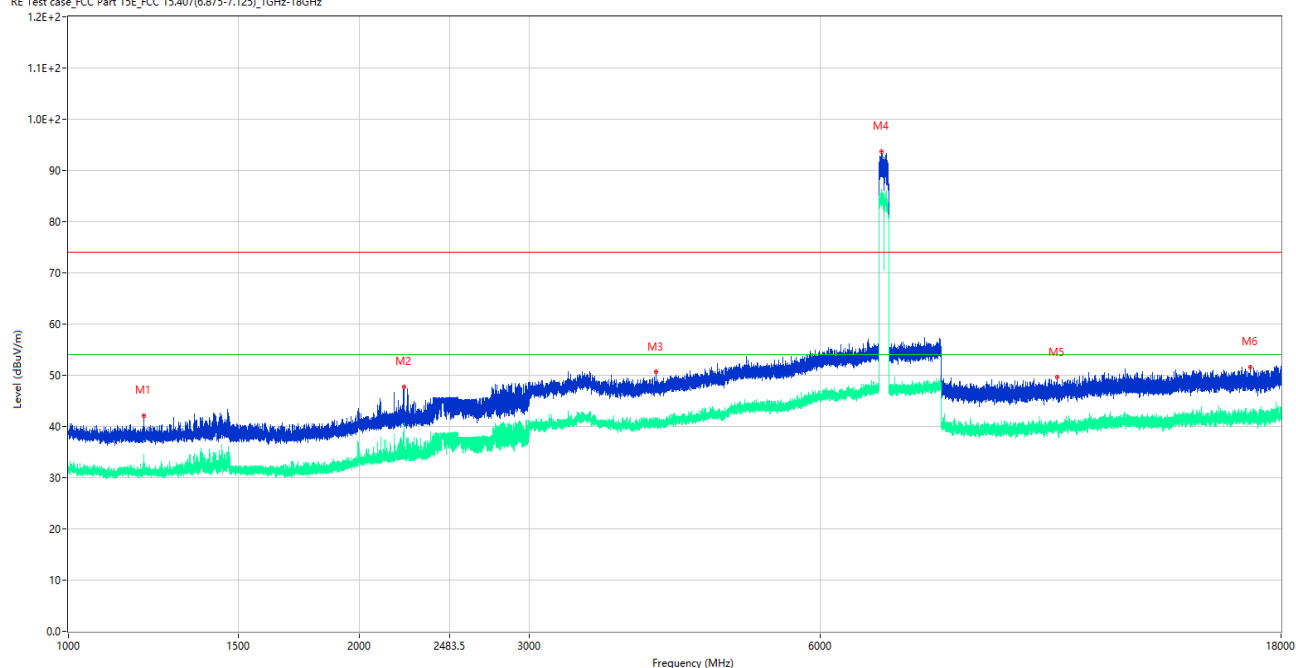

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1196.900	42.11	-15.71	74.0	31.89	Peak	286.00	150	Vertical	Pass
1**	1196.900	31.63	-15.71	54.0	22.37	AV	286.00	150	Vertical	Pass
2	2227.200	47.80	-13.08	74.0	26.20	Peak	45.00	150	Vertical	Pass
2**	2227.200	34.69	-13.08	54.0	19.31	AV	45.00	150	Vertical	Pass
3	4055.500	50.68	-4.02	74.0	23.32	Peak	360.00	150	Vertical	Pass
3**	4055.500	41.35	-4.02	54.0	12.65	AV	360.00	150	Vertical	Pass
4	6948.250	93.77	0.05	74.0	-19.77	Peak	228.00	150	Vertical	N/A
4**	6948.250	84.89	0.05	54.0	-30.89	AV	228.00	150	Vertical	N/A
5	10550.275	49.71	-3.14	74.0	24.29	Peak	0.00	150	Vertical	Pass
5**	10550.275	39.96	-3.14	54.0	14.04	AV	0.00	150	Vertical	Pass
6	16746.825	51.66	-1.59	74.0	22.34	Peak	11.00	150	Vertical	Pass
6**	16746.825	41.53	-1.59	54.0	12.47	AV	11.00	150	Vertical	Pass


A.5.2 Band Edge (Restricted-band)

Test Band	Mode	Channel	Verdict
U-NII-5	802.11ax(HE20) (SU)	Low	Pass
	802.11ax(HE40) (SU)	Low	Pass
	802.11ax(HE80) (SU)	Low	Pass
	802.11ax(HE160) (SU)	Low	Pass
U-NII-8	802.11ax(HE20) (SU)	Middle	Pass
	802.11ax(HE40) (SU)	High	Pass
	802.11ax(HE80) (SU)	High	Pass
	802.11ax(HE160) (SU)	Middle	Pass

Test Plots


Main Antenna:

U-NII-5 11ax20 (SU) Low Channel

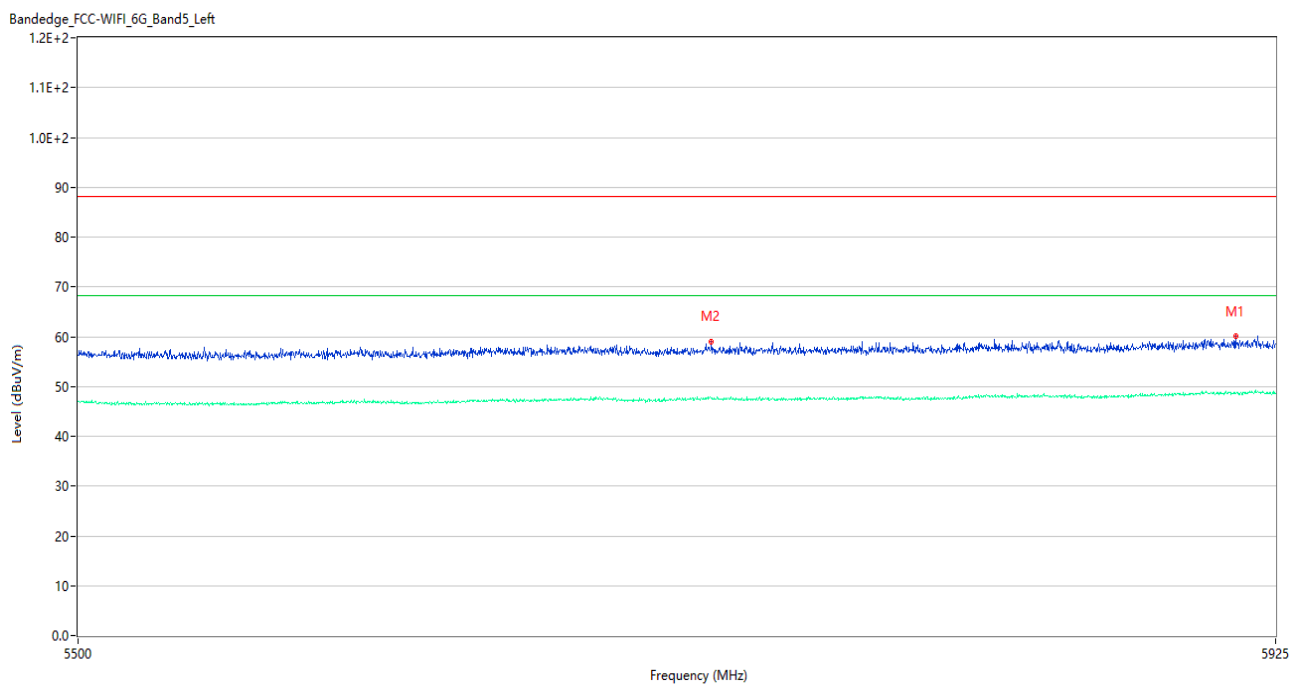


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5910.338	60.14	6.17	88.2	28.06	Peak	255.00	150	Horizontal	Pass
1**	5910.338	48.64	6.17	68.2	19.56	AV	255.00	150	Horizontal	Pass
2	5720.787	58.97	4.47	88.2	29.23	Peak	130.00	150	Horizontal	Pass
2**	5720.787	47.62	4.47	68.2	20.58	AV	130.00	150	Horizontal	Pass

U-NII-5 11ax40 (SU) Low Channel

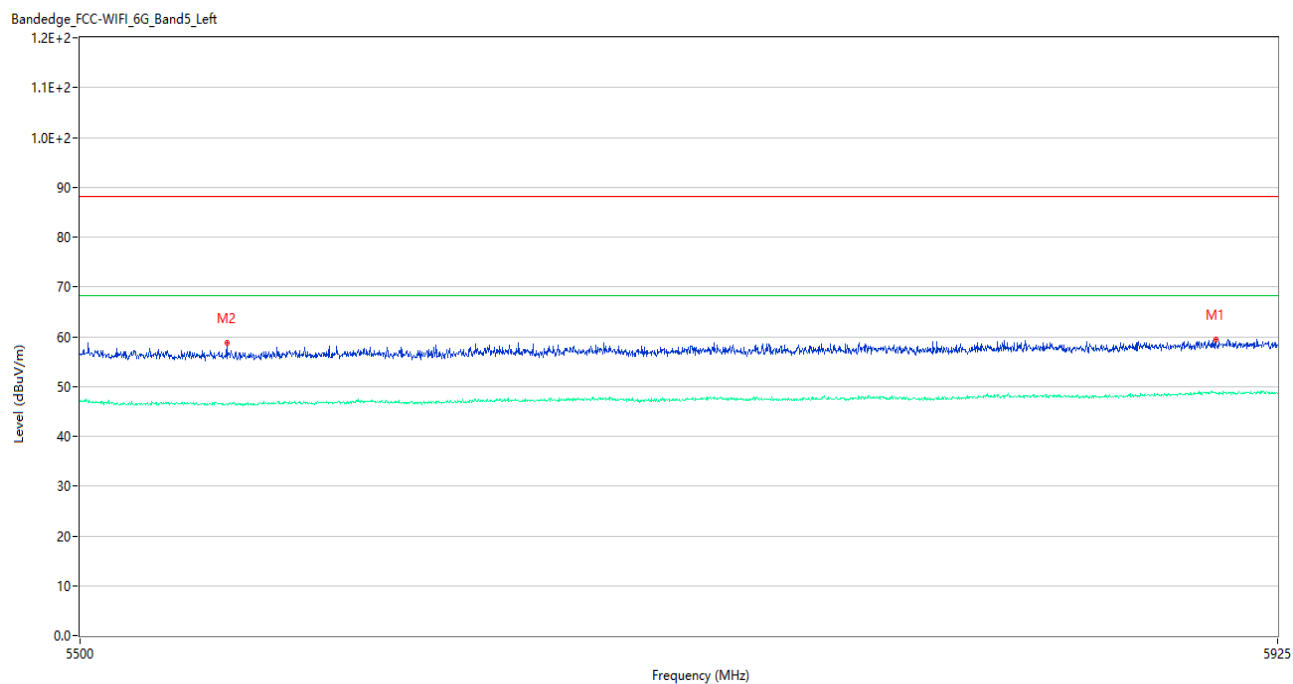


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5902.263	59.51	6.24	88.2	28.69	Peak	266.00	150	Vertical	Pass
1**	5902.263	48.60	6.24	68.2	19.60	AV	266.00	150	Vertical	Pass
2	5550.362	58.79	3.56	88.2	29.41	Peak	96.00	150	Vertical	Pass
2**	5550.362	46.31	3.56	68.2	21.89	AV	96.00	150	Vertical	Pass

U-NII-5 11ax80 (SU) Low Channel

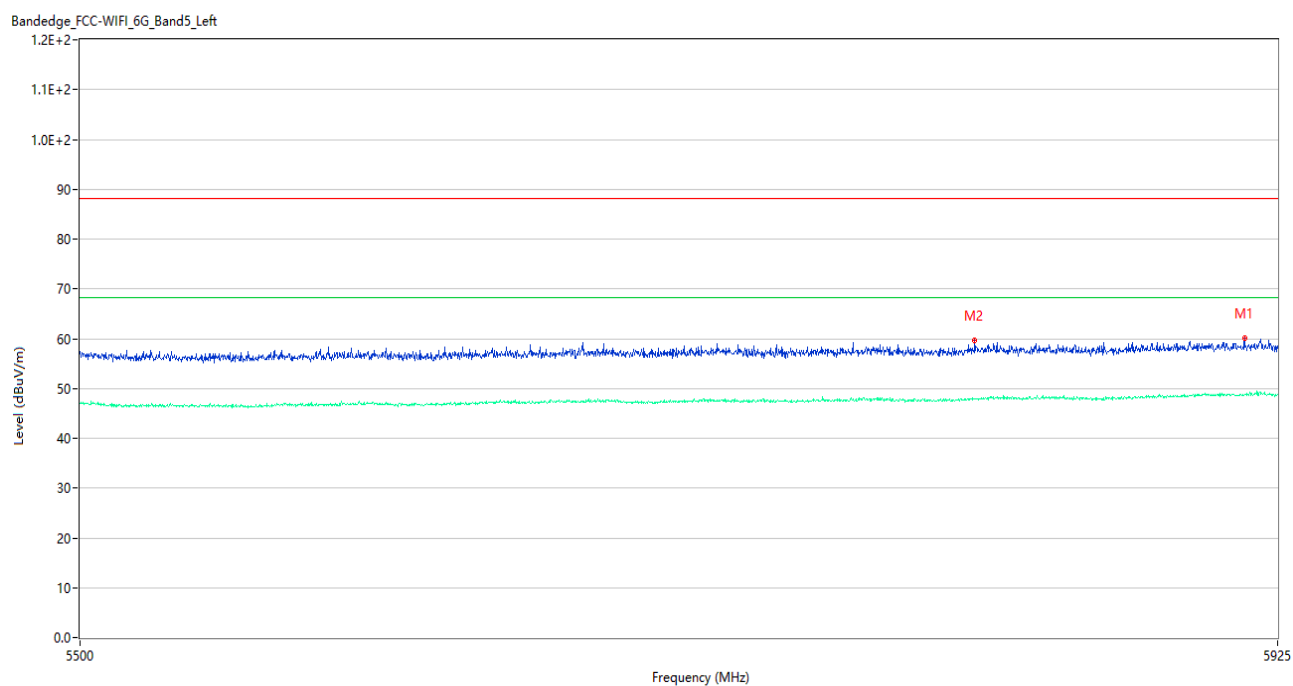


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5912.888	60.20	6.27	88.2	28.00	Peak	360.00	150	Horizontal	Pass
1**	5912.888	48.83	6.27	68.2	19.37	AV	360.00	150	Horizontal	Pass
2	5814.500	59.75	5.11	88.2	28.45	Peak	308.00	150	Horizontal	Pass
2**	5814.500	47.81	5.11	68.2	20.39	AV	308.00	150	Horizontal	Pass

U-NII-5 11ax160 (SU) Low Channel

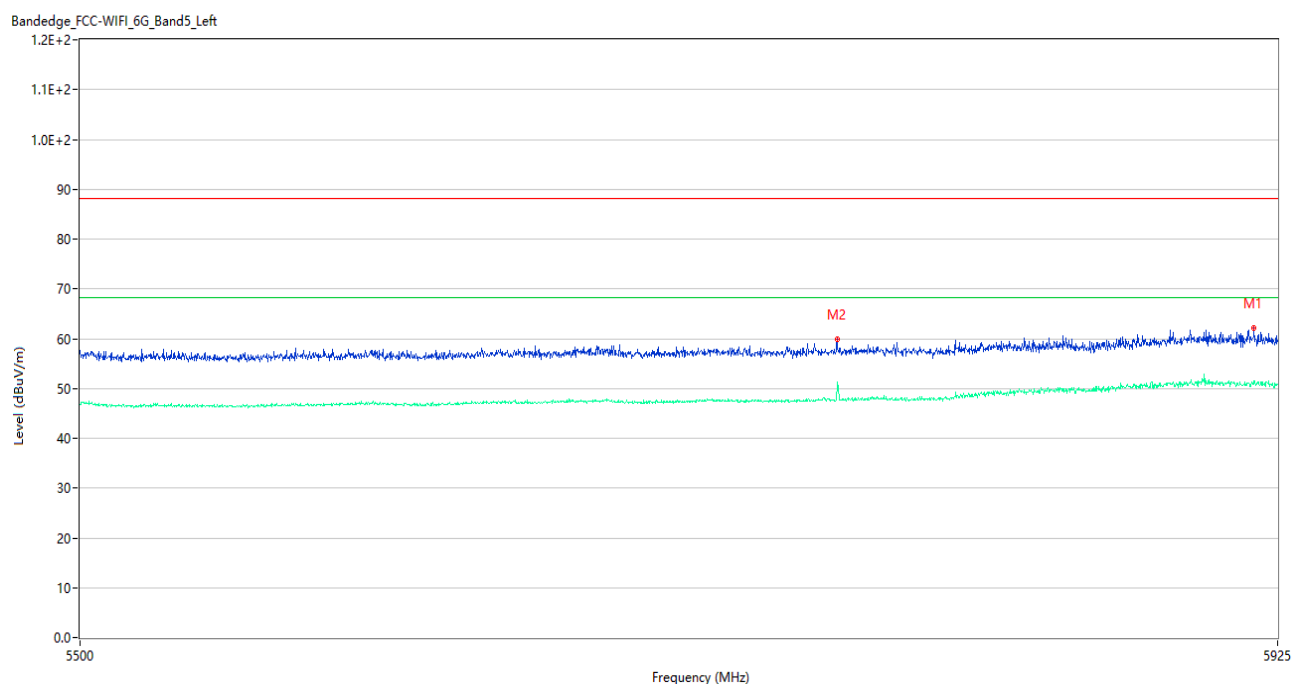


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5916.287	62.12	6.43	88.2	26.08	Peak	265.00	150	Vertical	Pass
1**	5916.287	50.82	6.43	68.2	17.38	AV	265.00	150	Vertical	Pass
2	5764.987	59.93	4.65	88.2	28.27	Peak	216.00	150	Vertical	Pass
2**	5764.987	50.94	4.65	68.2	17.26	AV	216.00	150	Vertical	Pass

U-NII-8 11ax20 (SU) High Channel

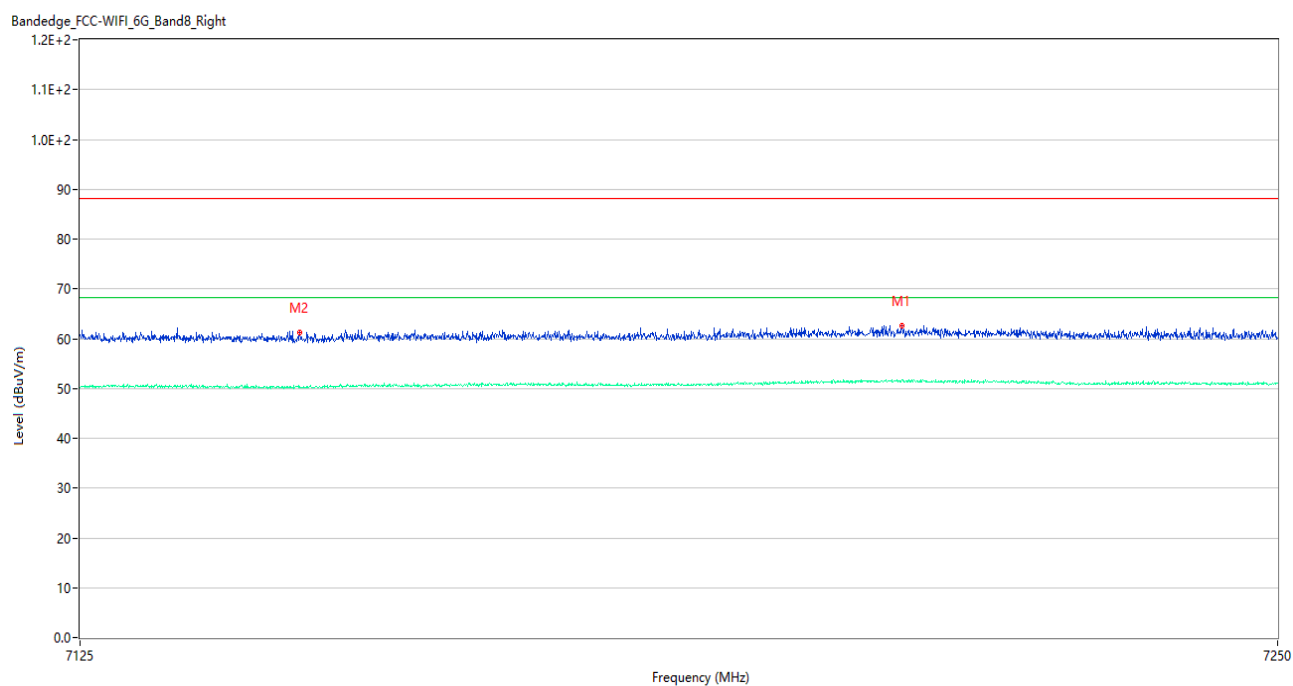


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7210.563	62.68	8.74	88.2	25.52	Peak	0.00	150	Vertical	Pass
1**	7210.563	51.70	8.74	68.2	16.50	AV	0.00	150	Vertical	Pass
2	7147.812	61.15	6.76	88.2	27.05	Peak	328.00	150	Vertical	Pass
2**	7147.812	50.14	6.76	68.2	18.06	AV	328.00	150	Vertical	Pass

U-NII-8 11ax40 (SU) High Channel

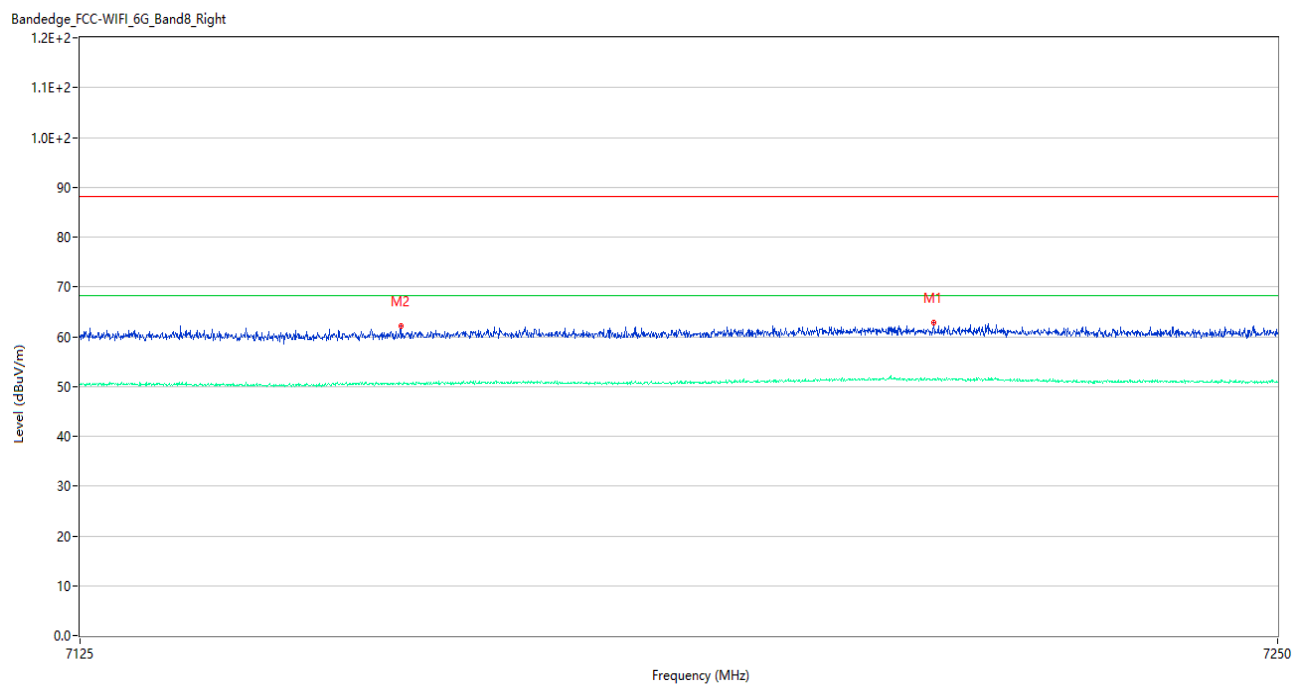


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7213.875	62.86	8.70	88.2	25.34	Peak	246.00	150	Vertical	Pass
1**	7213.875	51.53	8.70	68.2	16.67	AV	246.00	150	Vertical	Pass
2	7158.250	62.12	7.01	88.2	26.08	Peak	178.00	150	Vertical	Pass
2**	7158.250	50.53	7.01	68.2	17.67	AV	178.00	150	Vertical	Pass

U-NII-8 11ax80 (SU) High Channel

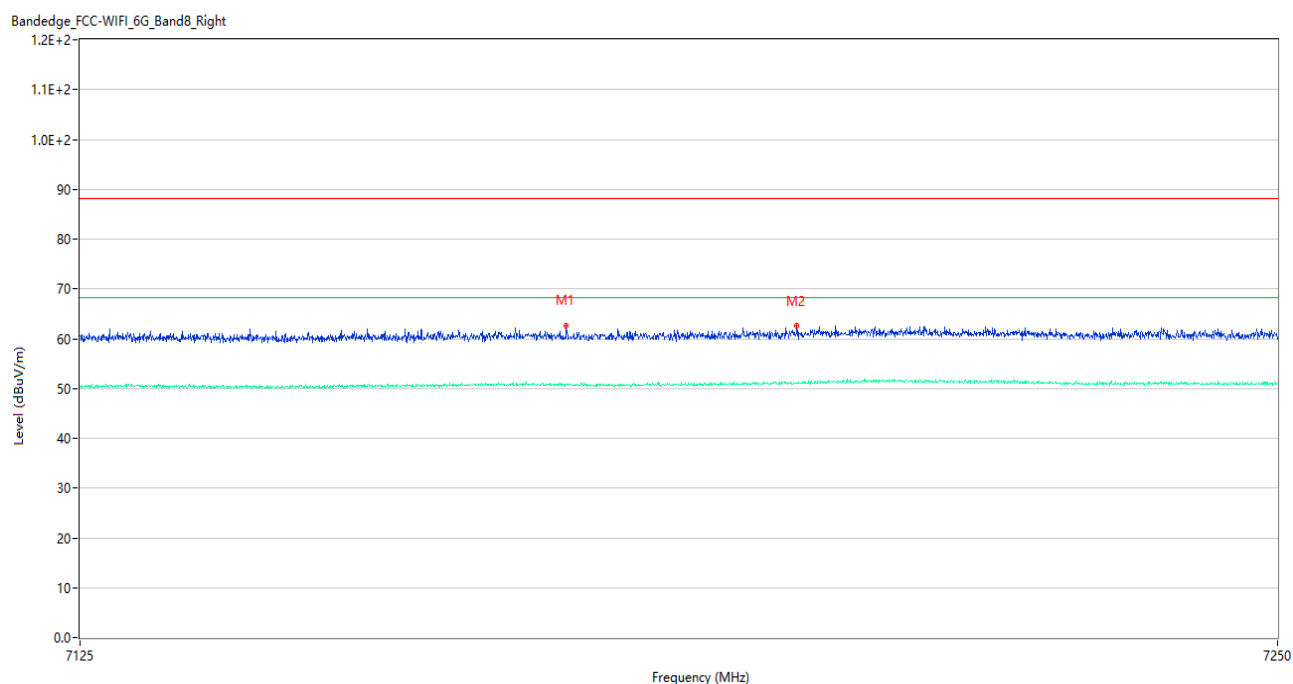

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7175.500	62.70	7.38	88.2	25.50	Peak	0.00	150	Horizontal	Pass
1**	7175.500	50.84	7.38	68.2	17.36	AV	0.00	150	Horizontal	Pass
2	7199.563	62.54	7.95	88.2	25.66	Peak	92.00	150	Horizontal	Pass
2**	7199.563	51.13	7.95	68.2	17.07	AV	92.00	150	Horizontal	Pass


U-NII-8 11ax160 (SU) Middle Channel

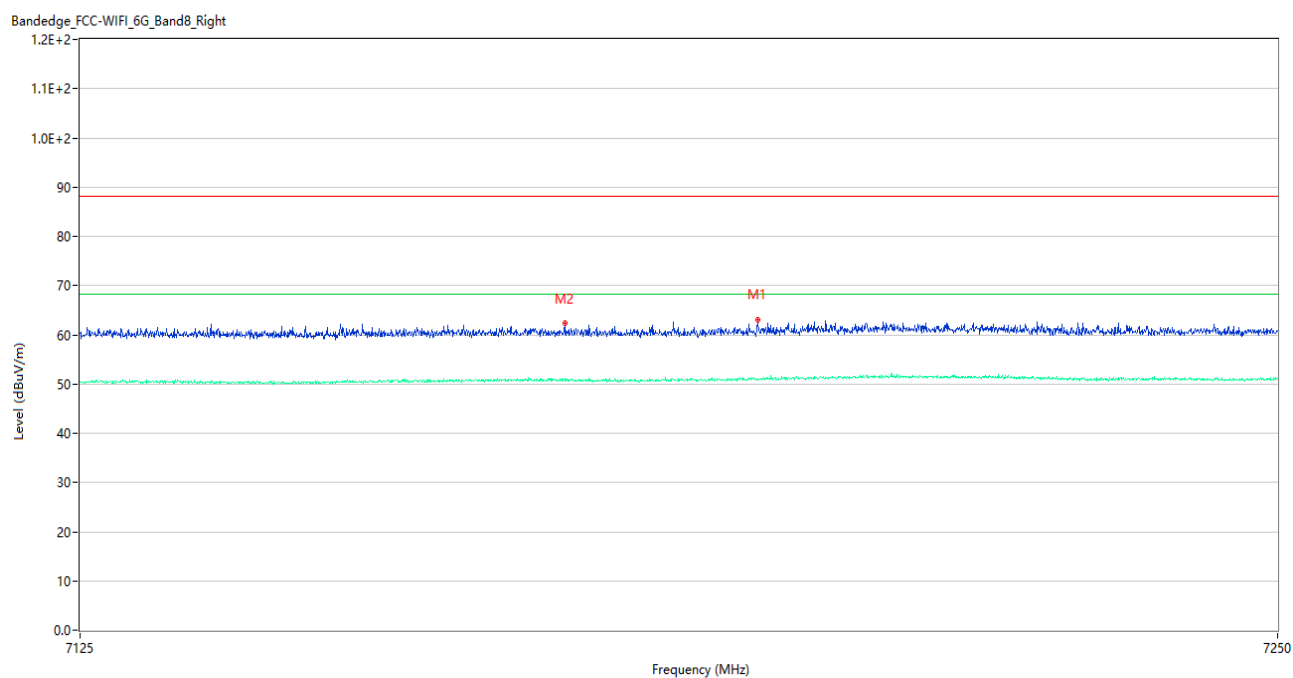

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7195.438	63.15	7.71	88.2	25.05	Peak	360.00	150	Horizontal	Pass
1**	7195.438	51.02	7.71	68.2	17.18	AV	360.00	150	Horizontal	Pass
2	7175.312	62.39	7.38	88.2	25.81	Peak	360.00	150	Horizontal	Pass
2**	7175.312	50.99	7.38	68.2	17.21	AV	360.00	150	Horizontal	Pass

Aux. Antenna:

U-NII-5 11ax20 (SU) Low Channel

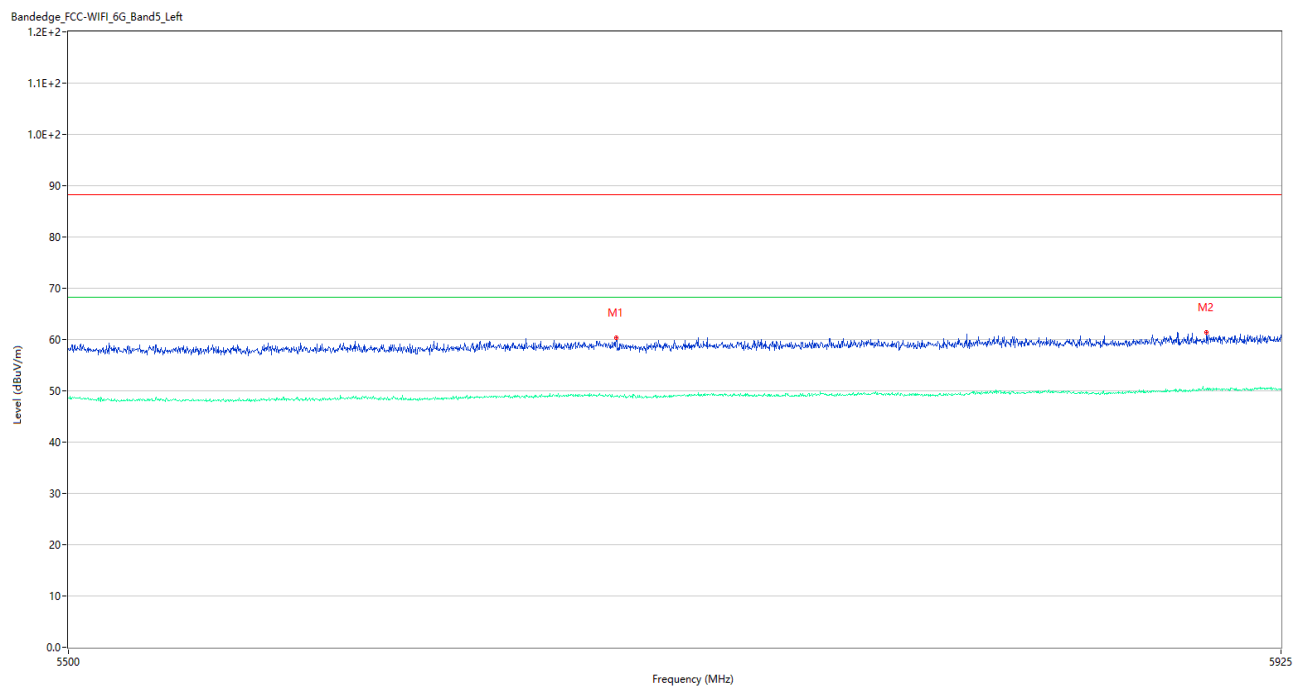


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5688.062	60.28	4.11	88.2	27.92	Peak	0.00	150	Horizontal	Pass
1**	5688.062	48.88	4.11	68.2	19.32	AV	0.00	150	Horizontal	Pass
2	5898.013	61.39	6.21	88.2	26.81	Peak	353.00	150	Horizontal	Pass
2**	5898.013	50.40	6.21	68.2	17.80	AV	353.00	150	Horizontal	Pass

U-NII-5 11ax40 (SU) Low Channel




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5596.475	59.81	3.70	88.2	28.39	Peak	0.00	150	Vertical	Pass
1**	5596.475	48.68	3.70	68.2	19.52	AV	0.00	150	Vertical	Pass
2	5916.500	61.58	6.44	88.2	26.62	Peak	268.00	150	Vertical	Pass
2**	5916.500	50.47	6.44	68.2	17.73	AV	268.00	150	Vertical	Pass

U-NII-5 11ax80 (SU) Low Channel

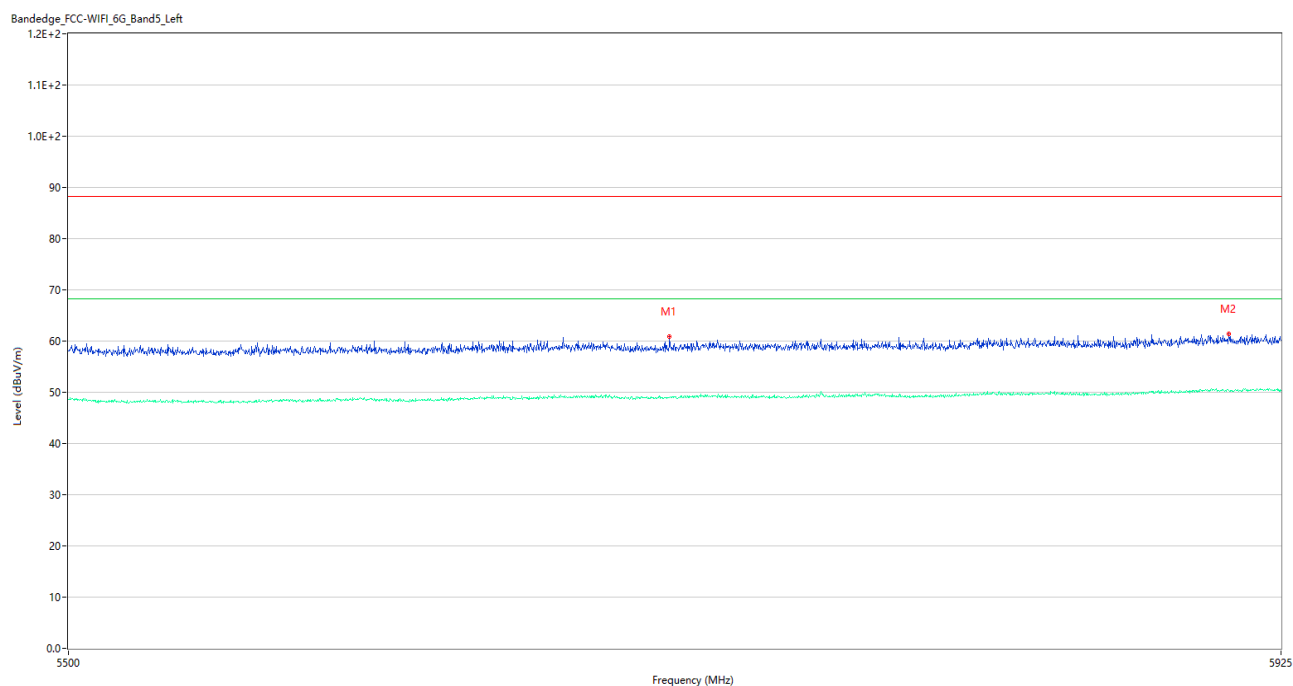


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5706.763	60.93	4.10	88.2	27.27	Peak	304.00	150	Horizontal	Pass
1**	5706.763	48.89	4.10	68.2	19.31	AV	304.00	150	Horizontal	Pass
2	5906.087	61.38	6.21	88.2	26.82	Peak	115.00	150	Horizontal	Pass
2**	5906.087	50.39	6.21	68.2	17.81	AV	115.00	150	Horizontal	Pass

U-NII-5 11ax160 (SU) Low Channel

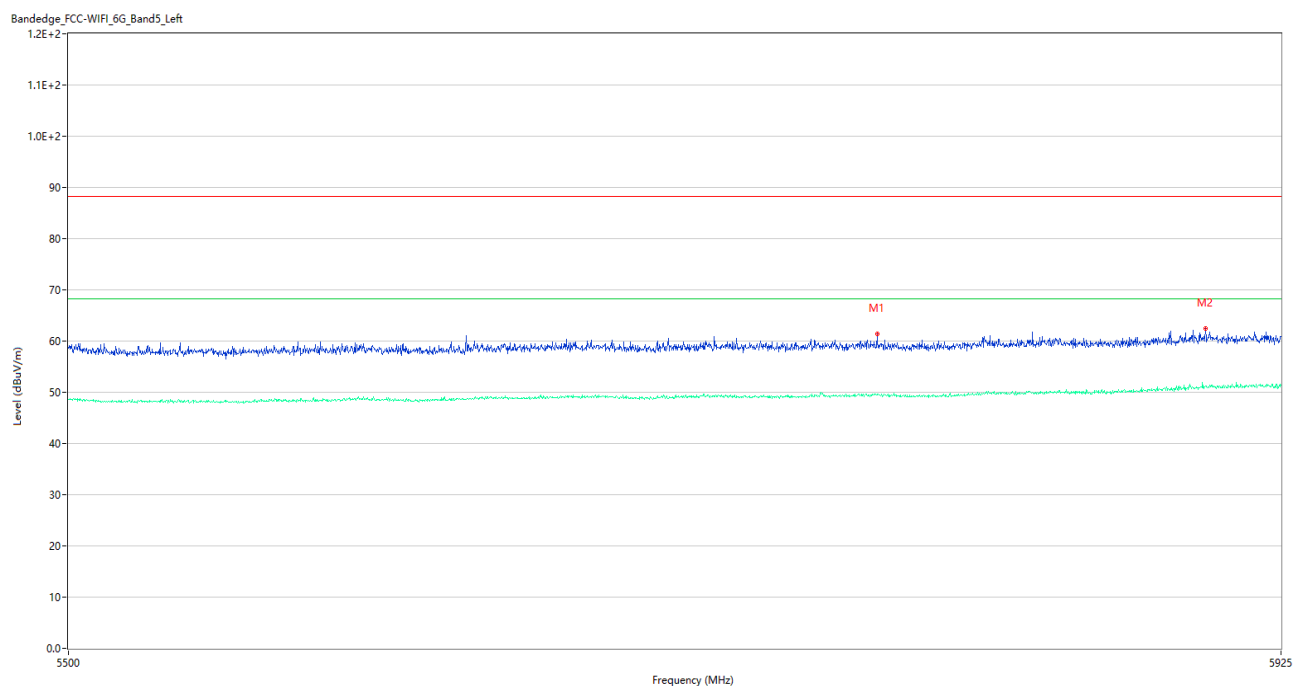


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5779.863	61.36	5.09	88.2	26.84	Peak	350.00	150	Horizontal	Pass
1**	5779.863	49.47	5.09	68.2	18.73	AV	350.00	150	Horizontal	Pass
2	5897.587	62.51	6.18	88.2	25.69	Peak	50.00	150	Horizontal	Pass
2**	5897.587	51.18	6.18	68.2	17.02	AV	50.00	150	Horizontal	Pass

U-NII-8 11ax20 (SU) High Channel

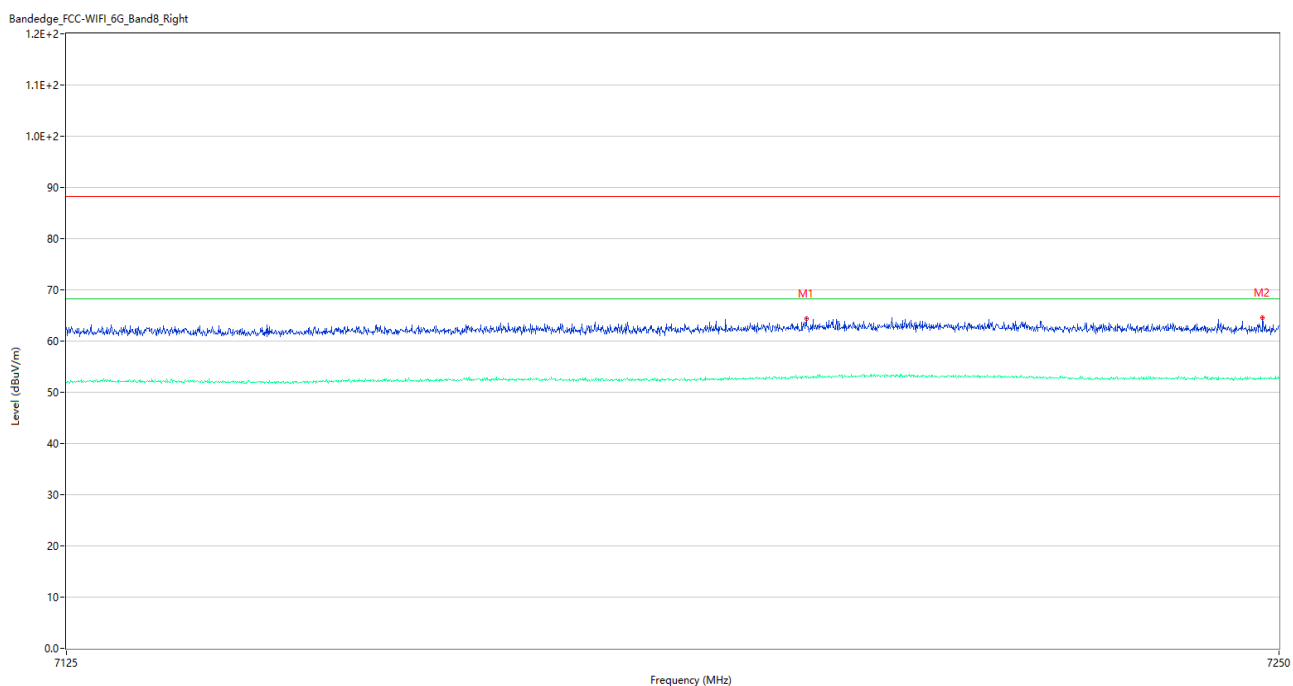


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7201.000	64.30	8.08	88.2	23.90	Peak	273.00	150	Vertical	Pass
1**	7201.000	52.86	8.08	68.2	15.34	AV	273.00	150	Vertical	Pass
2	7248.312	64.56	7.98	88.2	23.64	Peak	199.00	150	Vertical	Pass
2**	7248.312	52.69	7.98	68.2	15.51	AV	199.00	150	Vertical	Pass

U-NII-8 11ax40 (SU) High Channel

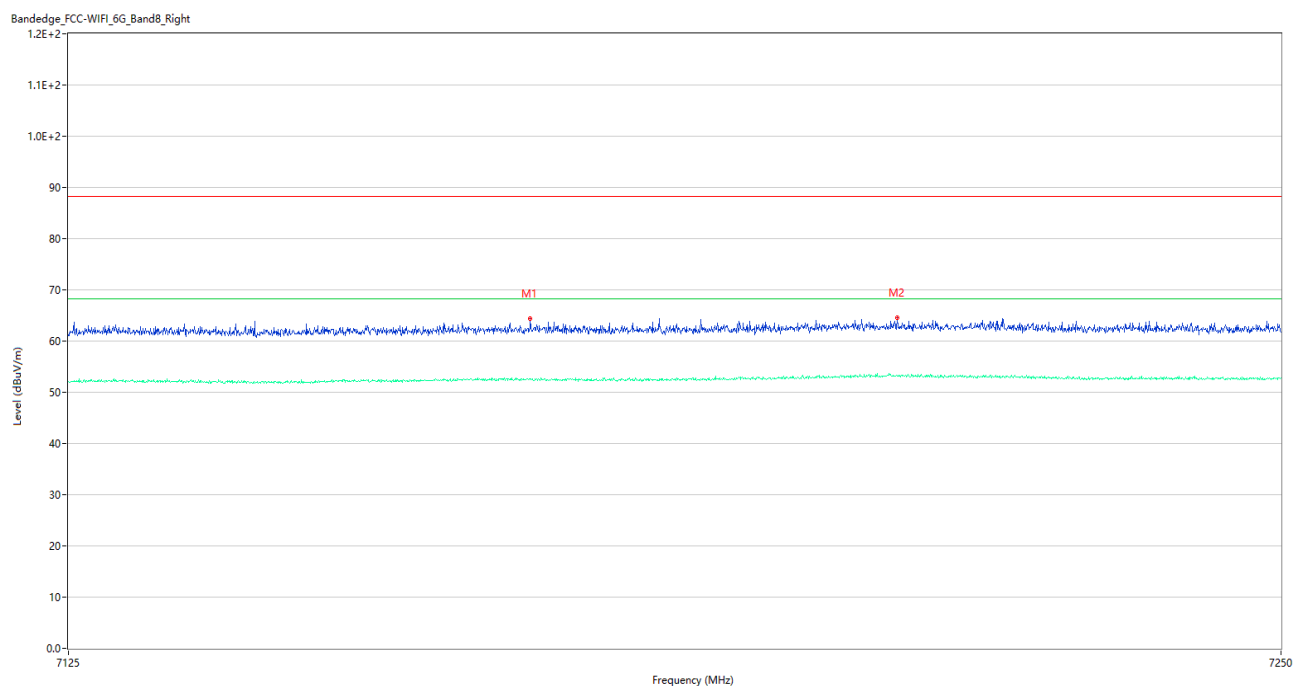


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7172.375	64.47	7.40	88.2	23.73	Peak	53.00	150	Horizontal	Pass
1**	7172.375	52.65	7.40	68.2	15.55	AV	53.00	150	Horizontal	Pass
2	7210.187	64.55	8.75	88.2	23.65	Peak	0.00	150	Horizontal	Pass
2**	7210.187	53.18	8.75	68.2	15.02	AV	0.00	150	Horizontal	Pass

U-NII-8 11ax80 (SU) High Channel

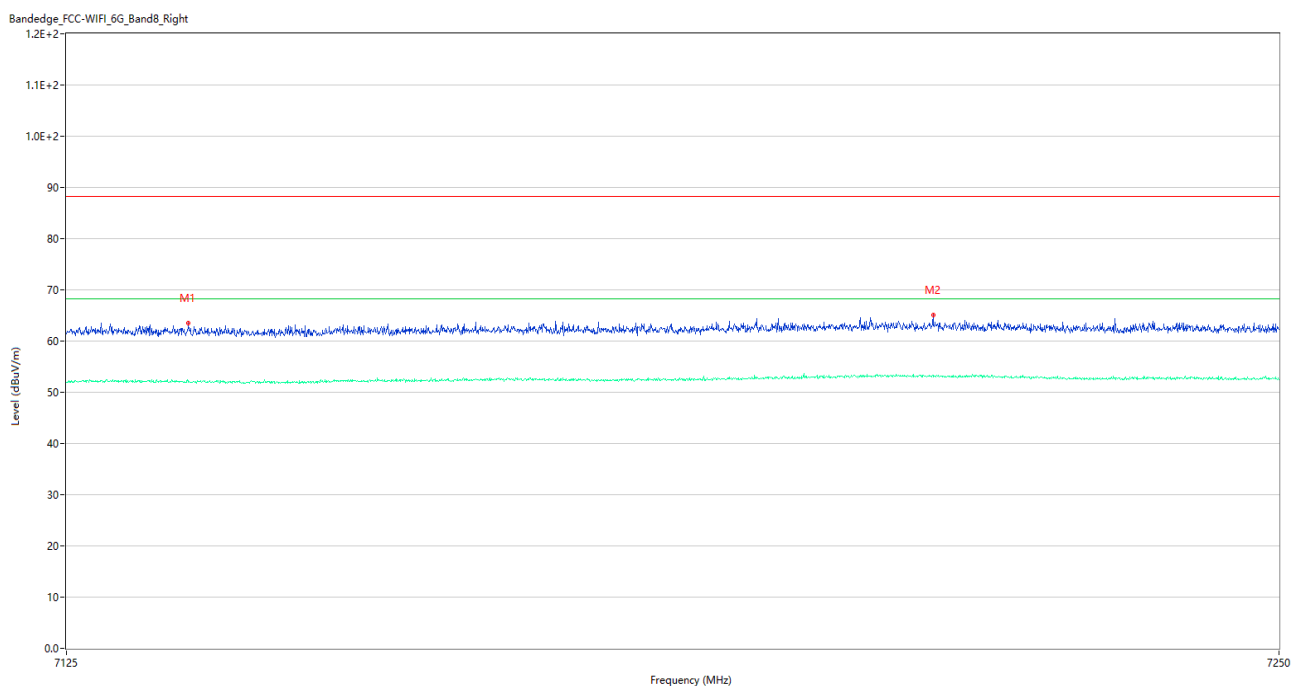

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7137.500	63.44	6.88	88.2	24.76	Peak	3.00	150	Horizontal	Pass
1**	7137.500	52.28	6.88	68.2	15.92	AV	3.00	150	Horizontal	Pass
2	7214.125	65.09	8.70	88.2	23.11	Peak	170.00	150	Horizontal	Pass
2**	7214.125	53.30	8.70	68.2	14.90	AV	170.00	150	Horizontal	Pass

U-NII-8 11ax160 (SU) Middle Channel

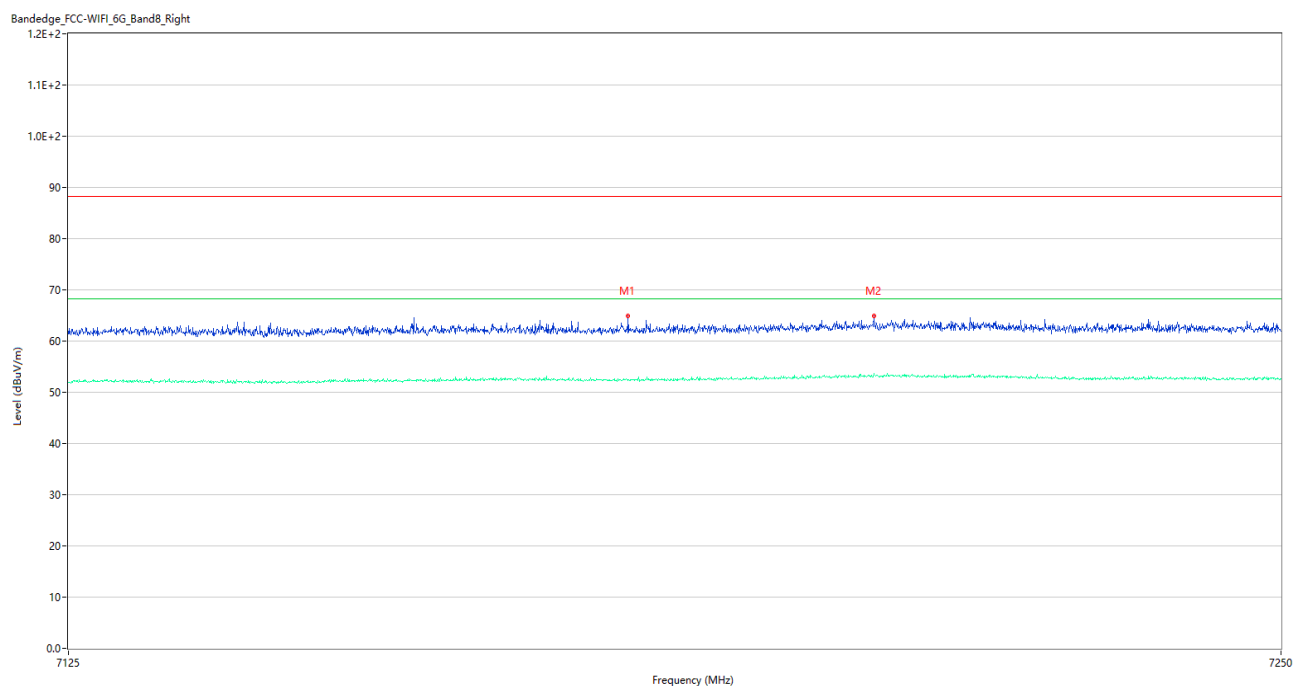

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	7182.437	64.87	7.35	88.2	23.33	Peak	360.00	150	Vertical	Pass
1**	7182.437	52.21	7.35	68.2	15.99	AV	360.00	150	Vertical	Pass
2	7207.813	64.88	8.60	88.2	23.32	Peak	23.00	150	Vertical	Pass
2**	7207.813	53.64	8.60	68.2	14.56	AV	23.00	150	Vertical	Pass

A.6 Contention Based Protocol

Interference Signals used for Tests

Interference Signals Type	Bandwidth (MHz)
AWGN	10

Regulated Threshold Level

Test Method	Interference threshold level
☒ Conducted	The Regulated Threshold Level = -62 dBm (assumes a 0 dBi receive antenna) and minimum antenna gain is 2.97 dBi. The Regulated Threshold Level = -62 dBm + G (2.97 dBi) = -59.03 dBm
☐ Radiation	

Test Data

U-NII-5 (5925 MHz to 6425 MHz)									
Operation Mode	Channel Number	Channel Frequency (MHz)	AWGN Signal Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna Gain (dBi)	Path Loss ^{Note1} (dB)	Adjusted Power ^{Note2} (dBm)	Detection Limit (dBm)	EUT Tx StatusNote3
802.11ax (HE20)	37	6135	6135	-59.71	2.97	0	-62.68	-62	Off
				-60.40	2.97	0	-63.37	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
802.11ax (HE160)	47	6185	6110	-59.25	2.97	0	-62.22	-62	Off
				-60.70	2.97	0	-63.67	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
			6185	-59.11	2.97	0	-62.08	-62	Off
				-60.55	2.97	0	-63.52	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
			6260	-59.16	2.97	0	-62.13	-62	Off
				-60.38	2.97	0	-63.35	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On

Note1: The corrected AWGN power is located at the antenna connection port, so path losses are not considered.

Note2: Adjusted Power (dBm) = Injected (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB).

Note3: The AWGN level is reported for the following conditions:


- Off: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds.
- Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently.
- On: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds.

Contention Based Protocol Detection Rate														
Detection Limit			90%											
Operation Mode	Channel Frequency (MHz)	AWGN Signal Frequency (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Rate	Test Result
802.11ax (HE20)	6135	6135	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%	PASS
802.11ax (HE160)	6185	6110	✓	✓	✓	✓	✓	✓	✓	✓	X	✓	90%	PASS
		6185	✓	✓	✓	✓	✓	X	✓	✓	✓	✓	90%	PASS
		6260	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%	PASS

Test Plots

Plots of Incumbent signal(AWGN) Level


802.11ax (HE20)-Channel 53

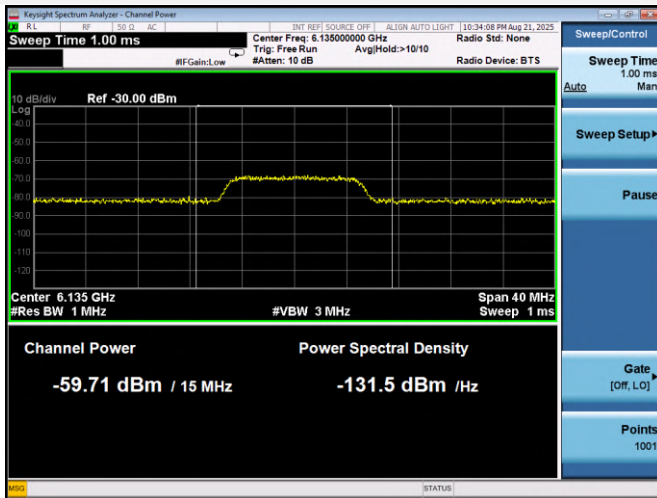

802.11ax (HE160)-Channel 47 (Low Edge)



802.11ax (HE160)-Channel 47 (Middle Edge)

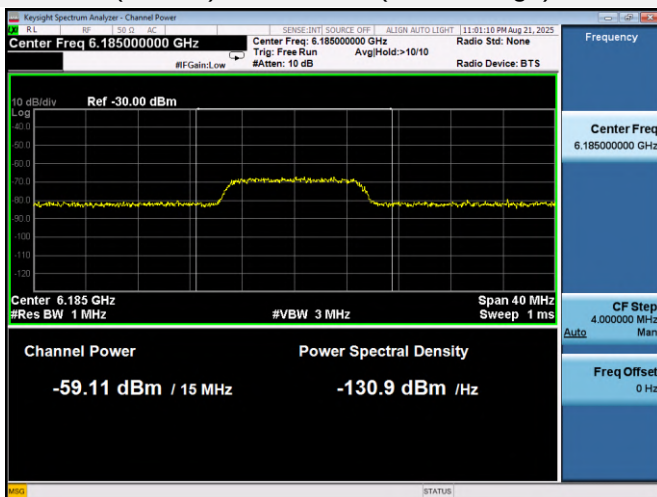


802.11ax (HE160)-Channel 47 (High Edge)




Plots of EUT Tx waveform


802.11ax (HE20)-Channel 53

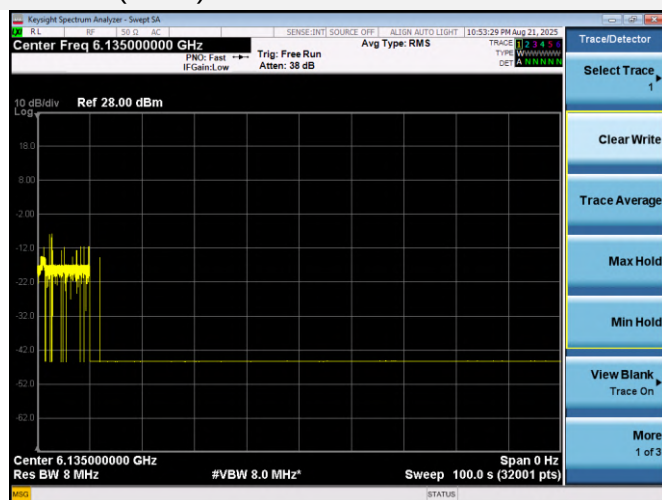


802.11ax (HE160)-Channel 47 (Low Edge)

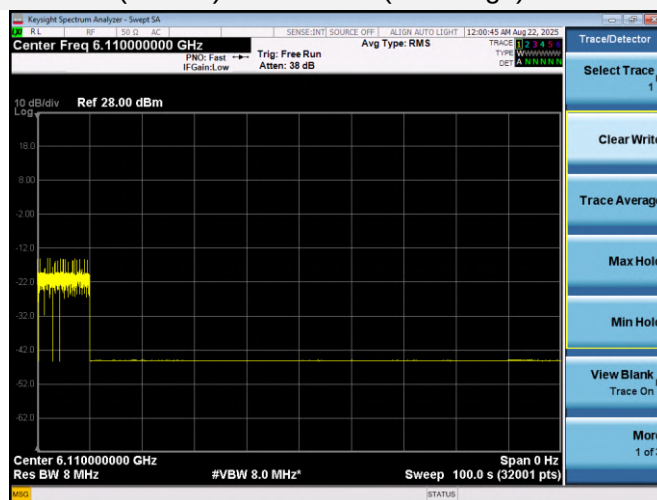

802.11ax (HE160)-Channel 47 (Middle Edge)

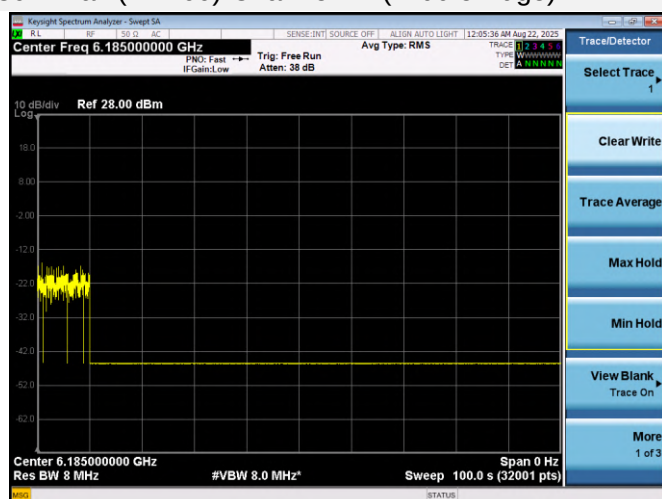

802.11ax (HE160)-Channel 47 (High Edge)

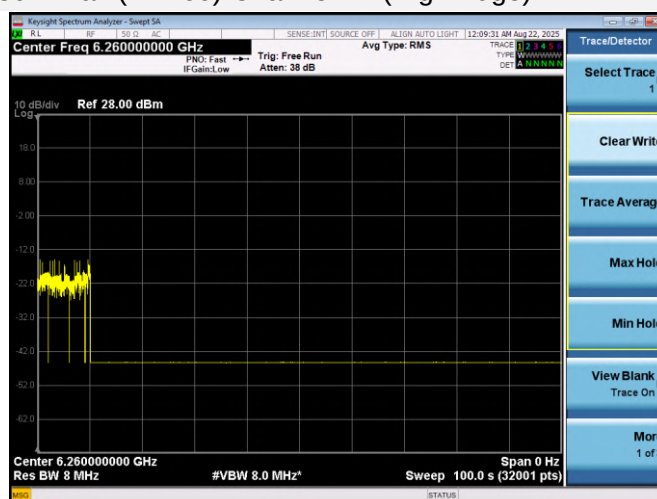

Interference Signals used for Tests

Interference Signals Type	Bandwidth (MHz)
AWGN	10

Regulated Threshold Level

Test Method	Interference threshold level
☒ Conducted	The Regulated Threshold Level = -62 dBm (assumes a 0 dBi receive antenna) and minimum antenna gain is 2.97 dBi.
☐ Radiation	The Regulated Threshold Level = -62 dBm + G (2.97 dBi) = -58.03 dBm

Test Data

U-NII-6 (6425 MHz to 6525 MHz)									
Operation Mode	Channel Number	Channel Frequency (MHz)	AWGN Signal Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna Gain (dBi)	Path Loss ^{Note1} (dB)	Adjusted Power ^{Note2} (dBm)	Detection Limit (dBm)	EUT Tx Status ^{Note3}
802.11ax (HE20)	97	6435	6435	-59.32	2.97	0	-62.29	-62	Off
				-60.75	2.97	0	-63.72	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
802.11ax (HE160)	111	6505	6430	-59.31	2.97	0	-62.28	-62	Off
				-60.62	2.97	0	-63.59	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
			6505	-59.69	2.97	0	-62.66	-62	Off
				-61.05	2.97	0	-64.02	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
			6580	-60.12	2.97	0	-63.09	-62	Off
				-61.50	2.97	0	-64.47	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On

Note1: The corrected AWGN power is located at the antenna connection port, so path losses are not considered.

Note2: Adjusted Power (dBm) = Injected (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB).

Note3: The AWGN level is reported for the following conditions:


- Off: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds.
- Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently.
- On: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds.

Contention Based Protocol Detection Rate														
Detection Limit			90%											
Operation Mode	Channel Frequency (MHz)	AWGN Signal Frequency (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Rate	Test Result
802.11ax (HE20)	6455	6455	✓	✓	✓	✓	X	✓	✓	✓	✓	✓	90%	PASS
802.11ax (HE160)	6505	6430	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%	PASS
		6505	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%	PASS
		6580	✓	✓	✓	✓	✓	✓	✓	✓	✓	X	90%	PASS


Test Plots

Plots of Incumbent signal(AWGN) Level


802.11ax (HE20)-Channel 101

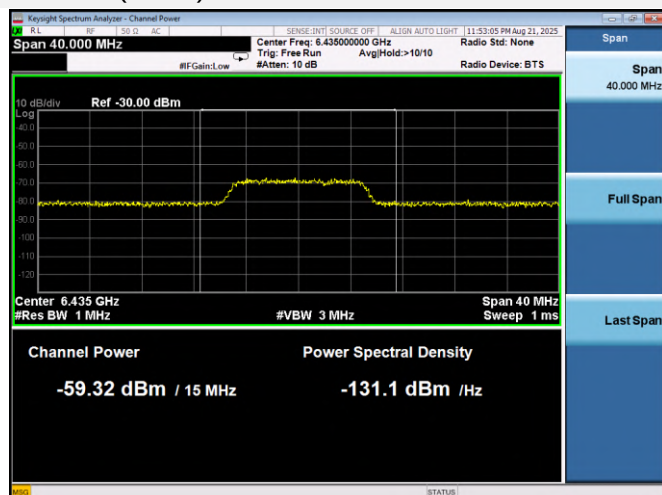


802.11ax (HE160)-Channel 111 (Low Edge)

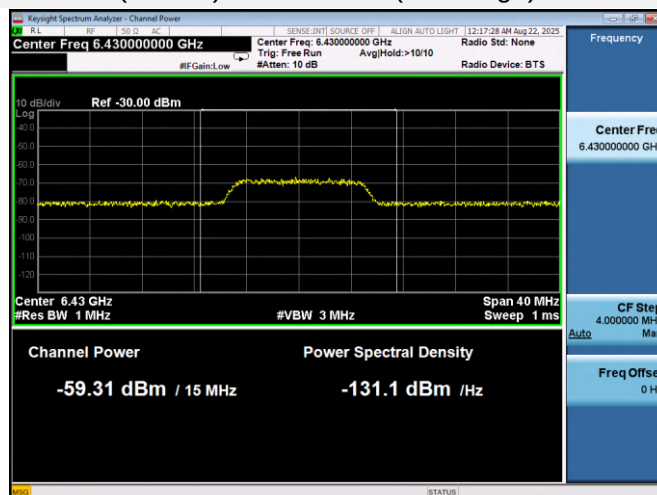

802.11ax (HE160)-Channel 111 (Middle Edge)

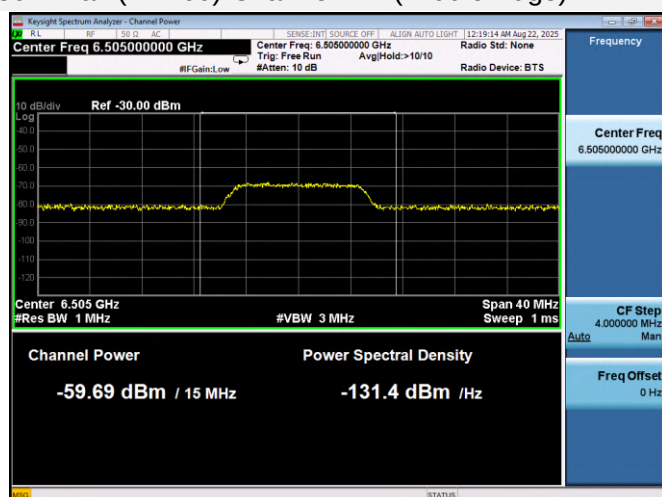


802.11ax (HE160)-Channel 111 (High Edge)

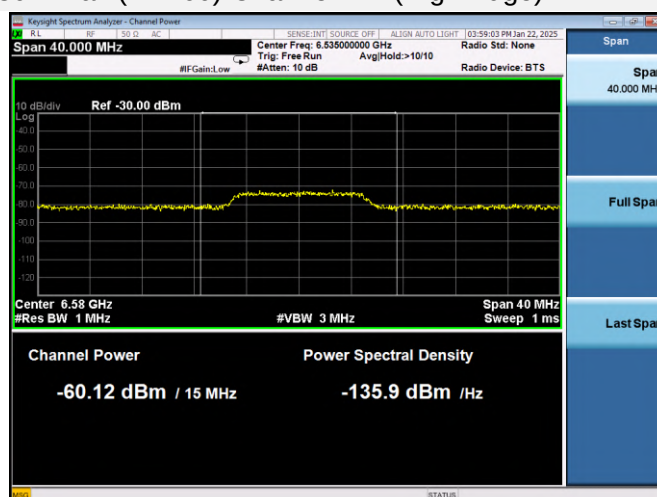


Plots of EUT Tx waveform


802.11ax (HE20)-Channel 101

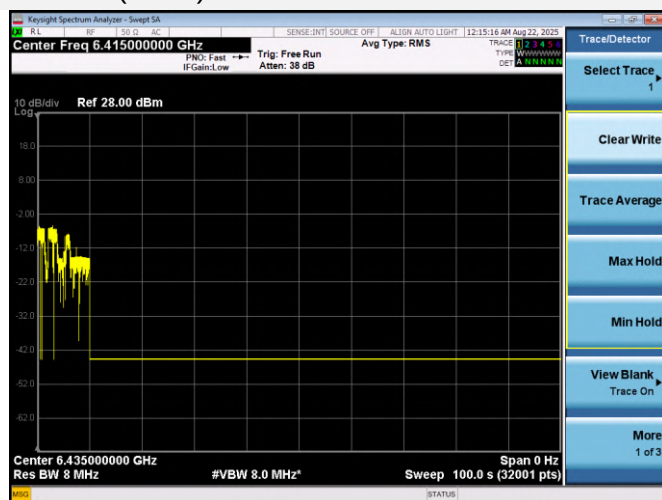


802.11ax (HE160)-Channel 111 (Low Edge)

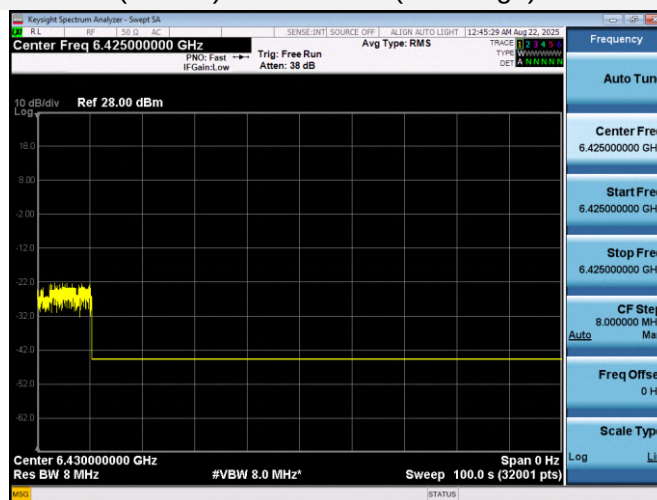

802.11ax (HE160)-Channel 111 (Middle Edge)

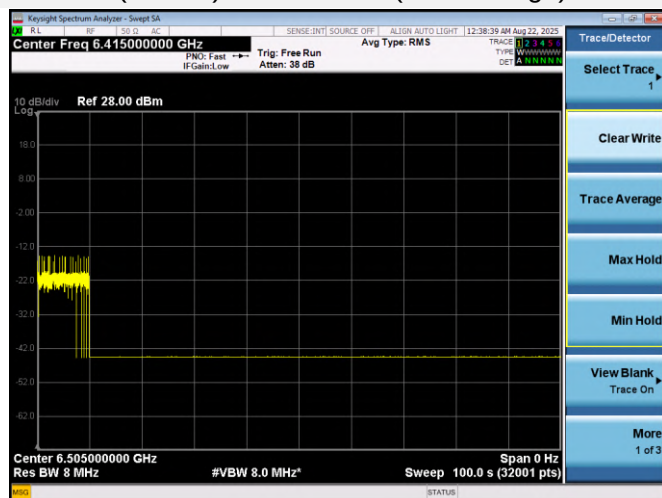

802.11ax (HE160)-Channel 111 (High Edge)

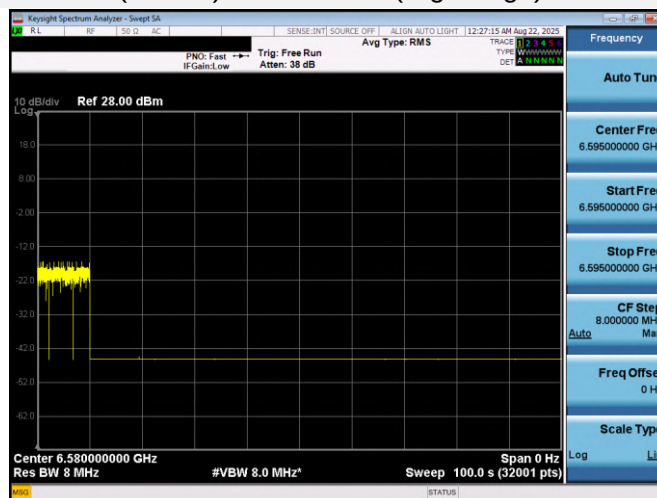

Interference Signals used for Tests

Interference Signals Type	Bandwidth (MHz)
AWGN	10

Regulated Threshold Level

Test Method	Interference threshold level
☒ Conducted	The Regulated Threshold Level = -62 dBm (assumes a 0 dBi receive antenna) and minimum antenna gain is 2.97 dBi.
☐ Radiation	The Regulated Threshold Level = -62 dBm + G (2.97 dBi) = -58.03 dBm

Test Data

U-NII-7 (6525 MHz to 6875 MHz)									
Operation Mode	Channel Number	Channel Frequency (MHz)	AWGN Signal Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna Gain (dBi)	Path Loss ^{Note1} (dB)	Adjusted Power ^{Note2} (dBm)	Detection Limit (dBm)	EUT Tx Status ^{Note3}
802.11ax (HE20)	129	6595	6595	-59.47	2.97	0	-62.44	-62	Off
				-60.26	2.97	0	-63.23	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
802.11ax (HE160)	143	6665	6590	-59.46	2.97	0	-62.43	-62	Off
				-60.40	2.97	0	-63.37	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
			6665	-59.26	2.97	0	-62.23	-62	Off
				-60.62	2.97	0	-63.59	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
			6740	-59.33	2.97	0	-62.30	-62	Off
				-60.18	2.97	0	-63.15	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On

Note1: The corrected AWGN power is located at the antenna connection port, so path losses are not considered.

Note2: Adjusted Power (dBm) = Injected (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB).

Note3: The AWGN level is reported for the following conditions:


- Off: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds.
- Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently.
- On: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds.

Contention Based Protocol Detection Rate														
Detection Limit			90%											
Operation Mode	Channel Frequency (MHz)	AWGN Signal Frequency (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Rate	Test Result
802.11ax (HE20)	6615	6615	✓	X	✓	✓	✓	✓	✓	✓	✓	✓	90%	PASS
802.11ax (HE160)	6665	6590	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%	PASS
		6665	✓	✓	✓	✓	✓	X	✓	✓	✓	✓	90%	PASS
		6740	✓	✓	✓	✓	✓	✓	✓	X	✓	✓	90%	PASS

Test Plots

Plots of Incumbent signal(AWGN) Level


802.11ax (HE20)-Channel 149

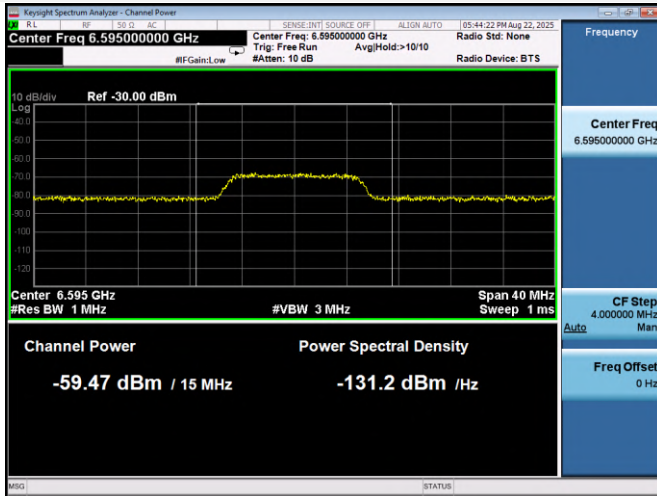

802.11ax (HE160)-Channel 143 (Low Edge)



802.11ax (HE160)-Channel 143 (Middle Edge)

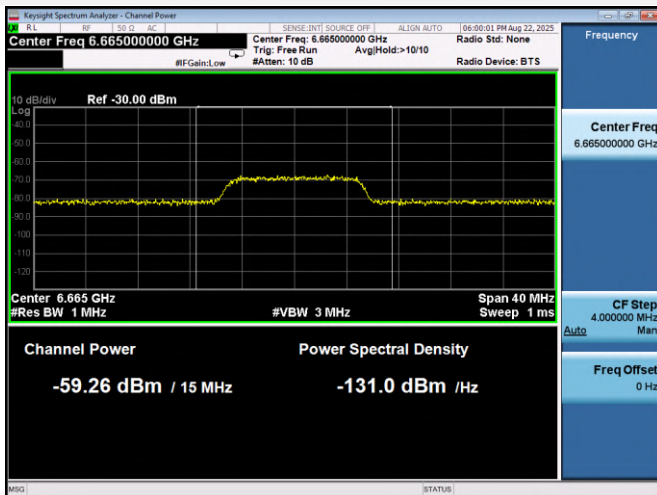


802.11ax (HE160)-Channel 143 (High Edge)




Plots of EUT Tx waveform


802.11ax (HE20)-Channel 149

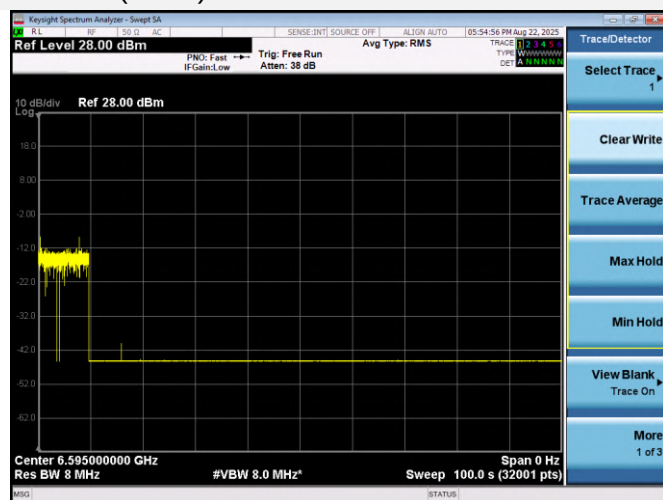


802.11ax (HE160)-Channel 143 (Low Edge)

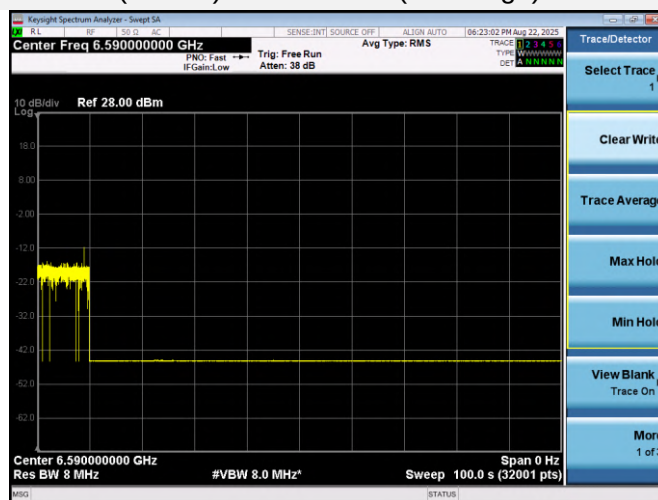

802.11ax (HE160)-Channel 143 (Middle Edge)

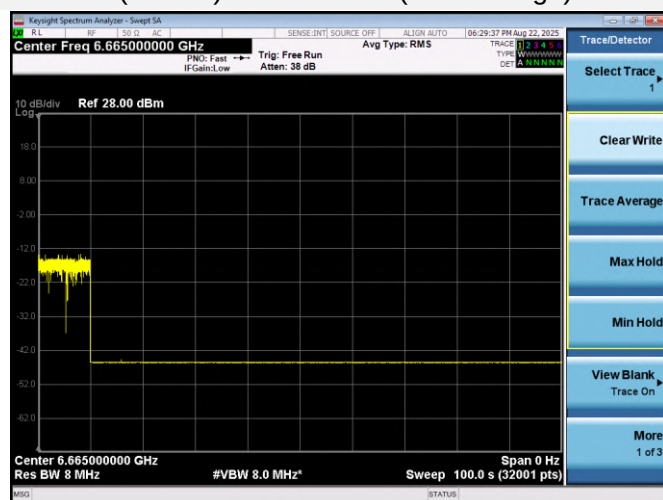

802.11ax (HE160)-Channel 143 (High Edge)

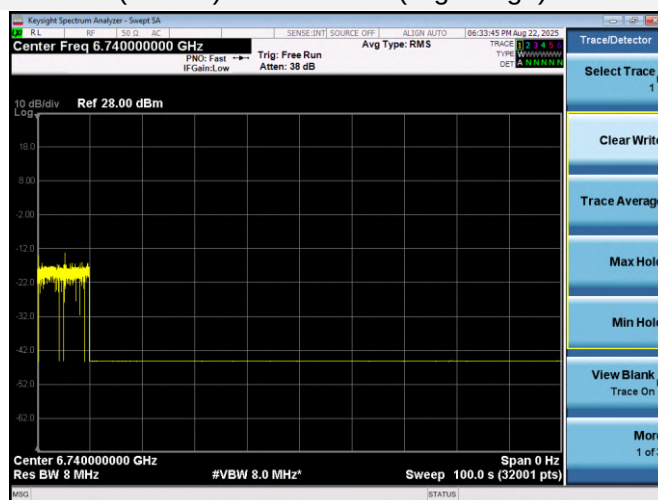

Interference Signals used for Tests

Interference Signals Type	Bandwidth (MHz)
AWGN	10

Regulated Threshold Level

Test Method	Interference threshold level
☒ Conducted	The Regulated Threshold Level = -62 dBm (assumes a 0 dBi receive antenna) and minimum antenna gain is 2.97 dBi.
☐ Radiation	The Regulated Threshold Level = -62 dBm + G (2.97 dBi) = -58.03 dBm

Test Data

U-NII-8 (6875 MHz to 7125 MHz)									
Operation Mode	Channel Number	Channel Frequency (MHz)	AWGN Signal Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna Gain (dBi)	Path Loss ^{Note1} (dB)	Adjusted Power ^{Note2} (dBm)	Detection Limit (dBm)	EUT Tx Status ^{Note3}
802.11ax (HE20)	193	6915	6915	-59.48	2.97	0	-62.45	-62	Off
				-60.36	2.97	0	-63.33	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
802.11ax (HE160)	207	6985	6910	-59.46	2.97	0	-62.43	-62	Off
				-60.45	2.97	0	-63.42	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
			6985	-60.03	2.97	0	-63.00	-62	Off
				-61.55	2.97	0	-64.52	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On
			7060	-59.20	2.97	0	-62.17	-62	Off
				-59.92	2.97	0	-62.89	-62	Minimal
				-82.50	2.97	0	-85.47	-62	On

Note1: The corrected AWGN power is located at the antenna connection port, so path losses are not considered.

Note2: Adjusted Power (dBm) = Injected (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB).

Note3: The AWGN level is reported for the following conditions:


- Off: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds.
- Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently.
- On: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds.

Contention Based Protocol Detection Rate														
Detection Limit			90%											
Operation Mode	Channel Frequency (MHz)	AWGN Signal Frequency (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Rate	Test Result
802.11ax (HE20)	6935	6935	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%	PASS
802.11ax (HE160)	6985	6910	✓	✓	✓	✓	X	✓	✓	✓	✓	✓	90%	PASS
		6985	✓	✓	✓	✓	✓	✓	✓	✓	X	✓	90%	PASS
		7060	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100%	PASS

Test Plots

Plots of Incumbent signal(AWGN) Level


802.11ax (HE20)-Channel 213

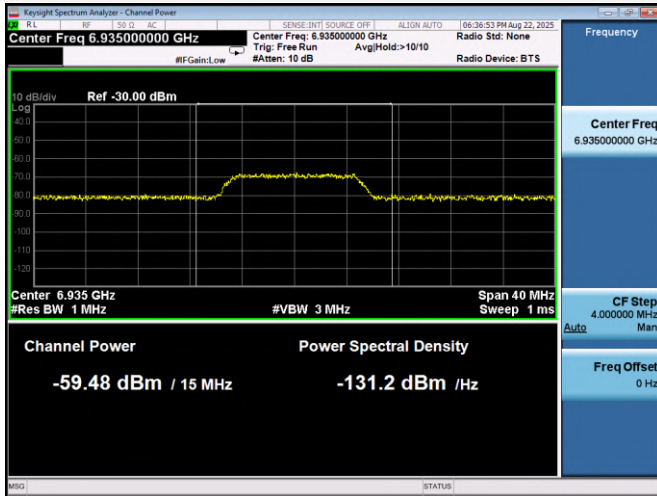

802.11ax (HE160)-Channel 207 (Low Edge)



802.11ax (HE160)-Channel 207 (Middle Edge)

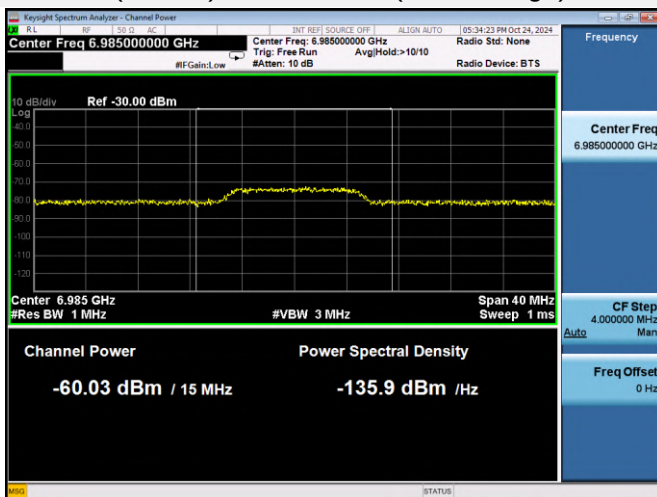


802.11ax (HE160)-Channel 207 (High Edge)




Plots of EUT Tx waveform


802.11ax (HE20)-Channel 213

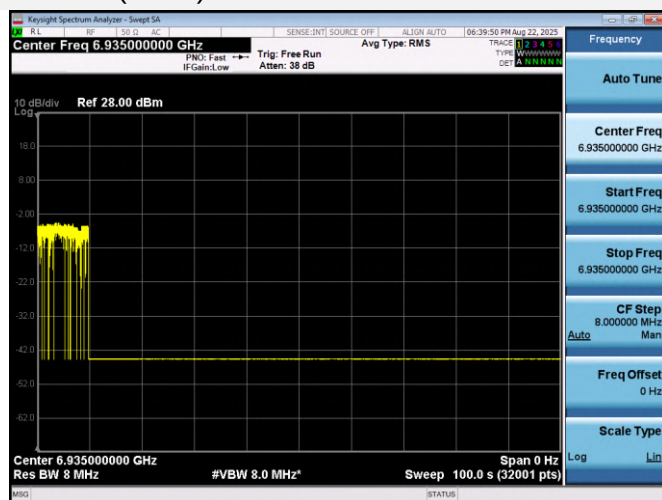


802.11ax (HE160)-Channel 207 (Low Edge)

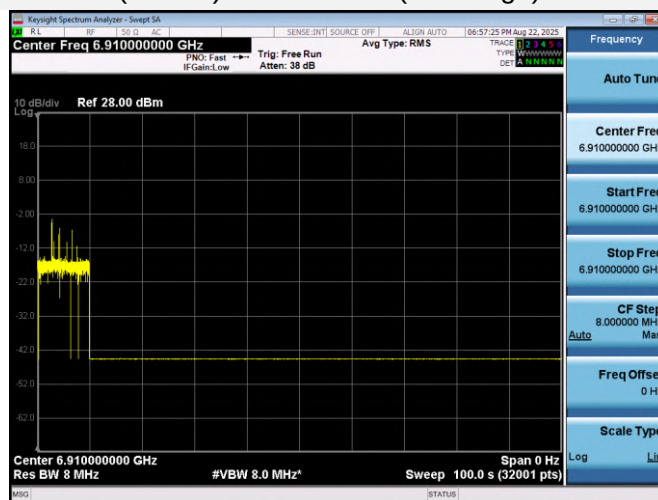

802.11ax (HE160)-Channel 207 (Middle Edge)

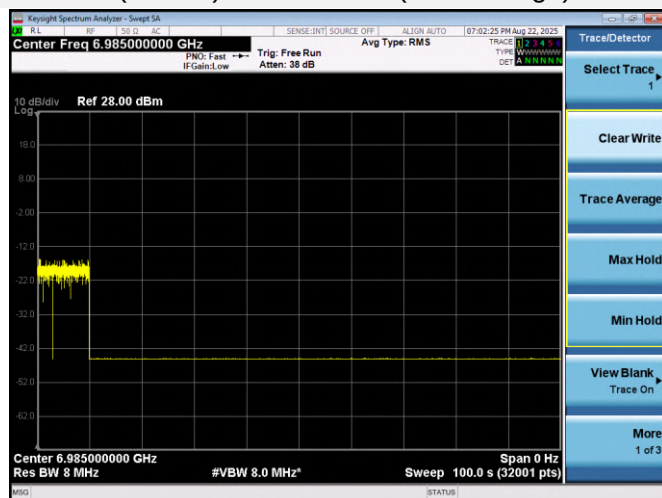

802.11ax (HE160)-Channel 207 (High Edge)

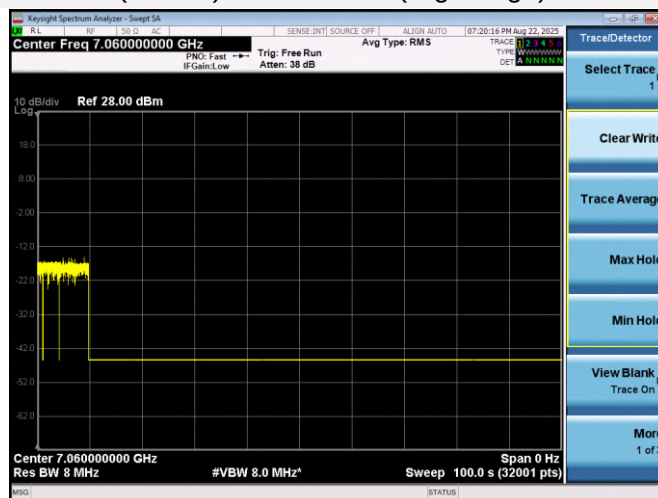


A.7 In-Band Emissions

Note 1: All antenna were tested, but only the worst case has been reported in this report.


Test Data and Plots

11ax20 (SU), U-NII-5, Low Channel

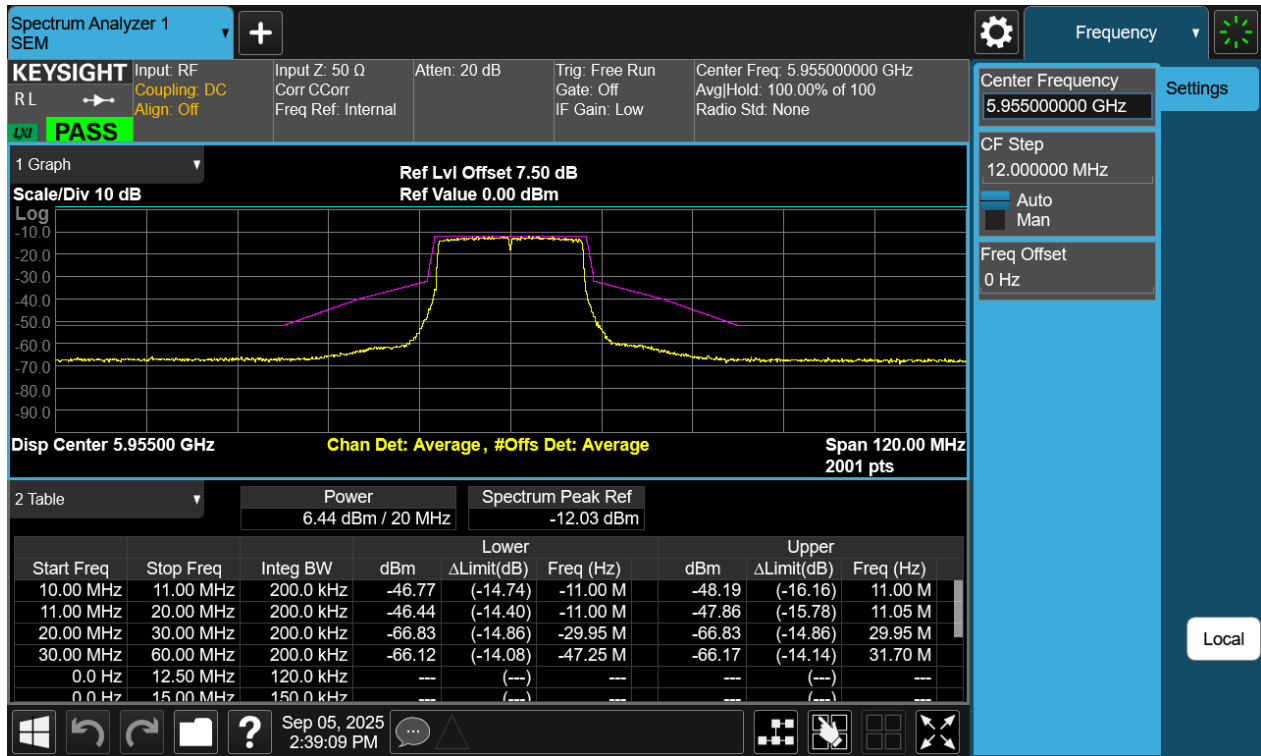


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-60	-30	0.2	-47.25	5907.75	-54.08	-66.12	14.08	Pass
-30	-20	0.2	-29.95	5925.05	-54.8	-66.83	14.86	Pass
-20	-11	0.2	-11	5944	-34.4	-46.44	14.4	Pass
-11	-10	0.2	-11	5944	-34.74	-46.77	14.74	Pass
10	11	0.2	11	5966	-36.16	-48.19	16.16	Pass
11	20	0.2	11.05	5966.05	-35.82	-47.86	15.78	Pass
20	30	0.2	29.95	5984.95	-54.8	-66.83	14.86	Pass
30	60	0.2	31.7	5986.7	-54.14	-66.17	14.14	Pass

11ax20 (SU), U-NII-5, Middle Channel

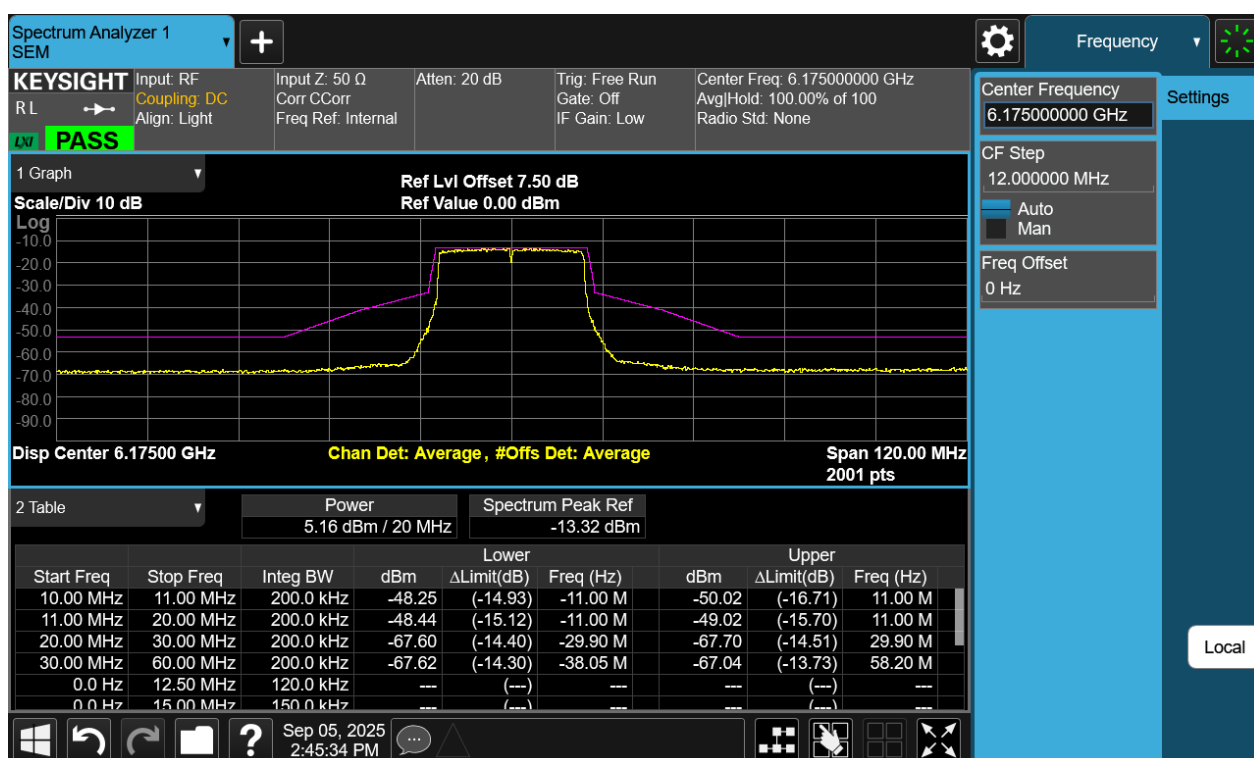


Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-60	-30	0.2	-38.05	6136.95	-54.3	-67.62	14.3	Pass
-30	-20	0.2	-29.9	6145.1	-54.28	-67.6	14.4	Pass
-20	-11	0.2	-11	6164	-35.12	-48.44	15.12	Pass
-11	-10	0.2	-11	6164	-34.93	-48.25	14.93	Pass
10	11	0.2	11	6186	-36.71	-50.02	16.71	Pass
11	20	0.2	11	6186	-35.7	-49.02	15.7	Pass
20	30	0.2	29.9	6204.9	-54.39	-67.7	14.51	Pass
30	60	0.2	58.2	6233.2	-53.73	-67.04	13.73	Pass

11ax20 (SU), U-NII-5, High Channel

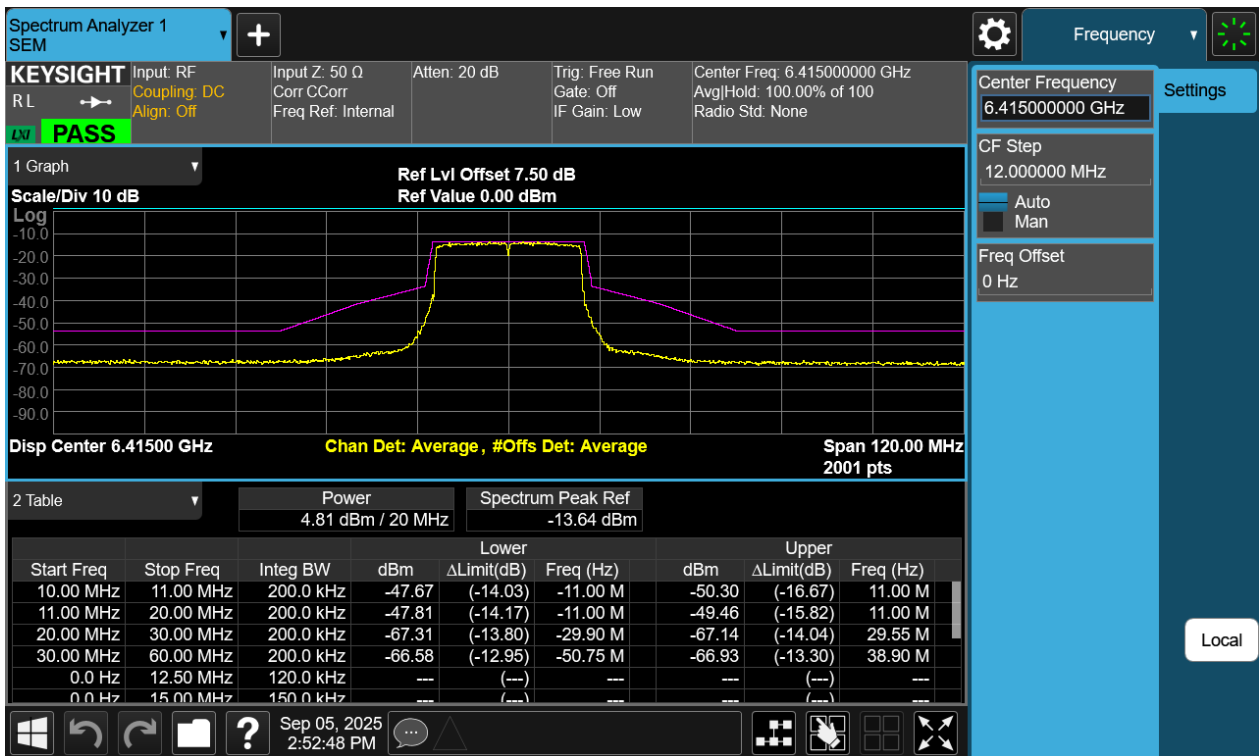

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-60	-30	0.2	-50.75	6364.25	-52.95	-66.58	12.95	Pass
-30	-20	0.2	-29.9	6385.1	-53.68	-67.31	13.8	Pass
-20	-11	0.2	-11	6404	-34.17	-47.81	14.17	Pass
-11	-10	0.2	-11	6404	-34.03	-47.67	14.03	Pass
10	11	0.2	11	6426	-36.67	-50.3	16.67	Pass
11	20	0.2	11	6426	-35.82	-49.46	15.82	Pass
20	30	0.2	29.55	6444.55	-53.5	-67.14	14.04	Pass
30	60	0.2	38.9	6453.9	-53.3	-66.93	13.3	Pass

11ax40 (SU), U-NII-5, Low Channel

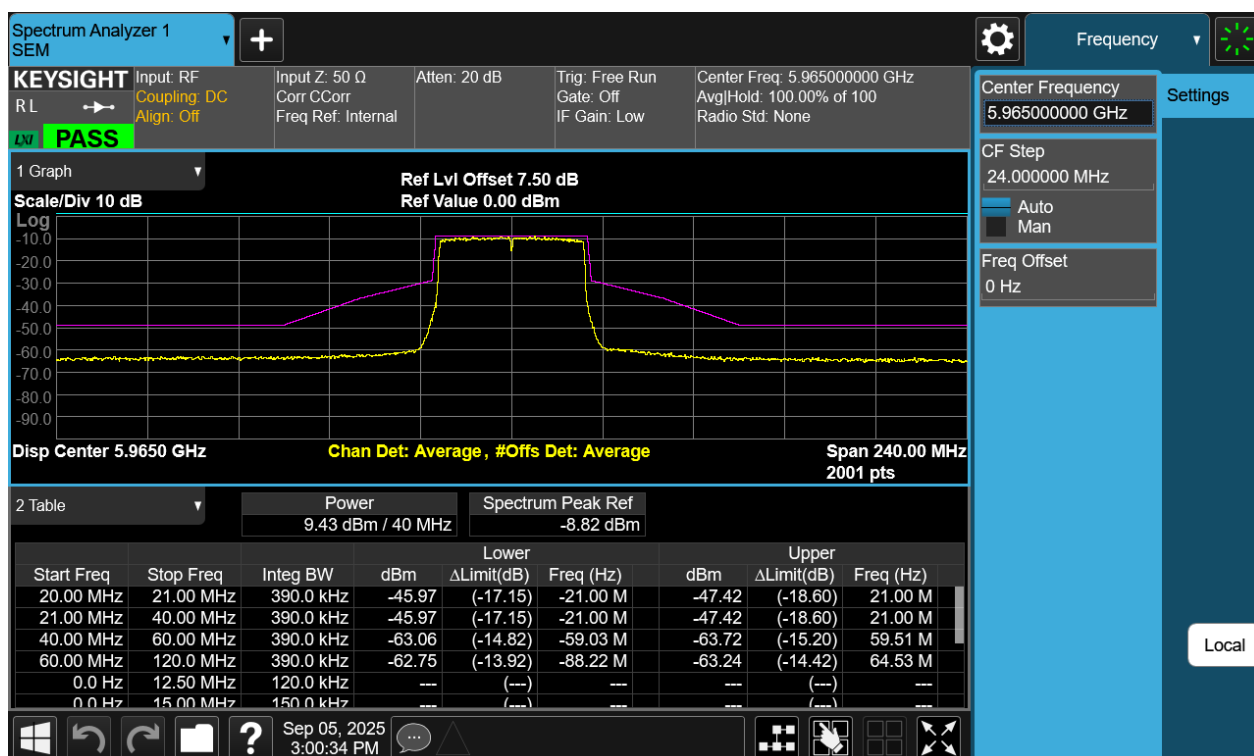

Start Frequency (MHz)	Stop Frequency (MHz)	RBW (MHz)	Frequency Rel (MHz)	Frequency Abs (MHz)	Power Rel (dB)	Power Abs (dBm)	Margin (dB)	Verdict
-120	-60	0.4	-88.220959	5876.779041	-53.92	-62.75	13.92	Pass
-60	-40	0.4	-59.025183	5905.974817	-54.24	-63.06	14.82	Pass
-40	-21	0.4	-21	5944	-37.15	-45.97	17.15	Pass
-21	-20	0.4	-21	5944	-37.15	-45.97	17.15	Pass
20	21	0.4	21	5986	-38.6	-47.42	18.6	Pass
21	40	0.4	21	5986	-38.6	-47.42	18.6	Pass
40	60	0.4	59.512591	6024.512591	-54.9	-63.72	15.2	Pass
60	120	0.4	64.5329	6029.5329	-54.42	-63.24	14.42	Pass