

ANTENNA TEST REPORT

For

Auria

Model Number: FS2345

Report Number : WT248001431

Test Laboratory : Shenzhen Academy of Metrology and Quality
Inspection
Site Location : No.4, Tongfa Road, Xili Street, Nanshan District,
Shenzhen, Guangdong, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn

TEST REPORT DECLARATION

Applicant : FRONTIER SMART TECHNOLOGIES
Address : Harston Mill, Harston, Cambridge, CB22 7GG,
UNITED KINGDOM
Manufacturer : FRONTIER SMART TECHNOLOGIES
Address : Harston Mill, Harston, Cambridge, CB22 7GG,
UNITED KINGDOM
EUT Description : Auria
Brand : --
MODEL No : FS2345

Test Standards: IEEE Std 149-1979

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:




(Zhou Li 周立)

Date:

Jul. 19, 2024

Checked by:




(Wan Xiao Jing 万晓婧)

Date:

Jul. 19, 2024

Approved by:



(Lin Bin 林斌)

Date:

Jul. 19, 2024

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer	5
3. GENERAL INFORMATION	6
4. TEST PROCEDURE	6
5. SUMMATION TEST REPORT	7
5.1. Equipment Under Test DescRiption	7
5.2. Test Setup	7
6. TEST EQUIPMENT USED	8
7. TEST DATA	8
7.1. TEST RESULTS.....	8
8. TEST PHOTO	11

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Frequency Band (MHz)	Gain (max)	Efficiency (max)
2400~2483.5	1.86	43.92
5150~5350	3.02	53.43
5470~5725	2.04	48.97
5725~5875	0.22	38.79

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier, or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate, or incomplete product information provided by the applicant/manufacturer.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

3. GENERAL INFORMATION

Over the Air Measurements (Active) are performed in a Satimo SG-24. The SG-24 has 23 probe antennas mounted with equal spacing on a circular arch. Electronic switching of the probe antennas provides outstanding measurement speed. The geometry of the setup, with only a Styrofoam column within 1.6 meters of the EUT, ensures minimum interference and low ripple on the measured radiation patterns.

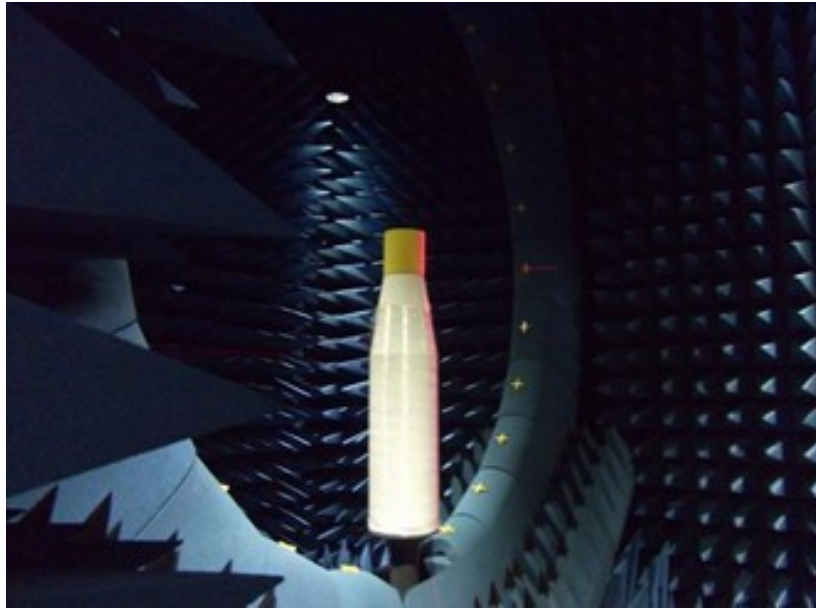


Figure 1– SG-24. The DUT is placed on top of the pedestal, in the center of the system.

4. TEST PROCEDURE


The gain of the antenna was measured in the anechoic chamber Satimo SG24. The chamber provides less than -30 dB reflectivity from 400 MHz through 6 GHz. The chamber size is: 8m*5m*5m. The measurement results are calibrated using a dipole antenna. The antenna gain and efficiency are measured with AUT placed in the chamber.

5. SUMMATION TEST REPORT

5.1. Equipment Under Test DescRiption

Date of Measurements:	Jun. 24~Jun. 26, 2024
Device Manufacturer:	FRONTIER SMART TECHNOLOGIES
Antenna No.:	FS2345
Antenna Type	linear antenna
Antenna Distribution	
Temperature	22~24 °C
Relative Humidity	40~50 %

5.2. Test Setup

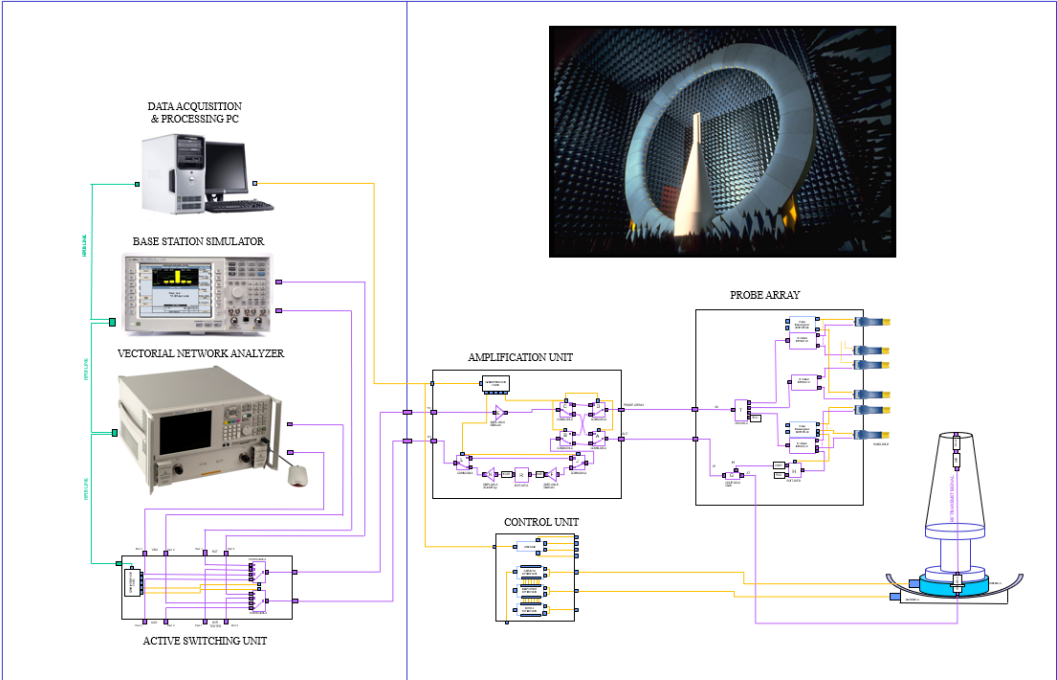

6. TEST EQUIPMENT USED

Table 2 Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB9011	Antenna Test Systems	SATIMO	SG24	--	--
SB9011/01	Network Analyzer	Agilent	E5071C	2024.04.22	1 year
SB9011/17	Test software	SATIMO	Passive Measurement	--	--


7. TEST DATA

7.1. TEST RESULTS


Table 3 Antenna 1#

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	1.86	42.58
2410	1.45	42.77
2420	1.08	42.84
2430	1.29	43.92
2440	1.60	43.81
2450	1.47	42.85
2460	0.87	39.97
2470	0.64	39.09
2483	0.53	38.07
5150	2.63	51.41
5200	2.71	53.29
5250	2.75	53.43
5300	3.02	55.15
5350	2.66	51.40
5475	2.04	48.97
5525	1.33	45.37
5575	1.49	46.19
5625	0.75	43.47
5675	0.65	41.72
5725	0.22	38.79
5775	-0.78	32.00
5825	-1.09	28.79
5875	-1.86	24.62
5925	-1.03	29.33


Peak Gain

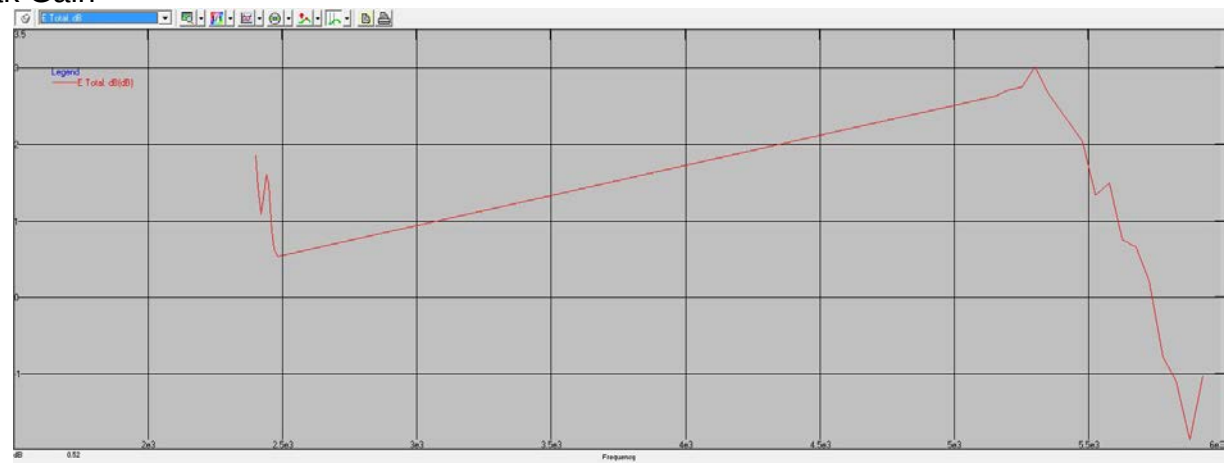


Efficiency

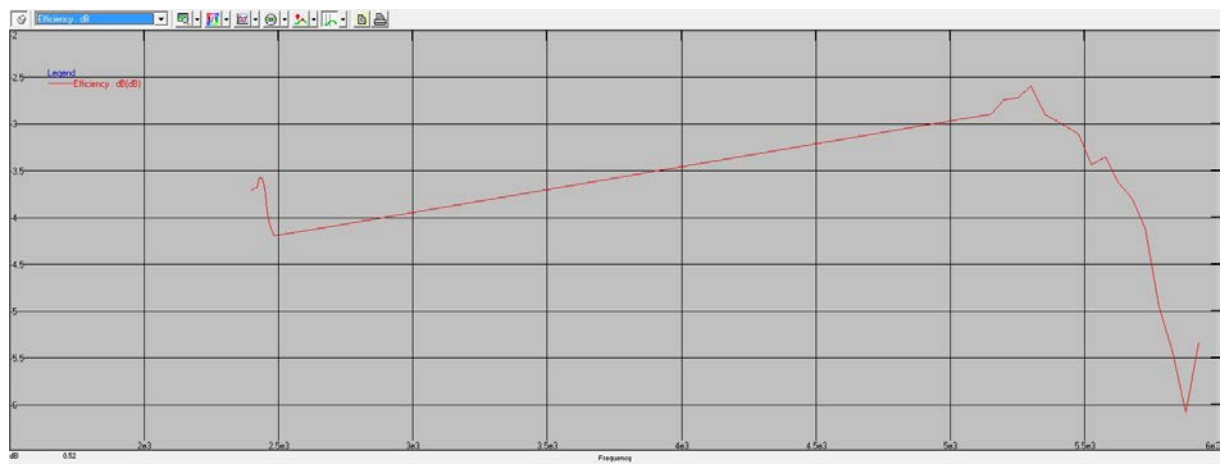


$\Phi=0$

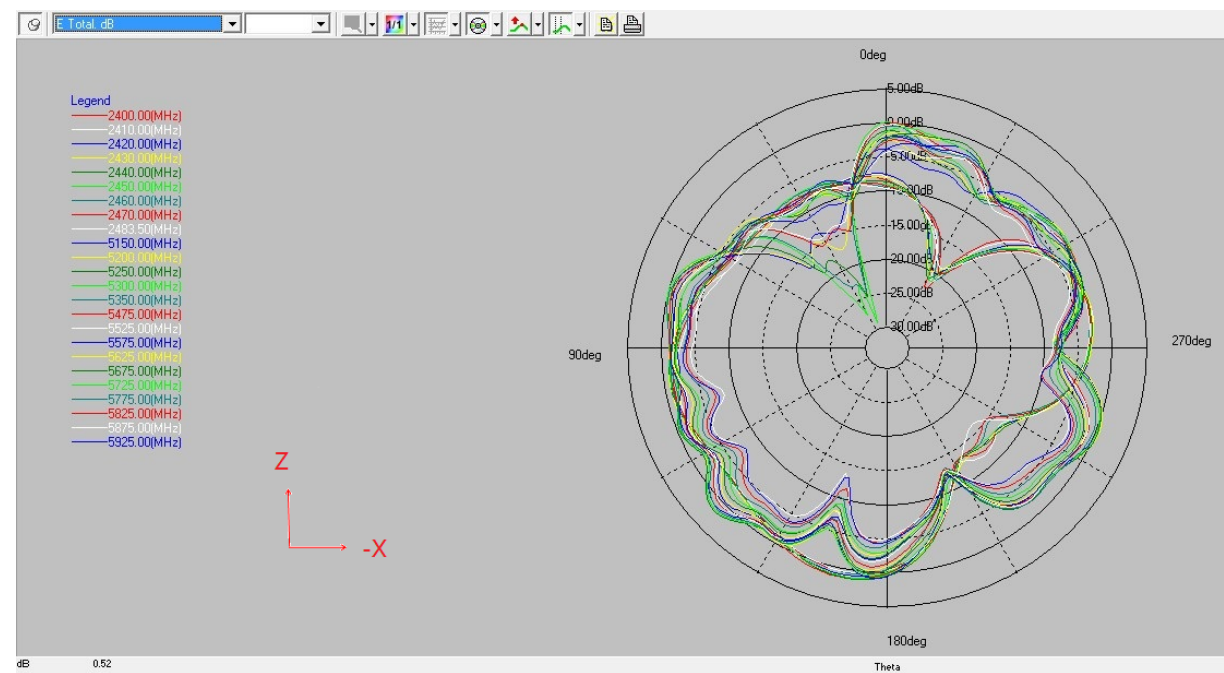


Phi=90

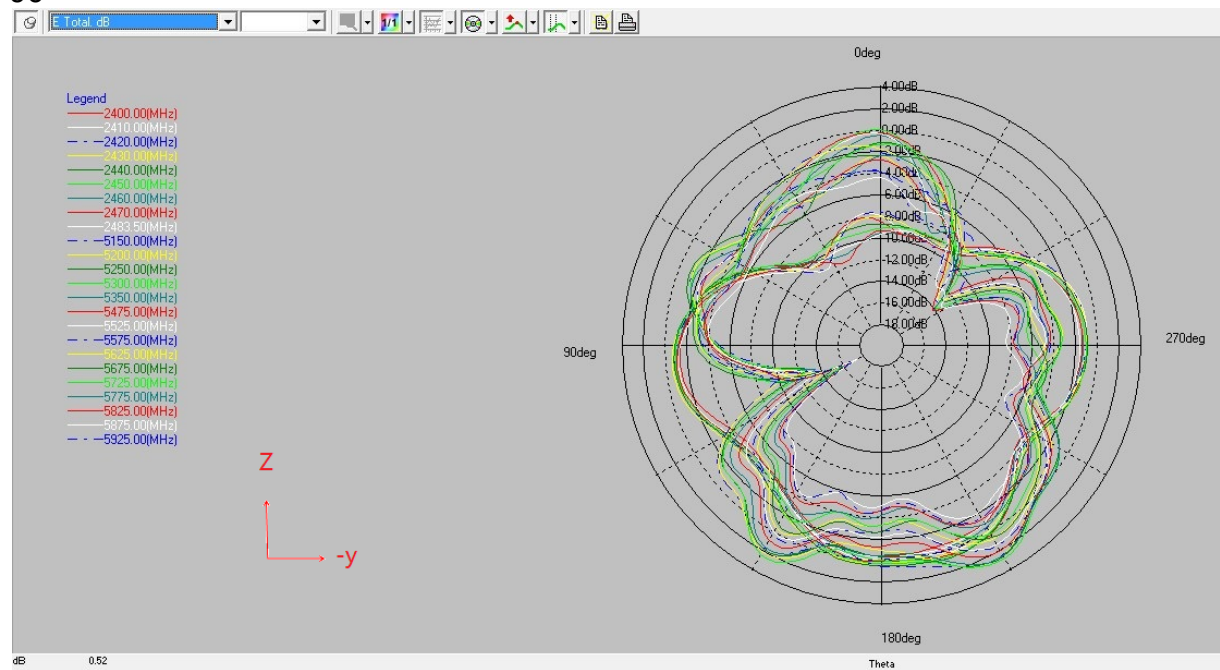

Theta=90

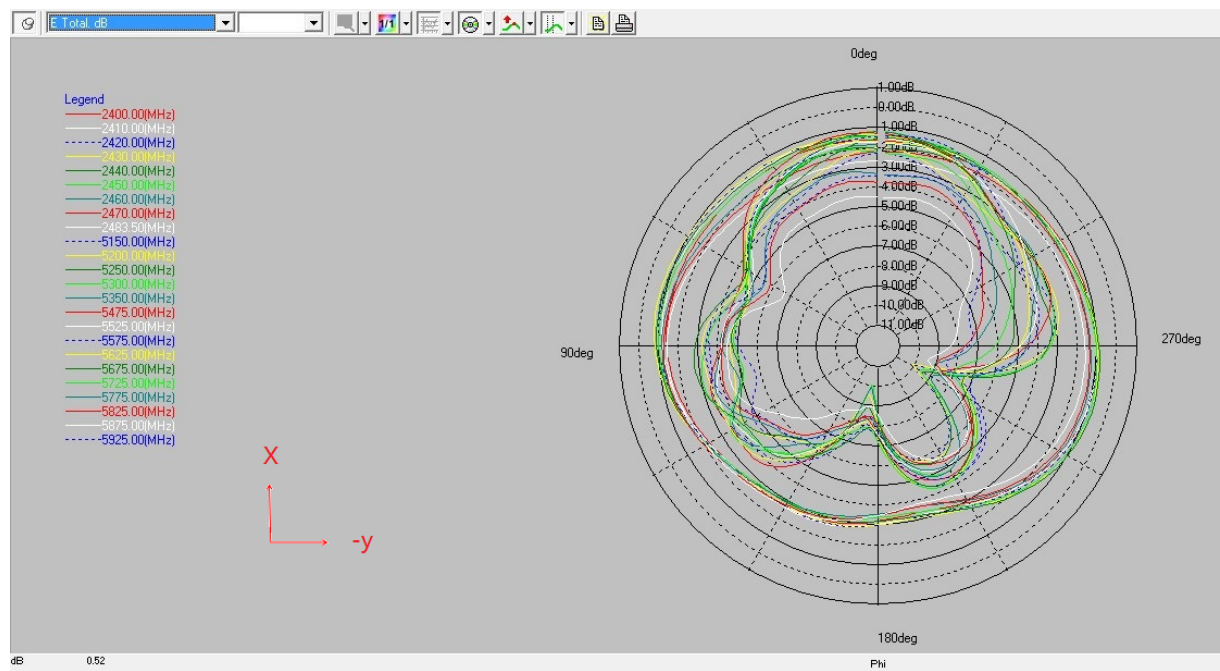

8. TEST PHOTO

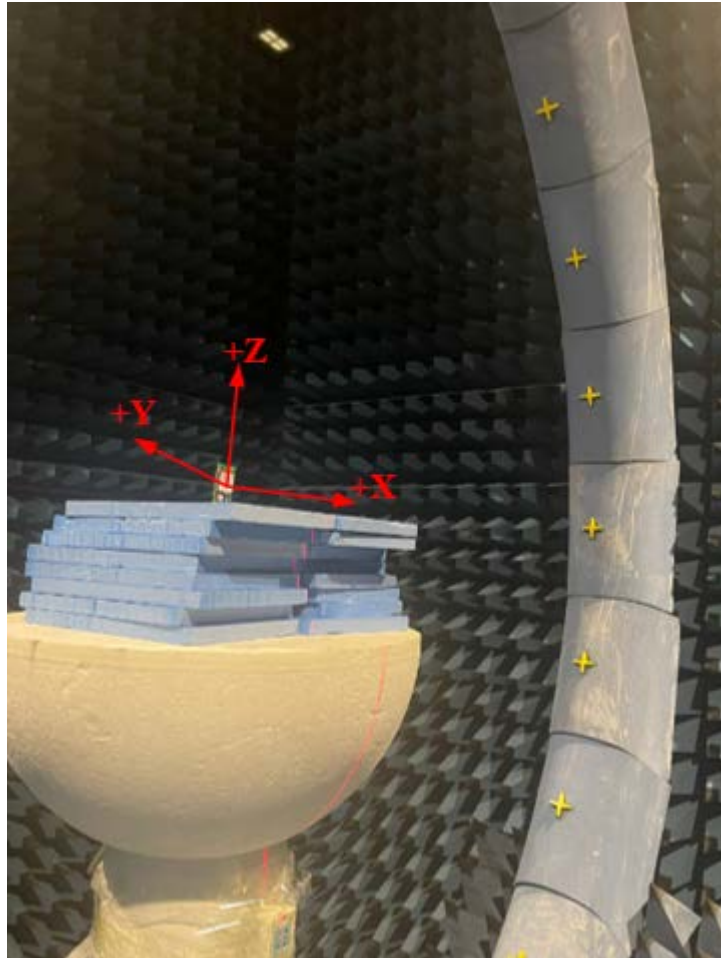

----- END -----

Dual Band 2.4G/5G PCB diagram printed antenna

