



SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V06

Report Template Revision Date: 2026-01-30



中国认可
国际互认
检测
TESTING
CNAS L5785

TEST REPORT

Report No.: CQASZ20260500916E-03

Applicant: Ultimea Technology (Shenzhen) Limited

Address of Applicant: 20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China

Equipment Under Test (EUT):

Product: Soundbar

Model No.: UC001

Test Model No.: UC001

Brand Name: ULTIMEA

FCC ID: 2A900-UC001S

Standards: 47 CFR Part 15, Subpart C

KDB558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10:2020

Date of Receipt: 2026-05-07

Date of Test: 2026-05-07 to 2026-06-04

Date of Issue: 2026-06-18

Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: Lewis Zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20260500916E-03	Rev.01	Initial report	2026-06-18

Note:

Except for Conducted Peak Output Power, AC Power Line Conducted Emission, Radiated Spurious Emissions, and Restricted Bands around Fundamental Frequency, all other test data are leveraged from the original module (FCC ID: YYX-FS2345).

Comparison Summary Table

Parameter / Feature	Original Module	EUT	Remarks / Impact
Model Name	[YYX-FS2345]	[2A9OO-UC001S]	FCC ID
Antenna Specification	2.4G: ANT1:PIFA antenna/2.21dBi ANT2:PIFA antenna/1.86dBi 5G: ANT1:PIFA antenna/ 2.11 dBi for 5150-5250MHZ 3.42 dBi for 5250-5350MHZ 4.54 dBi for 5470-5725MHZ 3.05 dBi for 5725-5850MHZ ANT2:PIFA antenna/ 2.75 dBi for 5150-5250MHZ 3.02 dBi for 5250-5350MHZ 2.04 dBi for 5470-5725MHZ 0.22 dBi for 5725-5850MHZ	2.4G: ANT1:FPC antenna/2.87dBi ANT2:PIFA antenna/1.86dBi 5G: ANT1:FPC antenna/ 3.23dBi for 5725-5850MHZ ANT2:PIFA antenna/ 0.22dBi for 5725-5850MHZ	Antenna changed
Frequency Range/ Operation Mode	BLE: 1Mbps, 2Mbps: 2402MHz~2480MHz BT: 1Mbps/2Mbps/3Mbps 2402MHz~2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20)/ax(HE20): 2412MHz~2462MHz 5G WIFI: 802.11a/n/ac/ax(20M): 5180MHz~5240MHz; 5260MHz~5320MHz; 5500MHz~5720MHz; 5745MHz~5825MHz	BLE: 1Mbps, 2Mbps: 2402MHz~2480MHz BT: 1Mbps/2Mbps/3Mbps 2402MHz~2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20)/ax(HE20): 2412MHz~2462MHz 5G WIFI: IEEE 802.11a/n/ac/ax(20M): 5745MHz~5825MHz	Frequency band

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	N/A
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	N/A
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	N/A
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	N/A
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10- 2020+Cor. 1- 2023+C63.10a-2024 + Errata to C63.10a- 2024	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	4
3 CONTENTS	6
4 GENERAL INFORMATION	7
4.1 CLIENT INFORMATION	7
4.2 GENERAL DESCRIPTION OF EUT	7
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
4.4 TEST ENVIRONMENT AND MODE	10
4.5 DESCRIPTION OF SUPPORT UNITS	11
4.6 TEST LOCATION	11
4.7 TEST FACILITY	11
4.8 TEST CONFIGURATION	11
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY	12
4.10 DEVIATION FROM STANDARDS	12
4.11 ABNORMALITIES FROM STANDARD CONDITIONS	12
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER	12
4.13 EQUIPMENT LIST	13
5 TEST RESULTS AND MEASUREMENT DATA	14
5.1 ANTENNA REQUIREMENT	14
5.2 CONDUCTED EMISSIONS	15
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	19
5.4 RADIATED SPURIOUS EMISSIONS	21
5.4.1 Radiated emission below 1GHz	24
5.4.2 Transmitter emission above 1GHz	26
5.5 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	34
6 PHOTOGRAPHS - EUT TEST SETUP	40
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	41

4 General Information

4.1 Client Information

Applicant:	Ultimea Technology (Shenzhen) Limited
Address of Applicant:	20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China
Manufacturer:	Ultimea Technology (Shenzhen) Limited
Address of Manufacturer:	20th Floor, Building 4, Tianan Cloud Park, Bantian St., Longgang District, Shenzhen, China
Factory:	SHENZHEN SOUNDJOYFUL TECHNOLOGY CO., LTD
Address of Factory:	Room 905A, Lingyun Building, Xin'an Street, Bao'an, Shenzhen

4.2 General Description of EUT

Product Name:	Soundbar
Model No.:	UC001
Test Model No.:	UC001
Trade Mark:	ULTIMEA
Software Version:	V023
Hardware Version:	V03
Module model:	RTL8730ELH
EUT Power Supply:	Power by adapter:GQ36-180200-AU Input:100-240V~50/60Hz 1.0A Max Output:18.0V--- 2.0A 36.0W
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20)/ax(HE20): 2412MHz~2462MHz;
Simultaneous Transmission	☒ Simultaneous TX is supported and evaluated in this report. ☐ Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20)/ax(HE20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20/ax HE20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11ax(HE20): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11ax(HE20) :

	8.6M/17.2M/25.8M/34.4M/51.6M/68.8M/77.4M/86M/103.2M/114.7M/129M/ 143.4Mbps
Product Type:	☒ Mobile ☐ Portable ☒ Fix Location
Test Software of EUT:	AmebaZ2_mptool_1v3
Antenna Type:	ANT1:FPC antenna ANT2:PIFA antenna
Antenna Gain:	ANT1:2.87dBi ANT2:1.86dBi

Operation Frequency each of channel(802.11b/g/n HT20/ax HE20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20)/ax(HE20):


Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
EUT Power level:	Class0
Run Software:	

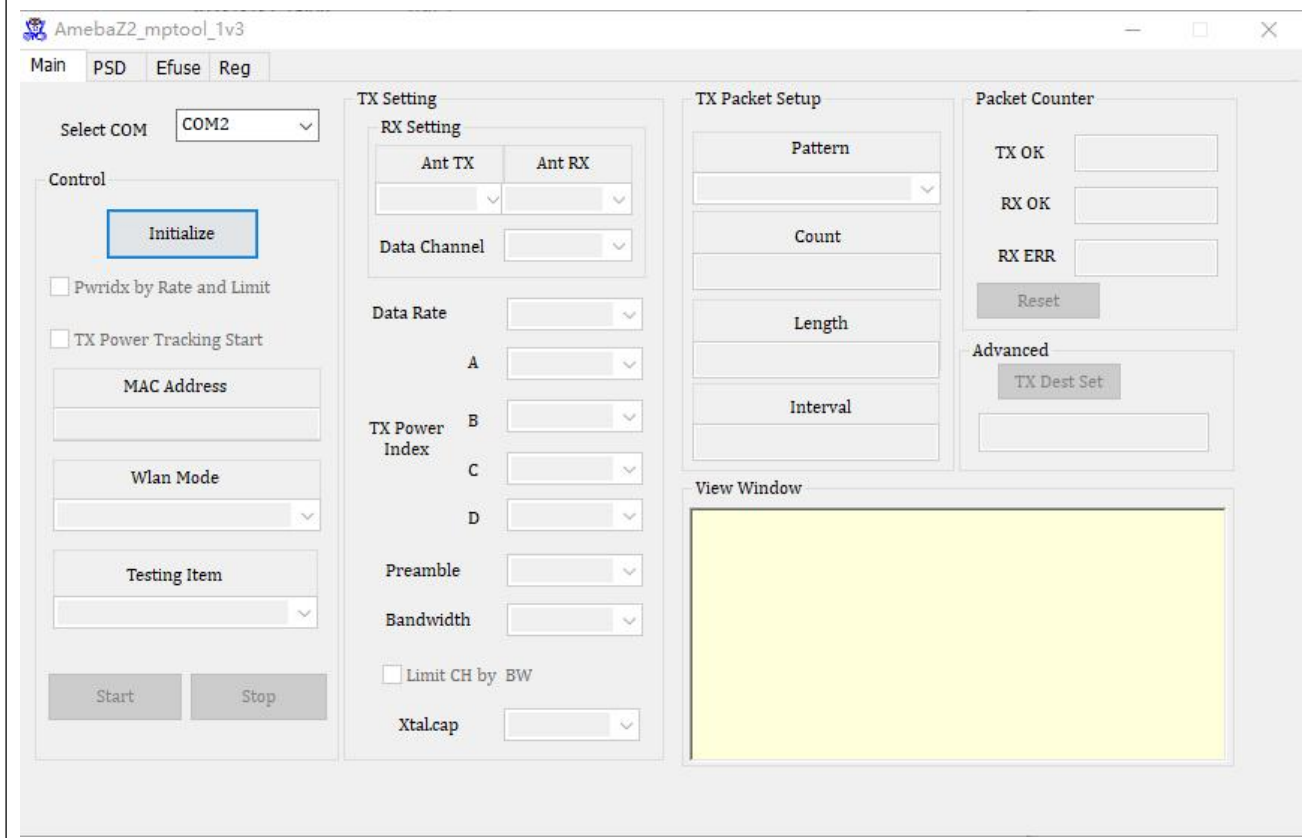

The screenshot displays the 'AmebaZ2_mptool_1v3' software interface. The 'Main' tab is selected, showing a 'Control' section with an 'Initialize' button and checkboxes for 'Pwridx by Rate and Limit' and 'TX Power Tracking Start'. Below these are fields for 'MAC Address', 'Wlan Mode', and 'Testing Item', followed by 'Start' and 'Stop' buttons. The 'TX Setting' section includes 'RX Setting' with 'Ant TX' and 'Ant RX' dropdowns, a 'Data Channel' dropdown, 'Data Rate' and 'TX Power Index' dropdowns (A, B, C, D), 'Preamble' and 'Bandwidth' dropdowns, and a 'Limit CH by BW' checkbox. The 'TX Packet Setup' section has 'Pattern', 'Count', 'Length', and 'Interval' dropdowns. The 'Packet Counter' section shows 'TX OK', 'RX OK', and 'RX ERR' counters with a 'Reset' button. An 'Advanced' section contains a 'TX Dest Set' button. A 'View Window' is at the bottom right.

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**


SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory is accredited by the

American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Test configuration

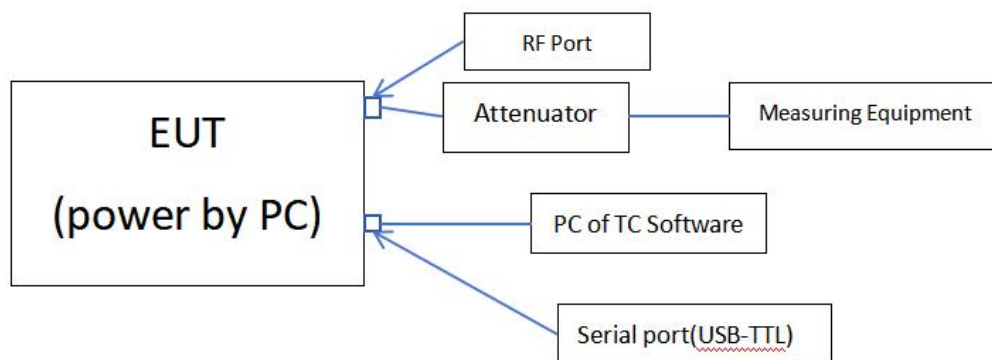

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31

Test software:


	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

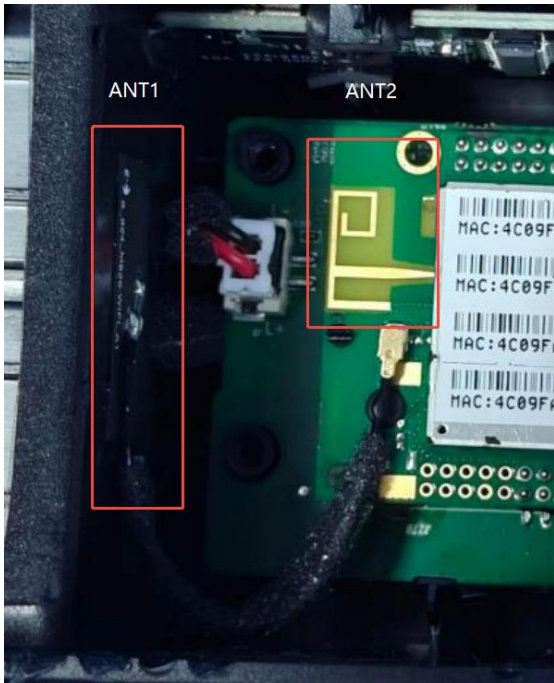Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
Ant 1 is FPC antenna. The connection/connection type between the antenna to the EUT's antenna port is: unique coupling. This is either permanently attachment or a unique coupling that satisfies the requirement. Ant 2 is PIFA antenna The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment. This is either permanently attachment or a unique coupling that satisfies the requirement.	


5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.		
Test Setup:	Shielding Room AC Mains LISN1 EUT AE LISN2 AC Mains Test Receiver 80cm 80cm Ground Reference Plane		

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

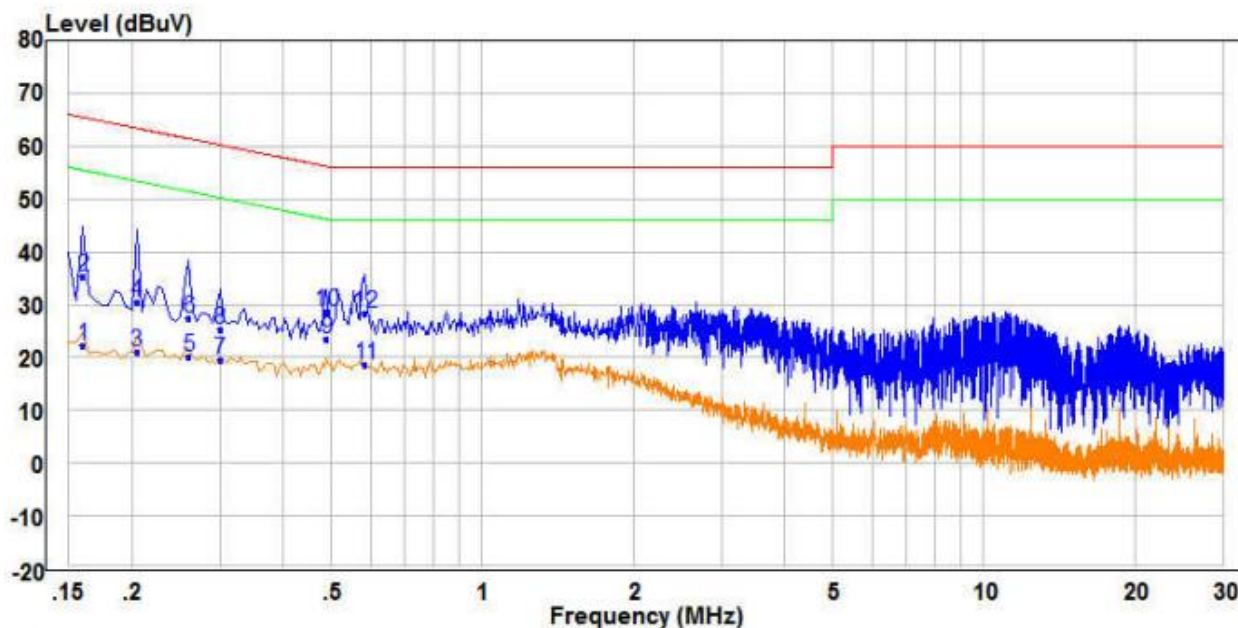


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.160	12.67	9.68	22.35	55.46	-33.11	Average	Line
2	0.160	25.56	9.68	35.24	65.46	-30.22	QP	Line
3	0.205	11.50	9.61	21.11	53.41	-32.30	Average	Line
4	0.205	20.71	9.61	30.32	63.41	-33.09	QP	Line
5	0.260	10.60	9.53	20.13	51.43	-31.30	Average	Line
6	0.260	17.89	9.53	27.42	61.43	-34.01	QP	Line
7	0.300	10.00	9.49	19.49	50.24	-30.75	Average	Line
8	0.300	15.95	9.49	25.44	60.24	-34.80	QP	Line
9 PP	0.490	13.68	9.69	23.37	46.17	-22.80	Average	Line
10 QP	0.490	18.94	9.69	28.63	56.17	-27.54	QP	Line
11	0.585	8.71	9.79	18.50	46.00	-27.50	Average	Line
12	0.585	18.57	9.79	28.36	56.00	-27.64	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

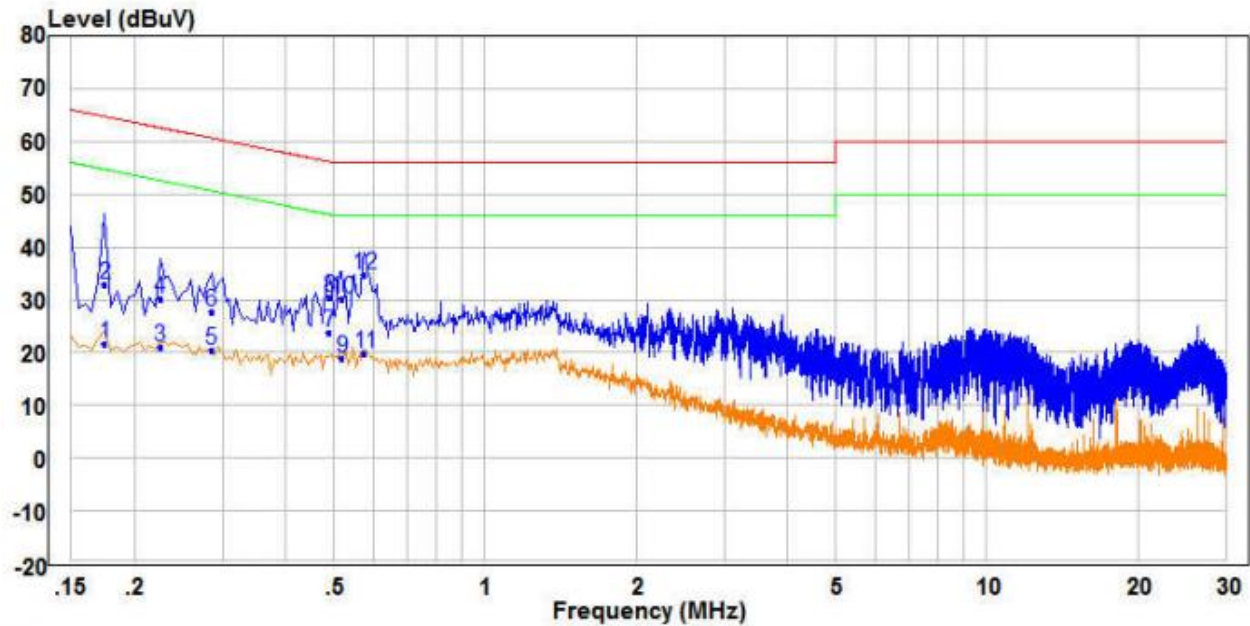


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.175	12.00	9.65	21.65	54.72	-33.07	Average	Neutral
2	0.175	23.35	9.65	33.00	64.72	-31.72	QP	Neutral
3	0.225	11.60	9.57	21.17	52.63	-31.46	Average	Neutral
4	0.225	20.68	9.57	30.25	62.63	-32.38	QP	Neutral
5	0.285	10.89	9.50	20.39	50.67	-30.28	Average	Neutral
6	0.285	18.36	9.50	27.86	60.67	-32.81	QP	Neutral
7 AV	0.490	14.17	9.69	23.86	46.17	-22.31	Average	Neutral
8	0.490	20.77	9.69	30.46	56.17	-25.71	QP	Neutral
9	0.520	9.31	9.72	19.03	46.00	-26.97	Average	Neutral
10	0.520	20.55	9.72	30.27	56.00	-25.73	QP	Neutral
11	0.575	10.04	9.78	19.82	46.00	-26.18	Average	Neutral
12 PP	0.575	24.94	9.78	34.72	56.00	-21.28	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	<i>Setup for Power meter measurement method</i>  <i>Setup for Spectrum analyser measurement method</i> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

Measurement Data

Please Refer to Appendix for Details

5.4 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

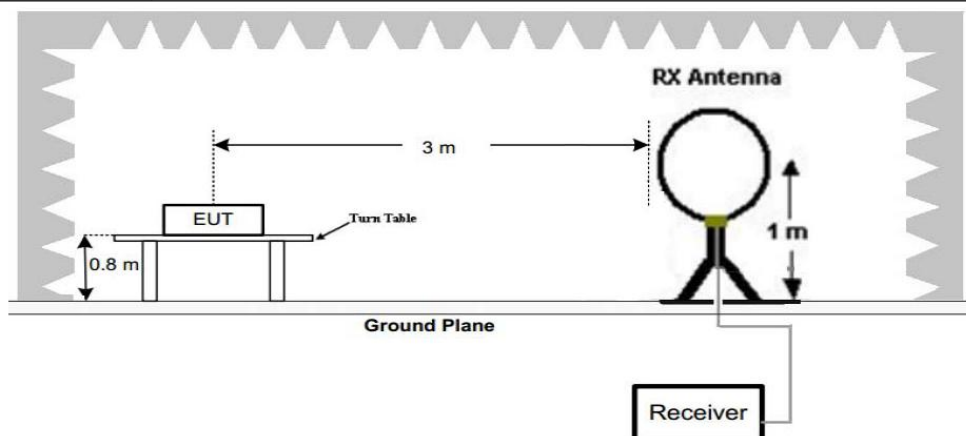


Figure 1. Below 30MHz

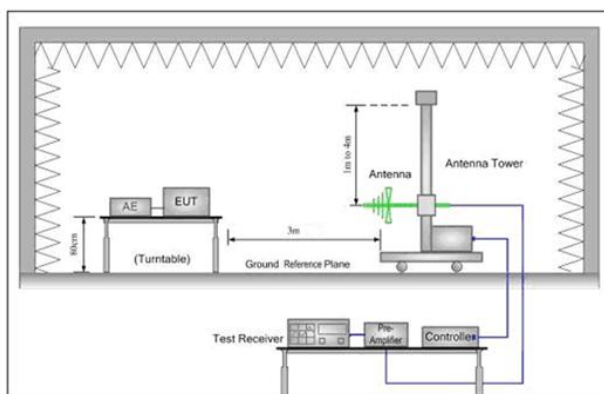


Figure 2. 30MHz to 1GHz

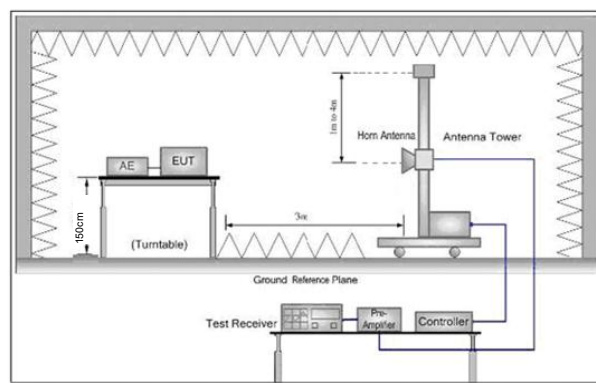


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel. Transmitting in full-bandwidth single-user mode (Full RU) with all kinds of modulations, and at the lowest, middle, and highest data rates across the channel.
Final Test Mode:	Only the worst case is recorded in the report. Only Ant 1 was tested. For Ant 2 data, refer to the original report as no modifications were made.
Test Results:	Pass

5.4.1 Radiated emission below 1GHz

30MHz~1GHz
Vertical

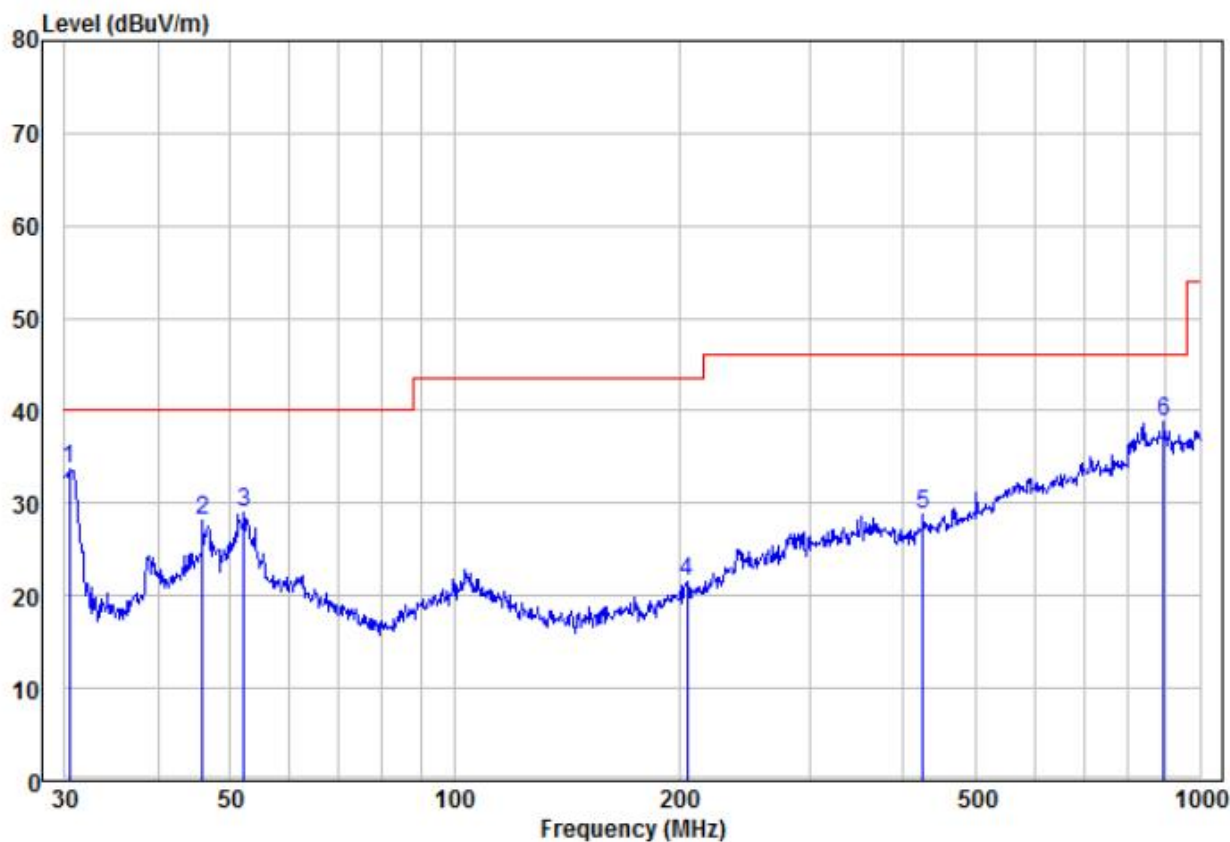

		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	30.42	25.44	8.18	33.62	40.00	-6.38 Peak
2		45.86	15.95	12.15	28.10	40.00	-11.90 Peak
3		52.21	16.43	12.68	29.11	40.00	-10.89 Peak
4		204.96	9.07	12.46	21.53	43.50	-21.97 Peak
5		425.03	9.93	18.91	28.84	46.00	-17.16 Peak
6		893.86	9.60	29.20	38.80	46.00	-7.20 Peak

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Horizontal

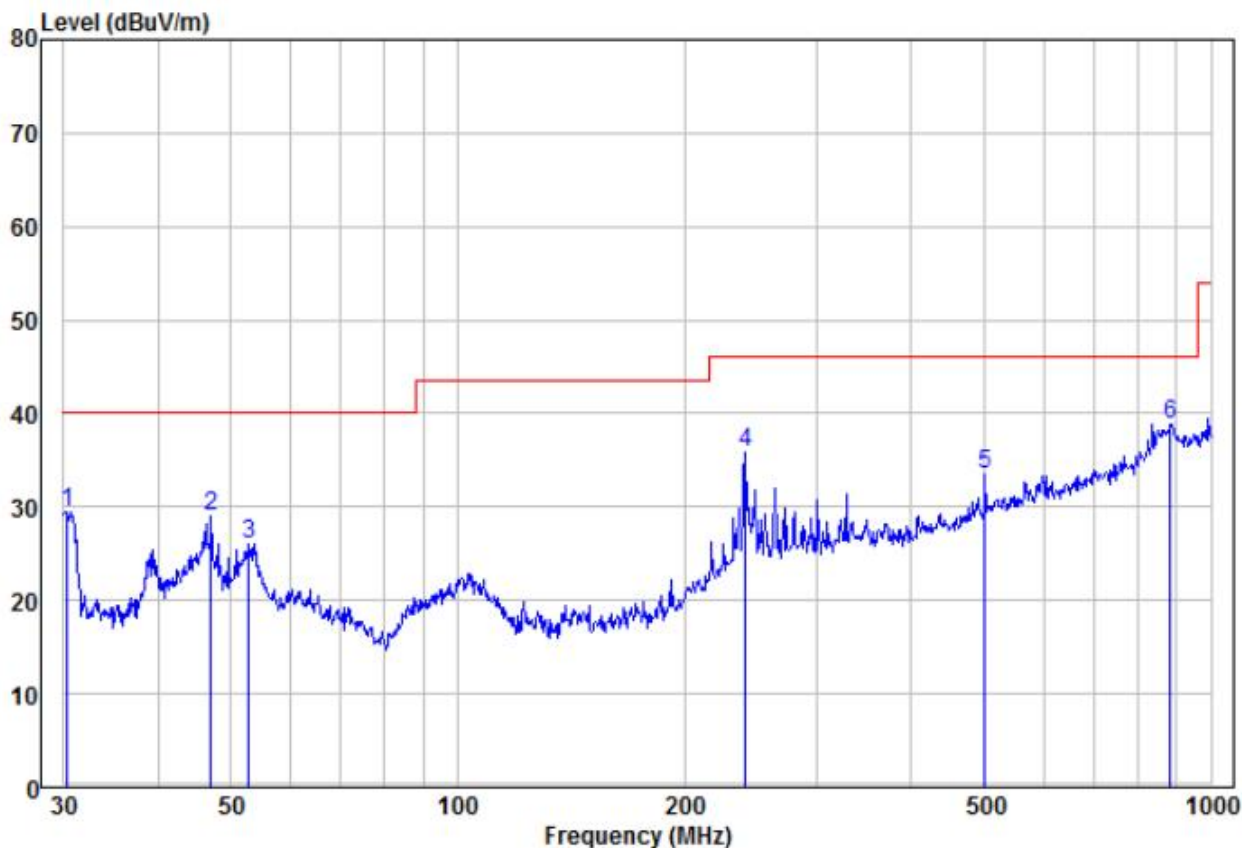

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	30.32	21.28	8.16	29.44	40.00	-10.56	Peak	HORIZONTAL
2	46.99	16.72	12.26	28.98	40.00	-11.02	Peak	HORIZONTAL
3	52.76	13.34	12.71	26.05	40.00	-13.95	Peak	HORIZONTAL
4	240.83	20.59	15.29	35.88	46.00	-10.12	Peak	HORIZONTAL
5	501.18	12.65	20.94	33.59	46.00	-12.41	Peak	HORIZONTAL
6 pp	884.50	9.79	29.04	38.83	46.00	-7.17	Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.4.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.98	-4.26	49.72	74	-24.28	peak	H	1.5	230
4824.000	37.65	-4.26	33.39	54	-20.61	AVG	H	1.5	184
7236.000	51.98	1.18	53.16	74	-20.84	peak	H	1.5	147
7236.000	38.21	1.18	39.39	54	-14.61	AVG	H	1.5	120
4824.000	55.11	-4.26	50.85	74	-23.15	peak	V	1.5	303
4824.000	38.95	-4.26	34.69	54	-19.31	AVG	V	1.5	97
7236.000	50.98	1.18	52.16	74	-21.84	peak	V	1.5	306
7236.000	35.69	1.18	36.87	54	-17.13	AVG	V	1.5	145

Test mode:		802.11b(1Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.51	-4.12	47.39	74	-26.61	peak	H	1.5	170
4874.000	37.64	-4.12	33.52	54	-20.48	AVG	H	1.5	49
7311.000	49.81	1.46	51.27	74	-22.73	peak	H	1.5	239
7311.000	35.16	1.46	36.62	54	-17.38	AVG	H	1.5	238
4874.000	54.01	-4.12	49.89	74	-24.11	peak	V	1.5	356
4874.000	36.31	-4.12	32.19	54	-21.81	AVG	V	1.5	64
7311.000	48.95	1.46	50.41	74	-23.59	peak	V	1.5	346
7311.000	35.71	1.46	37.17	54	-16.83	AVG	V	1.5	205

Test mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol. H/V	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)			(m)	(Degree)
4924.000	52.99	-4.03	48.96	74	-25.04	peak	H	1.5	294
4924.000	38.19	-4.03	34.16	54	-19.84	AVG	H	1.5	238
7386.000	49.58	1.66	51.24	74	-22.76	peak	H	1.5	296
7386.000	37.15	1.66	38.81	54	-15.19	AVG	H	1.5	261
4924.000	54.60	-4.03	50.57	74	-23.43	peak	V	1.5	354
4924.000	38.33	-4.03	34.30	54	-19.70	AVG	V	1.5	269
7386.000	50.80	1.66	52.46	74	-21.54	peak	V	1.5	50
7386.000	36.28	1.66	37.94	54	-16.06	AVG	V	1.5	114

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.64	-4.26	49.38	74	-24.62	peak	H	1.5	316
4824.000	36.22	-4.26	31.96	54	-22.04	AVG	H	1.5	96
7236.000	51.91	1.18	53.09	74	-20.91	peak	H	1.5	356
7236.000	38.95	1.18	40.13	54	-13.87	AVG	H	1.5	166
4824.000	55.85	-4.26	51.59	74	-22.41	peak	V	1.5	33
4824.000	39.75	-4.26	35.49	54	-18.51	AVG	V	1.5	164
7236.000	50.73	1.18	51.91	74	-22.09	peak	V	1.5	272
7236.000	35.03	1.18	36.21	54	-17.79	AVG	V	1.5	97

Test mode:		802.11g(6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	52.62	-4.12	48.50	74	-25.50	peak	H	1.5	224
4874.000	36.32	-4.12	32.20	54	-21.80	AVG	H	1.5	66
7311.000	50.10	1.46	51.56	74	-22.44	peak	H	1.5	21
7311.000	35.23	1.46	36.69	54	-17.31	AVG	H	1.5	37
4874.000	53.68	-4.12	49.56	74	-24.44	peak	V	1.5	210
4874.000	36.44	-4.12	32.32	54	-21.68	AVG	V	1.5	5
7311.000	49.66	1.46	51.12	74	-22.88	peak	V	1.5	206
7311.000	36.78	1.46	38.24	54	-15.76	AVG	V	1.5	30

Test mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.62	-4.03	47.59	74	-26.41	peak	H	1.5	342
4924.000	38.13	-4.03	34.10	54	-19.90	AVG	H	1.5	295
7386.000	49.59	1.66	51.25	74	-22.75	peak	H	1.5	93
7386.000	37.30	1.66	38.96	54	-15.04	AVG	H	1.5	114
4924.000	54.50	-4.03	50.47	74	-23.53	peak	V	1.5	72
4924.000	37.16	-4.03	33.13	54	-20.87	AVG	V	1.5	159
7386.000	50.26	1.66	51.92	74	-22.08	peak	V	1.5	178
7386.000	37.69	1.66	39.35	54	-14.65	AVG	V	1.5	277

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	54.20	-4.26	49.94	74	-24.06	peak	H	1.5	17
4824.000	37.38	-4.26	33.12	54	-20.88	AVG	H	1.5	54
7236.000	51.22	1.18	52.40	74	-21.60	peak	H	1.5	317
7236.000	37.03	1.18	38.21	54	-15.79	AVG	H	1.5	166
4824.000	54.80	-4.26	50.54	74	-23.46	peak	V	1.5	193
4824.000	39.07	-4.26	34.81	54	-19.19	AVG	V	1.5	287
7236.000	51.93	1.18	53.11	74	-20.89	peak	V	1.5	152
7236.000	35.02	1.18	36.20	54	-17.80	AVG	V	1.5	60

Test mode:		802.11n20(6.5Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.30	-4.12	47.18	74	-26.82	peak	H	1.5	31
4874.000	36.04	-4.12	31.92	54	-22.08	AVG	H	1.5	225
7311.000	50.18	1.46	51.64	74	-22.36	peak	H	1.5	290
7311.000	35.04	1.46	36.50	54	-17.50	AVG	H	1.5	232
4874.000	53.56	-4.12	49.44	74	-24.56	peak	V	1.5	104
4874.000	36.36	-4.12	32.24	54	-21.76	AVG	V	1.5	149
7311.000	48.60	1.46	50.06	74	-23.94	peak	V	1.5	336
7311.000	36.79	1.46	38.25	54	-15.75	AVG	V	1.5	185

Test mode:		802.11n20(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.83	-4.03	47.80	74	-26.20	peak	H	1.5	167
4924.000	38.47	-4.03	34.44	54	-19.56	AVG	H	1.5	73
7386.000	50.58	1.66	52.24	74	-21.76	peak	H	1.5	112
7386.000	36.09	1.66	37.75	54	-16.25	AVG	H	1.5	2
4924.000	53.87	-4.03	49.84	74	-24.16	peak	V	1.5	74
4924.000	38.59	-4.03	34.56	54	-19.44	AVG	V	1.5	181
7386.000	50.53	1.66	52.19	74	-21.81	peak	V	1.5	31
7386.000	36.07	1.66	37.73	54	-16.27	AVG	V	1.5	138

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11ax20(8.6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4824.000	53.54	-4.26	49.28	74	-24.72	peak	H	1.5	160
4824.000	36.30	-4.26	32.04	54	-21.96	AVG	H	1.5	26
7236.000	51.80	1.18	52.98	74	-21.02	peak	H	1.5	296
7236.000	37.77	1.18	38.95	54	-15.05	AVG	H	1.5	130
4824.000	54.88	-4.26	50.62	74	-23.38	peak	V	1.5	294
4824.000	38.23	-4.26	33.97	54	-20.03	AVG	V	1.5	48
7236.000	50.56	1.18	51.74	74	-22.26	peak	V	1.5	194
7236.000	35.26	1.18	36.44	54	-17.56	AVG	V	1.5	161

Test mode:		802.11ax20(8.6Mbps)		Test channel:		Middle			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4874.000	51.77	-4.12	47.65	74	-26.35	peak	H	1.5	30
4874.000	36.61	-4.12	32.49	54	-21.51	AVG	H	1.5	21
7311.000	48.67	1.46	50.13	74	-23.87	peak	H	1.5	221
7311.000	35.46	1.46	36.92	54	-17.08	AVG	H	1.5	167
4874.000	53.76	-4.12	49.64	74	-24.36	peak	V	1.5	44
4874.000	36.79	-4.12	32.67	54	-21.33	AVG	V	1.5	252
7311.000	48.98	1.46	50.44	74	-23.56	peak	V	1.5	91
7311.000	36.84	1.46	38.30	54	-15.70	AVG	V	1.5	132

Test mode:		802.11ax20(8.6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detect or Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
4924.000	51.68	-4.03	47.65	74	-26.35	peak	H	1.5	302
4924.000	38.58	-4.03	34.55	54	-19.45	AVG	H	1.5	187
7386.000	51.09	1.66	52.75	74	-21.25	peak	H	1.5	17
7386.000	36.88	1.66	38.54	54	-15.46	AVG	H	1.5	70
4924.000	54.27	-4.03	50.24	74	-23.76	peak	V	1.5	331
4924.000	38.24	-4.03	34.21	54	-19.79	AVG	V	1.5	63
7386.000	50.93	1.66	52.59	74	-21.41	peak	V	1.5	89
7386.000	37.64	1.66	39.30	54	-14.70	AVG	V	1.5	358

Remark:

- 1) The MCS0 of rate of 802.11ax20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.5 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2020		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

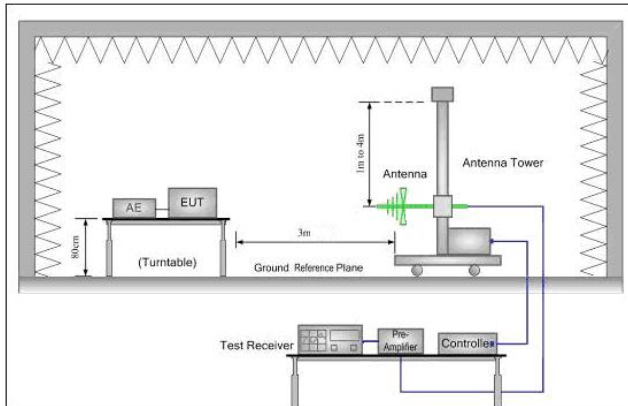


Figure 1. 30MHz to 1GHz

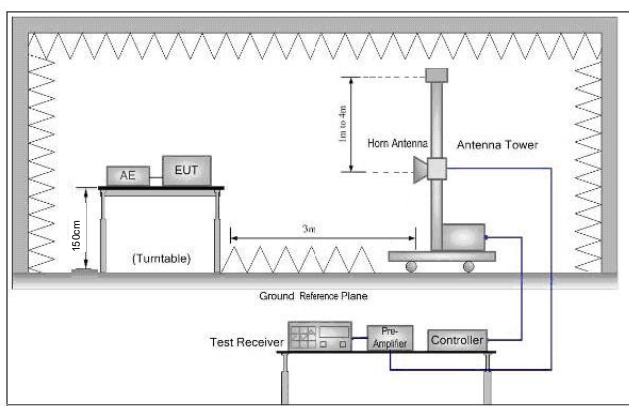


Figure 2. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case . i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 8.6Mbps of rate is the worst case of 802.11ax(HE20). Only the worst case is recorded in the report. Only Ant 1 was tested. For Ant 2 data, refer to the original report as no modifications were made.
Test Results:	Pass

Test data:

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	59.17	-9.2	49.97	74	-24.03	peak	H	1.5	15
2390.000	44.68	-9.2	35.48	54	-18.52	AVG	H	1.5	4
2400.000	59.76	-9.39	50.37	74	-23.63	peak	H	1.5	31
2400.000	46.96	-9.39	37.57	54	-16.43	AVG	H	1.5	255
2390.000	58.47	-9.2	49.27	74	-24.73	peak	V	1.5	321
2390.000	44.66	-9.2	35.46	54	-18.54	AVG	V	1.5	340
2400.000	59.72	-9.39	50.33	74	-23.67	peak	V	1.5	280
2400.000	46.75	-9.39	37.36	54	-16.64	AVG	V	1.5	32

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.48	-9.29	48.19	74	-25.81	peak	H	1.5	99
2483.500	44.37	-9.29	35.08	54	-18.92	AVG	H	1.5	94
2483.500	57.66	-9.29	48.37	74	-25.63	peak	V	1.5	196
2483.500	46.31	-9.29	37.02	54	-16.98	AVG	V	1.5	101

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2390.000	58.34	-9.2	49.14	74	-24.86	peak	H	1.5	255
2390.000	44.88	-9.2	35.68	54	-18.32	AVG	H	1.5	169
2400.000	59.24	-9.39	49.85	74	-24.15	peak	H	1.5	220
2400.000	46.83	-9.39	37.44	54	-16.56	AVG	H	1.5	158
2390.000	58.42	-9.2	49.22	74	-24.78	peak	V	1.5	7
2390.000	44.61	-9.2	35.41	54	-18.59	AVG	V	1.5	232
2400.000	59.73	-9.39	50.34	74	-23.66	peak	V	1.5	220
2400.000	46.63	-9.39	37.24	54	-16.76	AVG	V	1.5	300

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V	(m)	(Degree)
2483.500	57.59	-9.29	48.30	74	-25.70	peak	H	1.5	206
2483.500	43.46	-9.29	34.17	54	-19.83	AVG	H	1.5	233
2483.500	57.82	-9.29	48.53	74	-25.47	peak	V	1.5	237
2483.500	46.26	-9.29	36.97	54	-17.03	AVG	V	1.5	175

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	59.01	-9.2	49.81	74	-24.19	peak	H	1.5	207
2390.000	44.91	-9.2	35.71	54	-18.29	AVG	H	1.5	357
2400.000	59.74	-9.39	50.35	74	-23.65	peak	H	1.5	112
2400.000	46.66	-9.39	37.27	54	-16.73	AVG	H	1.5	251
2390.000	58.82	-9.2	49.62	74	-24.38	peak	V	1.5	281
2390.000	44.11	-9.2	34.91	54	-19.09	AVG	V	1.5	276
2400.000	59.70	-9.39	50.31	74	-23.69	peak	V	1.5	283
2400.000	46.55	-9.39	37.16	54	-16.84	AVG	V	1.5	254

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	58.41	-9.29	49.12	74	-24.88	peak	H	1.5	305
2483.500	43.84	-9.29	34.55	54	-19.45	AVG	H	1.5	267
2483.500	58.21	-9.29	48.92	74	-25.08	peak	V	1.5	302
2483.500	45.63	-9.29	36.34	54	-17.66	AVG	V	1.5	135

Worse case mode:		802.11ax(HE20)(8.6Mbps)		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2390.000	58.58	-9.2	49.38	74	-24.62	peak	H	1.5	200
2390.000	44.37	-9.2	35.17	54	-18.83	AVG	H	1.5	322
2400.000	59.67	-9.39	50.28	74	-23.72	peak	H	1.5	78
2400.000	46.23	-9.39	36.84	54	-17.16	AVG	H	1.5	277
2390.000	58.40	-9.2	49.20	74	-24.80	peak	V	1.5	47
2390.000	44.47	-9.2	35.27	54	-18.73	AVG	V	1.5	203
2400.000	59.59	-9.39	50.20	74	-23.80	peak	V	1.5	286
2400.000	45.99	-9.39	36.60	54	-17.40	AVG	V	1.5	172

Worse case mode:		802.11ax(HE20)(8.6Mbps)		Test channel:		Highest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector	Ant. Pol.	Antenna Height	Table Angle
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	H/V	(m)	(Degree)
2483.500	57.52	-9.29	48.23	74	-25.77	peak	H	1.5	352
2483.500	44.09	-9.29	34.80	54	-19.20	AVG	H	1.5	93
2483.500	57.99	-9.29	48.70	74	-25.30	peak	V	1.5	324
2483.500	45.82	-9.29	36.53	54	-17.47	AVG	V	1.5	18

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

6 Photographs - EUT Test Setup

Detailed information is given in Appendix A

7 Photographs - EUT Constructional Details

Detailed information is given in Appendix B and Appendix C

*** END OF REPORT ***