

深圳南硅科技有限公司

SPECIFICATION FOR APPROVAL

承認書

Customer Name	赛多米
Product name	无线投屏盒天线，RF0.81 黑色单银线 L=39mm, P2 端打 4 代端子
Product number	YY-20260305-02
Prepared By	Tony-Men
Checked By	
Approved By	
Apply Date	2026 年 3 月 5 日

CUSTOMER SIGNATURE		
Prepared By	Checked By	Approved By
PLEASE RETURN TO US ONE COPY OF "SPECIFICATION FOR APPROVAL" WITH YOUR APPROVED SIGNATURES.		

Shenzhen Nangui Technology Co., Ltd.

6th Floor, Building B, Hezhou Zhongkenuo Industrial Park, Hezhou Community, Hangcheng Street,
Bao'an District, Shenzhen City, China

深圳南硅科技有限公司

FPC 贴上机器

频率范围 Frequency range	2400 ~ 2500 MHz
增益 Gain	2.02 dBi/Max@2400 ~ 2500 MHz
驻波比系数 VSWR	2.0/Max@2400 ~ 2500 MHz
输入阻抗 Input Impedance	50 ± 5 (Ω)
极化方式 Polarization	垂直极化 Vertical Polarization
半功率波束 (3dB) HPW	180° H-plane 120° E-plane

深圳南硅科技有限公司

Revision History

Date	Revision	Description of Changes
2026-3-5	RA	Measured with 2.4GHz antenna sample.

1 Technical Summary

This report summarizes the electrical results of the proposed antenna to support the 2.4GHz antenna program. We test the antenna with the latest version handset. And it seems to be acceptable.

2 General Description

2.1 Components/Part revisions

VSWR: Voltage Standing Wave Rate.

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR

VSWR measurements (S11) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Gain & Radiation Patterns

The gain of the antenna was measured in the Lxc's anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than -30 dB reflectivity from 300 MHz through 6 GHz and an 18" diameter spherical quiet zone. The measurement results are calibrated using both dipole and leaky wave horn standards.





4.1.3 Matching Circuit Description

No changed..

深圳南硅科技有限公司

4.2 Antenna – Radiation Pattern Test Data

频率 (MHz)	增益 (dBi)	效率 (%)
2400	1.07	43.83
2410	1.19	44.10
2420	1.23	45.54
2430	1.36	46.53
2440	1.74	48.02
2450	1.82	48.95
2460	2.01	50.67
2470	2.02	50.71
2480	1.63	47.57
2490	1.56	46.50
2500	1.35	45.17

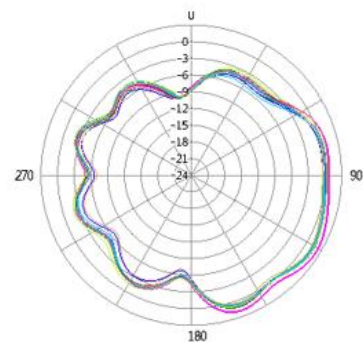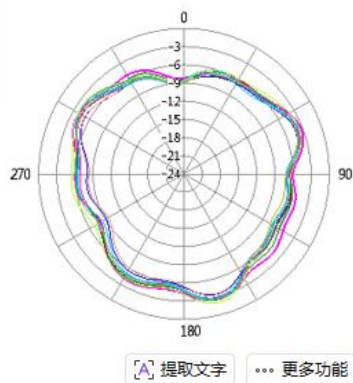

深圳南硅科技有限公司

5 .Plots

VSWR

注：1 驻波系数的标准值

2 回损的标准值




Frequency	2400MHz	2450MHz	2500MHz
SWR	2.0	1.5	2.0
S11	-9.0	-13.4	-9.4

深圳南硅科技有限公司

6.Mechanical drawing

3	FPC	L42.8*W8.8,表面作黑油	1
2	Connector	IPEX 4代仿厂端子或相当品	1
1	RF Cable	RF0.81黑色单银线 L= 39mm	1
序号	组装部件	材料规格描述	用量

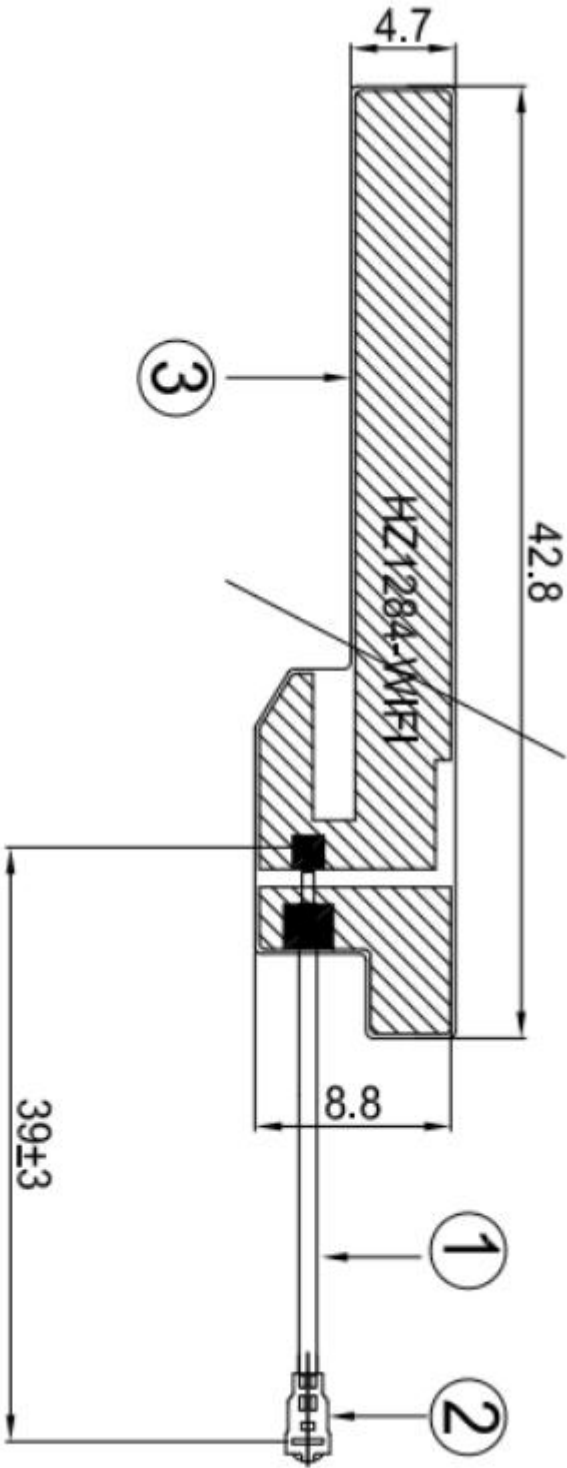

7 Reliability tests

7.1 Test content

No	试验项目	试验方法	判定基准
----	------	------	------

深圳南硅科技有限公司

1	盐水喷雾试验	把盐浓度 5%的溶液喷雾 24HR	不能有变色，歪（变形）脱落等的缺点 腐蚀面积不能过大

7.2 Test results

NO	样品数	试验期间	实验结果	备注
1	10	24 小时	OK	技术等级为 9 级 腐蚀<0.4mm

8 Conclusion

以上数据表明此 2.4GHz 天线参数均已达标。性能以装机后的实际使用效果为准。

From the above test results, we can know the electrical performance of the antenna is seems good.

Shenzhen Yangyue Electronic Communication Technology Co., Ltd, look forward to your confirmation,
thank you for your cooperation !