



FCC Part 15C Test Report

FCC ID: 2A9PI-LIXELL3

Applicant: SHENZHEN XGRIDS-INNOVATION CO., LTD

Address: 2401-2404, Building3, Shenzhen International Innovation Valley, Nanshan District, Shenzhen

Manufacturer: SHENZHEN XGRIDS-INNOVATION CO., LTD

Address: 2401-2404, Building3, Shenzhen International Innovation Valley, Nanshan District, Shenzhen

Product Name: Mobile Lidar Scanner

Trade Mark: XGRIDS

Model Number: Lixel L3, Lixel L3-16/120, Lixel L3-32/120, Lixel L3-32/300

Date of Receipt: Sep. 01, 2026

Test Date: Sep. 01, 2026 - Sep. 18, 2026

Date of Report: Sep. 18, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
KDB 662911 D01 Multiple Transmitter Output v02r01

Test Result: Pass

Report Number: DLE-260831028R

Prepared (Test Engineer): Ken Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	15
3.2.5 EUT OPERATING CONDITIONS	16
3.2.6 TEST RESULTS (BETWEEN 9KHZ - 30 MHZ)	17
3.2.7 TEST RESULTS (BETWEEN 30MHZ - 1GHZ)	18
3.2.8 TEST RESULTS (1GHZ~25GHZ)	20
3.3 RADIATED BAND EMISSION MEASUREMENT	24
3.3.1 TEST REQUIREMENT:	24
3.3.2 TEST PROCEDURE	24
3.3.3 DEVIATION FROM TEST STANDARD	24
3.3.4 TEST SETUP	25
3.3.5 EUT OPERATING CONDITIONS	25
3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	30
3.4.1 APPLICABLE STANDARD	30
3.4.2 TEST PROCEDURE	30
3.4.3 DEVIATION FROM STANDARD	30



Table of Contents	Page
3.4.4 TEST SETUP	30
3.4.5 EUT OPERATION CONDITIONS	30
3.4.6 TEST RESULTS	30
4 . AVERAGE OUTPUT POWER	35
4.1 APPLIED PROCEDURES / LIMIT	35
4.1.1 TEST PROCEDURE	35
4.1.2 DEVIATION FROM STANDARD	35
4.1.3 TEST SETUP	35
4.1.4 EUT OPERATION CONDITIONS	35
4.1.5 TEST RESULTS	36
5 . POWER SPECTRAL DENSITY TEST	41
5.1 APPLIED PROCEDURES / LIMIT	41
5.1.1 TEST PROCEDURE	41
5.1.2 DEVIATION FROM STANDARD	41
5.1.3 TEST SETUP	41
5.1.4 EUT OPERATION CONDITIONS	41
5.1.5 TEST RESULTS	42
6 . 6DB BANDWIDTH TEST	47
6.1 APPLIED PROCEDURES / LIMIT	47
6.1.1 TEST PROCEDURE	47
6.1.2 DEVIATION FROM STANDARD	47
6.1.3 TEST SETUP	47
6.1.4 EUT OPERATION CONDITIONS	47
6.1.5 TEST RESULTS	48
7 . DUTY CYCLE TEST SIGNAL	58
7.1 APPLIED PROCEDURES / LIMIT	58
7.1.1 TEST PROCEDURE	58
7.1.2 DEVIATION FROM STANDARD	58
7.1.3 TEST SETUP	58
7.1.4 EUT OPERATION CONDITIONS	58
7.1.5 TEST RESULTS	59
8 . ANTENNA REQUIREMENT	64
8.1 STANDARD REQUIREMENT	64
8.2 EUT ANTENNA	64
9 . TEST SETUP PHOTO	64
10 . EUT PHOTO	64



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.205, 15.209, 15.247(d)	Radiated Spurious Emission	PASS	
15.247(d)	Conducted Spurious Emissions	PASS	
15.205, 15.209, 15.247(d)	Band Edge Emission	PASS	
15.247(b)	Average Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1
Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen,
China

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing
DL Testing Laboratory. The authenticity of this Test Report and its contents can be verified by
contacting the DL Testing, responsible for this Test Report.

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	6dB Bandwidth	$\pm 0.2\text{MHz}$
9	Power Spectral Density	$\pm 0.42\text{dB}$
10	Duty cycle	$\pm 0.53\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Mobile Lidar Scanner
Trademark	XGRIDS
Model No.:	Lixel L3, Lixel L3-16/120, Lixel L3-32/120, Lixel L3-32/300
Model Difference	All models are same as the samples except model name, they have the same structure and circuit.
Operation Frequency:	2412~2462 MHz for 802.11b/g/nHT20 2422~2452 MHz for 802.11nHT40
Channel numbers:	11 Channels for 802.11b/g/n(HT20) 7 channels for 802.11nHT40
Channel separation:	5MHz
Modulation technology:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20/40): OFDM(QPSK, BPSK, 16-QAM, 64-QAM)
Rate of Transmitter	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	1.44dBi(ANT1), 1.44dBi(ANT2)
Power Supply:	DC 14.4V from battery TYPE-C Port from adapter
Adapter:	Model:GS-W45A0954 Input: 100-240V~50/60Hz,1.2A Output USB-C1/C2: 5V/3A or 9V/3A or 12V/3A or 15V/3A or 20V/2.25A (PPS)3.3V-16V/3A 45W Max Manufacturer: Shenzhen good-she technology Co., Ltd.
Note:	The MIMO mode only support external Internal Antenna1 and Internal Antenna2 the 802.11n mode, the Directional Gain=1.44dBi+10log(2)=4.45dBi.

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List(802.11b/g/nHT20)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	07	2.442
02	2.417	08	2.447
03	2.422	09	2.452
04	2.427	10	2.457
05	2.432	11	2.462
06	2.437		

Channel List(802.11nHT40)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
03	2.422	07	2.442
04	2.427	08	2.447
05	2.432	09	2.452
06	2.437		

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 5	Link Mode
Mode 6	MIMO Mode
For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode
For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09
Mode 6	MIMO Mode

Note: 1. The measurements are performed at the highest, middle, lowest available channels.

2. The test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power line conducted emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Adapter	GS-W45A0954	N/A	Shenzhen good-she te chnology Co., Ltd.

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: RF Test_V2.1			
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40
Data Rate	1Mbps	1Mbps	MSC0	MSC0
Power Setting of Softwave	60	60	60	66



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct. 25, 2025	Oct. 24, 2026
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct. 26, 2025	Oct. 25, 2026
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct. 25, 2025	Oct. 24, 2026
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Oct. 25, 2025	Oct. 24, 2026
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct. 25, 2025	Oct. 24, 2026
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Oct. 25, 2025	Oct. 24, 2026
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Oct. 25, 2025	Oct. 24, 2026
16	D.C. Power Supply	LongWei	PS-305D	010964729	Oct. 25, 2025	Oct. 24, 2026
17	Temperature & humidity chamber	Changfeng	CF-150-40-P	CF170802-01	Oct. 25, 2025	Oct. 24, 2026
18	966 chamber	YIHENG	966 Room	966	Nov. 06, 2023	Nov. 05, 2026

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
3	LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
4	843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation



3.1.4 TEST SETUP

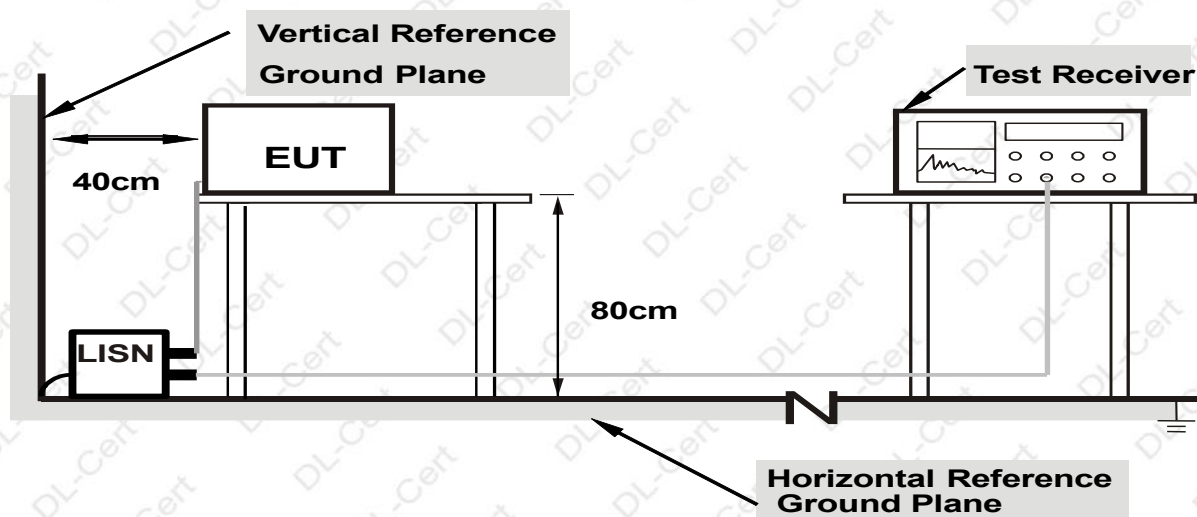

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.


3.1.6 TEST RESULTS

PASS

Please refer to the following page.



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 5

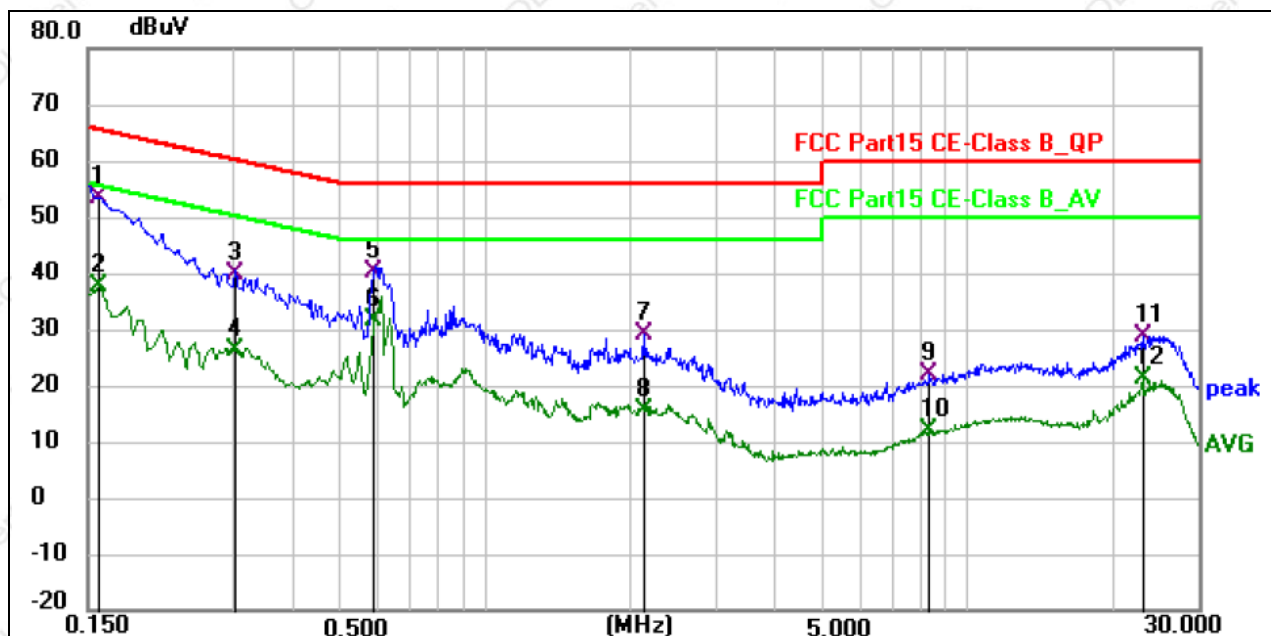


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1590	44.09	9.42	53.51	65.52	-12.01	QP	P	
2	0.1590	28.18	9.42	37.60	55.52	-17.92	AVG	P	
3	0.3030	30.40	9.41	39.81	60.16	-20.35	QP	P	
4	0.3030	16.98	9.41	26.39	50.16	-23.77	AVG	P	
5	0.5910	30.92	9.43	40.35	56.00	-15.65	QP	P	
6	0.5910	22.15	9.43	31.58	46.00	-14.42	AVG	P	
7	2.1300	19.42	9.52	28.94	56.00	-27.06	QP	P	
8	2.1300	5.98	9.52	15.50	46.00	-30.50	AVG	P	
9	8.3535	11.58	10.43	22.01	60.00	-37.99	QP	P	
10	8.3535	1.65	10.43	12.08	50.00	-37.92	AVG	P	
11	23.1270	17.59	11.28	28.87	60.00	-31.13	QP	P	
12	23.1270	9.97	11.28	21.25	50.00	-28.75	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 5

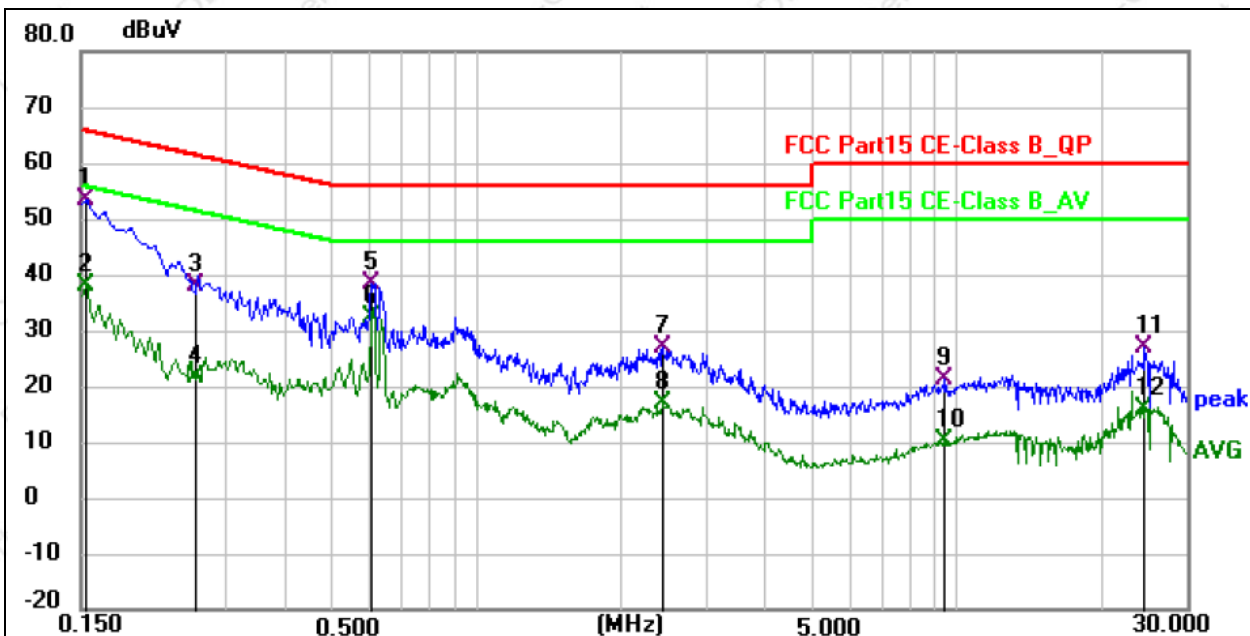

Remark:

Margin = Limit – Level, Correct Factor = Cable loss + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1544	43.93	9.39	53.32	65.76	-12.44	QP	P	
2	0.1544	28.51	9.39	37.90	55.76	-17.86	AVG	P	
3	0.2615	28.74	9.38	38.12	61.38	-23.26	QP	P	
4	0.2615	12.39	9.38	21.77	51.38	-29.61	AVG	P	
5	0.6045	28.97	9.41	38.38	56.00	-17.62	QP	P	
6	0.6045	22.79	9.41	32.20	46.00	-13.80	AVG	P	
7	2.4360	17.28	9.54	26.82	56.00	-29.18	QP	P	
8	2.4360	7.37	9.54	16.91	46.00	-29.09	AVG	P	
9	9.4425	10.56	10.56	21.12	60.00	-38.88	QP	P	
10	9.4425	-0.44	10.56	10.12	50.00	-39.88	AVG	P	
11	24.6570	15.56	11.23	26.79	60.00	-33.21	QP	P	
12	24.6570	4.74	11.23	15.97	50.00	-34.03	AVG	P	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

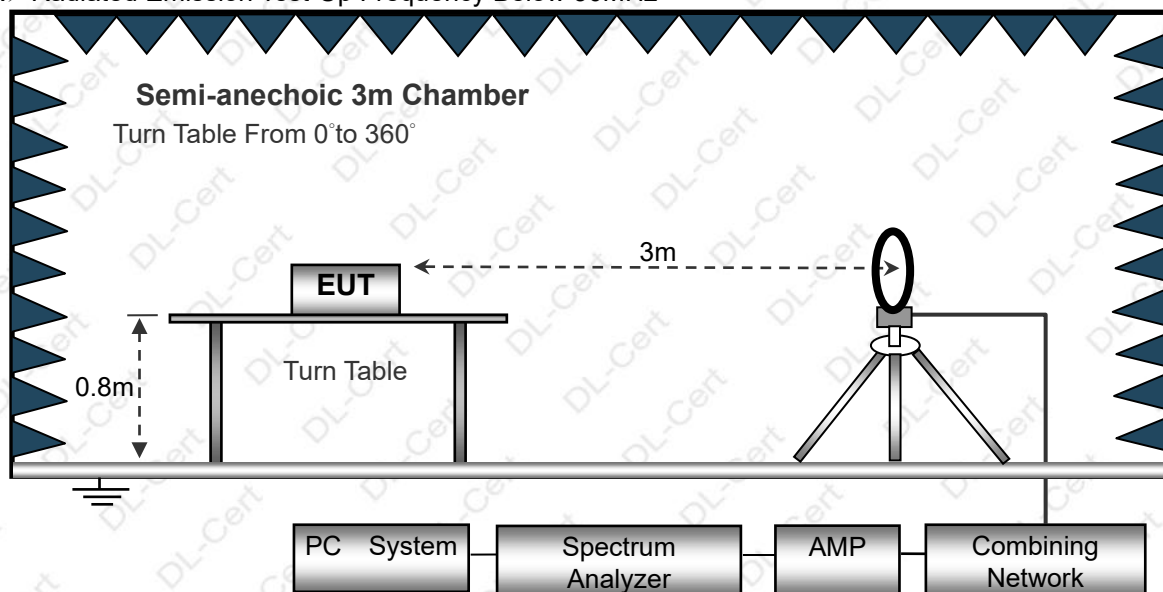

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

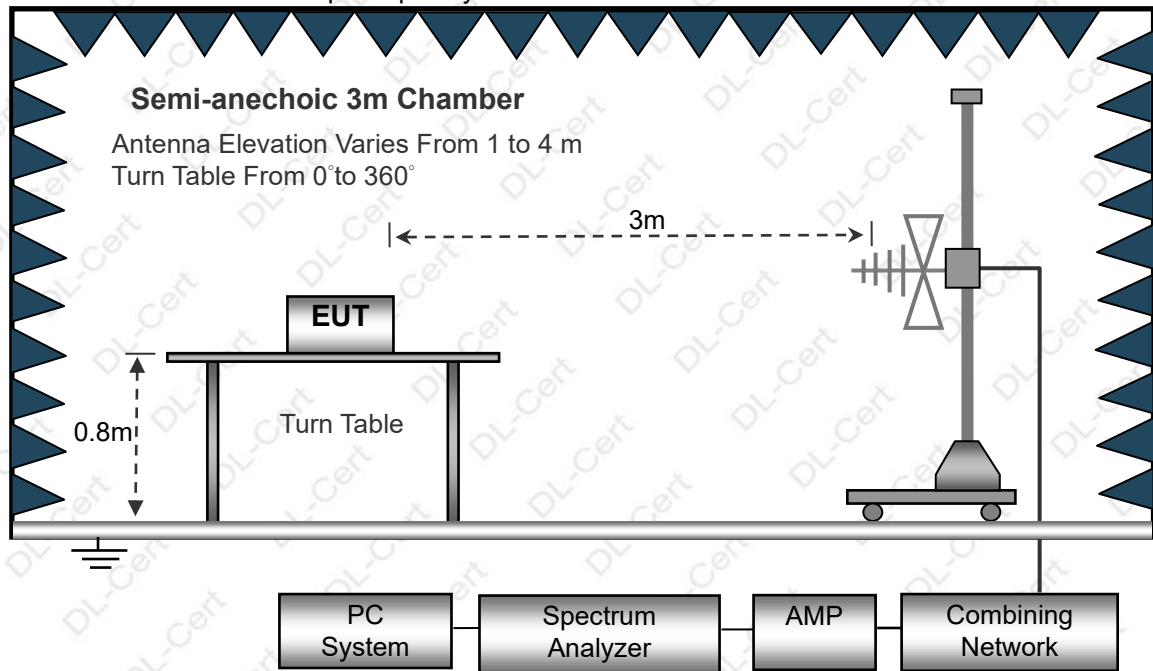

(C) Radiated Emission Test-Up Frequency Above 1GHz

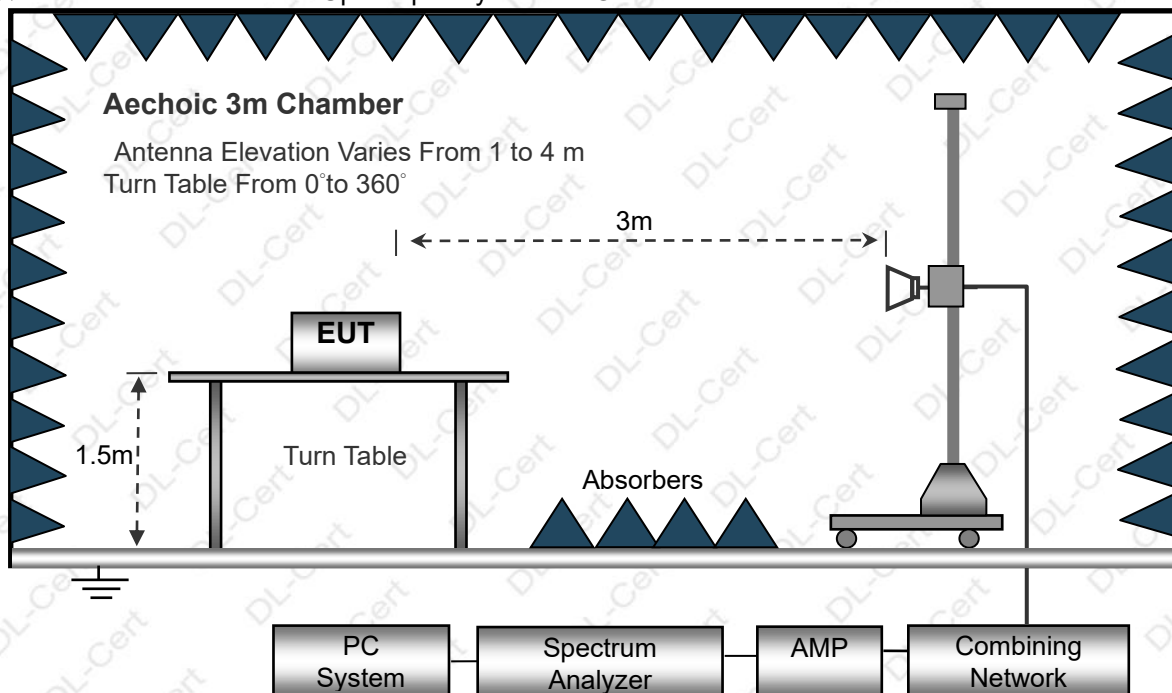

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 6	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

**3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 6		

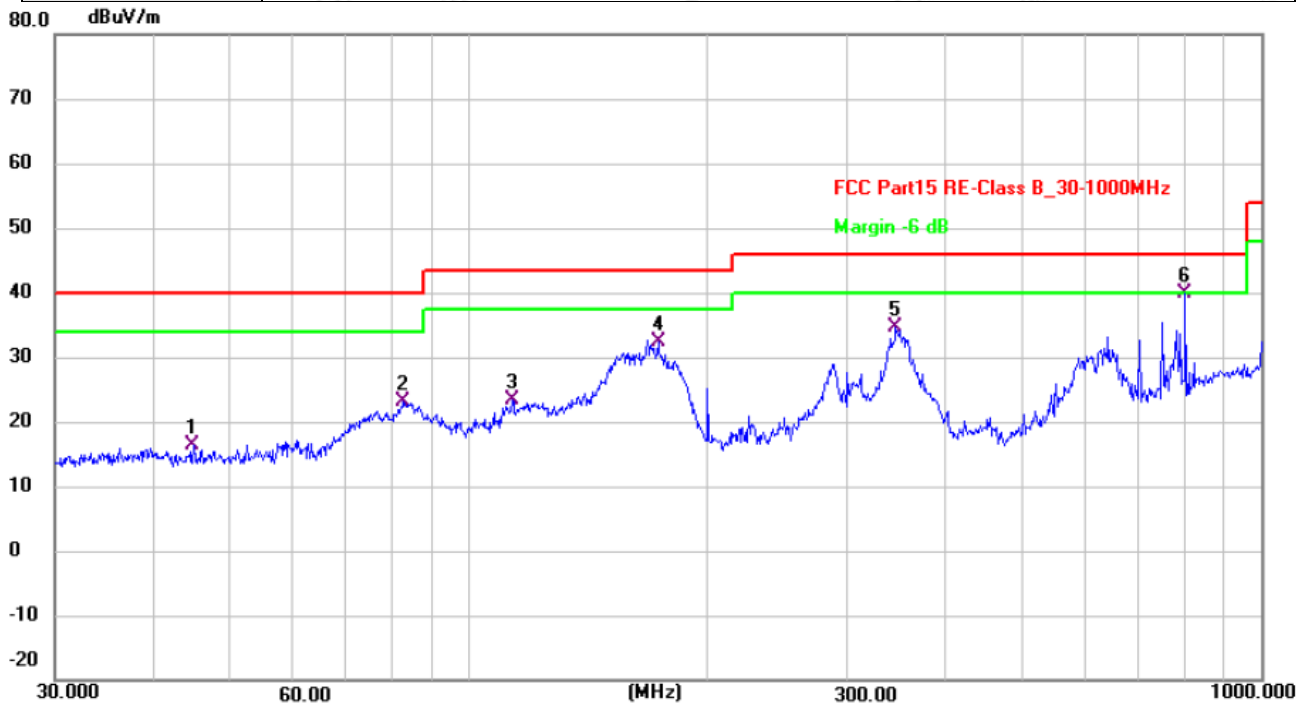

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.9004	27.83	-11.38	16.45	40.00	-23.55	QP
2		82.6480	36.99	-13.85	23.14	40.00	-16.86	QP
3		113.3161	34.83	-11.44	23.39	43.50	-20.11	QP
4		173.2050	43.31	-10.99	32.32	43.50	-11.18	QP
5		345.5951	43.49	-8.85	34.64	46.00	-11.36	QP
6	*	801.7862	41.44	-1.51	39.93	46.00	-6.07	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 6		

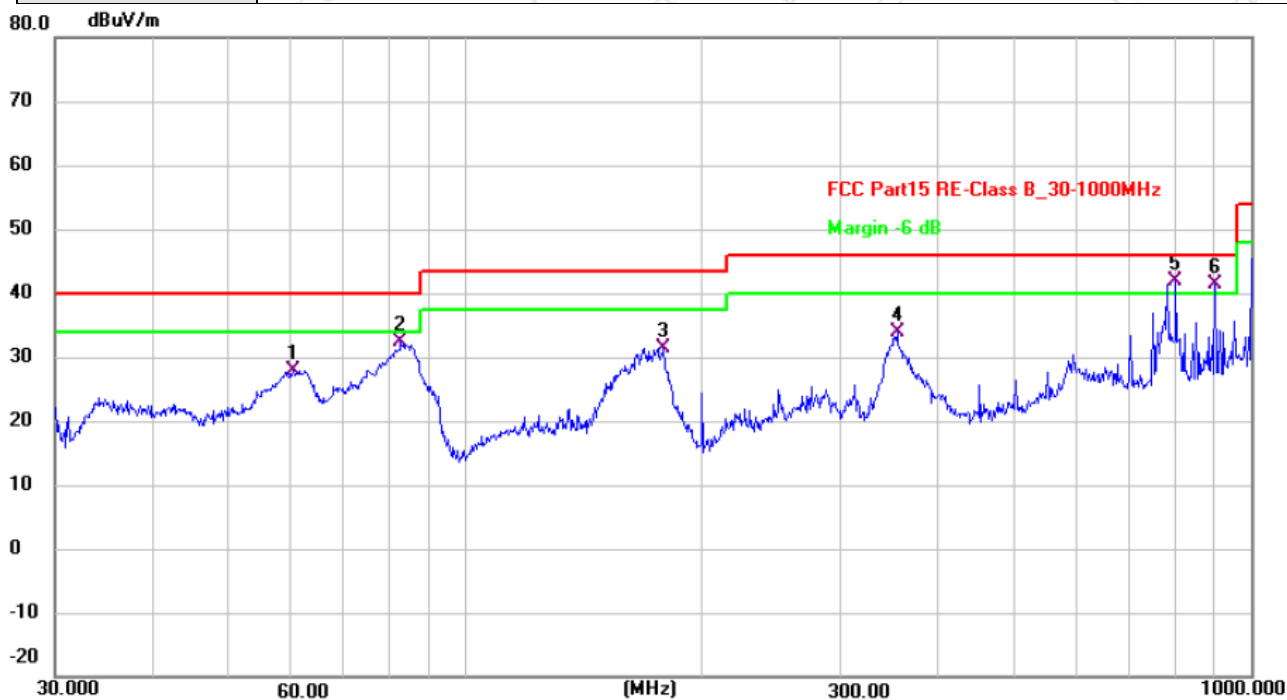

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		60.2800	39.16	-11.17	27.99	40.00	-12.01	QP
2		82.6478	46.14	-13.85	32.29	40.00	-7.71	QP
3		178.7581	43.00	-11.73	31.27	43.50	-12.23	QP
4		354.1831	42.52	-8.71	33.81	46.00	-12.19	QP
5	*	801.7862	43.45	-1.51	41.94	46.00	-4.06	QP
6	!	900.1471	41.59	-0.11	41.48	46.00	-4.52	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;

**3.2.8 TEST RESULTS (1GHZ~25GHZ)**

802.11b

We test all antenna's data, the data only show the antenna1 worst mode.

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	4824	68.62	50.65	6.88	31.29	56.14	74	-17.86	PK
V	4824	57.03	50.65	6.88	31.29	44.55	54	-9.45	AV
V	7236	68.22	49.98	7.16	36.63	62.03	74	-11.97	PK
V	7236	47.52	49.98	7.16	36.63	41.33	54	-12.67	AV
V	16087	49.58	51.53	11.34	41.52	50.91	74	-23.09	PK
H	4824	67.73	50.65	6.88	31.29	55.25	74	-18.75	PK
H	4824	56.89	50.65	6.88	31.29	44.41	54	-9.59	AV
H	7236	71.23	49.98	7.16	36.63	65.04	74	-8.96	PK
H	7236	46.85	49.98	7.16	36.63	40.66	54	-13.34	AV
H	16087	49.91	51.53	11.34	41.52	51.24	74	-22.76	PK
operation frequency:2437									
V	4874	68.58	50.67	6.89	31.38	56.18	74	-17.82	PK
V	4874	56.93	50.67	6.89	31.38	44.53	54	-9.47	AV
V	7311	71.25	50.02	7.24	36.63	65.1	74	-8.9	PK
V	7311	47.78	50.02	7.24	36.63	41.63	54	-12.37	AV
V	16087	49.83	51.53	11.34	41.52	51.16	74	-22.84	PK
H	4874	67.49	50.67	6.89	31.38	55.09	74	-18.91	PK
H	4874	57.25	50.67	6.89	31.38	44.85	54	-9.15	AV
H	7311	71	50.02	7.24	36.63	64.85	74	-9.15	PK
H	7311	48.92	50.02	7.24	36.63	42.77	54	-11.23	AV
H	16087	49.94	51.53	11.34	41.52	51.27	74	-22.73	PK
operation frequency:2462									
V	4924	69	50.79	6.83	31.36	56.4	74	-17.6	PK
V	4924	56.95	50.79	6.83	31.36	44.35	54	-9.65	AV
V	7386	70.71	50.11	7.25	36.58	64.43	74	-9.57	PK
V	7386	47.58	50.11	7.25	36.58	41.3	54	-12.7	AV
V	16087	49.73	51.53	11.34	41.52	51.06	74	-22.94	PK
H	4924	67.92	50.79	6.83	31.36	55.32	74	-18.68	PK
H	4924	56.48	50.79	6.83	31.36	43.88	54	-10.12	AV
H	7386	70.65	50.11	7.25	36.58	64.37	74	-9.63	PK
H	7386	48.78	50.11	7.25	36.58	42.5	54	-11.5	AV
H	16087	50.03	51.53	11.34	41.52	51.36	74	-22.64	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

We test all antenna's data, the data only show the antenna1 worst mode.

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	68.89	50.65	6.88	31.29	56.41	74	-17.59	PK
V	4824	56.85	50.65	6.88	31.29	44.37	54	-9.63	AV
V	7236	67.73	49.98	7.16	36.63	61.54	74	-12.46	PK
V	7236	47.71	49.98	7.16	36.63	41.52	54	-12.48	AV
V	16087	50.98	51.53	11.34	41.52	52.31	74	-21.69	PK
H	4824	70.85	50.65	6.88	31.29	58.37	74	-15.63	PK
H	4824	53.83	50.65	6.88	31.29	41.35	54	-12.65	AV
H	7236	67.91	49.98	7.16	36.63	61.72	74	-12.28	PK
H	7236	48.58	49.98	7.16	36.63	42.39	54	-11.61	AV
H	16087	49.25	51.53	11.34	41.52	50.58	74	-23.42	PK
operation frequency:2437									
V	4874	68.89	50.67	6.89	31.38	56.49	74	-17.51	PK
V	4874	56.73	50.67	6.89	31.38	44.33	54	-9.67	AV
V	7311	67.95	50.02	7.24	36.63	61.8	74	-12.2	PK
V	7311	47.78	50.02	7.24	36.63	41.63	54	-12.37	AV
V	16087	49.63	51.53	11.34	41.52	50.96	74	-23.04	PK
H	4874	68.14	50.67	6.89	31.38	55.74	74	-18.26	PK
H	4874	56.79	50.67	6.89	31.38	44.39	54	-9.61	AV
H	7311	66.85	50.02	7.24	36.63	60.7	74	-13.3	PK
H	7311	48.78	50.02	7.24	36.63	42.63	54	-11.37	AV
H	16087	49.8	51.53	11.34	41.52	51.13	74	-22.87	PK
operation frequency:2462									
V	4924	68.95	50.79	6.83	31.36	56.35	74	-17.65	PK
V	4924	56.7	50.79	6.83	31.36	44.1	54	-9.9	AV
V	7386	67.81	50.11	7.25	36.58	61.53	74	-12.47	PK
V	7386	49.18	50.11	7.25	36.58	42.9	54	-11.1	AV
V	16087	48.22	51.53	11.34	41.52	49.55	74	-24.45	PK
H	4924	68.13	50.79	6.83	31.36	55.53	74	-18.47	PK
H	4924	56.22	50.79	6.83	31.36	43.62	54	-10.38	AV
H	7386	66.58	50.11	7.25	36.58	60.3	74	-13.7	PK
H	7386	47	50.11	7.25	36.58	40.72	54	-13.28	AV
H	16087	49.22	51.53	11.34	41.52	50.55	74	-23.45	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

We test all antenna's data, the data only show the mode 6 worst mode.

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	67.58	50.65	6.88	31.29	55.1	74	-18.9	PK
V	4824	57.23	50.65	6.88	31.29	44.75	54	-9.25	AV
V	7236	67.84	49.98	7.16	36.63	61.65	74	-12.35	PK
V	7236	47.78	49.98	7.16	36.63	41.59	54	-12.41	AV
V	16087	47.7	51.53	11.34	41.52	49.03	74	-24.97	PK
H	4824	67.92	50.65	6.88	31.29	55.44	74	-18.56	PK
H	4824	56.88	50.65	6.88	31.29	44.4	54	-9.6	AV
H	7236	65.84	49.98	7.16	36.63	59.65	74	-14.35	PK
H	7236	49	49.98	7.16	36.63	42.81	54	-11.19	AV
H	16087	48.95	51.53	11.34	41.52	50.28	74	-23.72	PK
operation frequency:2437									
V	4874	67.83	50.67	6.89	31.38	55.43	74	-18.57	PK
V	4874	55.92	50.67	6.89	31.38	43.52	54	-10.48	AV
V	7311	67.18	50.02	7.24	36.63	61.03	74	-12.97	PK
V	7311	49.22	50.02	7.24	36.63	43.07	54	-10.93	AV
V	16087	48.9	51.53	11.34	41.52	50.23	74	-23.77	PK
H	4874	66.91	50.67	6.89	31.38	54.51	74	-19.49	PK
H	4874	54.63	50.67	6.89	31.38	42.23	54	-11.77	AV
H	7311	66.6	50.02	7.24	36.63	60.45	74	-13.55	PK
H	7311	47.61	50.02	7.24	36.63	41.46	54	-12.54	AV
H	16087	47.98	51.53	11.34	41.52	49.31	74	-24.69	PK
operation frequency:2462									
V	4924	68.66	50.79	6.83	31.36	56.06	74	-17.94	PK
V	4924	55.72	50.79	6.83	31.36	43.12	54	-10.88	AV
V	7386	66.02	50.11	7.25	36.58	59.74	74	-14.26	PK
V	7386	48	50.11	7.25	36.58	41.72	54	-12.28	AV
V	16087	50.21	51.53	11.34	41.52	51.54	74	-22.46	PK
H	4924	68.68	50.79	6.83	31.36	56.08	74	-17.92	PK
H	4924	55.94	50.79	6.83	31.36	43.34	54	-10.66	AV
H	7386	66.83	50.11	7.25	36.58	60.55	74	-13.45	PK
H	7386	48.92	50.11	7.25	36.58	42.64	54	-11.36	AV
H	16087	49.19	51.53	11.34	41.52	50.52	74	-23.48	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

We test all antenna's data, the data only show the mode 6 worst mode.

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:2422									
V	4844	68.73	50.67	6.89	31.32	56.27	74	-17.73	PK
V	4844	57.05	50.67	6.89	31.32	44.59	54	-9.41	AV
V	7266	67.58	50.01	7.15	36.62	61.34	74	-12.66	PK
V	7266	48	50.01	7.15	36.62	41.76	54	-12.24	AV
V	16087	50.25	51.53	11.34	41.52	51.58	74	-22.42	PK
H	4844	67.89	50.67	6.89	31.32	55.43	74	-18.57	PK
H	4844	57	50.67	6.89	31.32	44.54	54	-9.46	AV
H	7266	70.54	50.01	7.15	36.62	64.3	74	-9.7	PK
H	7266	46.81	50.01	7.15	36.62	40.57	54	-13.43	AV
H	16087	50	51.53	11.34	41.52	51.33	74	-22.67	PK
operation frequency:2437									
V	4874	68.89	50.67	6.89	31.38	56.49	74	-17.51	PK
V	4874	56.8	50.67	6.89	31.38	44.4	54	-9.6	AV
V	7311	70.85	50.02	7.24	36.63	64.7	74	-9.3	PK
V	7311	48.11	50.02	7.24	36.63	41.96	54	-12.04	AV
V	16087	49.58	51.53	11.34	41.52	50.91	74	-23.09	PK
H	4874	68.23	50.67	6.89	31.38	55.83	74	-18.17	PK
H	4874	57.04	50.67	6.89	31.38	44.64	54	-9.36	AV
H	7311	71.21	50.02	7.24	36.63	65.06	74	-8.94	PK
H	7311	49.2	50.02	7.24	36.63	43.05	54	-10.95	AV
H	16087	50.22	51.53	11.34	41.52	51.55	74	-22.45	PK
operation frequency:2452									
V	4904	69	50.76	6.81	31.31	56.36	74	-17.64	PK
V	4904	56.81	50.76	6.81	31.31	44.17	54	-9.83	AV
V	7356	71.18	50.08	7.21	36.52	64.83	74	-9.17	PK
V	7356	48.33	50.08	7.21	36.52	41.98	54	-12.02	AV
V	16087	49.99	51.53	11.34	41.52	51.32	74	-22.68	PK
H	4904	67.83	50.76	6.81	31.31	55.19	74	-18.81	PK
H	4904	56.84	50.76	6.81	31.31	44.2	54	-9.8	AV
H	7356	70.92	50.08	7.21	36.52	64.57	74	-9.43	PK
H	7356	48.83	50.08	7.21	36.52	42.48	54	-11.52	AV
H	16087	49.71	51.53	11.34	41.52	51.04	74	-22.96	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.3.3 DEVIATION FROM TEST STANDARD

No deviation



3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

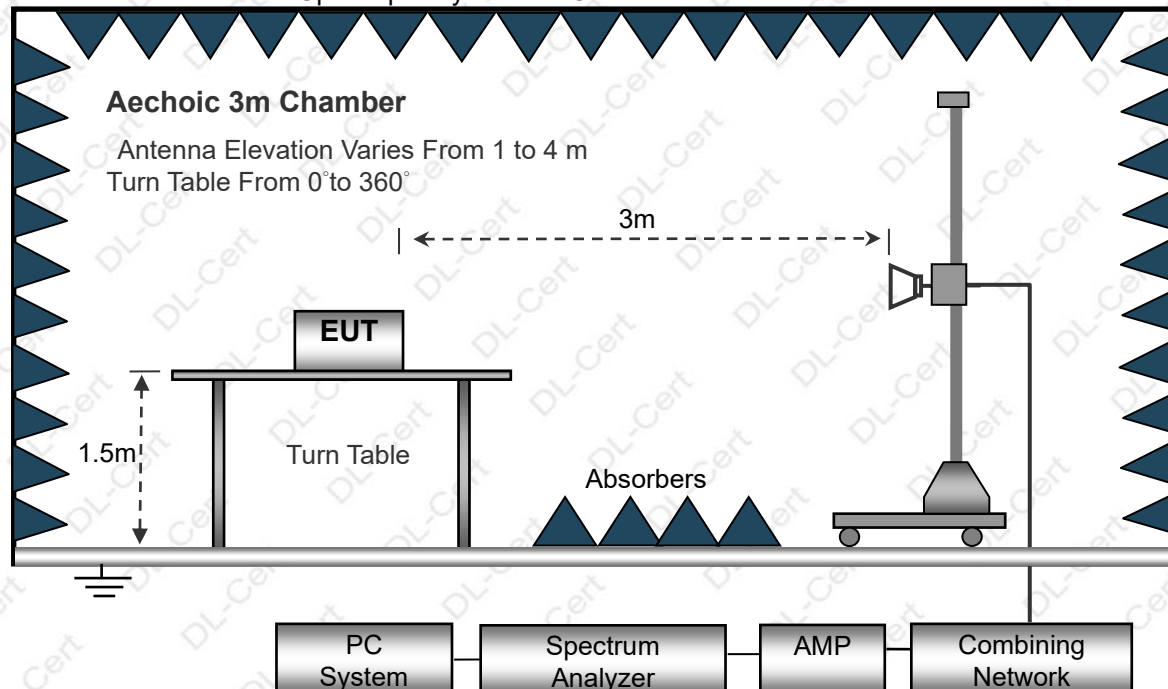

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

802.11b

We test all antenna's data, the data only show the antenna1 worst mode.

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2310	78.6	52.12	2.73	27.38	56.59	74	-17.41	PK
V	2310	66.51	52.12	2.73	27.38	44.5	54	-9.5	AV
V	2390	77.95	52.16	2.78	27.41	55.98	74	-18.02	PK
V	2390	65.6	52.16	2.78	27.41	43.63	54	-10.37	AV
H	2310	77.89	52.12	2.73	27.38	55.88	74	-18.12	PK
H	2310	66.51	52.12	2.73	27.38	44.5	54	-9.5	AV
H	2390	77.83	52.16	2.78	27.41	55.86	74	-18.14	PK
H	2390	67.22	52.16	2.78	27.41	45.25	54	-8.75	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	78.73	52.23	2.86	27.44	56.8	74	-17.2	PK
V	2483.5	67.22	52.23	2.86	27.44	45.29	54	-8.71	AV
V	2500	78.09	52.26	2.88	27.49	56.2	74	-17.8	PK
V	2500	66.73	52.26	2.88	27.49	44.84	54	-9.16	AV
H	2483.5	77.85	52.23	2.86	27.44	55.92	74	-18.08	PK
H	2483.5	68.21	52.23	2.86	27.44	46.28	54	-7.72	AV
H	2500	79.78	52.26	2.88	27.49	57.89	74	-16.11	PK
H	2500	69.06	52.26	2.88	27.49	47.17	54	-6.83	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

We test all antenna's data, the data only show the antenna1 worst mode.

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2412									
V	2310	77.65	52.12	2.73	27.38	55.64	74	-18.36	PK
V	2310	66.72	52.12	2.73	27.38	44.71	54	-9.29	AV
V	2390	78.2	52.16	2.78	27.41	56.23	74	-17.77	PK
V	2390	65.52	52.16	2.78	27.41	43.55	54	-10.45	AV
H	2310	77.61	52.12	2.73	27.38	55.6	74	-18.4	PK
H	2310	66.75	52.12	2.73	27.38	44.74	54	-9.26	AV
H	2390	77.9	52.16	2.78	27.41	55.93	74	-18.07	PK
H	2390	66.95	52.16	2.78	27.41	44.98	54	-9.02	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2462									
V	2483.5	77.58	52.23	2.86	27.44	55.65	74	-18.35	PK
V	2483.5	66.93	52.23	2.86	27.44	45	54	-9	AV
V	2500	78.24	52.26	2.88	27.49	56.35	74	-17.65	PK
V	2500	66.72	52.26	2.88	27.49	44.83	54	-9.17	AV
H	2483.5	77.6	52.23	2.86	27.44	55.67	74	-18.33	PK
H	2483.5	66.81	52.23	2.86	27.44	44.88	54	-9.12	AV
H	2500	77.88	52.26	2.88	27.49	55.99	74	-18.01	PK
H	2500	67.06	52.26	2.88	27.49	45.17	54	-8.83	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

We test all antenna's data, the data only show the mode 6 worst mode.

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2310	77.51	52.12	2.73	27.38	55.5	74	-18.5	PK
V	2310	66.83	52.12	2.73	27.38	44.82	54	-9.18	AV
V	2390	78.89	52.16	2.78	27.41	56.92	74	-17.08	PK
V	2390	66.8	52.16	2.78	27.41	44.83	54	-9.17	AV
H	2310	78.85	52.12	2.73	27.38	56.84	74	-17.16	PK
H	2310	66.9	52.12	2.73	27.38	44.89	54	-9.11	AV
H	2390	77.92	52.16	2.78	27.41	55.95	74	-18.05	PK
H	2390	67.21	52.16	2.78	27.41	45.24	54	-8.76	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	78.93	52.23	2.86	27.44	57	74	-17	PK
V	2483.5	66.75	52.23	2.86	27.44	44.82	54	-9.18	AV
V	2500	77.81	52.26	2.88	27.49	55.92	74	-18.08	PK
V	2500	67.33	52.26	2.88	27.49	45.44	54	-8.56	AV
H	2483.5	79.02	52.23	2.86	27.44	57.09	74	-16.91	PK
H	2483.5	66.62	52.23	2.86	27.44	44.69	54	-9.31	AV
H	2500	77.7	52.26	2.88	27.49	55.81	74	-18.19	PK
H	2500	68.22	52.26	2.88	27.49	46.33	54	-7.67	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

We test all antenna's data, the data only show the mode 6 worst mode.

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2422									
V	2310	78.73	52.12	2.73	27.38	56.72	74	-17.28	PK
V	2310	66.81	52.12	2.73	27.38	44.8	54	-9.2	AV
V	2390	77.95	52.16	2.78	27.41	55.98	74	-18.02	PK
V	2390	65.73	52.16	2.78	27.41	43.76	54	-10.24	AV
H	2310	78.02	52.12	2.73	27.38	56.01	74	-17.99	PK
H	2310	67.04	52.12	2.73	27.38	45.03	54	-8.97	AV
H	2390	77.83	52.16	2.78	27.41	55.86	74	-18.14	PK
H	2390	67.01	52.16	2.78	27.41	45.04	54	-8.96	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2452									
V	2483.5	79.22	52.23	2.86	27.44	57.29	74	-16.71	PK
V	2483.5	67.03	52.23	2.86	27.44	45.1	54	-8.9	AV
V	2500	78.22	52.26	2.88	27.49	56.33	74	-17.67	PK
V	2500	66.93	52.26	2.88	27.49	45.04	54	-8.96	AV
H	2483.5	77.61	52.23	2.86	27.44	55.68	74	-18.32	PK
H	2483.5	68.22	52.23	2.86	27.44	46.29	54	-7.71	AV
H	2500	79.9	52.26	2.88	27.49	58.01	74	-15.99	PK
H	2500	68.78	52.26	2.88	27.49	46.89	54	-7.11	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Establish a reference level by using the following procedure:

a) Set instrument center frequency to DTS channel center frequency.

b) Set the span to ≥ 1.5 times the DTS bandwidth.

c) Set the RBW=100 kHz.

d) Set the VBW $\geq [3 \times \text{RBW}]$.

e) Detector = peak.

f) Sweep time = auto couple.

g) Trace mode = max hold.

h) Allow trace to fully stabilize.


i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3.4.3 DEVIATION FROM STANDARD

No deviation.

3.4.4 TEST SETUP

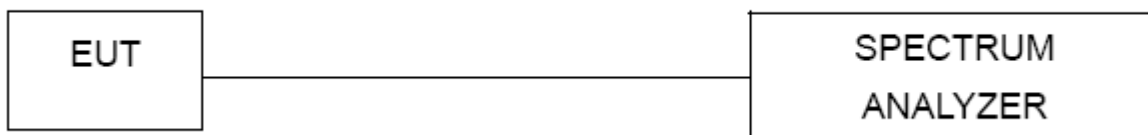

3.4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.4.6 TEST RESULTS





We test all antenna's data, the data only show the antenna1 worst mode.

For Conducted



802.11b 2412MHz

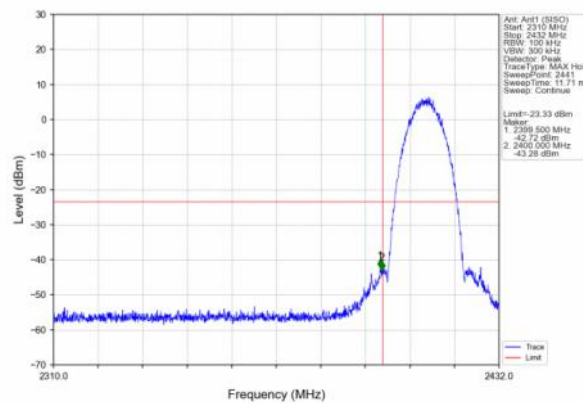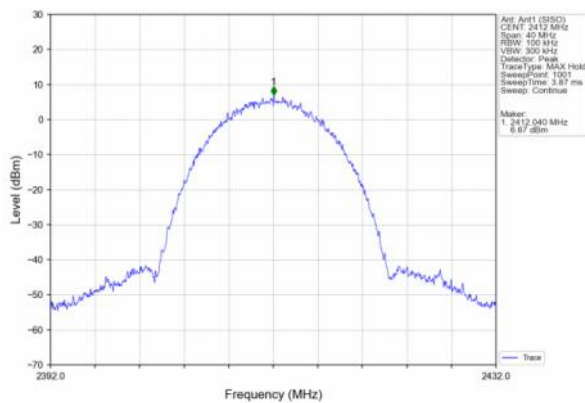

802.11b 2462MHz

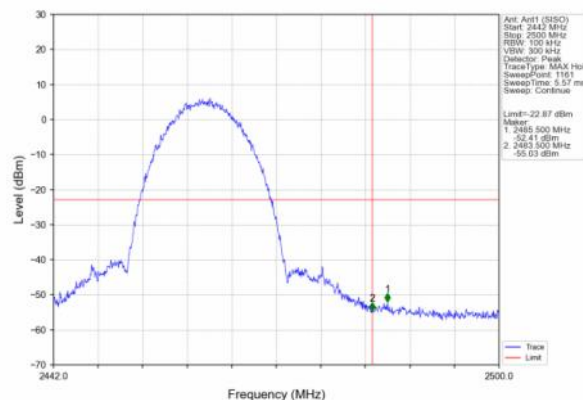
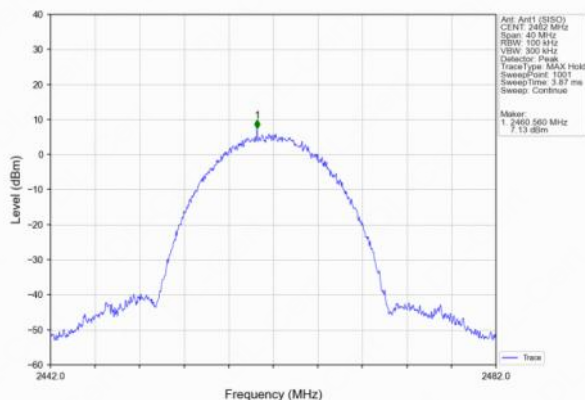


802.11g 2412MHz

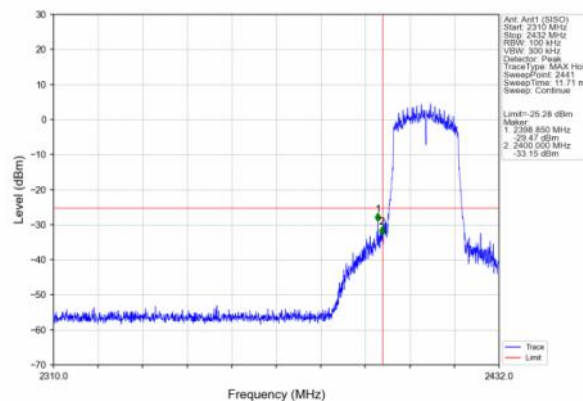
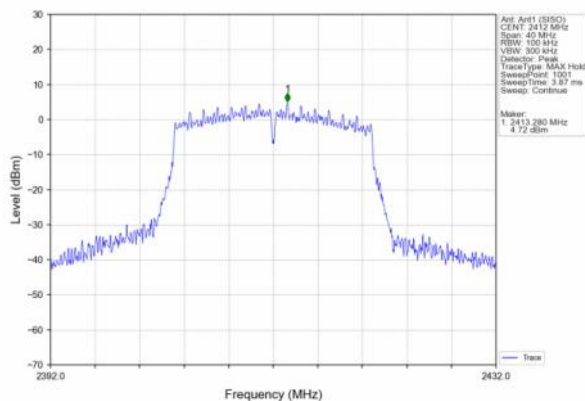






802.11g 2462MHz

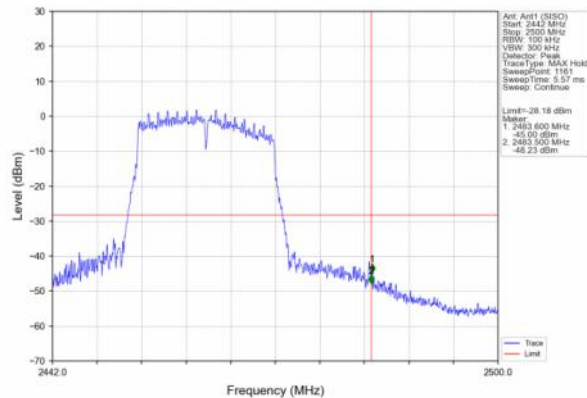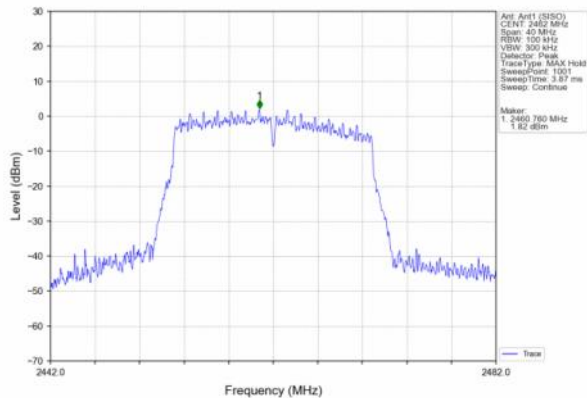

802.11n 20 2412MHz

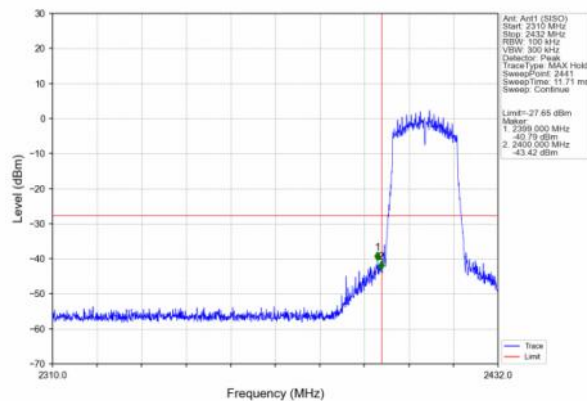
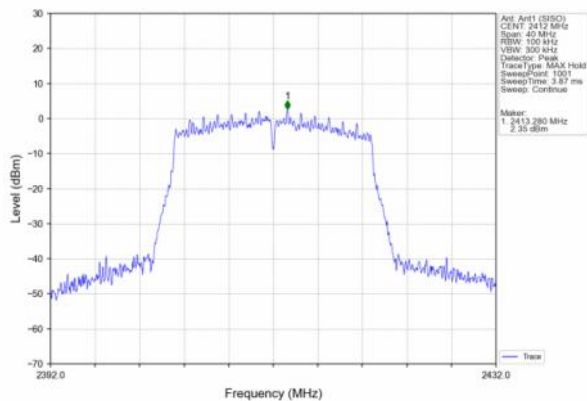


802.11n20 2462MHz

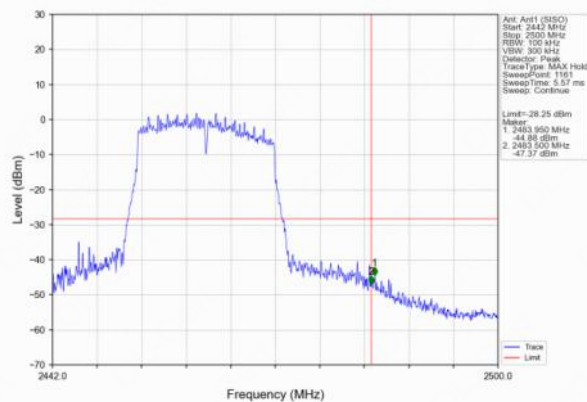
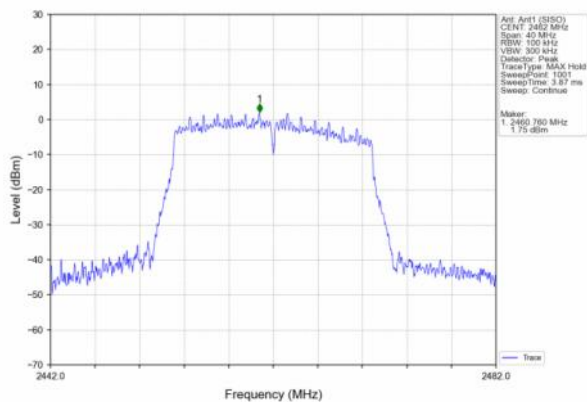




802.11n 40 2422MHz

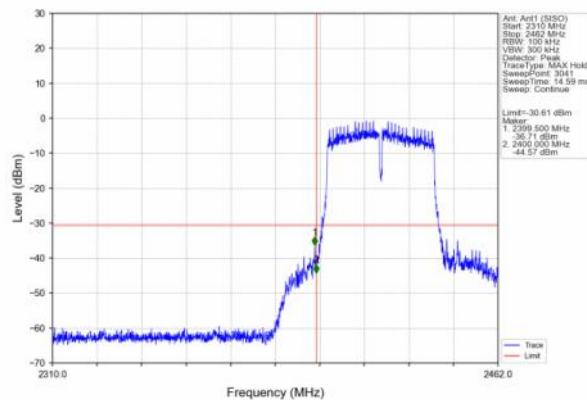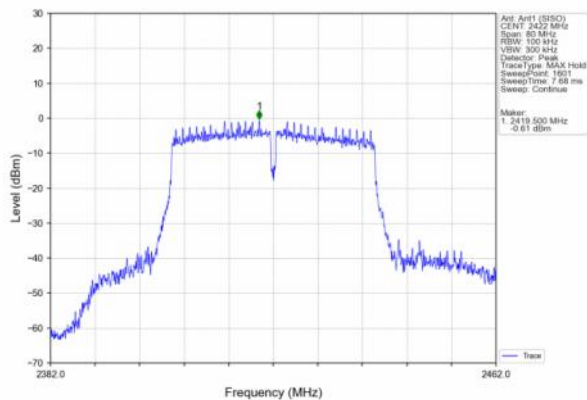

802.11n40 2452MHz

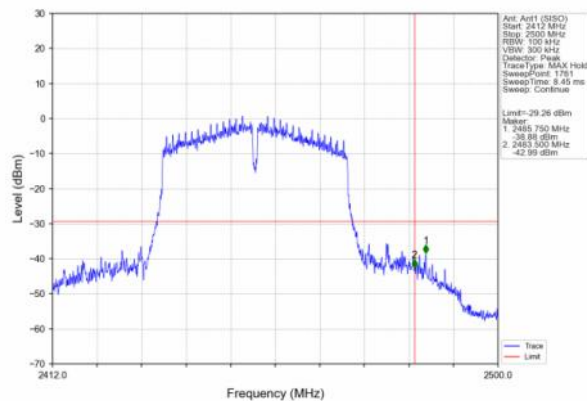
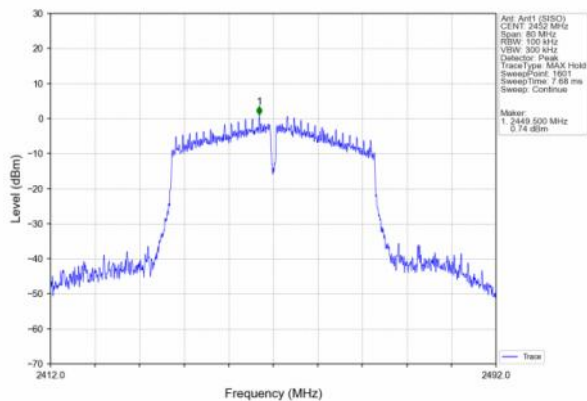




For Conducted



During the test, pre-scan the all modulation, and found the 802.11b mode which it is worse case.

Test Mode: 802.11b	Lowest channel
--------------------	----------------

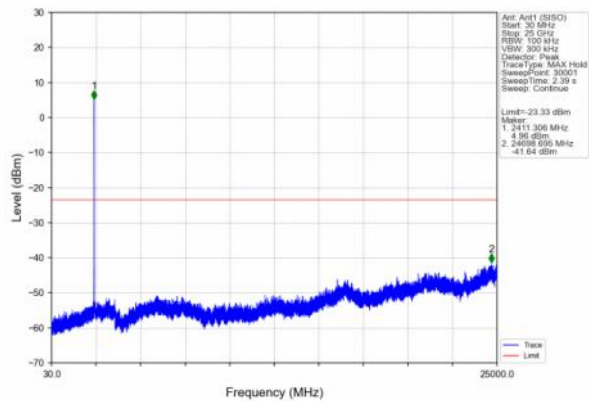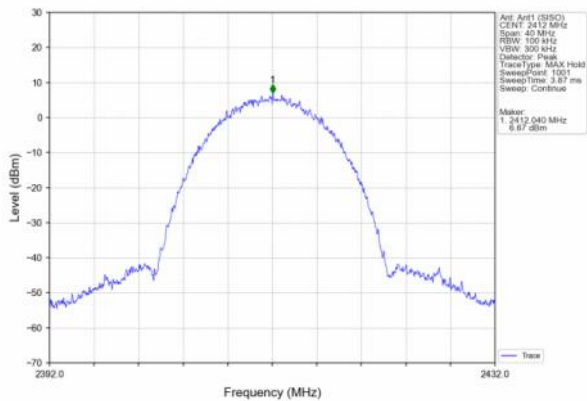



0.03GHz~26.5GHz

Test channel: 802.11b	Middle channel
-----------------------	----------------

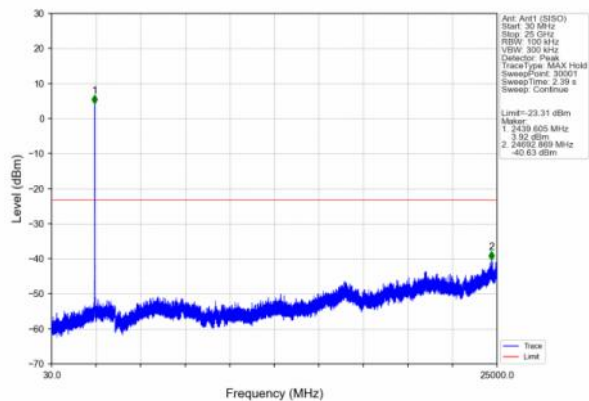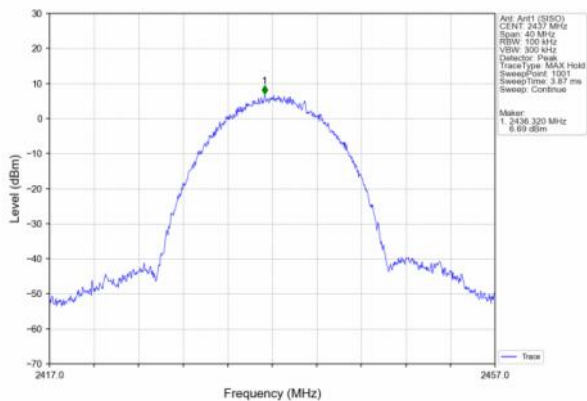

0.03GHz~26.5GHz

Test channel: 802.11b	Highest channel
-----------------------	-----------------

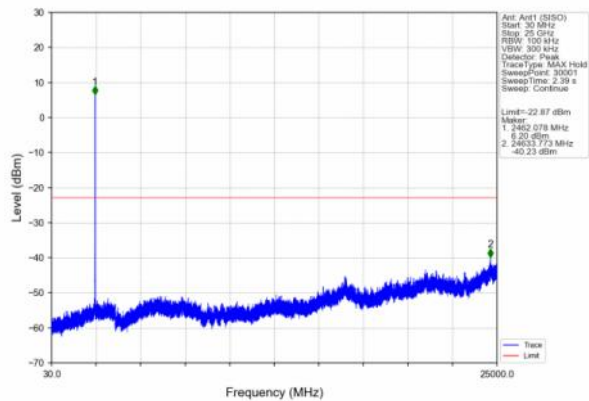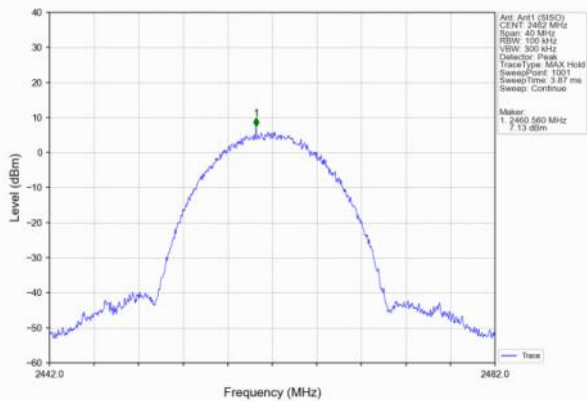

0.03GHz~26.5GHz



4. AVERAGE OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS

4.1.1 TEST PROCEDURE


Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- Measure the duty cycle D of the transmitter output signal as described in 11.6.
- Set span to >1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, but do not exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = Power averaging (rms), if available. Otherwise, use the sample detector mode.
- Do not use sweep triggering. Allow the sweep to "free run."
- Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 until trace is stabilized so that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band-power measurement function with band limits set equal to the OBW band-edges. If the instrument does not have a band-power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

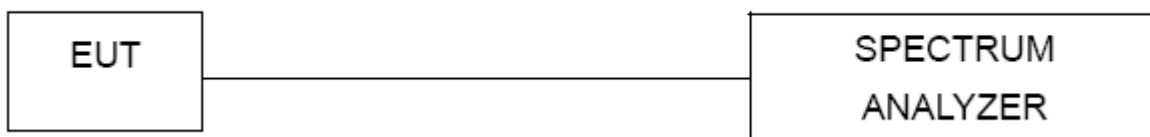

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


**4.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60HZ

Mode	Test Channel	Maximum Conducted Output Power (dBm)		ANT1&ANT2 MIMO Maximum Conducted Output Power (dBm)	LIMIT dBm
		Antenna1	Antenna2		
802.11b	Low	14.43	12.30	/	30
	Middle	14.64	12.66	/	30
	High	14.14	12.22	/	30
802.11g	Low	14.56	12.03	/	30
	Middle	15.05	12.25	/	30
	High	12.12	11.86	/	30
802.11n20	Low	12.16	11.98	15.08	30
	Middle	12.50	12.21	15.37	30
	High	12.10	12.00	15.06	30
802.11n40	Low	13.19	13.01	16.11	30
	Middle	12.76	12.53	15.66	30
	High	12.62	12.34	15.49	30




Antenna1:

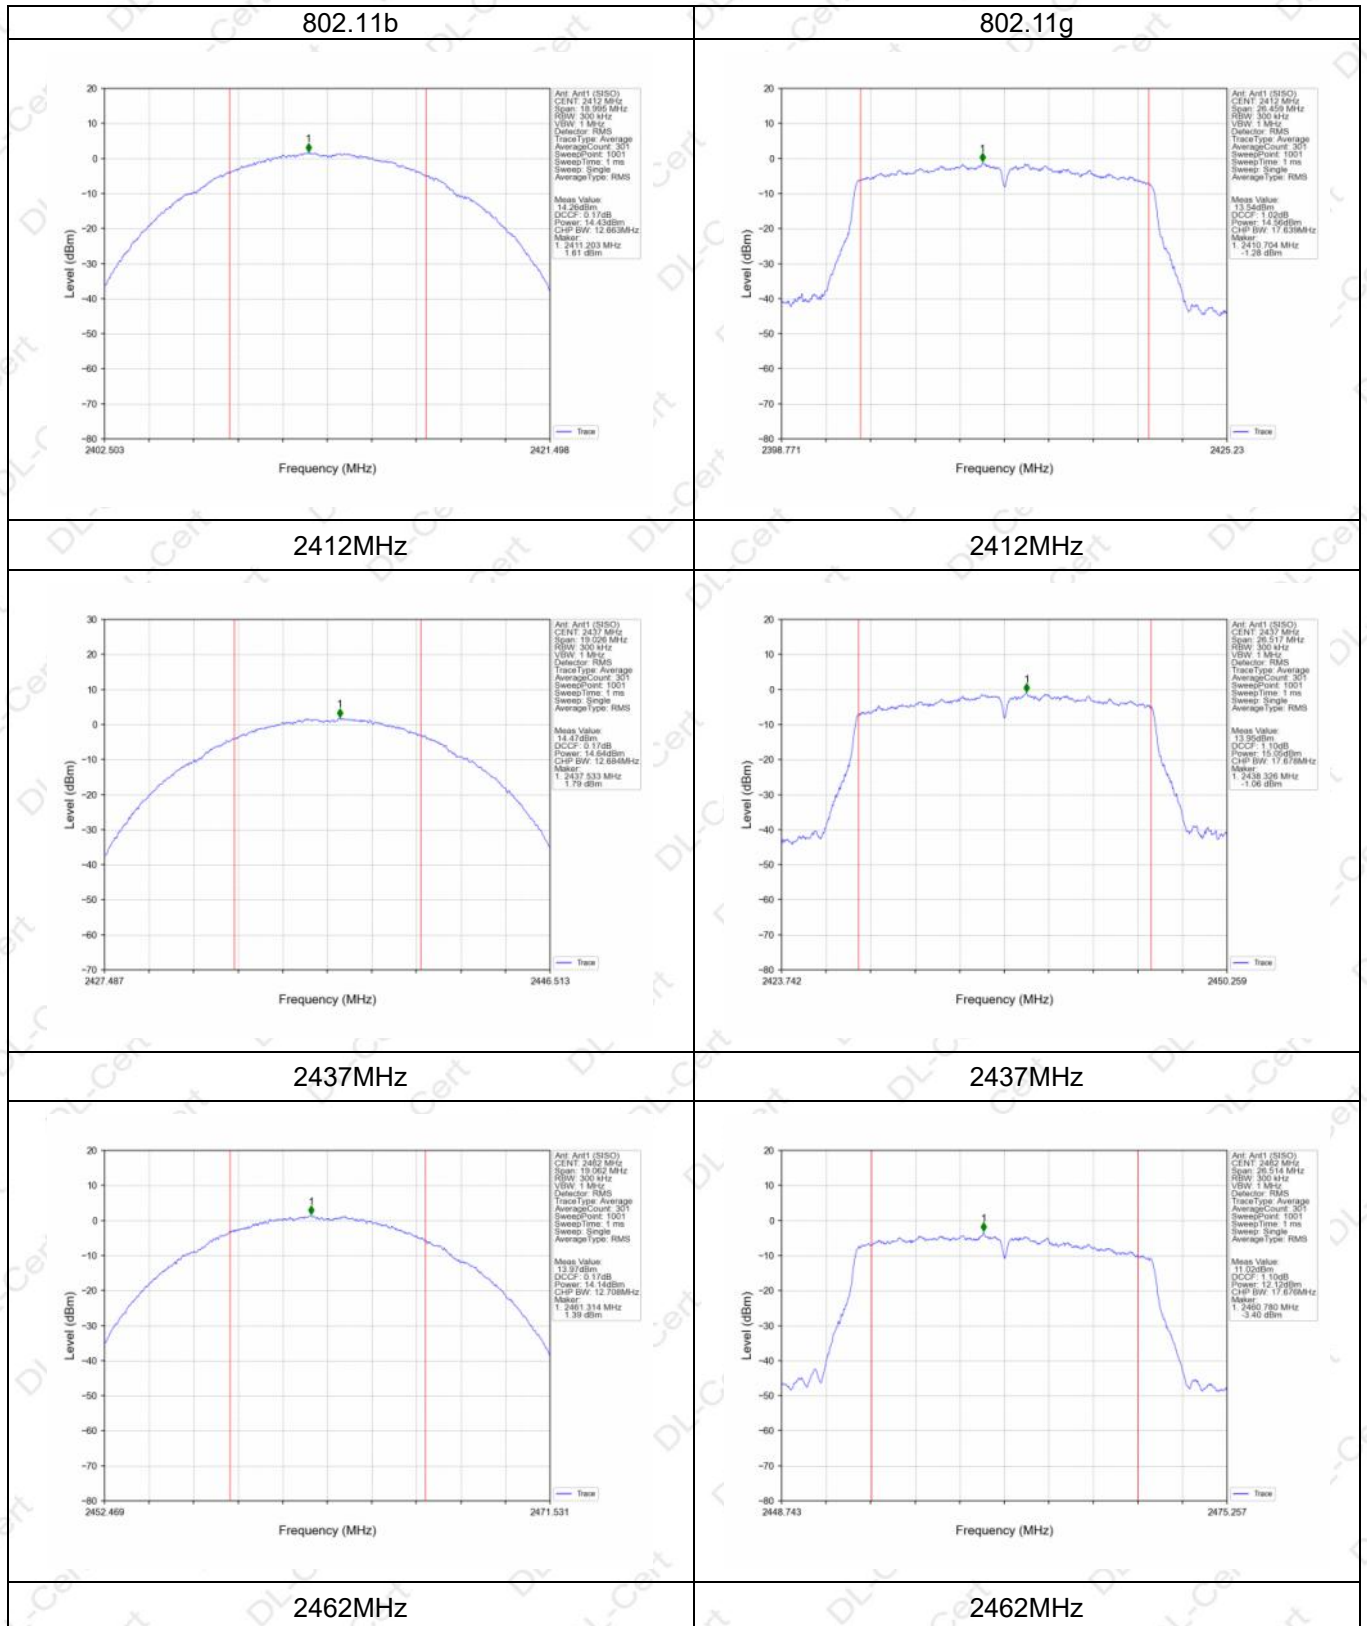





802.11n HT20

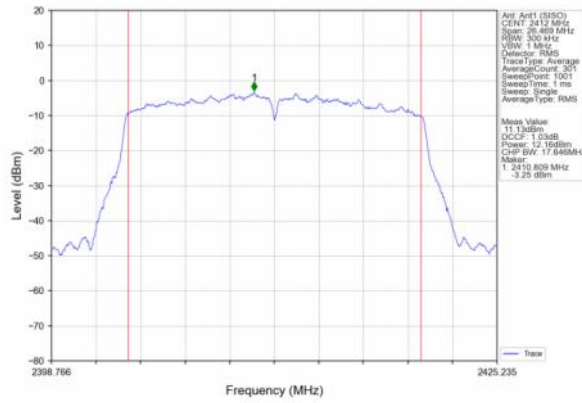


802.11n HT40

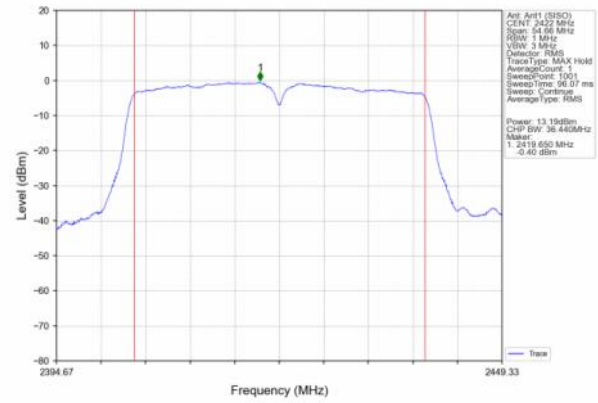


2412MHz

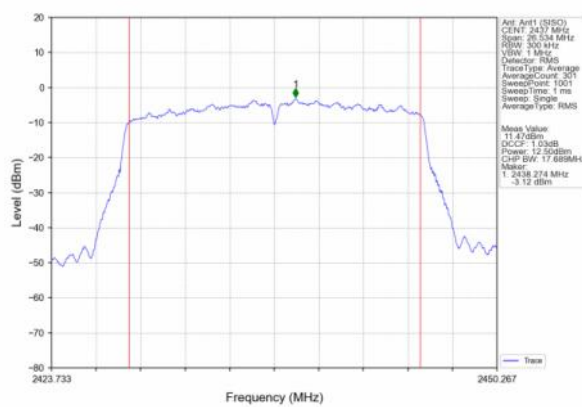


2422MHz

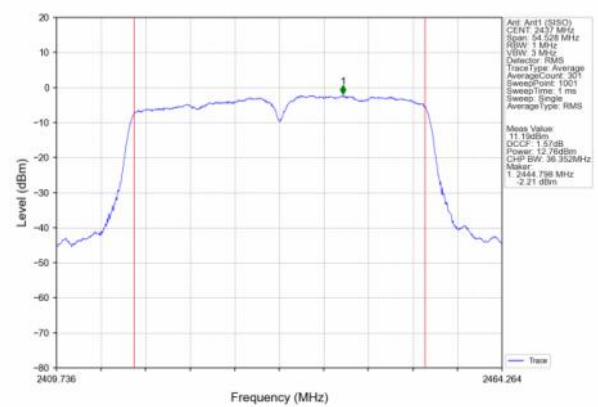

2437MHz

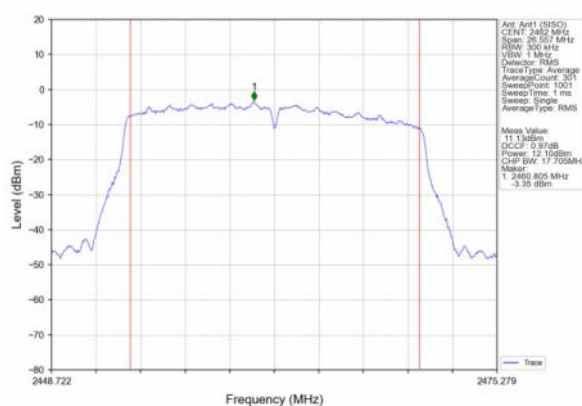

2437MHz

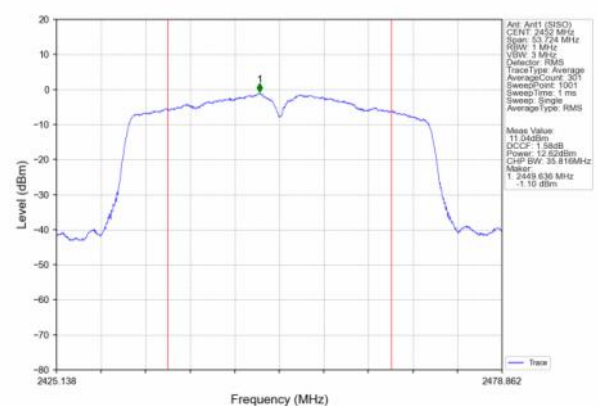

2462MHz




2452MHz






Antenna2:

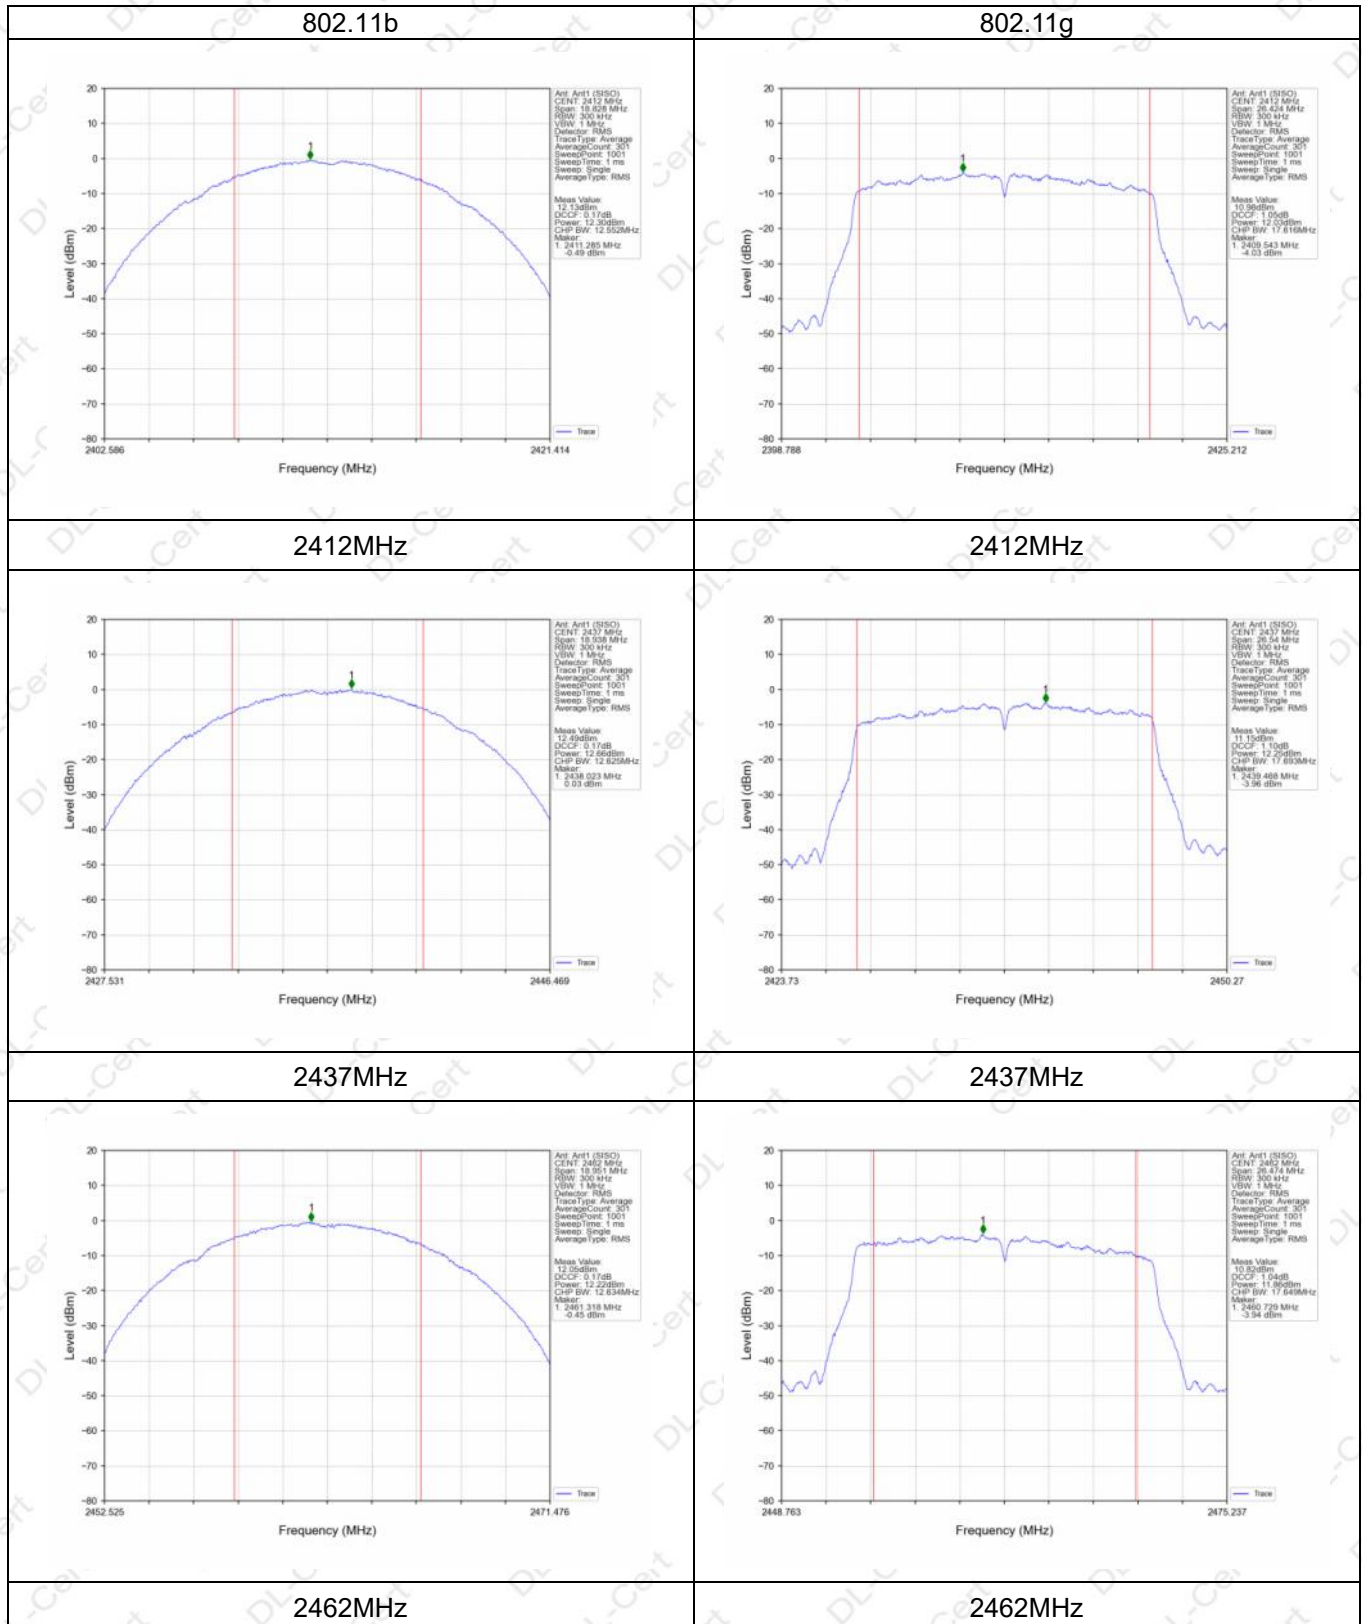





802.11n HT20

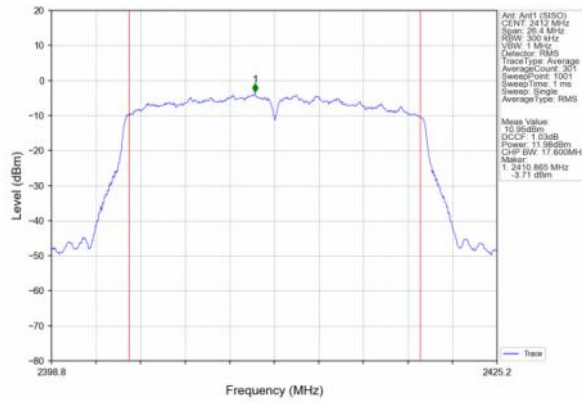


802.11n HT40

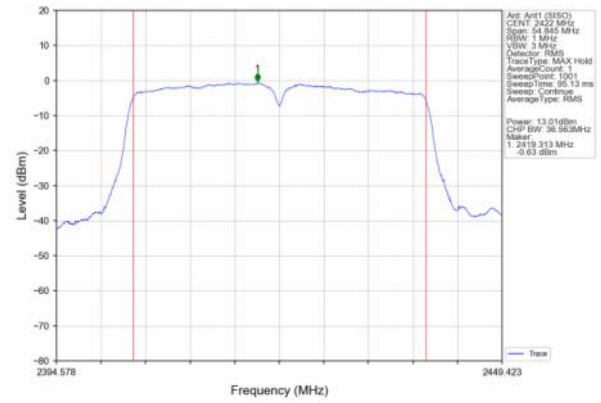


2412MHz

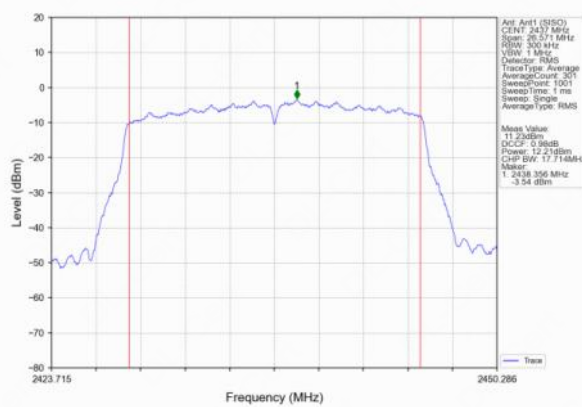


2422MHz

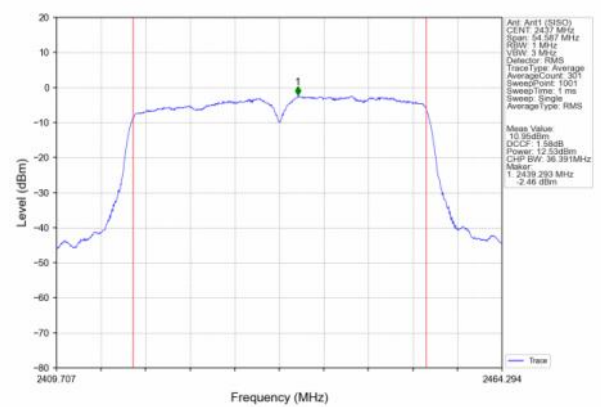

2437MHz

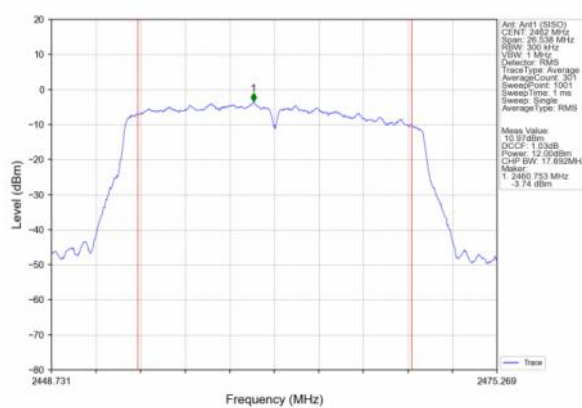

2437MHz

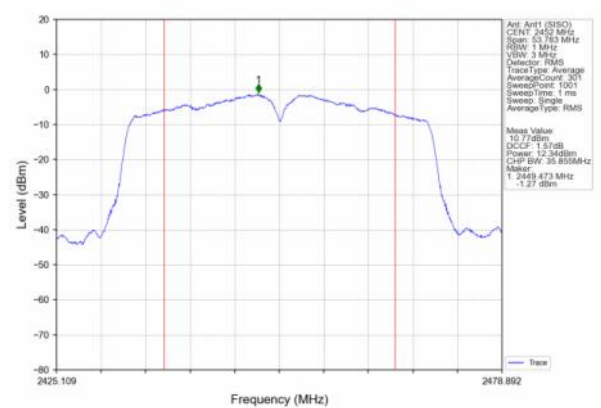

2462MHz



2452MHz





5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW $\geq$ 3kHz
VB	VBW $\geq$ 3RBW
Detector	power averaging (rms) or sample detector (when rms not available).
Trace	rms/average
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


**5.1.5 TEST RESULTS**

	Test Channel	Reading Level (dBm/3kHz)		ANT1&ANT2 MIMO Power Spectral Density (dBm/3KHz)	Limit (dBm)	Result
		ANT1	ANT2			
802.11b	Low	-15.52	-17.51	/	<8	PASS
	Middle	-15.35	-17.37	/	<8	PASS
	High	-15.87	-17.67	/	<8	PASS
802.11g	Low	-12.18	-14.79	/	<8	PASS
	Middle	-11.31d	-14.13	/	<8	PASS
	High	-15.43	-15.60	/	<8	PASS
802.11n (20MHz)	Low	-15.82	-16.05	-12.92	<8	PASS
	Middle	-16.06	-16.27	-13.15	<8	PASS
	High	-16.16	-16.27	-13.20	<8	PASS
802.11n (40MHz)	Low	-6.64	-6.76	-3.69	<8	PASS
	Middle	-8.01	-8.14	-5.06	<8	PASS
	High	-6.50	-7.67	-4.04	<8	PASS




Antenna1:

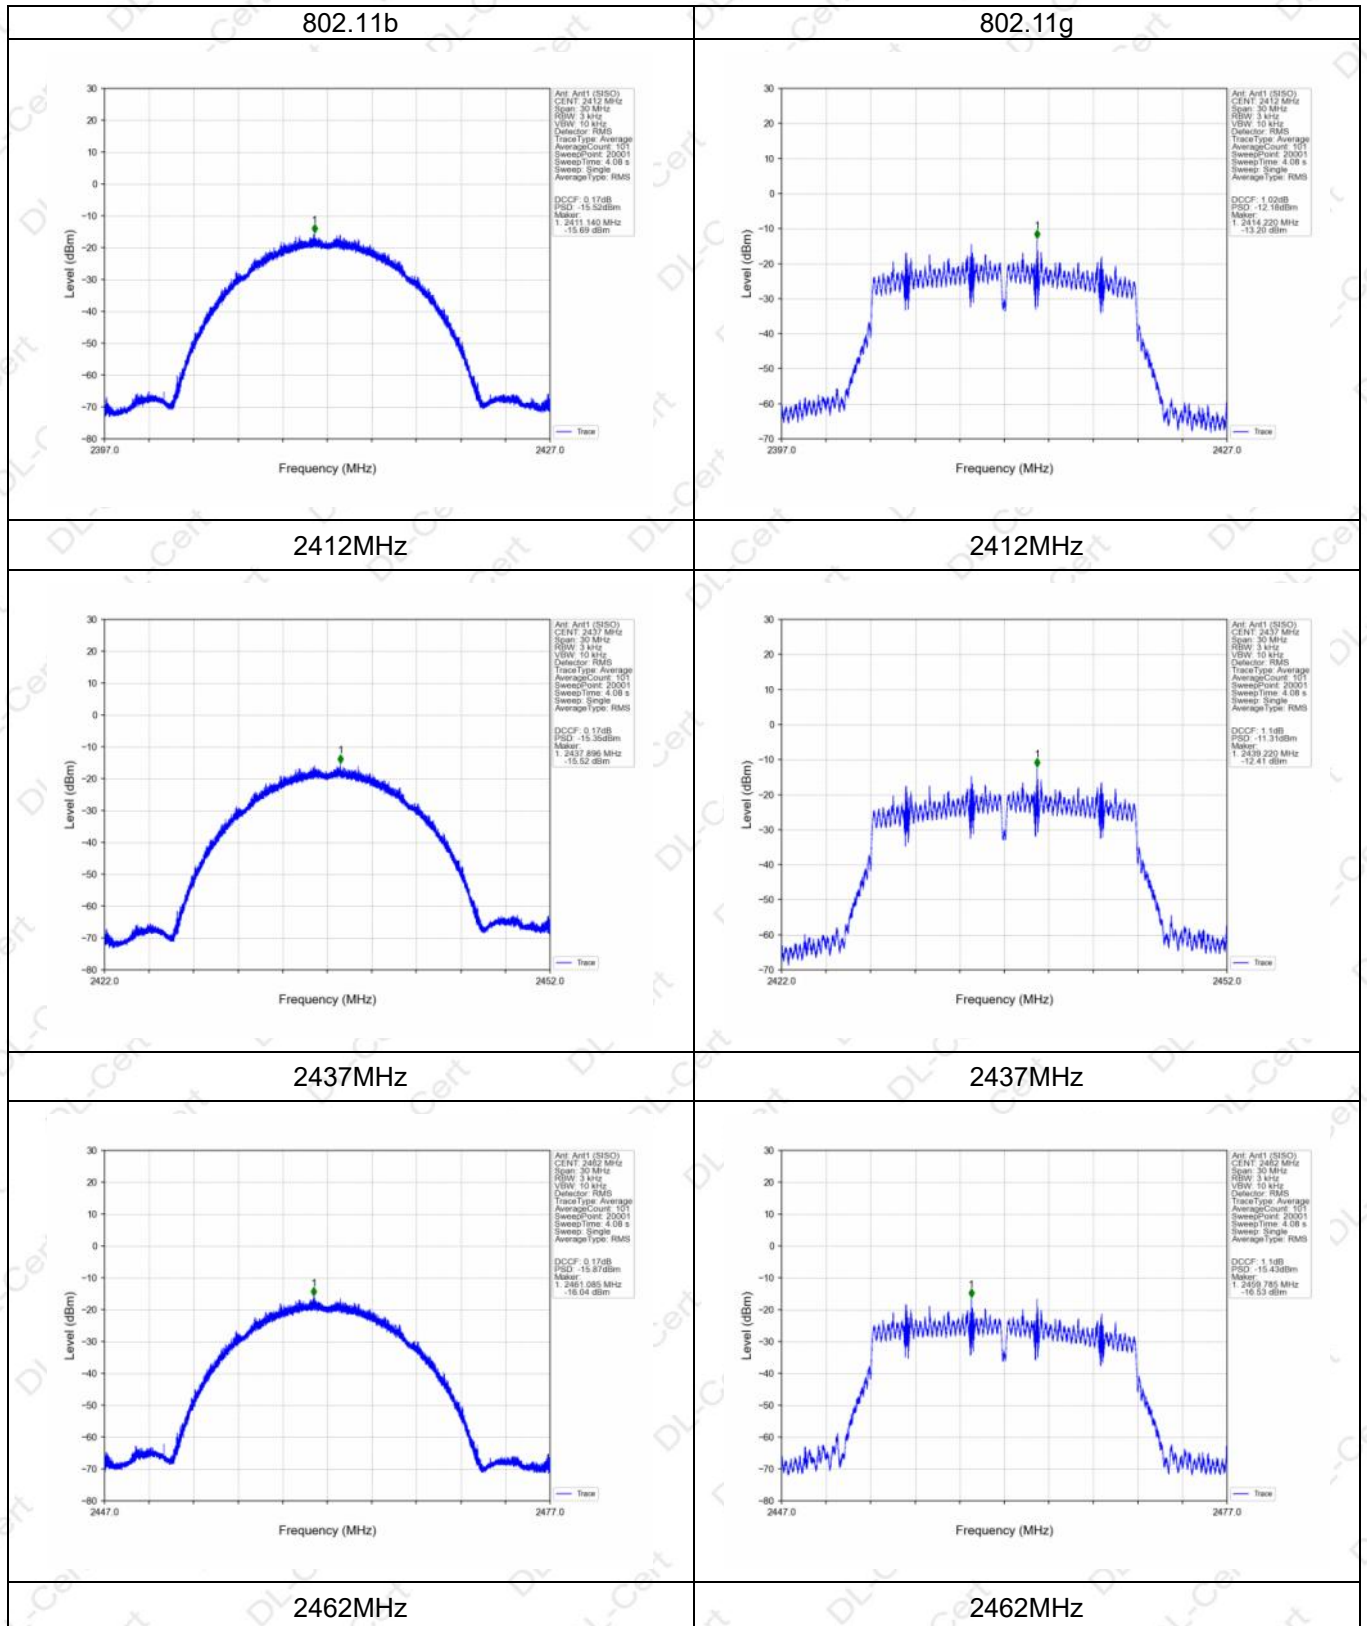

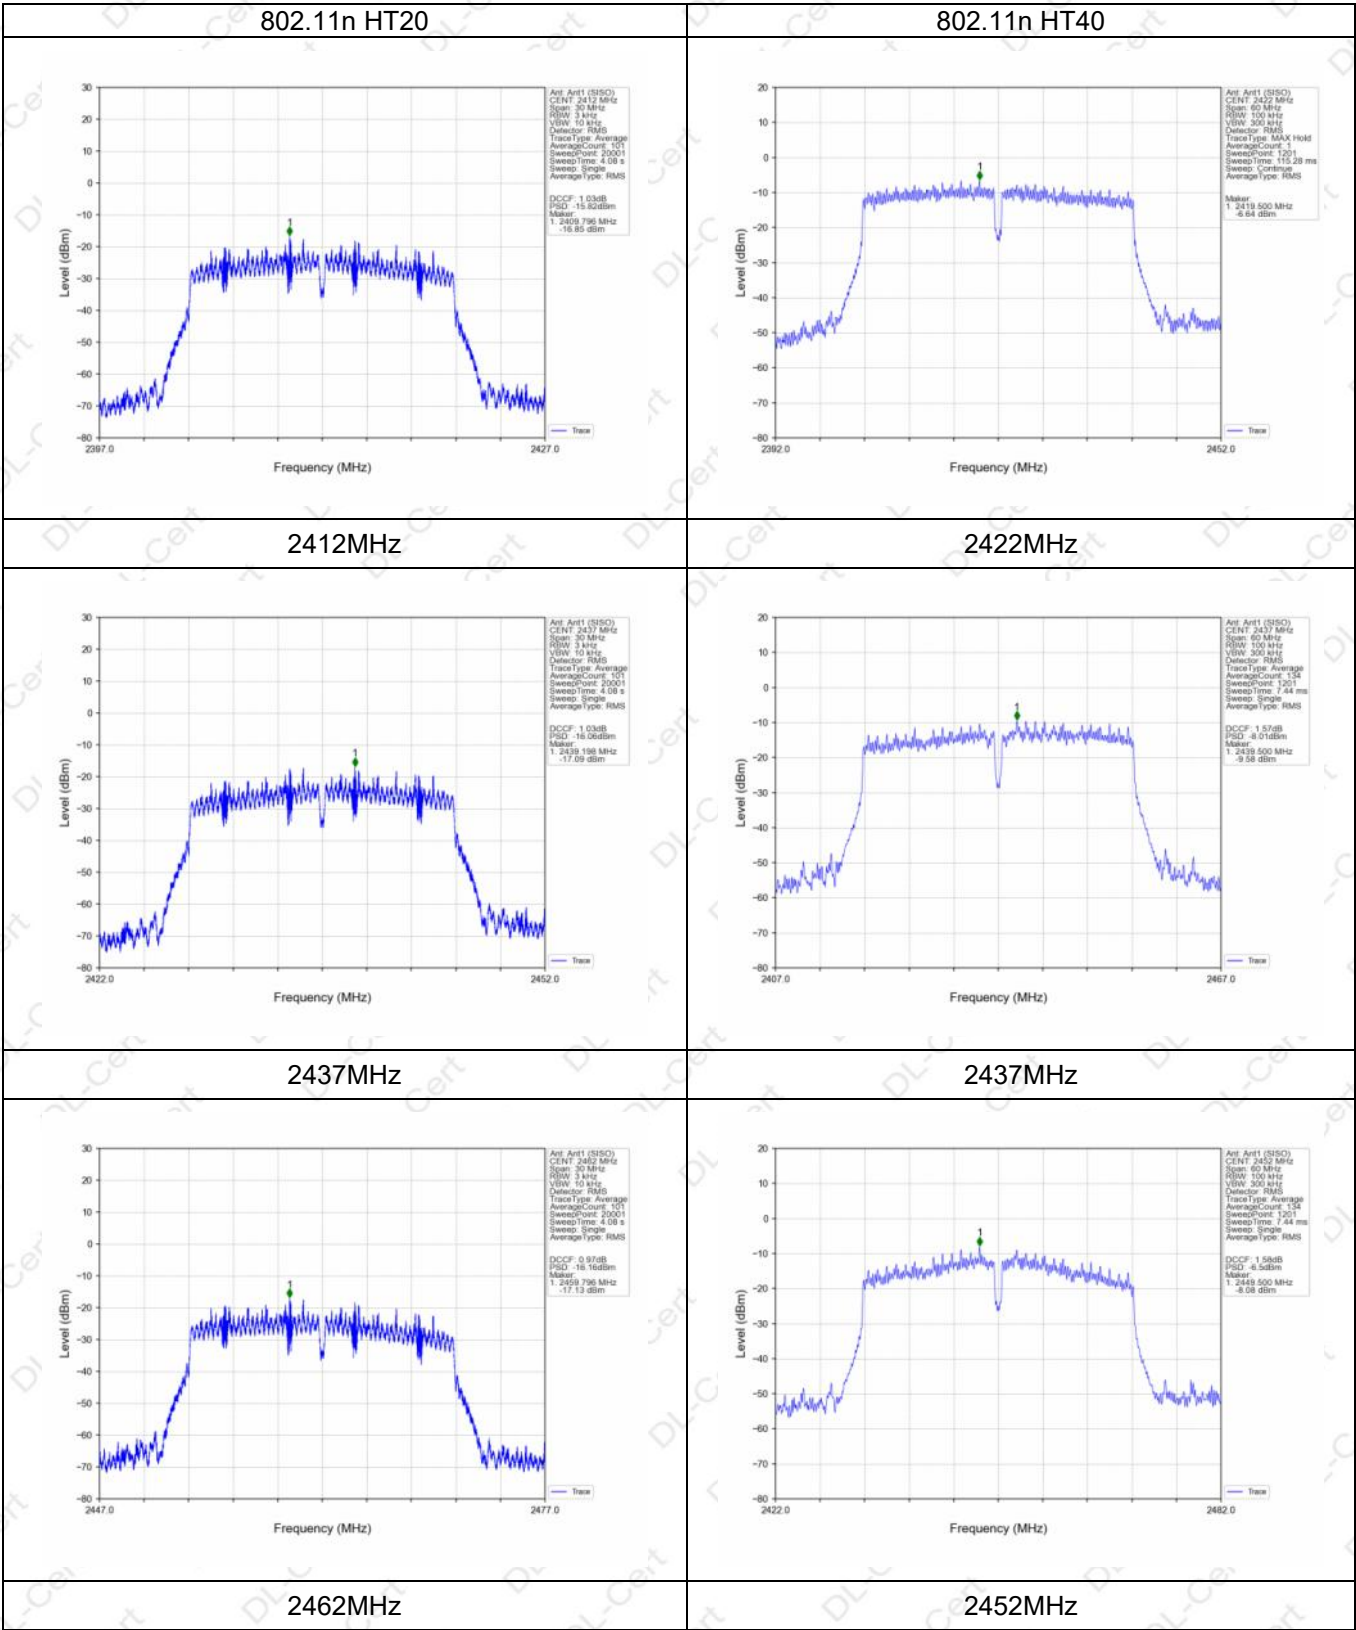




Antenna2:

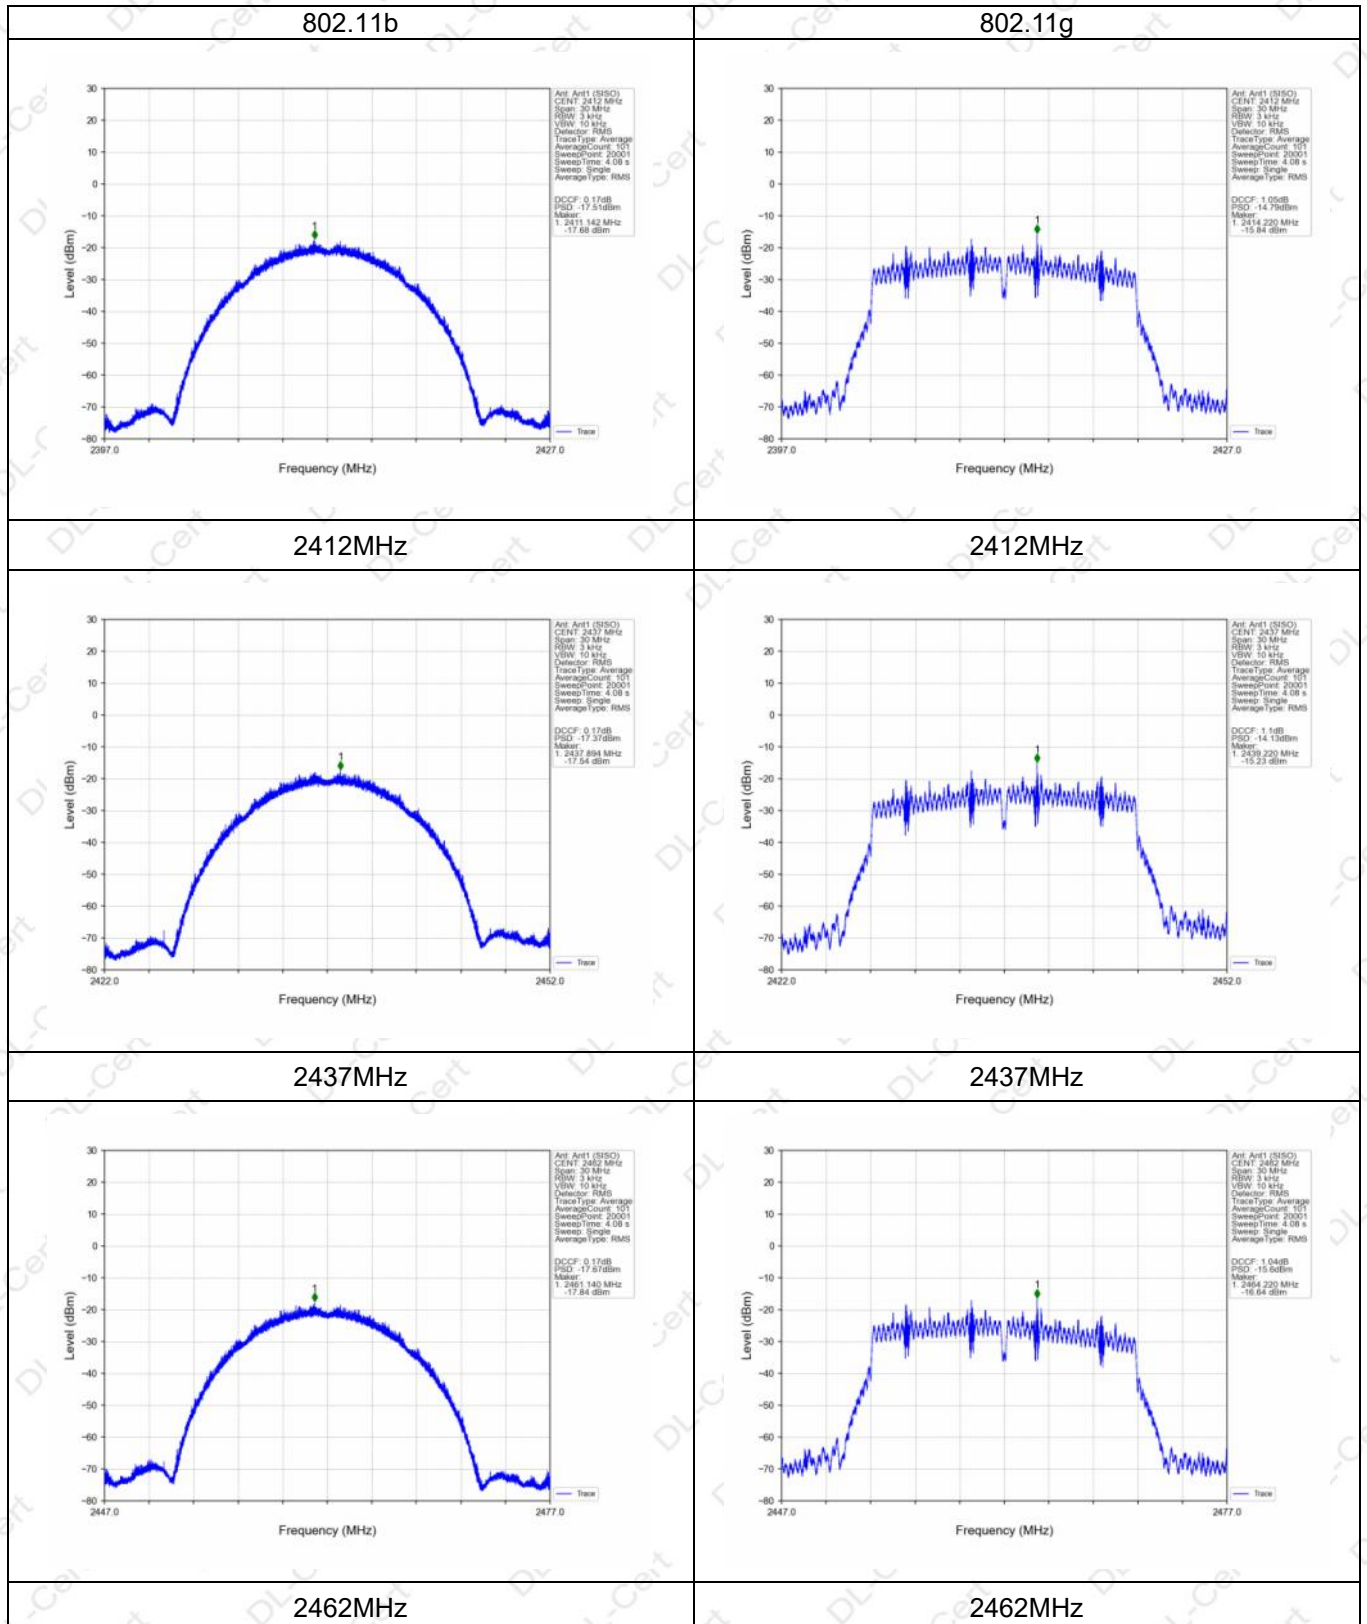





802.11n HT20

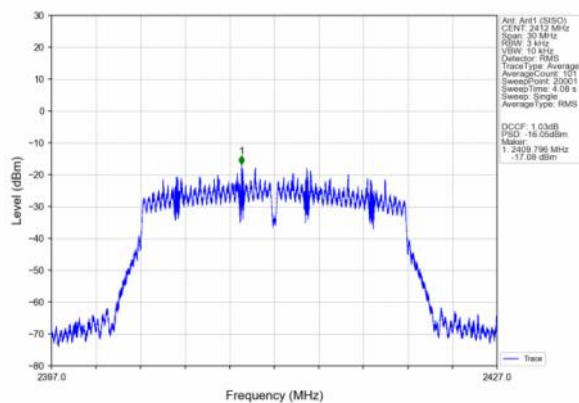


802.11n HT40

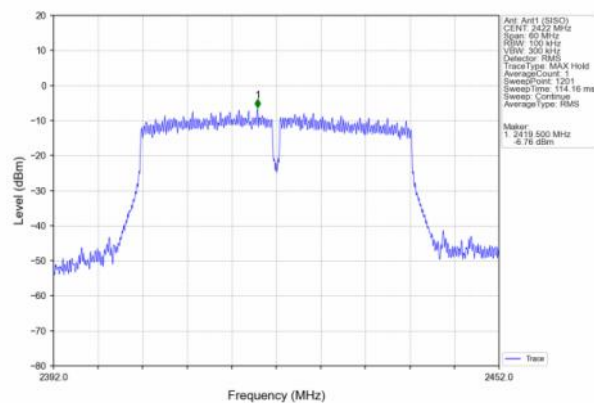


2412MHz

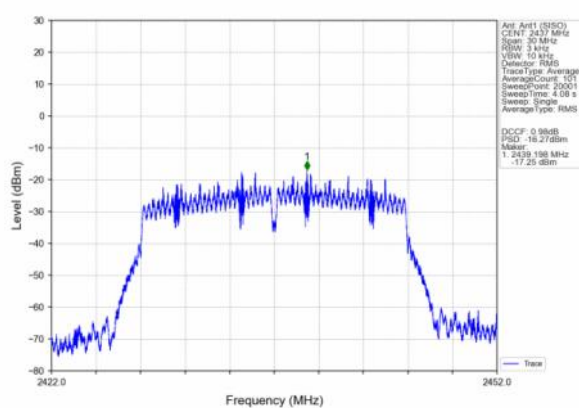


2422MHz

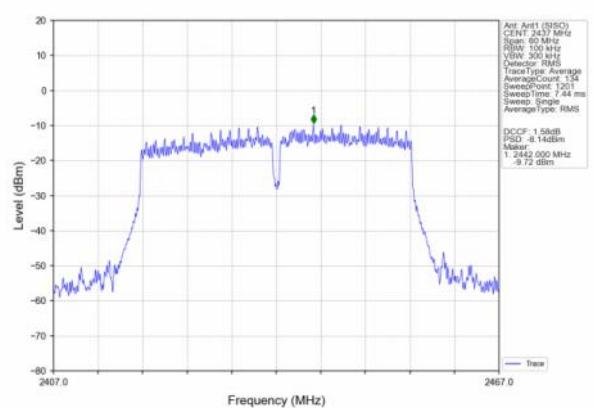

2437MHz

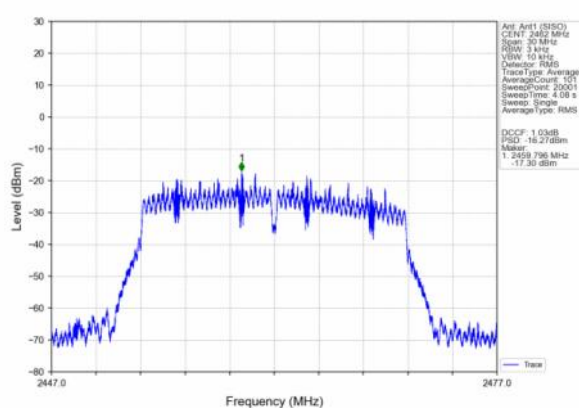

2437MHz

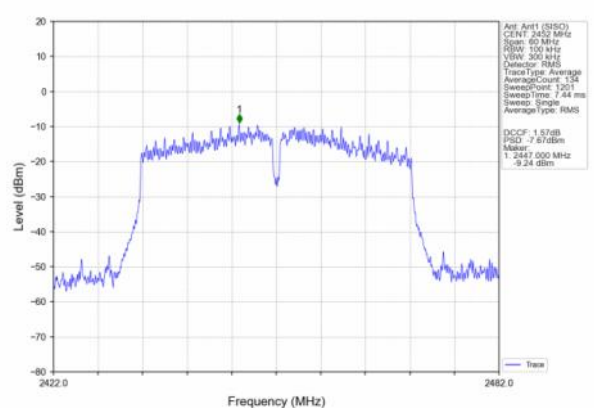

2462MHz

2452MHz



6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

1. Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

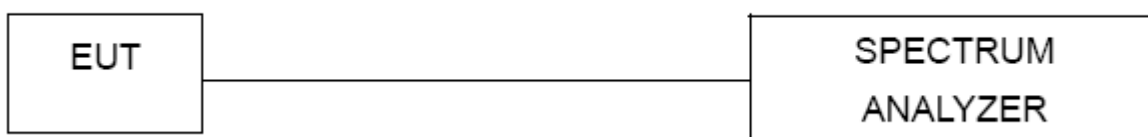

6.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


**6.1.5 TEST RESULTS**

Test Channel		6dB Bandwidth(MHz)		Limit(MHz)	Result
		Ant1	Ant2		
802.11b	Low	8.372	7.883	≥0.5	Pass
	Middle	7.973	8.140		
	High	8.360	7.925		
802.11g	Low	17.126	17.276		
	Middle	17.446	17.572		
	High	15.826	15.616		
802.11n (20MHz)	Low	17.395	17.317		
	Middle	17.378	17.379		
	High	17.220	16.304		
802.11n (40MHz)	Low	35.579	36.081		
	Middle	35.554	35.941		
	High	27.070	27.892		




Antenna1:

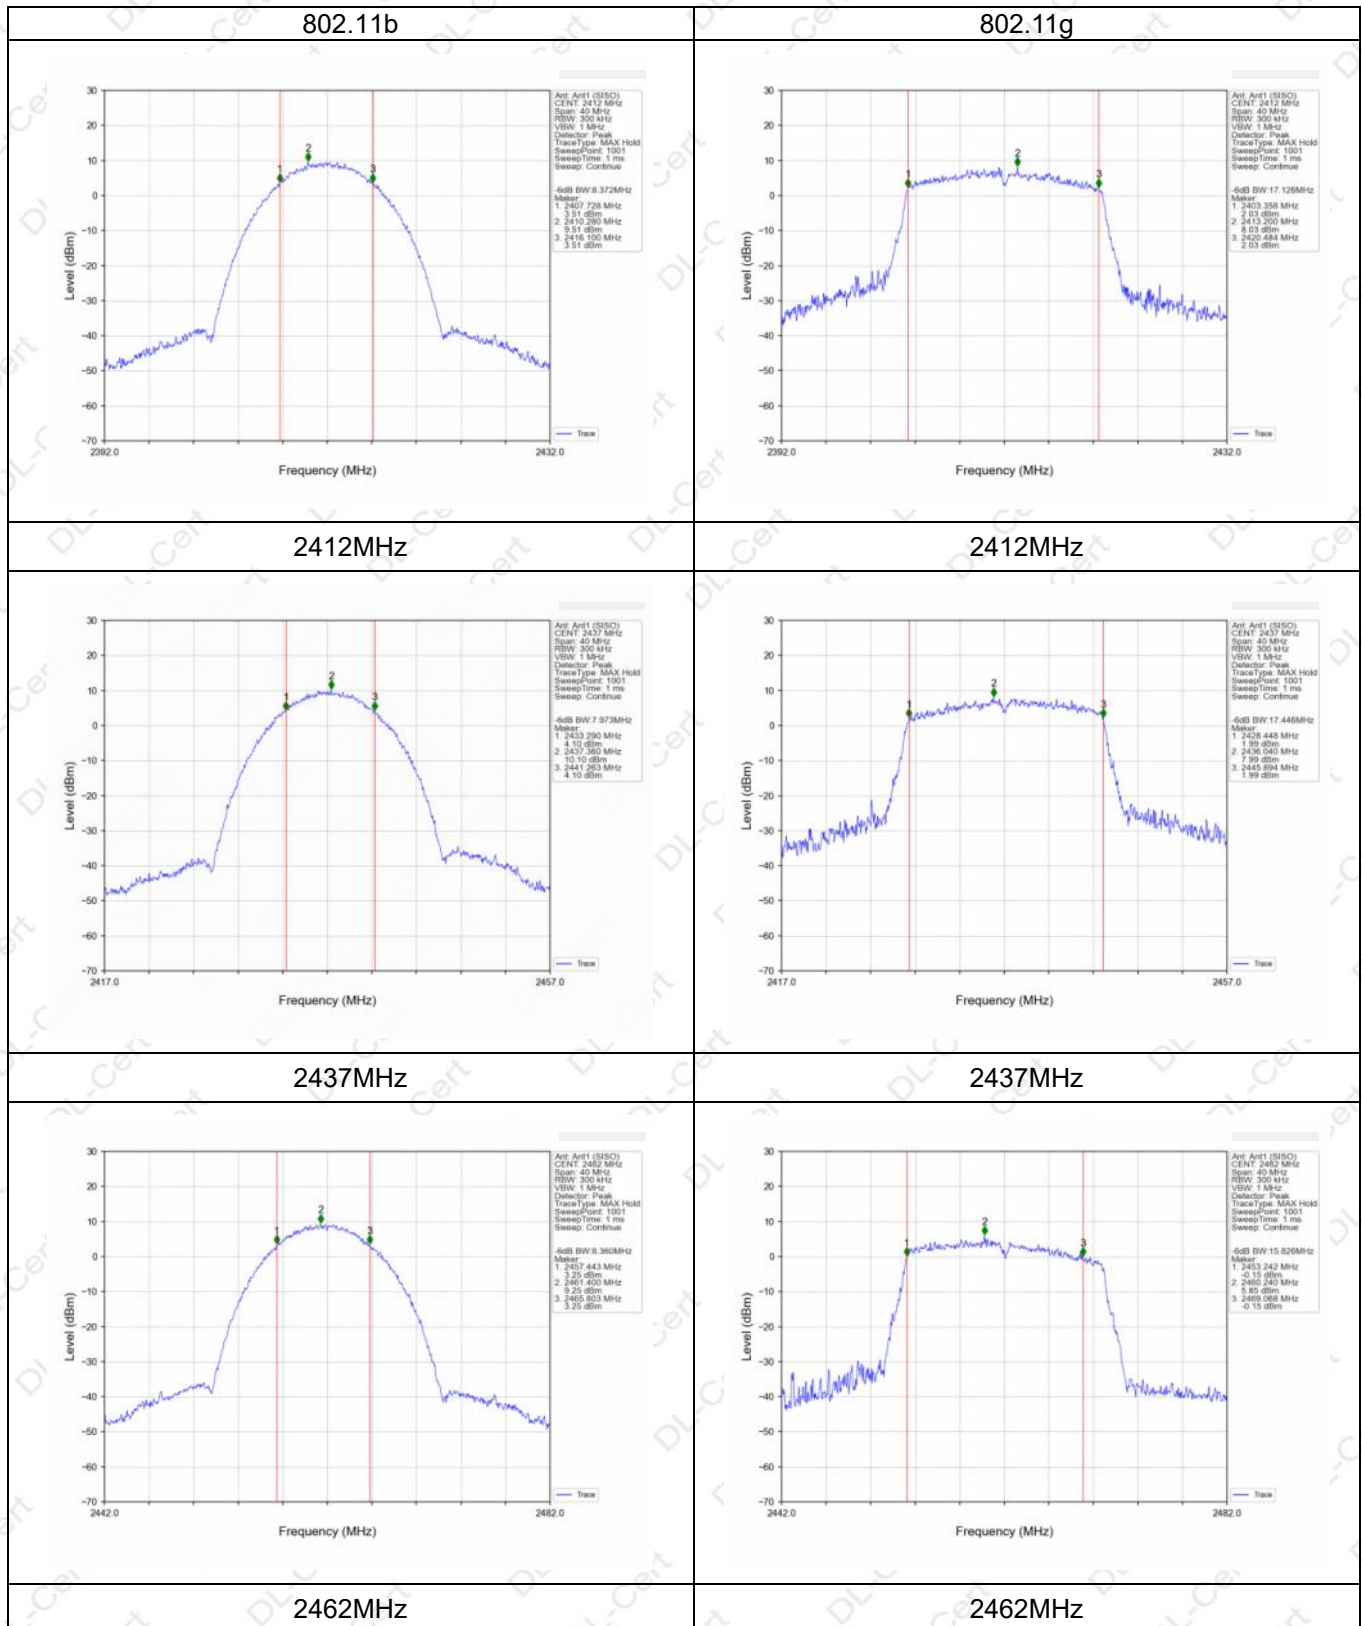

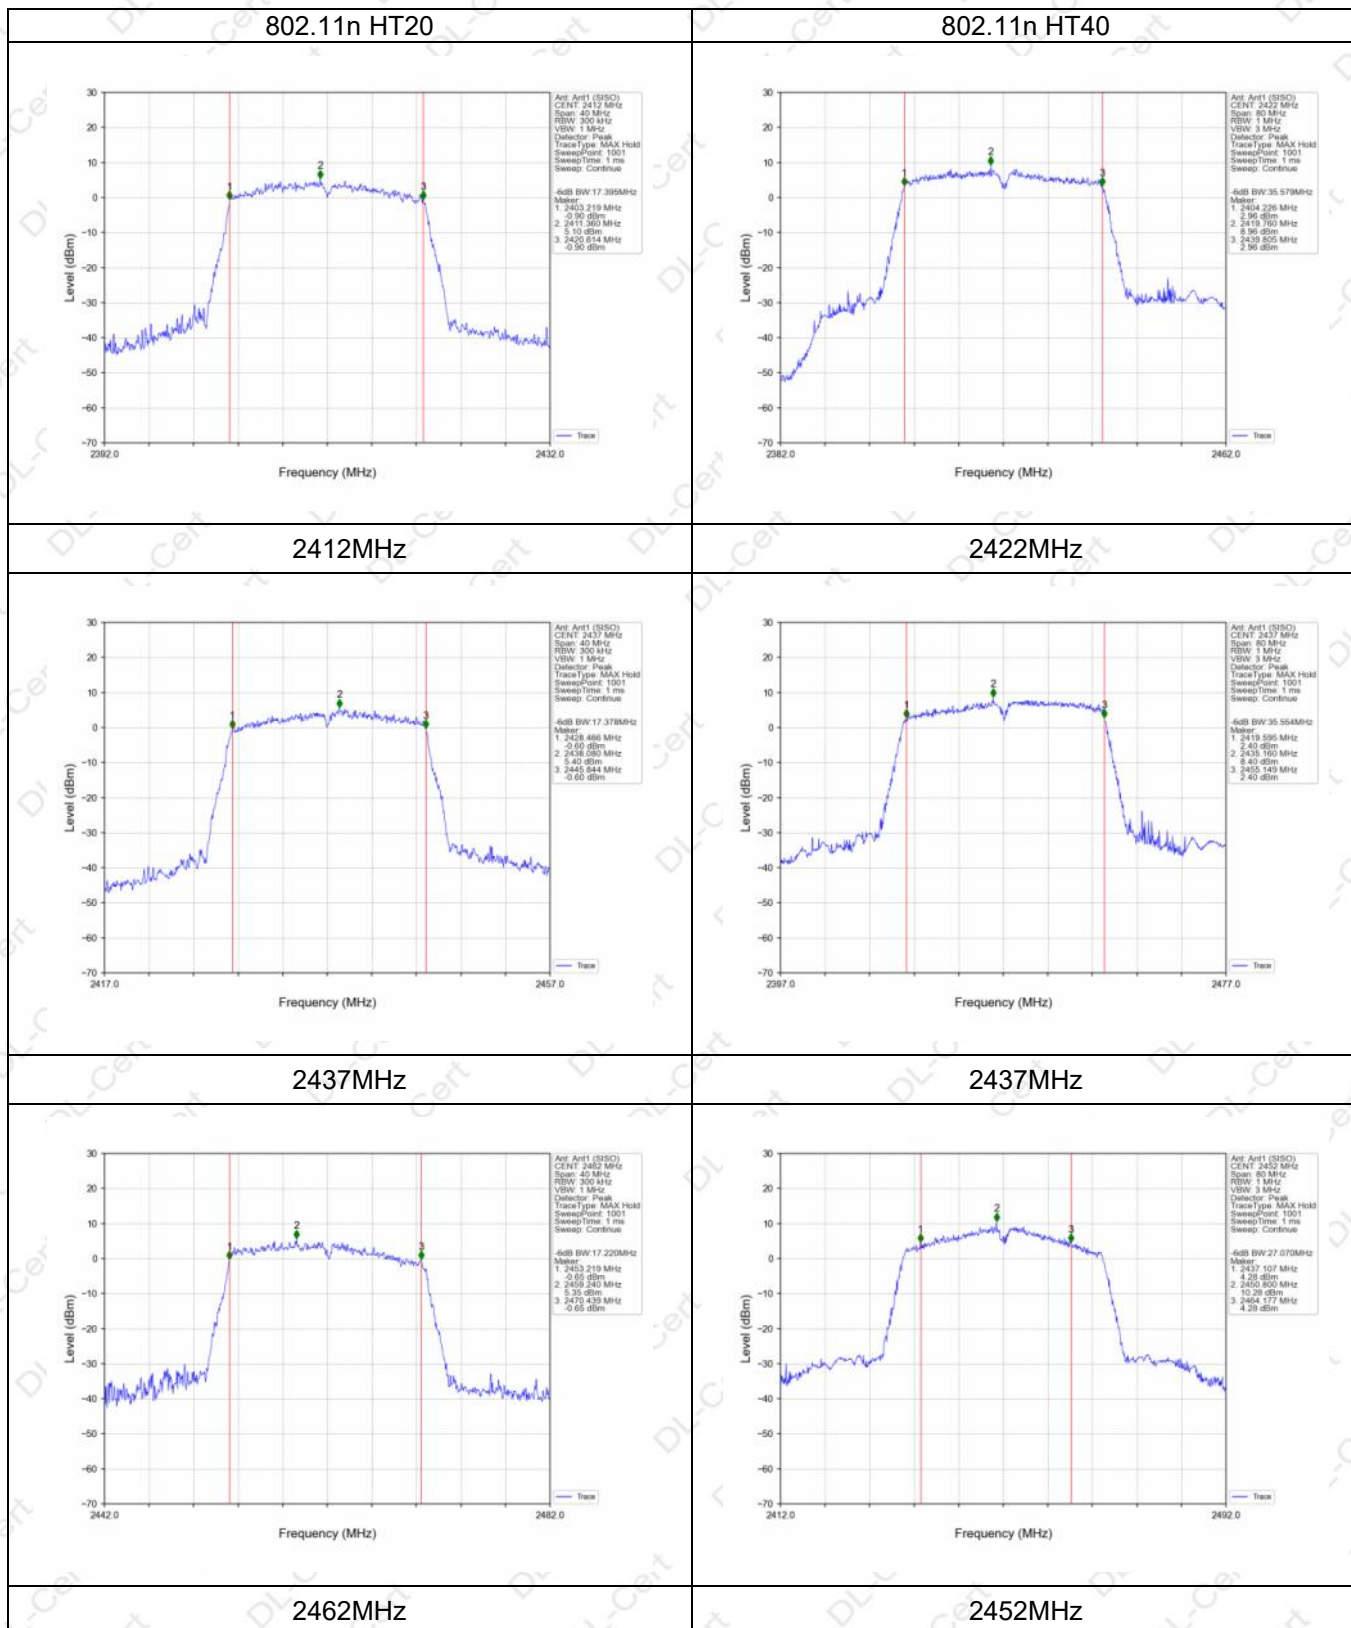




Antenna2:

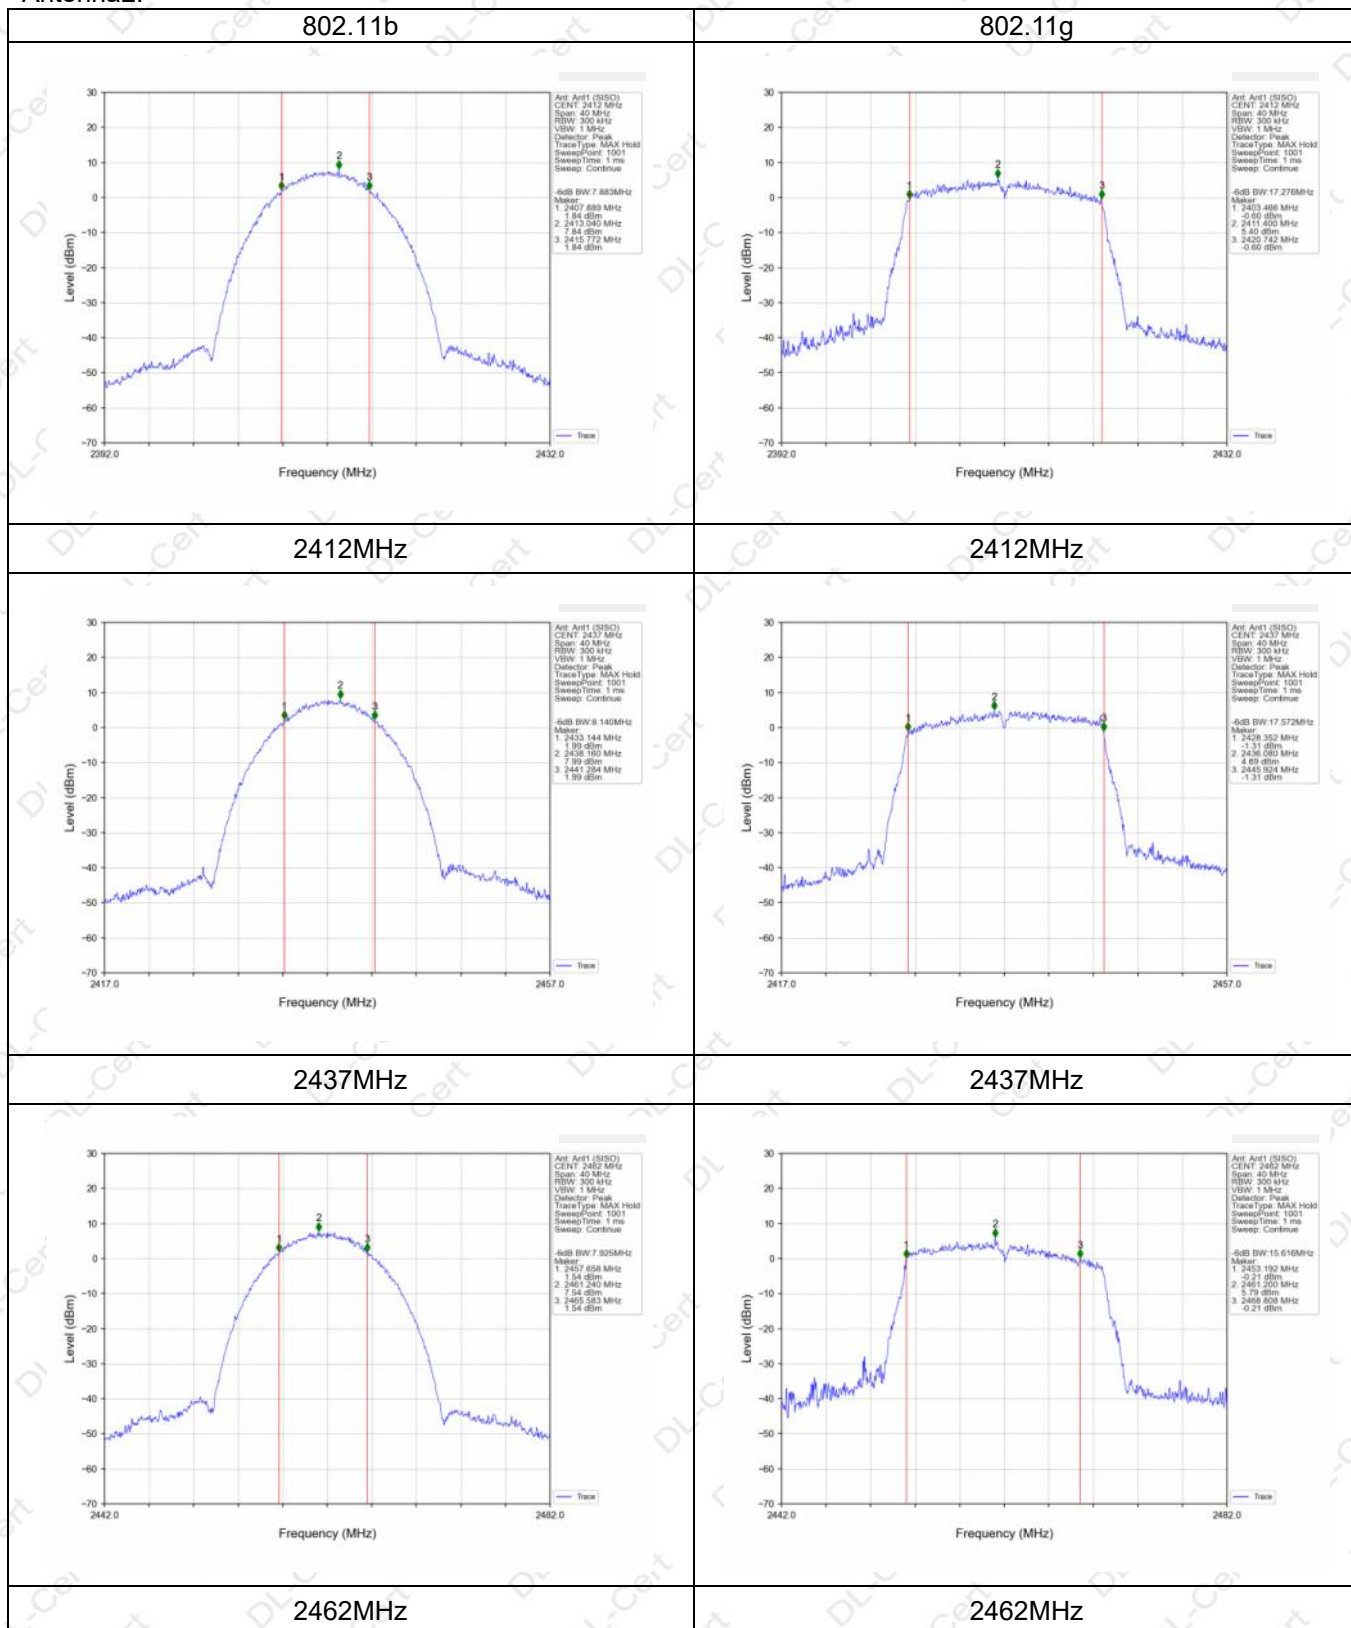





802.11n HT20

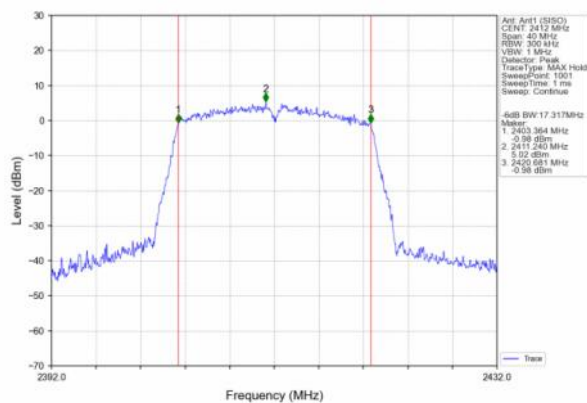


802.11n HT40

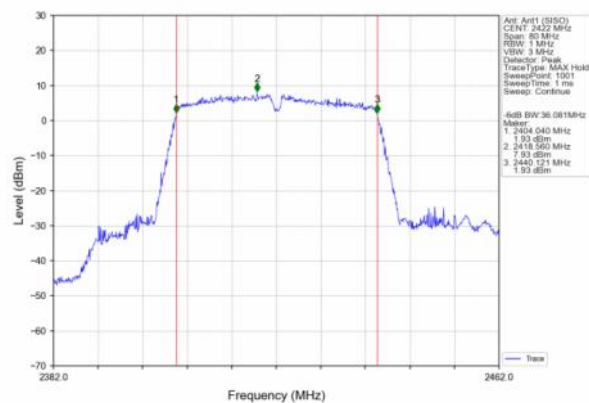


2412MHz

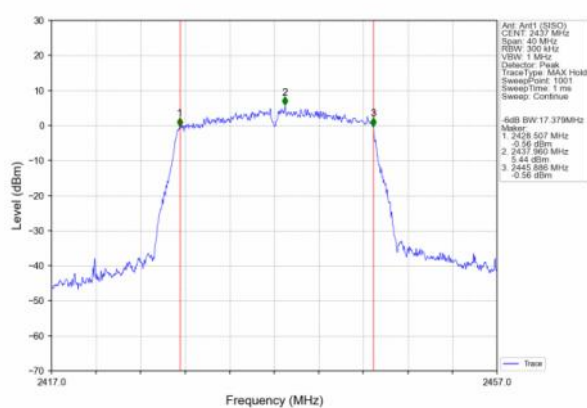


2422MHz

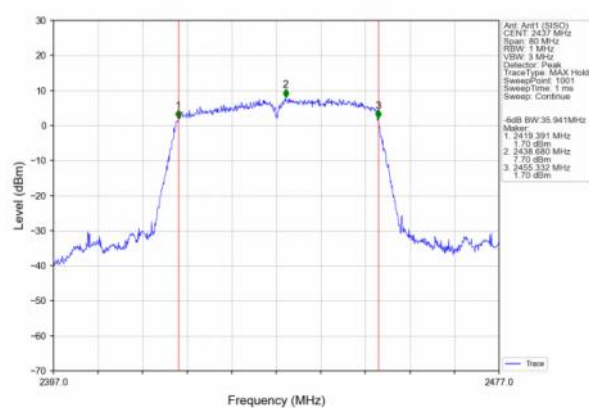

2437MHz

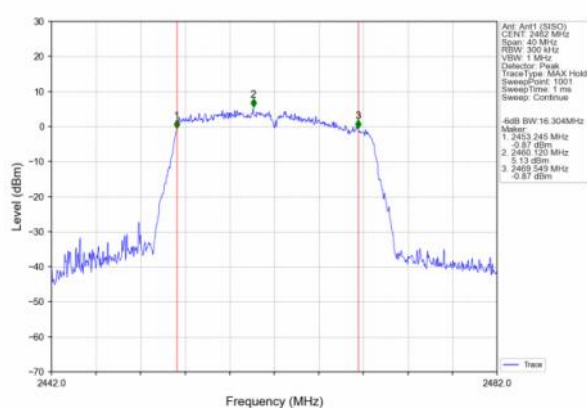

2437MHz

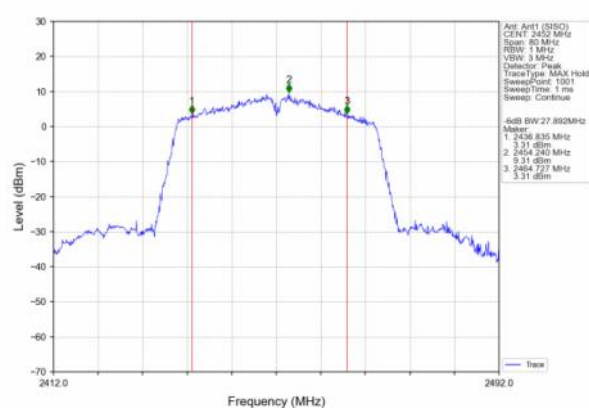

2462MHz


2452MHz



Test Channel		99% OBW (MHz)	
		Ant1	Ant2
802.11b	Low	12.663	12.552
	Middle	12.684	12.625
	High	12.708	12.634
802.11g	Low	17.639	17.616
	Middle	17.678	17.693
	High	17.676	17.649
802.11n (20MHz)	Low	17.646	17.600
	Middle	17.689	17.714
	High	17.705	17.692
802.11n (40MHz)	Low	36.440	36.563
	Middle	36.352	36.391
	High	35.816	35.855




Antenna1:

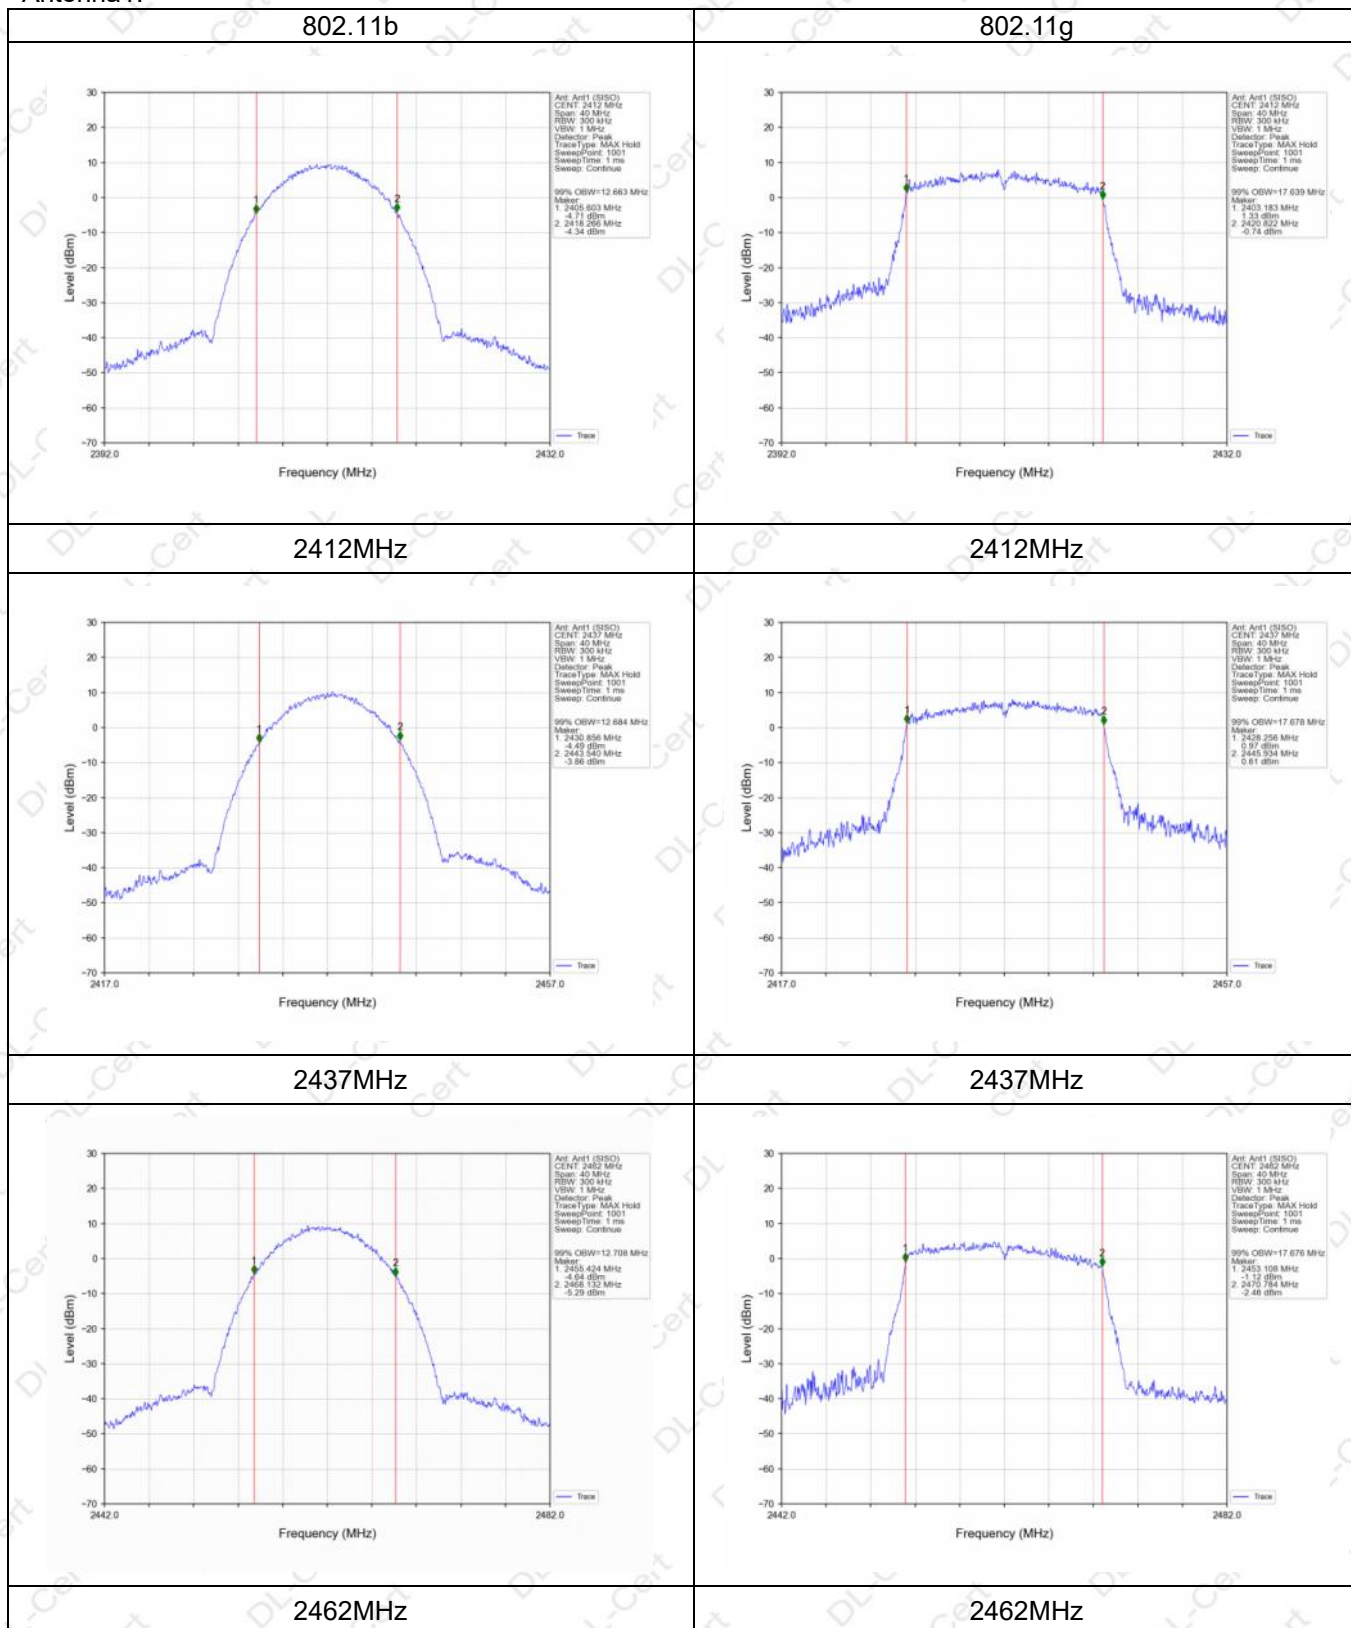





802.11n HT20

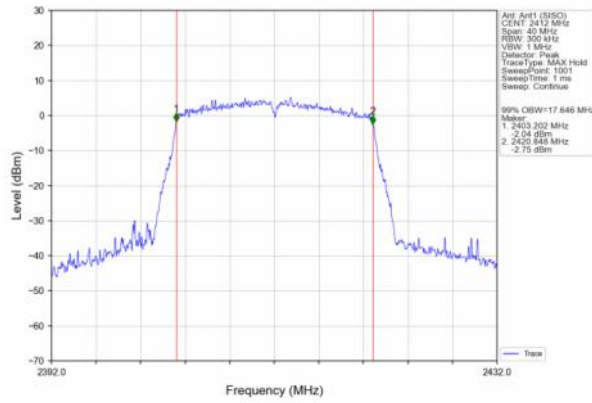


802.11n HT40

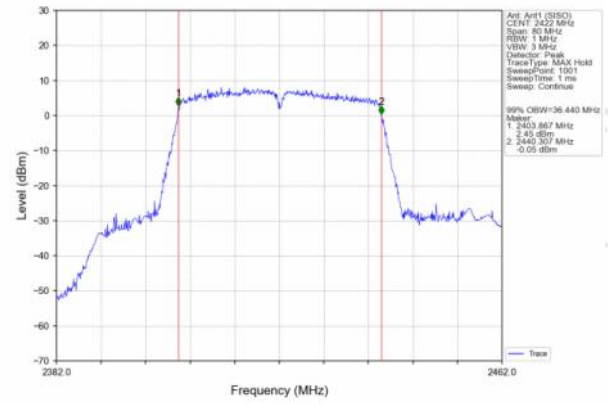


2412MHz

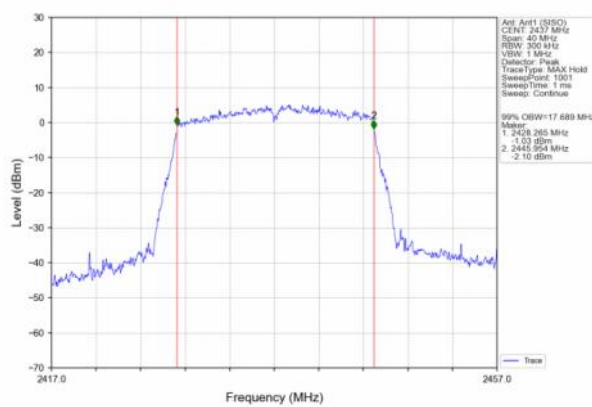


2422MHz

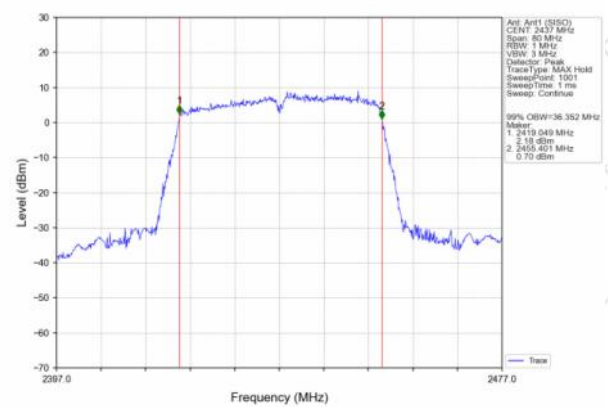

2437MHz

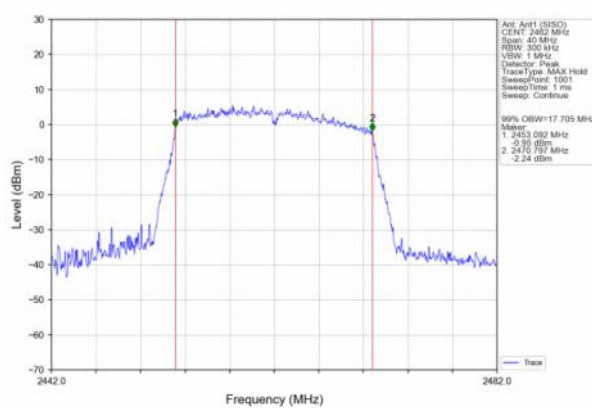

2437MHz

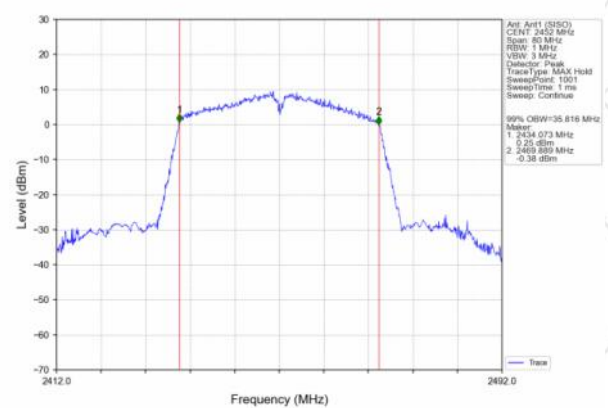


2462MHz

2452MHz




Antenna2:

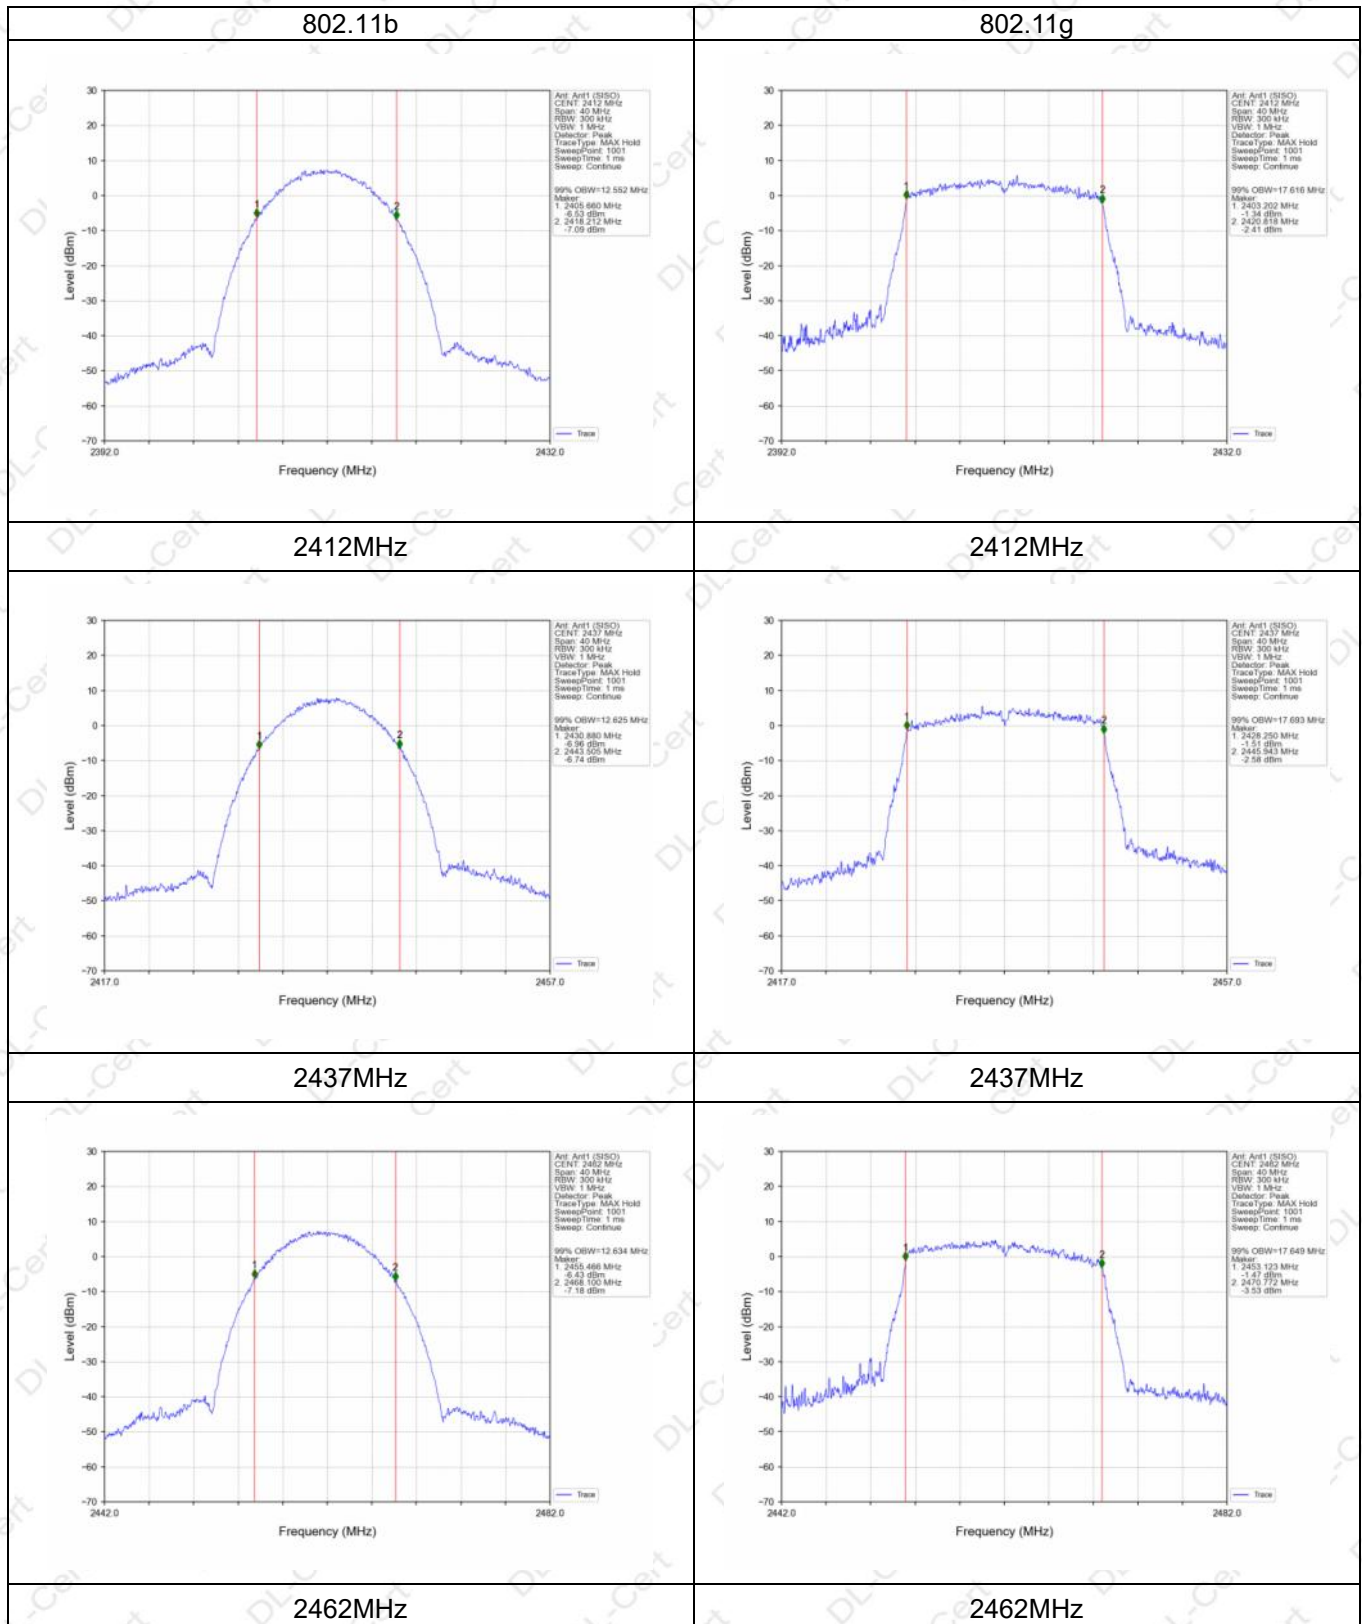





802.11n HT20

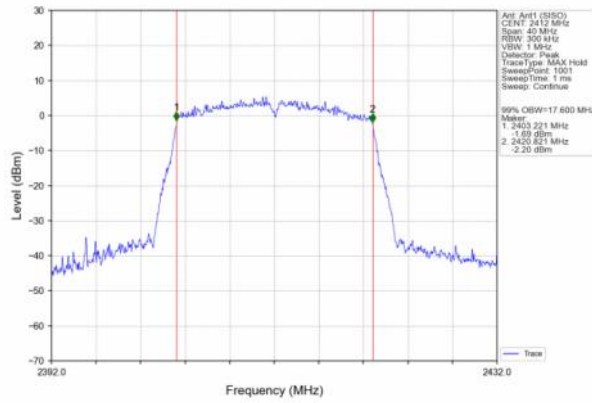


802.11n HT40

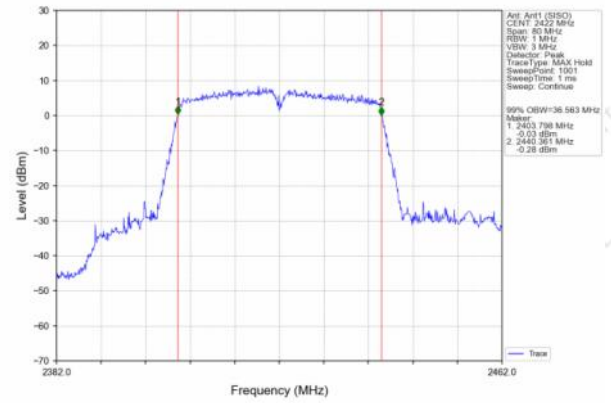


2412MHz

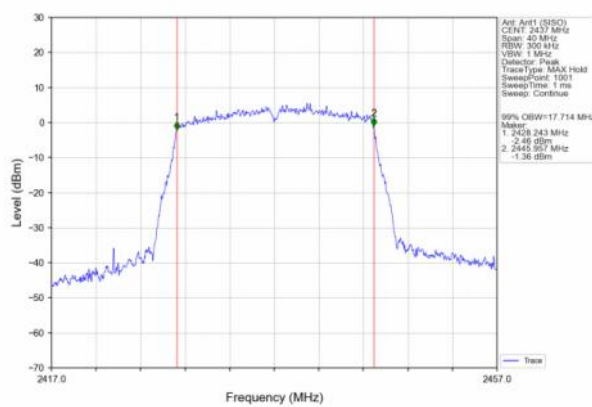


2422MHz

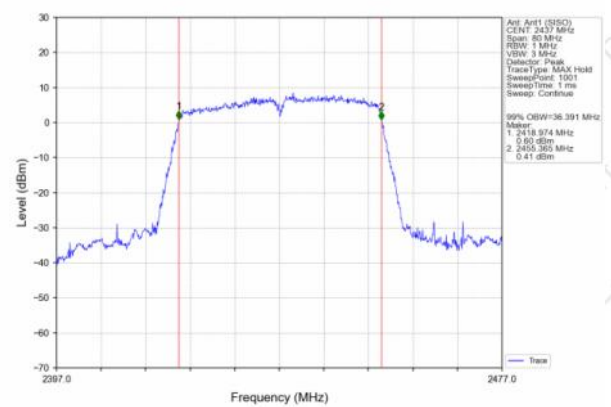

2437MHz

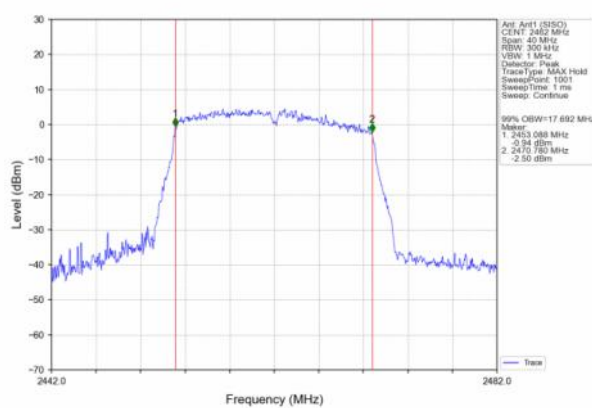

2437MHz

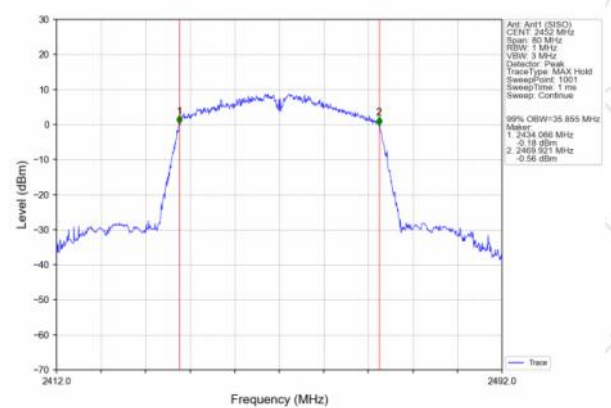

2462MHz

2452MHz



7. DUTY CYCLE TEST SIGNAL

7.1 APPLIED PROCEDURES / LIMIT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

7.1.1 TEST PROCEDURE

1. Set RBW = 8 MHz.
2. Set the video bandwidth (VBW) $\geq$ RBW.
3. Detector = Peak.
4. Sweep = auto couple.
5. Allow the trace to stabilize.
6. Span=0

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



7.1.5 TEST RESULTS

ANT1:


Mode	Test Channel	Duty Cycle(%)	Duty Fator (dB) 10 * log (1/ Duty cycle)
802.11b	Low	96.21	0.17
	Middle	96.21	0.17
	High	96.20	0.17
802.11g	Low	79.08	1.02
	Middle	77.55	1.10
	High	77.55	1.10
802.11n HT20	Low	78.85	1.03
	Middle	78.85	1.03
	High	79.90	0.97
802.11n HT40	Low	70.14	1.54
	Middle	69.66	1.57
	High	69.44	1.58


ANT2:

Mode	Test Channel	Duty Cycle(%)	Duty Fator (dB) 10 * log (1/ Duty cycle)
802.11b	Low	96.21	0.17
	Middle	96.10	0.17
	High	96.21	0.17
802.11g	Low	78.57	1.05
	Middle	77.55	1.10
	High	78.68	1.04
802.11n HT20	Low	78.85	1.03
	Middle	79.81	0.98
	High	78.95	1.03
802.11n HT40	Low	61.73	2.10
	Middle	69.44	1.58
	High	69.66	1.57




ANT1:

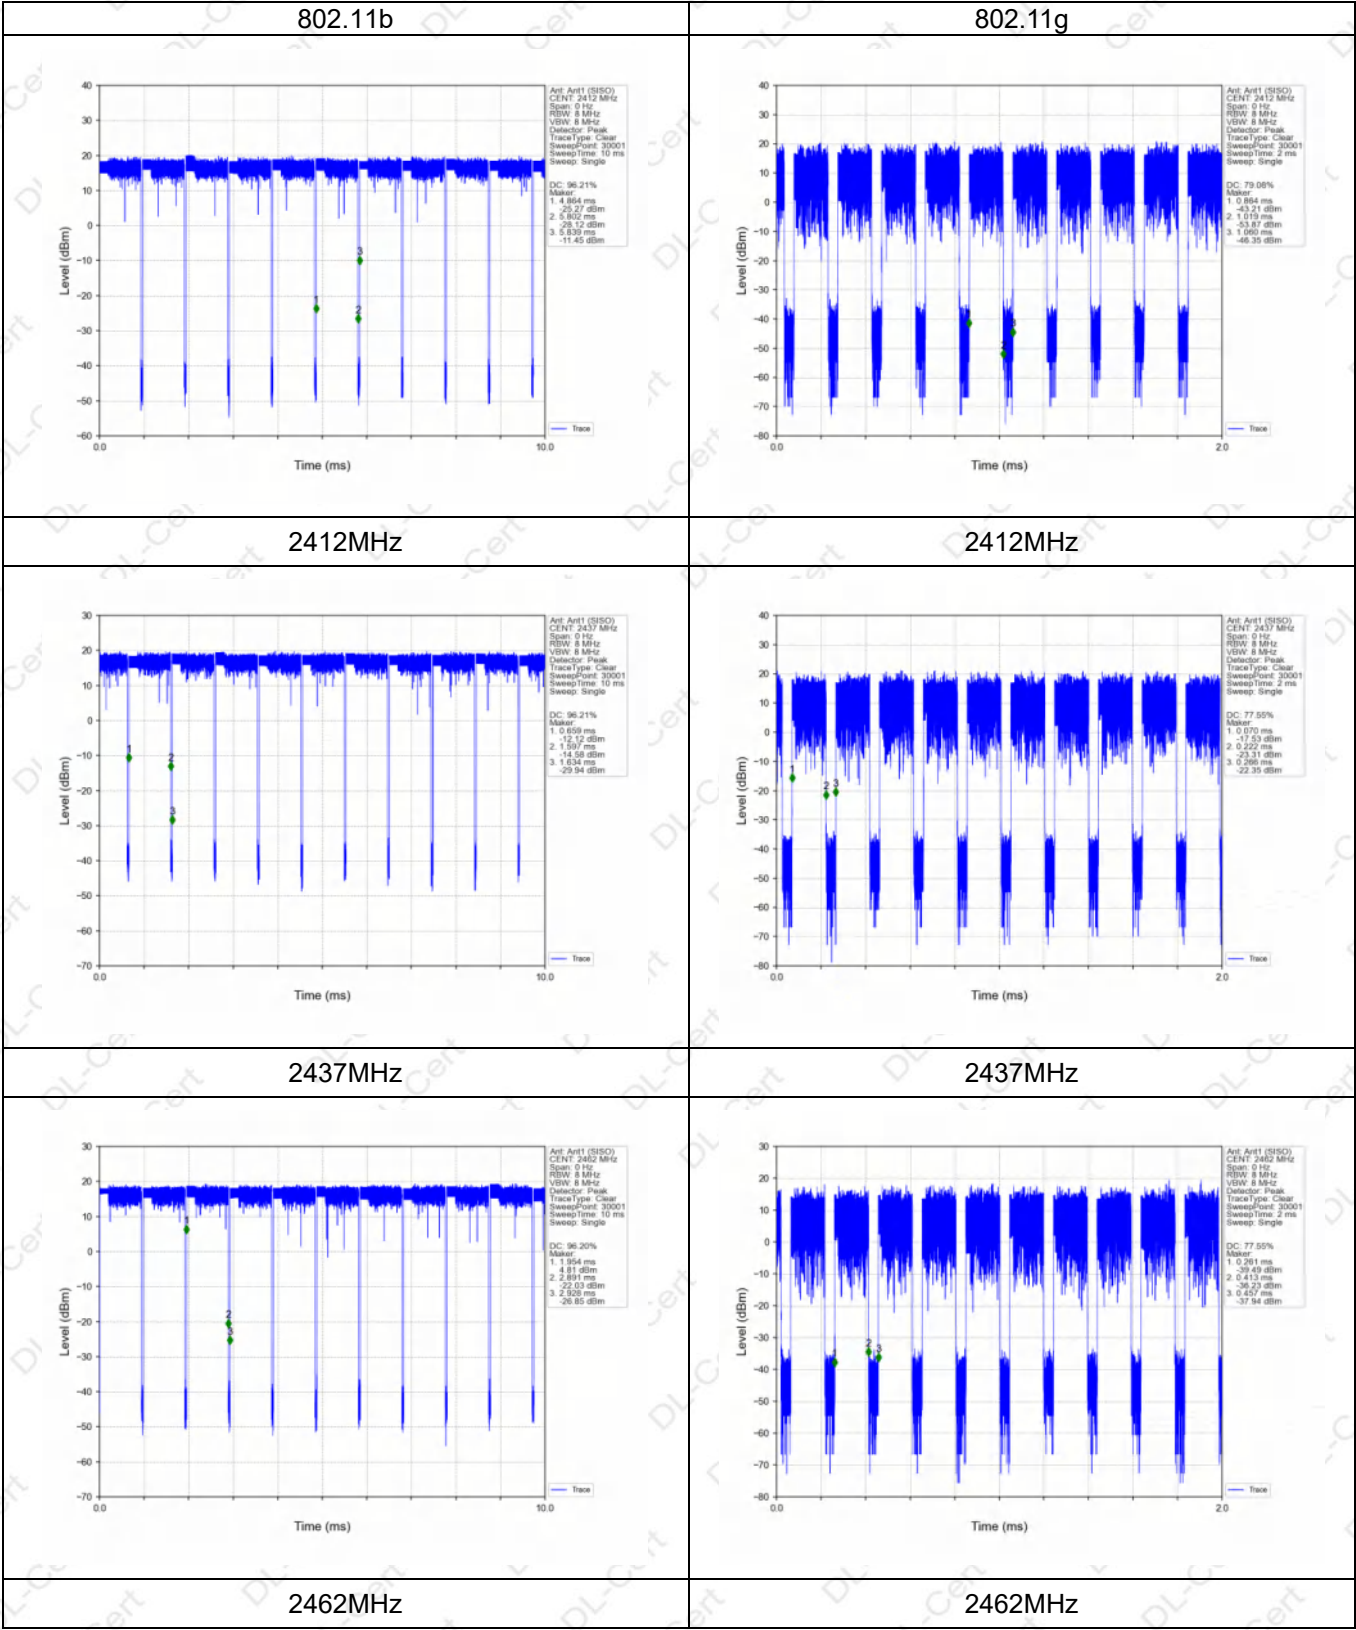


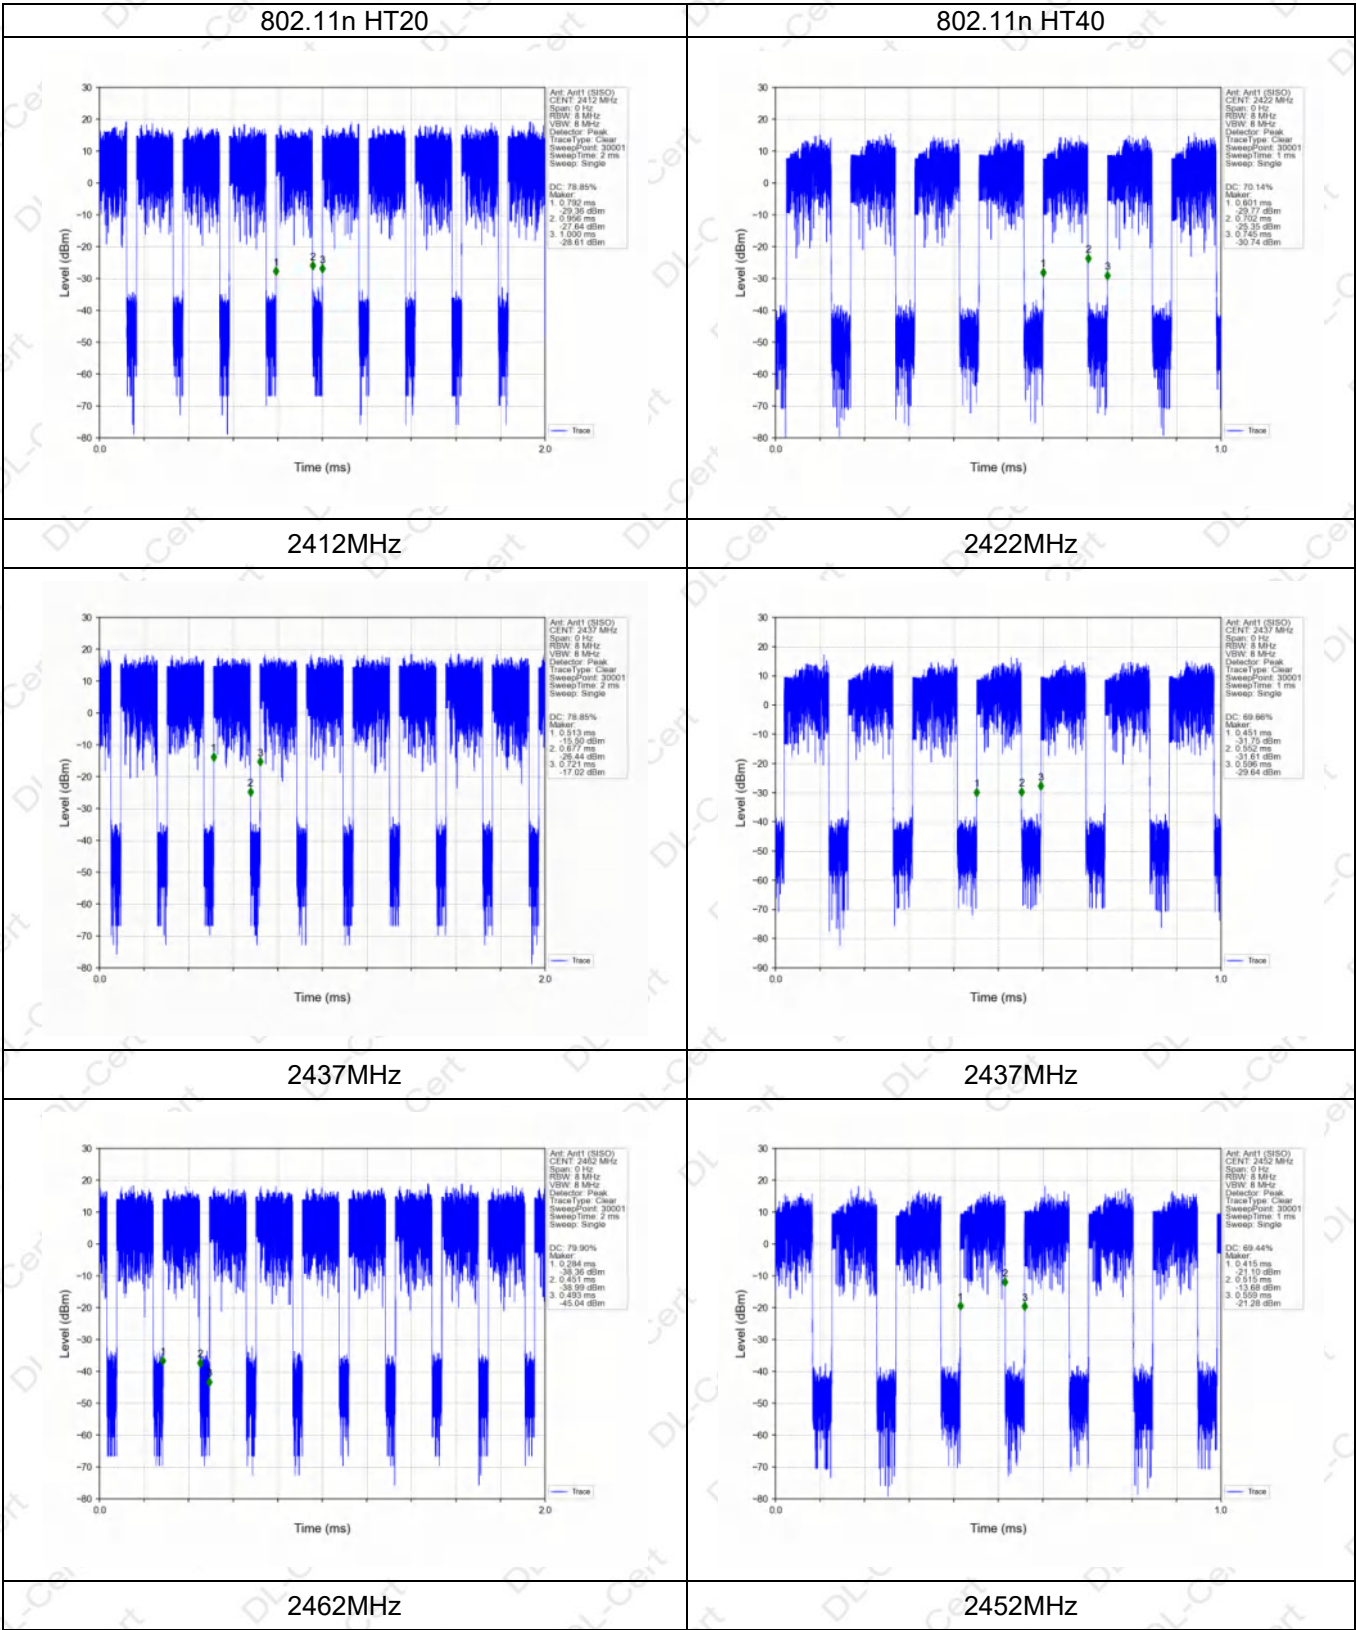



ANT2:

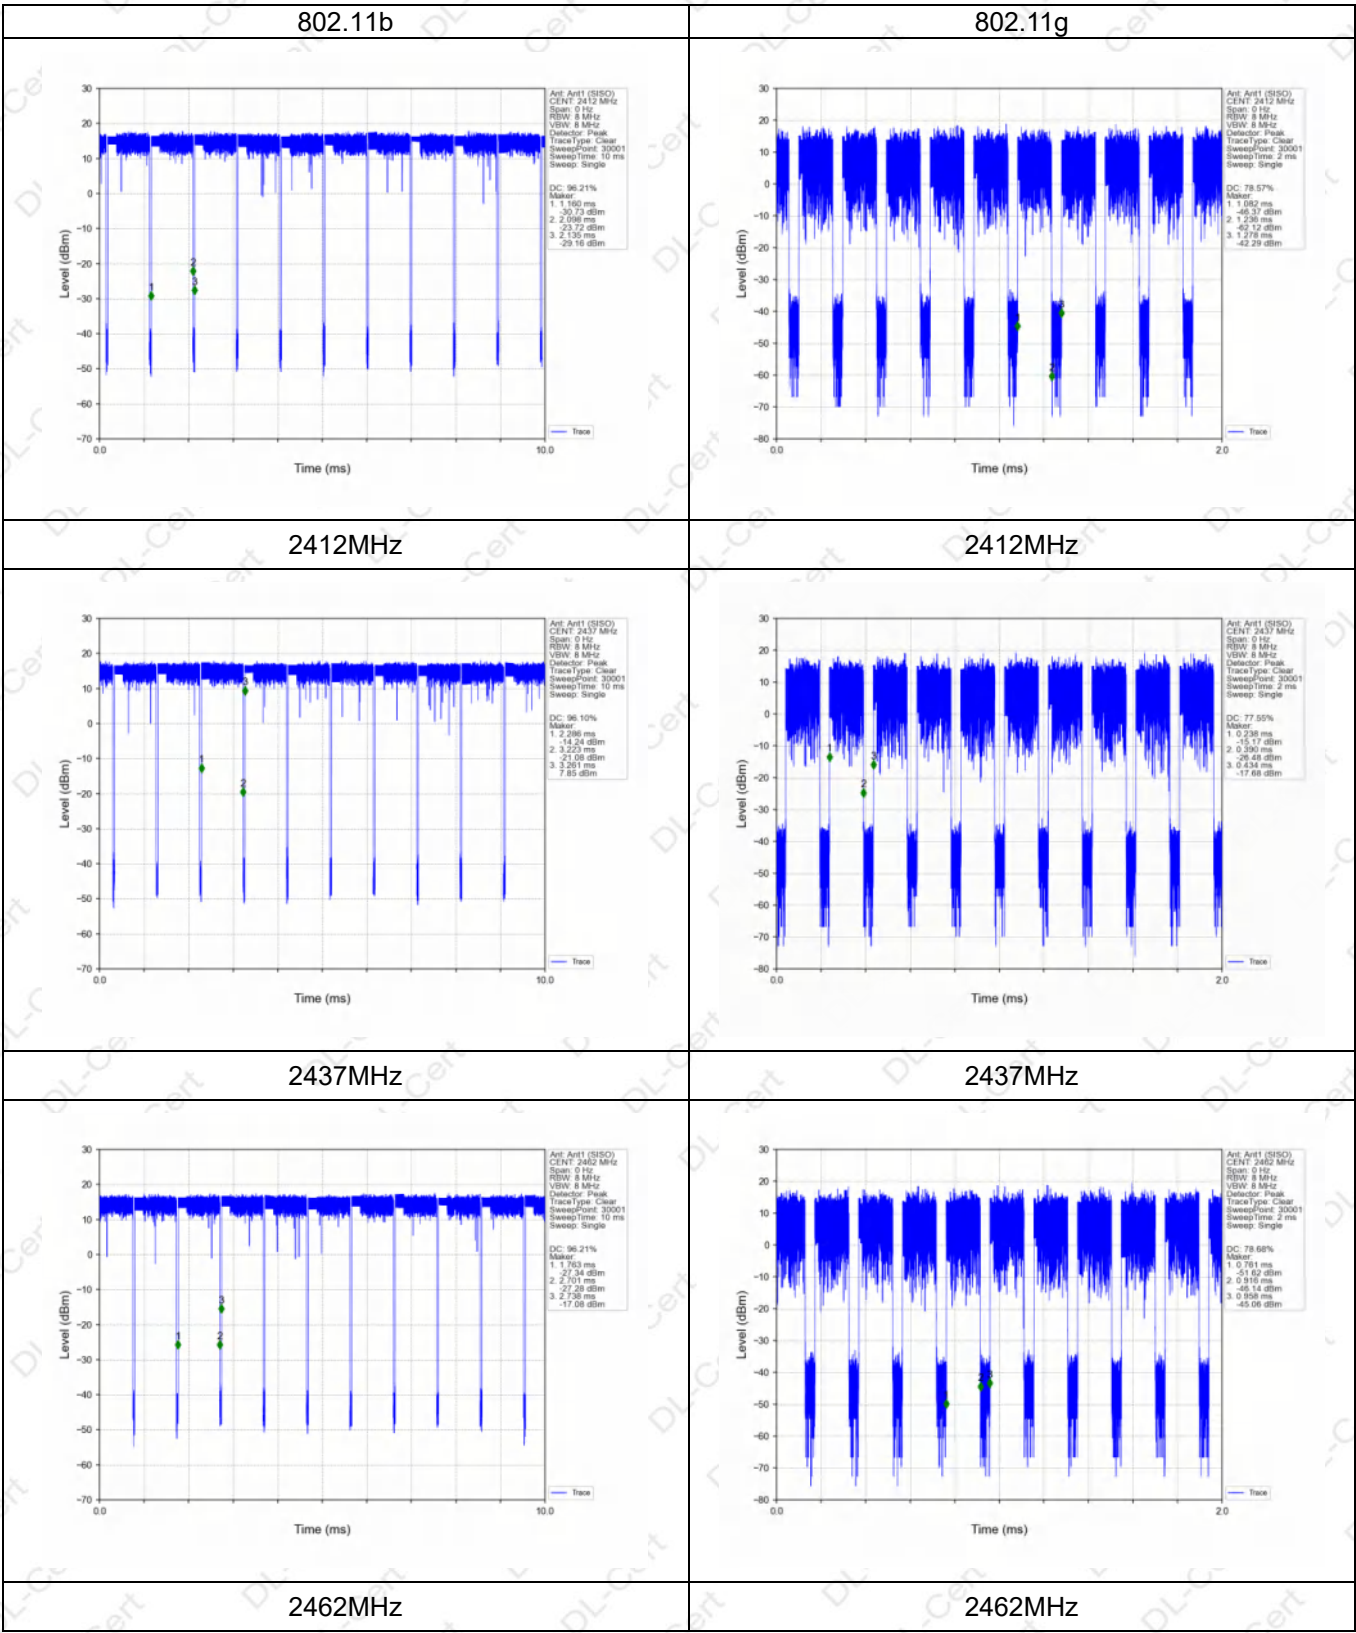

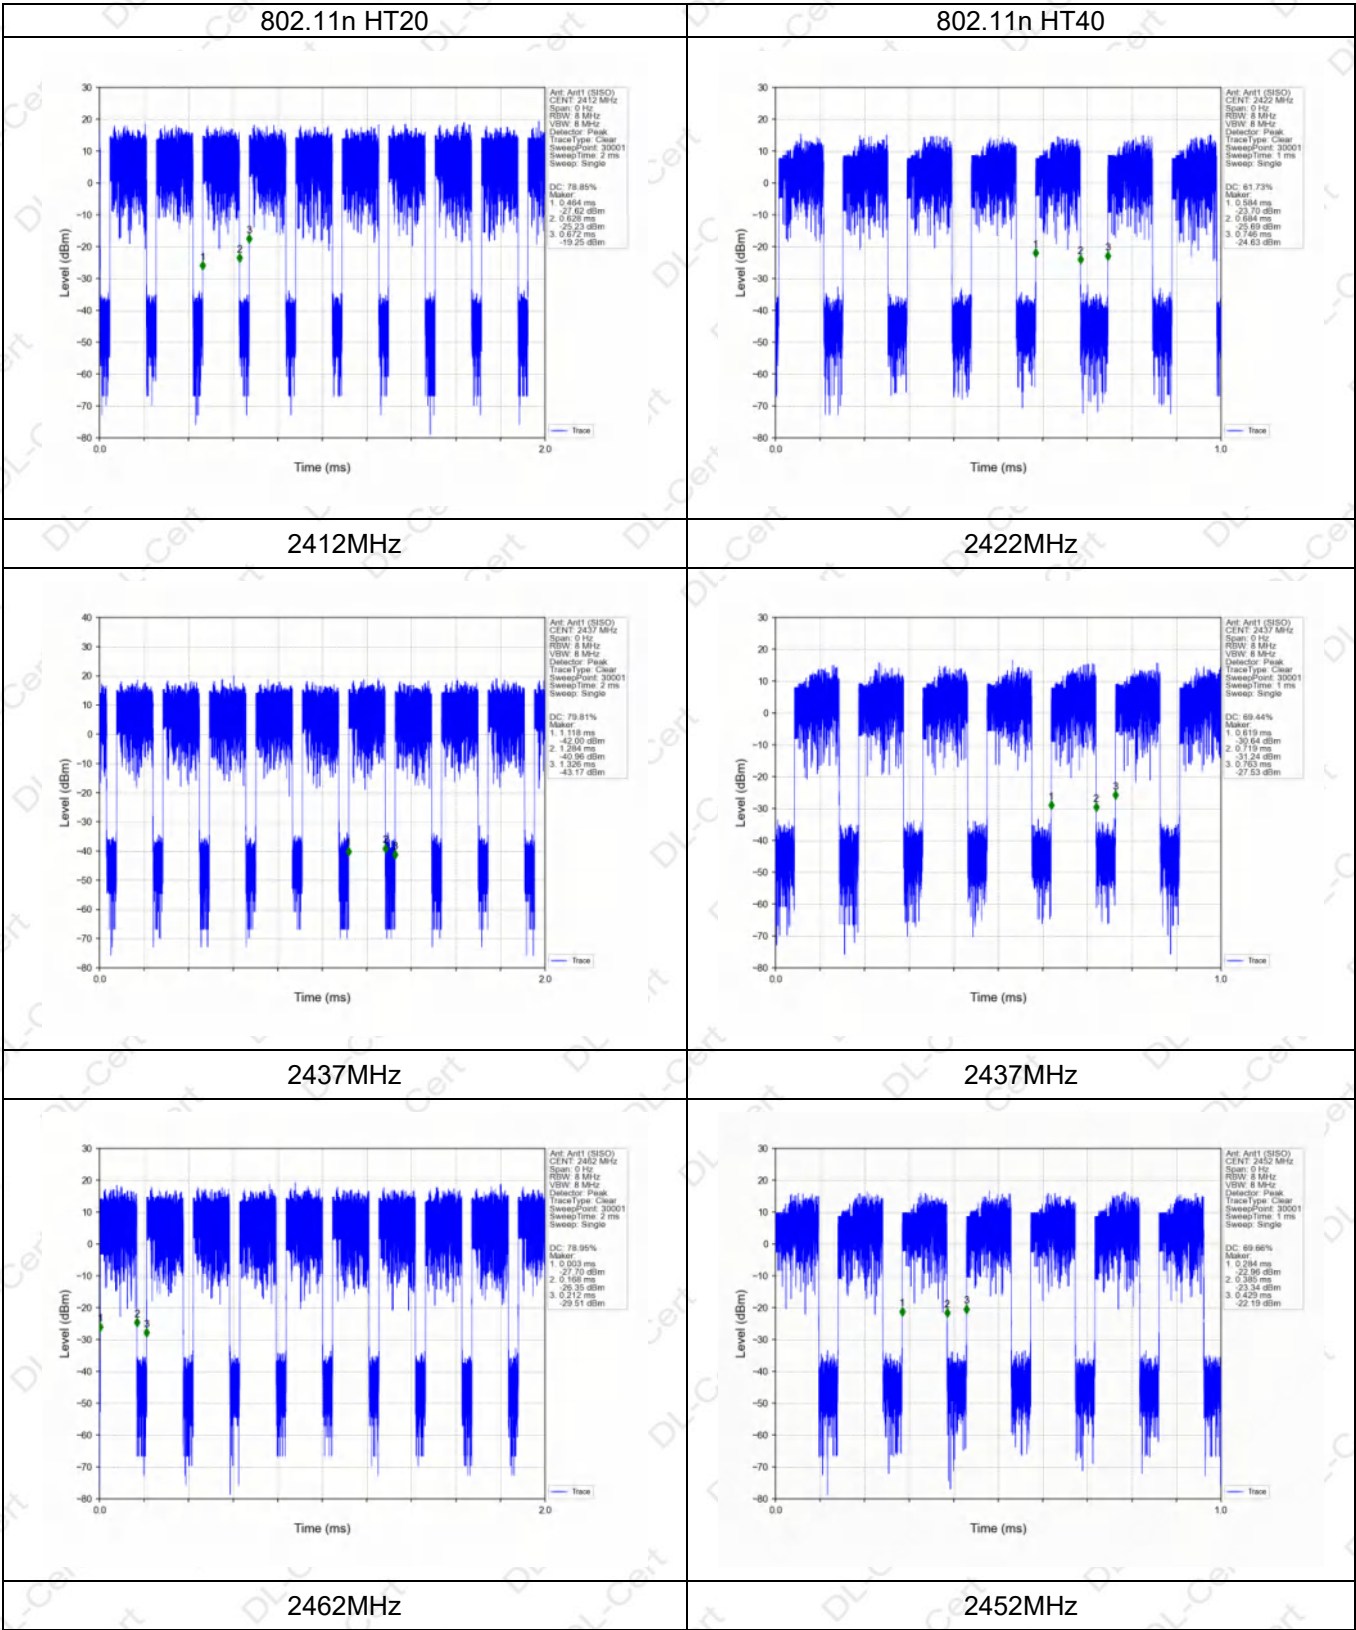



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is Internal Antenna, It comply with the standard requirement.

9. TEST SETUP PHOTO

Reference to the appendix I for details.

10. EUT PHOTO

Reference to the appendix II for details.

***** END OF REPORT *****