

MPE Test Report

FCC ID: 2A9Q9-EPB-DP26

Report No. : SSP26020155-2H

Applicant : ShenZhen Zhongyi Technology CO., Ltd.

Product Name : Diplomat 10000mAh 20W PD Power Bank

Model Name : EPB-DP26

Test Standard : FCC CFR 47 PART 1, 1.1310

Date of Issue : 2026-03-02

Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	ShenZhen Zhongyi Technology CO., Ltd. Room 401, No.4 Road One, Shangxue Science and Technology City, Xinxue Address of Applicant.....:	Community, Bantian Street, Longgang District, Shenzhen, China
Manufacturer:	ShenZhen Zhongyi Technology CO., Ltd. Room 401, No.4 Road One, Shangxue Science and Technology City, Xinxue Address of Manufacturer.....:	Community, Bantian Street, Longgang District, Shenzhen, China
Product Name:	Diplomat 10000mAh 20W PD Power Bank	
Brand Name:	-	
Main Model:	EPB-DP26	
Series Models:	M2108Q	
Test Standard:	FCC CFR 47 PART 1, 1.1310 KDB 680106 D01 Wireless Power Transfer v04	
Date of Test	2026-02-10 to 2026-02-11	
Test Result:	PASS	
Tested By	<u>Colin Chen</u> (Colin Chen)	
Reviewed By:	<u>Lorzix Luo</u> (Lorzix Luo)	
Authorized Signatory:	<u>Lahm Peng</u> (Lahm Peng)	
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

CONTENTS

1. General Information.....	5
1.1 Product Information	5
1.2 Test Setup Information.....	6
1.3 Test Facilities.....	7
1.4 List of Measurement Instruments	7
1.5 Measurement Uncertainty	7
2. RF Exposure.....	8
2.1 Standard and Limit.....	8
2.2 Test Procedures	8
2.3 Test Setup Block Diagram.....	9
2.4 Test Data and Results.....	10
Annex A. Test Photos.....	12

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2026-03-02	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	Diplomat 10000mAh 20W PD Power Bank
Trade Name:	-
Test Model:	EPB-DP26
Series Models:	M2108Q
Rated Voltage:	Type C1 Input: DC 5V/2.6A, 9V/2.2A, 12V/1.5A 18W(MAX) Type C1 Output: DC 5V/3A, 9V/2.2A, 12V/1.67A 20W(MAX) Type C2 Input: DC 5V/2A, 9V/2A, 12V/1.5A 18W(MAX) USB-A Output: 5V/3A, 9V/2.2A, 12V/1.67A, 5V/4.5A, 4.5V/5A 22.5W(MAX) Wireless charging Output (Phone): 5W, 7.5W, 10W, 15W(MAX) Wireless charging Output (Earphone):5W Wireless charging Output (Watch):2W
Power Adapter:	-
Battery:	38.Wh (10000mAh, 3.85V)
Test Sample No:	SSP26020155-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	

Wireless Specification	
Wireless Standard:	WPC (Qi)
Operating Frequency:	Wireless charging Output(Phone/Earphone):110.5kHz-205kHz, Wireless charging Output(Watch): 310kHz-340kHz
Modulation:	FSK
Antenna Gain:	0dBi
Type of Antenna:	Coil Antenna
Type of Device:	☒ Portable Device ☐ Mobile Device ☐ Modular Device

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description		Remark
TM1	Wireless charging 5W (Phone)		-
TM2	Wireless charging 7.5W (Phone)		-
TM3	Wireless charging 10W (Phone)		-
TM4	Wireless charging 15W (Phone)		-
TM5	Wireless charging 5W (Earphone)		-
TM6	Wireless charging 2W (Watch)		-
TM7	Wireless charging 5W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 2W (Watch)		-
TM8	Wireless charging 7.5W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 2W (Watch)		-
TM9	Wireless charging 10W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 2W (Watch)		-
TM10	Wireless charging 15W (Phone) + Wireless charging 5W (Earphone) + Wireless charging 2W (Watch)		-
TM11	Wireless charging 5W (Phone) + Charging		-
TM12	Wireless charging 5W (Earphone) + Charging		-
TM13	Wireless charging 2W (Watch) + Charging		-
Note: All modes of the main model and accessory models mentioned above have been tested. The report only shows the worst modes of the main model: TM10 data. The power supply mode does not support the simultaneous operation of multiple coils.			
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Apple Watch	iPhone	A2855	GK46LFW525
Earphone charging case	Xiaomi	FreeBuds Pro2	-
Phone	iPhone	iPhone 12pro	-
Adapter	XIAOMI	MDY-14-EU	45461/A62505U102607S

1.3 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6983.01
FCC Registration No:	583813
ISED Registration No.:	CN0164

1.4 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Electromagnetic radiation tester	WAVECONTROL	SMP3	23SL0158	2025-07-16	2026-07-15
Electromagnetic field probe	WAVECONTROL	WP400-3	24WP240067	2025-07-16	2026-07-15
Test Software	WAVECONTROL	SMP	N/A	N/A	N/A

Probe radius: 1.65CM

1.5 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
E-field	10Hz ~ 100kHz	± 2.6%
	100kHz ~ 400kHz	± 4.9%
H-field	10Hz ~ 3kHz	± 2.5%
	3kHz ~ 10kHz	± 2.6%
	10kHz ~ 100kHz	± 4.3%
	100kHz ~ 400kHz	± 5.0%

2. RF Exposure

2.1 Standard and Limit

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	--	--	f/300	6
1500–100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	--	--	f/1500	30
1500–100,000	--	--	1.0	30


f = frequency in MHz

2.2 Test Procedures

The EUT was measured according to the KDB 680106 D01v04.

- 1) The RF exposure test was performed in an anechoic chamber.
- 2) The measurement probe was placed at test distance(2~20cm) which is between the edge of the wireless charger and the geometric center of probe for portable exposure, and the measurement probe was placed at test distance(20~24cm) which is between the edge of the wireless charger and the geometric center of probe for mobile exposure.
- 3) Choose the worst mode among battery with zero/partial/full charge, then perform measurement.
- 4) The highest emission level was recorded and all sides (A, B, C, D, E, F) were completed.
- 5) Calculate the final E/H-field strength.

2.3 Test Setup Block Diagram

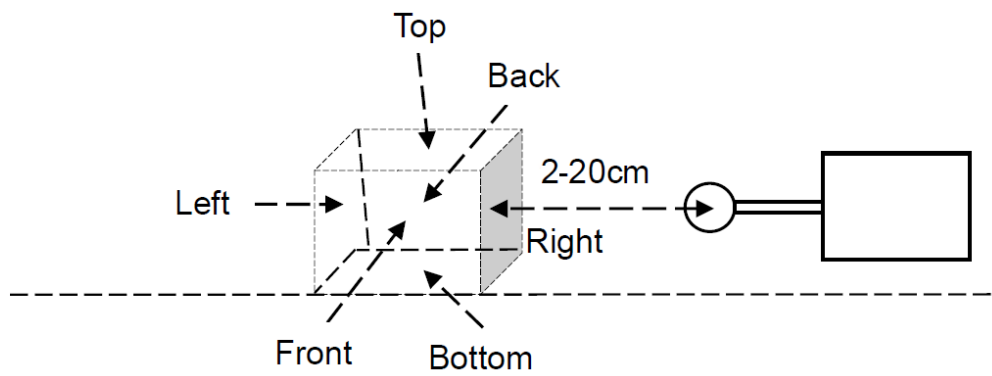

Note: Front side = A, Right side = B, Back side = C, Left side = D, Top side = E, Bottom side = F.

2.4 Test Data and Results

For portable exposure conditions:

Operating modes with client device (1 %, 50%, 99% battery status of client device) have been tested, only show the data of worst case of battery status of client device.

H-field measurements taken every 2 cm (starting as close to 20 cm as possible) on each side of the device were also evaluated for portable exposure use condition.

Test Mode: TM10(the worst mode)

Transmitter Battery Level: 99%

Test Distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.673	0.866	0.864	0.798	0.696	0.821
4	0.188	0.342	0.334	0.447	0.386	0.521
6	0.098	0.311	0.287	0.282	0.235	0.215
8	0.083	0.209	0.197	0.198	0.156	0.112
10	0.046	0.088	0.098	0.171	0.088	0.088
12	0.038	0.071	0.086	0.143	0.063	0.052
14	0.032	0.054	0.081	0.087	0.051	0.045
16	0.026	0.049	0.075	0.068	0.047	0.035
18	0.024	0.039	0.071	0.048	0.033	0.029
20	0.021	0.026	0.032	0.024	0.027	0.036

Test Distance (cm)	Test Position						Limits (A/m)
	A (A/m)	B (A/m)	C (A/m)	D (A/m)	E (A/m)	F (A/m)	
2	0.538	0.693	0.691	0.638	0.557	0.657	1.63
4	0.150	0.274	0.267	0.358	0.309	0.417	1.63
6	0.078	0.249	0.230	0.226	0.188	0.172	1.63
8	0.066	0.167	0.158	0.158	0.125	0.090	1.63
10	0.037	0.070	0.078	0.137	0.070	0.070	1.63
12	0.030	0.057	0.069	0.114	0.050	0.042	1.63
14	0.026	0.043	0.065	0.070	0.041	0.036	1.63
16	0.021	0.039	0.060	0.054	0.038	0.028	1.63
18	0.019	0.031	0.057	0.038	0.026	0.023	1.63
20	0.017	0.021	0.026	0.019	0.022	0.029	1.63

Note: H-field(A/m) = H-field(uT)/1.25.

Using Polynomial order 10, the value of 4 cm and 6 cm can be estimated, and the result of comparison meets the requirements (<30%), therefore, the calculation method is acceptable.

Distance: 4cm

Test Position	A	B	C	D	E	F
Valuation (A/m)	0.150	0.274	0.267	0.358	0.309	0.417
Measure Value (A/m)	0.149	0.273	0.266	0.357	0.308	0.416
Agreement Ratio (%)	-0.67%	-0.37%	-0.38%	-0.28%	-0.32%	-0.24%
Limit (%)	30%	30%	30%	30%	30%	30%
Result	Pass	Pass	Pass	Pass	Pass	Pass


Distance: 6cm

Test Position	A	B	C	D	E	F
Valuation (A/m)	0.078	0.249	0.230	0.226	0.188	0.172
Measure Value (A/m)	0.077	0.248	0.229	0.225	0.187	0.171
Agreement Ratio (%)	-1.30%	-0.40%	-0.44%	-0.44%	-0.53%	-0.58%
Limit (%)	30%	30%	30%	30%	30%	30%
Result	Pass	Pass	Pass	Pass	Pass	Pass

Based on the above results, using Polynomial order 10, the value of 0 cm can be estimated as below.

Test Distance (cm)	Test Position						Limits (A/m)
	A (A/m)	B (A/m)	C (A/m)	D (A/m)	E (A/m)	F (A/m)	
0	0.94	1.38	1.42	0.97	0.64	0.66	1.63
Test Results: PASS							

Annex A. Test Photos

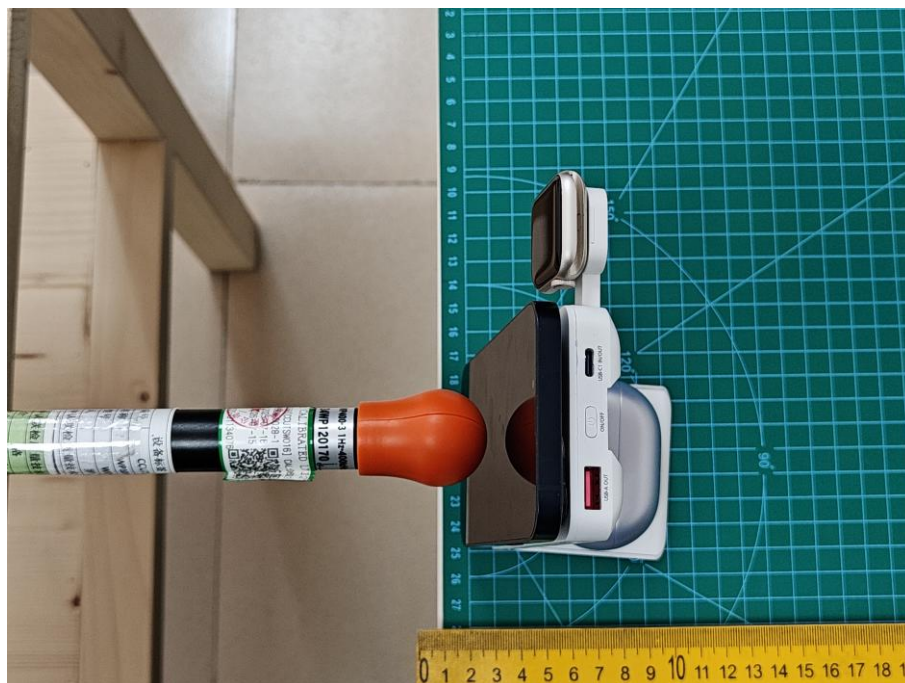Test View 1

******* END OF REPORT *******