

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-223-RWD-083

Reception No. : 2202000536

Applicant : PROCHIP

Address : #1112, Ace High-End Tower 1st, 5, Digital-Ro 26, Guro-Gu, Seoul, KOREA

Manufacturer : PROCHIP

Address : #1112, Ace High-End Tower 1st, 5, Digital-Ro 26, Guro-Gu, Seoul, KOREA

Type of Equipment : BLE module

FCC ID. : 2A5XQ-POT-NR232

Model Name : PoT-nR232

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 35 pages (including this page)

Date of Incoming : March 02, 2022

Date of issue : March 31, 2022

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
Joon-Woo, Kim / Assistant Manager
ONETECH Corp.



Reviewed by
Tae-Ho, Kim / General Manager
ONETECH Corp.



Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM.....	10
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MINIMUM 6 DB BANDWIDTH	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST DATE	11
7.4 TEST DATA FOR 1 MBPS	12
8. MAXIMUM PEAK OUTPUT POWER.....	14
8.1 OPERATING ENVIRONMENT	14
8.2 TEST SET-UP	14
8.3 TEST DATE	14
8.4 TEST DATA FOR 1 MBPS	15
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	17

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

9.1 OPERATING ENVIRONMENT	17
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	17
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	17
9.4 TEST DATE	17
9.5 TEST DATA FOR CONDUCTED EMISSION	18
9.5.1 Test data for 1 Mbps	18
9.6 TEST DATA FOR RADIATED EMISSION.....	23
9.6.1 Radiated Emission which fall in the Restricted Band.....	23
9.6.2 Spurious & Harmonic Radiated Emission.....	24
10. PEAK POWER SPECTRAL DENSITY	25
10.1 OPERATING ENVIRONMENT	25
10.2 TEST SET-UP	25
10.3 TEST DATE	25
10.4 TEST DATA FOR 1 MBPS	26
11. RADIATED EMISSION TEST	28
11.1 OPERATING ENVIRONMENT	28
11.2 TEST SET-UP	28
11.3 TEST DATE	29
11.4 TEST DATA FOR 30 MHz ~ 1 GHz.....	30
11.4.1 Test data for Bluetooth LE	30
11.5 Test data for Below 30 MHz	31
11.6 TEST DATA FOR ABOVE 1 GHz	31
12. CONDUCTED EMISSION TEST.....	32
12.1 OPERATING ENVIRONMENT	32
12.2 TEST SET-UP	32
12.3 TEST DATE	32
12.4 TEST DATA.....	33
13. LIST OF TEST EQUIPMENT	35

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-223-RWD-083	March 31, 2022	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : PROCHIP

Address : #1112, Ace High-End Tower 1st, 5, Digital-Ro 26, Guro-Gu, Seoul, KOREA

Contact Person : Son Oh Kyoung / Department Manager

Telephone No. : +82-10-6731-4994

FCC ID : 2A5XQ-POT-NR232

Model Name : PoT-nR232

Brand Name : N/A

Serial Number : N/A

Date : March 31, 2022

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	BLE module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

3. GENERAL INFORMATION

3.1 Product Description

The PROCHIP, Model PoT-nR232 (referred to as the EUT in this report) is a BLE module. The product specification described herein was obtained from product data sheet or user's manual.

Device Type	BLE module
Temperature Range	-40 °C ~ +85 °C
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
MODULATION TYPE	GFSK for 1 Mbps
Number of Channels	40 Channels
RF OUTPUT POWER	-0.13 dBm
ANTENNA TYPE	Chip Antenna
ANTENNA GAIN	0.5 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	PROCHIP	nRF52810	N/A

5.2 Peripheral equipment

Model	Manufacturer	Description	Connected to
XU100303-17037A	LCFC(HeFei) Electronics Tech.	Notebook Computer	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Channel List (Bluetooth LE)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		


-. Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE	0.39	0.24	62.49 %	2.04

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

-. Test Plot

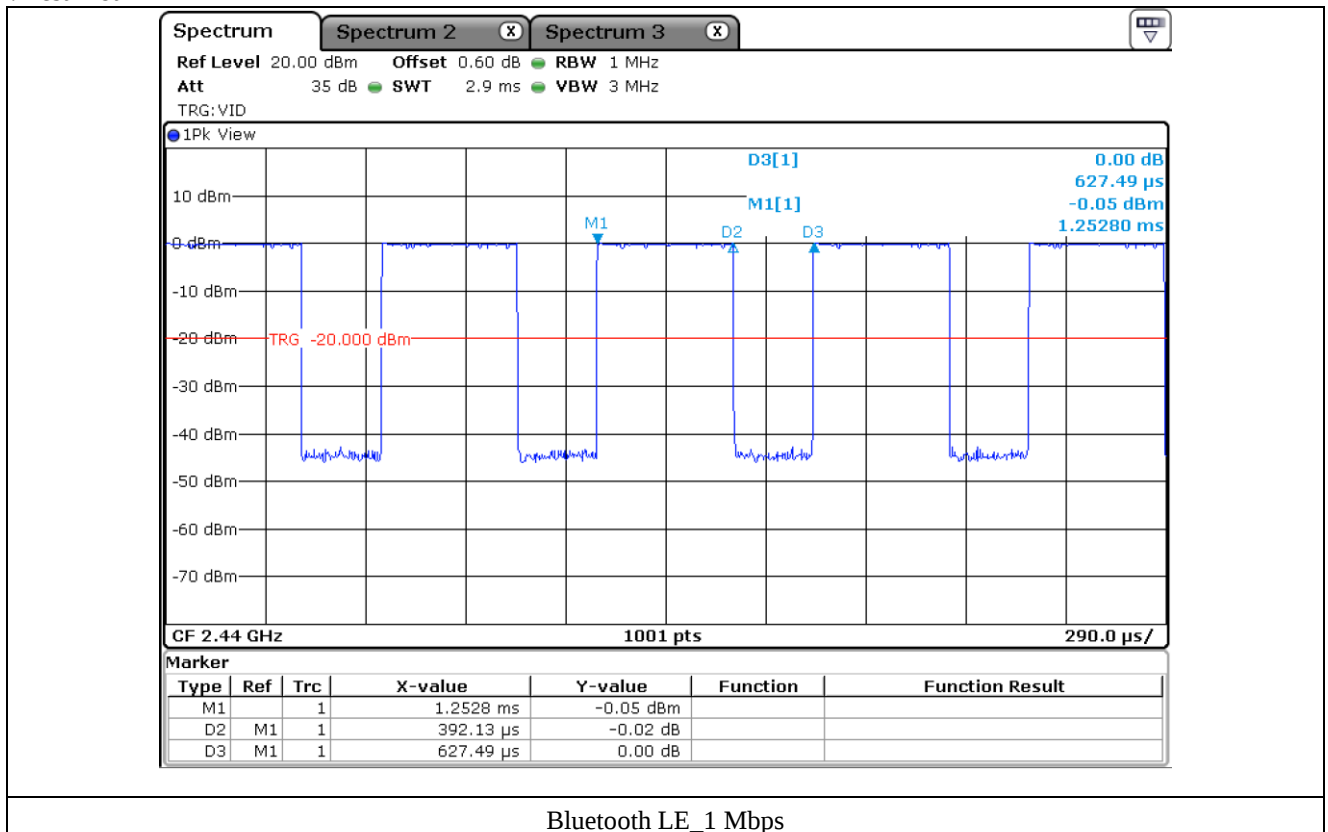

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in the Transmitting mode. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 6 dB BANDWIDTH


7.1 Operating environment

Temperature : 22.5 °C

Relative humidity : 53.5 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

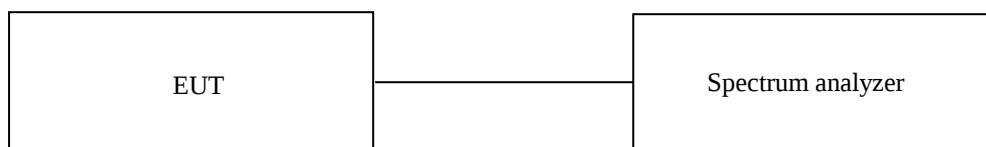


7.3 Test Date


March 02, 2022 ~ March 06, 2022

7.4 Test data for 1 Mbps


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	714.30	500.00	214.30
Middle	2 440.00	714.30	500.00	214.30
High	2 480.00	709.30	500.00	209.30

Remark. Margin = Measured Value - Limit

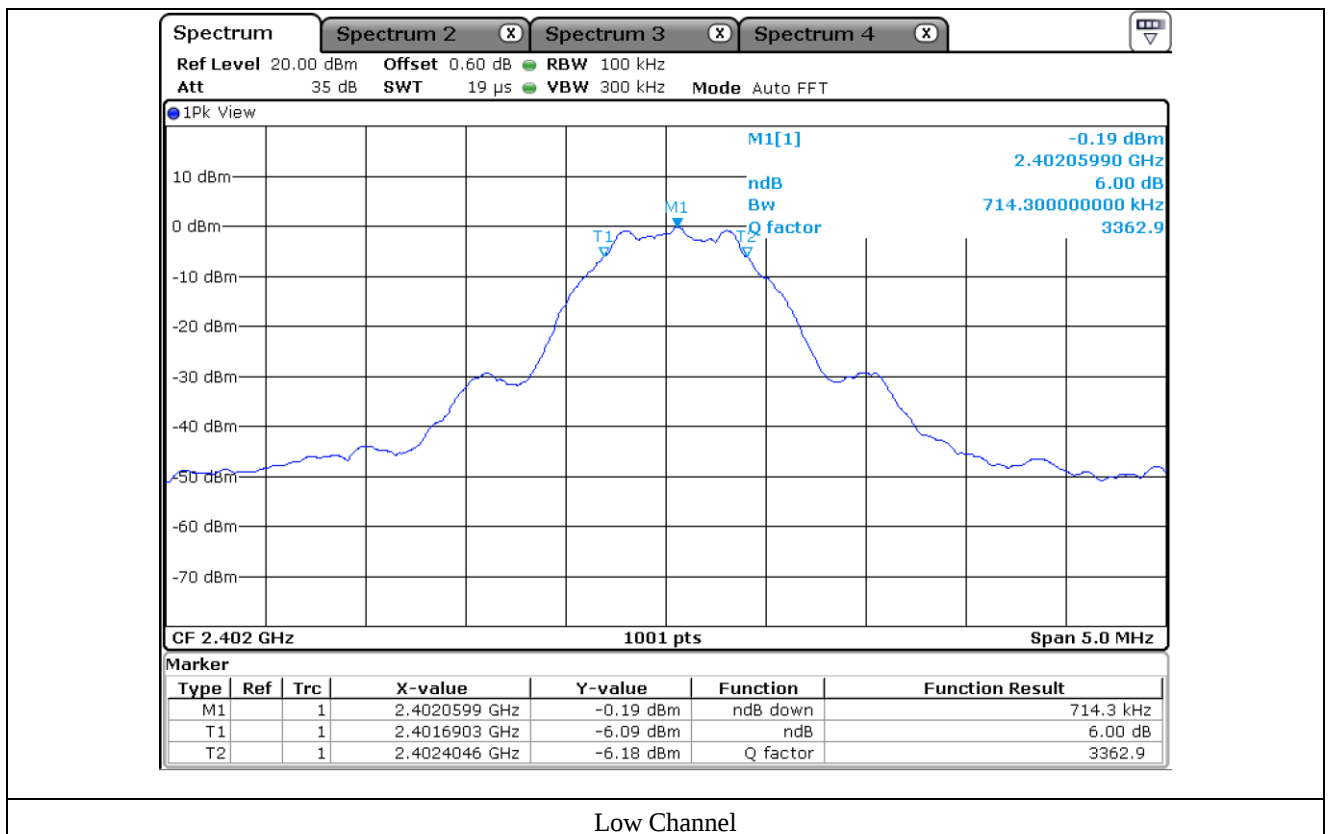

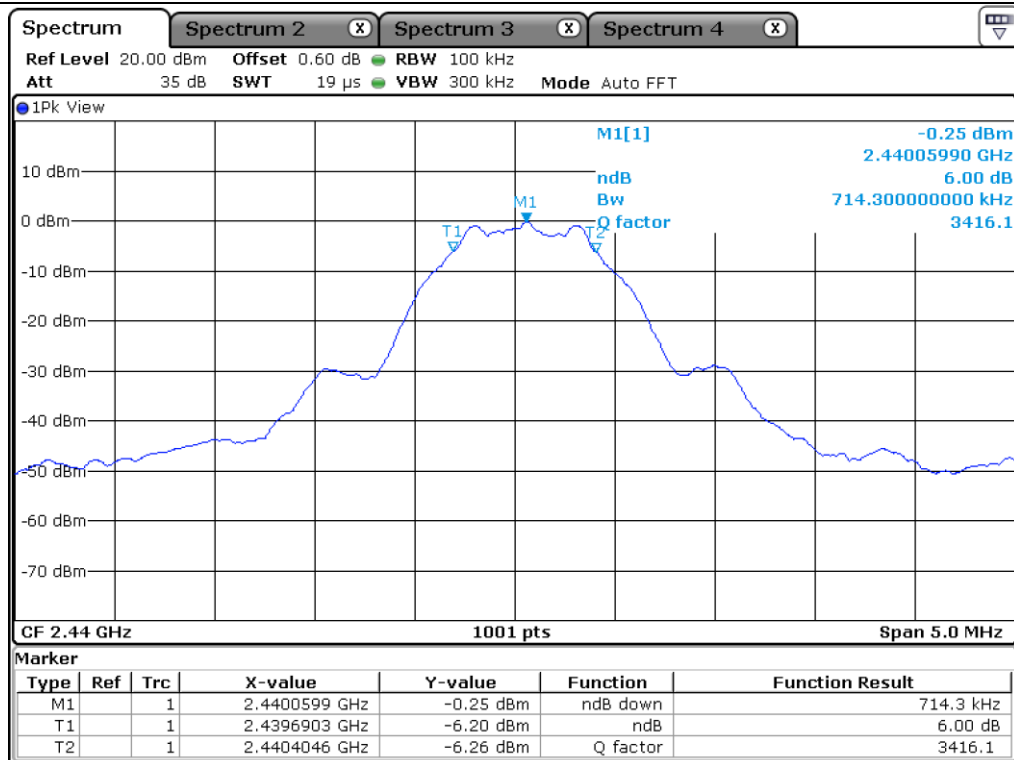

Middle Channel

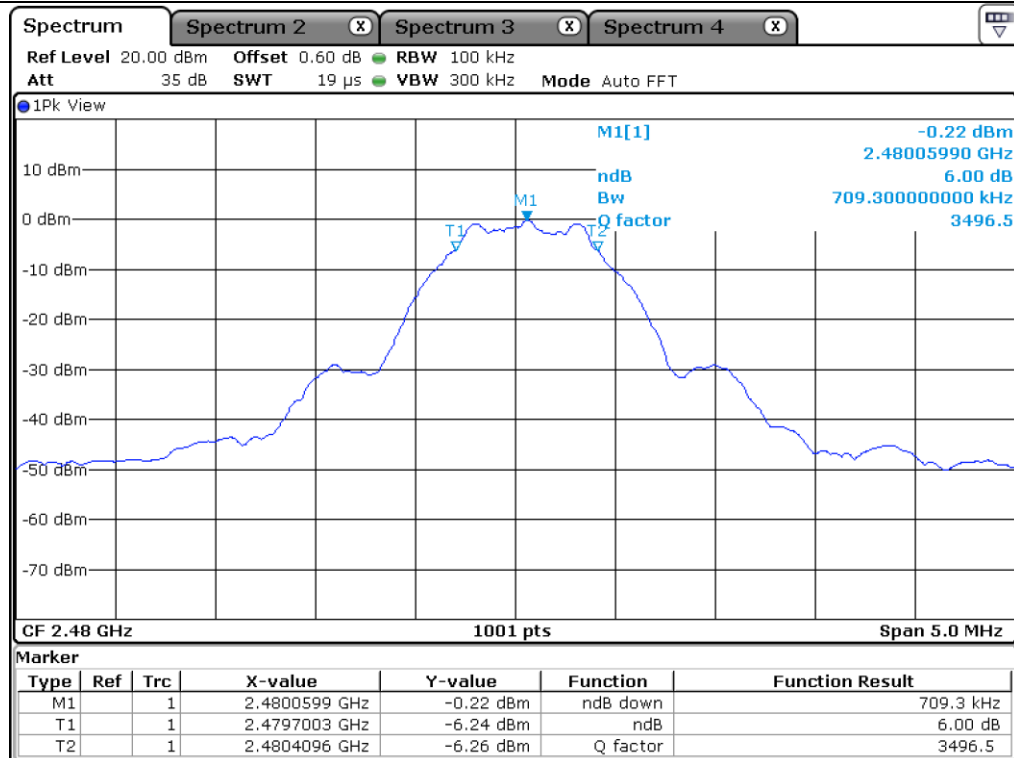

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment


Temperature : 22.5 °C

Relative humidity : 53.5 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

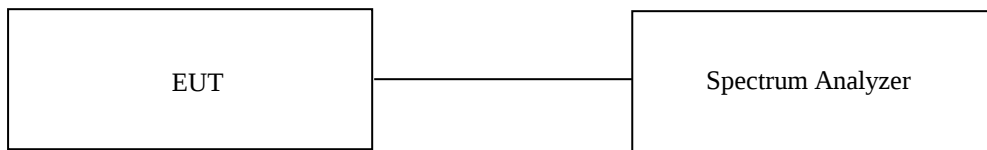

8.3 Test Date


March 02, 2022 ~ March 06, 2022


8.4 Test data for 1 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (kHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	714.30	-0.13	30.00	30.13
MIDDLE	2 440.00	714.30	-0.22	30.00	30.22
HIGH	2 480.00	709.30	-0.16	30.00	30.16

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

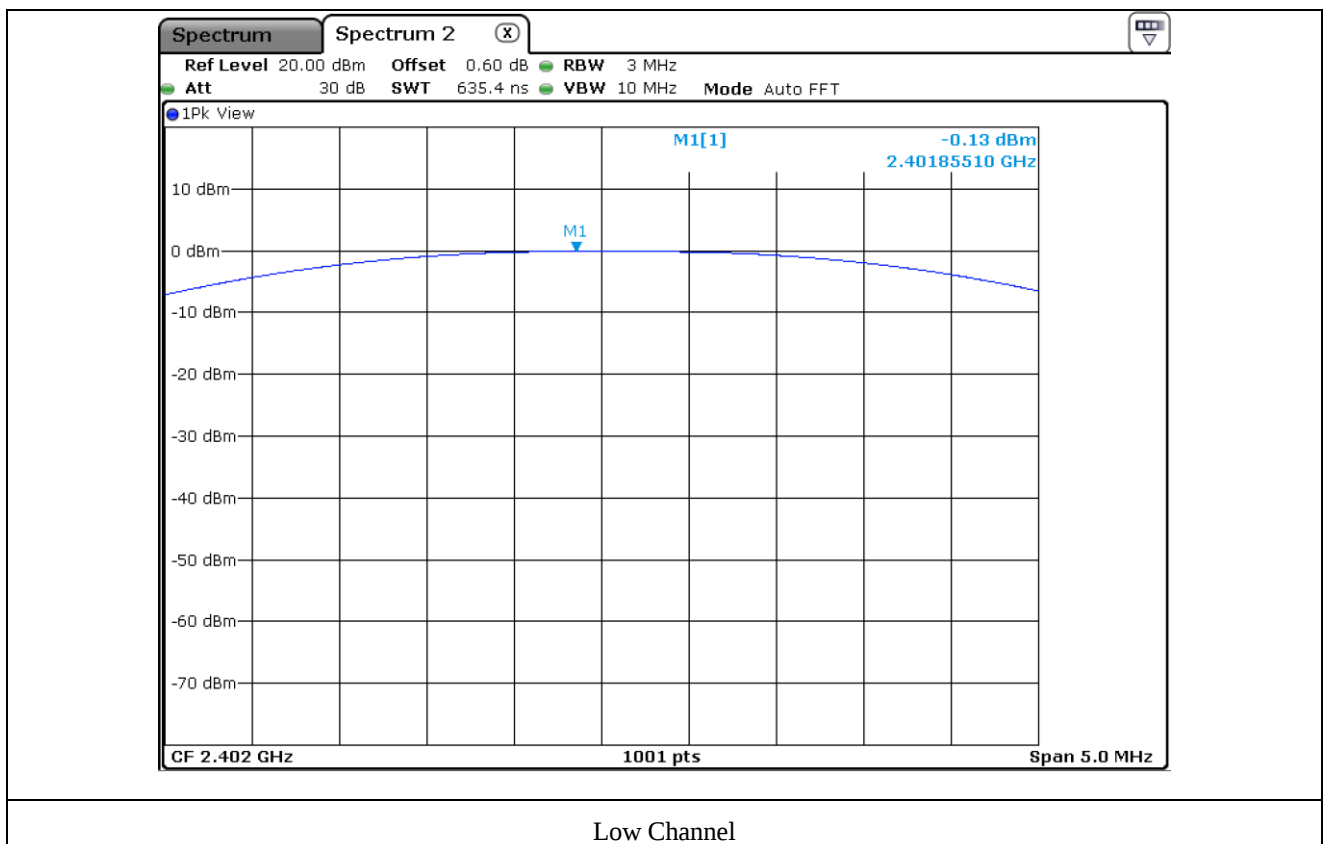

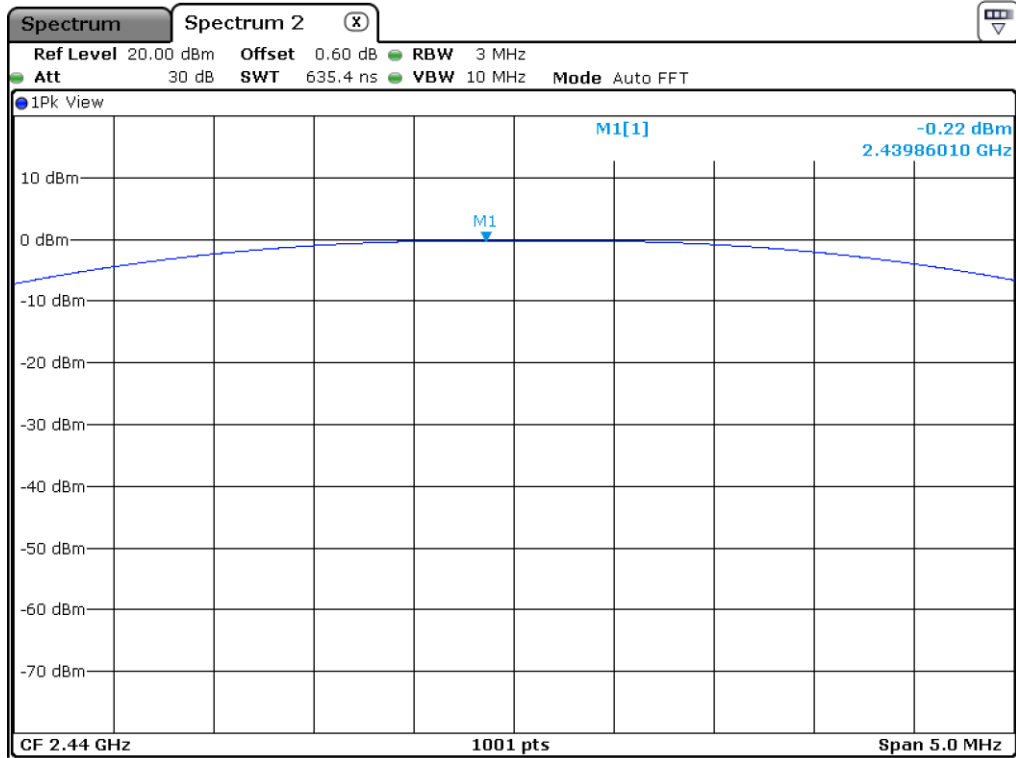

Middle Channel

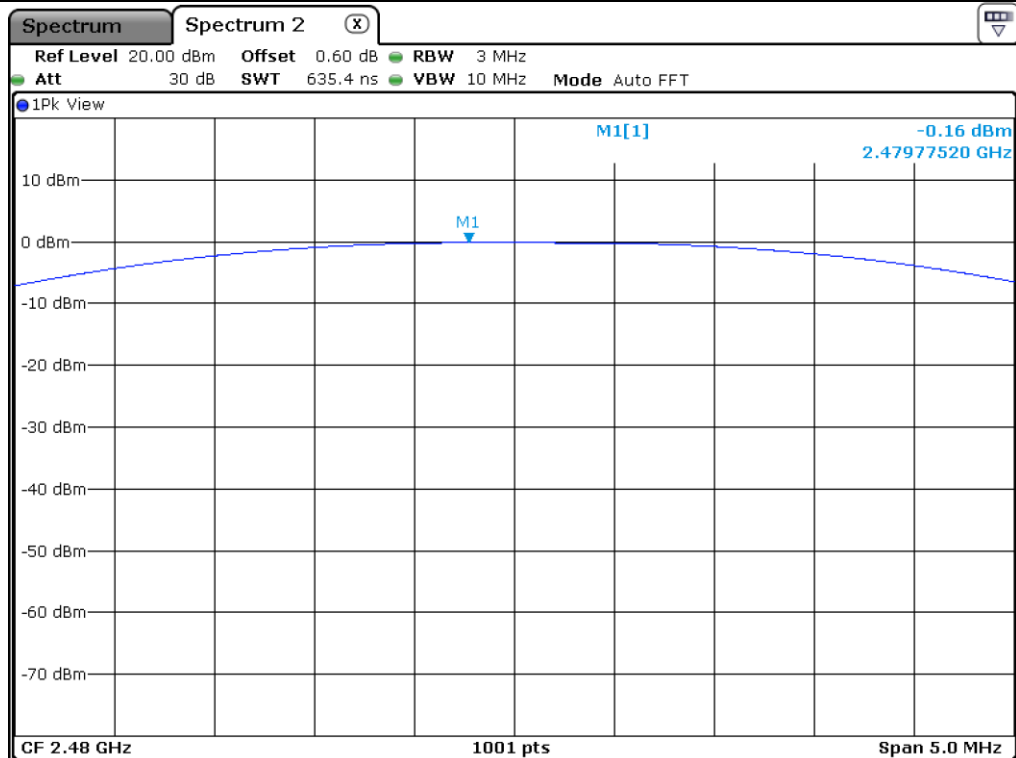

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


9.1 Operating environment

Temperature : 22.5 °C

Relative humidity : 53.5 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

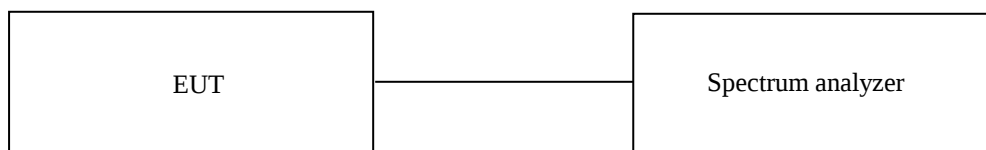

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test Date

March 02, 2022 ~ March 06, 2022

9.5 Test data for conducted emission

9.5.1 Test data for 1 Mbps

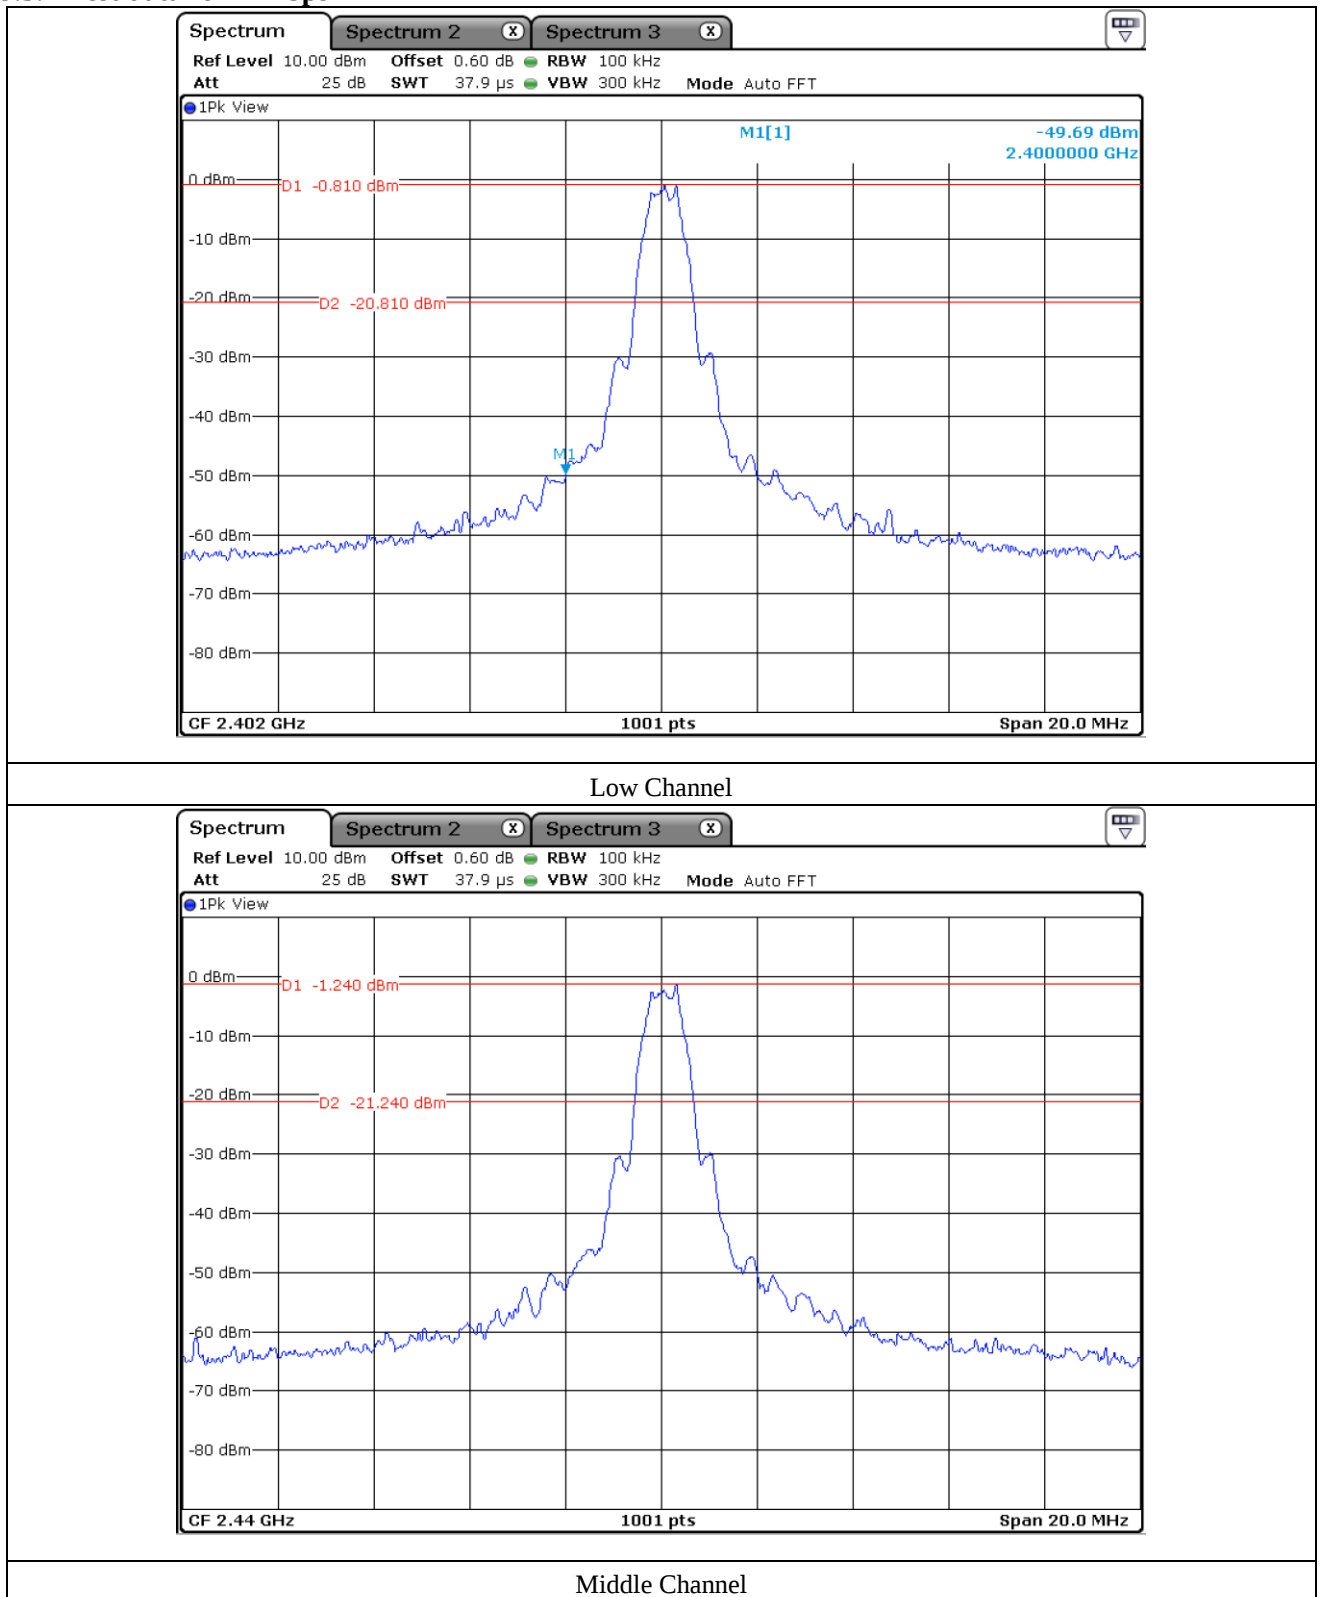



This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

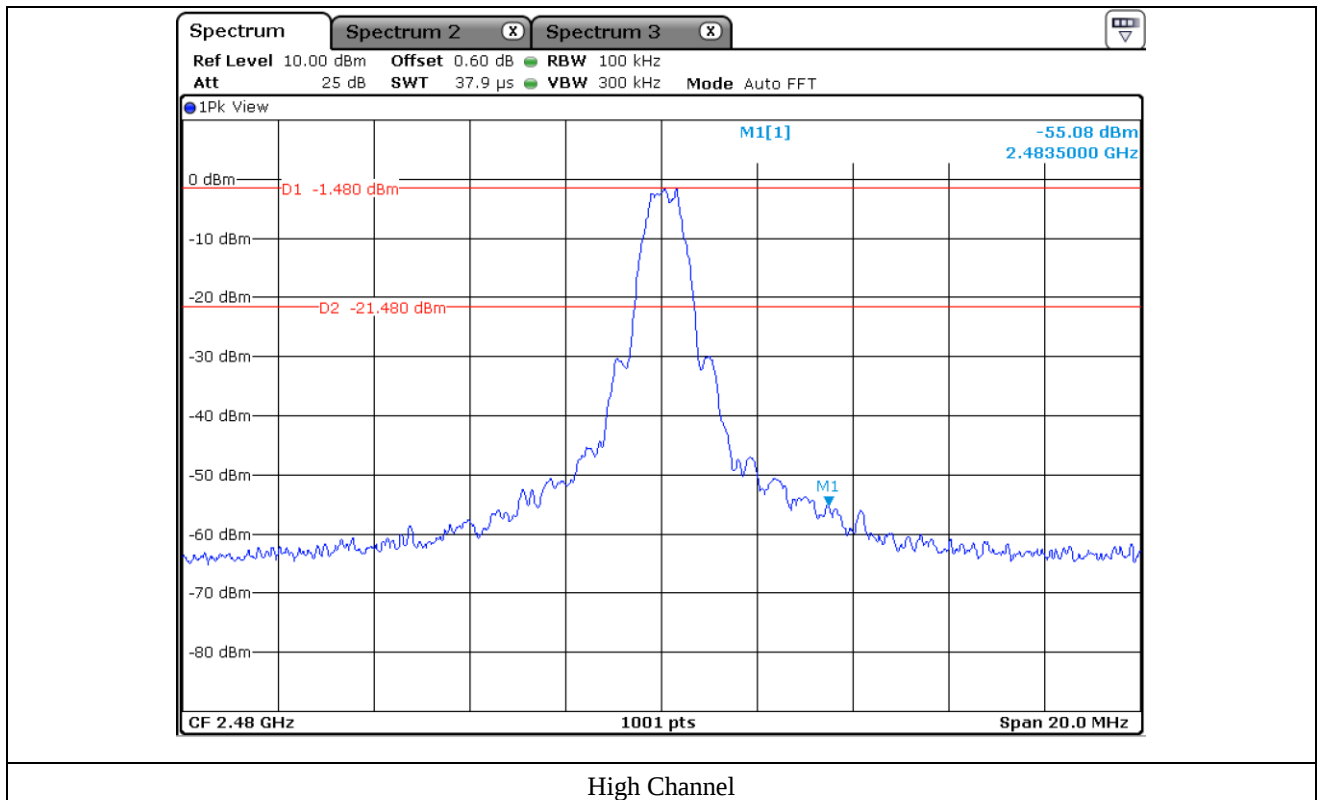

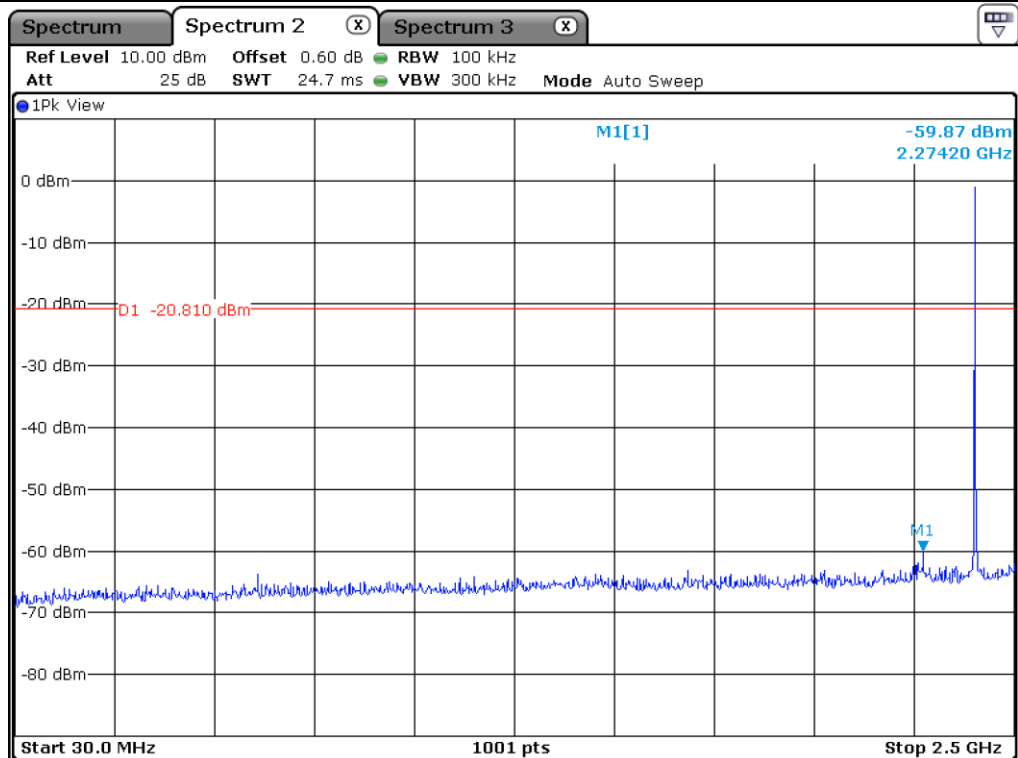

Low Channel

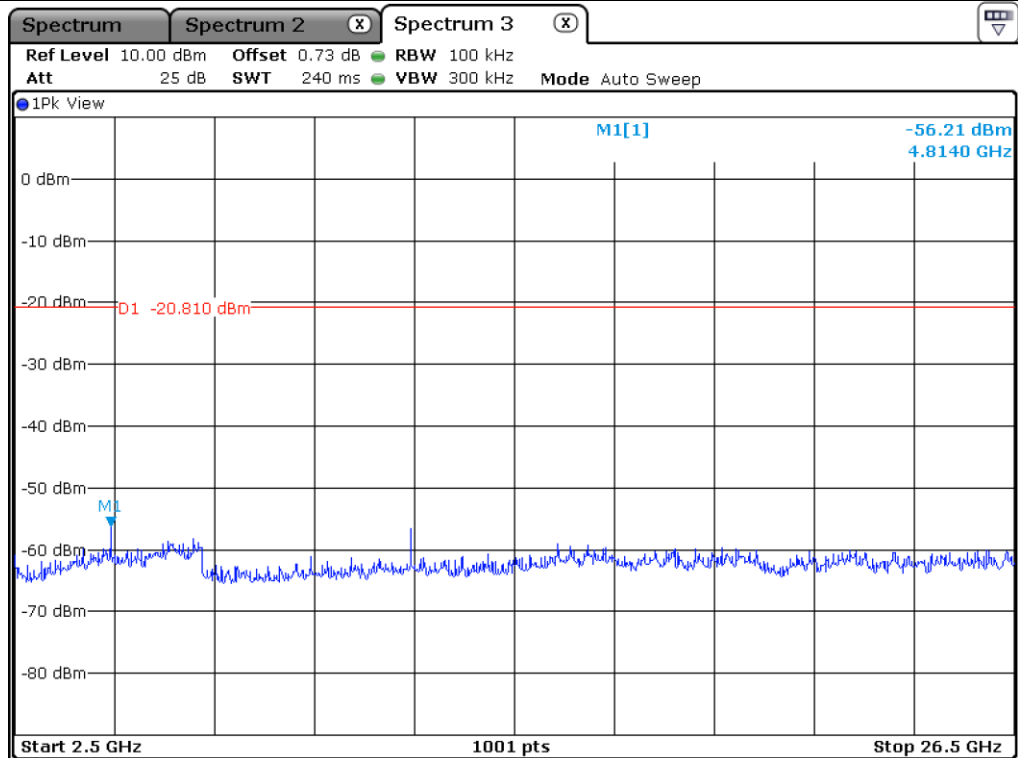


Low Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

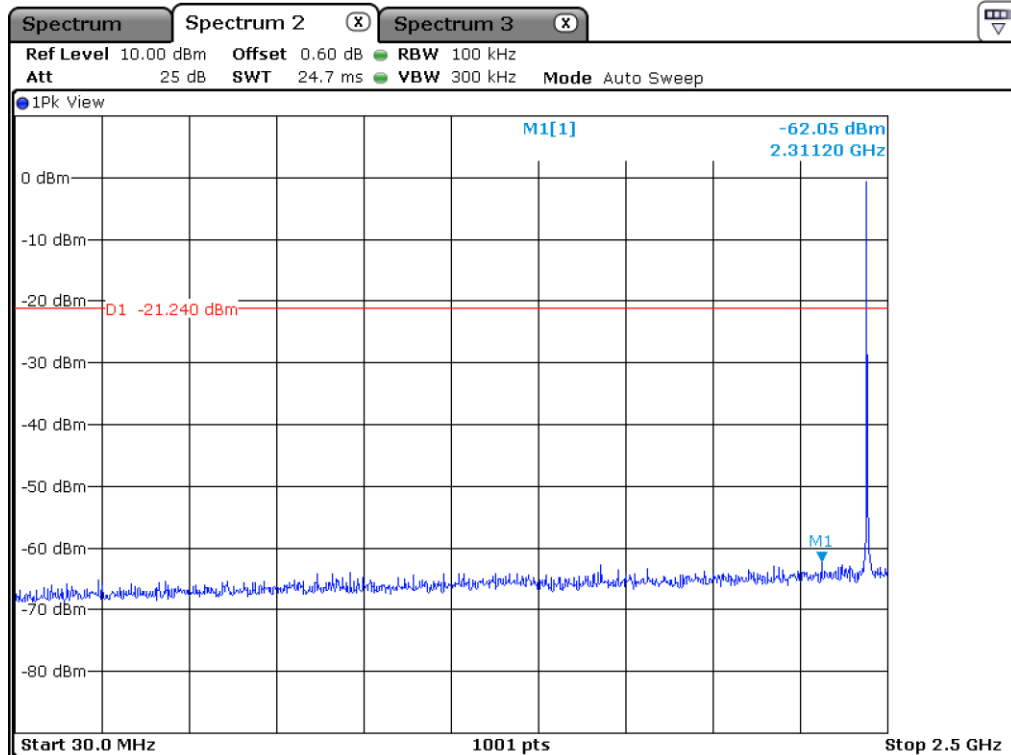

Middle Channel

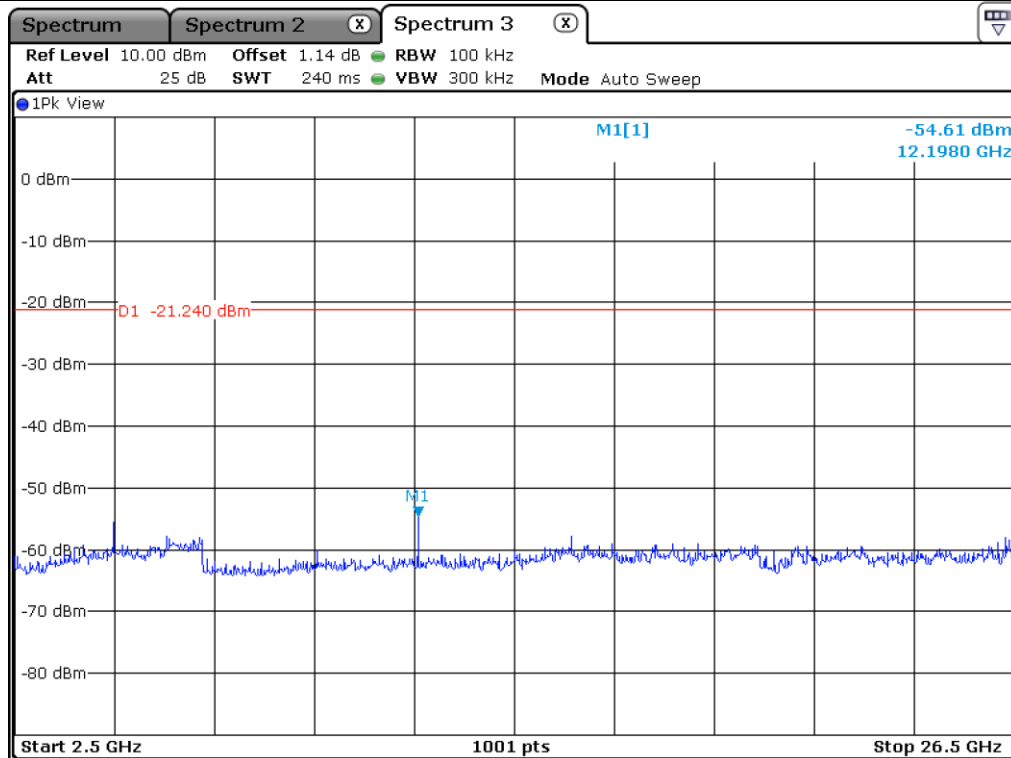


Middle Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

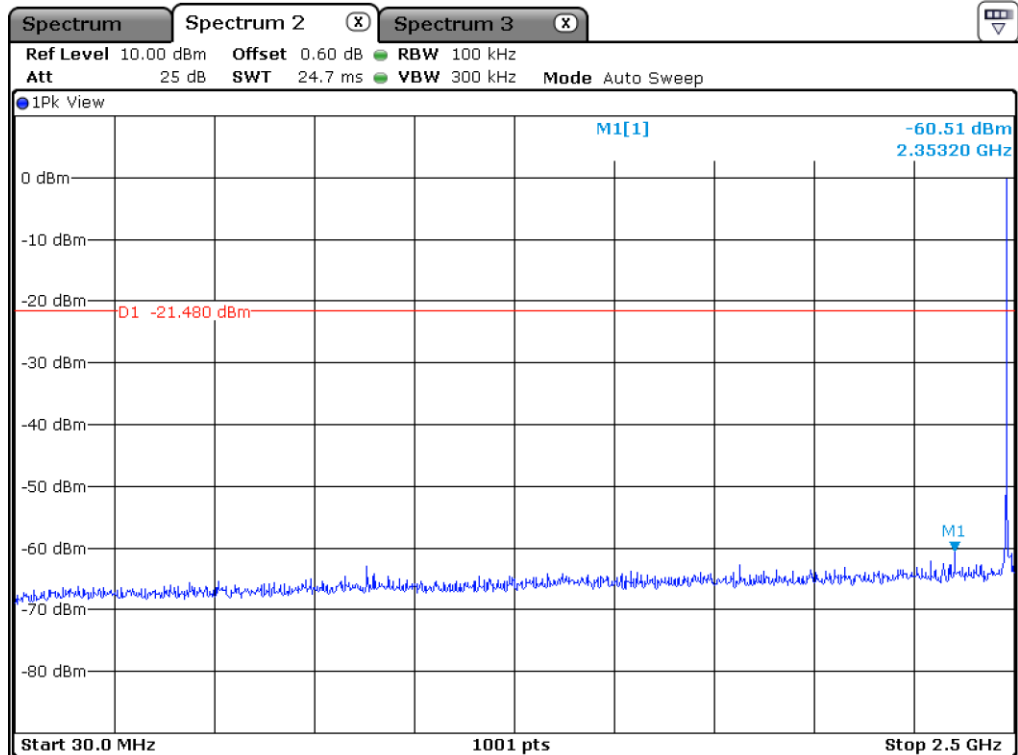

High Channel

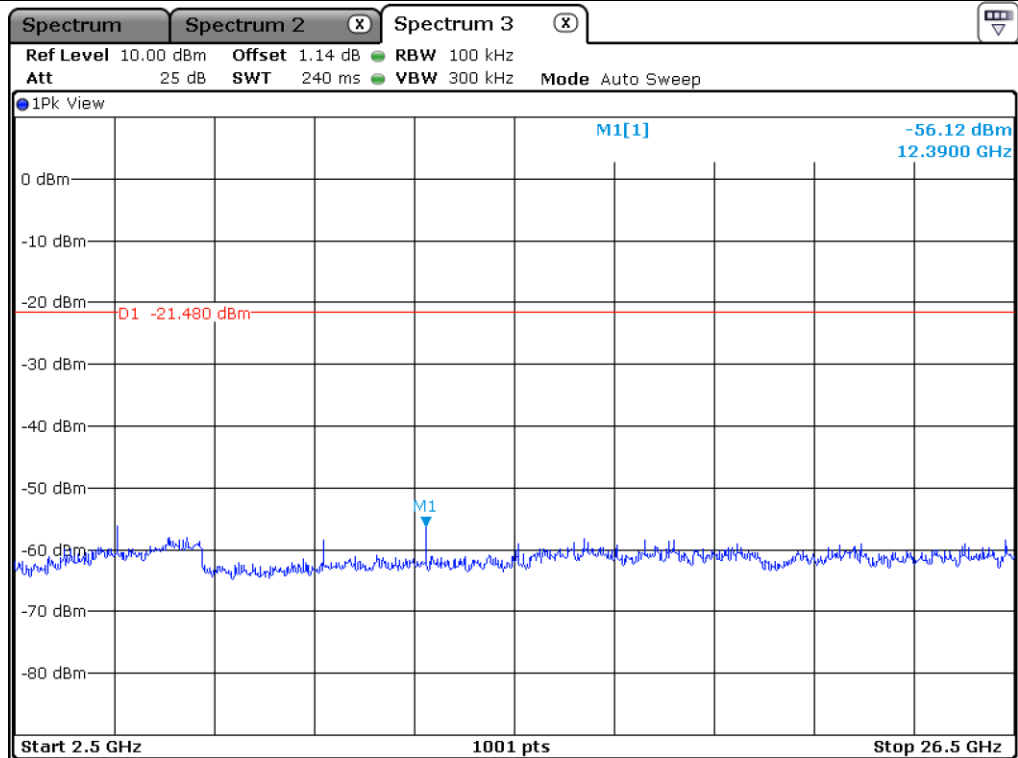

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 62.49 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 341 203	57.69	Peak	H	28.00	6.71	45.14	-	47.26	74.00	26.74
2 330 633	47.49	Average	H	28.10	6.71	45.14	2.04	39.20	54.00	14.80
2 376 496	57.60	Peak	V	28.10	6.71	45.14	-	47.27	74.00	26.73
2 341 019	47.74	Average	V	28.10	6.71	45.14	2.04	39.45	54.00	14.55
Test Data for High Channel										
2 493 976	59.83	Peak	H	27.90	6.87	45.14	-	49.46	74.00	24.54
2 491 638	48.33	Average	H	27.90	6.87	45.14	2.04	40.00	54.00	14.00
2 496 913	58.24	Peak	V	27.90	6.87	45.14	-	47.87	74.00	26.13
2 491 538	48.14	Average	V	27.90	6.87	45.14	2.04	39.81	54.00	14.19

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Correction Factor + Duty Factor – AMP Gain

9.6.2 Spurious & Harmonic Radiated Emission

- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 62.49 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	60.15	Peak	H	31.60	9.39	45.10	-	56.04	74.00	17.96
4 804.00	49.73	Average	H	31.60	9.39	45.10	2.04	47.66	54.00	6.34
4 804.00	60.18	Peak	V	31.60	9.39	45.10	-	56.07	74.00	17.93
4 804.00	49.83	Average	V	31.60	9.39	45.10	2.04	47.76	54.00	6.24
Test Data for Middle Channel										
4 880.00	59.90	Peak	H	31.50	9.39	45.10	-	55.69	74.00	18.31
4 880.00	49.85	Average	H	31.50	9.39	45.10	2.04	47.68	54.00	6.32
4 880.00	59.16	Peak	V	31.50	9.39	45.10	-	54.95	74.00	19.05
4 880.00	49.26	Average	V	31.50	9.39	45.10	2.04	47.09	54.00	6.91
Test Data for High Channel										
4 960.00	59.84	Peak	H	31.20	9.39	45.10	-	55.33	74.00	18.67
4 960.00	49.55	Average	H	31.20	9.39	45.10	2.04	47.08	54.00	6.92
4 960.00	60.41	Peak	V	31.20	9.39	45.10	-	55.90	74.00	18.10
4 960.00	49.65	Average	V	31.20	9.39	45.10	2.04	47.18	54.00	6.82

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor} + \text{Duty Factor} - \text{AMP Gain}$$

10. PEAK POWER SPECTRAL DENSITY

10.1 Operating environment


Temperature : 22.5 °C

Relative humidity : 53.5 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

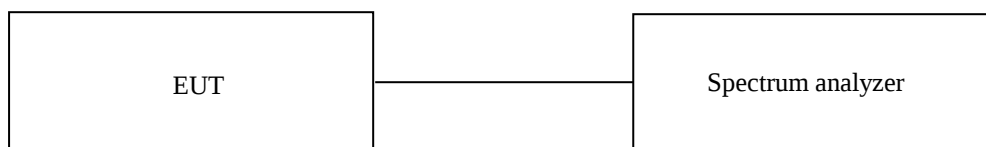

10.3 Test Date

March 02, 2022 ~ March 06, 2022


10.4 Test data for 1 Mbps


-. Test Result : Pass

-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-20.15	8.00	28.15
Middle	2 440.00	-20.23	8.00	28.23
High	2 480.00	-20.24	8.00	28.24

Remark. Margin = Limit – Measured value

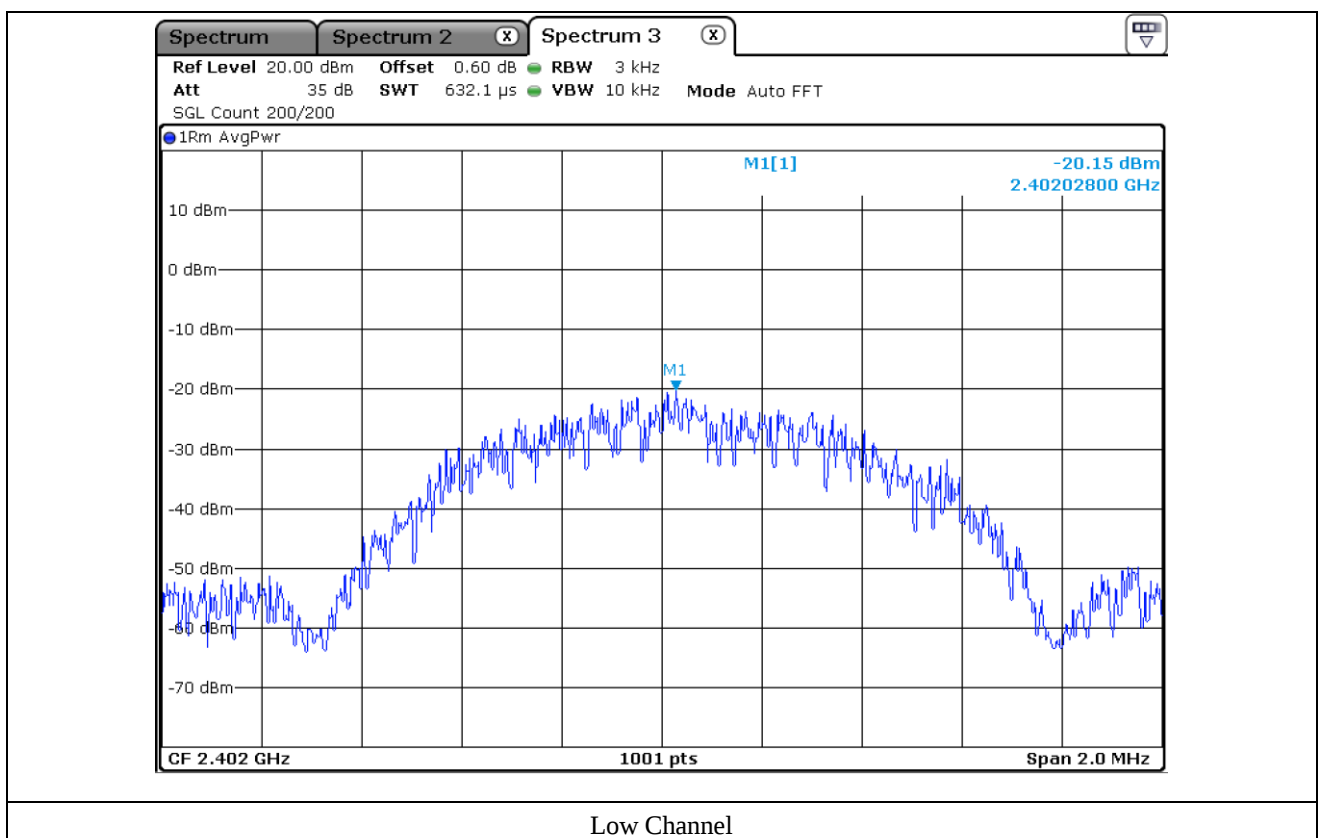

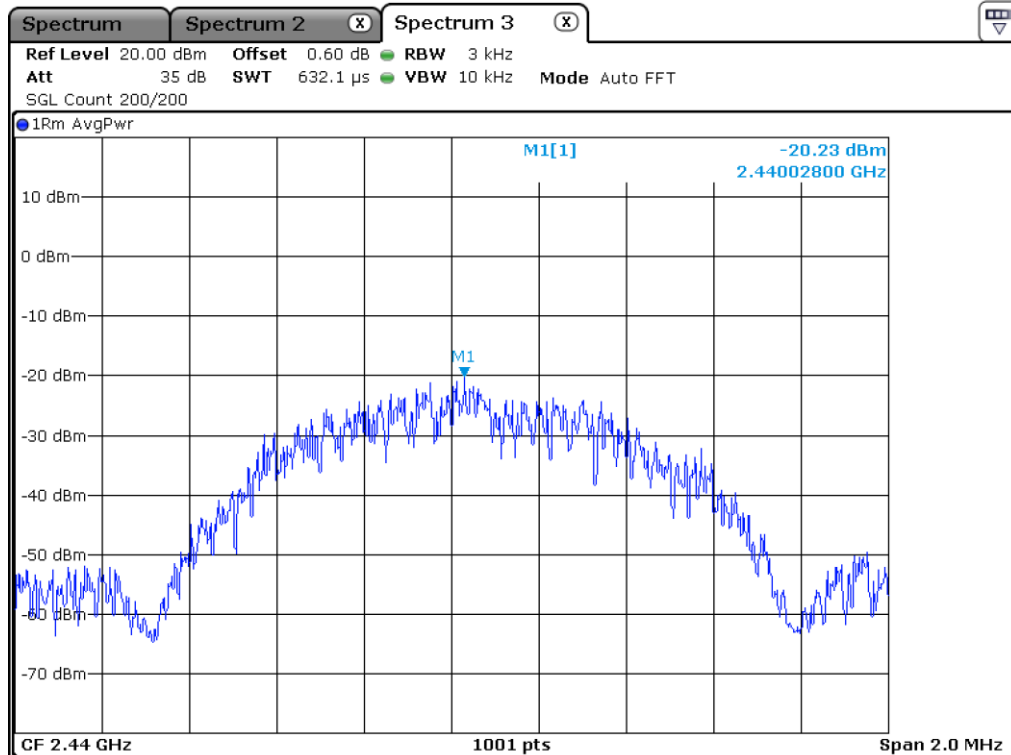

Middle Channel

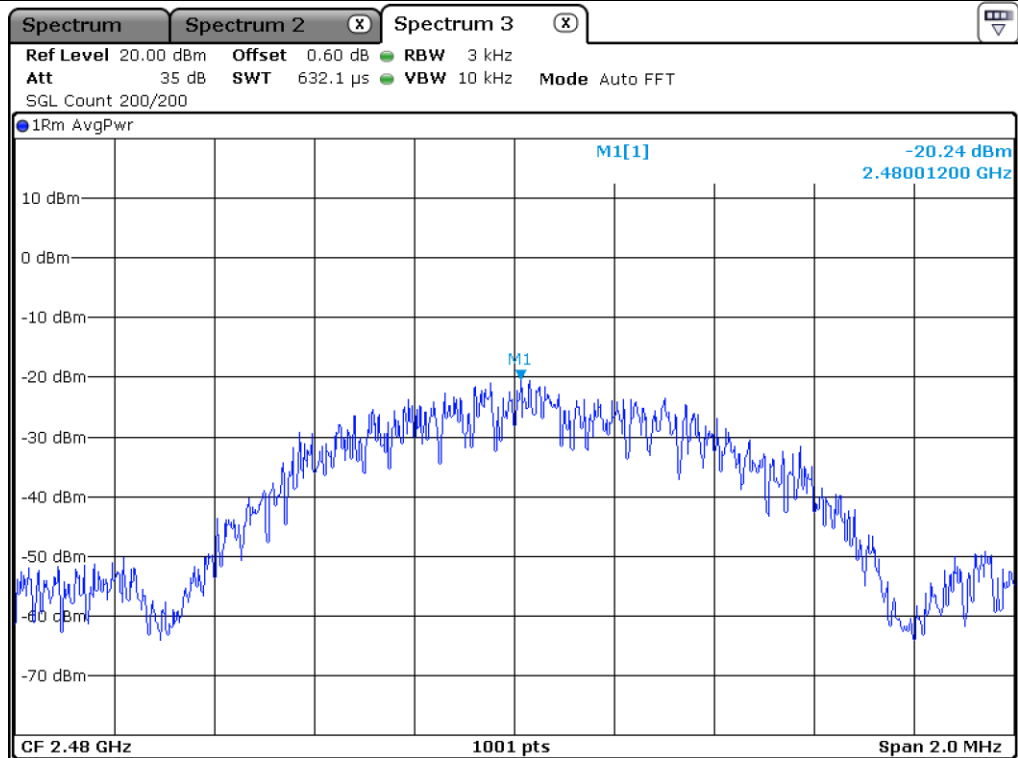

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 22.5 °C

Relative humidity : 53.5 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

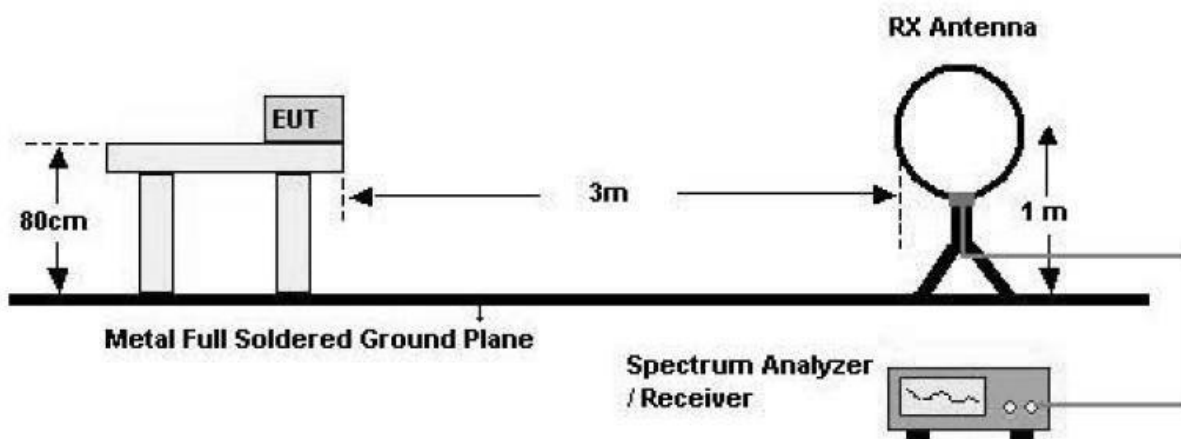

2. 30 MHz - 1 GHz

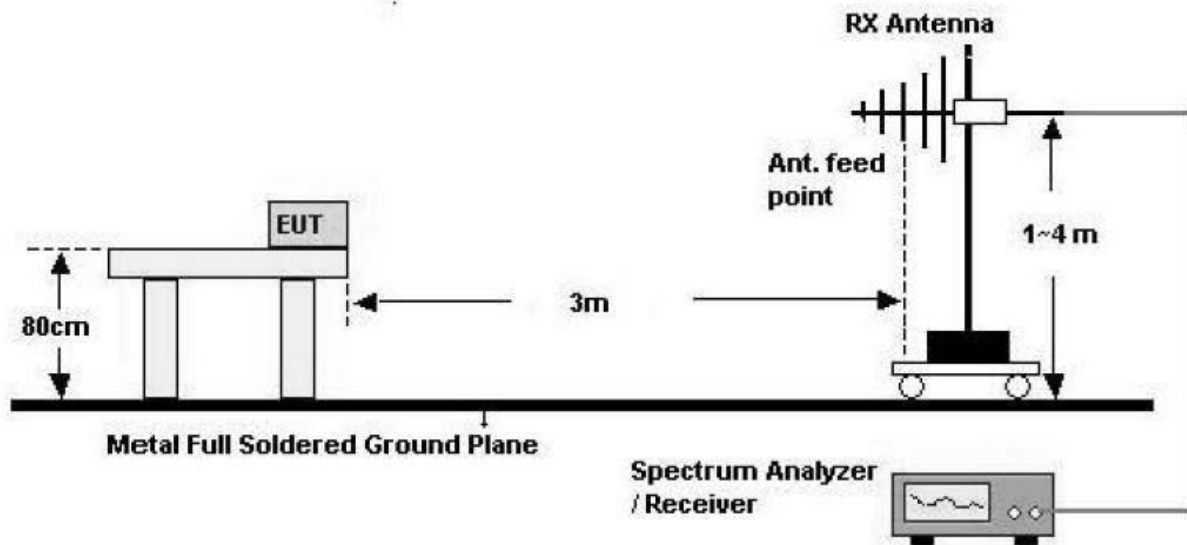

3. Above 1 GHz

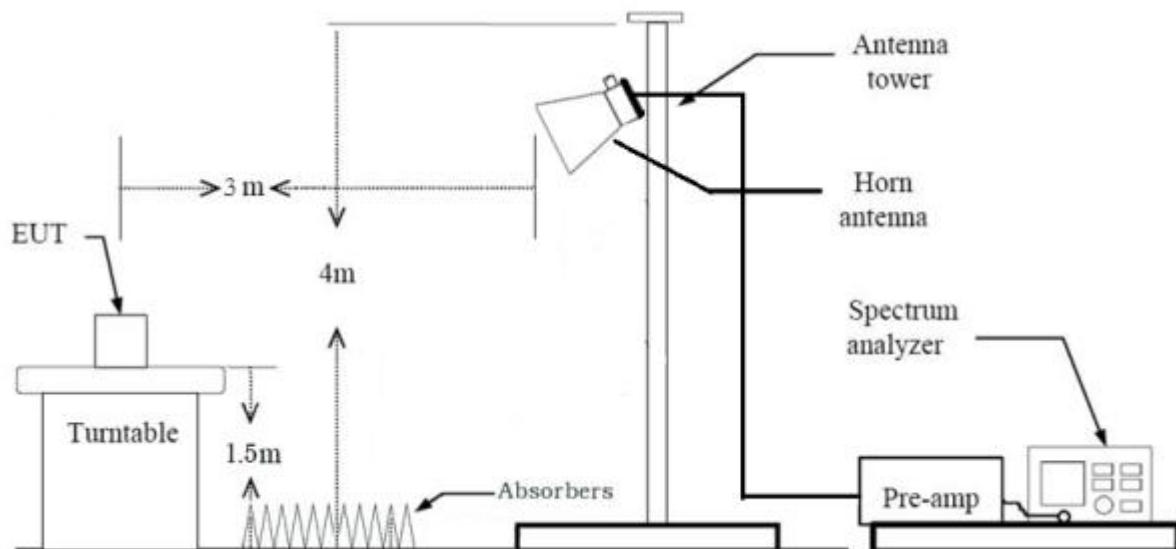

11.3 Test Date

March 02, 2022 ~ March 06, 2022

11.4 Test data for 30 MHz ~ 1 GHz


11.4.1 Test data for Bluetooth LE

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : BLE module

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

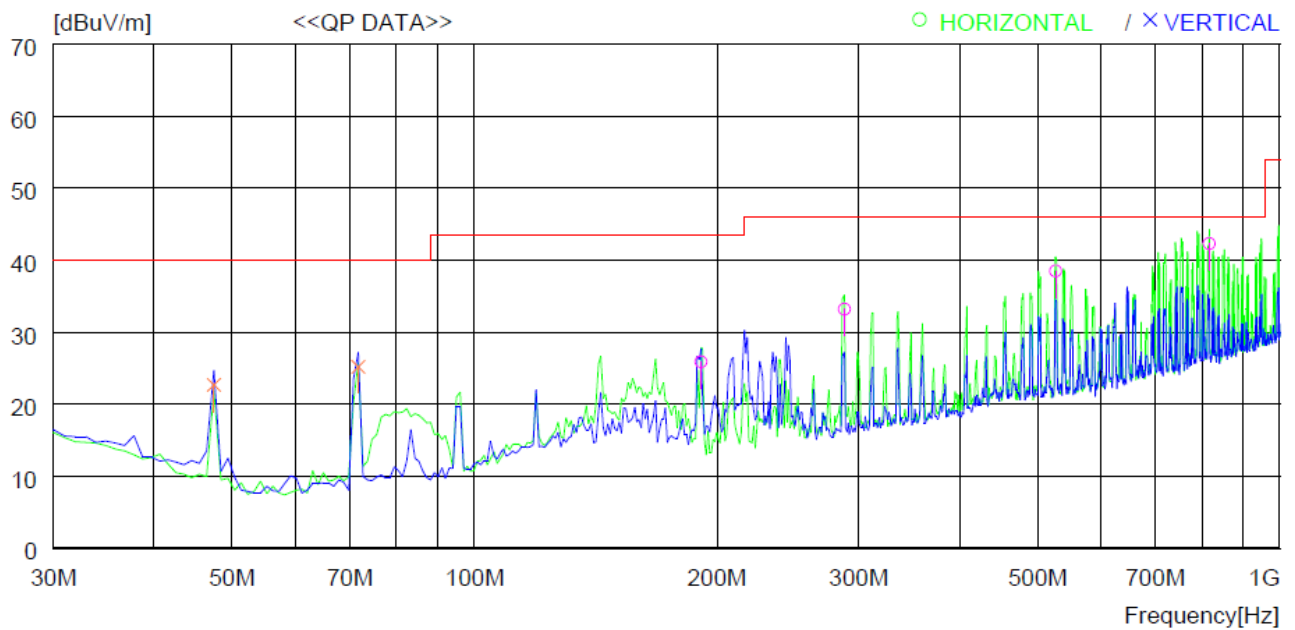

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	191.020	39.0	16.0	3.9	33.0	25.9	43.5	17.6	100	214
2	288.020	42.3	19.2	4.7	33.0	33.2	46.0	12.8	100	119
3	526.640	41.5	23.6	6.6	33.2	38.5	46.0	7.5	200	0
4	816.661	40.1	27.2	8.0	33.0	42.3	46.0	3.7	100	359
----- Vertical -----										
5	47.460	39.6	14.1	2.1	33.1	22.7	40.0	17.3	100	175
6	71.710	42.6	13.2	2.5	33.1	25.2	40.0	14.8	100	0

11.5 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.6 Test data for above 1 GHz

- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 22.5 °C

Relative humidity : 53.5 % R.H.

12.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

12.3 Test Date

March 02, 2022 ~ March 06, 2022

12.4 Test data

- . Resolution bandwidth : 9 kHz
- . Frequency range : 0.15 MHz ~ 30 MHz
- . Tested Line : HOT LINE

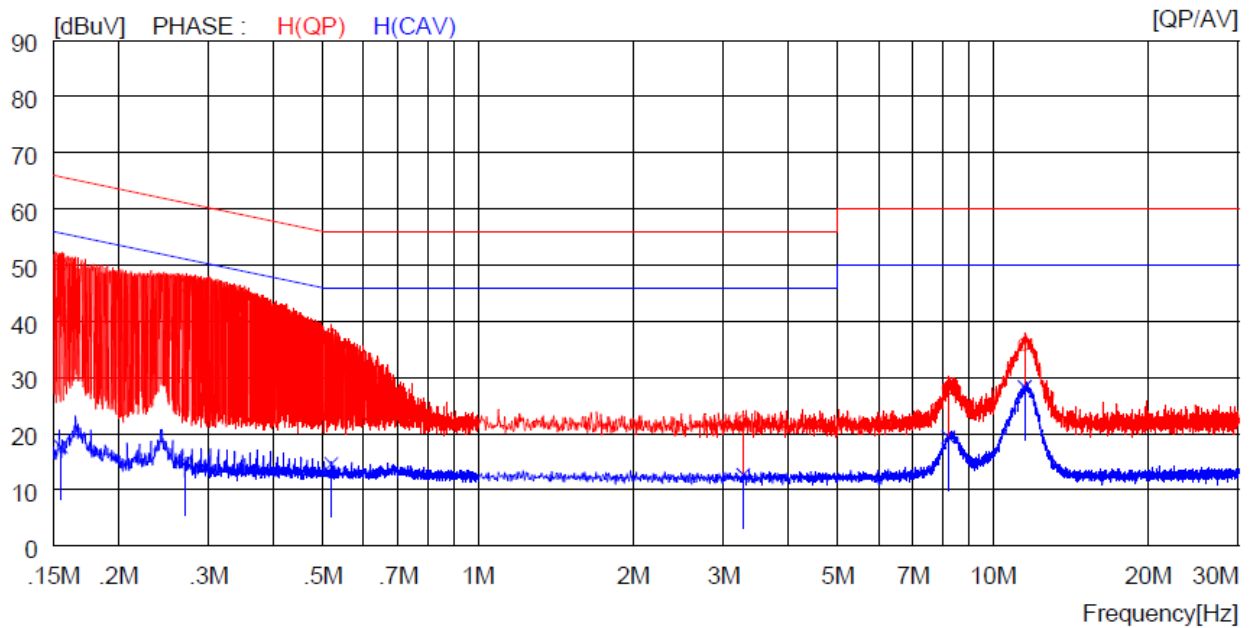

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15500	40.1	----	10.0	50.1	----	65.7	----	15.6	----	H (QP)
2	0.27100	36.4	----	10.0	46.4	----	61.1	----	14.7	----	H (QP)
3	0.51900	27.5	----	10.0	37.5	----	56.0	----	18.5	----	H (QP)
4	3.27600	12.0	----	10.1	22.1	----	56.0	----	33.9	----	H (QP)
5	8.19500	17.9	----	10.2	28.1	----	60.0	----	31.9	----	H (QP)
6	11.53000	25.7	----	10.2	35.9	----	60.0	----	24.1	----	H (QP)
7	0.15500	----	7.7	10.0	----	17.7	----	55.7	----	38.0	H (CAV)
8	0.27100	----	5.0	10.0	----	15.0	----	51.1	----	36.1	H (CAV)
9	0.51900	----	4.6	10.0	----	14.6	----	46.0	----	31.4	H (CAV)
10	3.27600	----	2.6	10.1	----	12.7	----	46.0	----	33.3	H (CAV)
11	8.19500	----	9.2	10.2	----	19.4	----	50.0	----	30.6	H (CAV)
12	11.53000	----	18.1	10.2	----	28.3	----	50.0	----	21.7	H (CAV)


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

-. Tested Line : NEUTRAL LINE

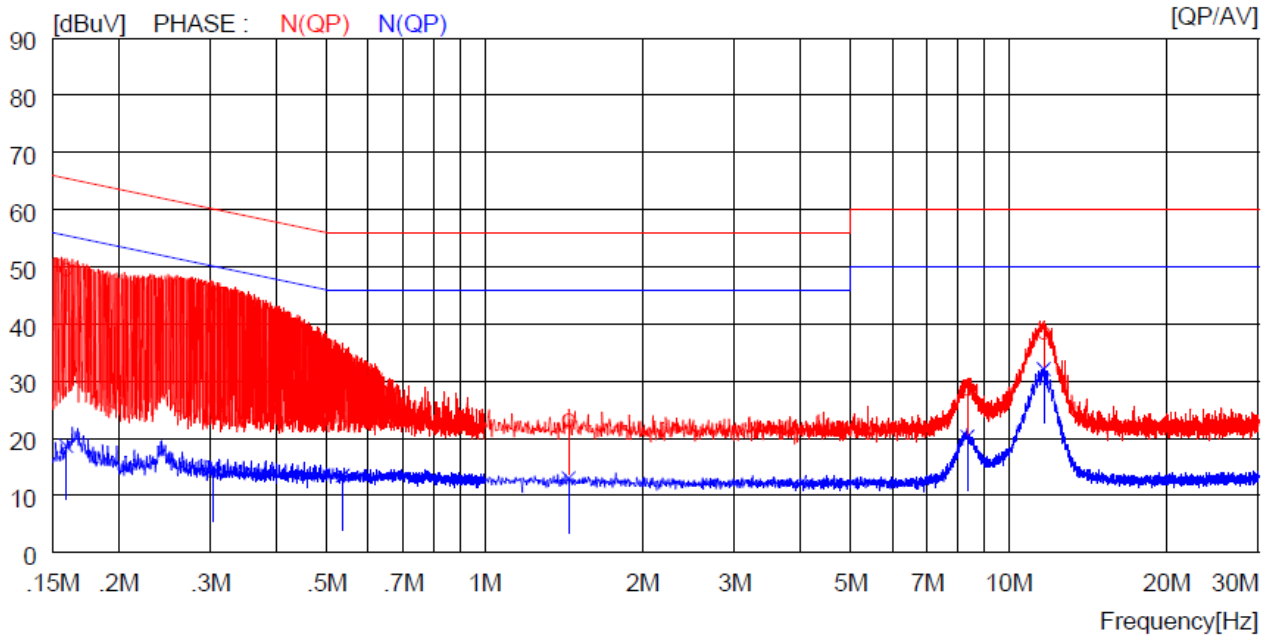

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15900	39.5	----	10.0	49.5	----	65.5	----	16.0	----	N(QP)
2	0.30400	35.2	----	10.0	45.2	----	60.1	----	14.9	----	N(QP)
3	0.53600	24.6	----	10.0	34.6	----	56.0	----	21.4	----	N(QP)
4	1.44800	13.2	----	10.0	23.2	----	56.0	----	32.8	----	N(QP)
5	8.34000	18.4	----	10.2	28.6	----	60.0	----	31.4	----	N(QP)
6	11.67000	28.2	----	10.2	38.4	----	60.0	----	21.6	----	N(QP)
7	0.15900	----	8.7	10.0	----	18.7	----	55.5	----	36.8	N(CAV)
8	0.30400	----	4.9	10.0	----	14.9	----	50.1	----	35.2	N(CAV)
9	0.53600	----	3.5	10.0	----	13.5	----	46.0	----	32.5	N(CAV)
10	1.44800	----	3.0	10.0	----	13.0	----	46.0	----	33.0	N(CAV)
11	8.34000	----	10.1	10.2	----	20.3	----	50.0	----	29.7	N(CAV)
12	11.67000	----	21.9	10.2	----	32.1	----	50.0	----	17.9	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Spectrum Analyzer	102165	Apr. 16, 2021 (1Y)
ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 18, 2021 (1Y)
ESCI	Rohde & Schwarz	Test Receiver	101012	Oct. 20, 2021 (1Y)
ESH3-Z2	Rohde & Schwarz	Pulse Limiter	100655	Mar. 14, 2022 (1Y)
NSLK8128	Schwarzbeck	V-LISN (4*32/50A)	8128216	Mar. 14, 2022 (1Y)
GP-4303D	LG Precision Co.,Ltd	DC Power Supply	5071069	Jan. 03, 2022(1Y)
310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 15, 2022(1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 14, 2021 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
HLP-2008	TDK	Hybrid Antenna	131313	Feb. 21, 2022 (1Y)
BBHA9120D	Schwarzbeck	Horn Antenna	295	Feb. 25, 2022 (1Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter	N/A	Jan. 19, 2022 (1Y)

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)