


Features

1. Surface Mounted Devices with a small dimension of $3.6 \times 1.6 \times 0.5 \text{ mm}^3$ meet future miniaturization trend.
2. Embedded and LTCC (Low Temperature Co-fired Ceramic) technology is able to future integrate with system design as well as beautifying the housing of final product.
3. High Stability in Temperature / Humidity Change

Applications


1. Bluetooth
2. Wireless LAN
3. ISM band 2.4GHz wireless applications

Dimensions (Unit: mm)

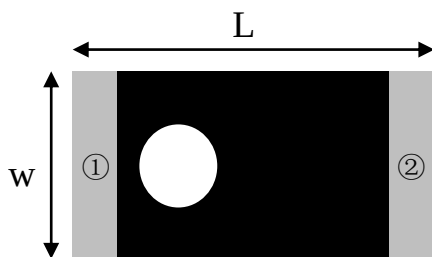

(Top View)

Number	Terminal Name
①	INPUT
②	NC

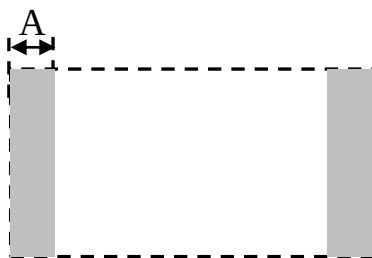

(Bottom View)






(Side View)

Symbols	L	W	T	A
Dimensions	3.2 ± 0.2	1.6 ± 0.2	0.5 ± 0.1	0.4 ± 0.1

www.surbaner.com.cn

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

Evaluation Board and Matching Circuits

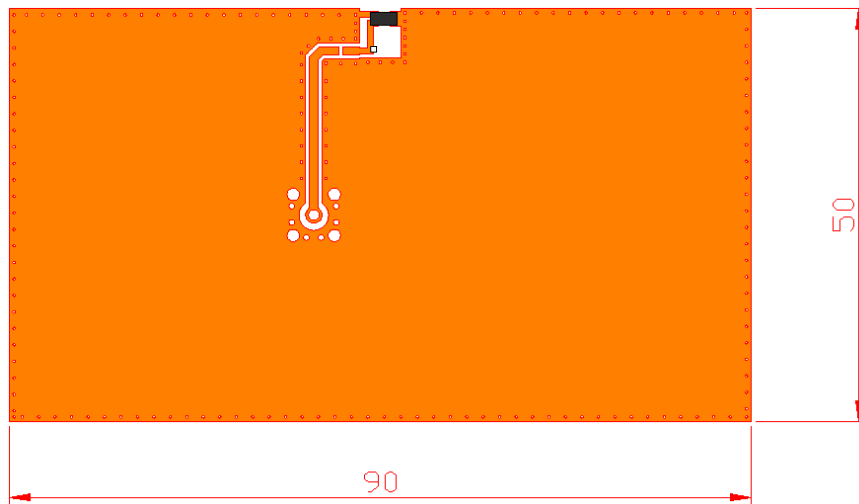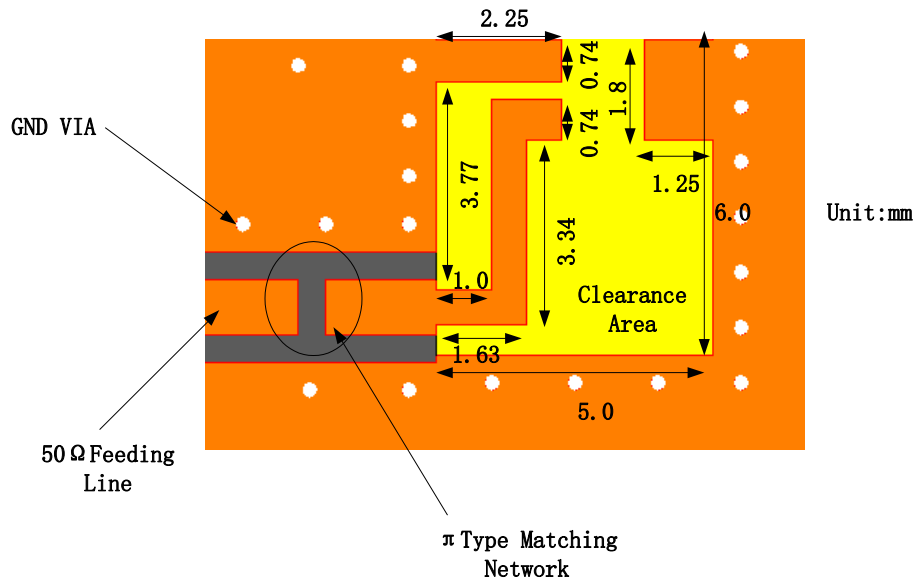

www.surbaner.com.cn


SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

P/N: SURL321605T66

Electrical Characteristics

No.	Item	Specifications
1	Central Frequency	2500MHz
2	Band Width	100 MHz typ.
3	Peak Gain	4.08 dBi
4	Return Loss	≤ 2.0
5	Polarization	Linear
6	Azimuth Beam width	Omni-directional
7	Impedance	50 Ω
8	Model Name	N/A

Characteristic curve

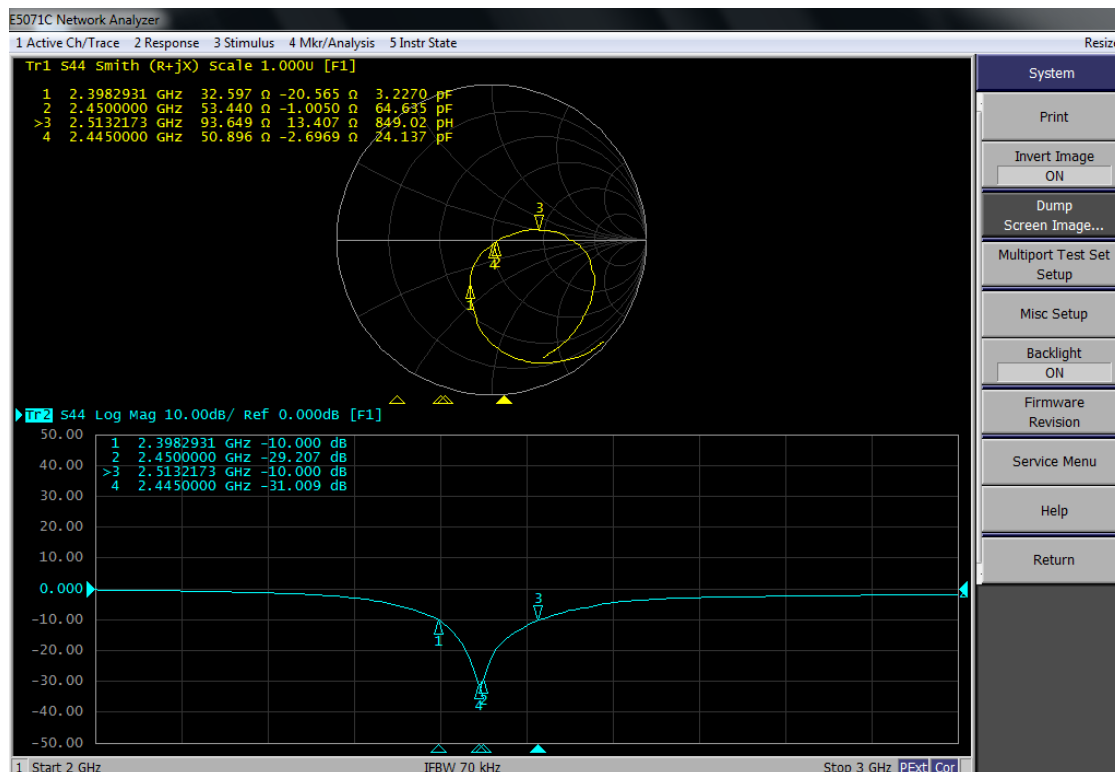


www.surbaner.com.cn

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

Radiation Pattern

coordinates:

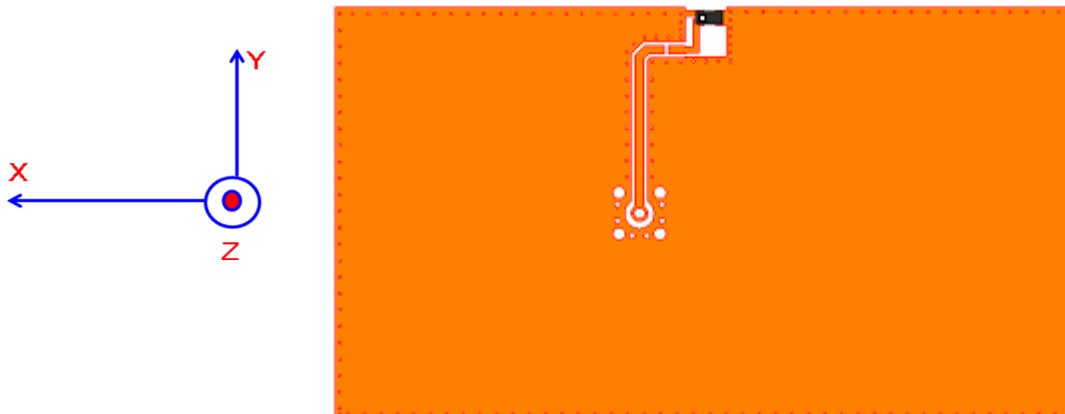

Manufacture's Name:Kunwei Medical Electronics Co., Ltd

Address:Room 1402,Block B,Building 2,Longgang Tianan Cyber Park,
Huangge Road,Longgang District Shenzhen Guangdong,CN518172


www.surbaner.com.cn

SBR Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SBR Communication Technology.

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBi)

Max: 5 Min: -35 Scale: 5/div

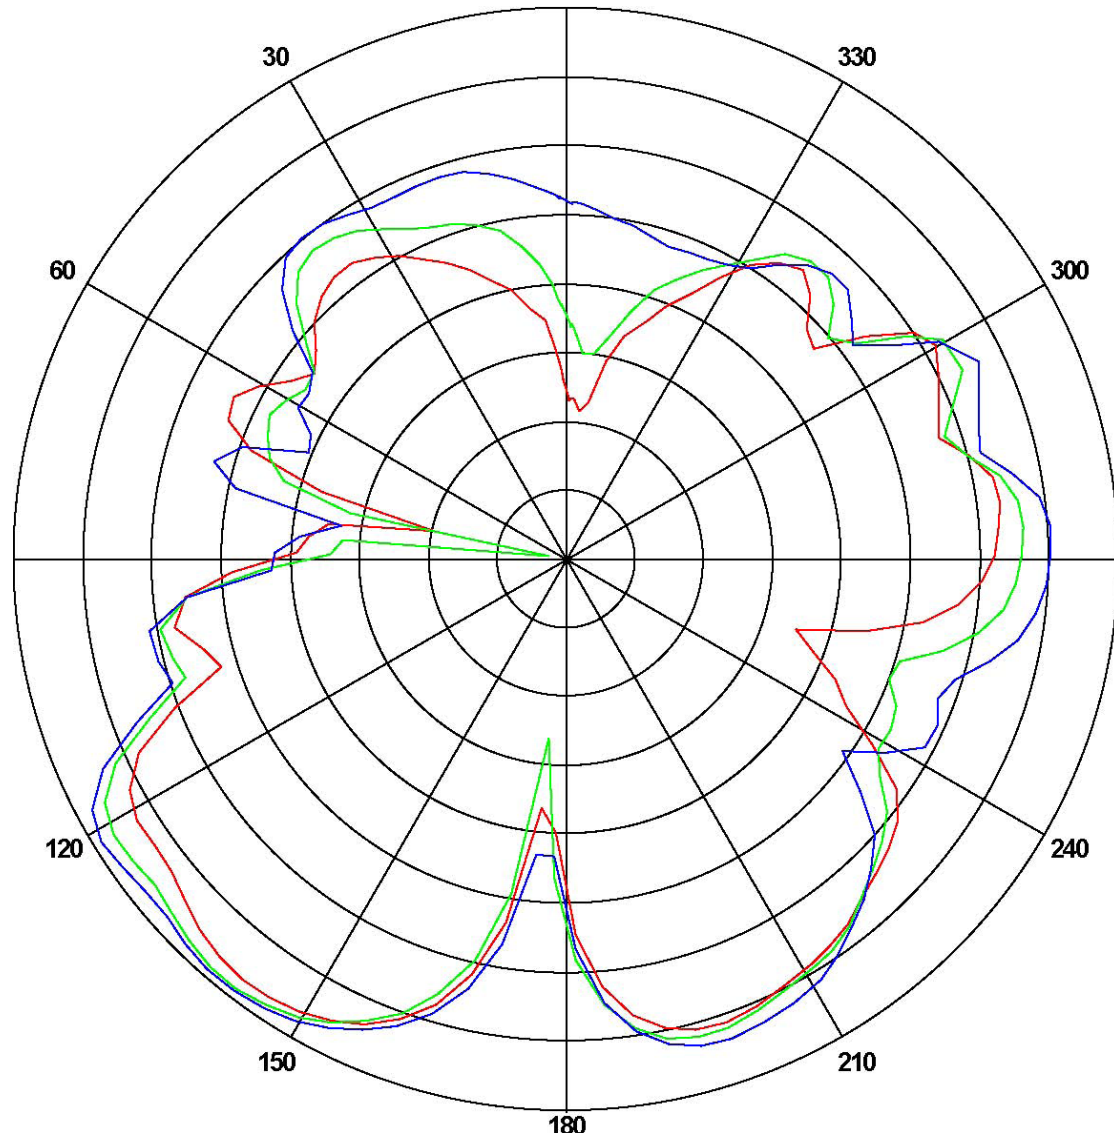


Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	3.93178	-25.0815	-3.48713
2450	3.95801	-33.5605	-2.88012
2500	4.08056	-19.0318	-1.79139

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBi)

Max: 0 Min: -30 Scale: 5/div

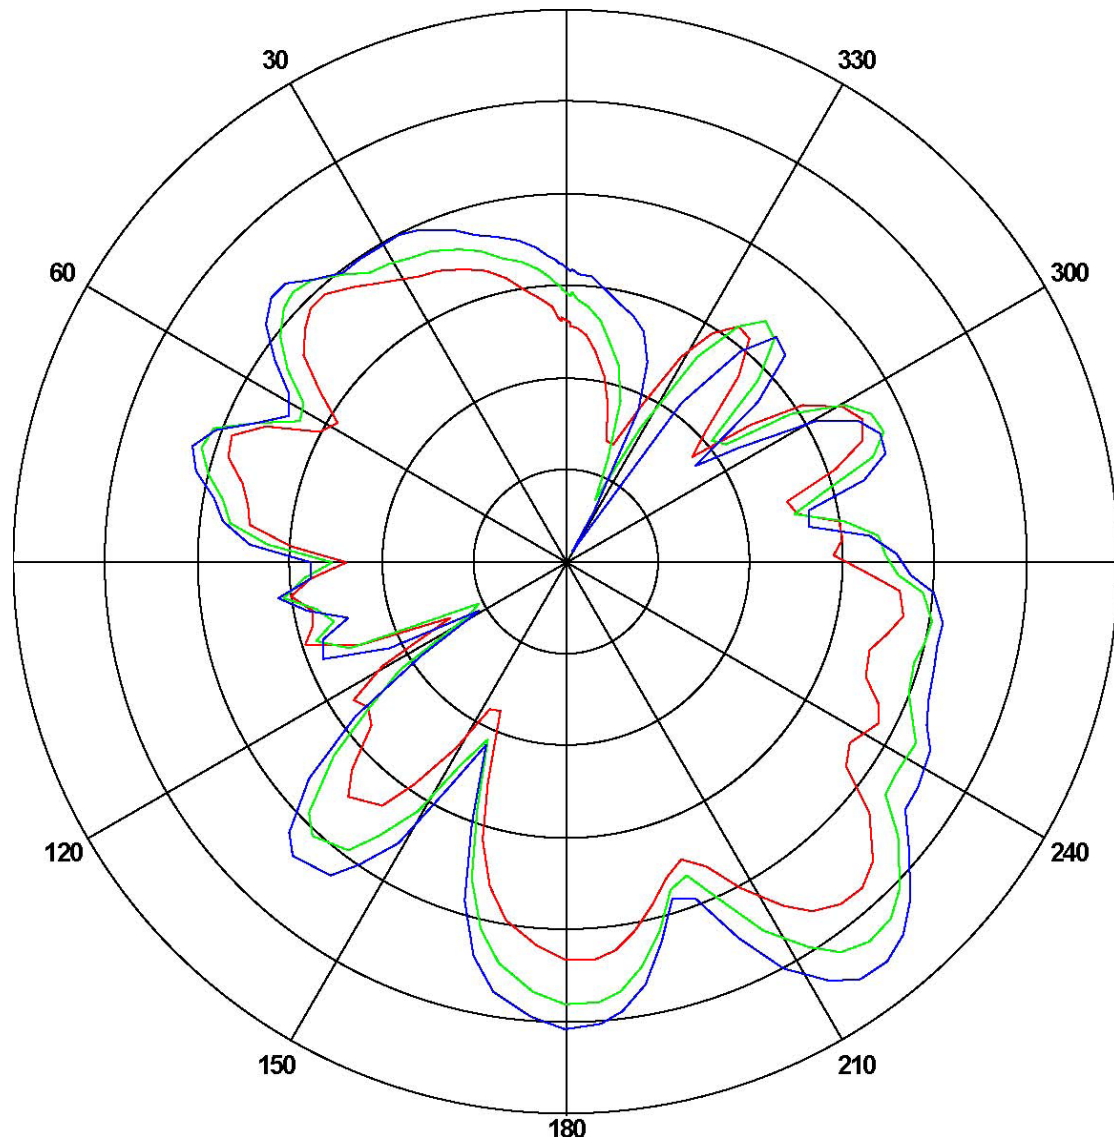

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-6.1530	-24.1420	-13.0295
2450	-3.7054	-26.5836	-10.6700
2500	-2.32122	-30.4301	-9.70536