

1. Antenna Description:

Antenna type	PIFA antenna
Model	StarryHub Core30-Module 1
Frequency range	2400-2500MHz, 5180-5240MHz, 5745-5825MHz
Manufacturer	CZUR TECH CO., LTD
Address	RM722, Block B, Podium of Buiding No. 12 Shenzhen Bay
ANT Peak Gain	1.03 dBi for 2400-2500MHz, 1.12 dBi for 5180-5240MHz, 1.16 dBi for 5745-5825MHz

2. Antenna Photo:

Length :23.67mm

Width:12.94mm



3. Test Equipment & Conditions

3.1 Test instrument

VSWR is tested using Agilent E5071B connected to a hand mechanism, and the status is free space.

3.2 Test environment and methods


Dark room specifications: ETS-743

TD-SCDMA test equipment: StarPoint SP6010/Agilent 8960

LTE-TDD/FDD-SCDMA test equipment: StarPoint SP8011/CMW500


WCDMA/GSM/CDMA test equipment: Agilent 8960

Passive efficiency testing equipment: Agilent Technologies E5071B

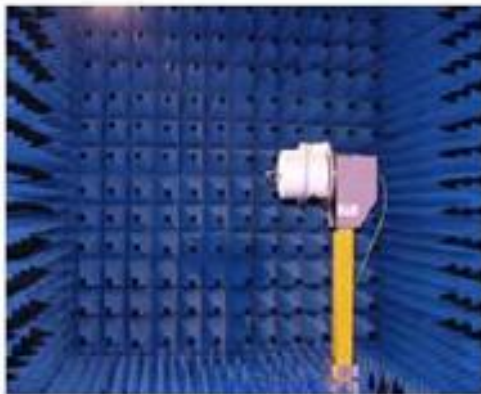


4 . Antenna Radiation Pattern



2400MHz

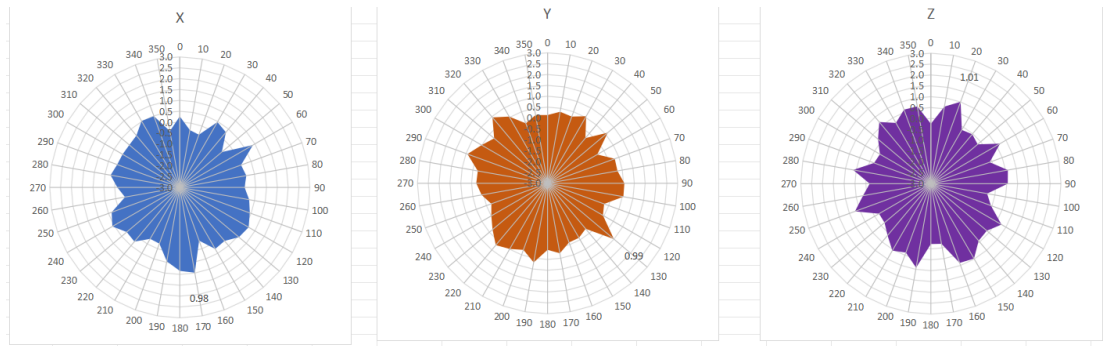


2450MHz

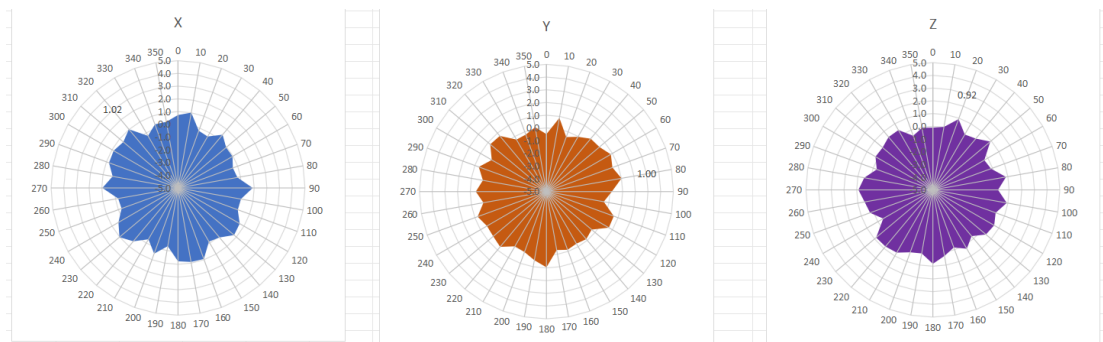


2500MHz

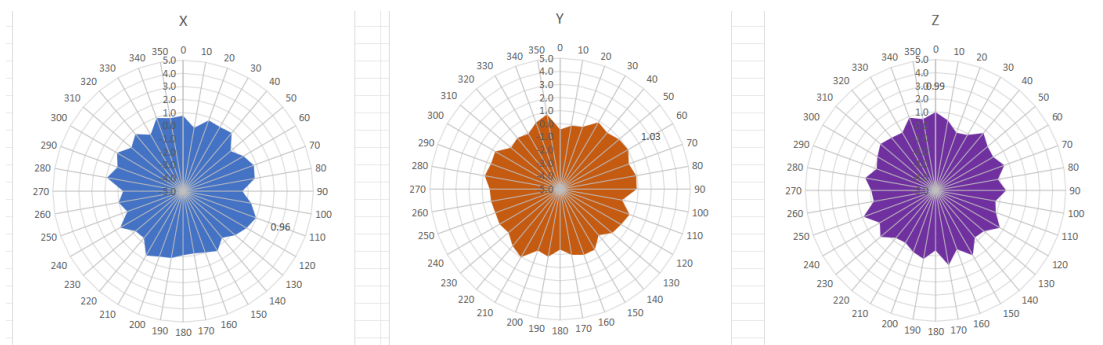


5180MHz

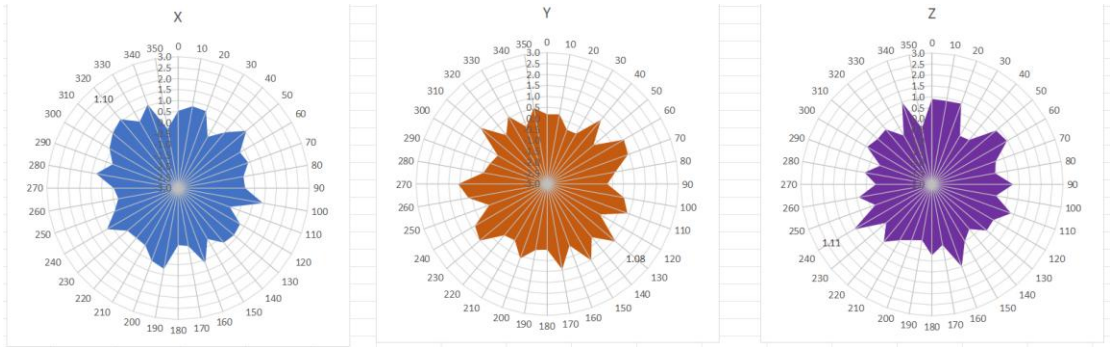


5220MHz

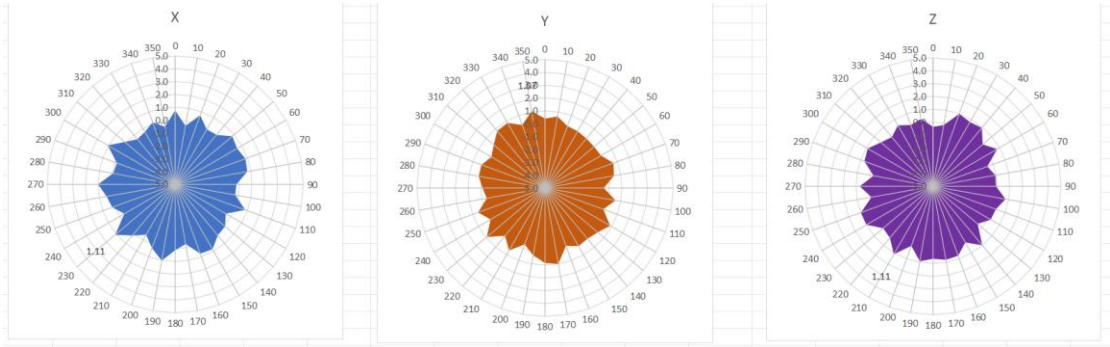


5240MHz

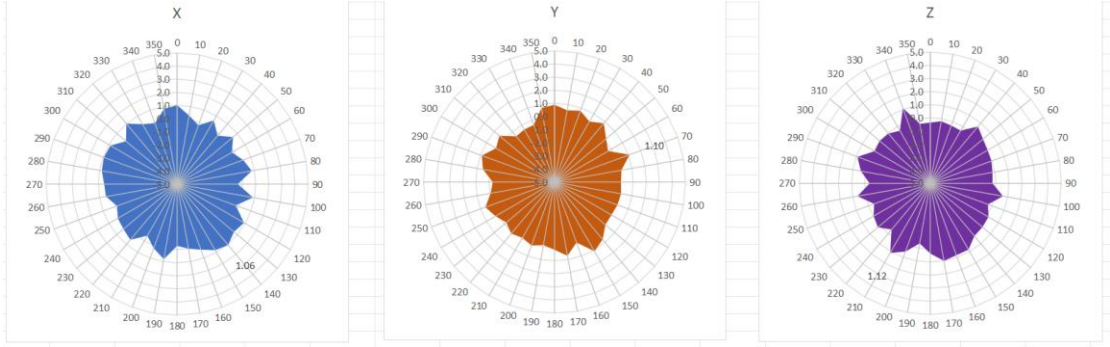

5745MHz

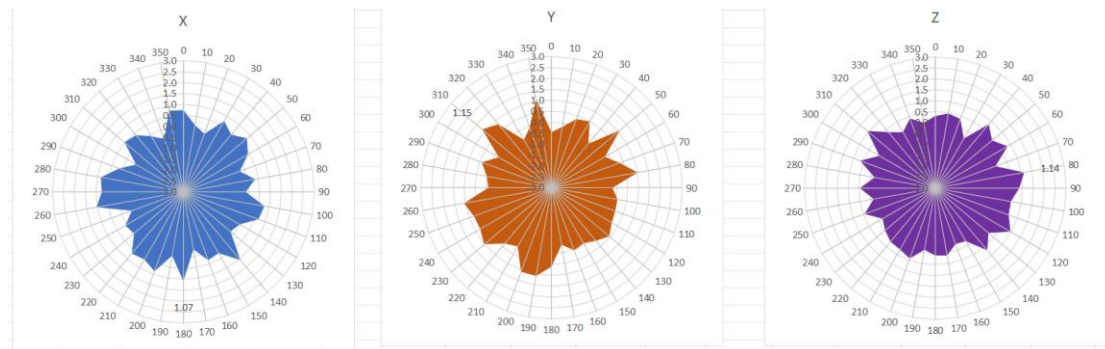

5785MHz

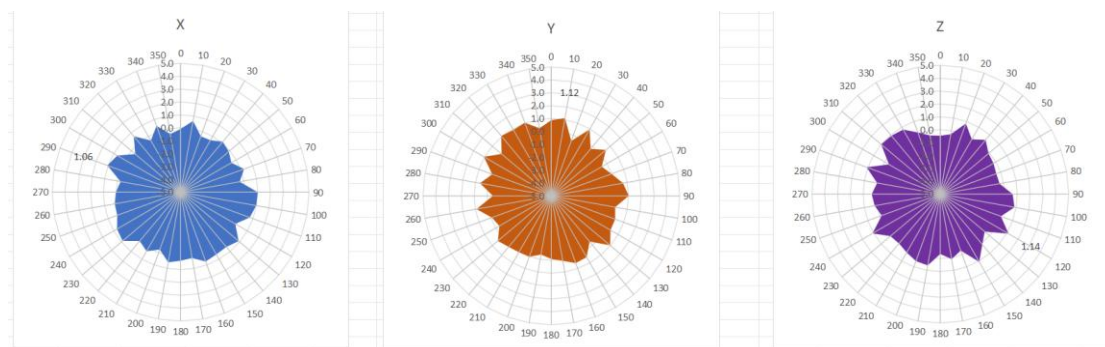

5825MHz

