

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER:

客 戶 料 號:
CUST P/N:

豪輝 料 號:
FINE P/N:

產 品 型 號:
DESC:

日 期:
DATE:

版 本:
Version:

A11-40-6.3UH 单线圈 0.08*24*2P*10TS

Φ40MM*0.8MM (磁片厚度) PC40 材质

2023/7/19

A.0.05

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
陈小英	陈小英	周文韬	

Shenzhen Odier Sports Technology Co., Limited

14/F-17, Kaihaoda Building, No. 1, Industrial Park Road, Shanghenglang
Community, Dalang Street Longhua District, Shenzhen, China

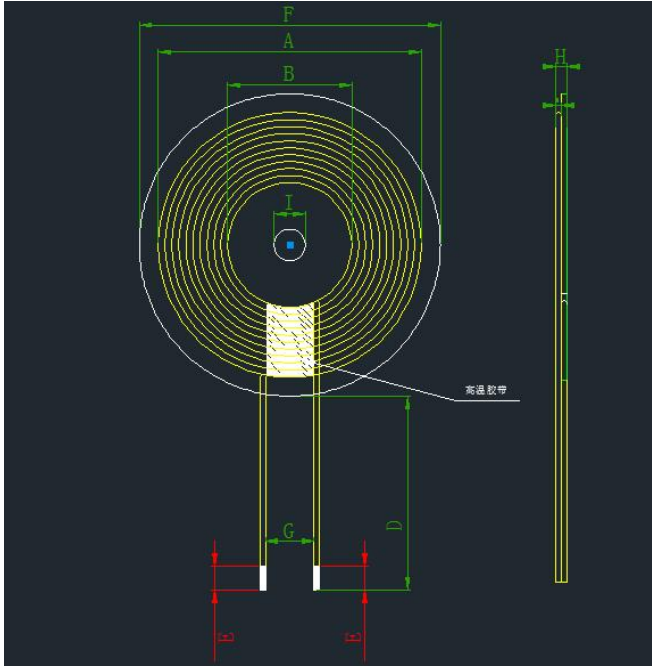
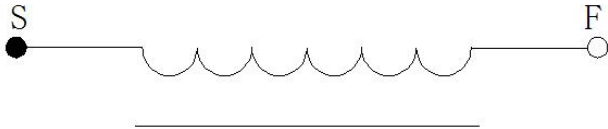
版本變更履歷

Version Change History

[illegible]

SPECIFICATION

產 品 型	Φ17.5x39-6.3uH-0.08x80-15mm-	版本	客戶 CUST:	XXX
-------	------------------------------	----	----------	-----

號: DESC		Rev: A.0	客户料号 CUST P/N:	
mm)  二、原理图 SCHEMATIC DIAGRAM: 			A	38.0±1.5
			B	20.5±0.5
			C	1.1 Max
			D	15±2
			E	3±1
			F	40±1
			G	10.0 ref
			H	2.3 Max
			I	5.3 ref
			注: 1.交叉出线; 2.出线位置缠 8mm(ref)宽度 高温胶纸 1-2Ts; 3.线圈贴圆形硬磁片带槽,磁 片尺 40±1mm,内孔 5.3mm,厚 度为 0.75±0.2mm。	

三、绕线参数 Winding Specification:					
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	自粘铜线 0.08*24*2	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:					
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%					
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤50mΩ		LCZ METER 502B

We statement that All measurements were performed radiated and therefore additional antenna gain documentation is not required.

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
陈小英 2023/3/15	周文韬 2023/7/18