

# Bluetooth antenna of PCB on-board specification

## 1, Index

| Item | Content               | Page | Remark |
|------|-----------------------|------|--------|
| 1    | Index                 | 1    |        |
| 2    | Spec Drawing          | 2    |        |
| 3    | Specification         | 2    |        |
| 4    | Antenna On Test Board | 3    |        |
| 5    | Return Loss           | 3    |        |
| 6    | Radiation Pattern     | 3    |        |


Document Type: 2.4GHZ coil antenna  
Document Version: V1.0  
Release Date: Aug. 23, 2017

Feasycom Technology Co.,Ltd.

Telephone: 86-755-27924639

[www.feasycom.com](http://www.feasycom.com)

## 2, Spec Drawing

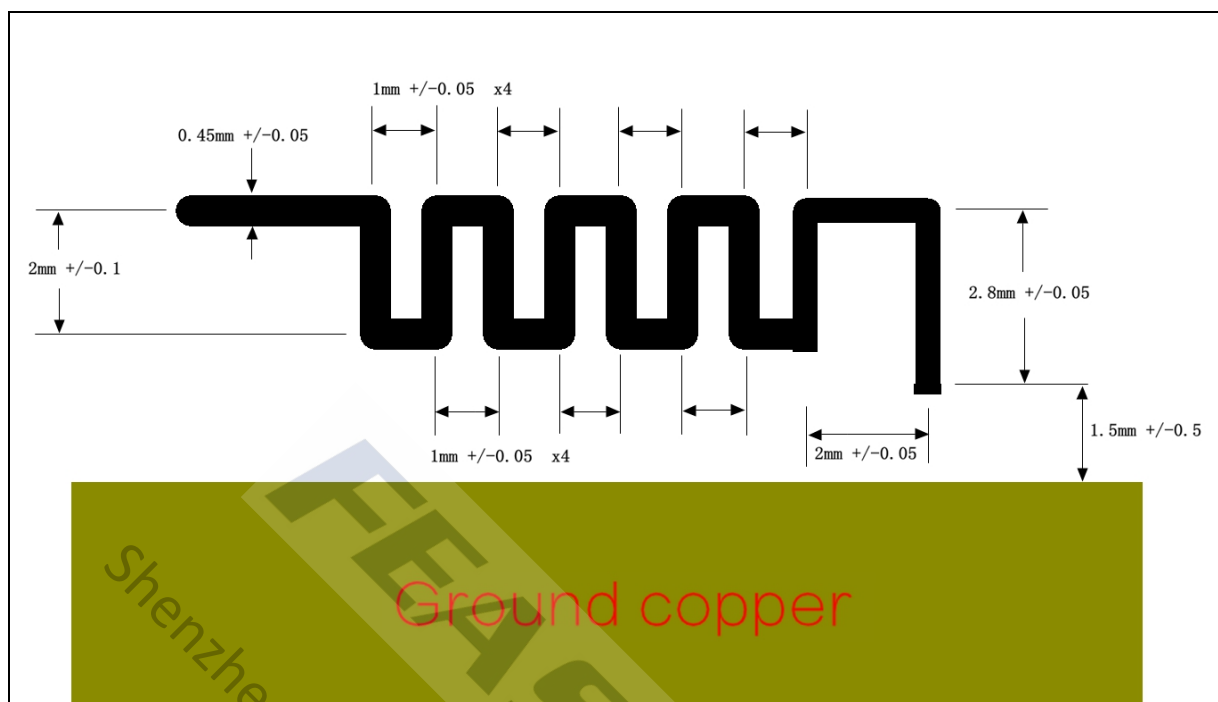

## 3, Specification


Product Number: 2.4GHZ coil antenna

Sample Photo:




| A. Electrical Characteristics            |                    |
|------------------------------------------|--------------------|
| Frequency                                | 2400 ~ 2500 MHz    |
| S.W.R.                                   | $\leq 2.0$         |
| Gain                                     | 2.0 dBi            |
| Efficiency                               | ~ 50%              |
| Polarization                             | Linear             |
| Impedance                                | 50 Ohm             |
| B. Material & Mechanical Characteristics |                    |
| Material of Radiator                     | Gold-plated copper |
| C. Environmental                         |                    |
| Operation Temperature                    | - 40°C ~ + 85°C    |
| Storage Temperature                      | - 40°C ~ + 105°C   |

## 4, Antenna On Test Board

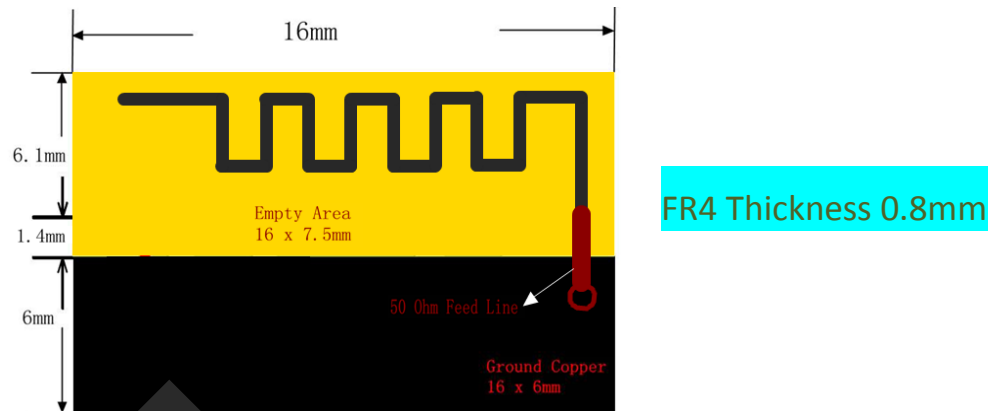







## 5, Return Loss

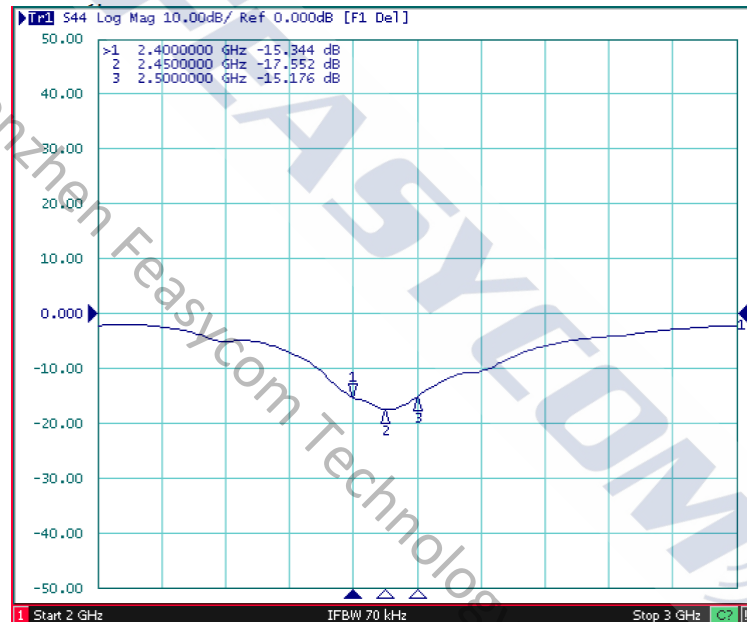

## 6, Radiation Pattern

Radiation Pattern and Gain were dependent on measurement board design. The specification of coil antenna was measured based on the PCB size and installation position as shown in the below figure Test Board.

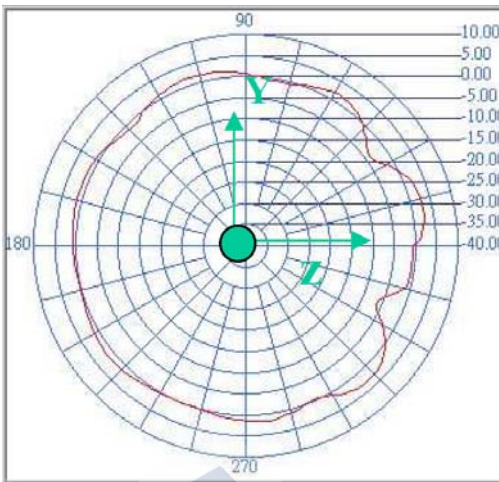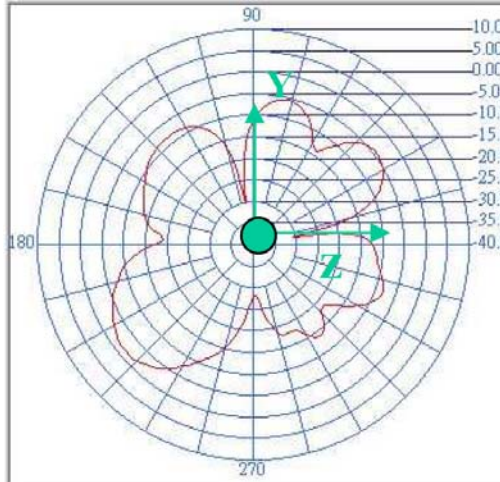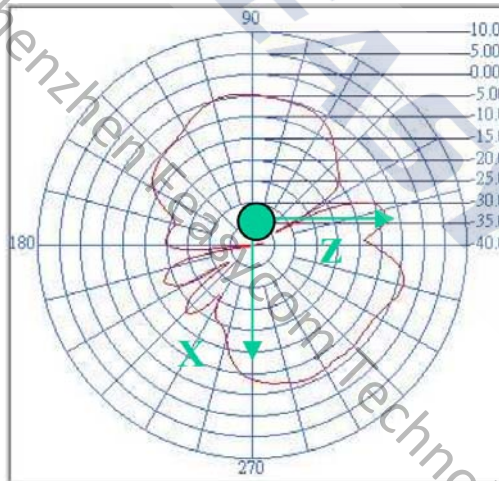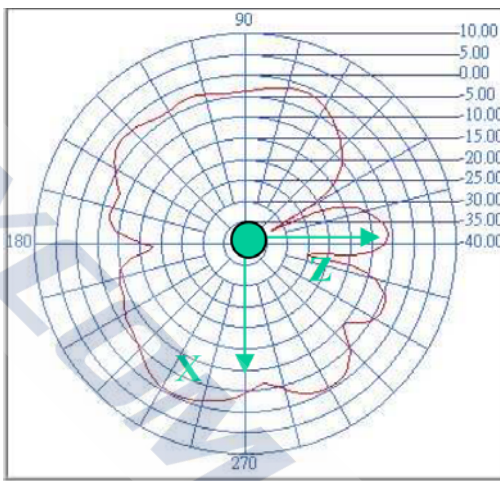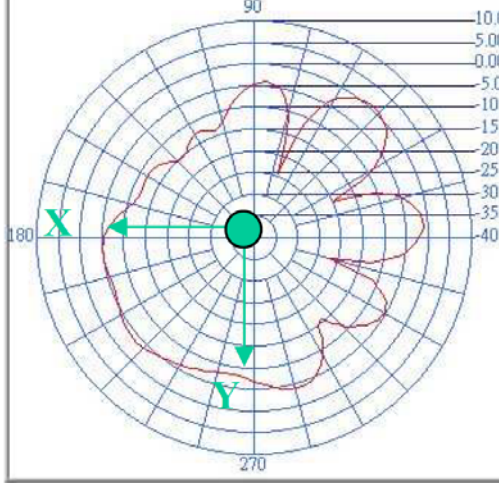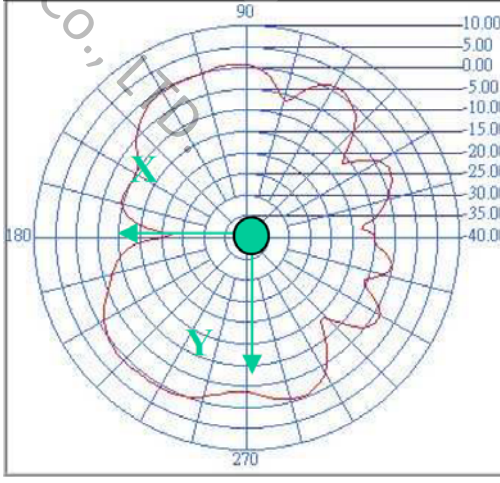

|                                                  | Vertical                                                                            | Horizontal                                                                           |
|--------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Y - Z Plane</b><br><br>Average Gain=1.19 dBi  |    |    |
|                                                  | Peak Gain = 2dBi<br>Average Gain = 0.75 dBi                                         | Peak Gain= -1.33 dBi<br>Average Gain=-8.7 dBi                                        |
| <b>X - Z Plane</b><br><br>Average Gain=-2.91dBi  |   |   |
|                                                  | Peak Gain= -3.71 dBi<br>Average Gain= -8.76dBi                                      | Peak Gain= -0.29 dBi<br>Average Gain= -4.19dBi                                       |
| <b>X - Y Plane</b><br><br>Average Gain=-0.95 dBi |  |  |
|                                                  | Peak Gain= 0.77 dBi<br>Average Gain= -5.86dBi                                       | Peak Gain= 1.35 dBi<br>Average Gain= -2.62 dBi                                       |