

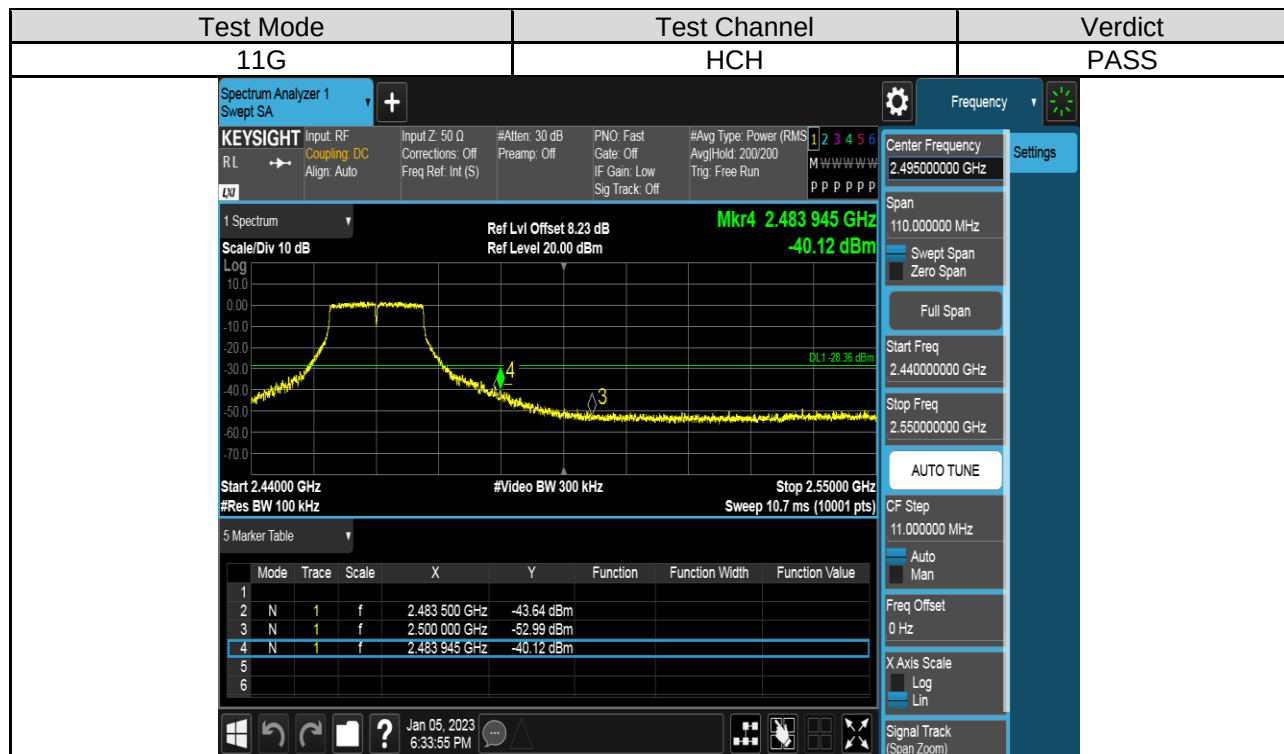
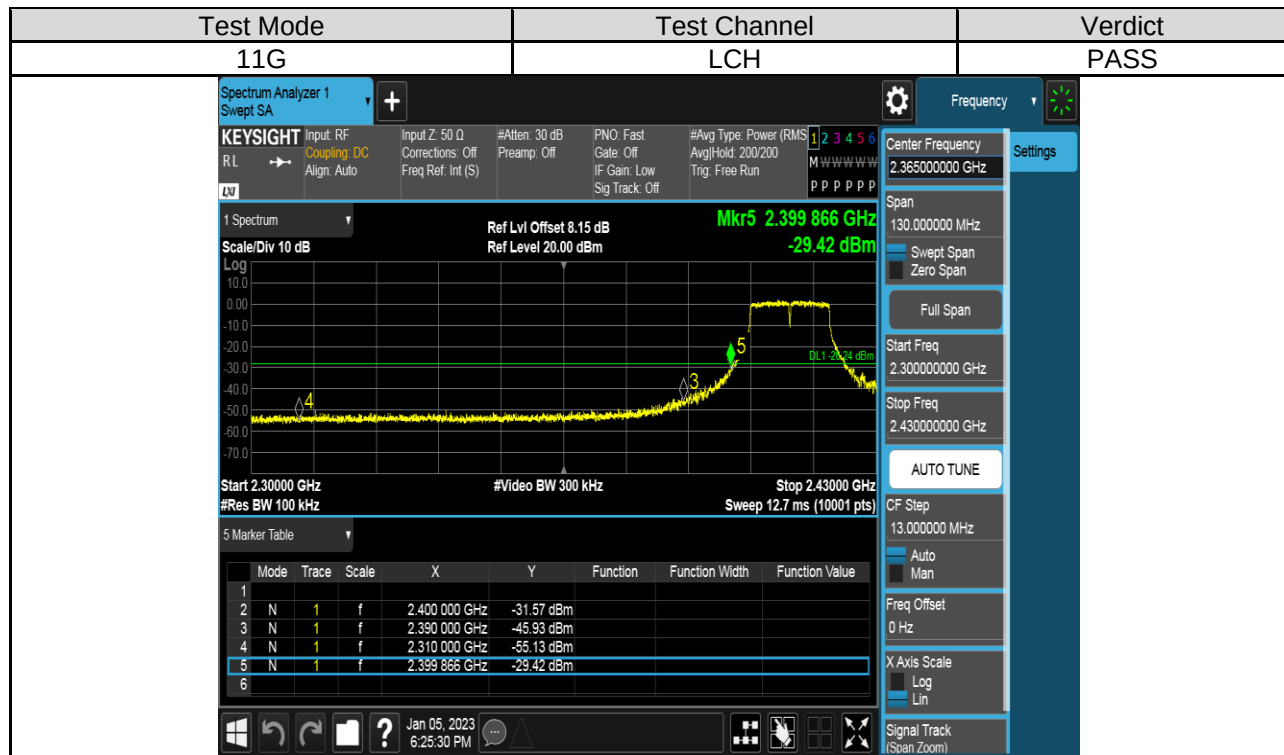


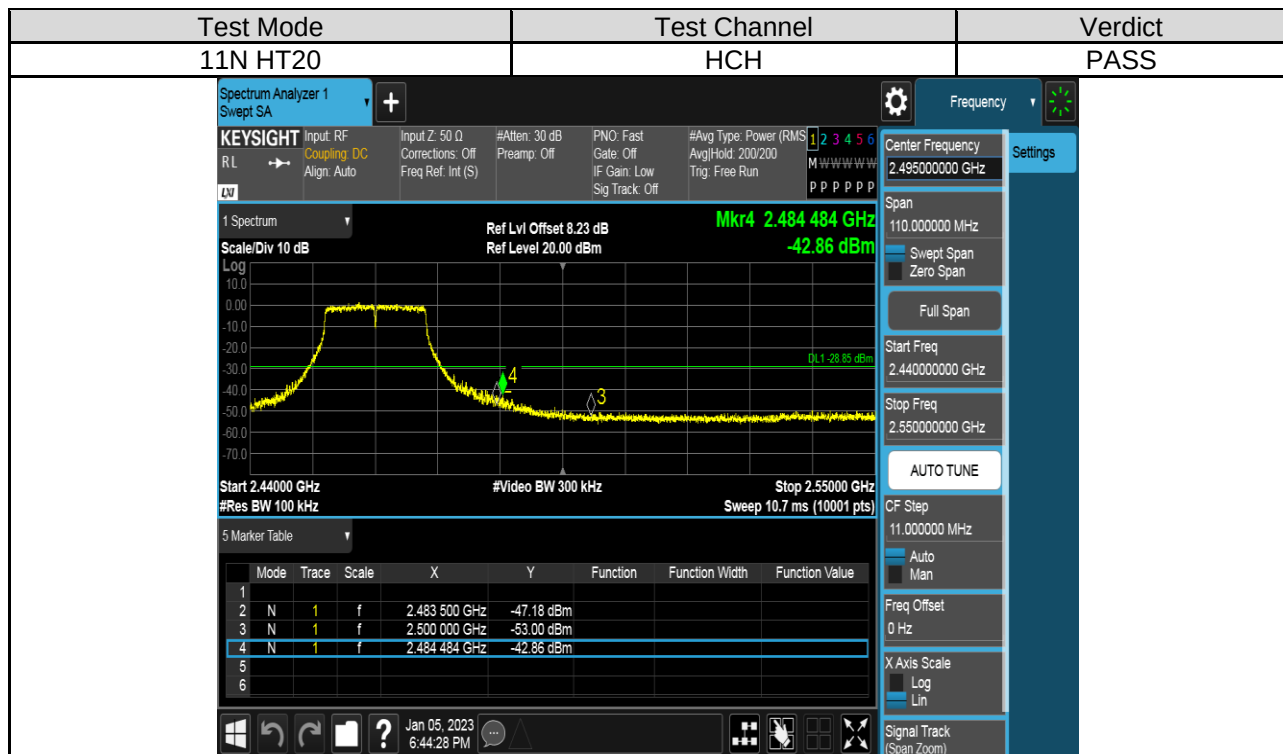

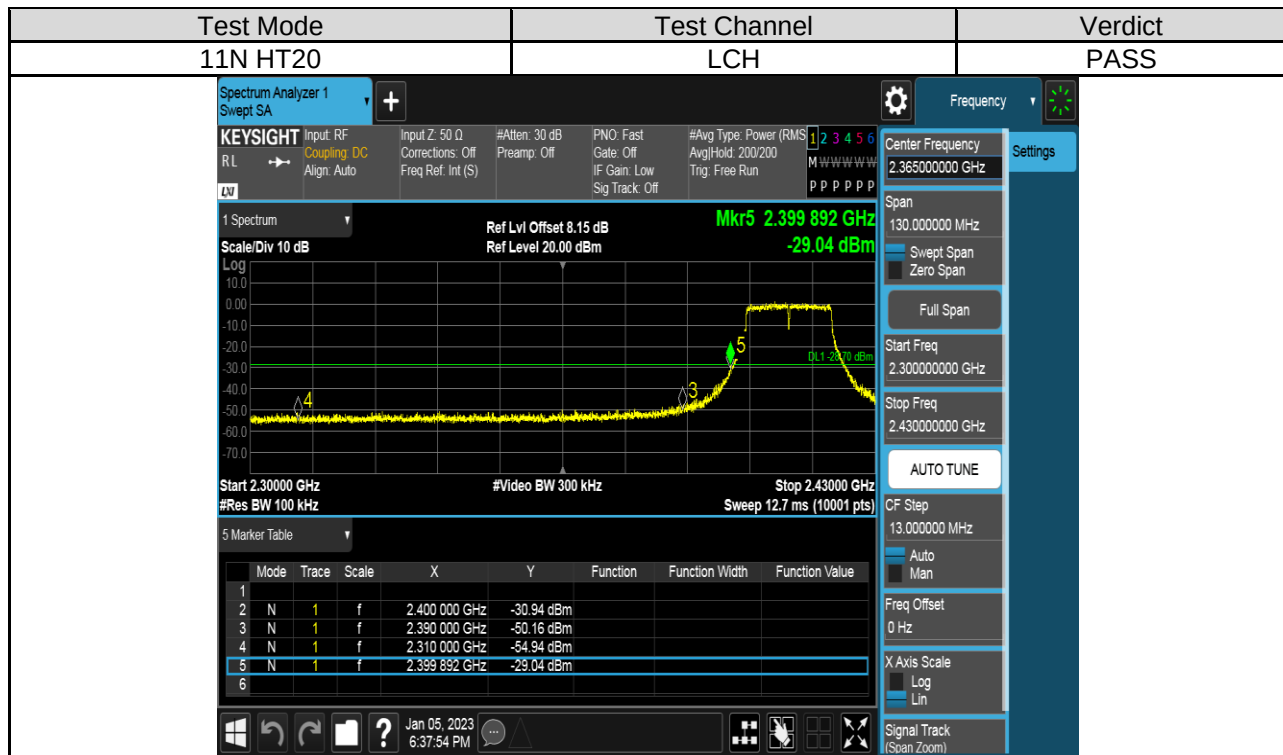

PART 3: CONDUCTED SPURIOUS EMISSION**TEST RESULTS TABLE**

Test Mode	Test Channel	Result	Verdict
11B	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
11G	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
11N HT20	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS

TEST GRAPHS

Test Mode	Channel	Verdict
11B	LCH	PASS

LCH SPURIOUS EMISSION 30MHz~1GHz




LCH SPURIOUS EMISSION 1GHz~26.5GHz



Test Mode	Channel	Verdict
11B	MCH	PASS



MCH SPURIOUS EMISSION 30MHz~1GHz

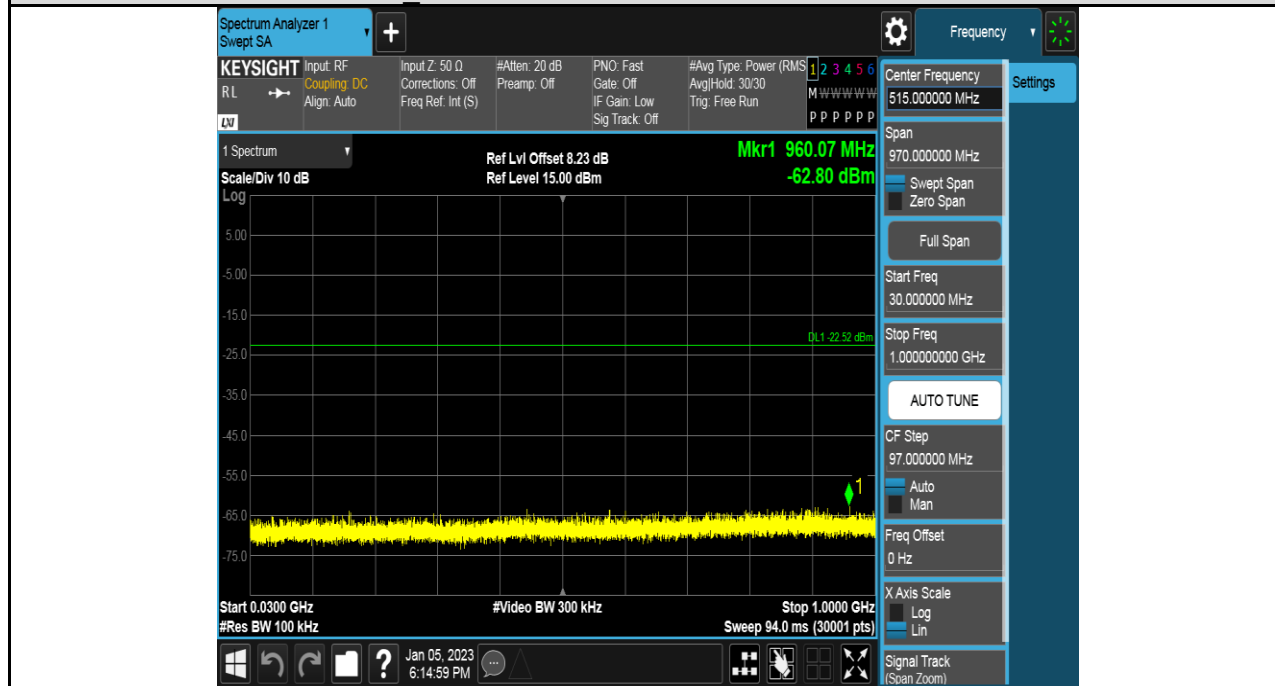



MCH SPURIOUS EMISSION 1GHz~26.5GHz





Test Mode	Channel	Verdict
11B	HCH	PASS

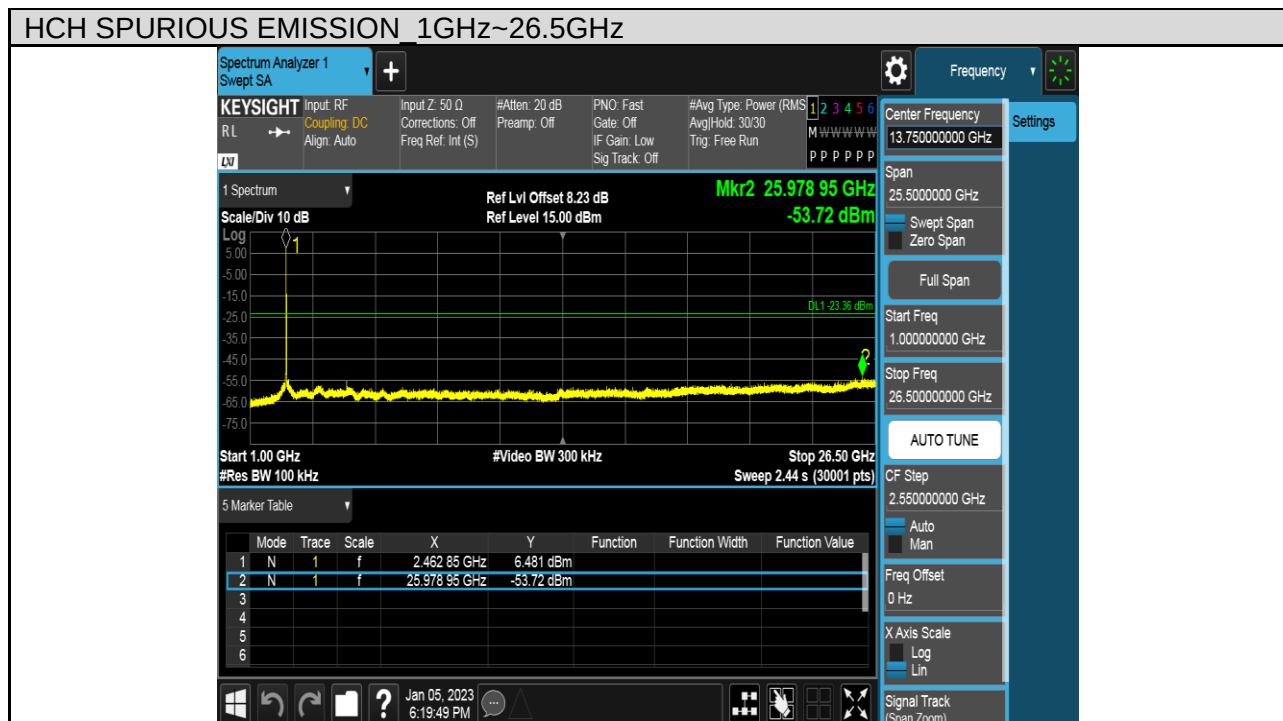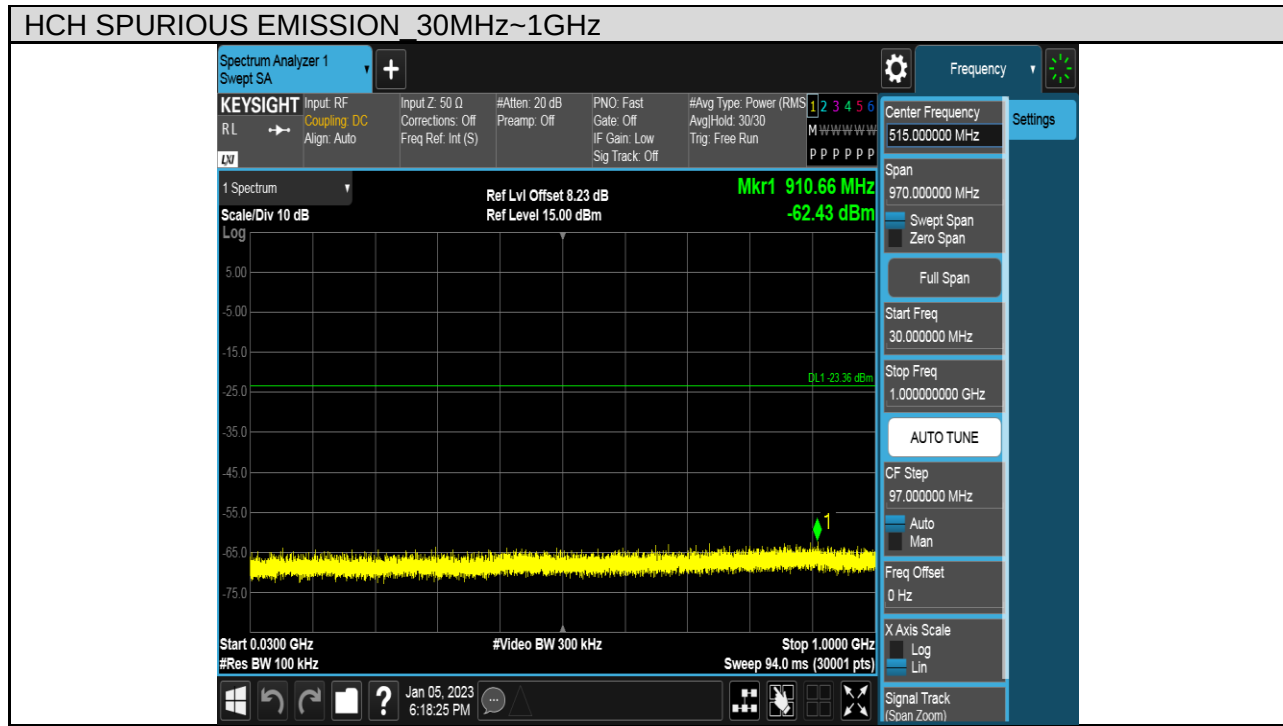



Test Mode	Channel	Verdict
11G	LCH	PASS

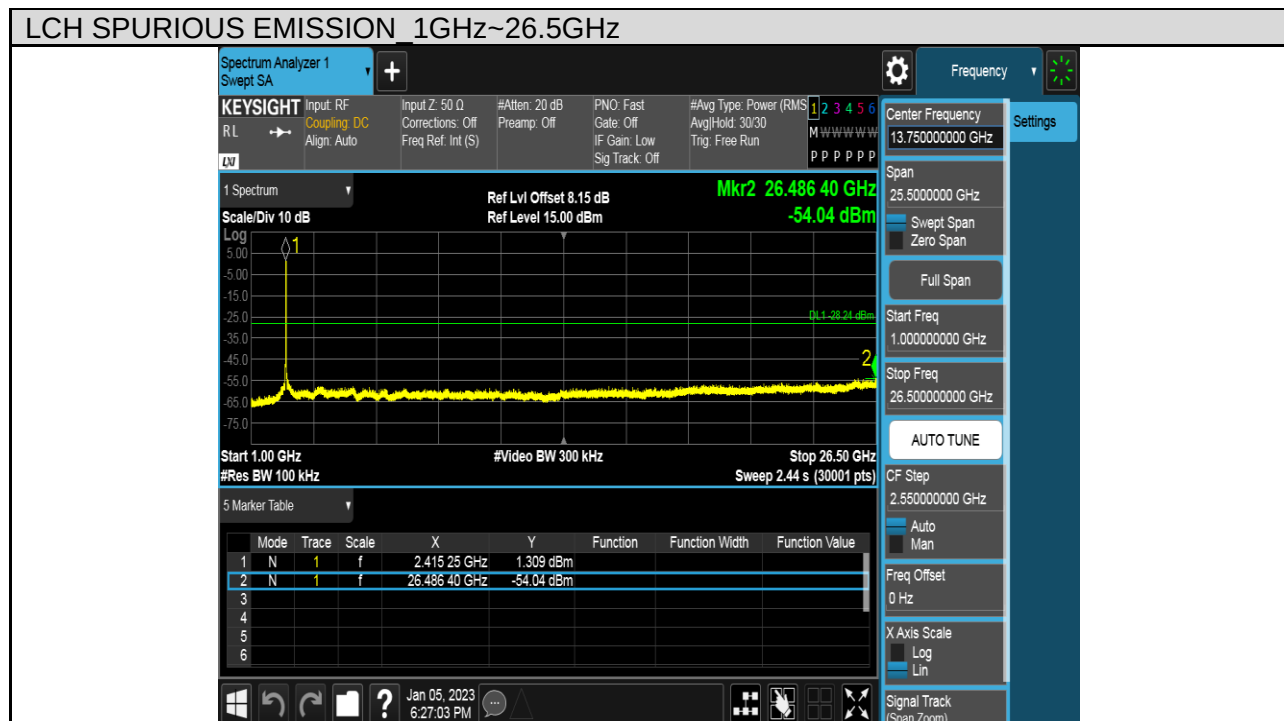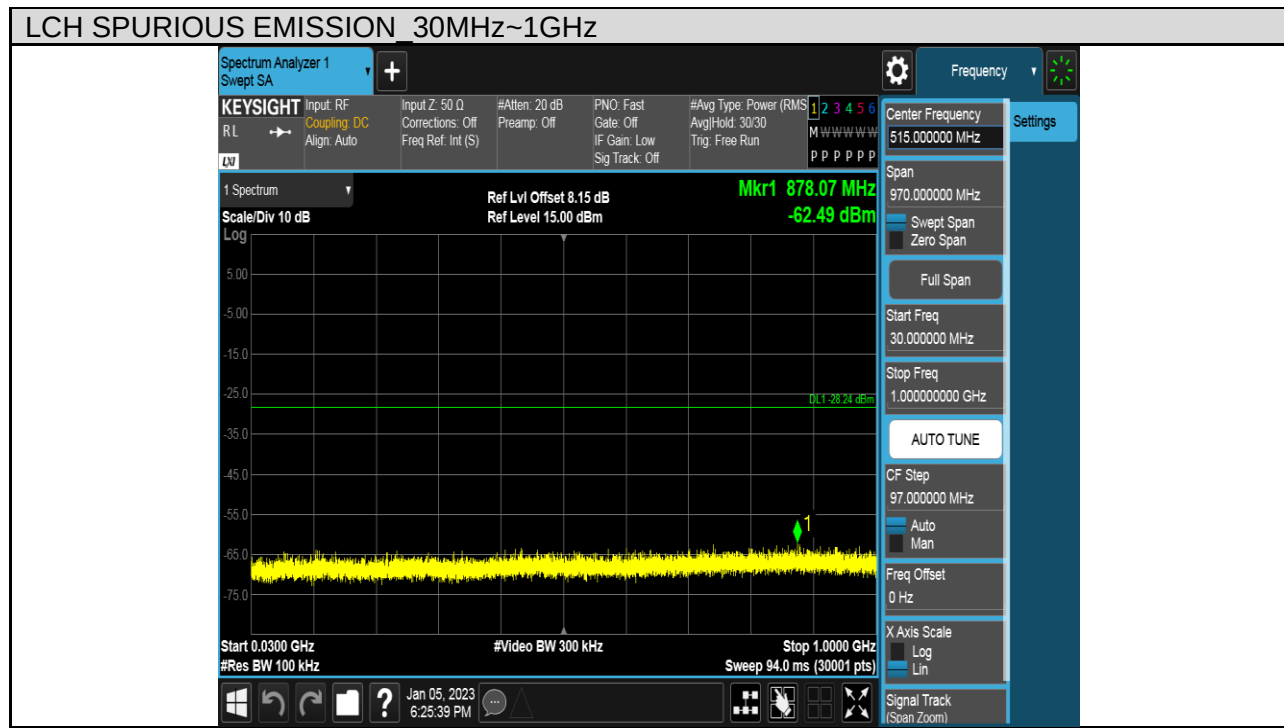



Test Mode	Channel	Verdict
11G	MCH	PASS

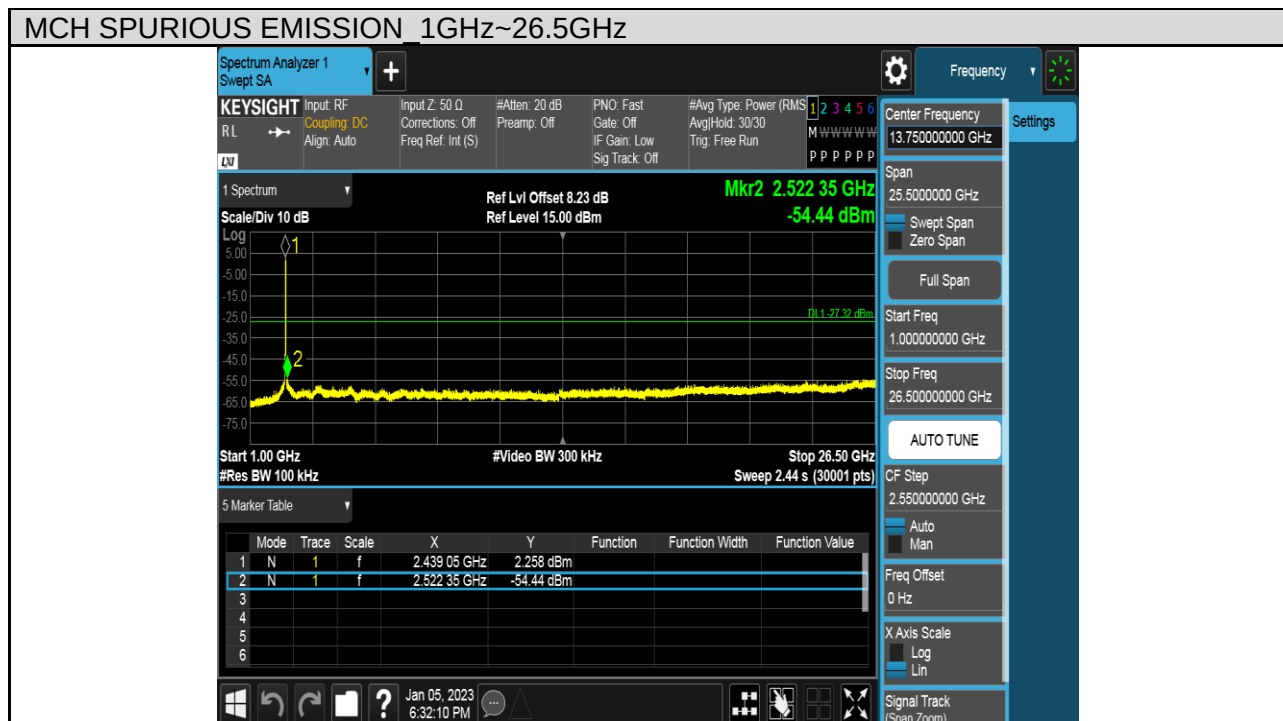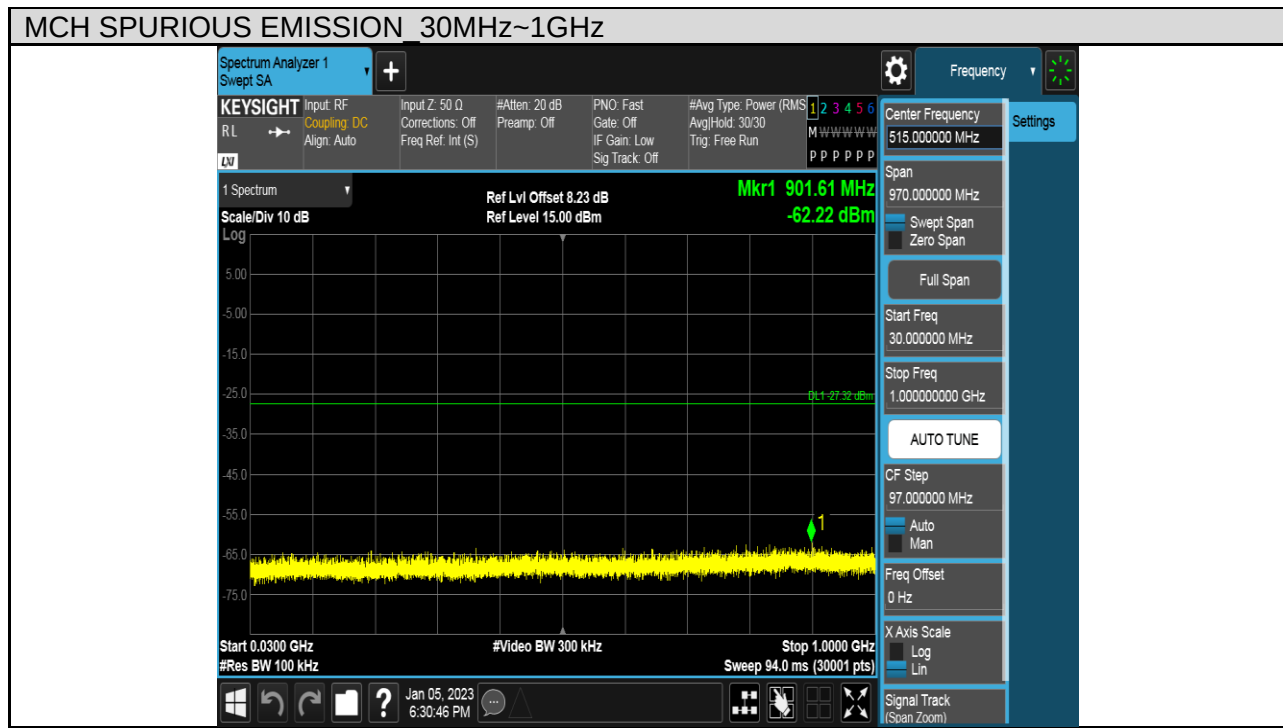



Test Mode	Channel	Verdict
11G	HCH	PASS

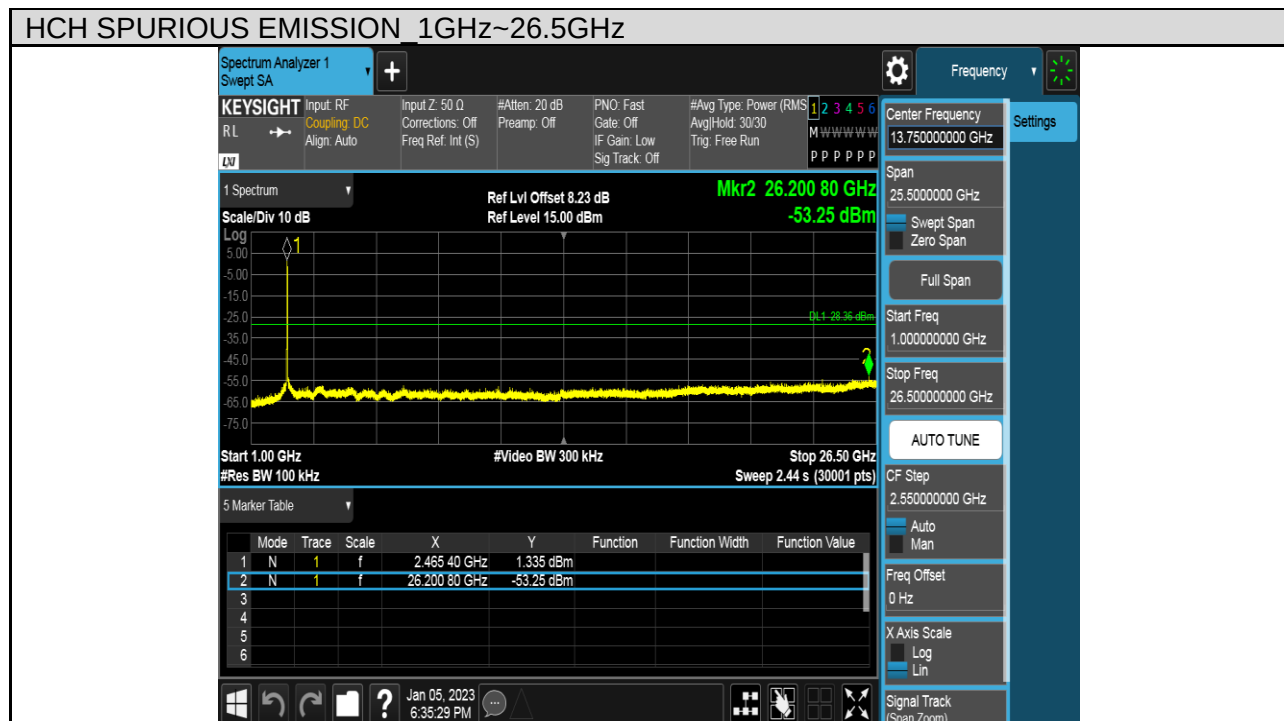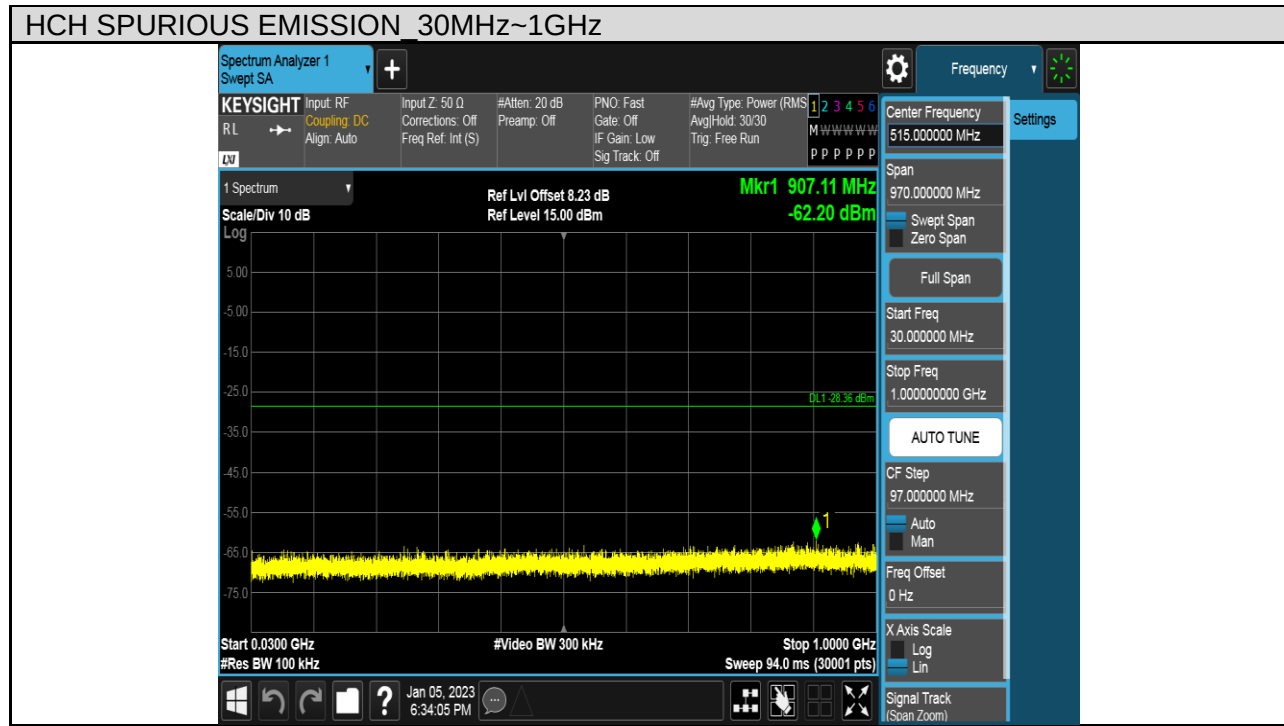

Test Mode	Channel	Verdict
11N HT20	LCH	PASS

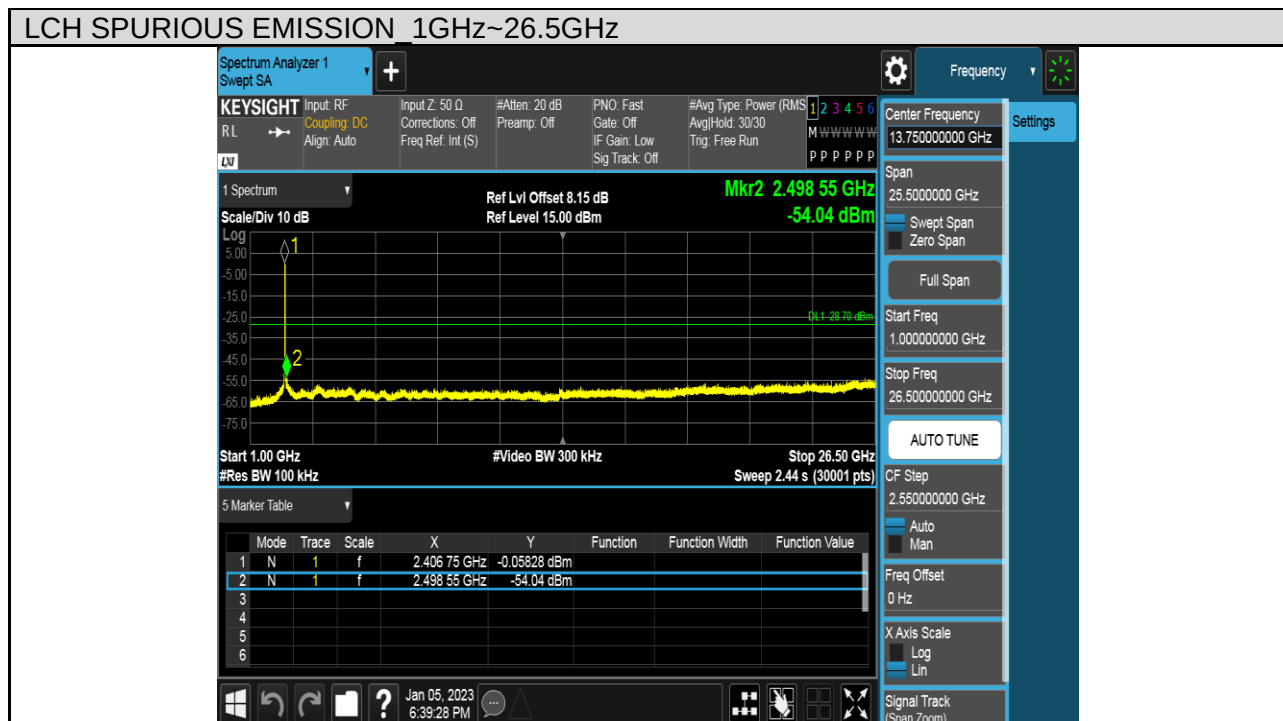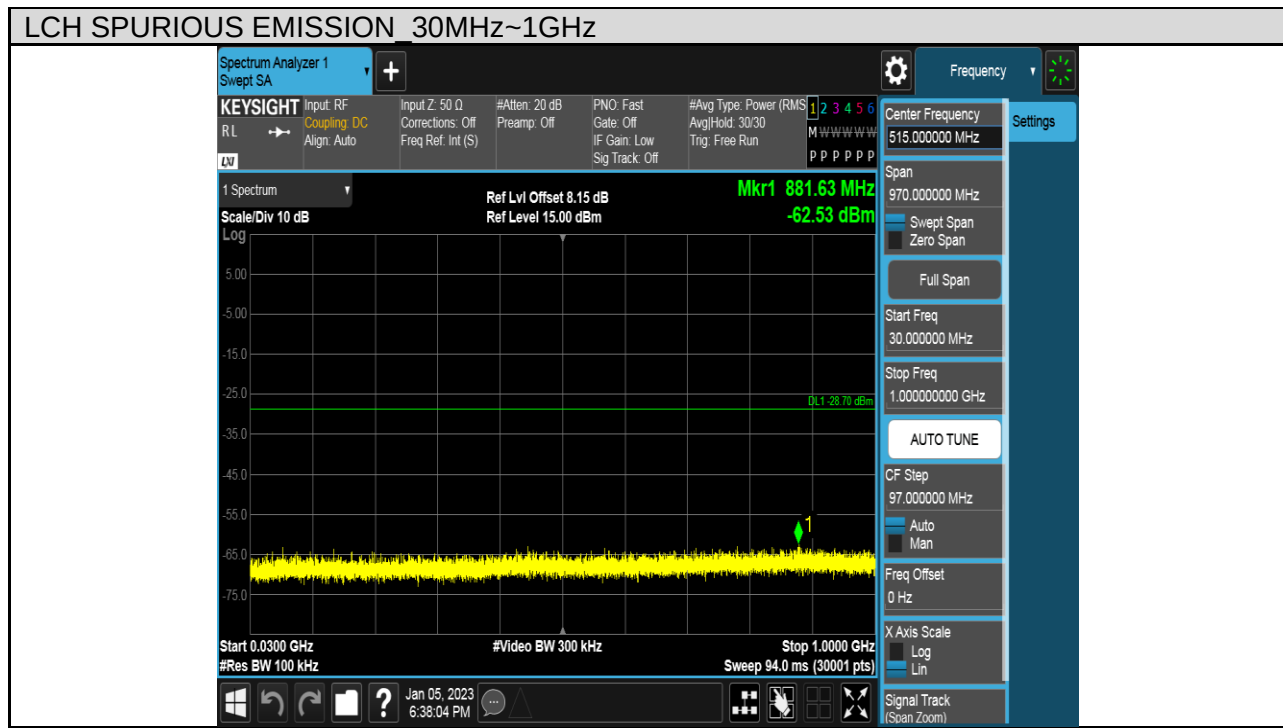


Test Mode	Channel	Verdict
11N HT20	MCH	PASS

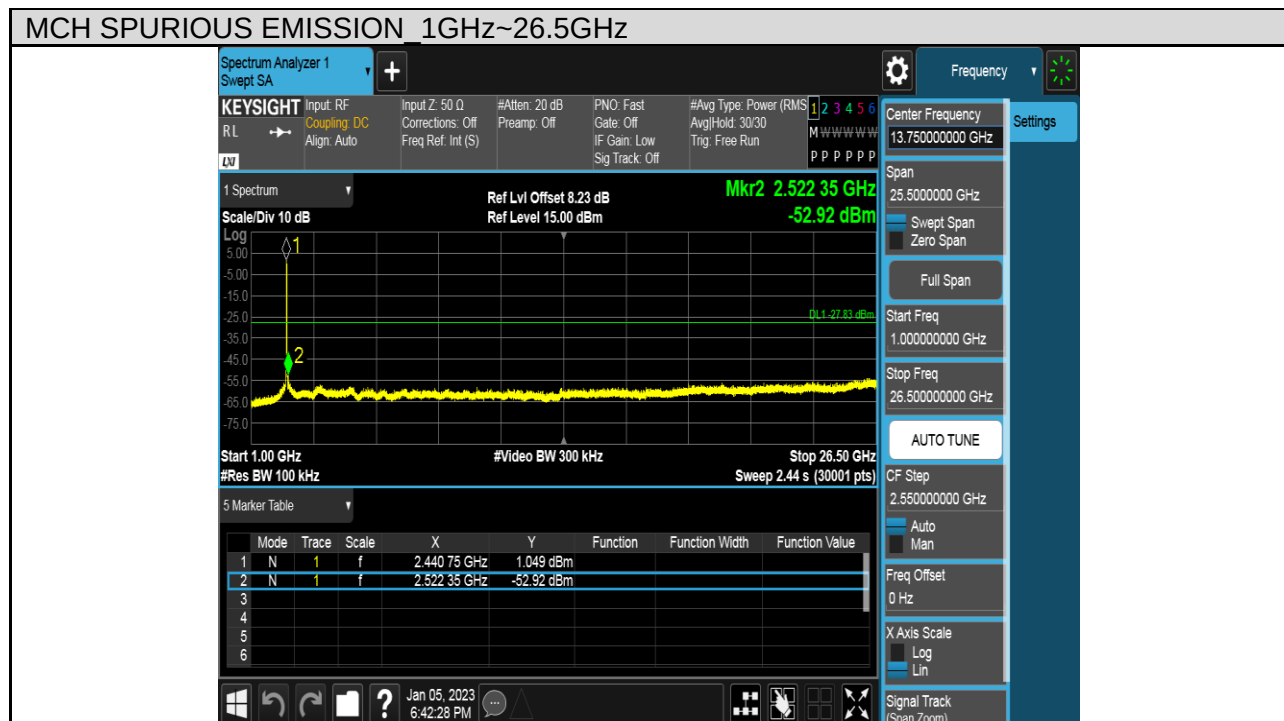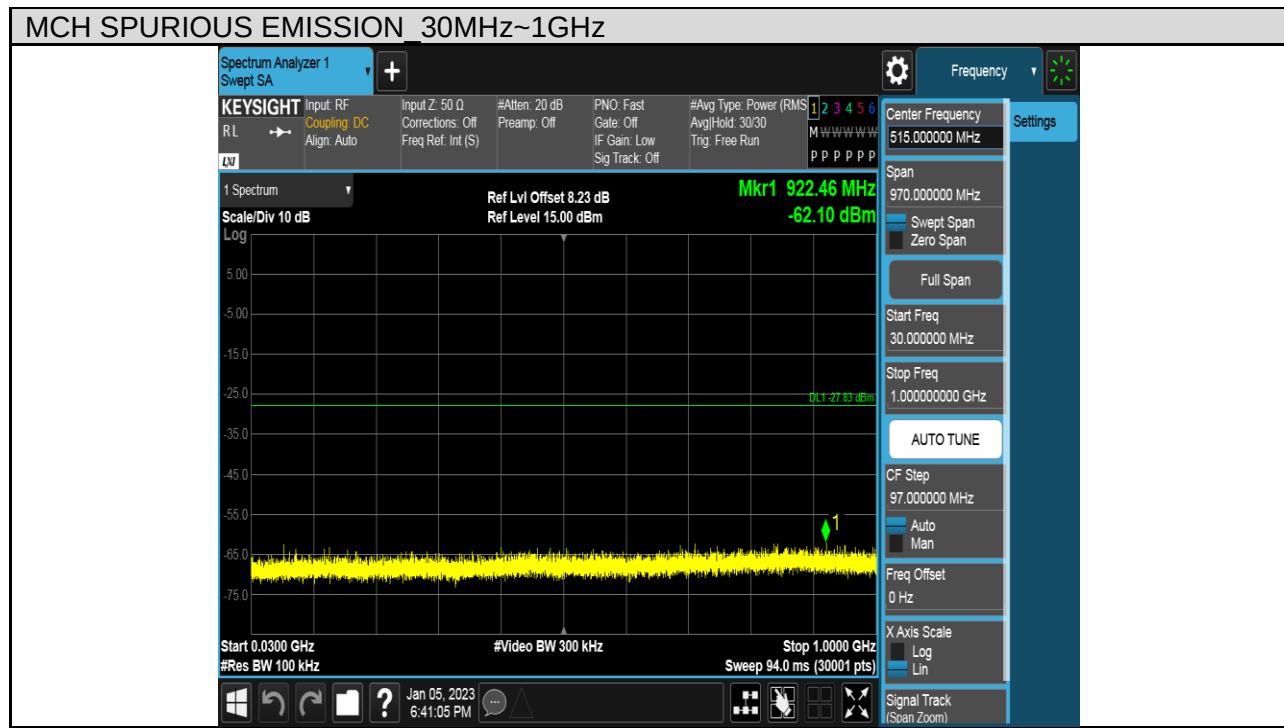

Test Mode	Channel	Verdict
11N HT20	HCH	PASS

HCH SPURIOUS EMISSION 30MHz~1GHz

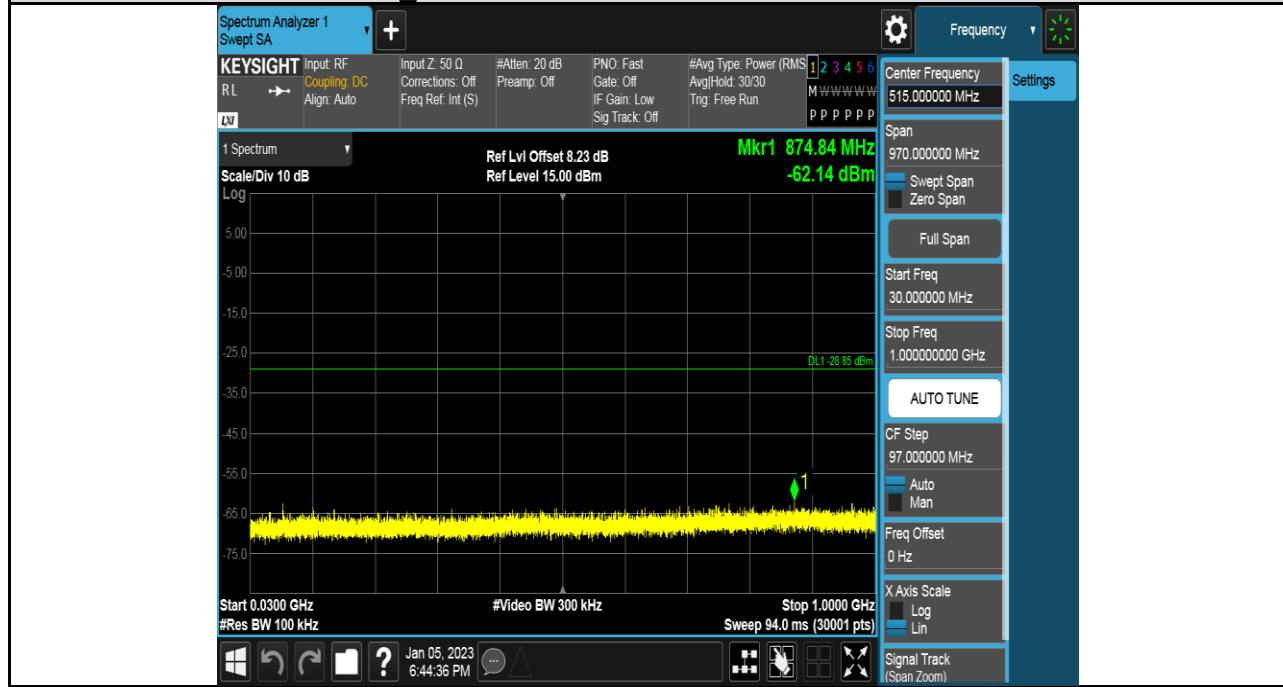

HCH SPURIOUS EMISSION 1GHz~26.5GHz



8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209, ISED RSS-247 Clause 5.5, ISED RSS-GEN Clause 8.9&6.13 (Transmitter)

Radiation Disturbance Test Limit for ISED (9kHz-1GHz)

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz	
Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B) (9kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

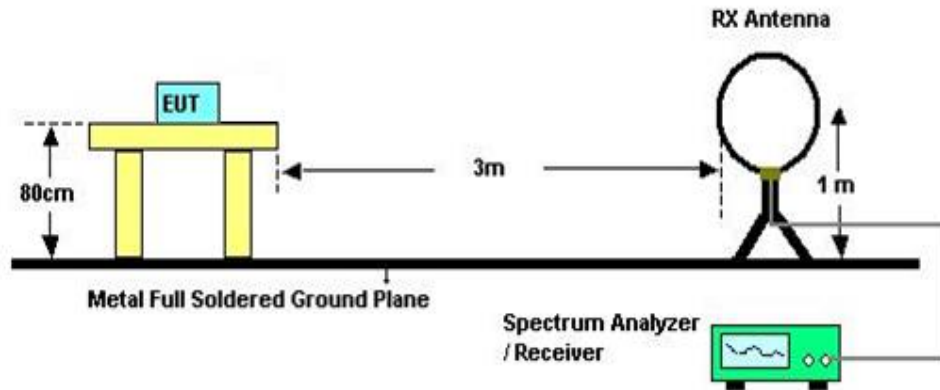


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

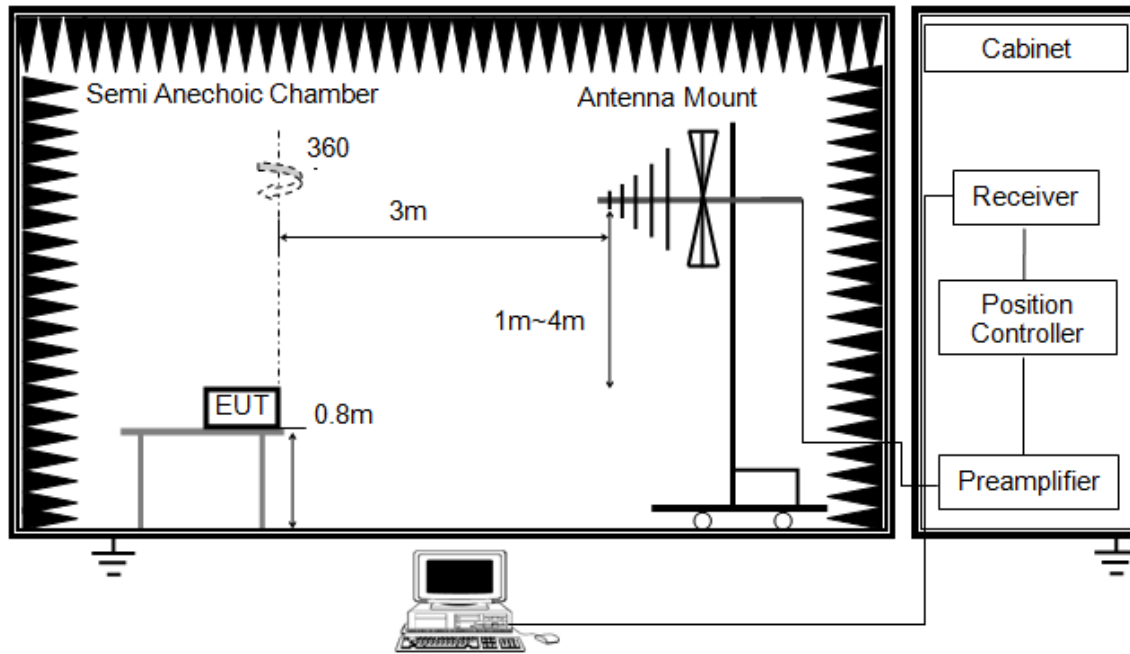


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Above 1G

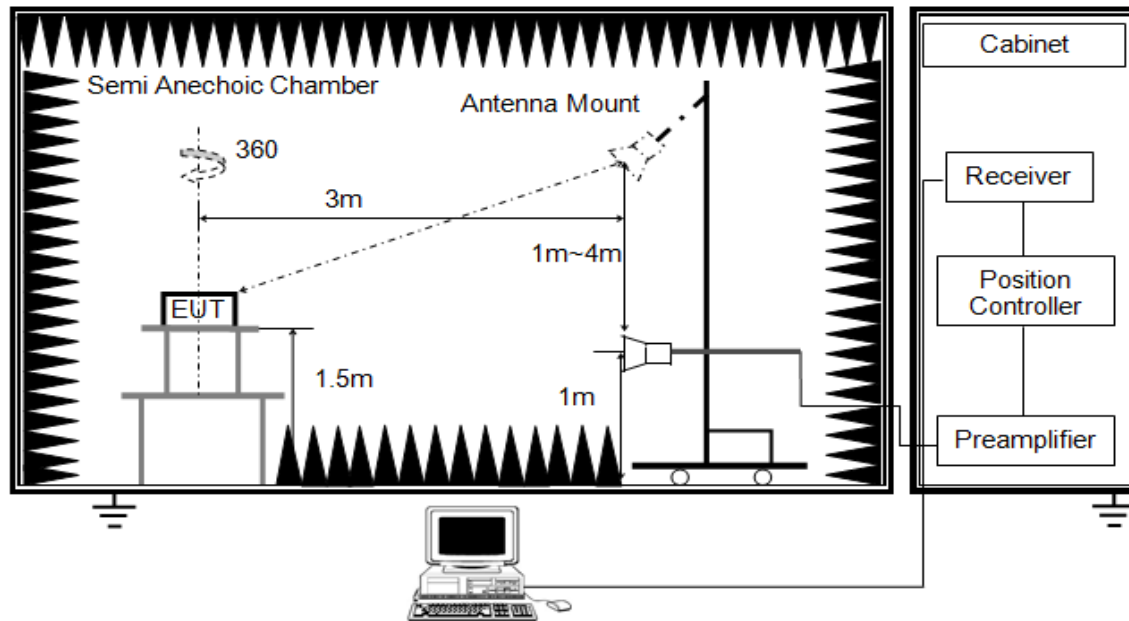


The setting of the spectrum analyser

RBW	1M
VBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements; and 1 MHz resolution bandwidth with video bandwidth $\geq 1/T$ but not less than the setting list in section 7.1 when use peak detector, max hold to be run for at least $[50 \cdot (1/\text{Duty Cycle})]$ traces for average measurements. For the Duty Cycle need to refer the results in section 7.1.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

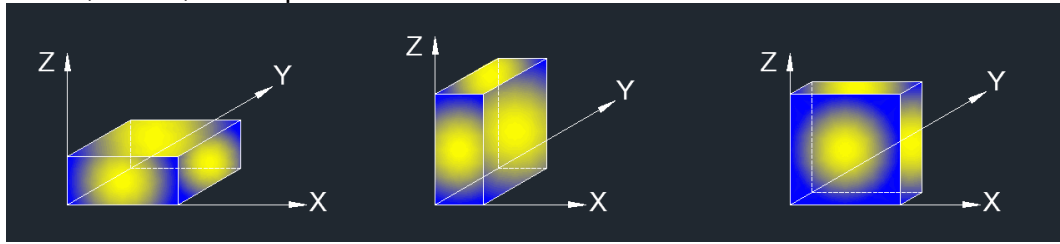

Note: For all radiated test, EUT in one orthogonal axis (X axis) emissions had been tested and recorded in the report.

8.2. TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V


8.3. RESTRICTED BANDEDGE

TEST RESULT TABLE

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

TEST GRAPHS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

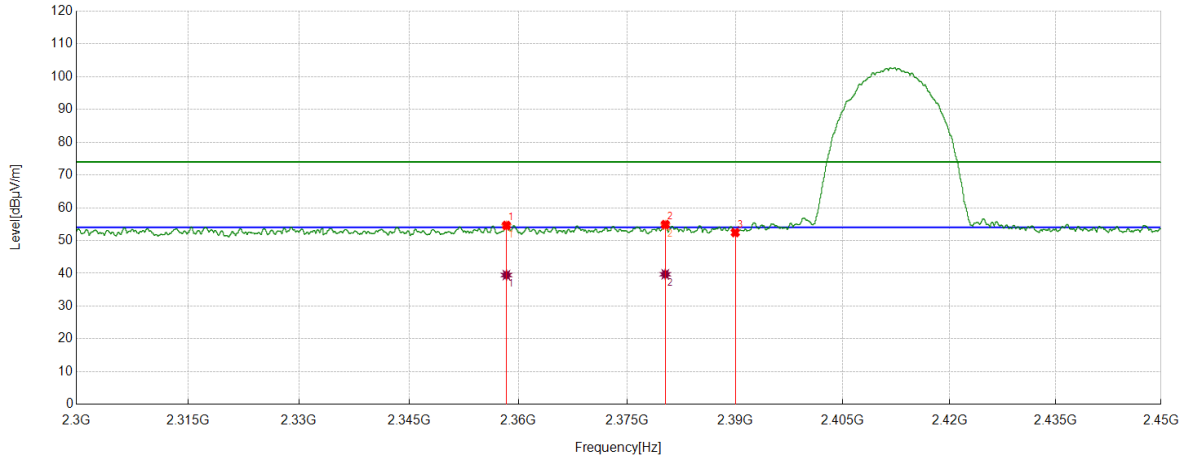

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2358.3573	44.72	9.90	54.62	74.00	-19.38	Horizontal
2	2380.2788	44.59	10.30	54.89	74.00	-19.11	Horizontal
3	2390.0000	42.08	10.35	52.43	74.00	-21.57	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2358.3573	29.58	9.90	39.48	54.00	-14.52	Horizontal
2	2380.2788	29.42	10.30	39.72	54.00	-14.28	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

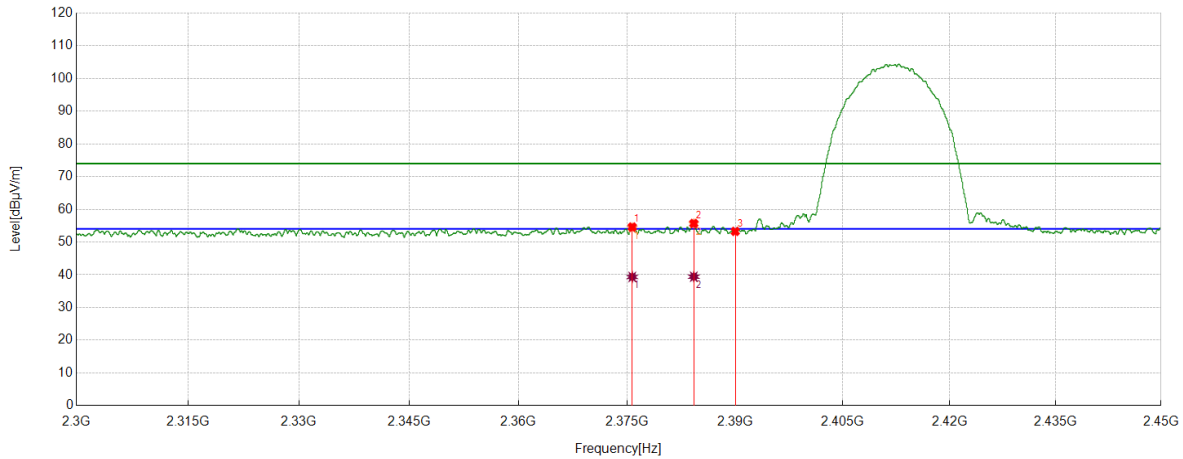

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2375.7032	44.36	10.22	54.58	74.00	-19.42	Vertical
2	2384.2355	45.36	10.32	55.68	74.00	-18.32	Vertical
3	2390.0000	42.91	10.35	53.26	74.00	-20.74	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2375.7032	29.12	10.22	39.34	54.00	-14.66	Vertical
2	2384.2355	29.09	10.32	39.41	54.00	-14.59	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

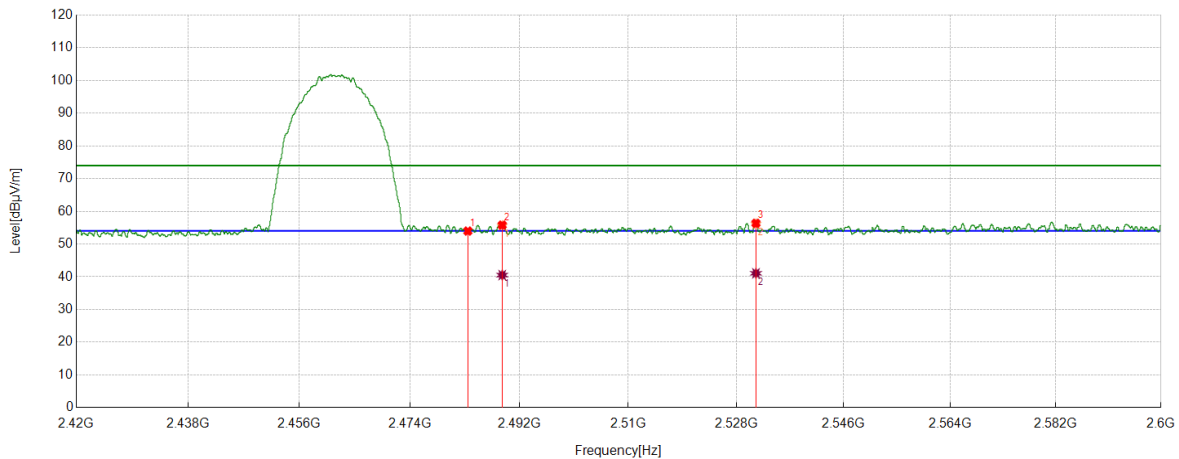

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	43.33	10.64	53.97	74.00	-20.03	Horizontal
2	2489.1511	45.02	10.77	55.79	74.00	-18.21	Horizontal
3	2531.2764	45.02	11.33	56.35	74.00	-17.65	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2489.1511	29.75	10.77	40.52	54.00	-13.48	Horizontal
2	2531.2764	29.73	11.33	41.06	54.00	-12.94	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

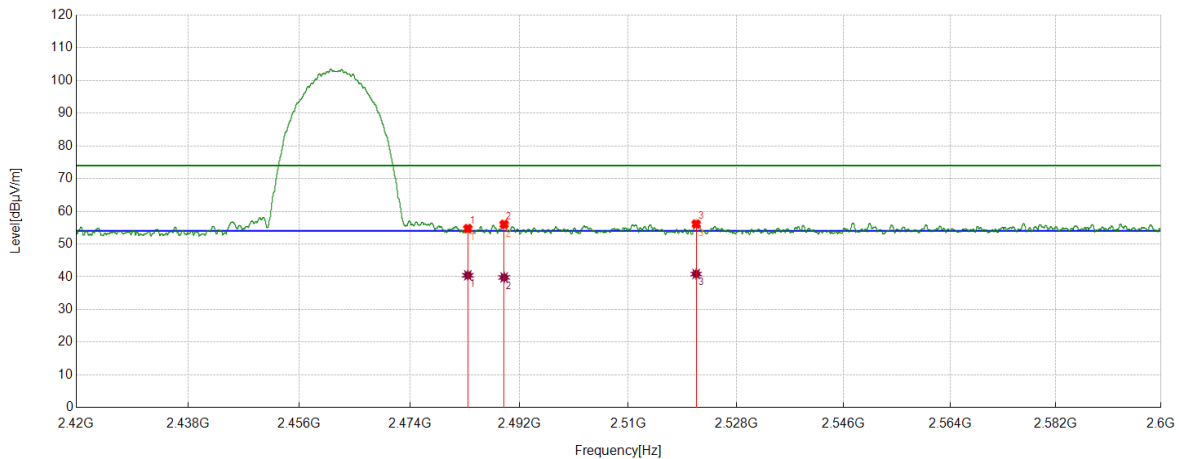

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	44.10	10.64	54.74	74.00	-19.26	Vertical
2	2489.4662	45.26	10.78	56.04	74.00	-17.96	Vertical
3	2521.2852	45.09	11.04	56.13	74.00	-17.87	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	29.81	10.64	40.45	54.00	-13.55	Vertical
2	2489.4662	29.01	10.78	39.79	54.00	-14.21	Vertical
3	2521.2852	29.81	11.04	40.85	54.00	-13.15	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

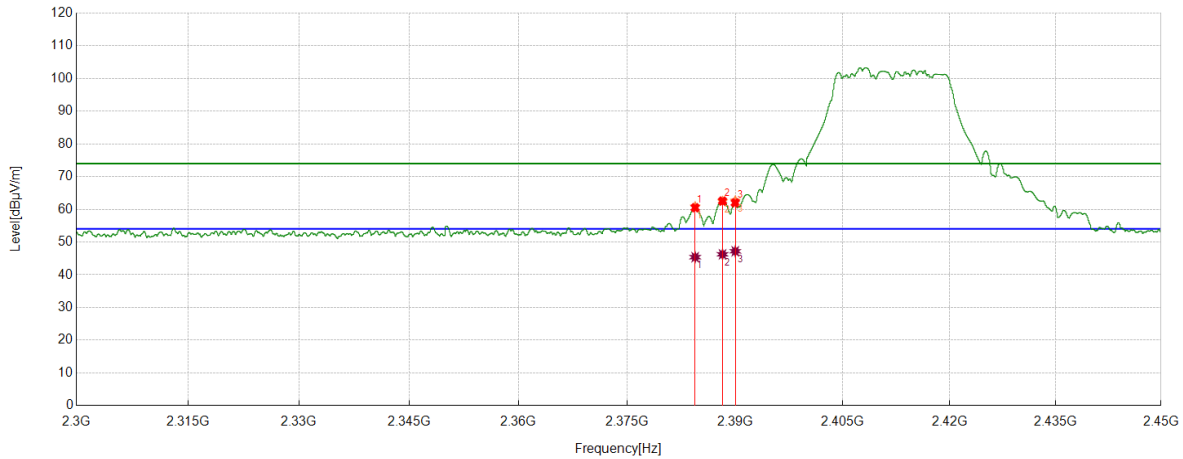

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2384.4231	50.16	10.32	60.48	74.00	-13.52	Horizontal
2	2388.2298	52.20	10.34	62.54	74.00	-11.46	Horizontal
3	2390.0000	51.63	10.35	61.98	74.00	-12.02	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2384.4231	35.06	10.32	45.38	54.00	-8.62	Horizontal
2	2388.2298	35.91	10.34	46.25	54.00	-7.75	Horizontal
3	2390	36.84	10.35	47.19	54.00	-6.81	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

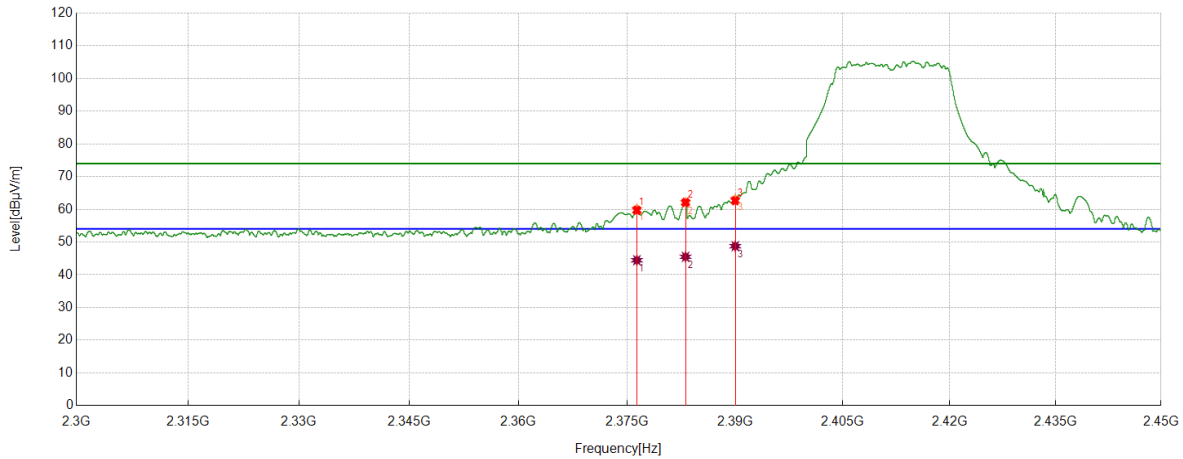

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2376.3408	49.48	10.24	59.72	74.00	-14.28	Vertical
2	2383.0916	51.80	10.31	62.11	74.00	-11.89	Vertical
3	2390.0000	52.28	10.35	62.63	74.00	-11.37	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2376.3408	34.20	10.24	44.44	54.00	-9.56	Vertical
2	2383.0916	35.18	10.31	45.49	54.00	-8.51	Vertical
3	2390	38.39	10.35	48.74	54.00	-5.26	Vertical


Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.

2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).

3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.

4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

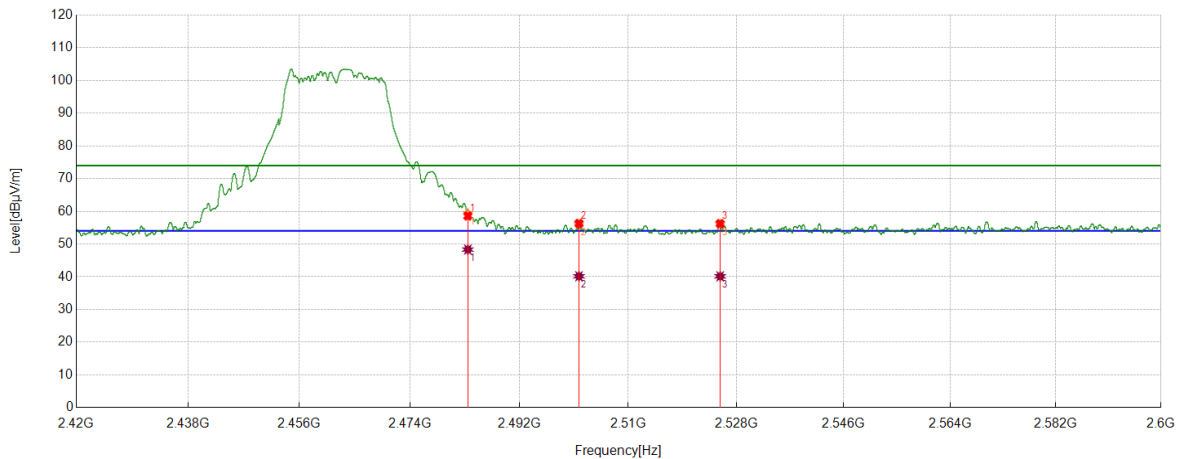

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	47.92	10.64	58.56	74.00	-15.44	Horizontal
2	2501.8202	45.50	10.79	56.29	74.00	-17.71	Horizontal
3	2525.2907	45.07	11.18	56.25	74.00	-17.75	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5	37.68	10.64	48.32	54.00	-5.68	Horizontal
2	2501.8202	29.36	10.79	40.15	54.00	-13.85	Horizontal
3	2525.2907	28.96	11.18	40.14	54.00	-13.86	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

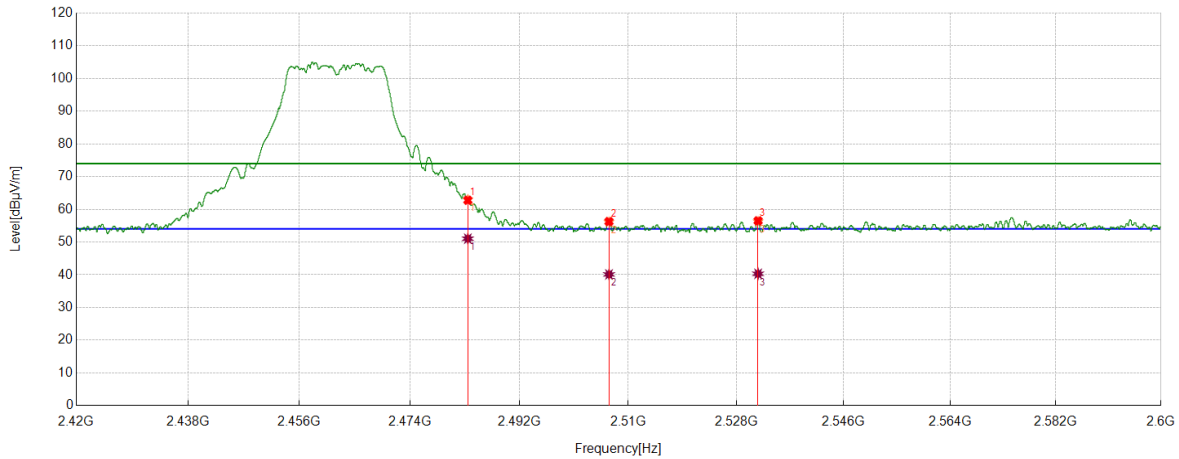

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	52.14	10.64	62.78	74.00	-11.22	Vertical
2	2506.7933	45.29	10.98	56.27	74.00	-17.73	Vertical
3	2531.6365	45.16	11.33	56.49	74.00	-17.51	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5	40.39	10.64	51.03	54.00	-2.97	Vertical
2	2506.7933	29.13	10.98	40.11	54.00	-13.89	Vertical
3	2531.6365	28.97	11.33	40.30	54.00	-13.70	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

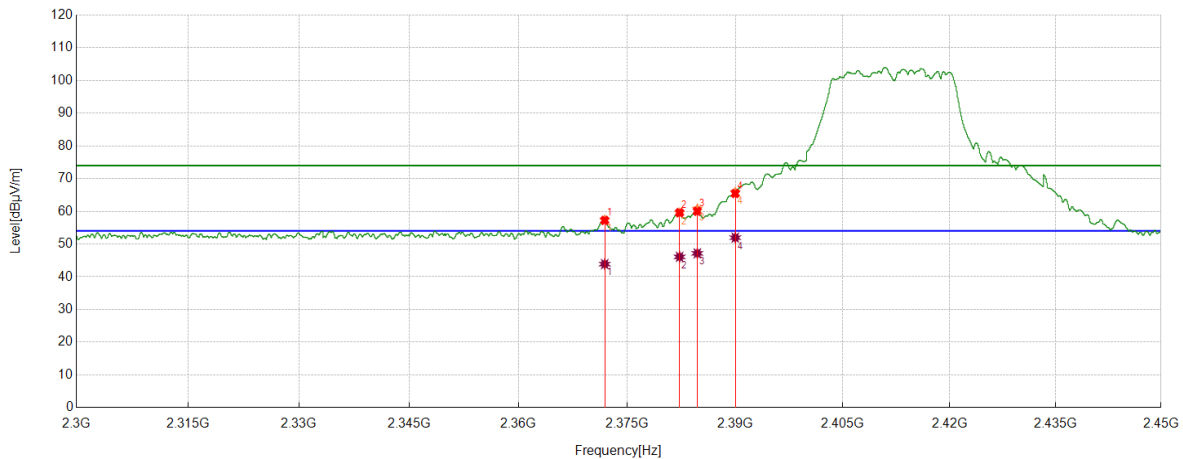

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2371.8965	47.08	10.16	57.24	74.00	-16.76	Horizontal
2	2382.2665	49.28	10.32	59.60	74.00	-14.40	Horizontal
3	2384.7231	49.69	10.32	60.01	74.00	-13.99	Horizontal
4	2390.0000	55.09	10.35	65.44	74.00	-8.56	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2371.8965	33.72	10.16	43.88	54.00	-10.12	Horizontal
2	2382.2665	35.77	10.32	46.09	54.00	-7.91	Horizontal
3	2384.7231	36.84	10.32	47.16	54.00	-6.84	Horizontal
4	2390	41.60	10.35	51.95	54.00	-2.05	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

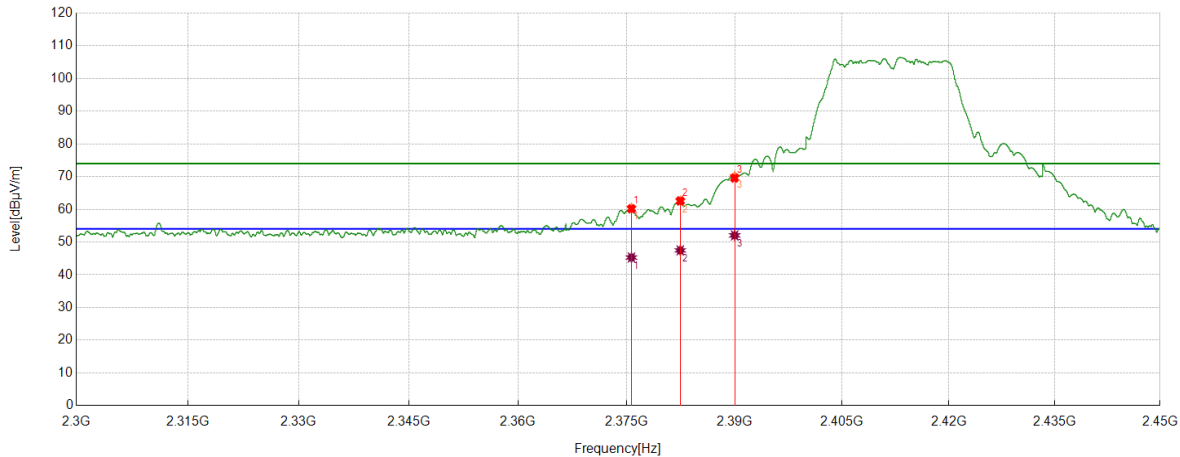

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2375.6657	49.94	10.22	60.16	74.00	-13.84	Vertical
2	2382.4353	52.26	10.32	62.58	74.00	-11.42	Vertical
3	2390.0000	59.21	10.35	69.56	74.00	-4.44	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2375.6657	35.06	10.22	45.28	54.00	-8.72	Vertical
2	2382.4353	37.13	10.32	47.45	54.00	-6.55	Vertical
3	2390	41.68	10.35	52.03	54.00	-1.97	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

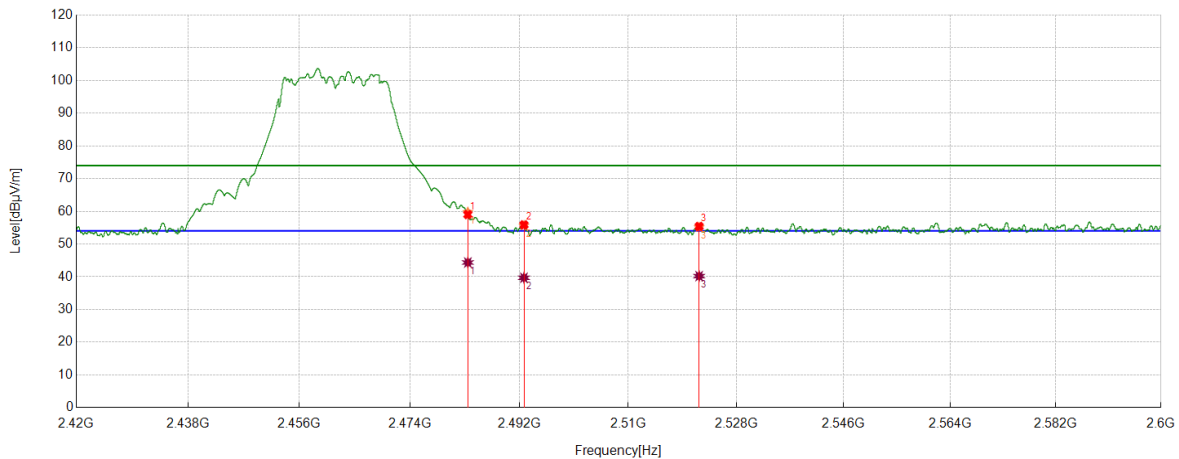

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	48.36	10.64	59.00	74.00	-15.00	Horizontal
2	2492.7291	45.09	10.78	55.87	74.00	-18.13	Horizontal
3	2521.7802	44.33	11.06	55.39	74.00	-18.61	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5	33.72	10.64	44.36	54.00	-9.64	Horizontal
2	2492.7291	28.91	10.78	39.69	54.00	-14.31	Horizontal
3	2521.7802	29.14	11.06	40.20	54.00	-13.80	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

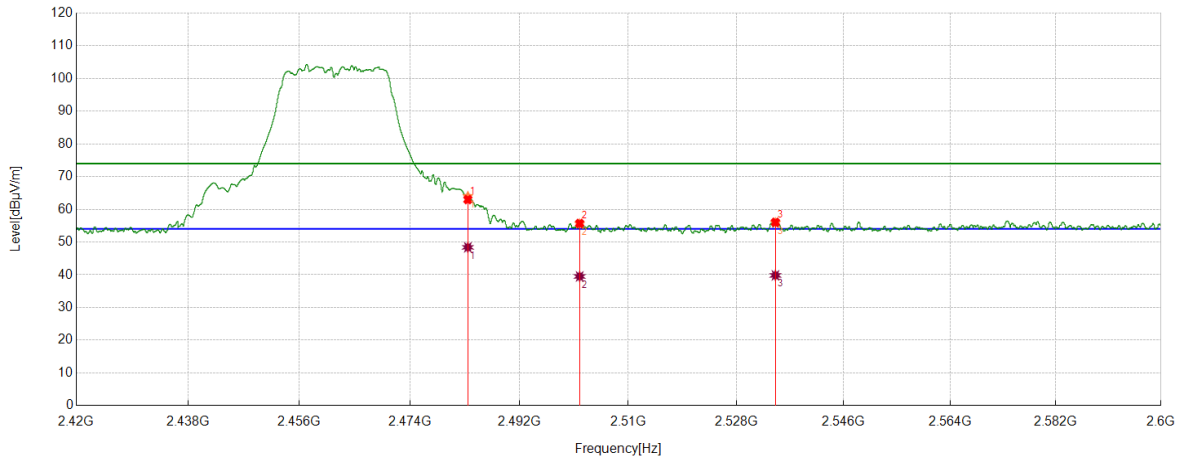

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5000	52.33	10.64	62.97	74.00	-11.03	Vertical
2	2501.9327	44.89	10.80	55.69	74.00	-18.31	Vertical
3	2534.5393	44.72	11.32	56.04	74.00	-17.96	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2483.5	37.75	10.64	48.39	54.00	-5.61	Vertical
2	2501.9327	28.69	10.80	39.49	54.00	-14.51	Vertical
3	2534.5393	28.50	11.32	39.82	54.00	-14.18	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) – Amplifier Gain.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.4. SPURIOUS EMISSIONS

TEST RESULTS TABLE

1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 9kHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS


Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part 1: 1GHz~3GHz

HARMONICS AND SPURIOUS EMISSIONS


Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

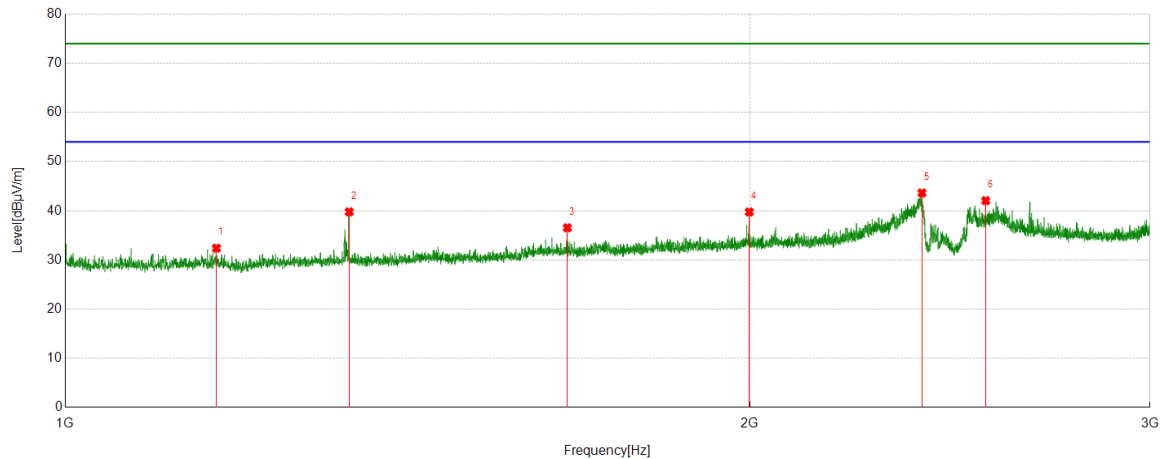

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1165.5207	53.85	-21.46	32.39	74.00	-41.61	Horizontal
2	1333.2917	60.37	-20.59	39.78	74.00	-34.22	Horizontal
3	1662.8329	54.81	-18.27	36.54	74.00	-37.46	Horizontal
4	1999.3749	56.04	-16.29	39.75	74.00	-34.25	Horizontal
5	2381.4227	57.84	-14.22	43.62	74.00	-30.38	Horizontal
6	2540.1925	55.61	-13.55	42.06	74.00	-31.94	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

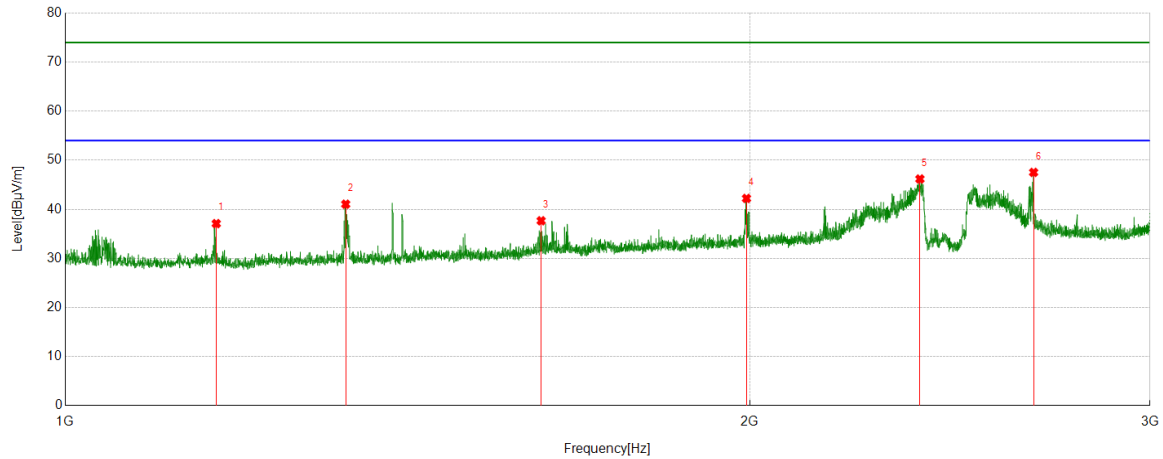

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1165.2707	58.55	-21.46	37.09	74.00	-36.91	Vertical
2	1328.5411	61.64	-20.59	41.05	74.00	-32.95	Vertical
3	1619.3274	56.36	-18.69	37.67	74.00	-36.33	Vertical
4	1993.6242	58.54	-16.32	42.22	74.00	-31.78	Vertical
5	2376.4221	60.47	-14.29	46.18	74.00	-27.82	Vertical
6	2666.4583	60.77	-13.24	47.53	74.00	-26.47	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

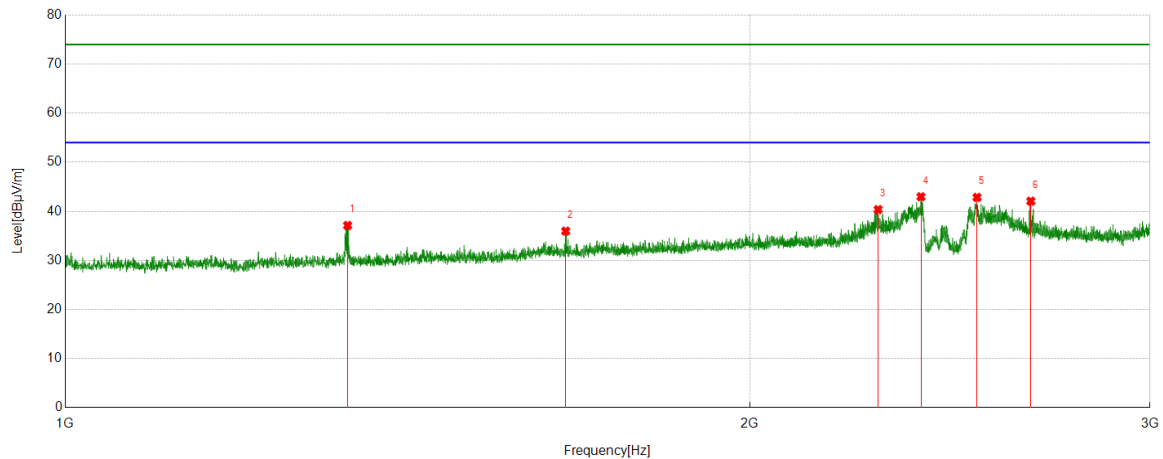

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1331.0414	57.71	-20.59	37.12	74.00	-36.88	Horizontal
2	1660.0825	54.29	-18.33	35.96	74.00	-38.04	Horizontal
3	2277.9097	55.65	-15.29	40.36	74.00	-33.64	Horizontal
4	2378.9224	57.21	-14.24	42.97	74.00	-31.03	Horizontal
5	2517.9397	56.55	-13.71	42.84	74.00	-31.16	Horizontal
6	2658.9574	55.29	-13.22	42.07	74.00	-31.93	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

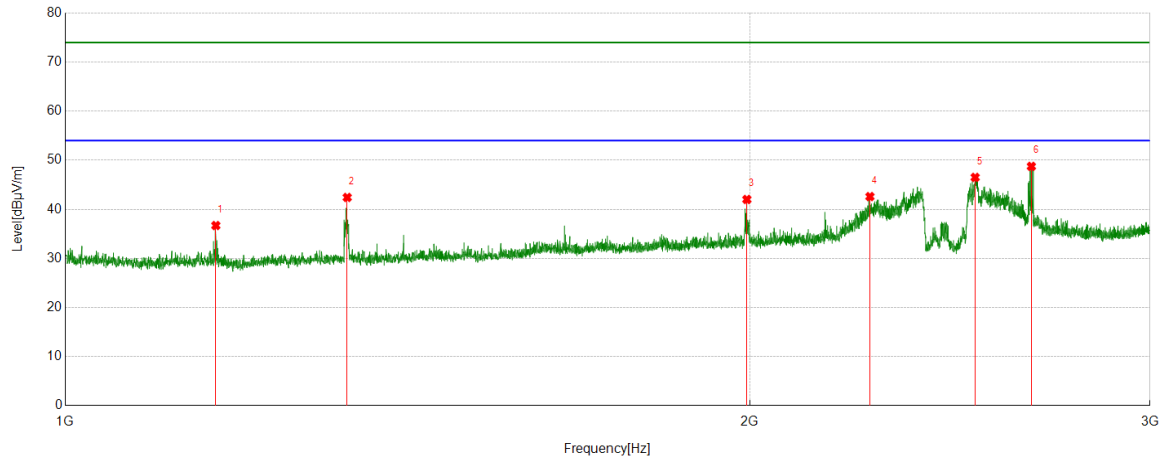

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1164.7706	58.15	-21.45	36.70	74.00	-37.30	Vertical
2	1330.5413	63.00	-20.58	42.42	74.00	-31.58	Vertical
3	1994.3743	58.33	-16.32	42.01	74.00	-31.99	Vertical
4	2259.1574	57.79	-15.19	42.60	74.00	-31.40	Vertical
5	2513.1891	60.11	-13.60	46.51	74.00	-27.49	Vertical
6	2660.4576	61.98	-13.23	48.75	74.00	-25.25	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

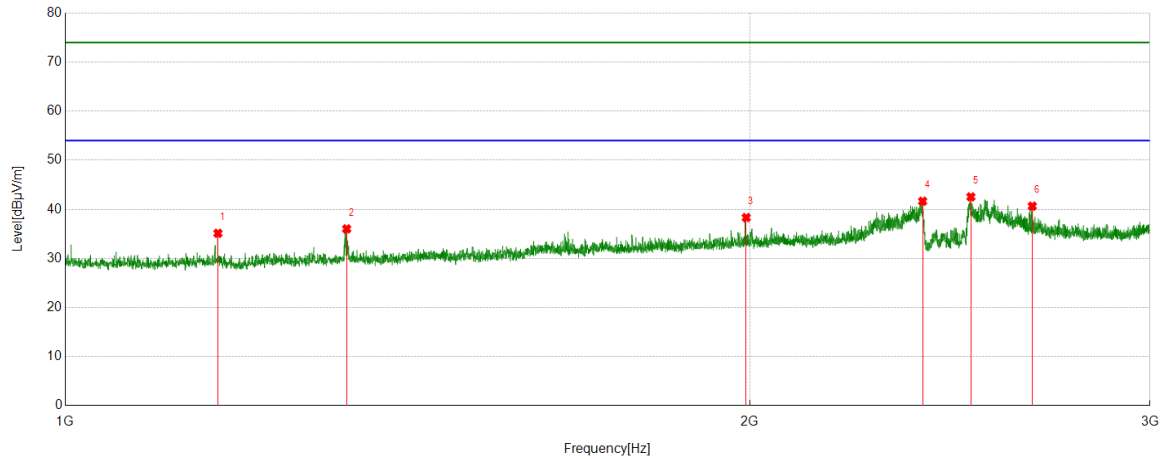

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1167.2709	56.60	-21.48	35.12	74.00	-38.88	Horizontal
2	1329.7912	56.60	-20.58	36.02	74.00	-37.98	Horizontal
3	1993.1241	54.65	-16.33	38.32	74.00	-35.68	Horizontal
4	2382.9229	55.88	-14.23	41.65	74.00	-32.35	Horizontal
5	2502.4378	55.99	-13.45	42.54	74.00	-31.46	Horizontal
6	2662.9579	53.89	-13.24	40.65	74.00	-33.35	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

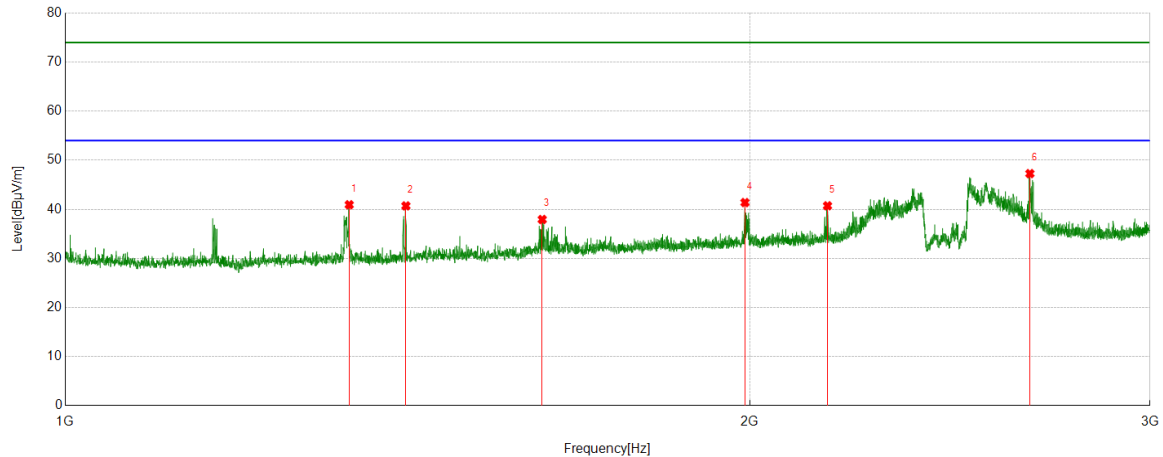

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1333.2917	61.52	-20.59	40.93	74.00	-33.07	Vertical
2	1412.0515	60.89	-20.19	40.70	74.00	-33.30	Vertical
3	1621.0776	56.59	-18.66	37.93	74.00	-36.07	Vertical
4	1990.6238	57.72	-16.34	41.38	74.00	-32.62	Vertical
5	2164.1455	56.71	-15.99	40.72	74.00	-33.28	Vertical
6	2656.4571	60.50	-13.22	47.28	74.00	-26.72	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

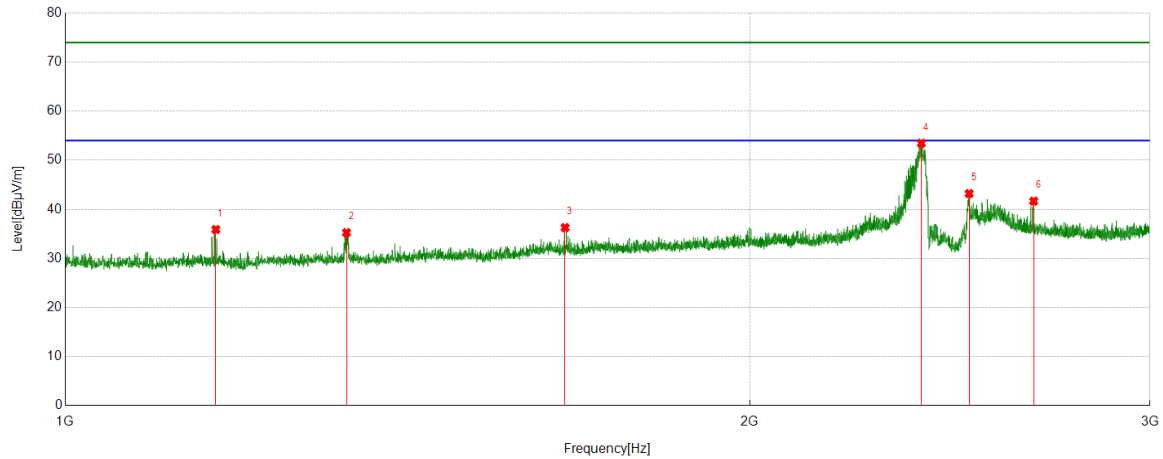

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1164.7706	57.34	-21.45	35.89	74.00	-38.11	Horizontal
2	1329.5412	55.83	-20.58	35.25	74.00	-38.75	Horizontal
3	1659.0824	54.60	-18.33	36.27	74.00	-37.73	Horizontal
4	2379.9225	67.68	-14.22	53.46	74.00	-20.54	Horizontal
5	2497.9372	56.64	-13.43	43.21	74.00	-30.79	Horizontal
6	2666.7083	54.92	-13.24	41.68	74.00	-32.32	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

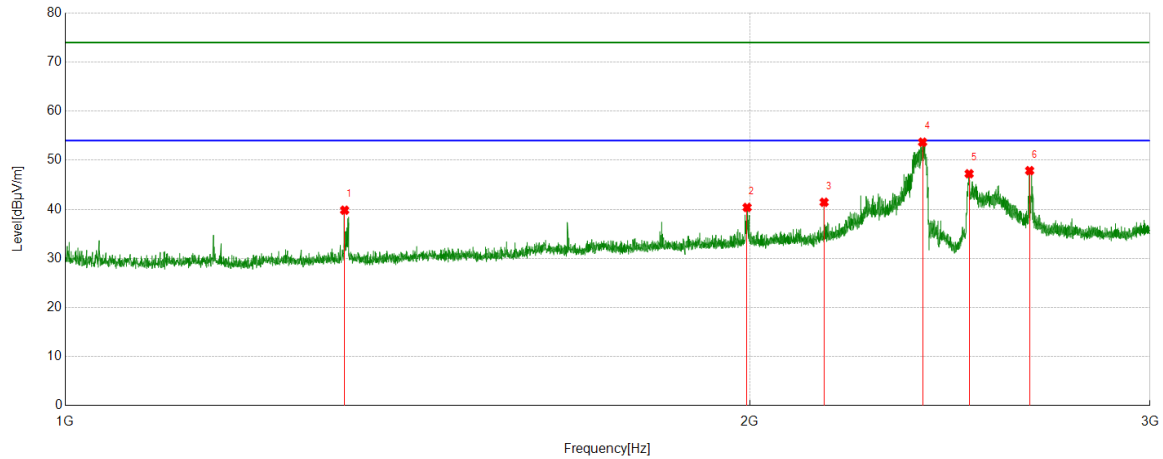

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1327.0409	60.44	-20.62	39.82	74.00	-34.18	Vertical
2	1994.8744	56.69	-16.31	40.38	74.00	-33.62	Vertical
3	2156.6446	57.31	-15.87	41.44	74.00	-32.56	Vertical
4	2382.9229	67.91	-14.23	53.68	74.00	-20.32	Vertical
5	2497.9372	60.68	-13.43	47.25	74.00	-26.75	Vertical
6	2655.707	61.10	-13.22	47.88	74.00	-26.12	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

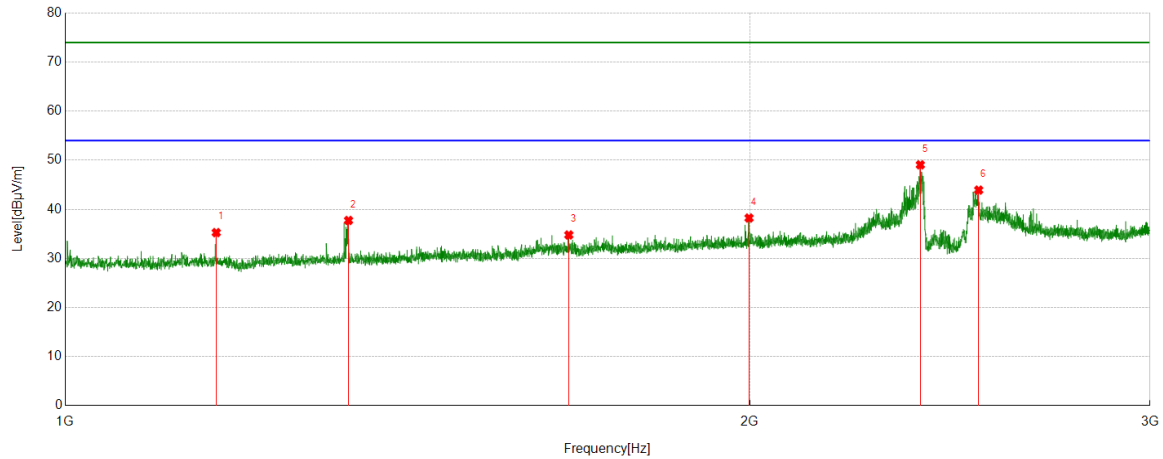

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1165.2707	56.72	-21.46	35.26	74.00	-38.74	Horizontal
2	1332.2915	58.33	-20.59	37.74	74.00	-36.26	Horizontal
3	1665.3332	52.99	-18.21	34.78	74.00	-39.22	Horizontal
4	1998.8749	54.52	-16.29	38.23	74.00	-35.77	Horizontal
5	2377.4222	63.34	-14.27	49.07	74.00	-24.93	Horizontal
6	2522.1903	57.64	-13.72	43.92	74.00	-30.08	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

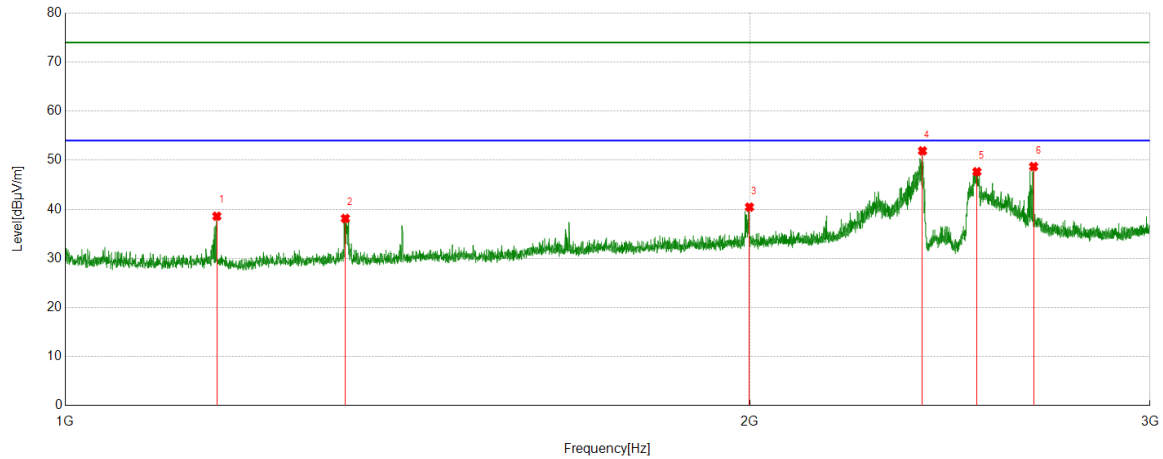

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1166.0208	60.07	-21.47	38.60	74.00	-35.40	Vertical
2	1328.041	58.74	-20.60	38.14	74.00	-35.86	Vertical
3	1999.625	56.73	-16.28	40.45	74.00	-33.55	Vertical
4	2382.6728	66.14	-14.23	51.91	74.00	-22.09	Vertical
5	2517.6897	61.37	-13.71	47.66	74.00	-26.34	Vertical
6	2666.4583	61.96	-13.24	48.72	74.00	-25.28	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

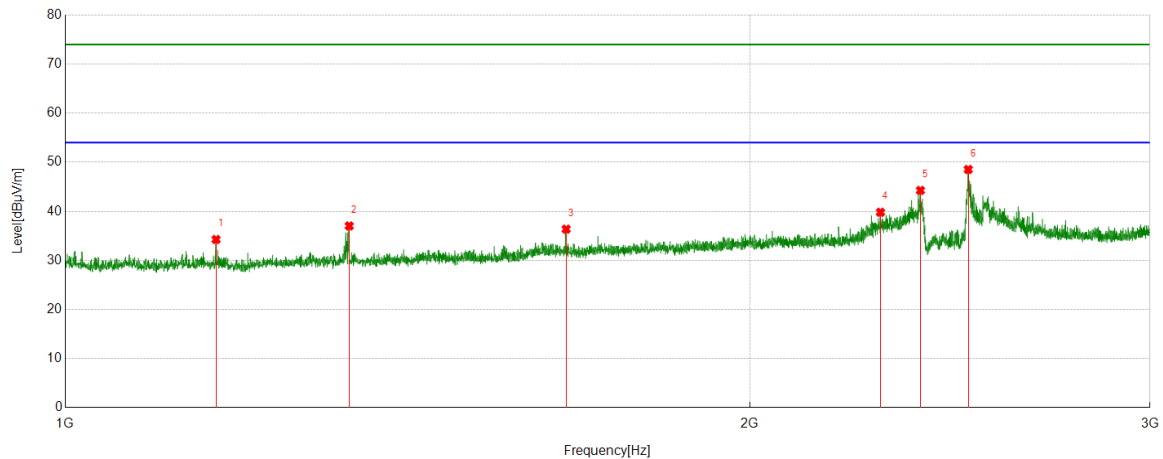

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1165.0206	55.72	-21.46	34.26	74.00	-39.74	Horizontal
2	1333.2917	57.61	-20.59	37.02	74.00	-36.98	Horizontal
3	1660.8326	54.68	-18.31	36.37	74.00	-37.63	Horizontal
4	2283.4104	55.03	-15.22	39.81	74.00	-34.19	Horizontal
5	2377.6722	58.53	-14.27	44.26	74.00	-29.74	Horizontal
6	2495.687	61.98	-13.45	48.53	74.00	-25.47	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

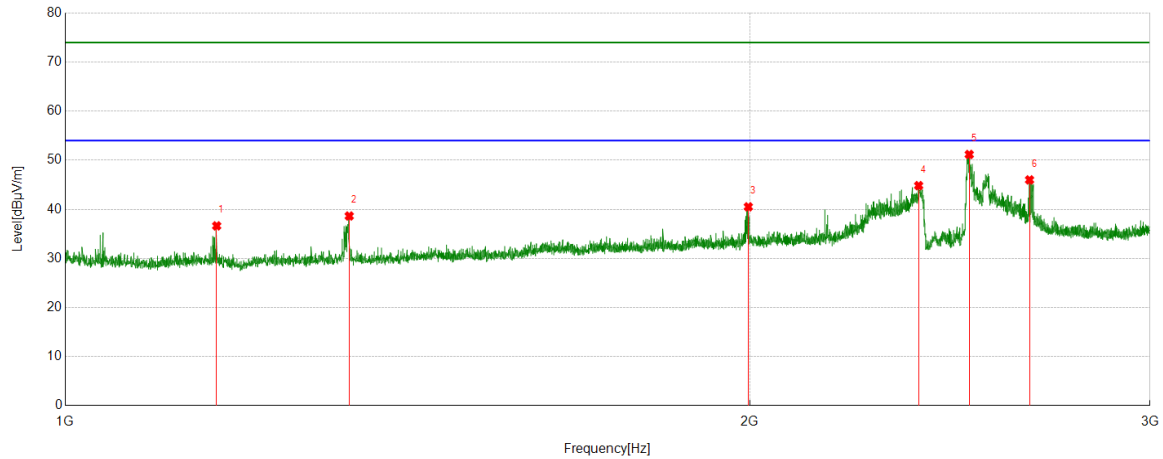

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1165.7707	58.10	-21.47	36.63	74.00	-37.37	Vertical
2	1333.2917	59.23	-20.59	38.64	74.00	-35.36	Vertical
3	1997.3747	56.81	-16.30	40.51	74.00	-33.49	Vertical
4	2373.4217	59.19	-14.36	44.83	74.00	-29.17	Vertical
5	2498.1873	64.61	-13.43	51.18	74.00	-22.82	Vertical
6	2655.4569	59.22	-13.22	46.00	74.00	-28.00	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

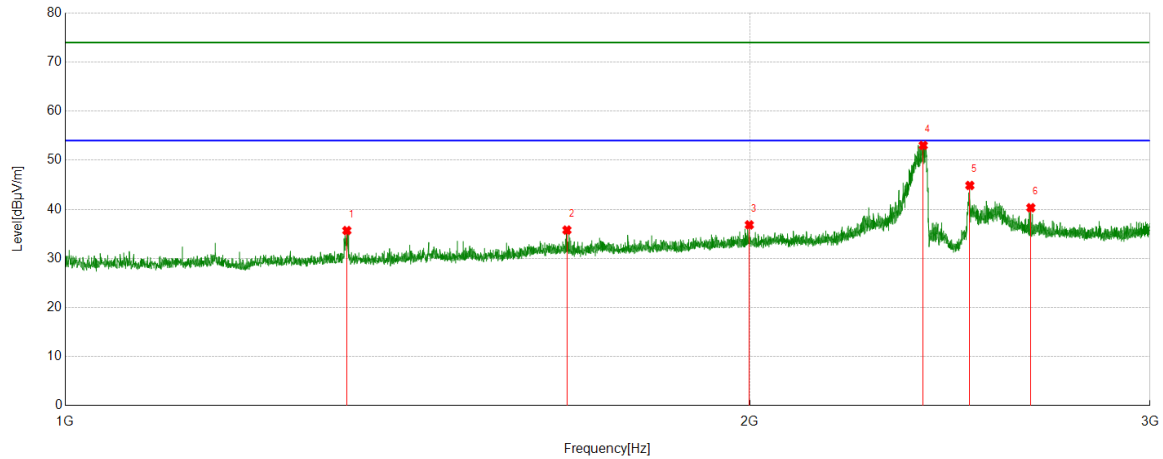

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1330.0413	56.25	-20.58	35.67	74.00	-38.33	Horizontal
2	1662.0828	54.05	-18.28	35.77	74.00	-38.23	Horizontal
3	1999.3749	53.12	-16.29	36.83	74.00	-37.17	Horizontal
4	2384.4231	67.25	-14.23	53.02	74.00	-20.98	Horizontal
5	2499.6875	58.28	-13.42	44.86	74.00	-29.14	Horizontal
6	2658.9574	53.54	-13.22	40.32	74.00	-33.68	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

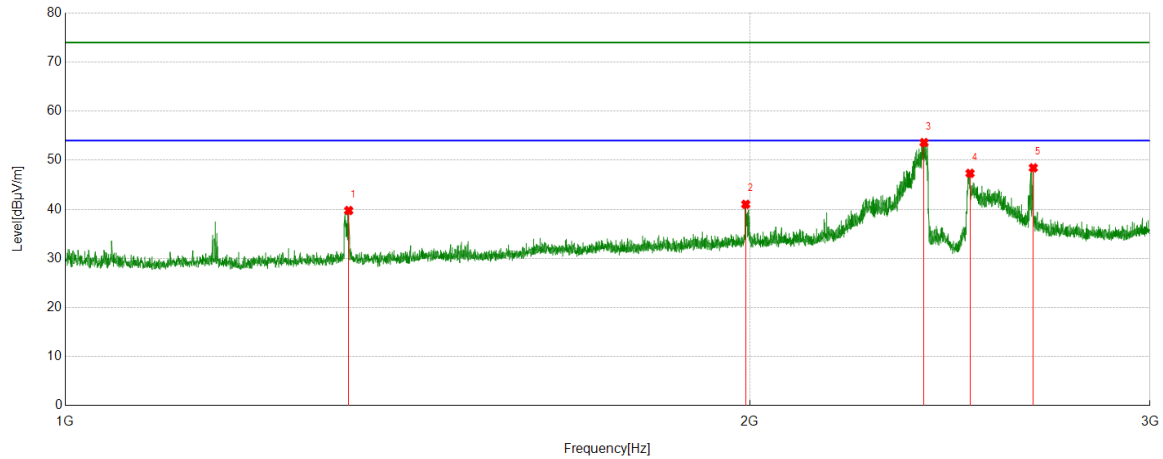

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1332.5416	60.35	-20.59	39.76	74.00	-34.24	Vertical
2	1992.124	57.36	-16.34	41.02	74.00	-32.98	Vertical
3	2386.4233	67.84	-14.23	53.61	74.00	-20.39	Vertical
4	2500.1875	60.75	-13.42	47.33	74.00	-26.67	Vertical
5	2665.7082	61.69	-13.24	48.45	74.00	-25.55	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

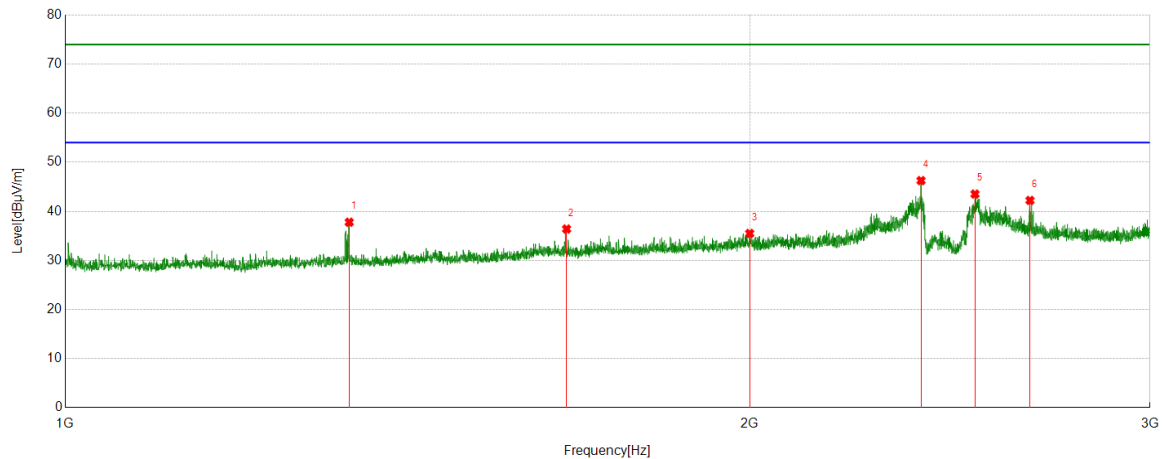

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1333.2917	58.37	-20.59	37.78	74.00	-36.22	Horizontal
2	1661.5827	54.70	-18.30	36.40	74.00	-37.60	Horizontal
3	2000.125	51.77	-16.28	35.49	74.00	-38.51	Horizontal
4	2379.1724	60.50	-14.24	46.26	74.00	-27.74	Horizontal
5	2512.9391	57.11	-13.59	43.52	74.00	-30.48	Horizontal
6	2656.7071	55.44	-13.22	42.22	74.00	-31.78	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

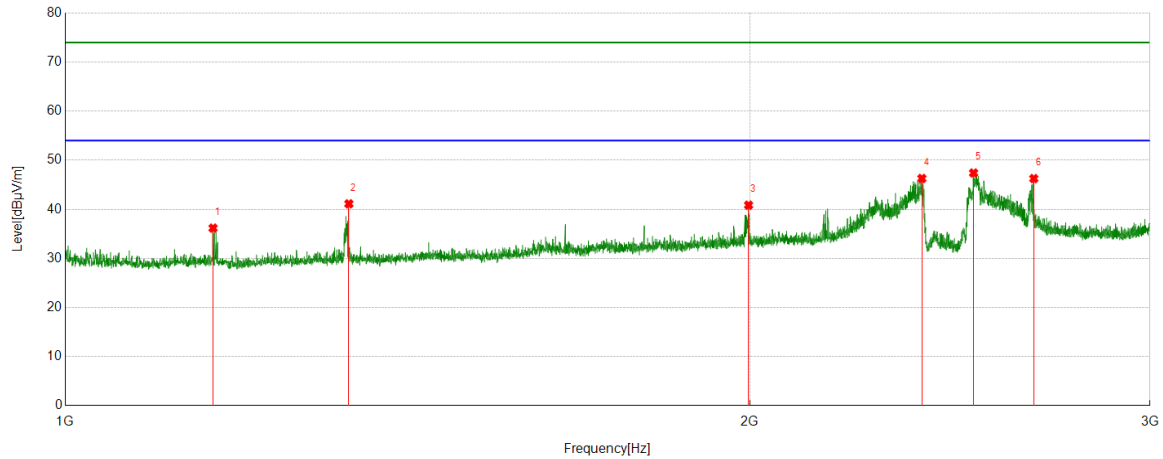

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1161.5202	57.60	-21.42	36.18	74.00	-37.82	Vertical
2	1332.7916	61.72	-20.59	41.13	74.00	-32.87	Vertical
3	1997.8747	57.14	-16.29	40.85	74.00	-33.15	Vertical
4	2381.1726	60.51	-14.22	46.29	74.00	-27.71	Vertical
5	2509.1886	60.91	-13.51	47.40	74.00	-26.60	Vertical
6	2666.9584	59.51	-13.24	46.27	74.00	-27.73	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

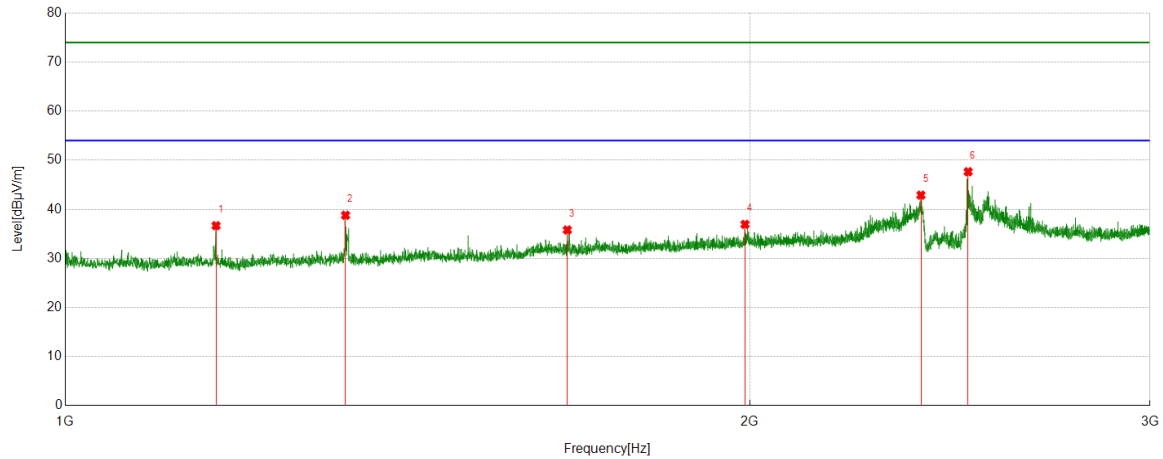

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1165.0206	58.13	-21.46	36.67	74.00	-37.33	Horizontal
2	1328.291	59.39	-20.60	38.79	74.00	-35.21	Horizontal
3	1662.8329	54.07	-18.27	35.80	74.00	-38.20	Horizontal
4	1990.6238	53.28	-16.34	36.94	74.00	-37.06	Horizontal
5	2378.9224	57.13	-14.24	42.89	74.00	-31.11	Horizontal
6	2495.4369	61.11	-13.45	47.66	74.00	-26.34	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

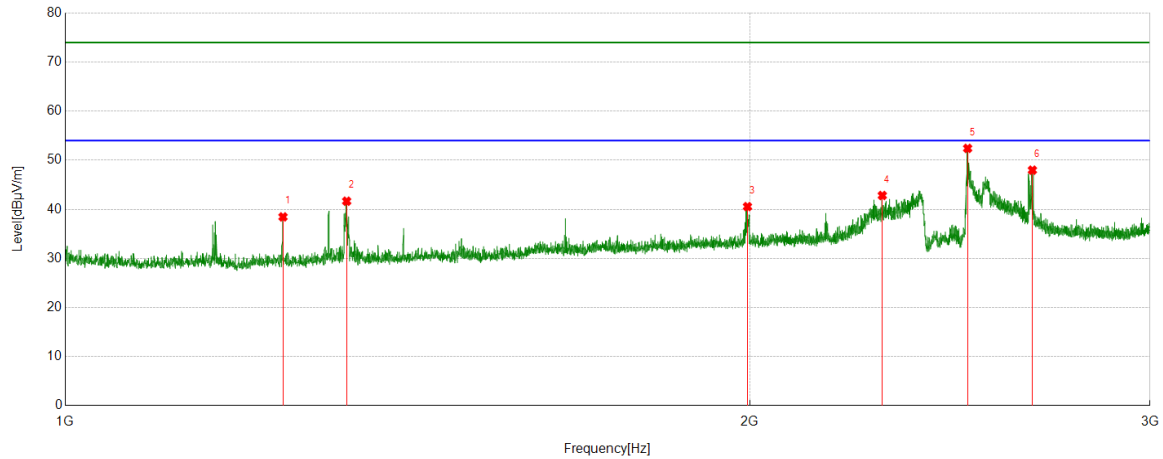


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1246.7808	59.36	-20.90	38.46	74.00	-35.54	Vertical
2	1329.7912	62.24	-20.58	41.66	74.00	-32.34	Vertical
3	1995.6245	56.86	-16.31	40.55	74.00	-33.45	Vertical
4	2287.661	58.02	-15.20	42.82	74.00	-31.18	Vertical
5	2494.1868	65.87	-13.45	52.42	74.00	-21.58	Vertical
6	2663.2079	61.22	-13.24	47.98	74.00	-26.02	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

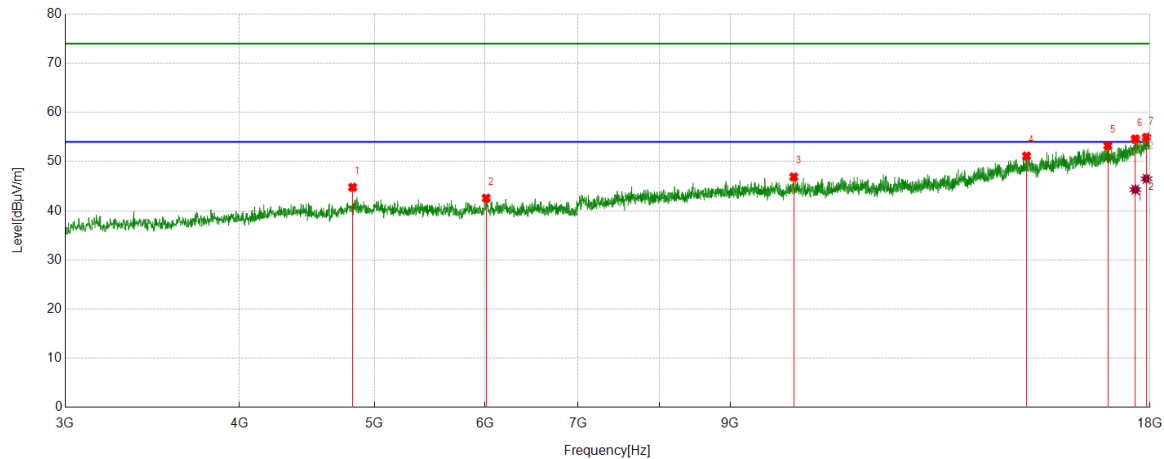

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4822.7278	48.86	-4.09	44.77	74.00	-29.23	Horizontal
2	6013.5017	44.41	-1.85	42.56	74.00	-31.44	Horizontal
3	9994.6243	43.07	3.81	46.88	74.00	-27.12	Horizontal
4	14680.8351	39.36	11.77	51.13	74.00	-22.87	Horizontal
5	16788.5986	37.67	15.57	53.24	74.00	-20.76	Horizontal
6	17568.6961	37.35	17.25	54.60	74.00	-19.40	Horizontal
7	17896.8621	35.66	19.28	54.94	74.00	-19.06	Horizontal

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17568.6961	27.04	17.25	44.29	54.00	-9.71	Horizontal
2	17896.8621	27.23	19.28	46.51	54.00	-7.49	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

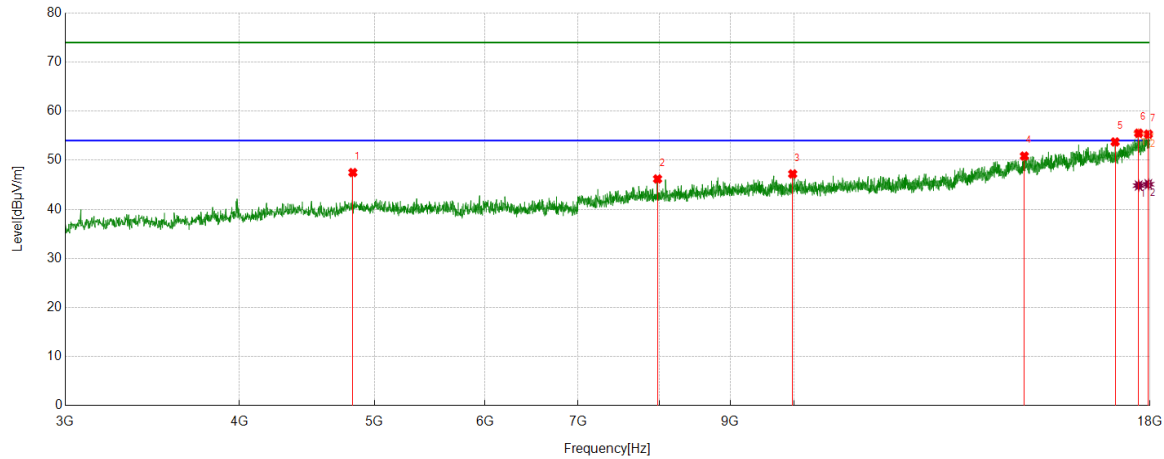

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4824.6031	51.49	-4.00	47.49	74.00	-26.51	Vertical
2	7980.6226	44.50	1.69	46.19	74.00	-27.81	Vertical
3	9975.872	43.60	3.61	47.21	74.00	-26.79	Vertical
4	14626.4533	38.89	11.96	50.85	74.00	-23.15	Vertical
5	16992.9991	38.48	15.25	53.73	74.00	-20.27	Vertical
6	17666.2083	37.94	17.57	55.51	74.00	-18.49	Vertical
7	17951.2439	36.95	18.37	55.32	74.00	-18.68	Vertical

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17666.2083	27.27	17.57	44.84	54.00	-9.16	Vertical
2	17951.2439	26.74	18.37	45.11	54.00	-8.89	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) – Amplifier Gain.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.