

47 CFR FCC Part 15 Subpart C

Section 15.247

Test Report

Product : **VIDEOSCOPE SYSTEM**

Trade Name : Mitcorp

Model Number : F1700

FCC ID : 2AA5FF1700

Prepared for

Medical Intubation Technology Corp.

2F, No.75, Wenhwa 1st Rd., Guishan District, Taoyuan 33382, Taiwan

TEL.: +886 3 328 7177

FAX.: +886 3 328 7176

Prepared by

Interocean EMC Technology Corp.

Interocean EMC Technology Tin-Fu Laboratory

No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City,
Taiwan 244, R.O.C.

TEL.: +886 2 2600 6861

FAX: +886 2 2600 6859



Remark:

The test report consists of **79** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.

The test result in this report is only subjected to the test sample.

Table of Contents

1	General Information	5
1.1	Description of Equipment Under Test	5
1.2	Details of Tested Supporting System	6
1.3	Table for Carrier Frequencies	7
1.4	Test Facility	8
1.5	Test Equipment	9
1.6	Measurement Uncertainty	9
1.7	Summary of Measurement	10
1.8	Justification	11
1.9	Test Step of EUT	11
2	RF radiated spurious emission test	12
2.1	Limit	12
2.2	Configuration of Measurement	12
2.3	Test Procedure	13
2.4	Test Result	13
3	RF Conducted spurious emission	20
3.1	Limit	20
3.2	Configuration of Measurement	20
3.3	Test Procedure	20
3.4	Test Result	20
4	Maximum peak output power test	27
4.1	Limit	27
4.2	Configuration of Measurement	27
4.3	Test Procedure	27
4.4	Test Result	27
5	6dB Bandwidth	29
5.1	Limit	29
5.2	Configuration of Measurement	29
5.3	Test Procedure	29
5.4	Test Result	29
6	Power spectral density	37
6.1	Limit	37
6.2	Configuration of Measurement	37
6.3	Test Procedure	37
6.4	Test Result	37

7	Emission on the Band Edge test	45
7.1	Limit	45
7.2	Configuration of Measurement	45
7.3	Test Procedure	45
7.4	Test Result	45
8	AC Power Line Conducted Emission test	63
8.1	Limit	63
8.2	Configuration of Measurement	63
8.3	Test Procedures	63
8.4	Test Result	64
9	Photographs of Test	67
9.1	AC Power Line Conducted Emission test	67
9.2	Radiated Emission Measurement (Below 1 GHz)	68
9.3	Radiated Emission Measurement (Above 1 GHz)	68
10	Photographs of EUT	69

Statement of Compliance

Applicant: Medical Intubation Technology Corp.

Manufacturer: Medical Intubation Technology Corp.

Product: VIDEOSCOPE SYSTEM

Model No.: F1700

Tested Power Supply: 120Vac, 60Hz

Date of Final Test: Oct. 09, 2018

Revision of Report: Rev. 01

Configuration of Measurements and Standards Used :


FCC Rules and Regulations Part 15 Subpart C Section 15.247

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.

2. The testing report shall not be reproduced expect in full, without the written approval of IETC

Report Issued: 2018/10/22

Project Engineer: 
Ivan Wang

Approved: 
Jerry Liu

1 General Information

1.1 Description of Equipment Under Test

Product	: VIDEOSCOPE SYSTEM
Model Number	: F1700
Applicant	: Medical Intubation Technology Corp. 2F, No.75, Wenhwa 1st Rd., Guishan District, Taoyuan 33382, Taiwan
Manufacturer	: Medical Intubation Technology Corp. 2F, No.75, Wenhwa 1st Rd., Guishan District, Taoyuan 33382, Taiwan
Power Supply	: <u>Power Adapter:</u> Manufacture: BILLION Model No.: BA018-050300GXX Input: 100 - 240Vac, 0.5A, 50/60Hz Output: 5Vdc, 3.0A Power Cable: Non-shielded, Un-detachable, 1.5 m, with core <u>From Battery:</u> Battery Type Sanyo Li-ion UR18650ZY 2500 mAh Cell × 2 (1S2P 3.7V 5000mAh)
Operating Frequency	: Operating frequency at 2400MHz~2483.5MHz and the each channel listed as below (802.11b/g/n (20MHz))
Channel Number	: The details please refer to section 1.3
Type of Modulation & Transfer Rate	: CCK, DQPSK, DBPSK, For DSSS; 64QAM, 16QAM, QPSK, BPSK For OFDM 802.11b --- 11.0/5.5/2.0/1.0 Mbps 802.11g --- 54.0/48.0/36.0/24.0/18.0/12.0/9.0/6.0 Mbps 802.11n --- 20MHz --- 7.2Mbps
Antenna Description & Antenna Connector	: This device uses PCB Antenna, Antenna gain: 2 dBi The antenna is integral to the device, thereby meeting the requirement of FCC 15.203.
Product Information	: <u>AV Cable:</u> Non-shielded, Detachable, 2.0 m, with core <u>USB Cable:</u> Shielded, Detachable, 3.0 m, with core <u>Ground Cable:</u> Non-shielded, Detachable, 3.0 m, with core <u>SD Card:</u> Manufacture: SanDisk Specification: 8 GB
Measurement Software	: e3; Ver: 8.120803a7-2
Date of Test	: Aug. 22 ~ Oct. 09, 2018
Additional Description	: 1. The test model is “ F1700 ” and included in this report. 2. For more detail specification about EUT, please refer to the user’s manual.

1.2 Details of Tested Supporting System

N/A

1.3 Table for Carrier Frequencies

Operating frequency at 2400MHz~2483.5MHz and the each channel listed as below (802.11b/g/n (20MHz)):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

1.4 Test Facility

- Site Description** : ☒Chamber 3 ☒RF Test Room
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Location** : No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City, Taiwan 244, R.O.C.
- Site Filing** :
- Federal Communication Commissions – USA
Designation No.: TW1020 (Test Firm Registration #: 651092)
Designation No.: TW1113 (Test Firm Registration #: 959554)
 - Industry Canada (IC)
OUR FILE: 46405-4437
Registration No. (OATS 1): Site# 4437A-1
Registration No. (OATS 3): Site# 4437A-3
Registration No. (Chamber 3): Site# 4437A-5
Registration No. (OATS 5): Site# 4437A-6
 - Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan
Member No.: 1349
Registration No. (Conducted Room): C-11094
Registration No. (Conducted Room): T-11562
Registration No. (OATS 1): R-11040; G-10274
- Site Accreditation** :
- Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.
Accreditation No.:
SL2-IN-E-0026 for CNS 13438 / CISPR 22
SL2-R1-E-0026 for CNS 13439 / CISPR 13
SL2-R2-E-0026 for CNS 13439 / CISPR 13
SL2-L1-E-0026 for CNS 14115 / CISPR 15
 - Taiwan Accreditation Foundation (TAF)
Accreditation No.: 1113
 - Vehicle Safety Certification Center (VSCC)
Approval No.: TW16-11
 - TÜV NORD
Certificate No: TNTW0801R

1.5 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSP40	100478	2019/06/14
EMI Test Spectrum Analyzer & Receiver	R&S	ESI7	830154/002	2019/05/20
Pre-Amplifier	EMCI	EMC001150	980130	2019/06/05
Pre-Amplifier	EMCI	EMC 051845	980110	2018/09/21
Bilog Antenna	Schwarzbeck	MCTD 2786B	BLB17S04020	2019/07/08
Horn Antenna	Schwarzbeck	BBHA9120	9120D-1051	2018/11/09
RF Cable	Jye Bao	A30N30-5005	CBL51	2019/07/30
RF Cable	Jye Bao	N30N30-5006	CBL53	2019/07/30
RF Cable	HARBOUR	27478LL142	CBL65	2019/07/30
RF Cable	HARBOUR	27478LL142	CBL65	2019/07/30
RF Cable	Marvelous Microwave	MCBL-LL266.50	CBL70	2019/07/30
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100127	2018/12/07
RF Cable	IETC	CBL68	CBL68	2019/07/30
L.I.S.N.	Schwarzbeck	NNLK8121	8121417	2019/03/25
L.I.S.N.	Schaffner	MN2050D	1598	2019/08/06
Measurement Software	AUDIX-e3			

Note: The above equipments are within the valid calibration period.

1.6 Measurement Uncertainty

Item	Value
Chamber 3:	
Radiated Emission Test (30 MHz to 1 GHz)	4.86 dB
Radiated Emission Test (above 1 GHz)	5.12 dB
Conduction 1:	
Conducted Emission - AMN (9 kHz to 30 MHz)	2.98 dB
The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%	

1.7 Summary of Measurement

Report Clause	Test Parameter	Reference Document 47 CFR Part15	Results
2	RF Radiated spurious emission test	§15.205, 15.209	Pass
3	RF Conducted spurious emission	§15.247(d)	Pass
4	Maximum Peak output power test	§15.247(b)	Pass
5	6dB Bandwidth	§15.247(a)(2)	Pass
6	Power spectral density	§15.247(e)	Pass
7	Emission on the Band Edge	§15.247(d)	Pass
8	AC Power Line Conducted Emission test	§15.207	Pass

1.8 Justification

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of the frequency band were all arrive limit requirement, thus we evaluate the EUT pass the specified test.

1.9 Test Step of EUT

- 1.9.1 Position the EUT and the computer, and turn on the power.
- 1.9.2 Connect to PC using RS232.
- 1.9.3 Open the HyperTerminal software, under the command character, select to perform low, medium, and high mode tests.
- 1.9.4 Start the test.

2 RF radiated spurious emission test

2.1 Limit


For intentional radiator, the radiated emission shall comply with §15.209(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (d)


Frequency (MHz)	Field strength dB(μ V/m)	Measurement distance (meters)
1.705~30.0	29.5	30
30 ~ 88	40	3
88~216	43.5	3
216~960	46	3
Above 960	54	3

2.2 Configuration of Measurement

Measurement Frequency under 1GHz

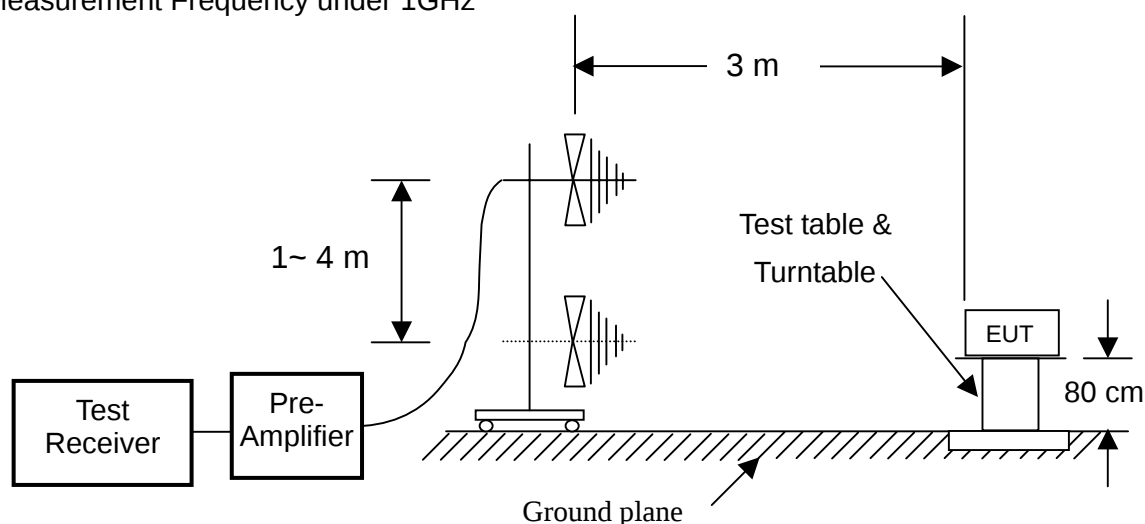

Measurement Frequency above 1GHz

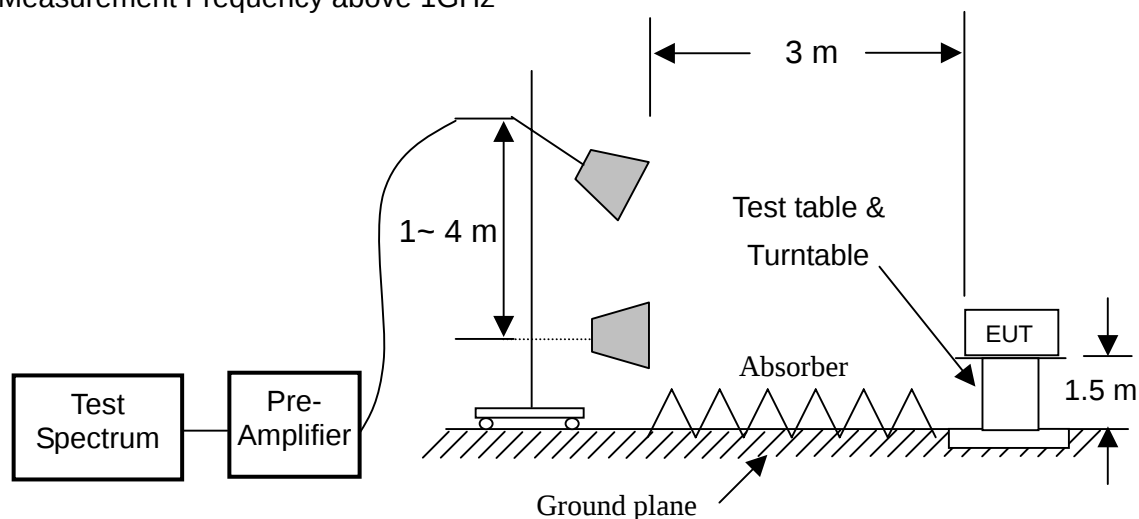

2.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to DTS test procedure of August 24, 2018 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

Radiated emission measurements were performed from 30MHz to 25GHz. Spectrum Analyzer set as below: For frequency range from 30MHz to 1GHz: RBW=100kHz or greater. For frequencies above 1GHz: set RBW=VBW=1MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

2.4 Test Result

PASS.

The final test data is shown on as following pages.

Radiated spurious emission

Test Environment

Ambient temperature : 26.3°C

Relative humidity : 46%

Radiated Emission below 1GHz

After verifying 802.11b/g/n modes, the worse case was found at 802.11b (CCK1M) mode, the data will present on report.

CH6 2437MHz (802.11b) data rate: CCK1M							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
47.460	H	49.17	-12.73	36.44	40.00	-3.56	QP
212.360	H	53.22	-13.85	39.37	43.52	-4.15	QP
260.860	H	54.86	-10.88	43.98	46.02	-2.04	QP
358.830	H	51.30	-7.95	43.35	46.02	-2.67	QP
420.910	H	47.05	-6.65	40.53	46.02	-5.49	QP
719.670	H	44.33	-2.27	42.16	46.02	-3.86	QP
142.520	V	53.11	-10.16	42.95	43.52	-0.57	QP
214.300	V	46.90	-13.74	33.16	43.52	-10.36	QP
360.770	V	39.23	-7.91	31.32	46.02	-14.70	QP
469.410	V	36.36	-5.90	30.46	46.02	-15.56	QP
671.170	V	36.60	-2.88	33.72	46.02	-12.30	QP
719.670	V	35.64	-2.27	33.37	46.02	-12.65	QP

Remark : Result Level = Reading + Factor

Factor = Antenna Factor + Cable Loss - Preamp

Margin = Result Level - Limits

*ANSI C63.10_2013_11.12.2.3: As an alternative to CISPR quasi-peak measurement, compliance can be determined for the applicable emission requirements using a peak detector.


*The frequency range from 9 kHz to 30 MHz was pre-scanned and the results was 20 dB lower than the limit line which according to FCC 15.31(o) needs not be recorded.

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: CH6 2437MHz (802.11b) data rate: CCK1M

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : HORIZONTAL
TEMP/HUM : 24.5℃/51%

Data:81

2018-08-28

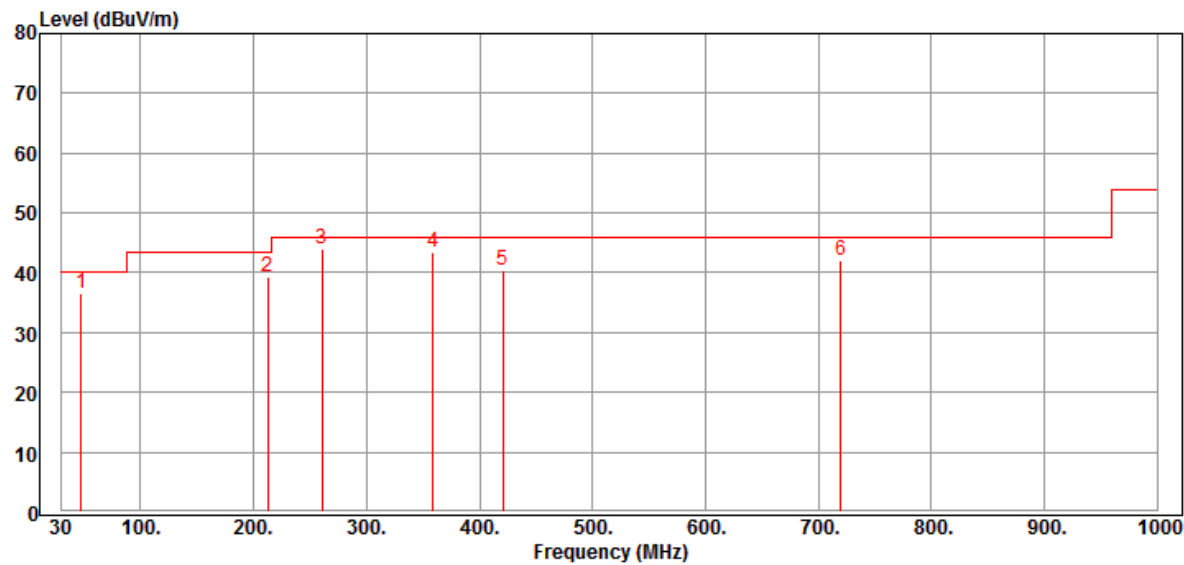

Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	47.460	49.17	-12.73	36.44	40.00	-3.56	QP
2	212.360	53.22	-13.85	39.37	43.52	-4.15	QP
3	260.860	54.86	-10.88	43.98	46.02	-2.04	QP
4	358.830	51.30	-7.95	43.35	46.02	-2.67	QP
5	420.910	47.05	-6.52	40.53	46.02	-5.49	QP
6	719.670	44.43	-2.27	42.16	46.02	-3.86	QP

CLIENT: Medical Intubation Technology Corp.

EUT: VIDEOSCOPE SYSTEM

MODEL: F1700

RATING: 120Vac, 60Hz

COMMENT: CH6 2437MHz (802.11b) data rate: CCK1M

OPERATOR : Ivan

TEST SITE : Chamber 3


TEST DISTANCE : 3m

POLARIZATION : VERTICAL

TEMP/HUM : 24.5°C/51%

Data:82

2018-08-28

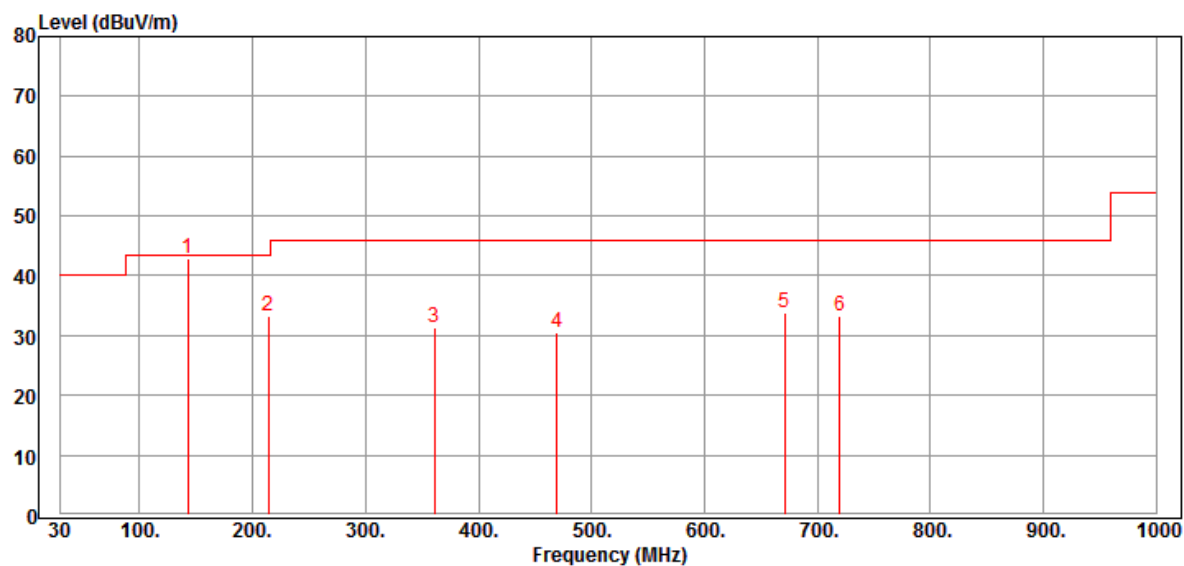

Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	142.520	53.11	-10.16	42.95	43.52	-0.57	Peak
2	214.300	46.90	-13.74	33.16	43.52	-10.36	Peak
3	360.770	39.23	-7.91	31.32	46.02	-14.70	Peak
4	469.410	36.36	-5.90	30.46	46.02	-15.56	Peak
5	671.170	36.60	-2.88	33.72	46.02	-12.30	Peak
6	719.670	35.64	-2.27	33.37	46.02	-12.65	Peak

Radiated spurious emission

Test Environment

Ambient temperature : 24.5°C

Relative humidity : 51%

Radiated Emission above 1GHz

CH1 2412MHz (802.11b) data rate: CCK1M							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4827.0	H	55.00	-12.59	42.41	74	-31.59	PK
7235.0	H	54.00	-5.79	49.11	74	-24.89	PK
4827.0	V	55.26	-12.59	42.67	74	-31.33	PK
7236.0	V	54.24	-5.79	48.45	74	-25.55	PK

CH6 2437MHz (802.11b) data rate: CCK1M							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4876.0	H	57.65	-12.46	45.19	74	-28.81	PK
7312.0	H	53.92	-5.45	48.47	74	-25.53	PK
4876.0	V	57.31	-12.46	44.85	74	-29.15	PK
7312.0	V	54.45	-5.46	49.00	74	-25.00	PK

CH11 2462MHz (802.11b) data rate: CCK1M							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4925.0	H	57.93	-12.35	45.58	74	-28.42	PK
7385.0	H	55.19	-5.11	50.08	74	-23.92	PK
4925.0	V	65.05	-12.35	52.70	74	-21.30	PK
7389.0	V	56.46	-5.11	51.35	74	-22.65	PK

Remark : Result Level = Reading + Factor

Factor = Antenna Factor + Cable Loss - Preamp

Margin = Result Level - Limits

* Mark indicated background noise level.

The spurious emissions above 9GHz were not included, because the emissions are too low.

CH1 2412MHz (802.11g) data rate: OFDM6M							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4827.0	H	53.49	-12.59	40.90	74	-33.10	PK
7235.0	H	54.57	-5.79	48.78	74	-25.22	PK
4827.0	V	53.68	-12.59	41.09	74	-32.91	PK
7235.0	V	53.71	-5.79	47.92	74	-26.08	PK

CH6 2437MHz (802.11g) data rate: OFDM6M							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4876.0	H	53.31	-12.46	40.85	74	-33.15	PK
7312.0	H	54.62	-5.45	49.17	74	-24.83	PK
4876.0	V	55.92	-12.46	43.46	74	-30.54	PK
7312.0	V	54.61	-5.45	49.16	74	-24.84	PK

CH11 2462MHz (802.11g) data rate: OFDM6M							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4925.0	H	53.32	-12.35	40.97	74	-33.03	PK
7389.0	H	55.35	-5.11	50.24	74	-23.76	PK
4925.0	V	55.65	-12.35	43.30	74	-30.70	PK
7389.0	V	54.74	-5.11	49.63	74	-24.37	PK

Remark : Result Level = Reading + Factor

Factor = Antenna Factor + Cable Loss - Preamp

Margin = Result Level - Limits

* Mark indicated background noise level.

The spurious emissions above 9GHz were not included, because the emissions are too low.

CH1 2412MHz (802.11n; 20MHz) data rate: MCS0							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4827.0	H	52.93	-12.59	40.34	74	-33.66	PK
7235.0	H	54.50	-5.79	48.71	74	-25.29	PK
4827.0	V	53.94	-12.59	41.35	74	-32.65	PK
7235.0	V	54.59	-5.79	48.80	74	-25.20	PK

CH6 2437MHz (802.11n; 20MHz) data rate: MCS0							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4876.0	H	53.46	-12.46	41.00	74	-33.00	PK
7312.0	H	55.23	-5.45	49.78	74	-24.22	PK
4876.0	V	55.15	-12.46	42.69	74	-31.31	PK
7312.0	V	54.38	-5.45	48.93	74	-25.07	PK

CH11 2462MHz(802.11n; 20MHz) data rate: MCS0							
Frequency (MHz)	Antenna Polarization	Reading (dBμV)	Factor (dB/m)	Result Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Det. Mode
4925.00	H	54.14	-12.35	41.79	74	-32.21	PK
7389.00	H	55.43	-5.11	50.32	74	-23.68	PK
4925.00	V	56.40	-12.65	44.05	74	-29.95	PK
7389.00	V	56.12	-5.11	51.01	74	-22.99	PK

Remark : Result Level = Reading + Factor

Factor = Antenna Factor + Cable Loss - Preamp

Margin = Result Level - Limits

* Mark indicated background noise level.

The spurious emissions above 9GHz were not included, because the emissions are too low.


3 RF Conducted spurious emission

3.1 Limit

According to 15.247(d) requirement :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

3.2 Configuration of Measurement



3.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to DTS test procedure of August 24, 2018 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

The measurements were performed from 30MHz to 25GHz RF antenna conducted per FCC 15.247 (c) was measured from the EUT antenna port using a 50ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set $\geq$ RBW.


Harmonics and spurious noise must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The table below is the results from the highest emission for each channel within the authorized band. This table was used to determine the spurious limit for each channel.

3.4 Test Result


PASS.

Conducted spurious emission

CH1 2412MHz (802.11b)

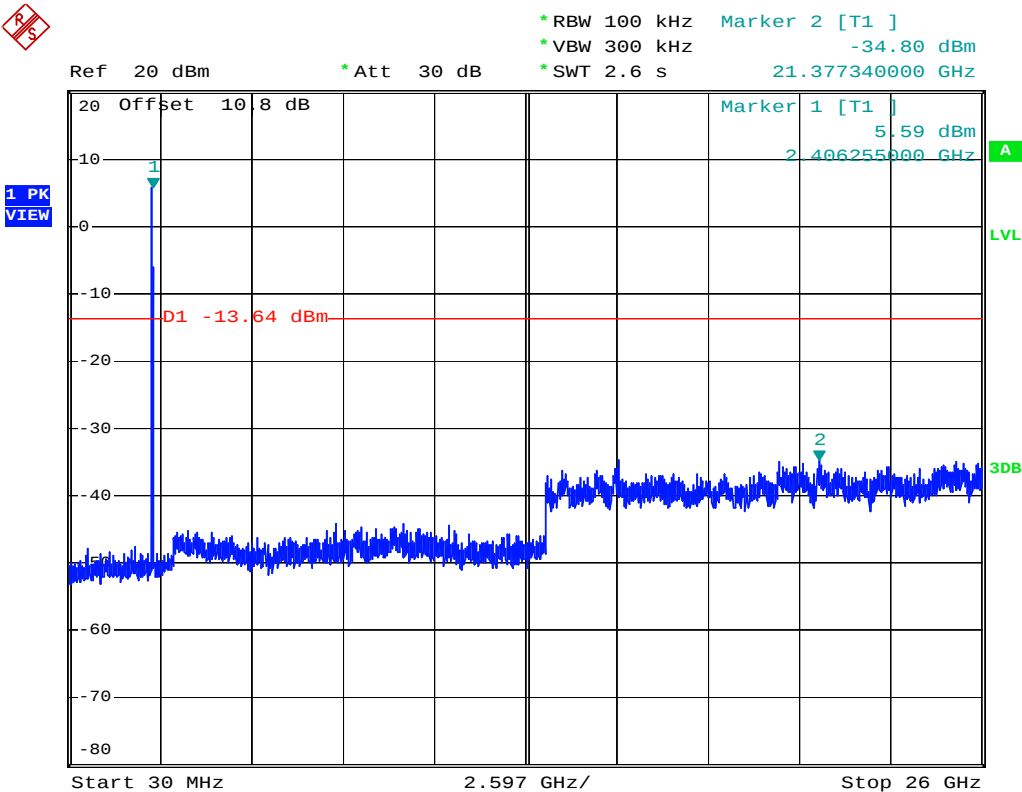

CH6 2437MHz (802.11b)

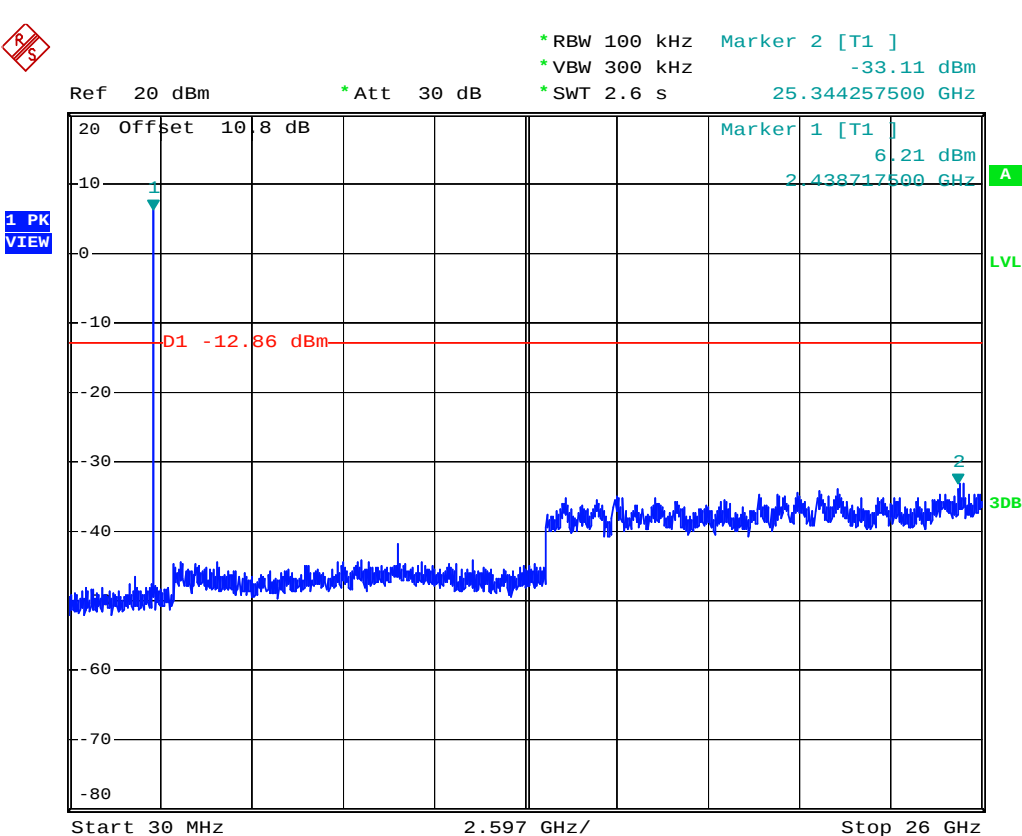





17.377960000 GHz



CH1 2412MHz (802.11g)

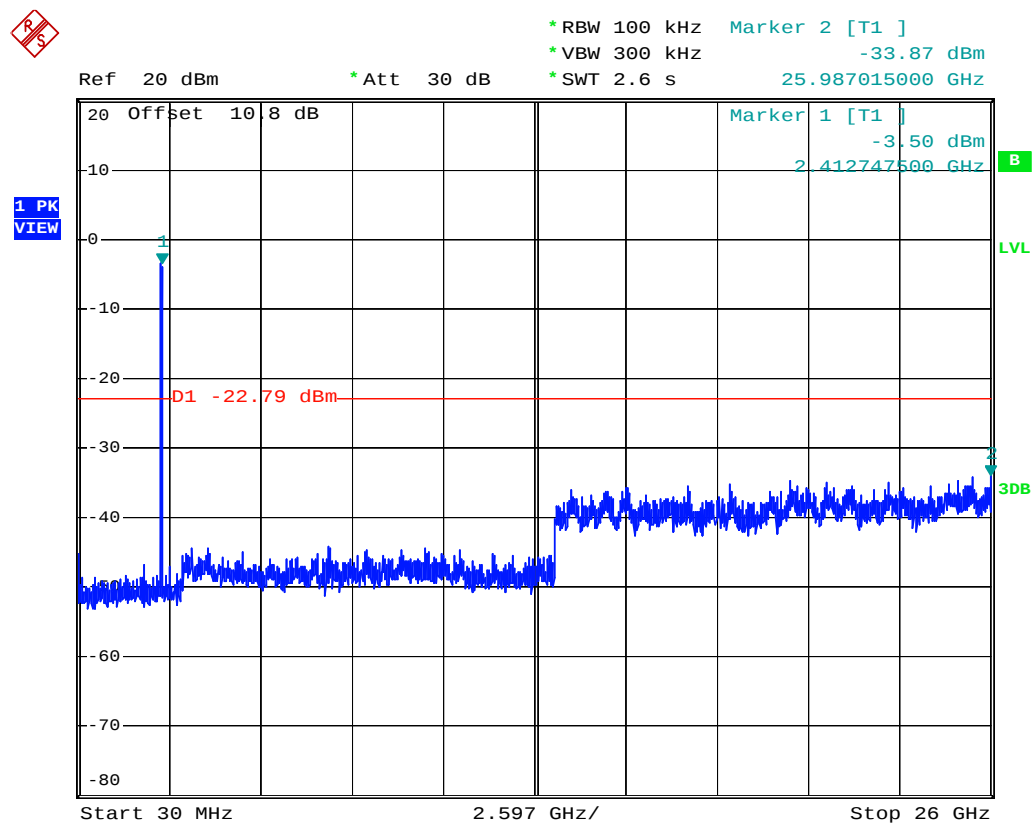


CH6 2437MHz (802.11g)

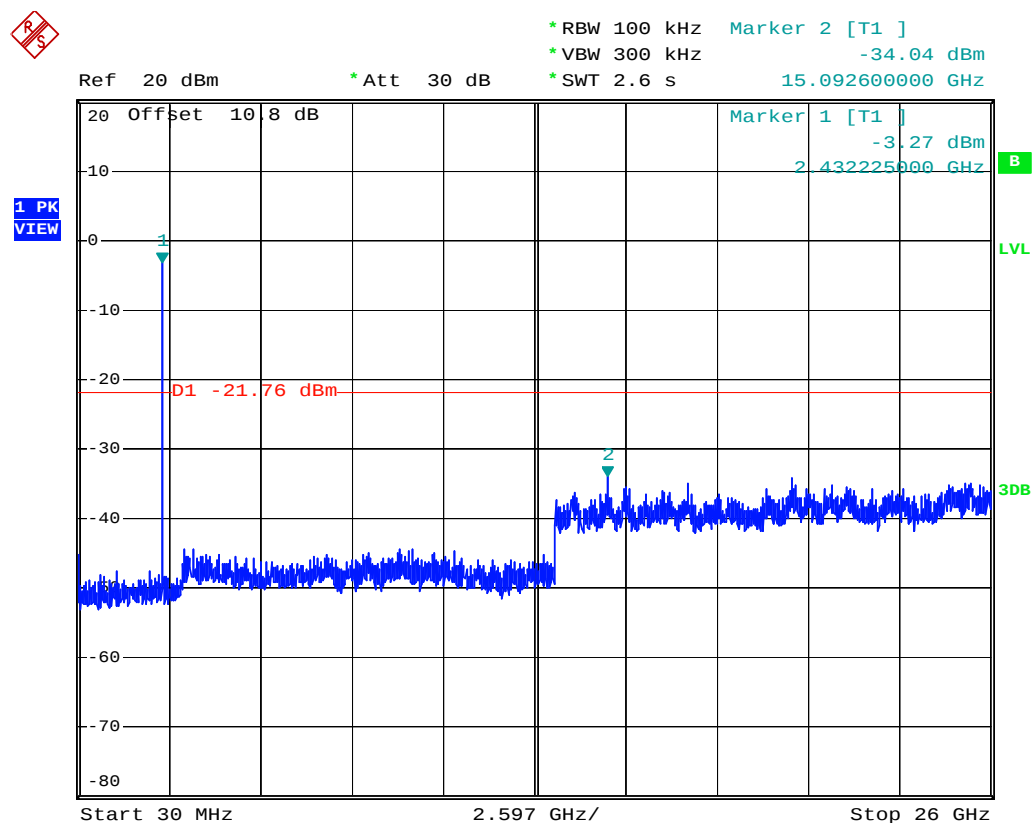




1 PK
VIEW


CH1 2412MHz (802.11n)

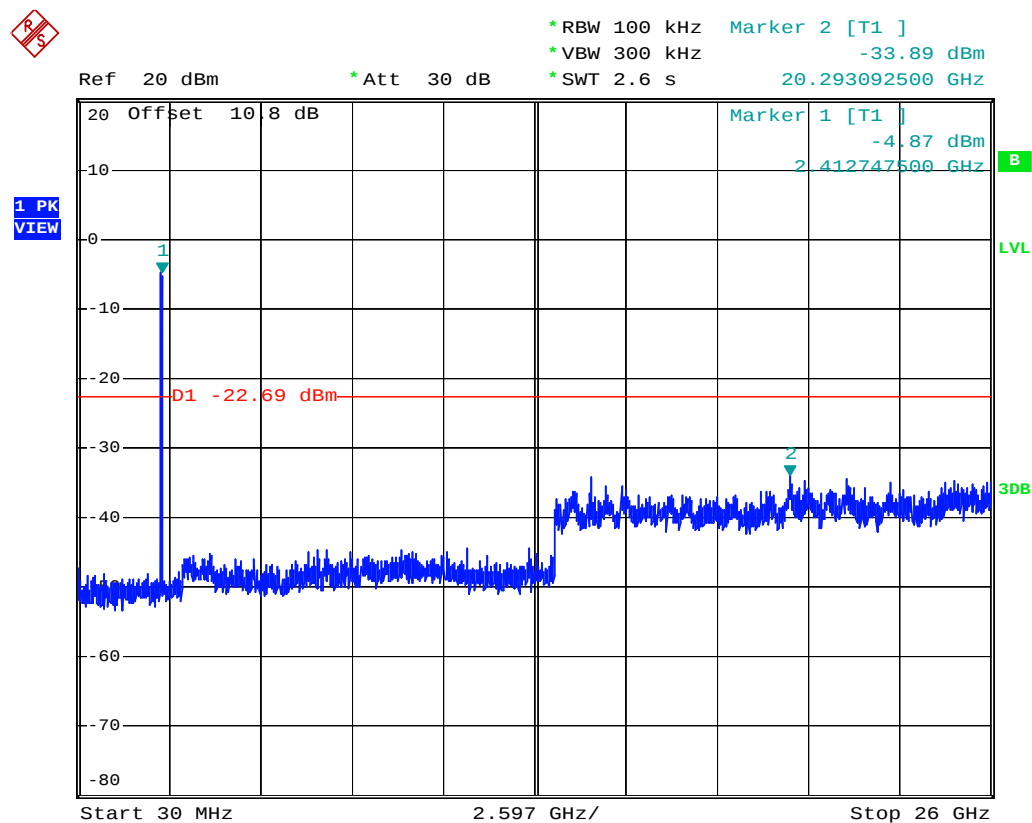

CH6 2437MHz (802.11n)

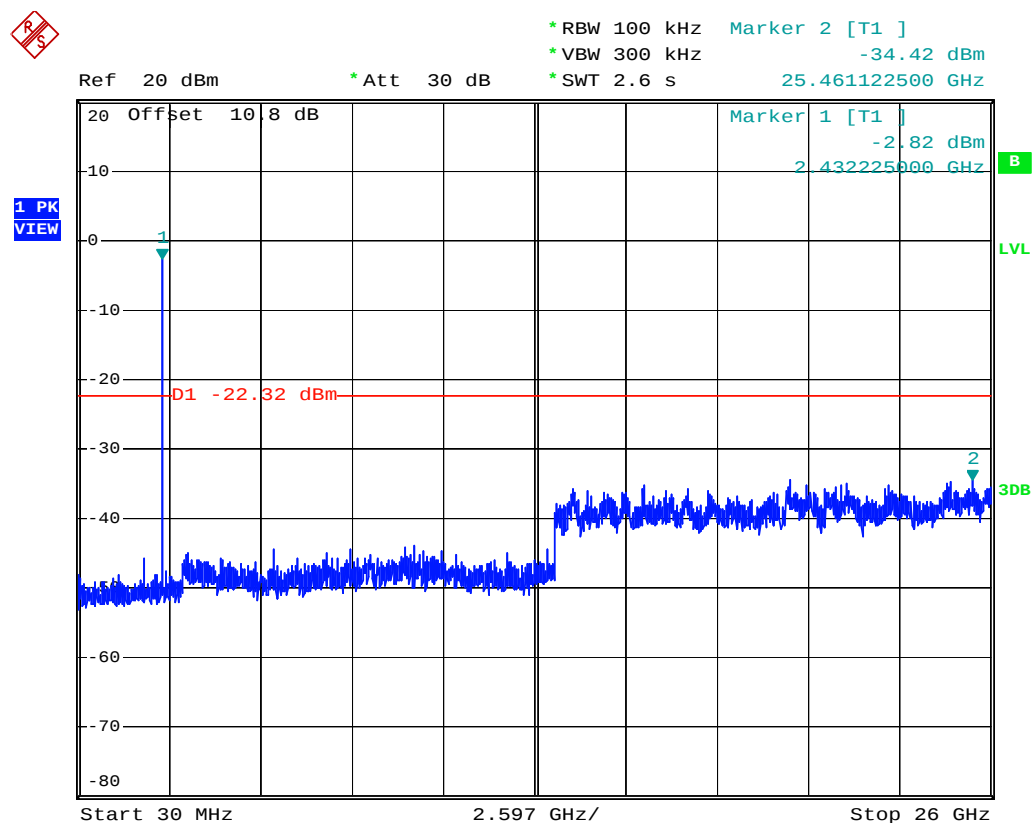

CH11 2462MHz (802.11n)

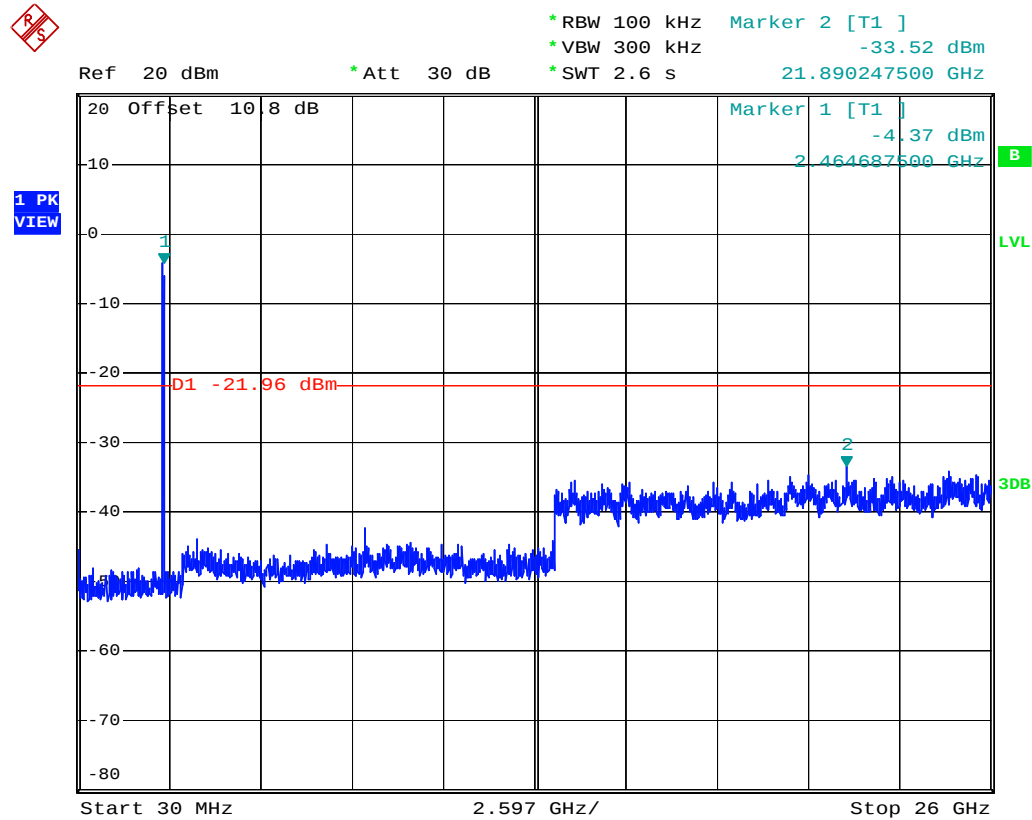


4 Maximum peak output power test

4.1 Limit

According to FCC Part15.247 (b)(3) requirement :

For systems using digital modulation in the 2400–2483.5 MHz bands: The maximum conducted output power shall be less than 1Watt.

4.2 Configuration of Measurement



4.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to DTS test procedure of August 24, 2018 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

For FCC §15.247(b) the power output was measured on the EUT using a 50 ohm SMA cable connected to Spectrum Analyzer. Peak output power was read directly from Spectrum Analyzer.

Set :

- (1) $RBW \geq$ DTS bandwidth, $VBW \geq 3 \times RBW$
- (2) $Span \geq 3 \times EBW$
- (3) Detector = peak, trace mode = max hold
- (4) All trace to fully stabilize
- (5) Use peak marker function to determine the peak amplitude

4.4 Test Result

PASS.

The final test data is shown on as following pages.

Remark:

1. Output power = Reading + factor
2. Margin = Output power - Limit

Maximum output power

Mode : 802.11b (data rate: CCK1M)

Test CH		Output Power (dBm)	Output Power (mW)	Limit (dBm)	Magrin (dB)
CH No.	Freq. (MHz)				
1	2412	10.62	11.53	30	-19.38
6	2437	11.23	13.27	30	-18.77
11	2462	11.36	13.68	30	-18.64

Mode : 802.11g (data rate: OFDM6M)

Test CH		Output Power (dBm)	Output Power (mW)	Limit (dBm)	Magrin (dB)
CH No.	Freq. (MHz)				
1	2412	9.51	8.93	30	-20.49
6	2437	9.73	9.40	30	-20.27
11	2462	9.94	9.86	30	-20.06

Mode : 802.11n (20MHz; data rate: MCS0)

Test CH		Output Power (dBm)	Output Power (mW)	Limit (dBm)	Magrin (dB)
CH No.	Freq. (MHz)				
1	2412	9.46	8.83	30	-20.54
6	2437	9.79	9.53	30	-20.21
11	2462	10.20	10.47	30	-19.80


5 6dB Bandwidth

5.1 Limit

According to FCC Part15.247 (a)(2) requirement :

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz, The minimum 6dB bandwidth shall be at least 500 kHz.

5.2 Configuration of Measurement



5.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to DTS test procedure of August 24, 2018 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

The minimum 6dB bandwidth was measured using a 50 ohm spectrum analyzer.

- (1) RBW = 100kHz
- (2) VBW $\geq 3 \times$ RBW
- (3) Detector = Peak
- (4) Trace mode = Max hold
- (5) Sweep = auto couple
- (6) All trace to fully stabilize
- (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Test Result

PASS.

The final test data is shown on as following pages.

6dB bandwidth

Test Mode : 802.11b (data rate: CCK1M)

Test CH		6dB Bandwidth (MHz)	Limit (kHz)	Result
CH No.	Freq. (MHz)			
1	2412	10.08	>500	Pass
6	2437	9.96	>500	Pass
11	2462	10.02	>500	Pass

Test Mode : 802.11g (data rate: OFDM6M)


Test CH		6dB Bandwidth (MHz)	Limit (kHz)	Result
CH No.	Freq. (MHz)			
1	2412	16.65	>500	Pass
6	2437	16.60	>500	Pass
11	2462	16.60	>500	Pass

Test Mode : 802.11n (20MHz; data rate: MCS0)


Test CH		6dB Bandwidth (MHz)	Limit (kHz)	Result
CH No.	Freq. (MHz)			
1	2412	17.85	>500	Pass
6	2437	17.80	>500	Pass
11	2462	17.80	>500	Pass

6dB Bandwidth


802.11b (data rate: CCK1M)
CH No. 1 (2412 MHz)

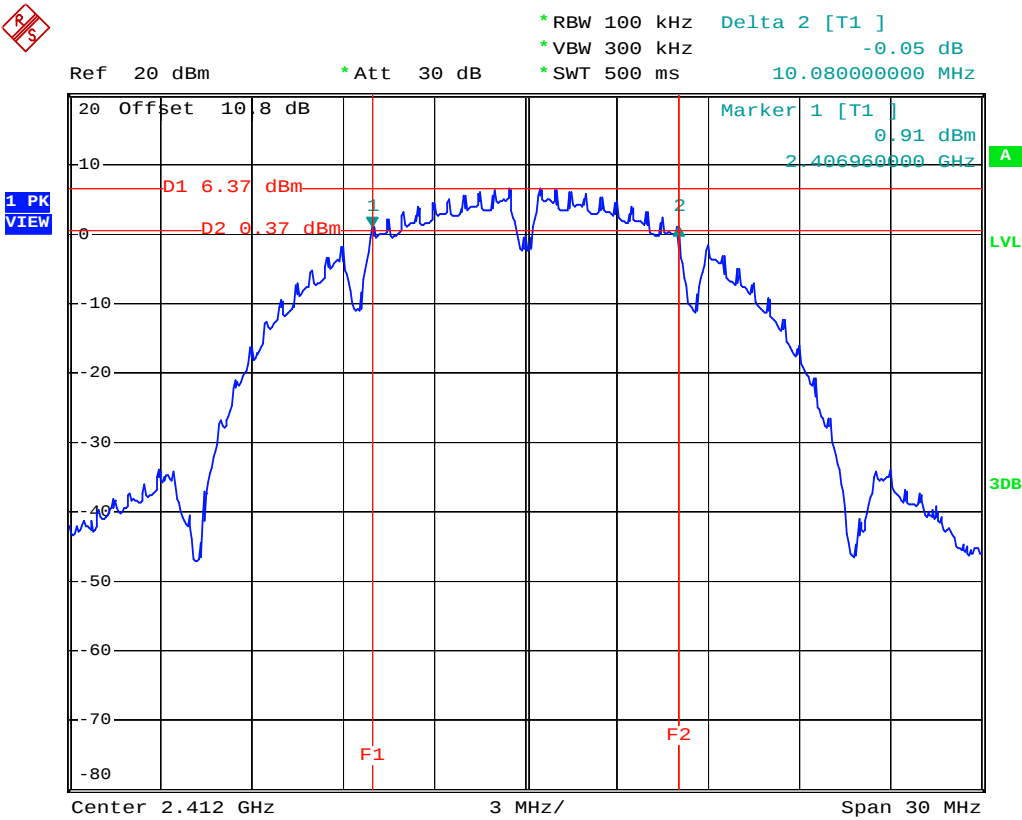

CH No. 6 (2437 MHz)

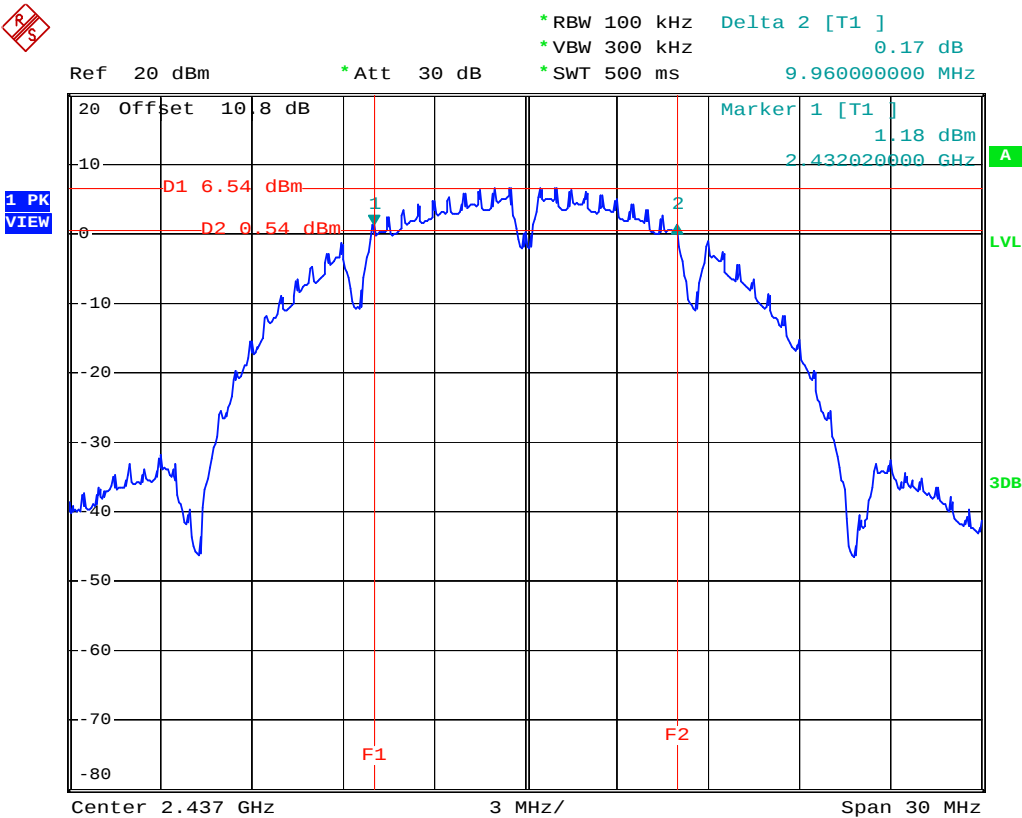


CH No. 11 (2462 MHz)


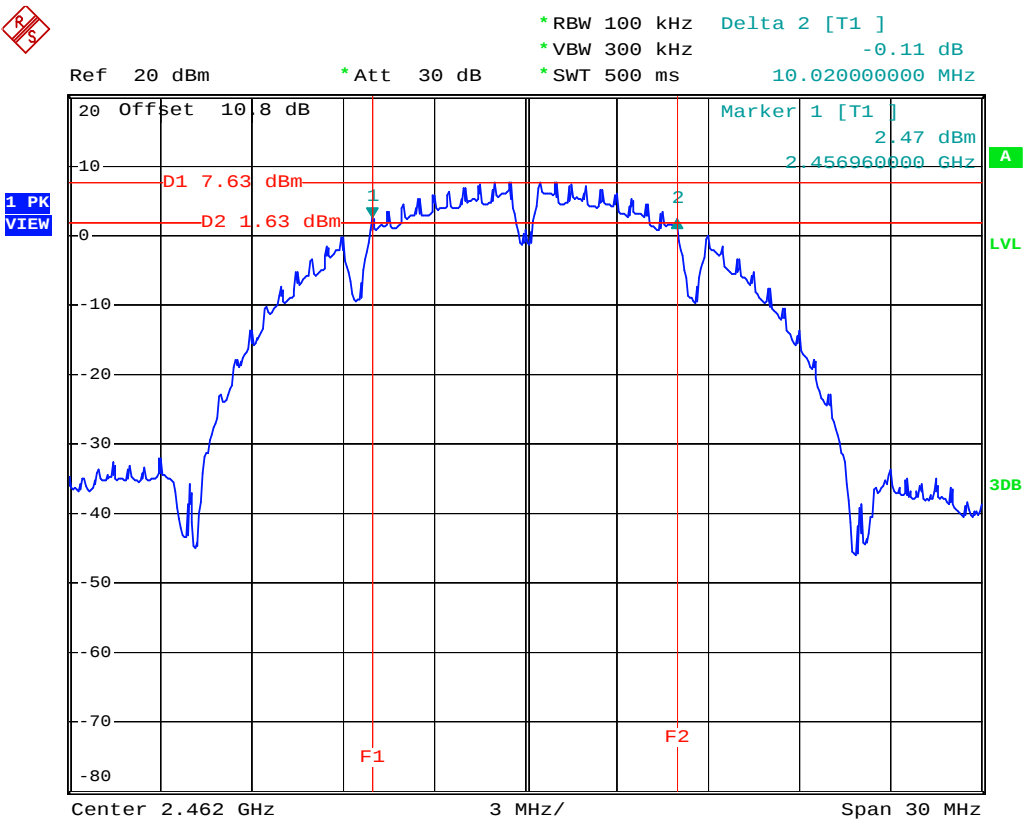


CH No. 1 (2412 MHz)





CH No. 1 (2412 MHz)

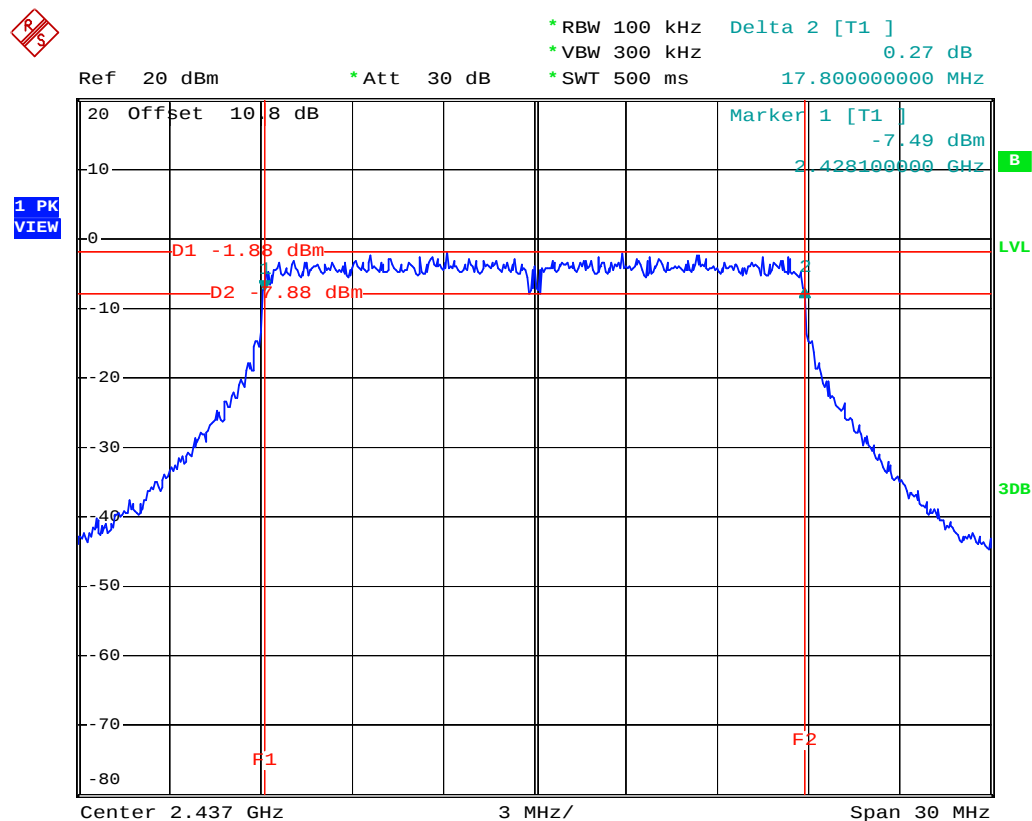




6 Power spectral density

6.1 Limit

According to FCC Part15.247 (e) requirement :

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.2 Configuration of Measurement



6.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to DTS test procedure of August 24, 2018 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

Set::

- (1) Analyzer center frequency to DTS channel center frequency
- (2) The span to 1.5 times the DTS bandwidth
- (3) RBW: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- (4) VBW $\geq 3 \times \text{RBW}$
- (5) Detector = Peak
- (6) Trace mode = Max hold
- (7) Sweep = auto couple
- (8) All trace to fully stabilize
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW
- (10) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat

6.4 Test Result

PASS.

The final test data is shown on as following pages.

Remark:

1. PSD = Reading + factor
2. Margin = Output power – Limit

Power spectral density

802.11b (data rate: CCK1M)

Test CH		PSD	Limit	Result
CH No.	Freq. (MHz)	(dBm/3kHz)	(dBm/3kHz)	
1	2412	-7.53	8	PASS
6	2437	-7.04	8	PASS
11	2462	-6.95	8	PASS

802.11g (data rate: OFDM6M)


Test CH		PSD	Limit	Result
CH No.	Freq. (MHz)	(dBm/3kHz)	(dBm/3kHz)	
1	2412	-6.69	8	PASS
6	2437	-6.47	8	PASS
11	2462	-6.14	8	PASS

802.11n (20MHz; data rate: MCS0)


Test CH		PSD	Limit	Result
CH No.	Freq. (MHz)	(dBm/3kHz)	(dBm/3kHz)	
1	2412	-6.83	8	PASS
6	2437	-6.47	8	PASS
11	2462	-6.35	8	PASS

Power spectral density

802.11b (data rate: CCK1M)
CH No. 1 (2412 MHz)

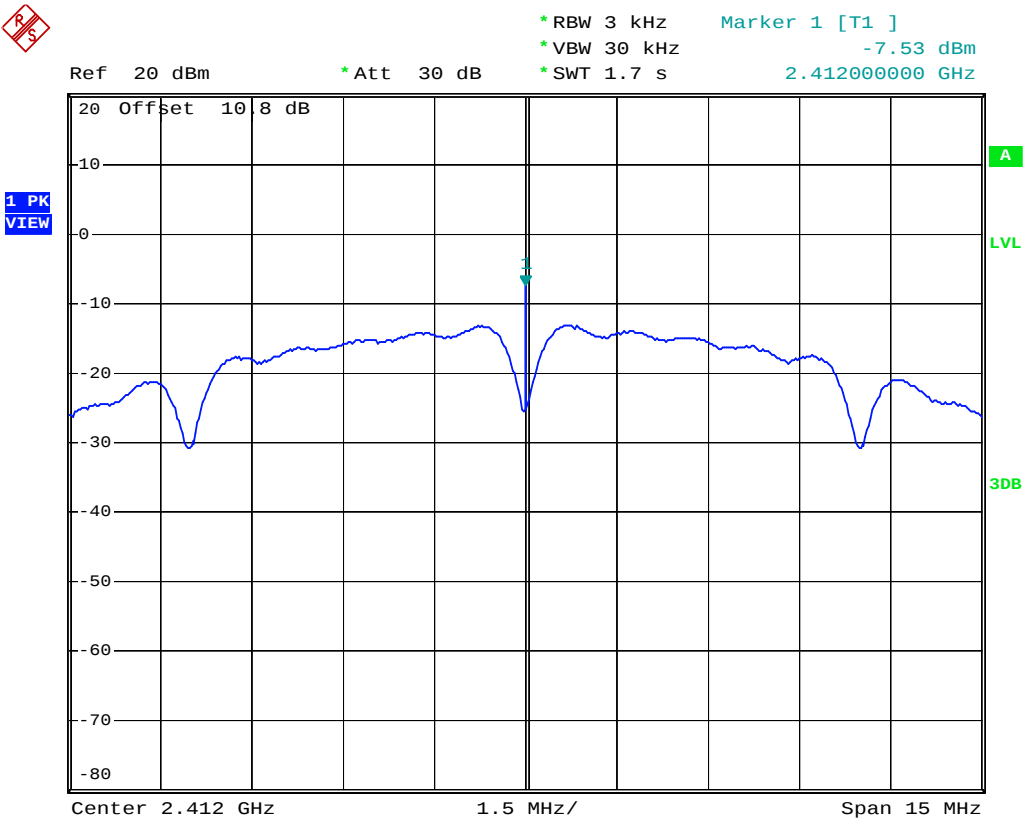


CH No. 6 (2437 MHz)

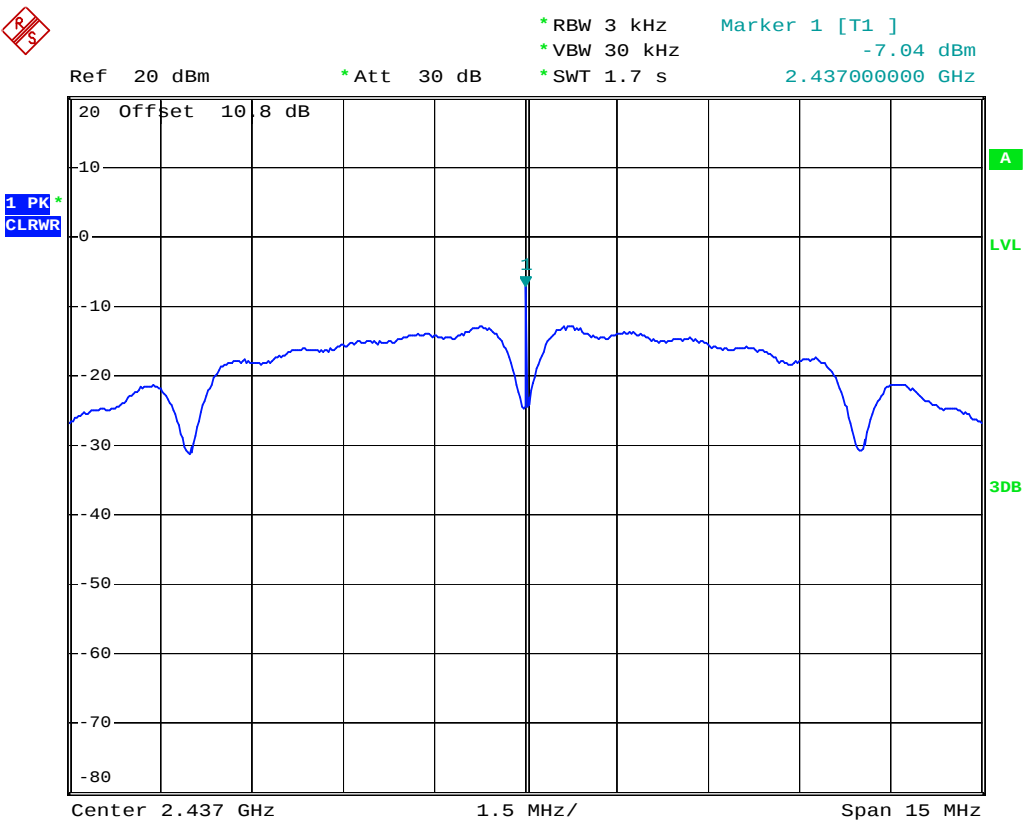







CH No. 11 (2462 MHz)

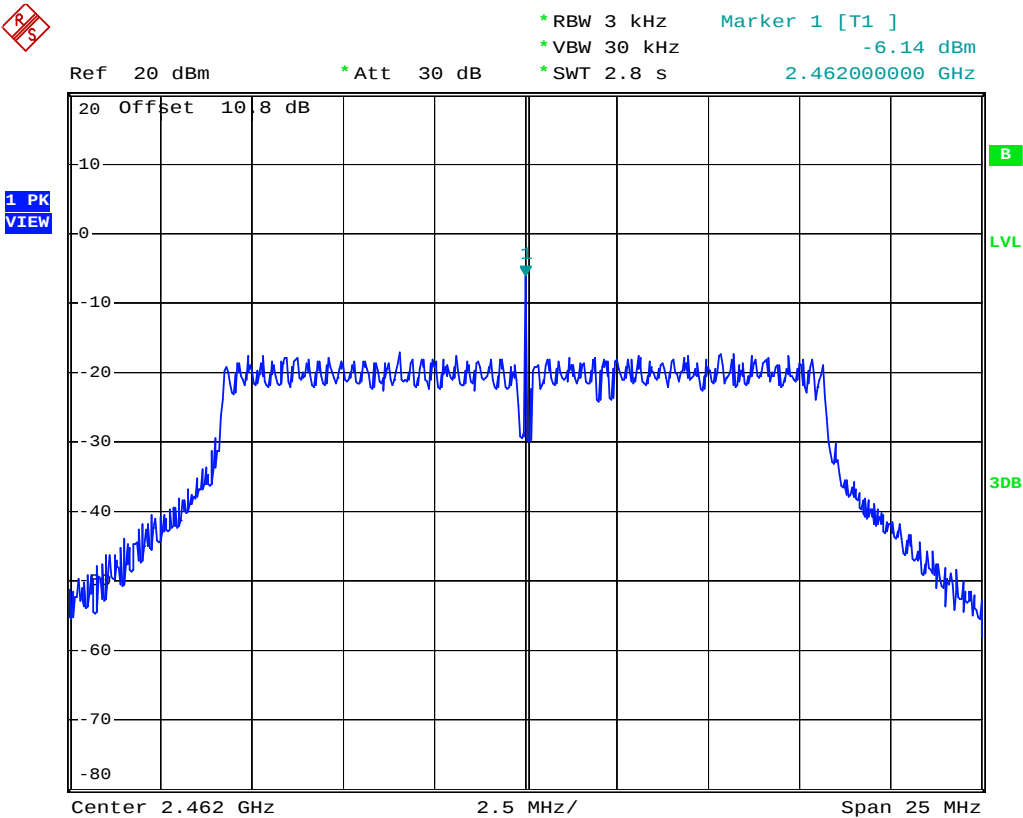


802.11n (20MHz; data rate: MCS0)
CH No. 1 (2412 MHz)

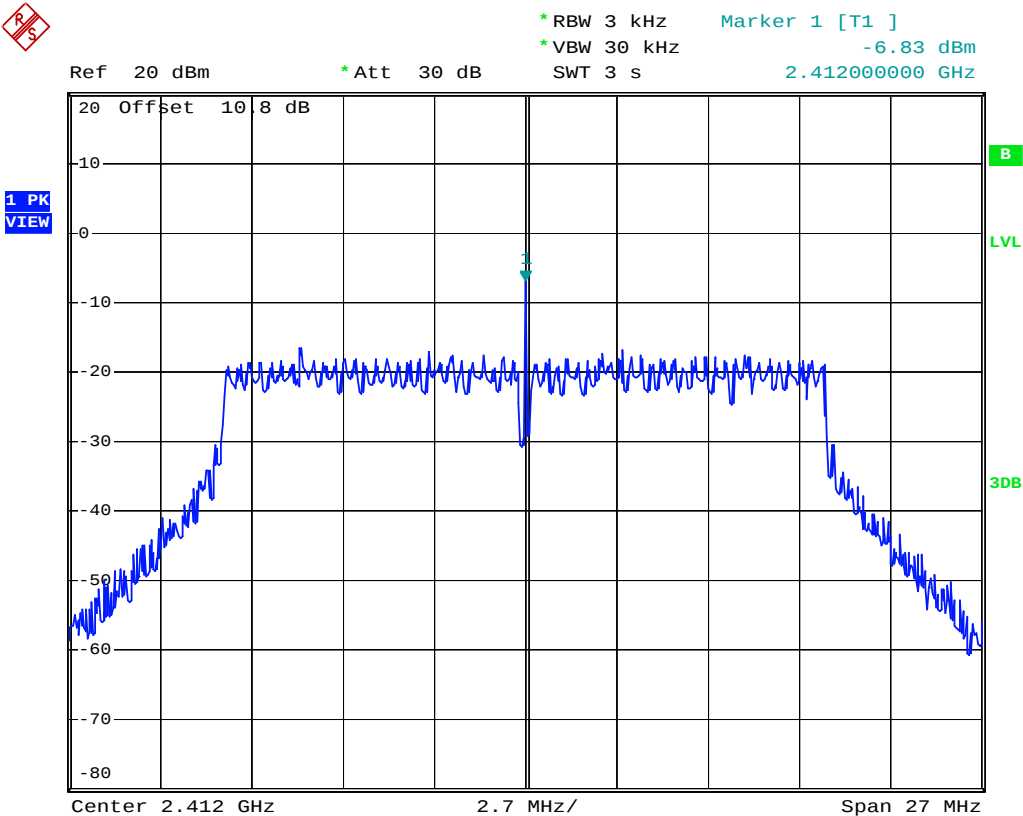

CH No. 6 (2437 MHz)

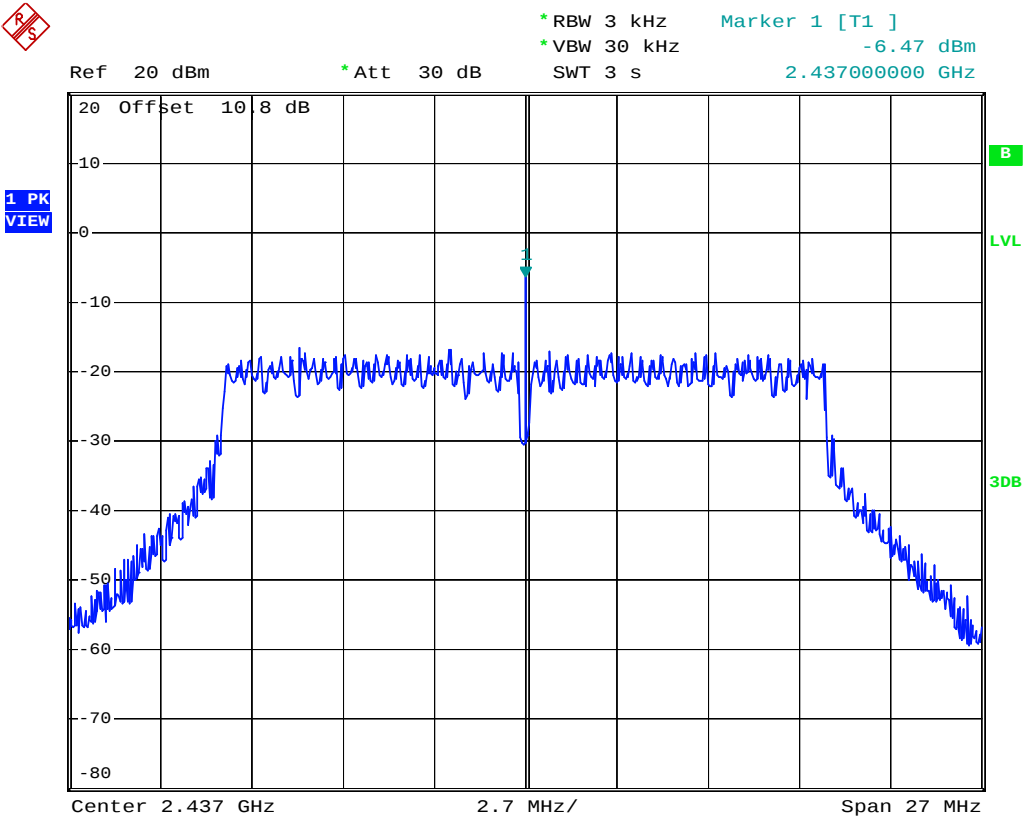

CH No. 11 (2462 MHz)

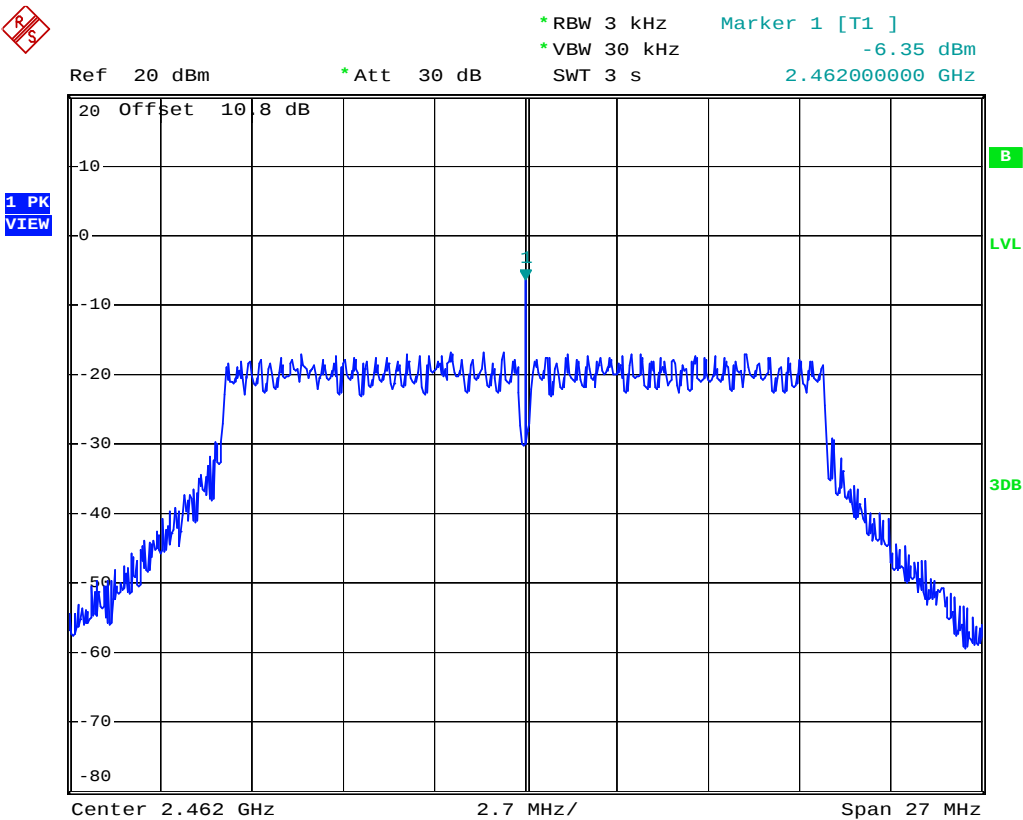


7 Emission on the Band Edge test

7.1 Limit


In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.2 Configuration of Measurement

Radiated measurement

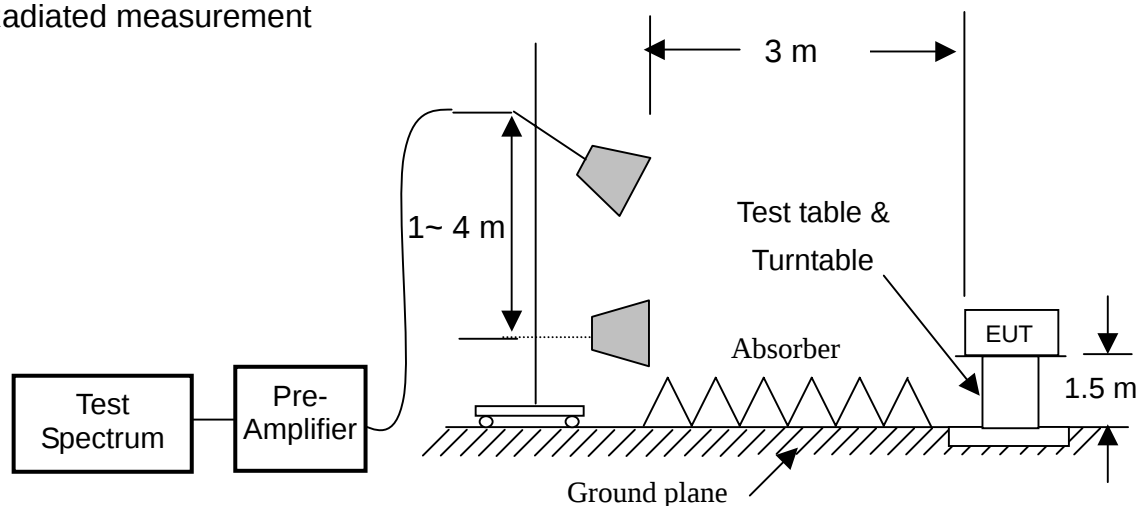

Conducted measurement



7.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to DTS test procedure of August 24, 2018 KDB558074 D01 for compliance to FCC 47CFR 15.247 requirements.

Set RBW =1MHz, VBW= RBW for peak, and RBW =1MHz, VBW=10Hz for average.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

7.4 Test Result

PASS.

The final test data is shown on as following pages.

Band-edge_Radiated

802.11b (data rate: CCK1M)

Test CH		Det. Mode	Reading (dBuV)	Factor (dB/m)	Maximum level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
CH No.	Freq. (MHz)							
1 (2412MHz)	2310~2390	PK	80.86	-19.33	61.53	74	-12.47	PASS
		AV	53.71	-19.43	34.28	54	-19.72	PASS
11 (2462MHz)	2483.5~2500	PK	63.16	-18.79	44.37	74	-29.63	PASS
		AV	58.08	-18.91	39.17	54	-14.83	PASS

802.11g (data rate: OFDM6M)

Test CH		Det. Mode	Reading (dBuV)	Factor (dB/m)	Maximum level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
CH No.	Freq. (MHz)							
1 (2412MHz)	2310~2390	PK	63.81	-19.53	44.28	74	-29.72	PASS
		AV	50.35	-19.33	31.02	54	-22.98	PASS
11 (2462MHz)	2483.5~2500	PK	64.94	-18.89	46.05	74	-27.95	PASS
		AV	62.29	-18.91	43.38	54	-10.62	PASS

802.11n (20MHz; data rate: MCS0)

Test CH		Det. Mode	Reading (dBuV)	Factor (dB/m)	Maximum level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result
CH No.	Freq. (MHz)							
1 (2412MHz)	2310~2390	PK	64.27	-19.58	44.69	74	-29.31	PASS
		AV	50.29	-19.21	30.85	54	-23.15	PASS
11 (2462MHz)	2483.5~2500	PK	63.29	-18.84	44.45	74	-29.55	PASS
		AV	62.01	-18.91	43.10	54	-10.90	PASS


Remark : Maximum Level = Reading + Factor
Factor = Antenna Factor + Cable Loss - Preamp
Margin = Maximum level - Limit

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11b CH1 2412MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : HORIZONTAL
TEMP/HUM : 24.5°C/51%

Data:59

2018-08-28

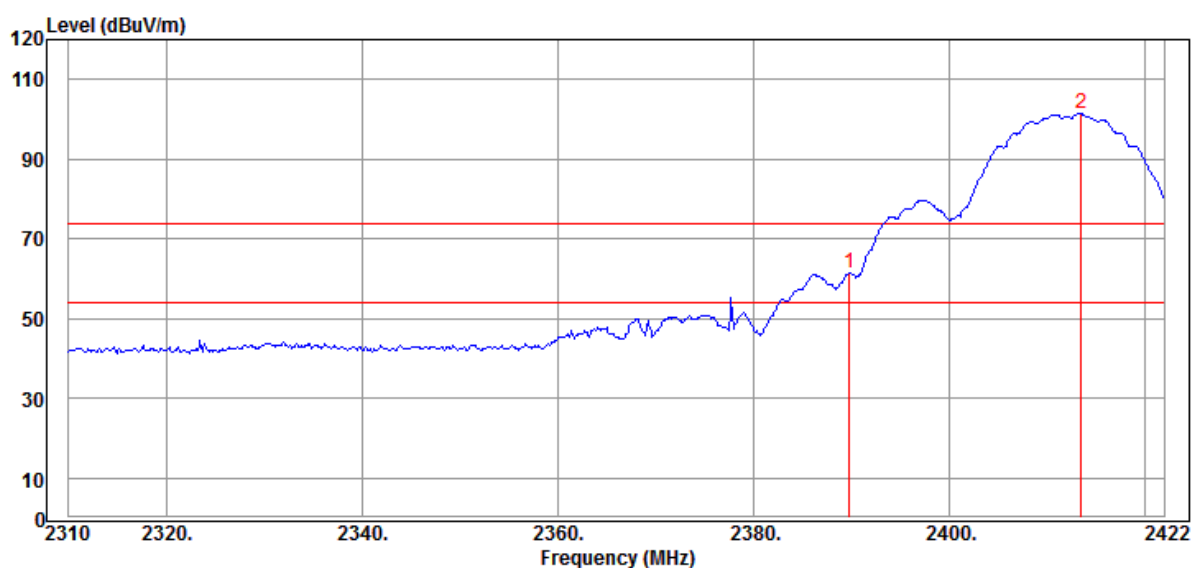


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.856	80.86	-19.33	61.53	74.00	-12.47	Peak
* 2	2413.488	120.53	-19.23	101.30	74.00	27.30	Peak

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11b CH1 2412MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:62

2018-08-28

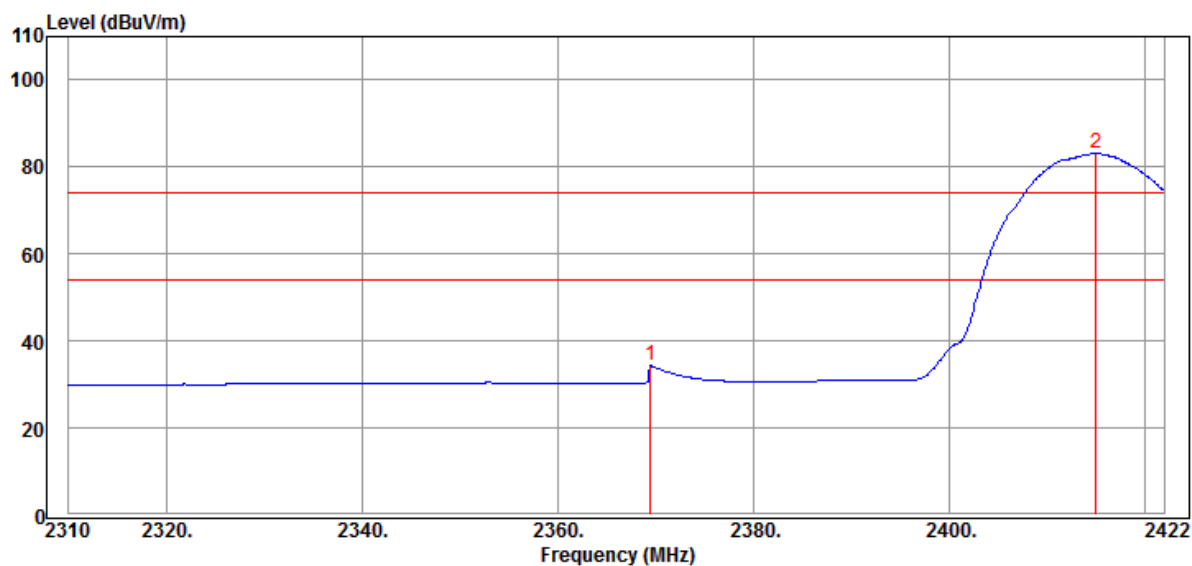


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2369.472	53.71	-19.43	34.28	54.00	-19.72	Average
* 2	2415.056	102.24	-19.21	83.03	54.00	29.03	Average

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11b CH11 2462MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:64

2018-08-28

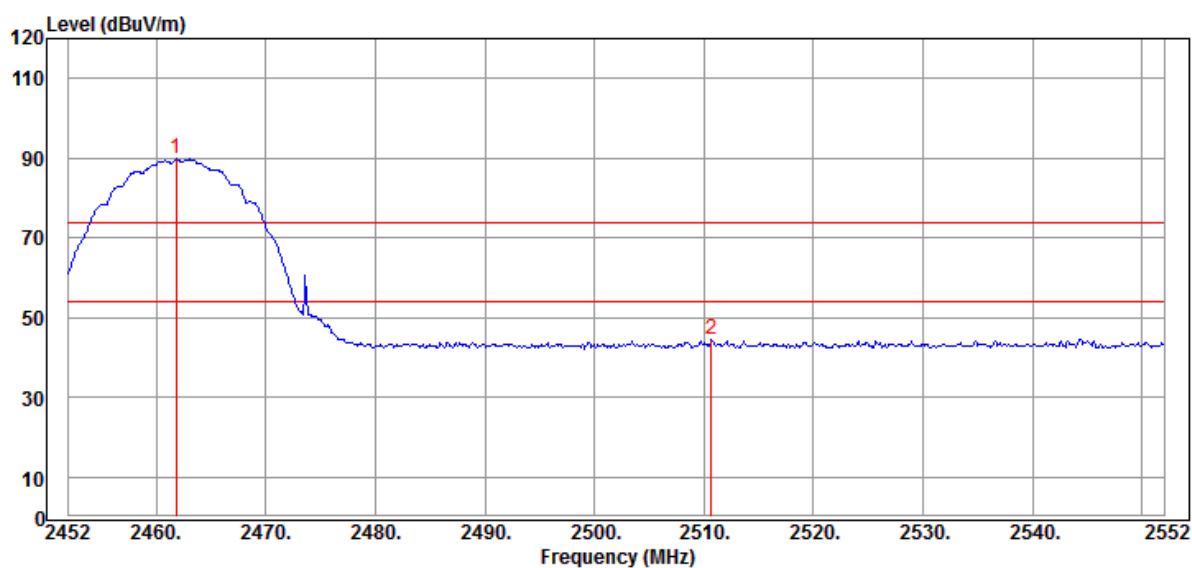


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark	
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
*	1	2461.800	108.70	-19.00	89.70	74.00	15.70	Peak
	2	2510.700	63.16	-18.79	44.37	74.00	-29.63	Peak

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11b CH11 2462MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:67

2018-08-28

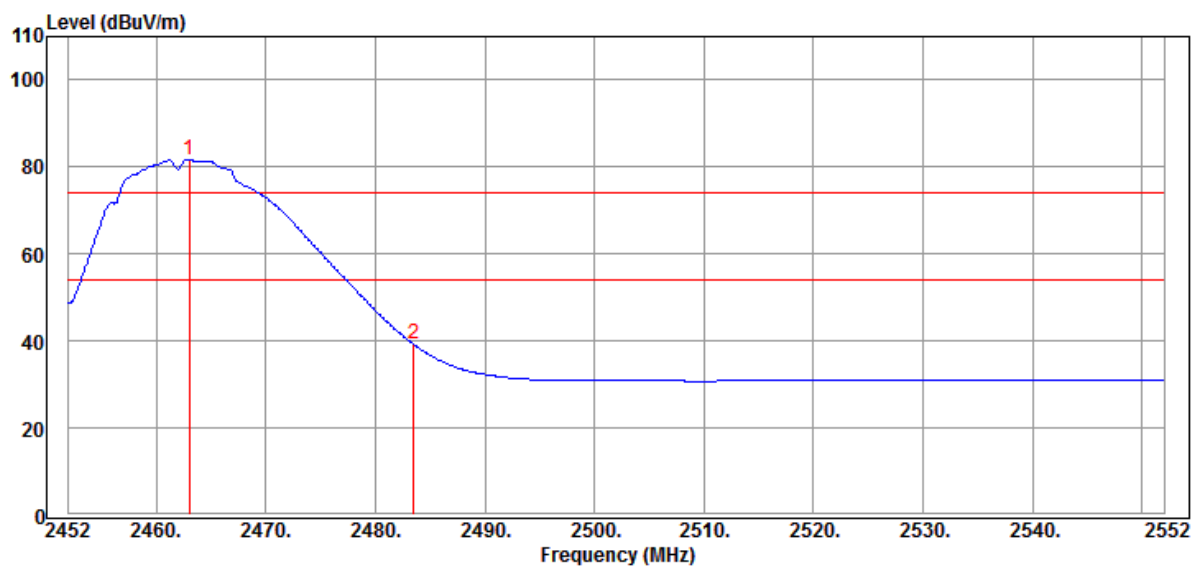


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark	
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
*	1	2463.000	100.74	-19.00	81.74	54.00	27.74	Average
	2	2483.500	58.08	-18.91	39.17	54.00	-14.83	Average

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11g CH1 2412MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:68

2018-08-28

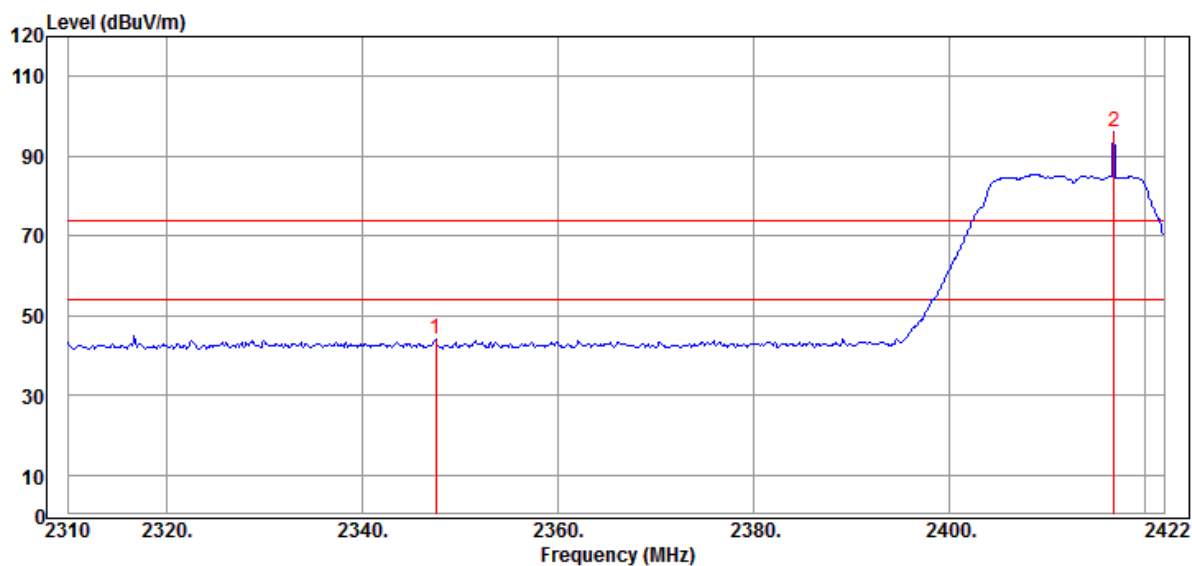


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2347.520	63.81	-19.53	44.28	74.00	-29.72	Peak
* 2	2416.848	115.30	-19.21	96.09	74.00	22.09	Peak

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11g CH1 2412MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:70

2018-08-28

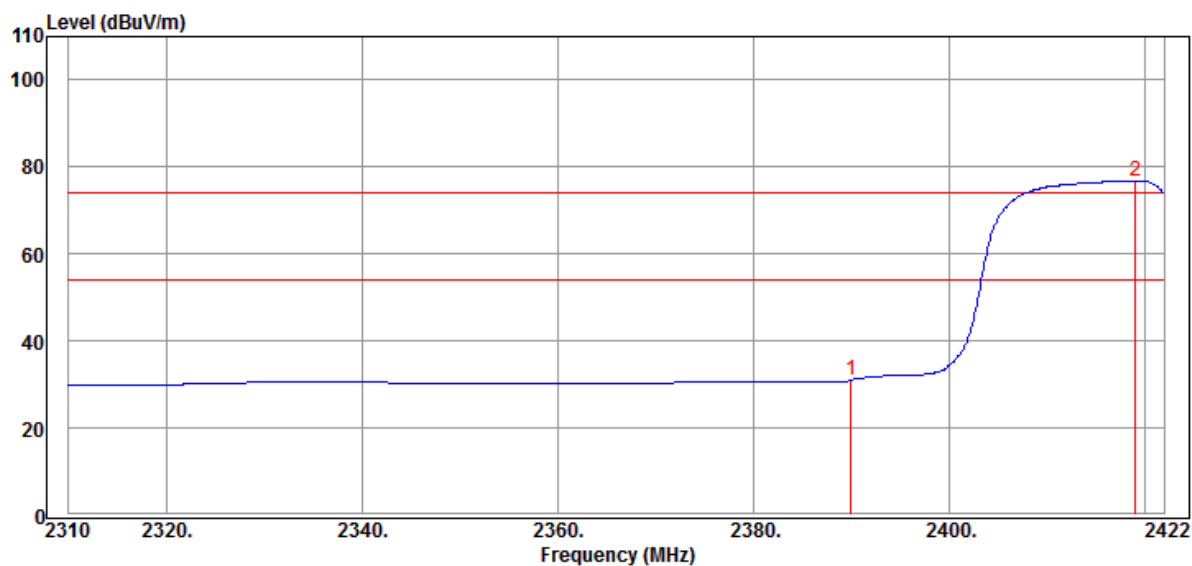


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2389.968	50.35	-19.33	31.02	54.00	-22.98	Average
* 2	2419.088	95.93	-19.20	76.73	54.00	22.73	Average

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11g CH11 2462MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:71

2018-08-28

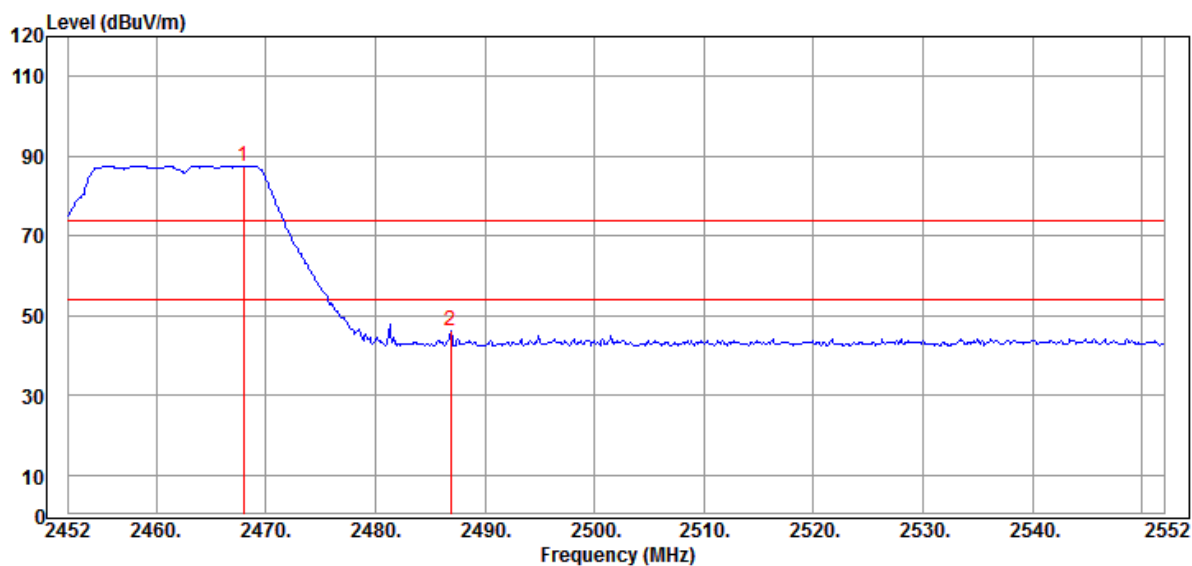


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
* 1	2468.000	106.61	-18.98	87.63	74.00	13.63	Peak
2	2486.900	64.94	-18.89	46.05	74.00	-27.95	Peak

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11g CH11 2462MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:72

2018-08-28

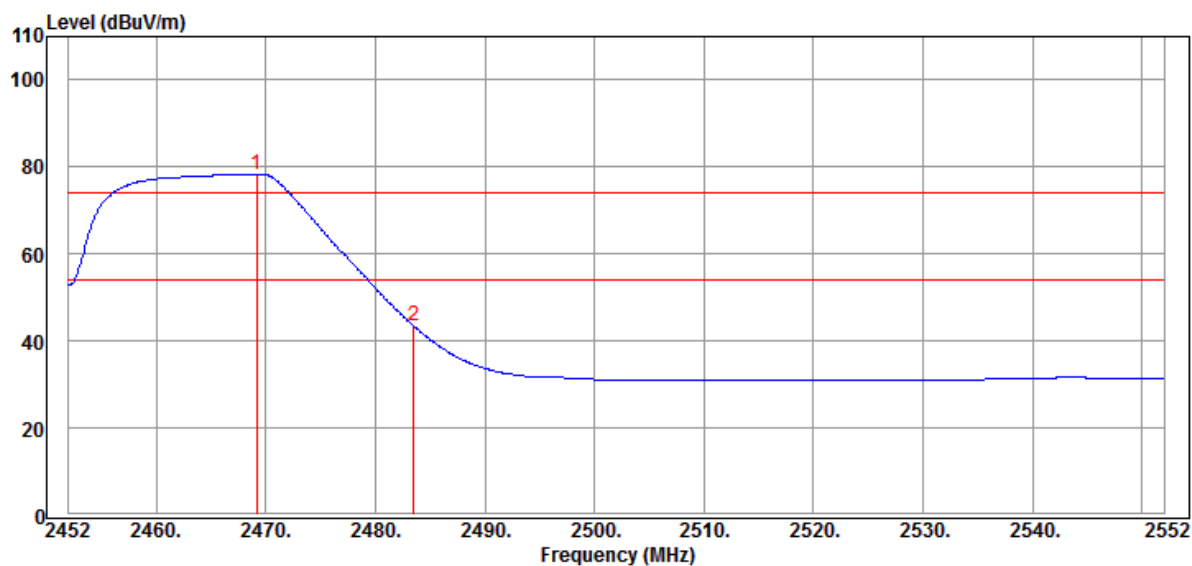


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark	
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
*	1	2469.200	97.28	-18.97	78.31	54.00	24.31	Average
	2	2483.500	62.29	-18.91	43.38	54.00	-10.62	Average

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11n CH1 2412MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:73

2018-08-28

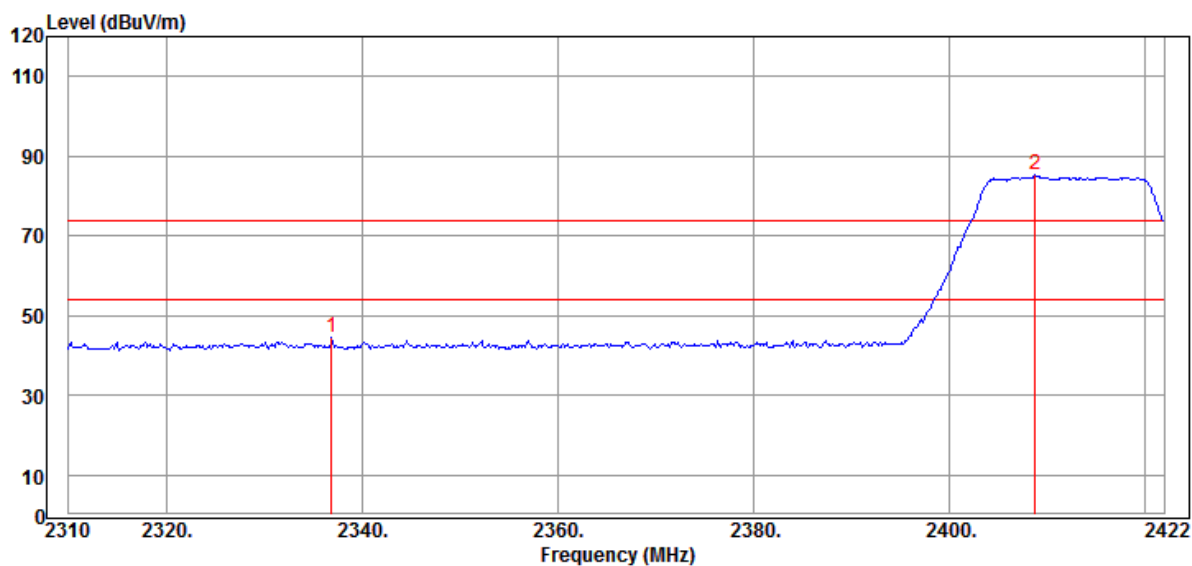


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2336.880	64.27	-19.58	44.69	74.00	-29.31	Peak
* 2	2408.784	104.49	-19.25	85.24	74.00	11.24	Peak

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11n CH1 2412MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:74

2018-08-28

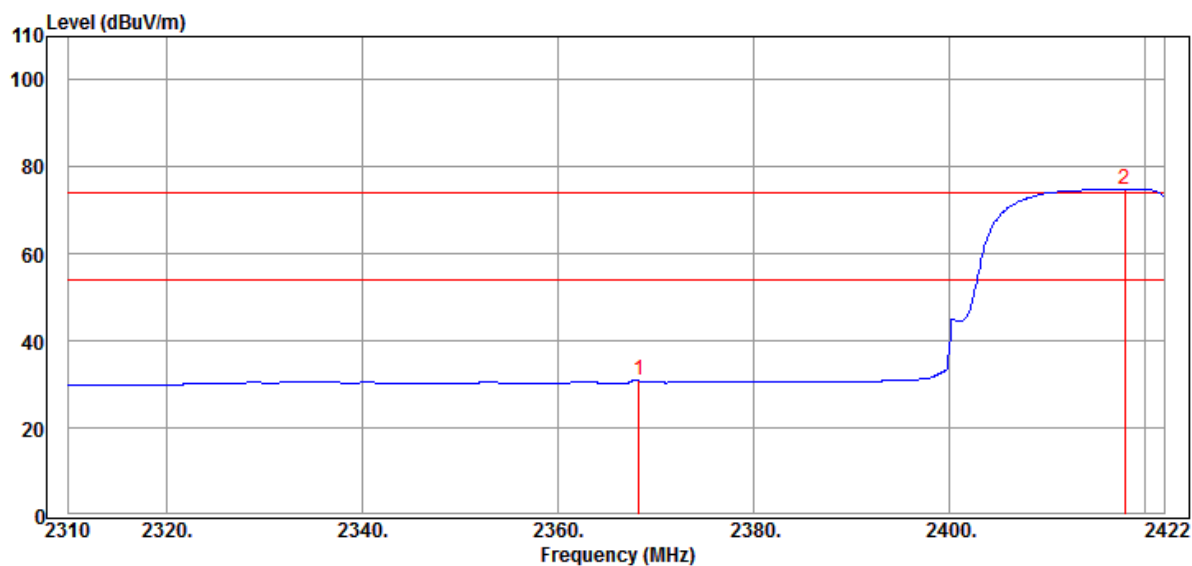


Item Mark	Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2368.352	50.29	-19.44	30.85	54.00	-23.15	Average
* 2	2417.968	94.02	-19.21	74.81	54.00	20.81	Average

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11n CH11 2462MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:75

2018-08-28

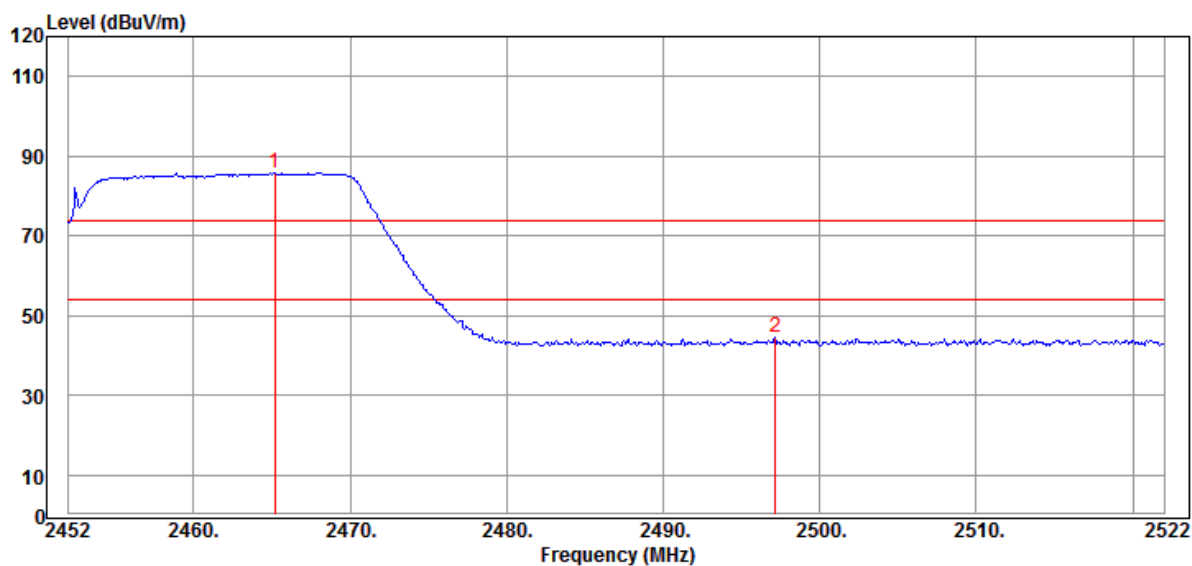


Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark	
Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
*	1	2465.160	104.81	-18.98	85.83	74.00	11.83	Peak
	2	2497.150	63.29	-18.84	44.45	74.00	-29.55	Peak

CLIENT: Medical Intubation Technology Corp.
EUT: VIDEOSCOPE SYSTEM
MODEL: F1700
RATING: 120Vac, 60Hz
COMMENT: 802.11n CH11 2462MHz

OPERATOR : Ivan
TEST SITE : Chamber 3
TEST DISTANCE : 3m
POLARIZATION : VERTICAL
TEMP/HUM : 24.5°C/51%

Data:76

2018-08-28

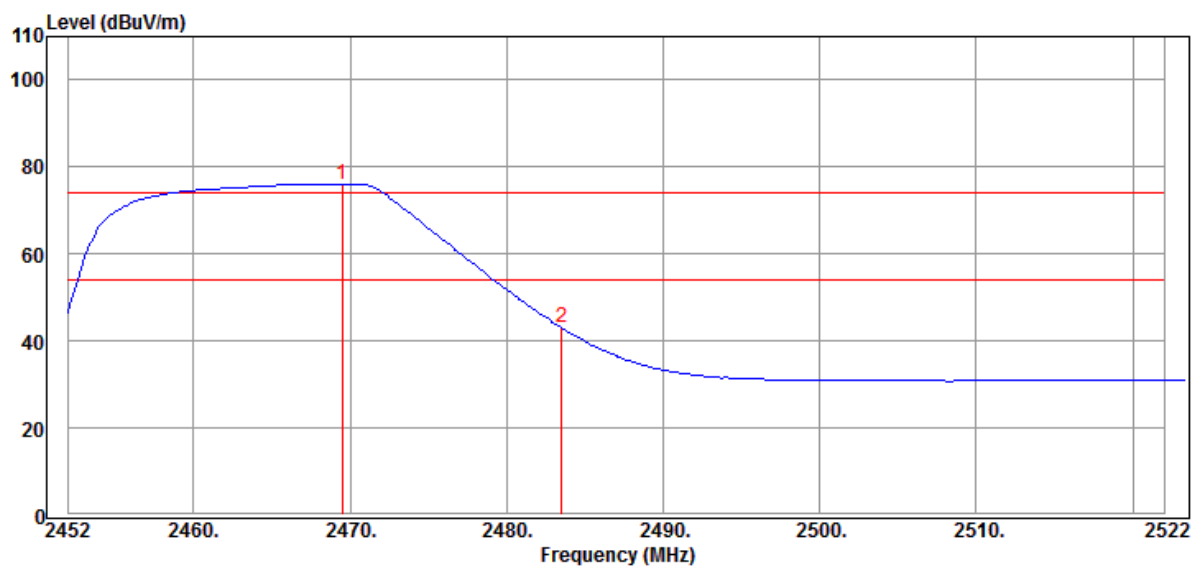

	Item	Freq.	Reading	Factor	Level	Limit	Margin	Remark
	Mark	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
*	1	2469.500	95.14	-18.97	76.17	54.00	22.17	Average
	2	2483.500	62.01	-18.91	43.10	54.00	-10.90	Average

Band-edge_Conducted

802.11b (data rate: CCK1M)

Test CH		Detector Mode	Measure Result (dBm)	Limit (dBm)	Margin (dB)	Result
CH No.	Freq. (MHz)					
1	Marker 1: 2399.40	PK	-36.54	-13.64	-22.90	PASS
11	Marker 1: 2484.60	PK	-46.90	-12.47	-34.43	PASS

802.11g (data rate: OFDM6M)


Test CH		Detector Mode	Measure Result (dBm)	Limit (dBm)	Margin (dB)	Result
CH No.	Freq. (MHz)					
1	Marker 1: 2399.33	PK	-36.58	-22.79	-13.79	PASS
11	Marker 1: 2485.00	PK	-47.61	-22.69	-24.92	PASS

802.11n (20MHz; data rate: MCS0)


Test CH		Detector Mode	Measure Result (dBm)	Limit (dBm)	Margin (dB)	Result
CH No.	Freq. (MHz)					
1	Marker 1: 2399.33	PK	-37.66	-22.69	-14.97	PASS
11	Marker 1: 2486.83	PK	-47.35	-21.96	-25.39	PASS

Remark : Margin = Measure Result - Limit


802.11b CH1 2412MHz

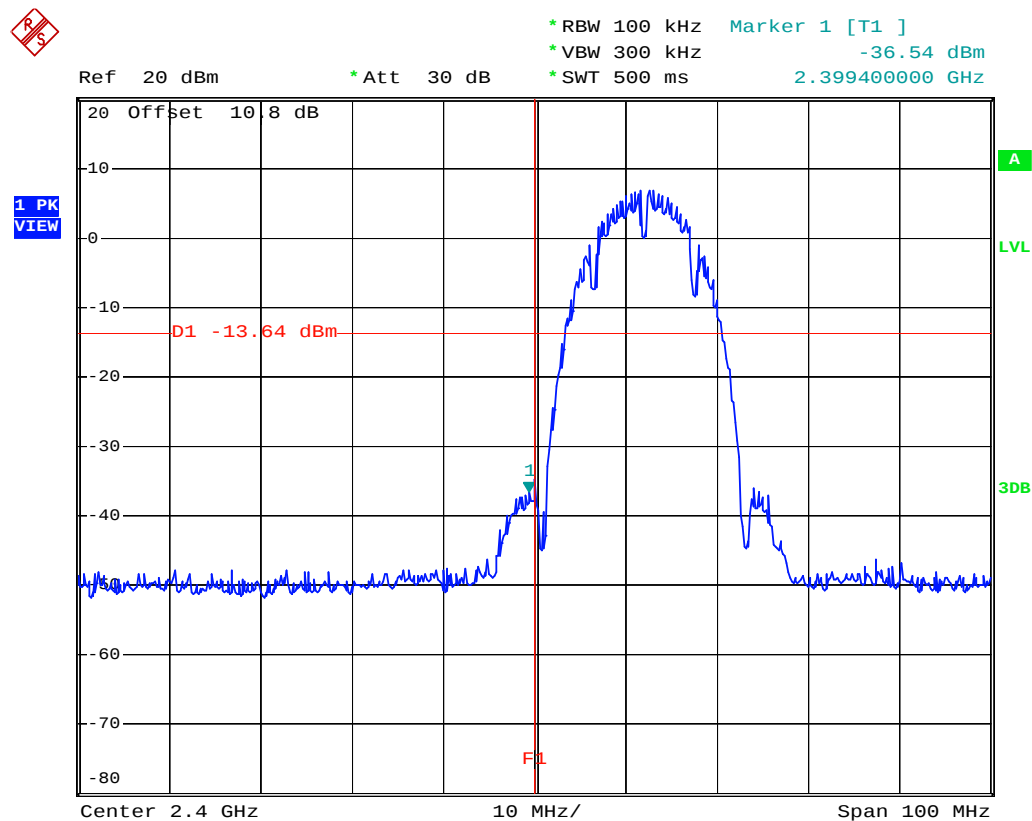


802.11b CH11 2462MHz

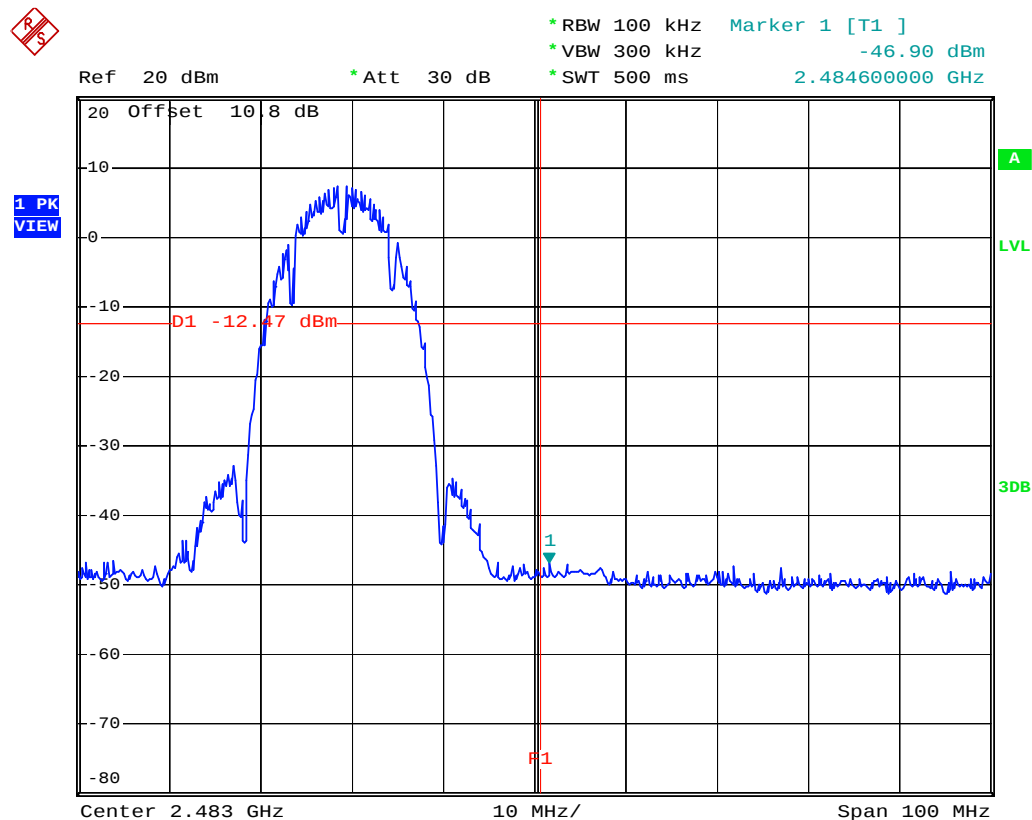


802.11g CH1 2412MHz

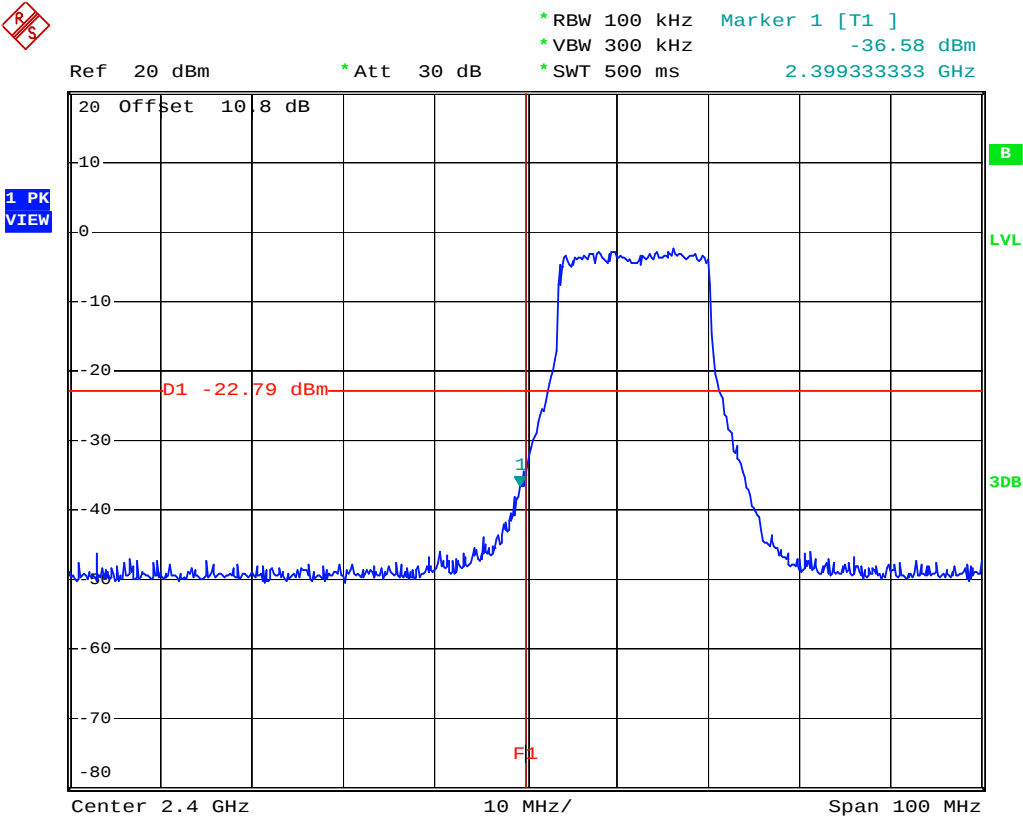


802.11g CH11 2462MHz

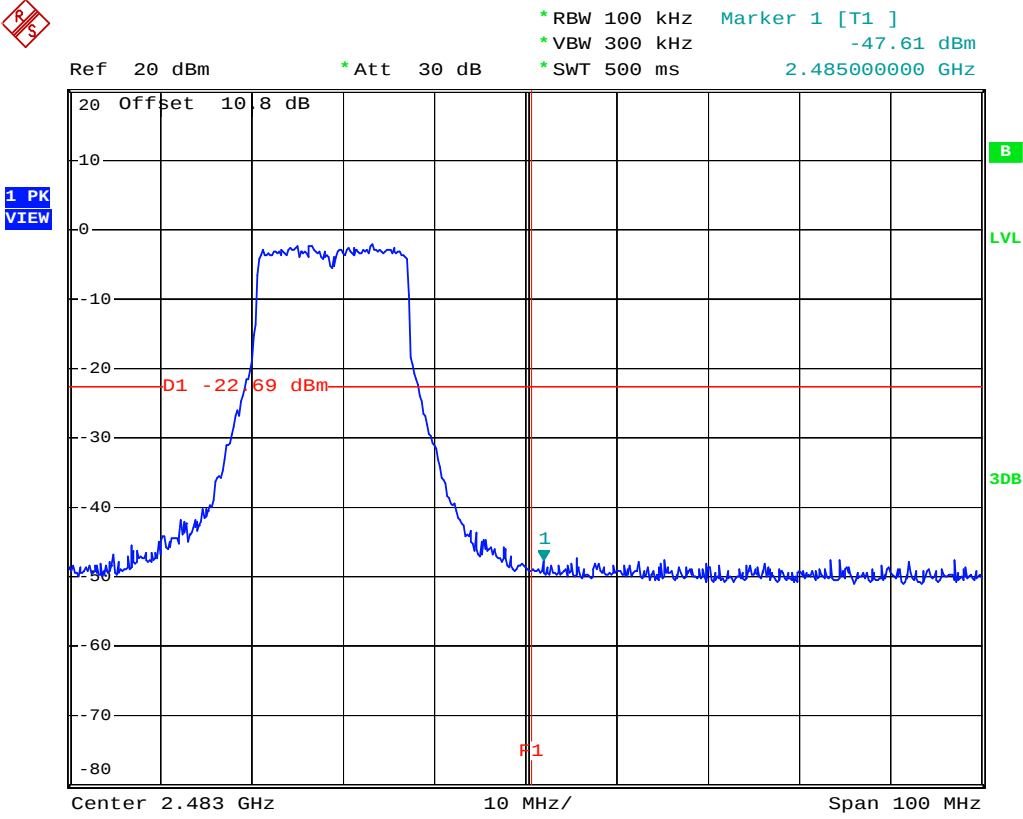

802.11n CH1 2412MHz

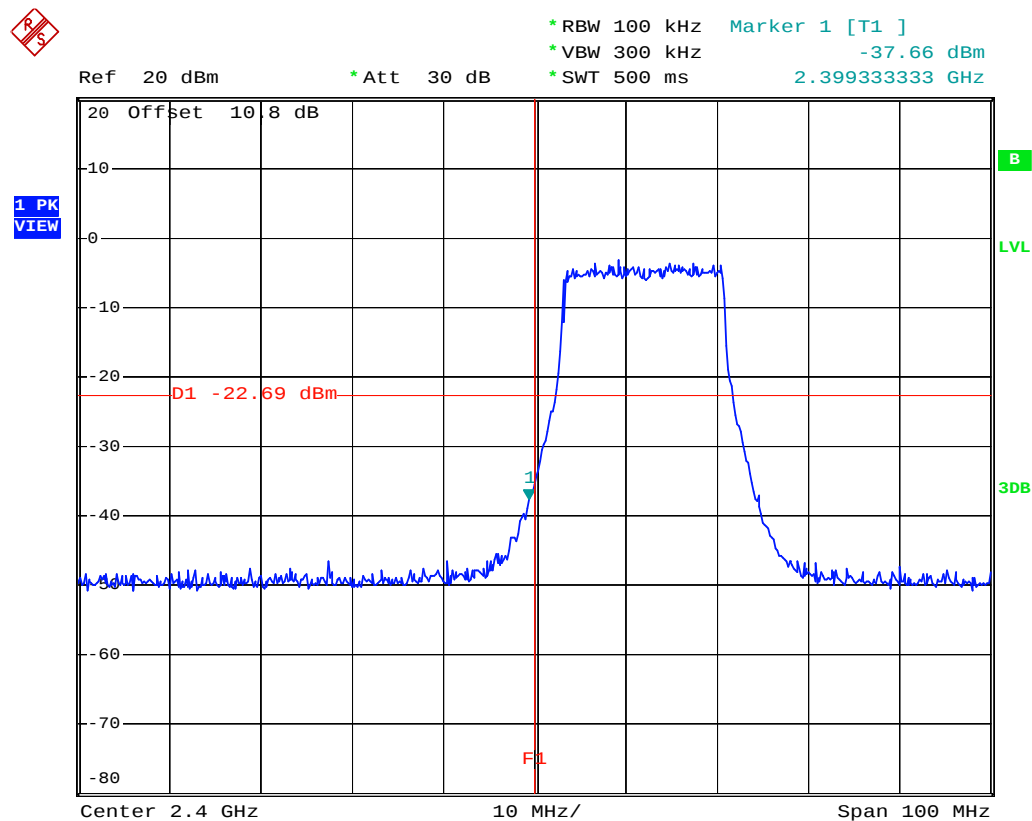

802.11n CH11 2462MHz

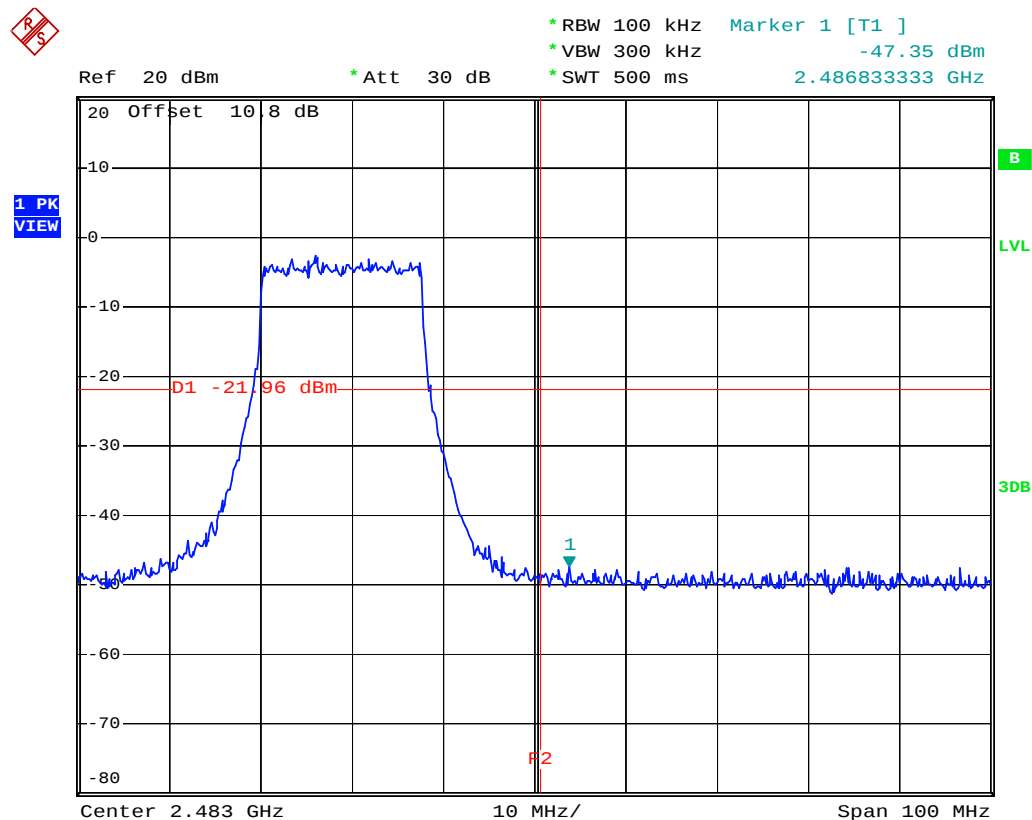


8 AC Power Line Conducted Emission test

8.1 Limit

Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)
0.15 to 0.5	66 to 56	56 to 46
> 0.5 to 5	56	46
> 5 to 30	60	50

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 Configuration of Measurement

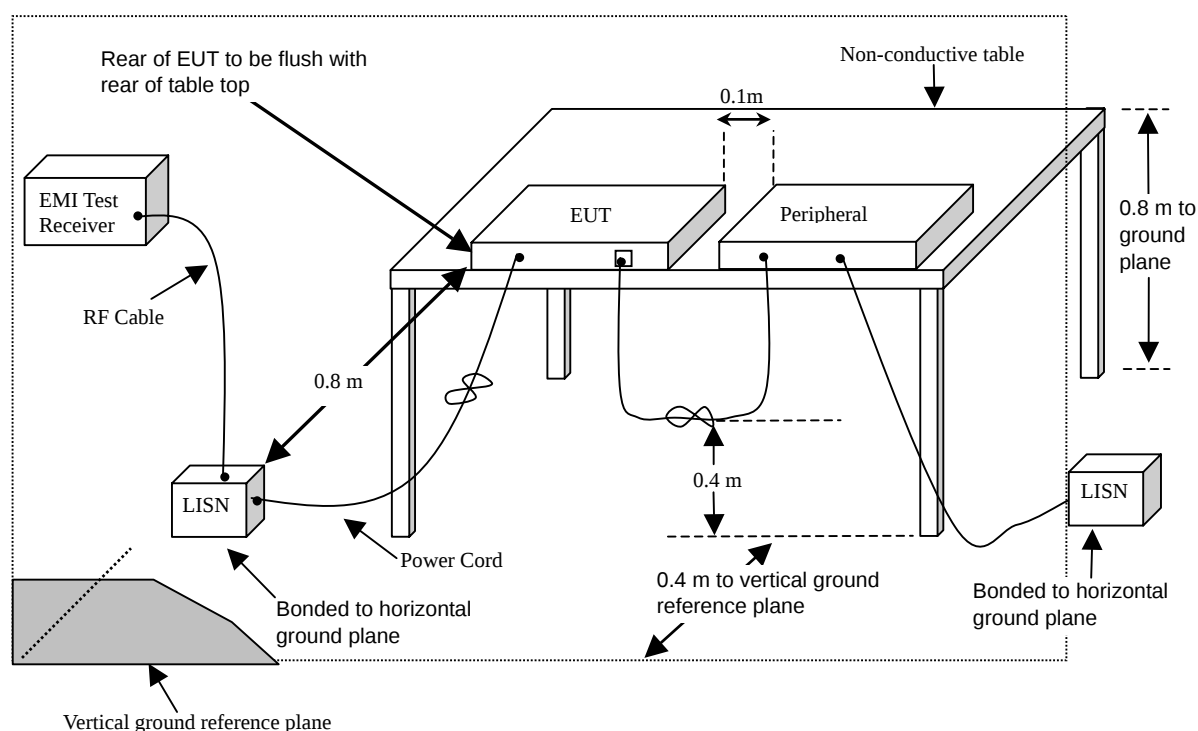

8.3 Test Procedures

The EUT was setup to ANSI C63.10, 2013 requirements.

- 1) The EUT was placed 80cm height above ground on a non-conductive table and vertical conducting plane located 40cm to the rear of the EUT.
- 2) The EUT was connected to the main power through Line Impedance Stabilization Networks (LISN). This setup provided a 50ohm/50mH coupling impedance for the measuring equipment. The auxiliary equipment will place in secondary LISN
- 3) Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10, 2013 on conducted measurement.

8.4 Test Result

PASS.

The final test data is shown on as following pages.

Factor = Insertion Loss + Cable Loss

Level = Reading + Factor

Margin = Level - Limit

Power Line Conducted Test Data

CLIENT: Medical Intubation Technology Corp.

EUT: VIDEOSCOPE SYSTEM

MODEL: F1700

RATING: 120Vac, 60Hz

COMMENT: Woking Mode

OPERATOR: Sam


TEST SITE: Conducted 1

POLARIZATION: Line

TEMP/HUM: 24.3°C / 56%

Data:6

2018-10-09

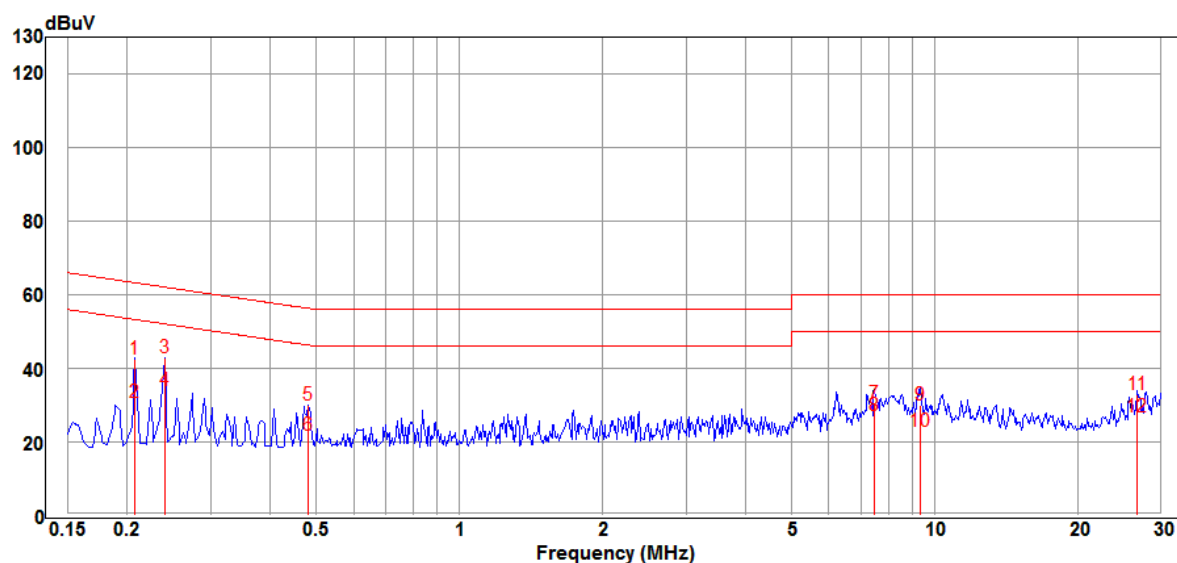

Item Mark	Freq. MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Remark
1	0.2083	32.25	10.30	42.55	63.27	-20.72	QP
2	0.2083	20.55	10.30	30.85	53.27	-22.42	Average
3	0.2404	32.46	10.35	42.81	62.08	-19.27	QP
4	0.2404	23.53	10.35	33.88	52.08	-18.20	Average
5	0.4812	19.36	10.61	29.97	56.32	-26.35	QP
6	0.4812	11.28	10.61	21.89	46.32	-24.43	Average
7	7.4860	18.98	11.39	30.37	60.00	-29.63	QP
8	7.4860	15.71	11.39	27.10	50.00	-22.90	Average
9	9.3520	18.68	11.21	29.89	60.00	-30.11	QP
10	9.3520	11.60	11.21	22.81	50.00	-27.19	Average
11	26.6990	21.26	11.62	32.88	60.00	-27.12	QP
12	26.6990	15.08	11.62	26.70	50.00	-23.30	Average

Power Line Conducted Test Data

CLIENT: Medical Intubation Technology Corp.

OPERATOR: Sam

EUT: VIDEOSCOPE SYSTEM

TEST SITE: Conducted 1

MODEL: F1700

POLARIZATION: Neutral


RATING: 120Vac, 60Hz

TEMP/HUM: 24.3°C / 56%

COMMENT: Woking Mode

Data:5

2018-10-09

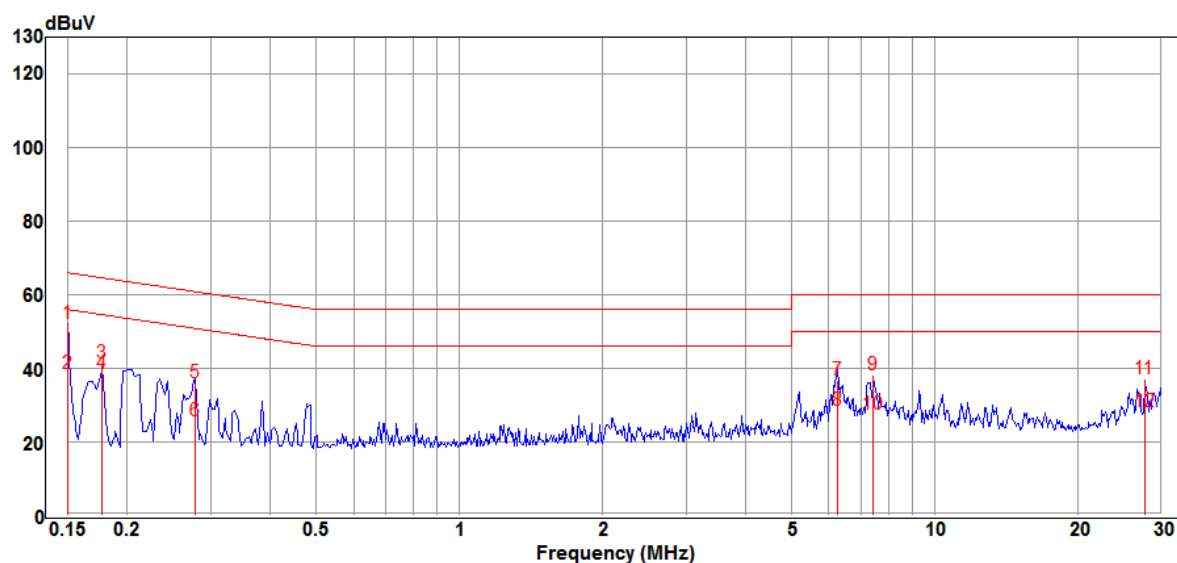

Item Mark	Freq. MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Remark
1	0.1500	41.86	10.25	52.11	66.00	-13.89	QP
2	0.1500	28.28	10.25	38.53	56.00	-17.47	Average
3	0.1777	31.14	10.30	41.44	64.59	-23.15	QP
4	0.1777	28.18	10.30	38.48	54.59	-16.11	Average
5	0.2788	25.60	10.44	36.04	60.85	-24.81	QP
6	0.2788	15.19	10.44	25.63	50.85	-25.22	Average
7	6.2520	25.53	11.32	36.85	60.00	-23.15	QP
8	6.2520	17.30	11.32	28.62	50.00	-21.38	Average
9	7.4460	26.60	11.47	38.07	60.00	-21.93	QP
10	7.4460	15.97	11.47	27.44	50.00	-22.56	Average
11	27.7080	25.42	11.88	37.30	60.00	-22.70	QP
12	27.7080	16.23	11.88	28.11	50.00	-21.89	Average