

## Test Report

Prepared for: Radio Active Designs

Model: UV-1G Basestation

Description: Wireless Intercom System

FCC ID: 2AA6F-UV-1GBS

Part 15.236

Date of Issue: November 16, 2020

On the behalf of the applicant:      Radio Active Designs  
21 East Union Ave  
East Rutherford, NJ 07073

Attention of:                              Geoff Shearing  
Ph: (917)545-2680  
E-Mail: gshearing@radioactiverf.com

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p2070003BS



**Project Test Engineer**

This report may not be reproduced, except in full, without written permission from Compliance Testing  
All results contained herein relate only to the sample tested.

### Test Report Revision History

| Revision | Date              | Revised By  | Reason for Revision   |
|----------|-------------------|-------------|---|
| 1.0      | November 16, 2020 |             | Original Document   |
| 2.0      | November 18, 2020 | Greg Corbin | Corrected error on page 8, changed 250 mw to 50 mw in test procedure.   |
| 3.0      | December 1, 2020  | Greg Corbin | Corrected guard band upper freq to 616 MHz on pg 5<br>Added RSS-210 to test report for ISED                           |
| 4.0      | January 13, 2021  | Greg Corbin | Added Frequency Stability test data, updated emission mask using avg detector and removed references to C2PC          |
| 5.0      | January 25, 2021  | Greg Corbin | Added final stage voltage / current to page 6   |
| 6.0      | January 29, 2021  | Greg Corbin | Updated output power table on page 8  |
| 7.0      | February 23, 2021 | Greg Corbin | Corrected EIRP in the output power table on page 8<br>Removed ISED from report, added CW output power table to page 9 |

## Table of Contents

| <b><u>Description</u></b>                          | <b><u>Page</u></b> |
|--|--------------------|
| Standard Test Conditions and Engineering Practices | 5                  |
| Test Result Summary                                | 7                  |
| Statements of conformity                           | 7                  |
| RF Output Power                                    | 8                  |
| Emission Mask                                      | 10                 |
| Spurious Emissions Transmitter                     | 11                 |
| Occupied Bandwidth                                 | 13                 |
| Frequency Stability                                | 14                 |
| Measurement Uncertainty                            | 17                 |
| Test Equipment Utilized                            | 18                 |

## ANAB

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**

### Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Part 2, Subpart J, Part 15.236, ANSI C63.10-2015.

### Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI/C63.4-2014, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F), unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

| Environmental Conditions |                 |                    |
|--------------------------|-----------------|--------------------|
| Temperature<br>(°C)      | Humidity<br>(%) | Pressure<br>(mbar) |
| 26.4 – 28.6              | 16.1 – 38.2     | 960.8 – 966.4      |

Measurement results, unless otherwise noted, are worst-case measurements.

### EUT Description

**Model:** UV-1G Basestation

**Description:** Wireless Intercom System

**Software:** 3.1.4

**Firmware:** BASE201027A

**Serial Number:** 101504

### Additional Information:

The Radio Active Designs® UV-1G is a two-channel full-duplex UHF/VHF wireless intercom system that utilizes up to six wireless Belt Pack units per Base Station.

The system uses double sideband AM modulation.

The channel spacing for the basestation is 100 – 200 kHz.

This test report is to support adding FCC Part 15.236 rule section to the existing FCC ID: 2AA6F-UV-1GBS per FCC's Report and Order FCC 17-95.

Per the manufacturer, the changes to the equipment were firmware or software based with no changes to the hardware.

The frequency ranges of the basestation are listed below.

| Frequency Range<br>(MHz) |           | Power limits |
|--------------------------|-----------|--------------|
| TX                       | 470 - 608 | 50 mW        |
| TX (Guard Band)          | 614 - 616 | 20 mW        |
| TX (Duplex Gap)          | 657 - 663 | 20 mw        |
| RX                       | 174 - 216 | N/A          |

### EUT Operation during Tests

The basestation has 2 TX output ports, TX1 and TX2. The basestation output power is adjustable from 20 – 50 mw.

All transmitter tests were performed using TX1 set to the maximum allowed transmit power per table on page 5.

The manufacturer installed a temporary switch to put the transmitter into CW mode to set the reference level for the emission mask test.

The basestation is powered by a AC to DC power supply operating with the following parameters:

Input: 100 – 240 VAC, 50 – 60 Hz

Output: + 18 vdc

The basestation antenna gain is 0 dB.

Per the manufacturer, the voltage and current for the final amplifier stage is 28 vdc @ 160 mA.

#### Accessories:

| Qty | Description                 | Manufacturer         | Model           | S/N   |
|-----|-----------------------------|----------------------|-----------------|---|
| 1   | Headset                     | Telex                | 300534          | N/A   |
| 1   | AC Adapter                  | N/A                  | AT 5090T-P180   | N/A   |
| 1   | Belpack                     | Radio Active Designs | UV-1G Belt Pack | 10790 (Conducted sample)<br>10789 (Radiated sample) |
| 1   | TX Antenna<br>(Basestation) | SHURE Inc            | UA8-500-560     | N/A   |
| 1   | RX Antenna<br>(Basestation) | SHURE Inc            | UA8-174-216     | N/A   |

**Cables:** None

**Modifications:** None

## Test Result Summary

| Specification    | Test Name                      | Pass, Fail, N/A | Comments |
|------------------|--------------------------------|-----------------|----------|
| 15.236 (d)(1)(2) | RF Output Power                | Pass            |          |
| 15.236(g)        | Emission Mask                  | Pass            |          |
| 15.236(g)        | Spurious emissions transmitter | Pass            |          |
| N/A              | Occupied Bandwidth             | Pass            |          |
| 15.236(f)(3)     | Frequency Tolerance            | Pass            |          |

## Statements of conformity

Statements of conformity are reported as:

- Pass - the measured value is below the acceptance limit, *acceptance limit = test limit*.
- Fail - the measured value is above the acceptance limit, *acceptance limit = test limit*.

## RF Output Power

Engineer: Greg Corbin

Test Date: 1/29/2021

### Test Procedure

The EUT was connected to a spectrum analyzer for the output power test.

The output power was set to 50 mw.

The modulated output power was measured using a QP detector per ANSI C63.10-2013 section 4.1.4.2.1.

The output power was measured at the low, middle, and high frequencies of the passband.


The cable loss from the EUT output to the spectrum analyzer input were input to the spectrum analyzer as correction factor before recording the output power.

RBW = 120 kHz

VBW = 3 x RBW

Detector = QP

### Test Setup



### Test Results

| Frequency | Conducted Output Power | Antenna Gain | EIRP Output Power |       | Limit | Result      |
|-----------|------------------------|--------------|-------------------|-------|-------|-------------|
| (MHz)     | (dBm)                  | (dB)         | (dBm)             | (mW)  | (mW)  | (Pass/Fail) |
| 470.025   | 15.48                  | 0            | 15.48             | 35.32 | 50    | Pass        |
| 539.025   | 15.01                  | 0            | 15.01             | 31.70 | 50    | Pass        |
| 607.975   | 15.58                  | 0            | 15.58             | 36.14 | 50    | Pass        |
| 614.025   | 11.48                  | 0            | 11.48             | 14.06 | 20    | Pass        |
| 615.975   | 11.38                  | 0            | 11.38             | 13.74 | 20    | Pass        |
| 653.025   | 11.15                  | 0            | 11.15             | 13.03 | 20    | Pass        |
| 662.975   | 11.19                  | 0            | 11.19             | 13.15 | 20    | Pass        |



**CW output Power  
provided as reference only.**

| Frequency | Conducted Output Power |       | Limit |
|-----------|------------------------|-------|-------|
| (MHz)     | (dBm)                  | (mW)  | (mW)  |
| 470.025   | 16.87                  | 48.64 | 50    |
| 539.025   | 16.58                  | 45.50 | 50    |
| 607.975   | 16.89                  | 48.87 | 50    |
| 614.025   | 12.9                   | 19.50 | 20    |
| 615.975   | 12.76                  | 18.88 | 20    |
| 657.025   | 12.63                  | 18.32 | 20    |
| 662.975   | 12.55                  | 17.99 | 20    |

## Emission Mask

**Engineer:** Greg Corbin

**Test Date:** 11/13/2020

## Test Procedure

This test references a necessary bandwidth test in the following document per FCC Part 15.236(g).

*ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement.*

The EUT was connected to a spectrum analyzer with the ETSI 300 422-01 emission mask limits programmed into it to verify the EUT meets the emission mask requirements per FCC Part 15.236 section (g).

The CW output power was measured using a peak detector set to max hold.

This measurement is required to set the reference level for the emission mask test.

The channel spacing that meets the emission mask test is 100 – 200 kHz.

The worst case is the narrow channel spacing so the emission mask was measured at 100 kHz channel spacing.


The maximum allowed channel spacing is 200 kHz.

The EUT channel spacing is used in calculating the necessary bandwidth limits for the spectrum mask for analog systems per Figure 3 in the ETSI EN 300 422-1 standard.

The spectrum analyzer settings were as follows:

|                            |   |
|----------------------------|---|
| Center Frequency           | fc: Transmitter (Tx) nominal frequency; |
| Span                       | fc - 1 MHz to fc + 1 MHz                |
| Resolution BandWidth (RBW) | 1 kHz                                   |
| Detector                   | Peak, max hold                          |

## Test Setup

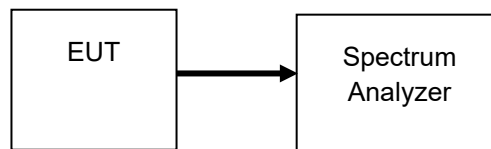

## CW Output Power to set reference level

| Frequency            | Measured Output Power<br>CW mode |
|----------------------|----------------------------------|
| (MHz)                | (dBm)                            |
| 470.025              | 16.9                             |
| 539.025              | 16.6                             |
| 607.975              | 16.9                             |
| 614.025 (guard band) | 12.9                             |
| 615.975 (guard band) | 12.8                             |
| 657.025 (duplex gap) | 12.6                             |
| 662.975 (duplex gap) | 12.6                             |

The EUT met the emission mask requirements from 100 to 200 kHz channel spacing.

**Refer to Annex A for the Emission Mask test results.**

## Spurious Emissions Transmitter

Engineer: Greg Corbin

Test Date: 11/16/2020

### Test Procedure

This test references a necessary bandwidth test limit in the following document per FCC Part 15.236(g).

*ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement.*

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for transmitter spurious emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer before recording the level of the spurious emissions.

The EUT is required to meet the ETSI 300 422-01 radiated spurious limits (Table 3).

**Table 3: Limits for spurious emissions**


| State     | Frequency Range   |                                      |                                |
|-----------|---|--------------------------------------|--------------------------------|
|           | 47 MHz to 74 MHz<br>87,5 MHz to 137 MHz<br>174 MHz to 230 MHz<br>470 MHz to 862 MHz | Other Frequencies<br>below 1 000 MHz | Frequencies above<br>1 000 MHz |
| Operating | 4 nW  | 250 nW                               | 1 uW                           |
| Standby   | 2 nW  | 2 nW                                 | 20 nW                          |

The RBW was set to 100 kHz for measurements below 1 GHz and 1 MHz for measurements above 1 GHz. The VBW was set to 3 times the RBW.

For 30 – 1000 MHz, A notch filter was used for the transmit frequency at the receive antenna output.

For 1 – 7 GHz a 1 GHz Highpass filter was used at the receive antenna output

### Test Setup

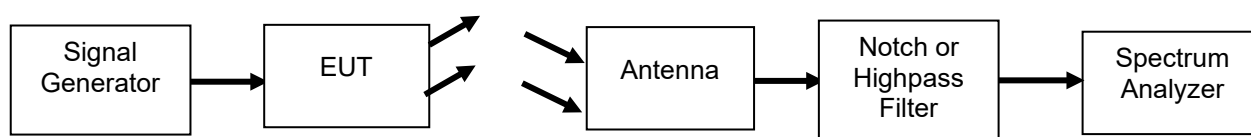

### Radiated Spurious Test Results

| Frequency Range | Tuned Frequency | Measured Spurious – Specific bands per table 3 |            | Limit | Results       |
|-----------------|-----------------|--|------------|-------|---------------|
| (MHz)           | (MHz)           | Frequency (MHz)                                | Level (nW) | (nW)  | (Pass / Fail) |
| 30 – 1000       | 470.025         | 522.3  | 0.454      | 4     | Pass          |
| 30 – 1000       | 539.025         | 592.6  | 0.424      | 4     | Pass          |
| 30 – 1000       | 607.975         | 556.2  | 0.544      | 4     | Pass          |
| 30 – 1000       | 614.025         | 862.0  | 0.375      | 4     | Pass          |
| 30 – 1000       | 615.975         | 837.5  | 0.288      | 4     | Pass          |
| 30 – 1000       | 657.025         | 827.8  | 0.354      | 4     | Pass          |
| 30 – 1000       | 662.975         | 840.0  | 0.303      | 4     | Pass          |
| Frequency Range | Tuned Frequency | Other Spurious below 1000 MHz                  |            | Limit | Results       |
| (MHz)           | (MHz)           | Frequency (MHz)                                | Level (nW) | (nW)  | (Pass / Fail) |
| 30 – 1000       | 470.025         | 940.055  | 172.1      | 250   | Pass          |
| 30 – 1000       | 539.025         | 992.7  | 0.466      | 250   | Pass          |
| 30 – 1000       | 607.975         | 990.3  | 0.481      | 250   | Pass          |
| 30 – 1000       | 614.025         | 990.3  | 0.399      | 250   | Pass          |
| 30 – 1000       | 615.975         | 990.3  | 0.454      | 250   | Pass          |
| 30 – 1000       | 657.025         | 990.3  | 0.449      | 250   | Pass          |
| 30 – 1000       | 662.975         | 990.3  | 0.388      | 250   | Pass          |
| Frequency Range | Tuned Frequency | Measured Spurious 1 – 7 GHz                    |            | Limit | Results       |
| (GHz)           | (MHz)           | Frequency (MHz)                                | Level (uW) | (uW)  | (Pass / Fail) |
| 1 - 7           | 470.025         | 6955   | 0.000900   | 1     | Pass          |
| 1 - 7           | 539.025         | 6865   | 0.000909   | 1     | Pass          |
| 1 - 7           | 607.975         | 6850   | 0.000825   | 1     | Pass          |
| 1 - 7           | 614.025         | 6850   | 0.000740   | 1     | Pass          |
| 1 - 7           | 615.975         | 6880   | 0.000858   | 1     | Pass          |
| 1 - 7           | 657.025         | 6895   | 0.001027   | 1     | Pass          |
| 1 - 7           | 662.975         | 6835   | 0.000882   | 1     | Pass          |
| Frequency Range | Standby         | Measured Spurious Standby Mode                 |            | Limit | Results       |
| (GHz)           |                 | Frequency (MHz)                                | Level (nW) | (nW)  | (Pass / Fail) |
| 0.03 - 1        | Standby         | 997.6  | 0.485      | 2     | Pass          |
| 1 - 7           | Standby         | 6865   | 0.827      | 20    | Pass          |

All spurious emissions were below the limit.

Refer to Annex B for Radiated Spurious Emission test results.

## Occupied Bandwidth

**Engineer:** Greg Corbin

**Test Date:** 12/1/2020


### Test Procedure

The EUT was connected to a spectrum analyzer for the occupied bandwidth test.  
The output power was set to the maximum allowed for the frequency being testing.

The 99% occupied bandwidth was measured using the occupied bandwidth tool on the spectrum analyzer.  
The RBW was set between 1 – 5% of the occupied bandwidth.

The occupied bandwidth was measured at the low, middle, and high frequencies of the passband as required.

### Test Setup



**Occupied Bandwidth Test Summary Table**

| Tuned Frequency | Occupied Bandwidth |
|-----------------|--------------------|
| MHz             | kHz                |
| 470.025         | 27.9               |
| 539.025         | 27.4               |
| 607.975         | 30.4               |
| 614.025         | 30.6               |
| 615.975         | 30.5               |
| 657.025         | 27.5               |
| 662.975         | 27.8               |

**Refer to Annex C for Occupied Bandwidth test results**

## Frequency Stability

**Engineer:** Greg Corbin

**Test Date:** 1/23/2021


### Measurement Procedure

The EUT was placed in an environmental test chamber and the RF output was connected to a spectrum analyzer. The temperature was varied from -20°C to 50°C in 10°C increments. After a sufficient time for temperature stabilization the RF output frequency was measured.

At 20°C the power supply voltage to the EUT was varied from 85% to 115% of the nominal value and the RF output was measured.

The nominal input voltage is 120 vac for the basestation.


### Test Setup

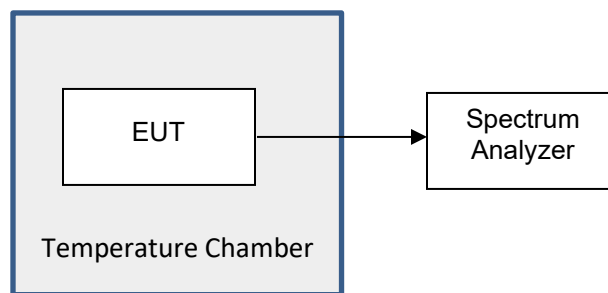

### Frequency Stability Temperature Variation Measurement Results


| Tuned Frequency | Temperature | Tolerance | Measured Frequency | Upper Limit | Lower Limit | Upper Margin | Lower Margin |
|-----------------|-------------|-----------|--------------------|-------------|-------------|--------------|--------------|
| (MHz)           | (deg C)     | (%)       | (MHz)              | (MHz)       | (MHz)       | (MHz)        | (MHz)        |
| 539.025         | -20         | 0.005     | 539.0255000        | 539.0519513 | 538.9980488 | 0.0264513    | 0.0274513    |
| 539.025         | -10         | 0.005     | 539.0255000        | 539.0519513 | 538.9980488 | 0.0264513    | 0.0274513    |
| 539.025         | 0           | 0.005     | 539.0252500        | 539.0519513 | 538.9980488 | 0.0267012    | 0.0272013    |
| 539.025         | 10          | 0.005     | 539.0252500        | 539.0519513 | 538.9980488 | 0.0267012    | 0.0272013    |
| 539.025         | 20          | 0.005     | 539.0250000        | 539.0519513 | 538.9980488 | 0.0269513    | 0.0269513    |
| 539.025         | 30          | 0.005     | 539.0252500        | 539.0519513 | 538.9980488 | 0.0267012    | 0.0272013    |
| 539.025         | 40          | 0.005     | 539.0252500        | 539.0519513 | 538.9980488 | 0.0267012    | 0.0272013    |
| 539.025         | 50          | 0.005     | 539.0252500        | 539.0519513 | 538.9980488 | 0.0267012    | 0.0272013    |

### Frequency Stability vs. Temperature

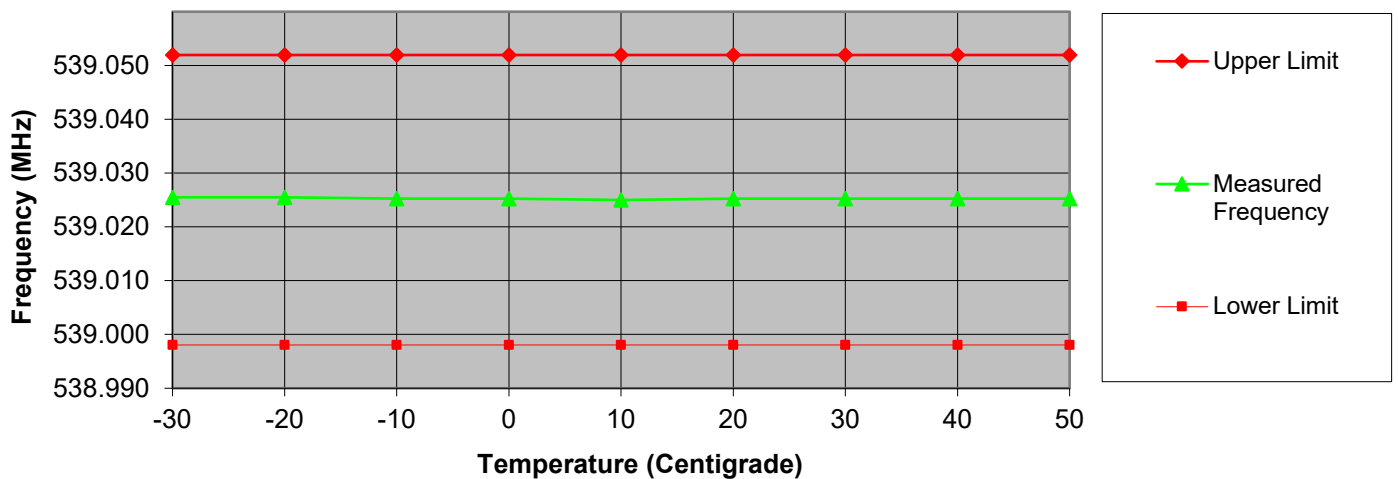

### Frequency Stability Voltage Variation Measurement Results

| Tuned Frequency | Tolerance | Voltage | Measured Frequency | Upper Limit | Lower Limit | Upper Margin | Lower Margin |
|-----------------|-----------|---------|--------------------|-------------|-------------|--------------|--------------|
| (MHz)           | (%)       | (vac)   | (MHz)              | (MHz)       | (MHz)       | (MHz)        | (MHz)        |
| 539.025         | 0.005     | 102.00  | 539.0252500        | 539.0519513 | 538.9980488 | -0.0267012   | 0.0272013    |
| 539.025         | 0.005     | 120.00  | 539.0252500        | 539.0519513 | 538.9980488 | -0.0267012   | 0.0272013    |
| 539.025         | 0.005     | 138.00  | 539.0252500        | 539.0519513 | 538.9980488 | -0.0267012   | 0.0272013    |

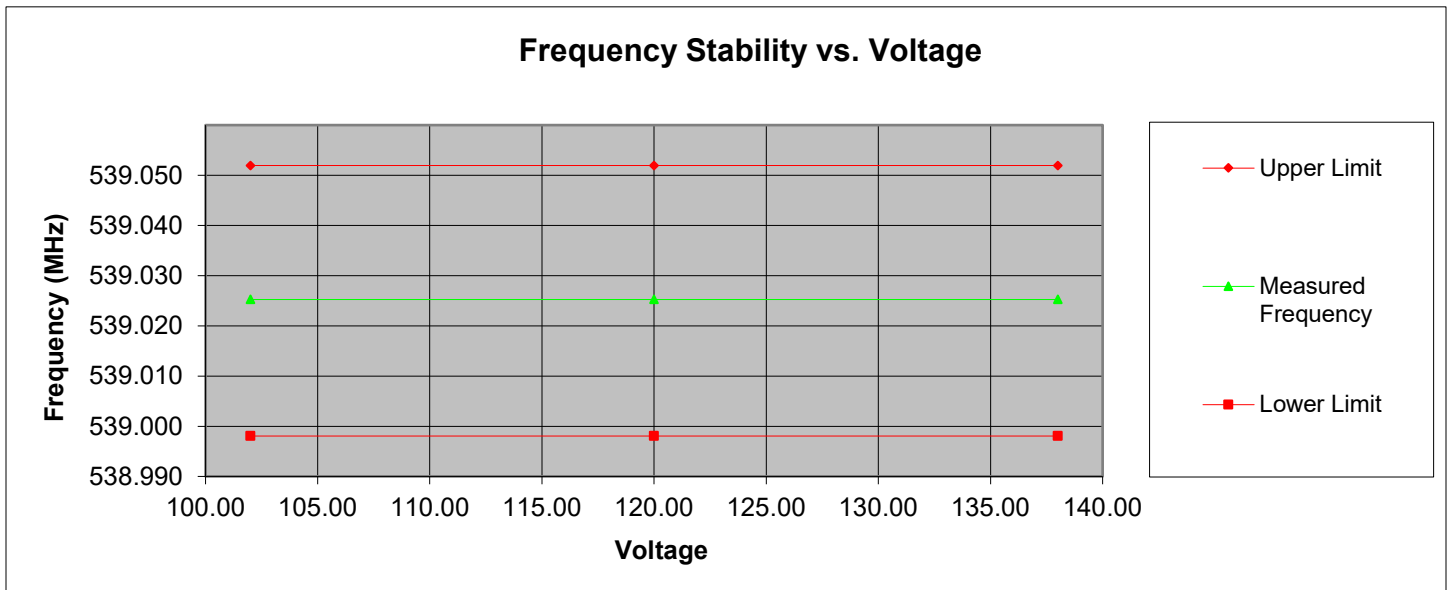



## Measurement Uncertainty

Measurement Uncertainty for Compliance Testing is listed in the table below.

The reported expanded uncertainty has been estimated at a 95% confidence level (k=2)

| Measurement Type                  | Expanded Uncertainty |
|-----------------------------------|----------------------|
| Conducted Emissions, AC Powerline | $\pm 3.28$ dB        |
| Radiated Emissions_30 – 1000 MHz  | $\pm 4.82$ dB        |
| Radiated Emissions_1 – 18 GHz     | $\pm 5.73$ dB        |
| Frequency Error                   | $\pm 22$ Hz          |
| Conducted RF Power                | $\pm 0.98$ dB        |
| Conducted Spurious Emission       | $\pm 2.49$ dB        |
| AC Voltage                        | $\pm 2.3$ %          |
| DC Voltage                        | $\pm 0.12$ %         |
| Temperature                       | $\pm 1.0$ deg C      |
| Humidity                          | $\pm 4.32$ %         |

## Test Equipment Utilized

| Description            | Manufacturer | Model #            | CT Asset # | Last Cal Date | Cal Due Date |
|------------------------|--------------|--------------------|------------|---------------|--------------|
| Horn Antenna           | ARA          | DRG-118/A          | i00271     | 8/3/20        | 8/3/21       |
| Humidity / Temp Meter  | Newport      | IBTHX-W-5          | i00282     | 8/28/20       | 8/28/21      |
| Bi-Log Antenna         | Schaffner    | CBL 6111D          | i00267     | 8/28/20       | 8/28/22      |
| EMI Analyzer           | Agilent      | E7405A             | i00379     | 1/21/20       | 1/21/21      |
| Spectrum Analyzer      | Textronix    | RSA5126A           | i00424     | 8/3/20        | 8/3/21       |
| Band Reject Filter     | Eagle        | TNF-1              | i00124     | N/A           |              |
| 1 GHz High Pass Filter | K&L          | 7IH40-980/6000-0/0 | i00432     | N/A           |              |
| Voltmeter              | Fluke        | 179                | i00488     | 5/18/20       | 5/18/21      |

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation

END OF TEST REPORT