



America

**Choose certainty.
Add value.**

Report On

Radio Testing of the
Canberra Industries, Inc.
Seal (Fiber Optic Seal - Part of the Remotely Monitored Seal
Array (RMSA) System)

FCC Part 15 Subpart C §15.249

Report No. DI1307733F Rev. 2

June 2016



America

TÜV SÜD America Inc., 10040 Mesa Rim Road, San Diego, CA 92121
Tel: (858) 678-1400. Website: www.TUVamerica.com

REPORT ON	Radio Testing of the Canberra Industries, Inc. Seal (Fiber Optic Seal - Part of the Remotely Monitored Seal Array (RMSA) System)
TEST REPORT NUMBER	DI1307733F Rev. 2
PREPARED FOR	Canberra Industries, Inc. 107 Union Valley Rd. Oak Ridge, TN 37830 USA
CONTACT PERSON	Scott Rogers Project Manager (865) 220-6311 scott.rogers@canberra.com
PREPARED BY	 Alex Chang Name Authorized Signatory Title: EMC/Wireless Test Engineer
APPROVED BY	 Juan Manuel Gonzalez Name Authorized Signatory Title: Commercial/Wireless EMC Lab Manager
DATED	June 14, 2016



TÜV SÜD America Inc., 10040 Mesa Rim Road, San Diego, CA 92121
Tel: (858) 678-1400. Website: www.TUVamerica.com

Revision History

DI1307733F Rev. 2 Canberra Industries, Inc. Seal (Fiber Optic Seal - Part of the Remotely Monitored Seal Array (RMSA) System)					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
09/08/2014	Initial Release				Ferdinand Custodio
04/06/2015		Rev. 1	Add alternative model (metal enclosure)	6,8 and 9	Alex Chang
06/14/2016		Rev. 2	Add alternative model (internal antenna)	9, 10, 11, 27, 28, 29, 30, 31, 38, 39, 40 and 41	Juan M. Gonzalez



CONTENTS

Section	Page No
1	REPORT SUMMARY5
1.1	Introduction.....6
1.2	Brief Summary Of Results 7
1.3	Product Information8
1.4	EUT Test Configuration 12
1.5	Deviations From The Standard..... 13
1.6	Modification Record 13
1.7	Test Methodology 13
1.8	Test Facility Location 13
1.9	Test Facility Registration..... 13
2	TEST DETAILS.....14
2.1	Conducted Emissions..... 15
2.2	20 dB Bandwidth 16
2.3	Field Strength Limits For Fundamental And Band Edge..... 20
2.4	Spurious Radiated Emissions 22
3	TEST EQUIPMENT USED42
3.1	Test Equipment Used..... 43
3.2	Measurement Uncertainty 44
4	DIAGRAM OF TEST SETUP45
4.1	Test Setup Diagram 46
5	ACCREDITATION, DISCLAIMERS AND COPYRIGHT48
5.1	Accreditation, Disclaimers And Copyright..... 49



SECTION 1

REPORT SUMMARY

Radio Testing of the
Canberra Industries, Inc.
Seal (Fiber Optic Seal - Part of the Remotely Monitored Seal Array (RMSA) System)



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Canberra Industries, Inc. Seal (Fiber Optic Seal - Part of the Remotely Monitored Seal Array (RMSA) System) to the requirements of FCC Part 15 Subpart C §15.249.

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Canberra Industries, Inc.
Model Number(s)	7078495, 7077194 and 7080883
FCC ID Number	2AA7FRMSA7070822
IC Number	N/A
Serial Number(s)	2012RMSAAS0001, 2012RMSAASFCC01, and 2012RMSAASFCC05
Number of Samples Tested	3
Test Specification/Issue/Date	FCC Part 15 Subpart C §15.249 (October 1, 2015)
Start of Test	April 17, 2014
Finish of Test	May 07, 2016
Name of Engineer(s)	Alex Chang
Related Document(s)	None. Supporting documents for EUT certification are separate exhibits.



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C §15.249 is shown below.


Section	Spec Clause	Test Description	Result	Comments/Base Standard
2.1	§15.207(a)	Conducted Emissions	N/A *	
2.2	§15.215(c)	20 dB Bandwidth	Compliant	
2.3	§15.249(a)	Field Strength Limits for Fundamental And Band Edge	Compliant	
2.4	§15.249(d)	Spurious Radiated Emissions	Compliant	

* Not applicable, EUT is a battery powered device.

1.3 PRODUCT INFORMATION

1.3.1 Technical Description


The Equipment Under Test (EUT) was a Canberra Industries, Inc. Seal (Fiber Optic Seal - Part of the Remotely Monitored Seal Array (RMSA) System) as shown in the photograph below. The RMSA system consists of seals, a translator, a programming card interface as well as the remote review application. The system provides low cost solution for monitoring sealed components. This report covers the models RMSA Seal w/External Antenna model 7078495, RMSA Seal w/Internal Antenna model 7077194 and RMSA Seal Metal model 7080883.

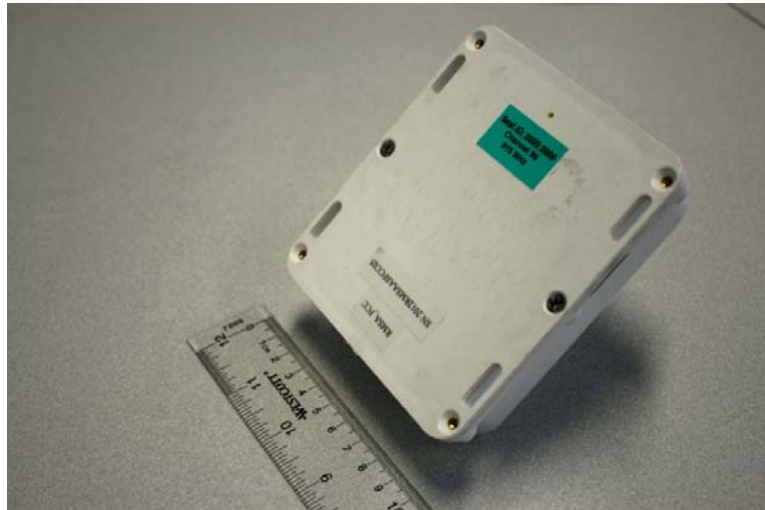

Equipment Under Test of model 7078495 with external antenna



Equipment Under Test of model 7077194 with internal antenna

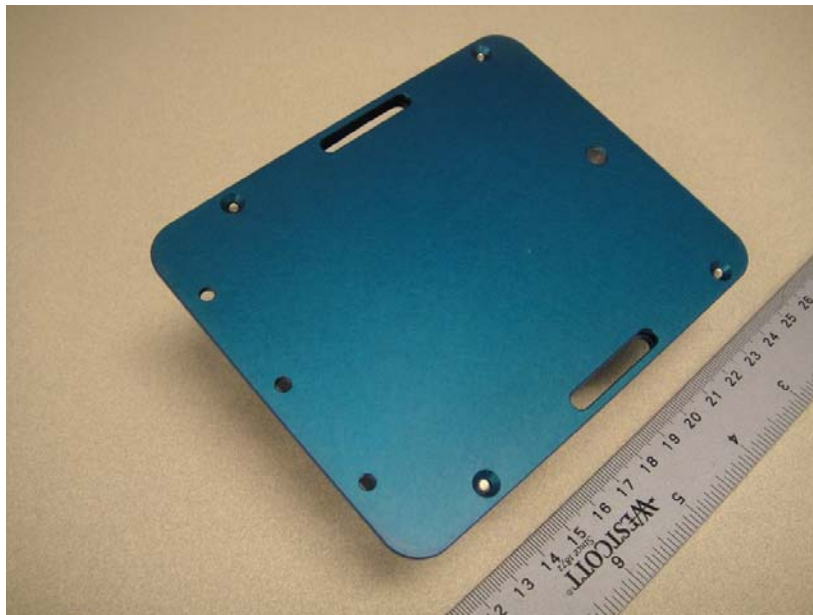

Equipment Under Test of model 7080883 with metal enclosure



Equipment Under Test of model 7078495 with external antenna

1.3.2 EUT General Description

EUT Description	Seal (Fiber Optic Seal - Part of the Remotely Monitored Seal Array (RMSA) System)
Product Name	RMSA Seal and RMSA Seal A.S.
Model Number(s)	7078495, 7077194 and 7080883
Rated Voltage	3.6 VDC Nominal Voltage.
Output Power	93.0 dBμV/m @ 3 meters
Frequency Range	908 MHz to 921 MHz in the 902 MHz to 928 MHz Band
Mode Verified	915 MHz ISM/SRD
Capability	915 MHz ISM/SRD
Channels Verified	Low Channel 908 MHz Mid Channel 915MHz High Channel 921MHz

1.3.3 External Antenna Details

Model	ANT-916-CW-RH-SMA
Manufacturer	Linx Technologies Inc.
Antenna Type	Whip, ¼ Wave, Fixed
Antenna Gain	-1.3dBi
Antenna Connector	SMA (Professionally Installed)

1.3.4 Internal Antenna Details

Model	F-Antenna V4
Manufacturer	Canberra
Antenna Type	F Type Antenna
Antenna Gain	3dBi

1.4 EUT TEST CONFIGURATION

1.4.1 Test Configuration Description

Test Configurations	Description
Default	EUT configured to transmit continuously (100% duty cycle - modulated) at the designated channel.

1.4.2 EUT Exercise Software


None. No special software was used to exercise the EUT during the investigation. The EUT was provided programmed as a production setup model.

1.4.3 Support Equipment and I/O cables


Manufacturer	Equipment/Cable	Description
—	—	—

1.4.4 Worst Case Configuration

For radiated measurements X, Y, and Z orientations were verified. The verification was determined “Y” as worst case configuration.

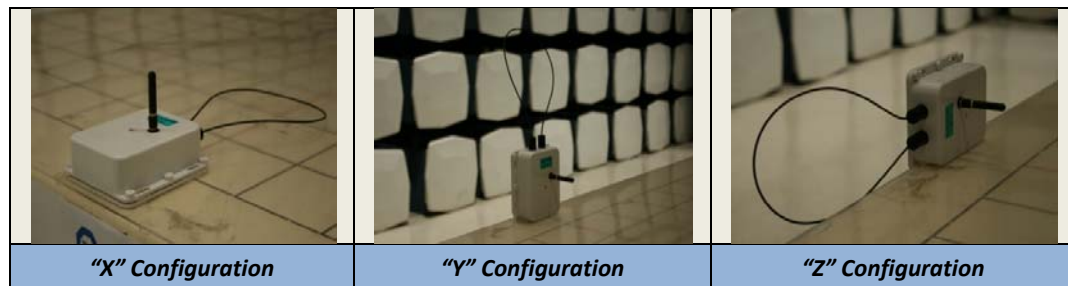

1.4.5 Simplified Test Configuration Diagram

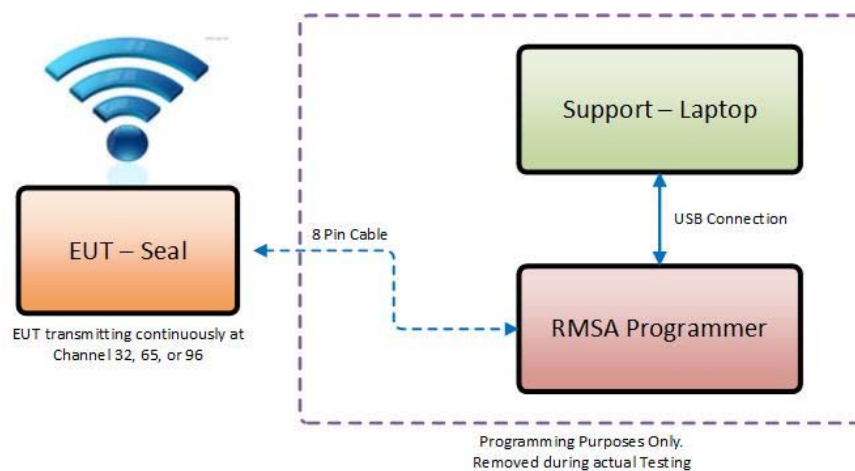



1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number: 2012RMSAAS0001, 2012RMSAASFCC01, and 2012RMSAASFCC05		
<i>Firmware adjustment to mid (65) channel (915MHz), s/n: 2012RMSAASFCC01. The transmit power at 915MHz (mid channel) was lowered from 6.17mW(7.9dBm) to 5.25mW(7.2dBm).</i>	Greg Shafer	04/30/2014

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. For conducted and radiated emissions the equipment under test (EUT) was configured to measure its highest possible emission level. This level was based on the maximized cable configuration from exploratory testing per ANSI C63.10-2013. The test modes were adapted according to the Operating Instructions provided by the manufacturer/client.

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400 FAX: 858-546 0364

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

16530 Via Esprillo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 942 5542 FAX: 858-546 0364

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Registration No.: US1146

TUV SUD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Registration is US1146.

1.9.2 Innovation, Science and Economic Development Canada (ISED) Registration No.: 3067A

The 10m Semi-anechoic chamber of TUV SUD America Inc. (San Diego) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada (ISED) for radio equipment testing with Registration No. 3067A.



SECTION 2

TEST DETAILS

Radio Testing of the
Canberra Industries, Inc.
Seal (Fiber Optic Seal - Part of the Remotely Monitored Seal Array (RMSA) System)



2.1 CONDUCTED EMISSIONS

2.1.1 Specification Reference

Part 15 Subpart C §15.207(a)

2.1.2 Standard Applicable

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

**Decreases with the logarithm of the frequency.*

2.1.3 Equipment Under Test and Modification State

Not performed. EUT is battery operated only.



2.2 20 dB BANDWIDTH

2.2.1 Specification Reference

Part 15 Subpart C §15.215(c)

2.2.2 Standard Applicable

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

2.2.3 Equipment Under Test and Modification State

Serial No: 2012RMSAAS0001, 2012RMSAASFCC01, and 2012RMSAASFCC05 / Default Test Configuration

2.2.4 Date of Test/Initial of test personnel who performed the test

July 21, 2014 / AC

2.2.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	25.0°C
Relative Humidity	47.7%
ATM Pressure	99.2 kPa

2.2.7 Additional Observations


- This is a conducted test.
- An offset of 20.8dB was added to compensate for the external attenuator and the cable used from the antenna port.
- "n dB down" marker function of the Spectrum Analyzer used.
- Span is wide enough to capture the channel transmission.
- RBW is 1% of the span, VBW is 3X RBW.
- Sweep is auto.
- Detector is peak.
- Trace is max hold.


2.2.8 Test Results


Low Channel (908 MHz)	Mid Channel (914 MHz)	High Channel (921 MHz)
204.41 kHz	210.42 kHz	192.38 kHz

908.00 MHz – (20dB BW/2) = 907.89 MHz (within the frequency band - **Compliant**)

921.00 MHz + (20dB BW/2) = 921.09 MHz (within the frequency band - **Compliant**)

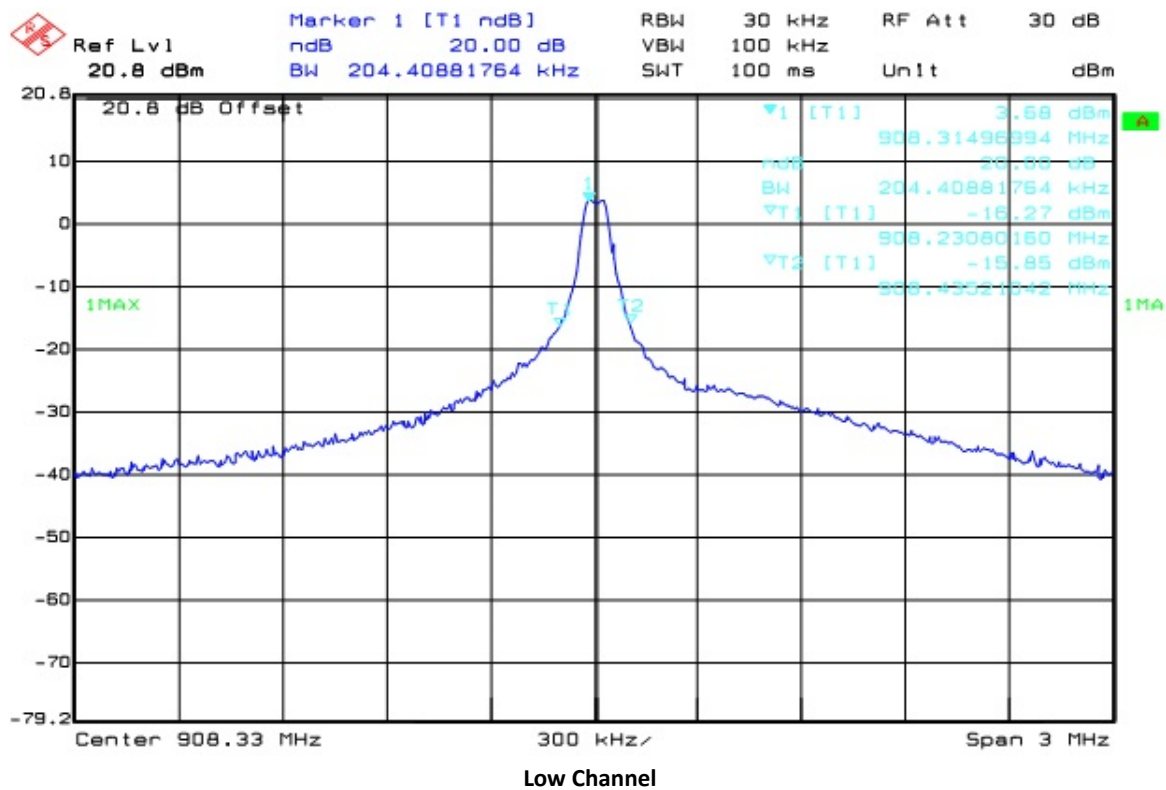

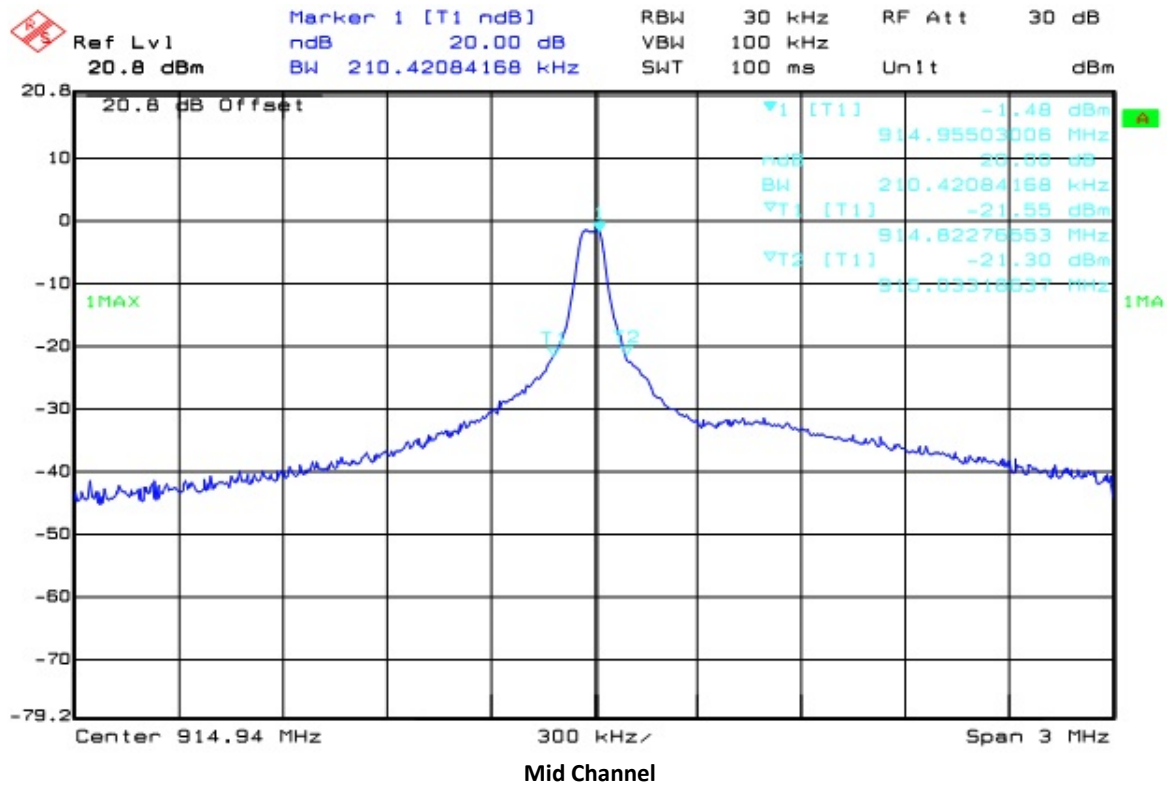

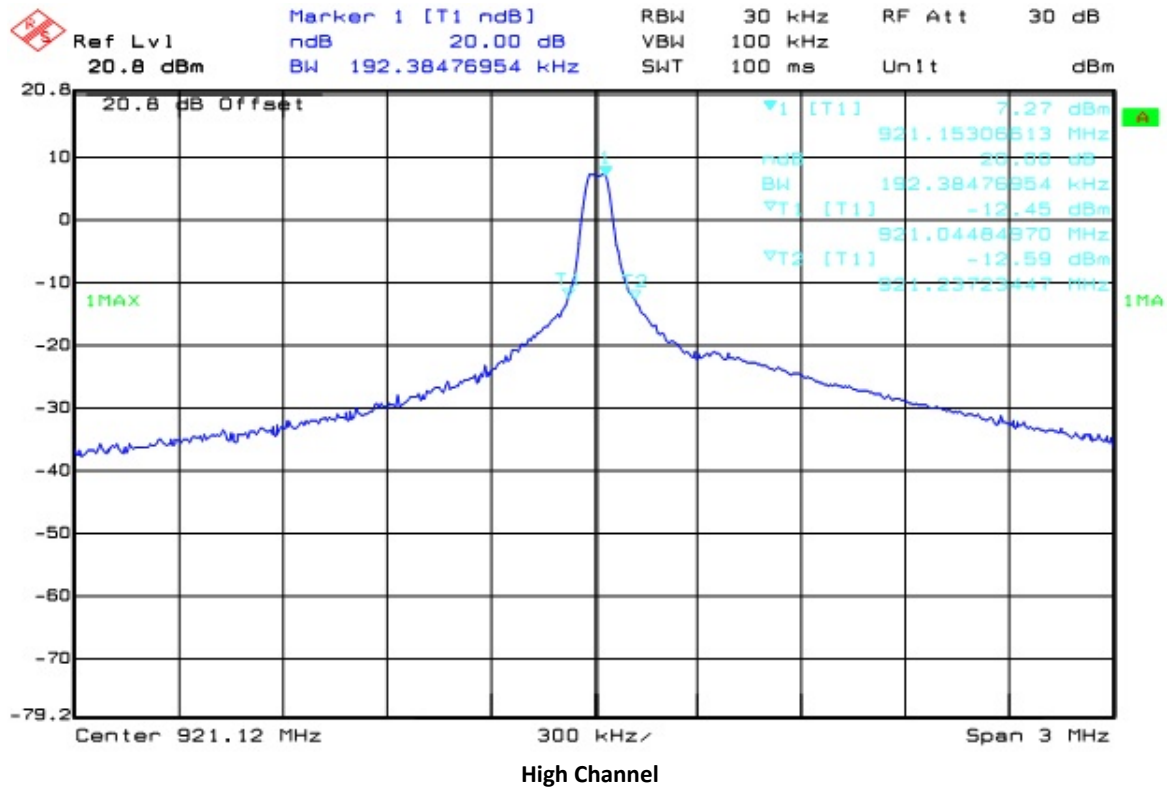



2.3 FIELD STRENGTH LIMITS FOR FUNDAMENTAL AND BAND EDGE

2.3.1 Specification Reference

Part 15 Subpart C §15.249(a)

2.3.2 Standard Applicable

(a) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

2.3.3 Equipment Under Test and Modification State

Serial No: 2012RMSAAS0001, 2012RMSAASFCC01, and 2012RMSAASFCC05 / Default Test Configuration

2.3.4 Date of Test/Initial of test personnel who performed the test

July 25, 2014 and May 07, 2016 / AC

2.3.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	25.2°C
Relative Humidity	46.6%
ATM Pressure	99.3 kPa

2.3.7 Additional Observations

- This is a radiated test. The spectrum was measured to the fundamental frequency of low, mid, and high channels.
- Both external and internal antennas evaluated.
- Fundamental measurements were performed with a preamp.
- Measurement was done using EMC32 V8.53 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.3.8 for sample computation.

2.3.8 Sample Computation (Radiated Emission below and above 1GHz)


Measuring equipment raw measurement (db μ V) @ 865.996 MHz			95.2
Correction Factor (dB)	Asset# 1016(cable)	29.5	-1.1
	Asset# 1026(cable)	-3.7	
	Asset# 1057(cable)	-1.4	
	Asset# 1187 (preamplifier)	-2.8	
	Asset# 1002 (antenna)	-22.7	
Reported Peak Final Measurement (db μ V/m) @ 865.996 MHz			94.1

Measuring equipment raw measurement (db μ V) @ 2400 MHz			58.4
Correction Factor (dB)	Asset# 1153 (cable)	3.3	-4.8
	Asset# 8628 (preamplifier)	-36.4	
	Asset# 6669 (antenna)	28.3	
Reported Peak Final Measurement (db μ V/m) @ 2400 MHz			53.6

2.3.9 Test Results

See attached plots.


2.3.10 Test Results for Low Channel (Fundamental Emissions) for model 7078495 (External antenna)

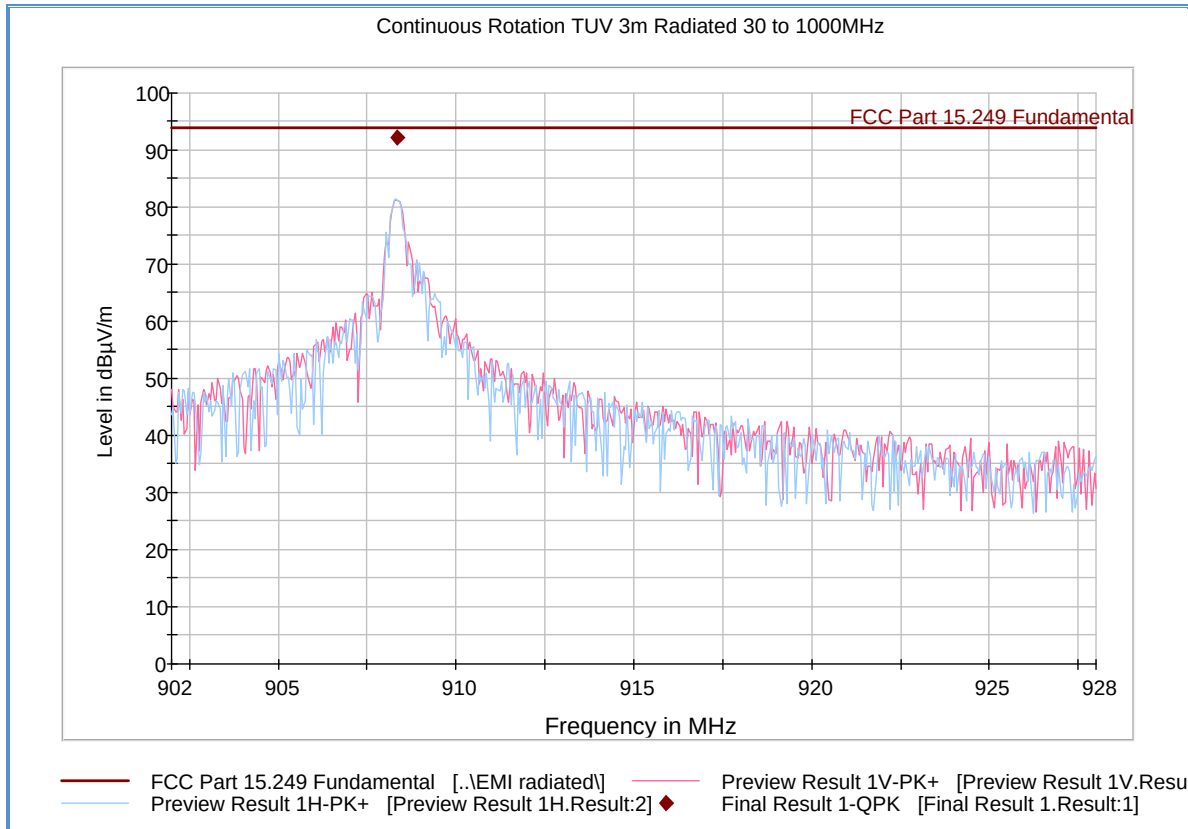

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
908.344609	92.2	1000.0	120.000	150.0	H	71.0	1.9	1.8	94.0


2.3.11 Test Results for Mid Channel (Fundamental Emissions) for model 7078495 (External antenna)

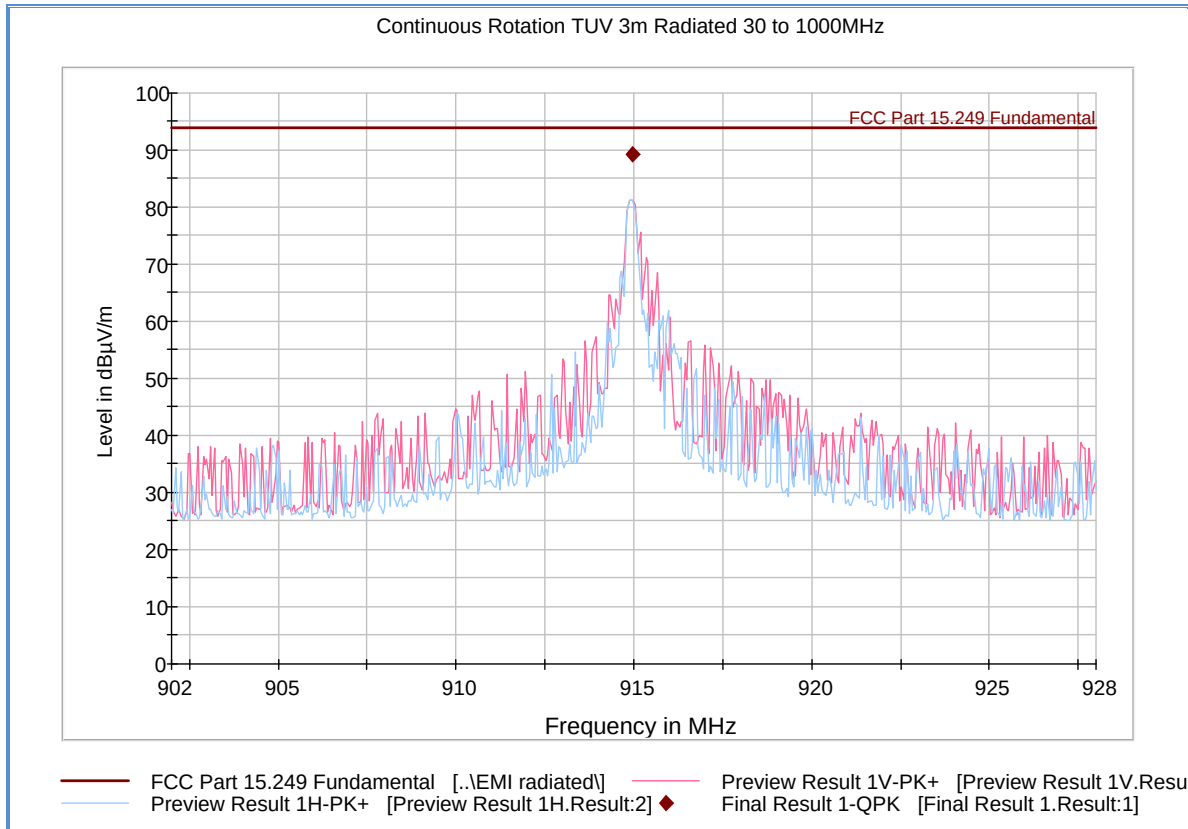

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
914.961844	89.3	1000.0	120.000	150.0	H	241.0	1.9	4.7	94.0


2.3.12 Test Results for High Channel (Fundamental Emissions) for model 7078495 (External antenna)

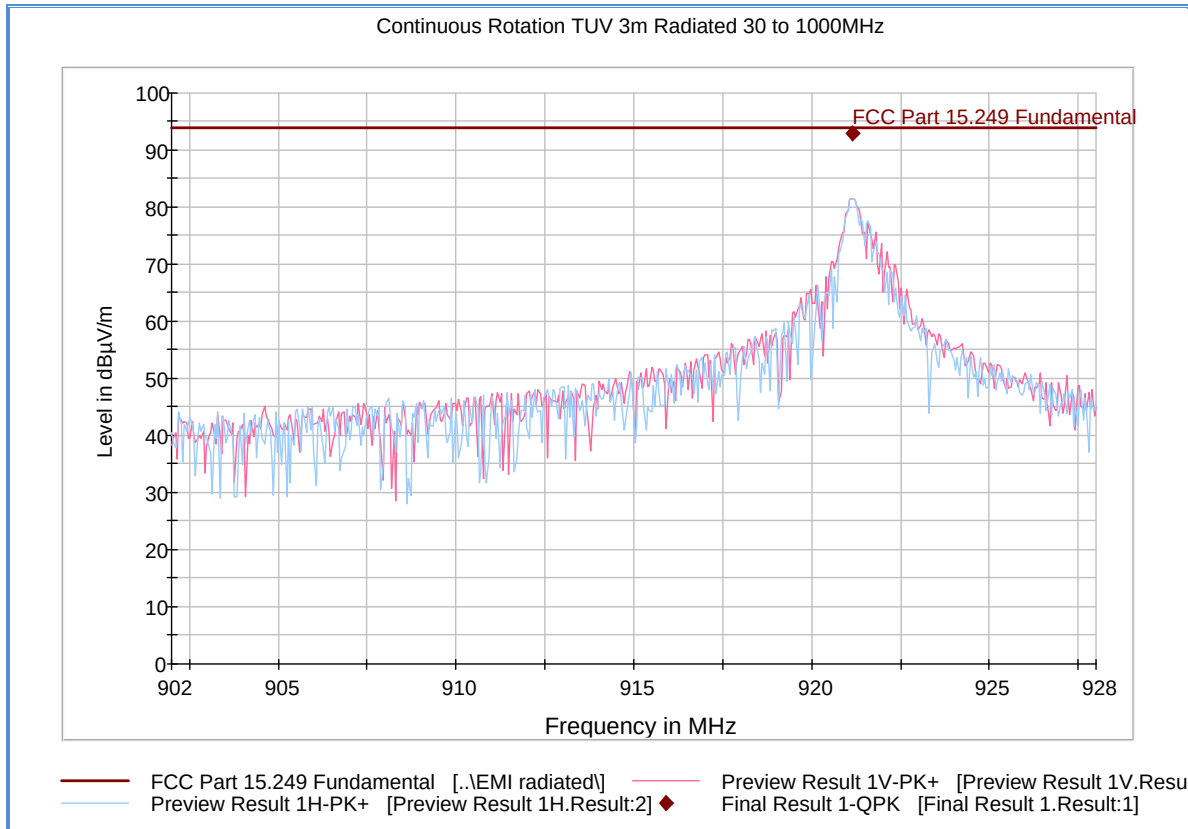

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
921.134349	93.0	1000.0	120.000	308.0	V	100.0	2.2	1.0	94.0


2.3.13 Test Results for Low Channel (Band Edge) for model 7078495 (External antenna)

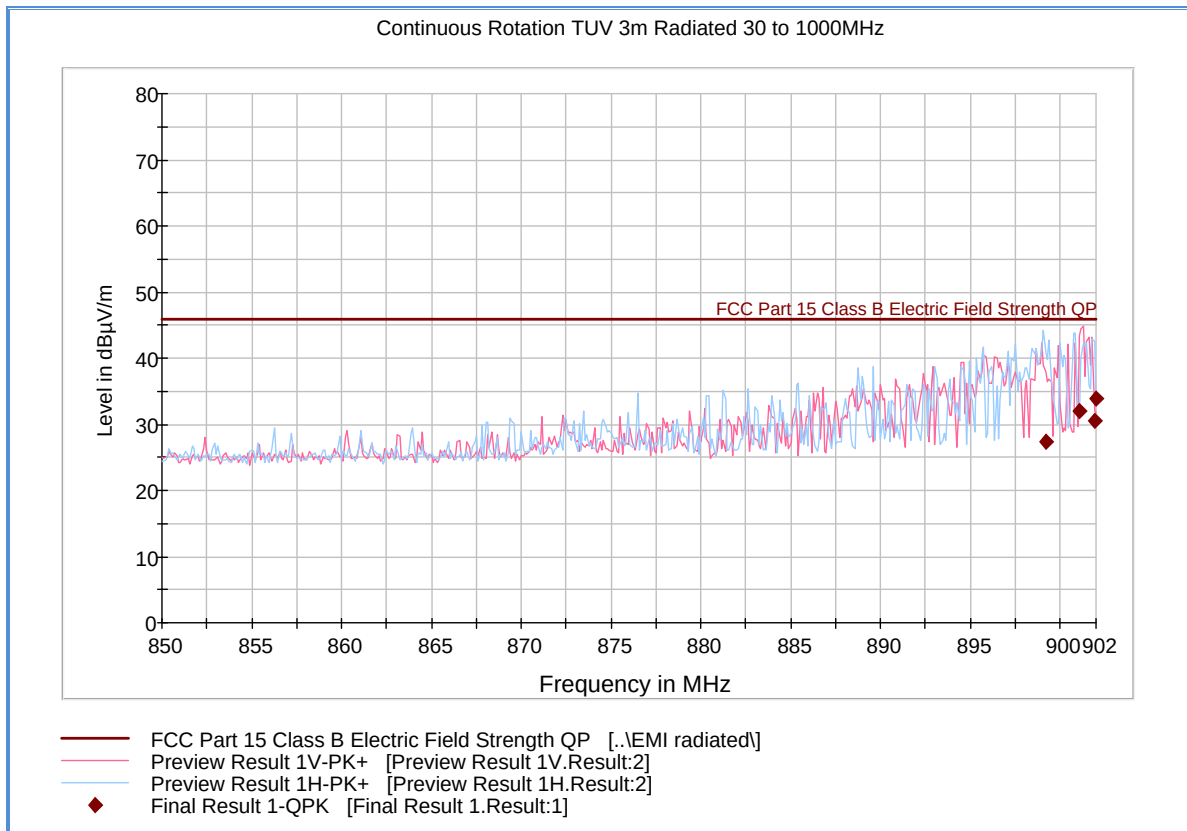

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
899.187495	27.4	1000.0	120.000	100.0	V	244.0	2.2	18.6	46.0
901.039038	32.1	1000.0	120.000	133.0	H	314.0	2.2	13.9	46.0
901.950541	30.4	1000.0	120.000	100.0	V	256.0	2.1	15.6	46.0
902.000000	34.0	1000.0	120.000	138.0	H	314.0	2.1	12.0	46.0

2.3.14 Test Results for High Channel (Band Edge) for model 7078495 (External antenna)

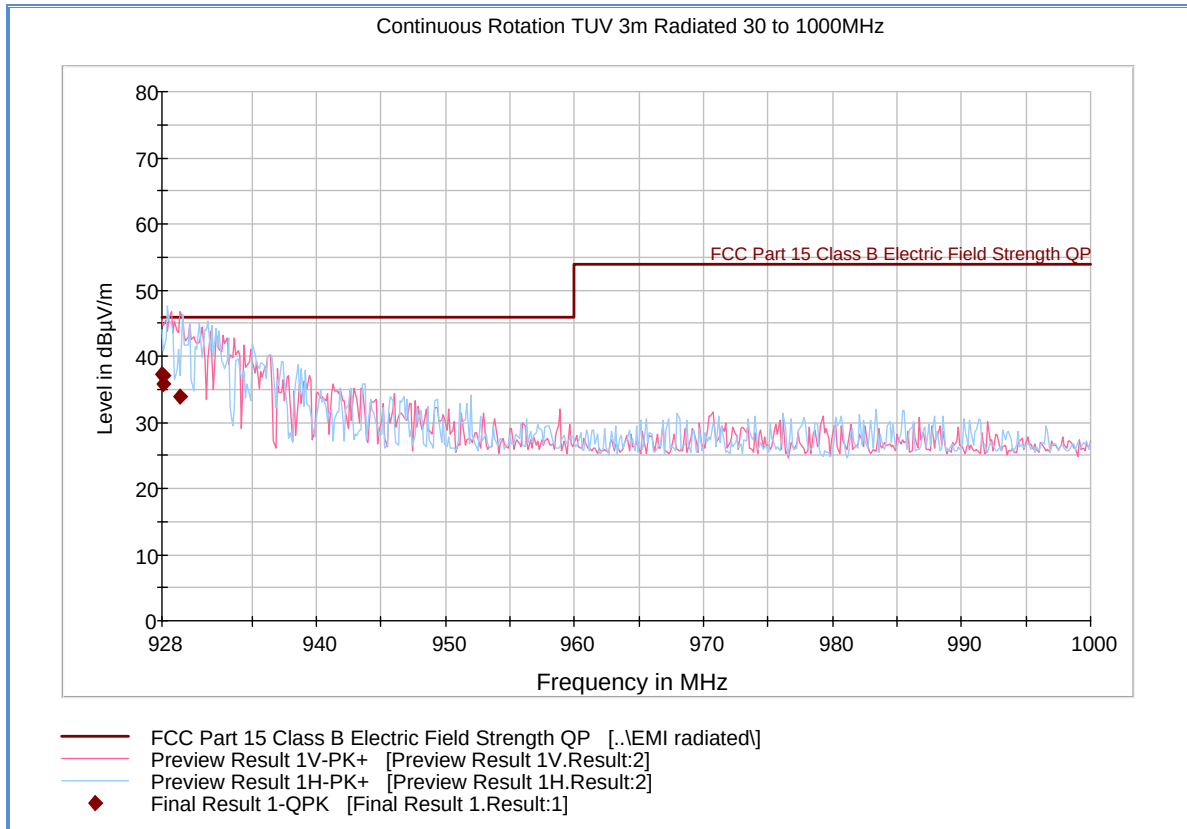


Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
928.040000	37.2	1000.0	120.000	150.0	H	107.0	2.3	8.8	46.0
928.080000	37.1	1000.0	120.000	150.0	H	111.0	2.3	8.9	46.0
928.080000	35.7	1000.0	120.000	201.0	V	-2.0	2.3	10.3	46.0
929.352946	33.9	1000.0	120.000	208.0	H	311.0	2.3	12.1	46.0

2.3.15 Test Results for Low Channel (Fundamental Emissions) for model 7077194 (Internal antenna)

Continuous Rotation TUV 3m Radiated 30 to 1000MHz

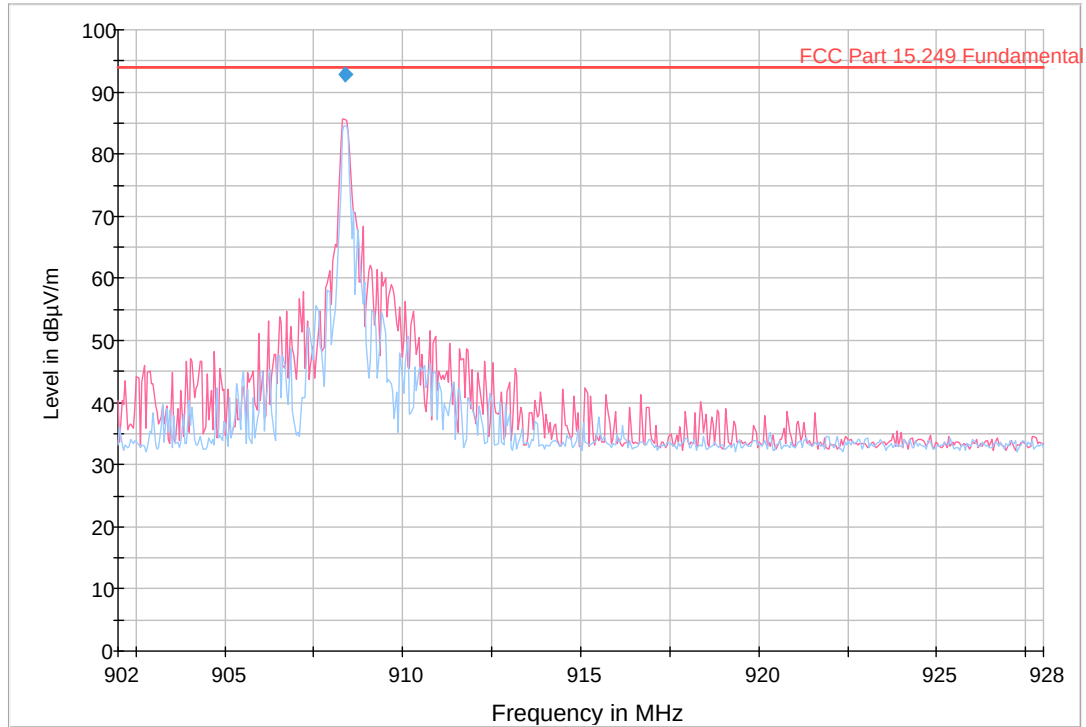


Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
908.396714	92.8	1000.0	120.000	100.0	V	34.0	6.1	1.2	94.0

2.3.16 Test Results for Mid Channel (Fundamental Emissions) for model 7077194 (Internal antenna)


Continuous Rotation TUV 3m Radiated 30 to 1000MHz

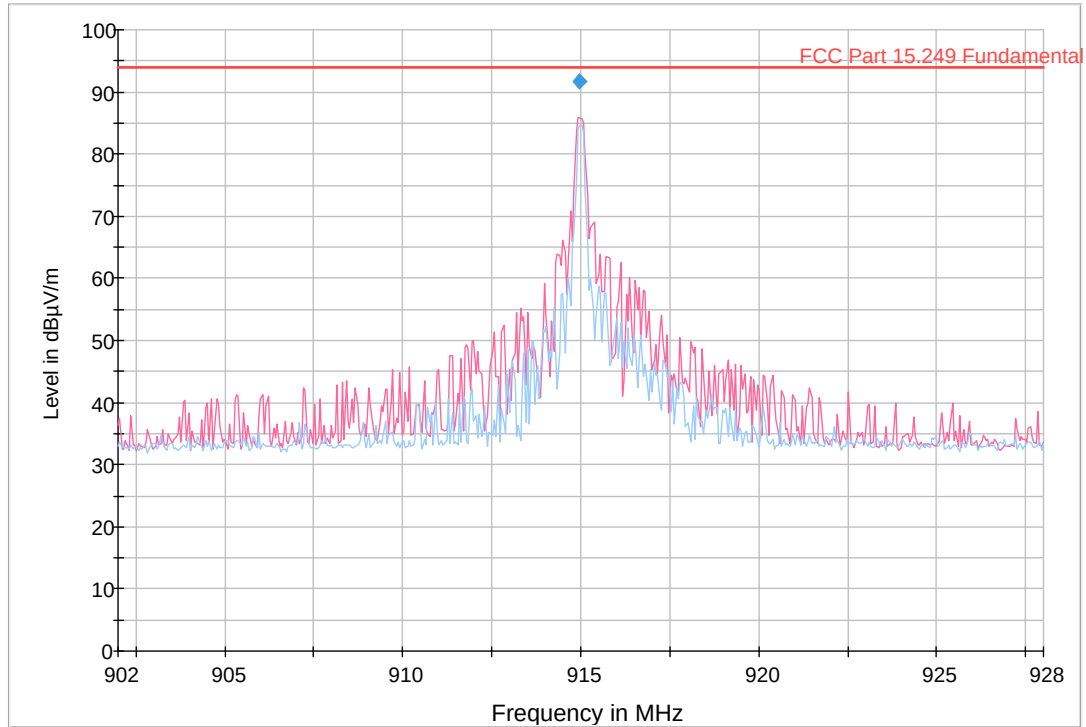

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
914.973948	91.7	1000.0	120.000	100.0	V	329.0	6.4	2.3	94.0


2.3.17 Test Results for High Channel (Fundamental Emissions) for model 7077194 (Internal antenna)

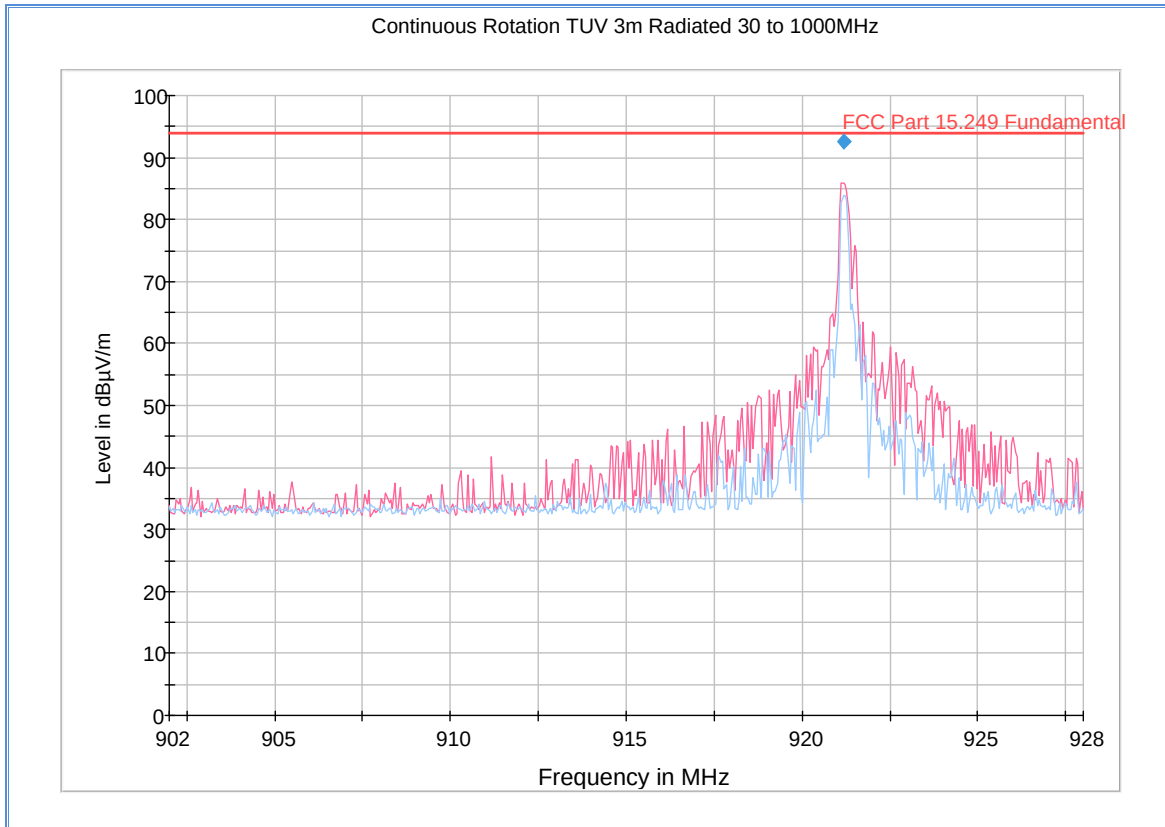

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
921.202245	92.6	1000.0	120.000	100.0	V	10.0	6.4	1.4	94.0


2.3.18 Test Results for Low Channel (Band Edge) for model 7077194 (Internal antenna)

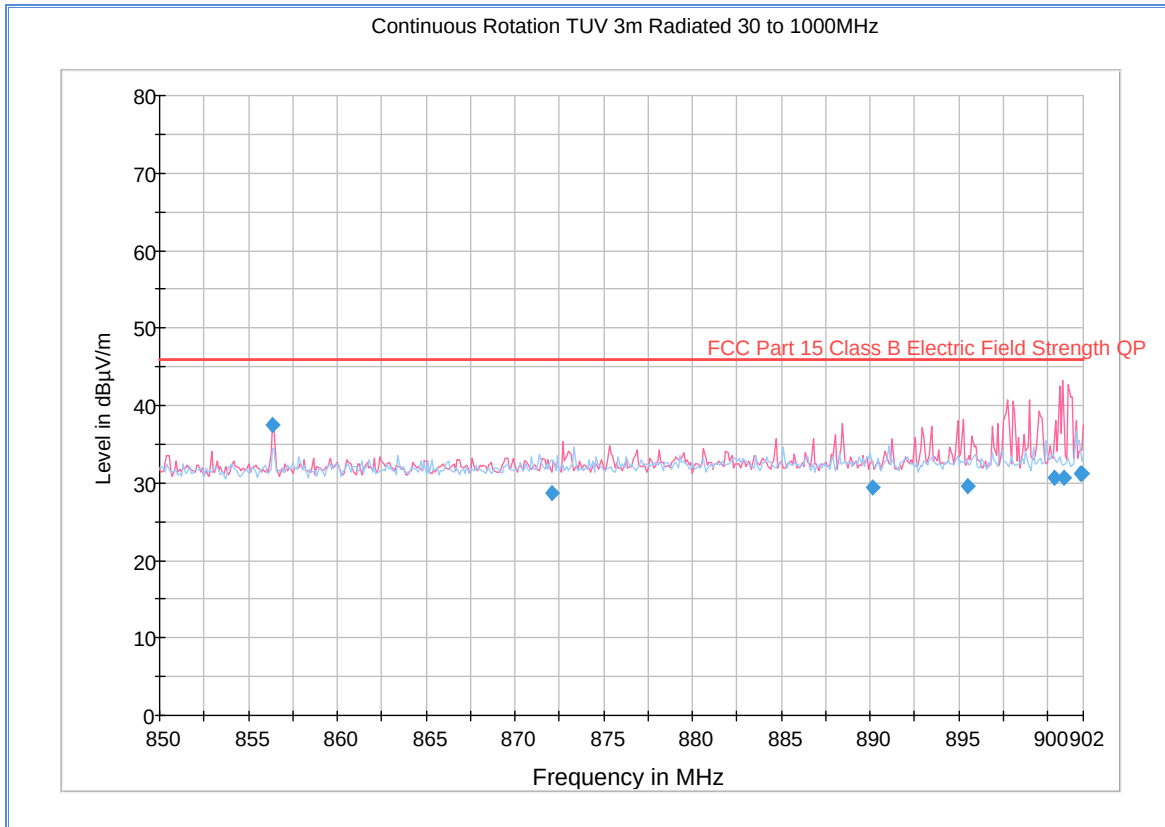

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
856.380922	37.4	1000.0	120.000	109.0	V	23.0	4.6	8.6	46.0
872.117435	28.7	1000.0	120.000	116.0	V	40.0	5.0	17.3	46.0
890.132906	29.5	1000.0	120.000	109.0	V	15.0	5.6	16.5	46.0
895.513828	29.6	1000.0	120.000	100.0	V	4.0	5.6	16.4	46.0
900.407455	30.6	1000.0	120.000	105.0	V	15.0	5.9	15.4	46.0
900.897956	30.6	1000.0	120.000	100.0	V	36.0	5.9	15.4	46.0
901.840000	31.2	1000.0	120.000	100.0	V	15.0	5.9	14.8	46.0
901.886333	31.3	1000.0	120.000	100.0	V	4.0	5.9	14.7	46.0

2.3.19 Test Results for High Channel (Band Edge) for model 7077194 (Internal antenna)

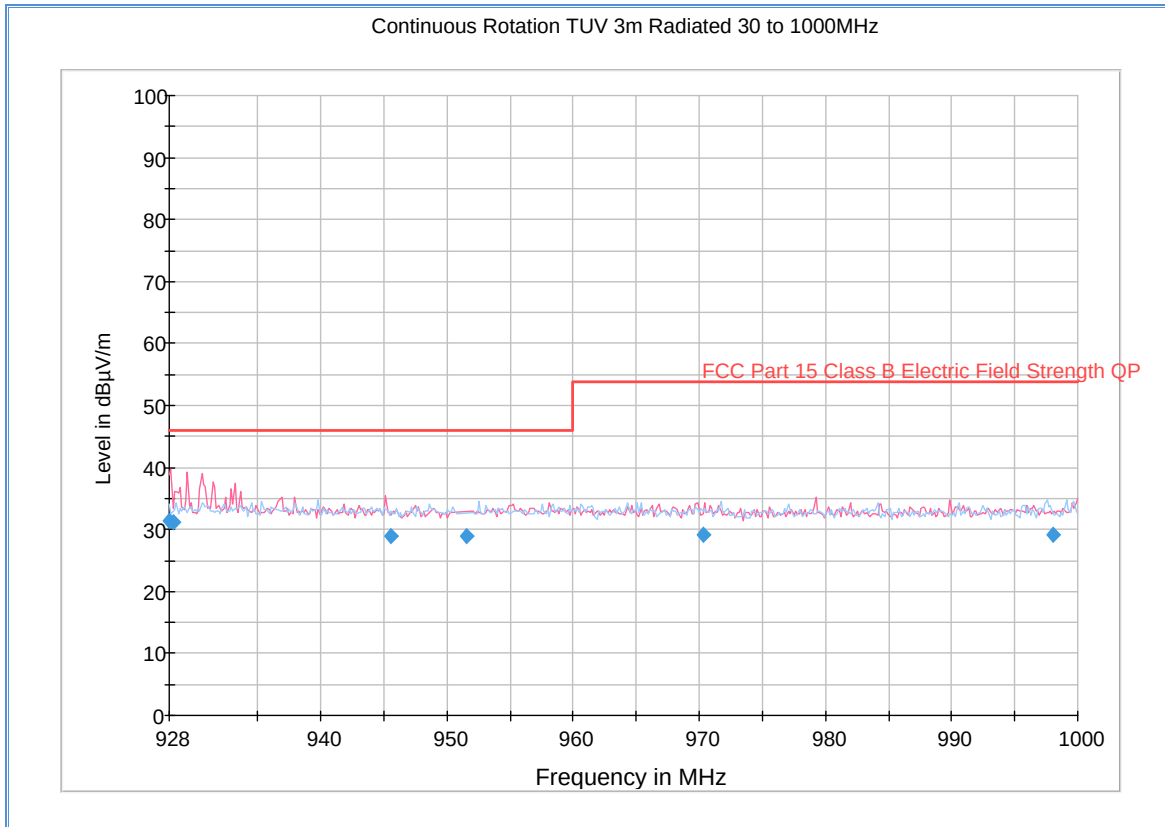

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
928.040000	31.4	1000.0	120.000	100.0	V	345.0	6.3	14.6	46.0
928.320000	31.2	1000.0	120.000	100.0	V	358.0	6.3	14.8	46.0
945.570341	29.0	1000.0	120.000	400.0	V	73.0	6.0	17.0	46.0
951.606172	29.0	1000.0	120.000	333.0	V	296.0	6.1	17.0	46.0
970.359439	29.1	1000.0	120.000	250.0	H	1.0	6.1	24.8	53.9
997.987094	29.1	1000.0	120.000	350.0	H	295.0	6.4	24.8	53.9



2.4 SPURIOUS RADIATED EMISSIONS

2.4.1 Specification Reference

Part 15 Subpart C §15.249(d)

2.4.2 Standard Applicable

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

2.4.3 Equipment Under Test and Modification State

Serial No: 2012RMSAAS0001, 2012RMSAASFCC01, and 2012RMSAASFCC05 / Default Test Configuration

2.4.4 Date of Test/Initial of test personnel who performed the test

July 25, 2014 / AC

2.4.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	25.2°C
Relative Humidity	46.6%
ATM Pressure	99.3 kPa


2.4.7 Additional Observations

- This is a radiated test. The spectrum was searched from 30MHz to the 10th harmonic (25GHz). There are no significant emissions observed beyond 18GHz.
- Duty Cycle was used to calculate average compliance based from peak data measurements.
- When calculating Duty Cycle, the EUT was configured to normal operation (actual duty cycle vs. 100% duty cycle when in test mode).
- No significant emission difference between the three channels observed below 1GHz. Data presented is from worst configuration based from fundamental verification ("Y" axis configuration).
- Spurious emission measurements above 1GHz were performed with a notch filter attenuating the fundamental frequencies.
- Measurement was done using EMC32 V8.53 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.4.8 for sample computation.

2.4.8 Sample Computation (Radiated Emission)

Measuring equipment raw measurement (dBμV) @ 30 MHz			24.4
Correction Factor (dB)	Asset# 1066 (cable)	0.3	-12.6
	Asset# 1172 (cable)	0.3	
	Asset# 1016 (preamplifier)	-30.7	
	Asset# 1175 (cable)	0.3	
	Asset# 1002 (antenna)	17.2	
Reported QuasiPeak Final Measurement (dBμV/m) @ 30MHz			11.8

2.4.9 Duty Cycle Correction Factor Calculation

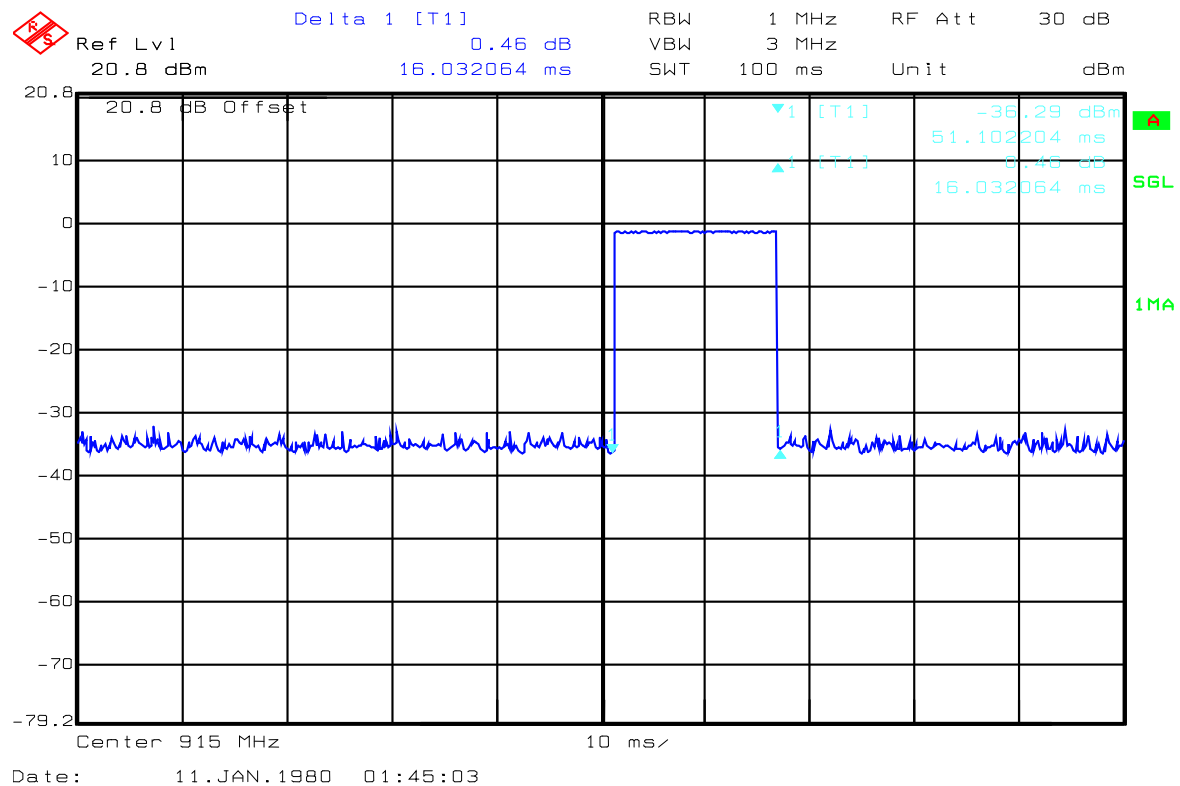

100ms sweep (representative channel)


Duty Cycle Calculation: = 16.03ms "On" time per 100 ms sweep
 Duty Cycle Correction Factor = 20 log (0.01603)
 = -35.90 (Limited to -20dB)

Sample Calculation for Low Channel = 92.2 dBμV/m Peak @ 3 meters):
 = 92.2 dBμV/m + (-20 dB)
 = 72.2 dBμV/m Average @ 3 meters

2.4.1 Test Results

See attached plots.


2.4.2 Test Results Below 1GHz (High Channel – Worst Case Configuration) for model 7078495 (External antenna)

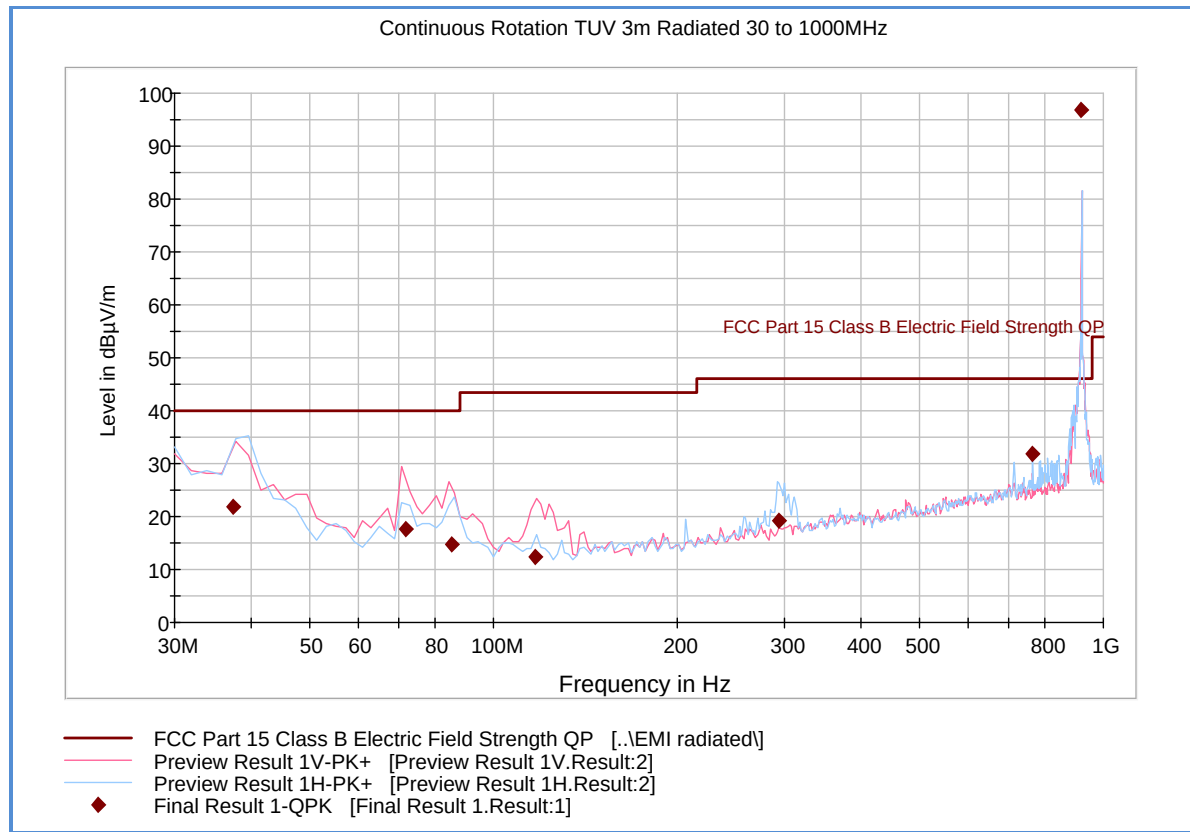

Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
37.399439	21.8	1000.0	120.000	383.0	H	9.0	-14.4	18.2	40.0
71.821643	17.5	1000.0	120.000	200.0	V	214.0	-21.4	22.5	40.0
85.372745	14.8	1000.0	120.000	109.0	V	102.0	-20.7	25.2	40.0
116.994950	12.4	1000.0	120.000	100.0	V	239.0	-19.2	31.1	43.5
293.584850	19.2	1000.0	120.000	105.0	H	308.0	-11.9	26.8	46.0
765.133467	31.9	1000.0	120.000	100.0	H	77.0	-0.8	14.1	46.0
921.164489	96.9	1000.0	120.000	250.0	H	155.0		Fundamental	

2.4.3 Test Results Above 1GHz (Low Channel) for model 7078495 (External antenna)

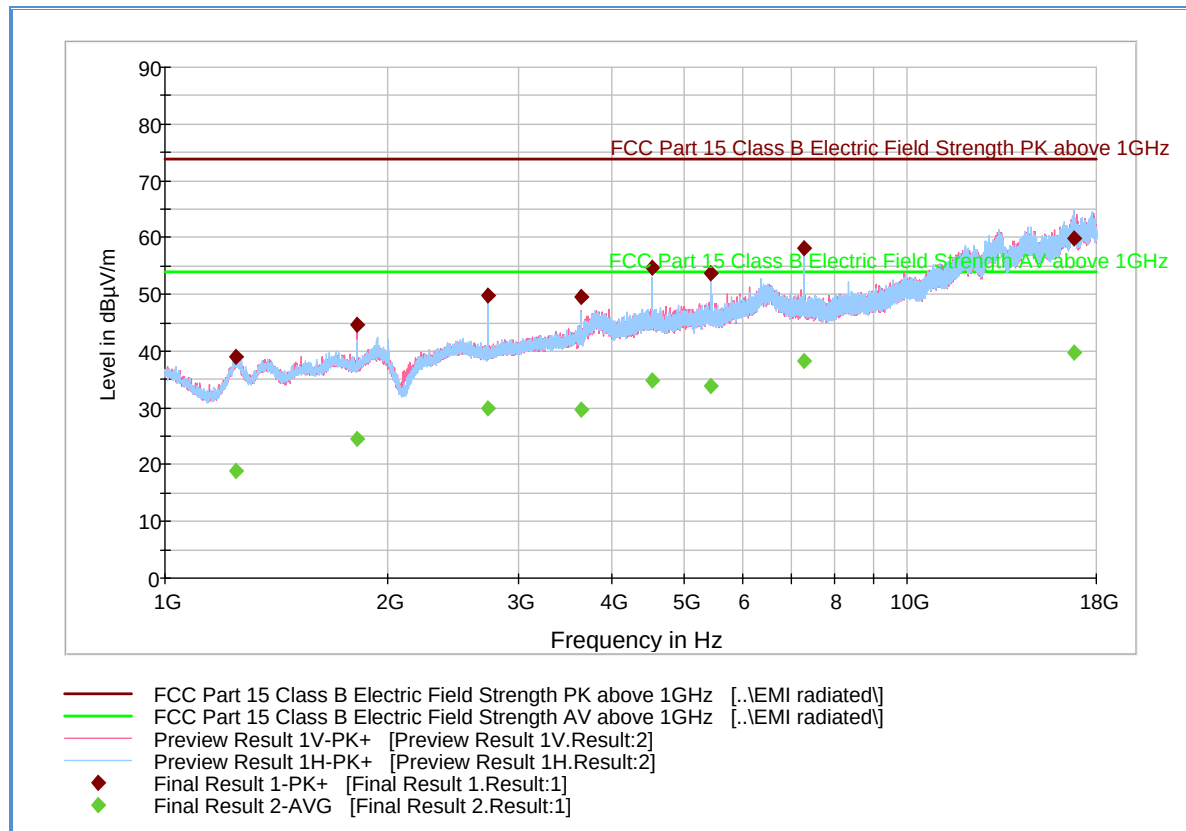

Peak and Average Data

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Peak/Average Margin (dB)	Peak Limit (dBµV)	Average Limit (dBµV/)
1245.03333	39.0	19.0	1000.	1000.000	386.1	H	20.0	-5.3	34.9	73.9	53.9
1816.76666	44.6	24.6	1000.	1000.000	266.3	V	333.0	-2.8	29.3	73.9	53.9
2725.13333	49.8	29.8	1000.	1000.000	102.8	H	-16.0	-1.0	24.1	73.9	53.9
3633.13333	49.6	29.6	1000.	1000.000	101.7	V	80.0	3.7	24.3	73.9	53.9
4541.50000	54.8	34.8	1000.	1000.000	99.7	H	39.0	6.9	19.1	73.9	53.9
5450.23333	53.8	33.8	1000.	1000.000	277.2	H	110.0	8.9	20.1	73.9	53.9
7266.56666	58.2	38.2	1000.	1000.000	208.5	H	30.0	11.2	15.7	73.9	53.9
16767.0666	59.8	39.8	1000.	1000.000	301.2	H	95.0	25.9	14.1	73.9	53.9

Test Notes: Average data is from Peak data with Duty Cycle Correction Factor applied.

Sample frequency computation:


4541.5 MHz

= 54.8 dBµV/m (Peak)

= 54.8 dBµV/m + (-20 dB DCCF)

= 34.8 dBµV/m (Average)

2.4.4 Test Results Above 1GHz (Mid Channel) for model 7078495 (External antenna)

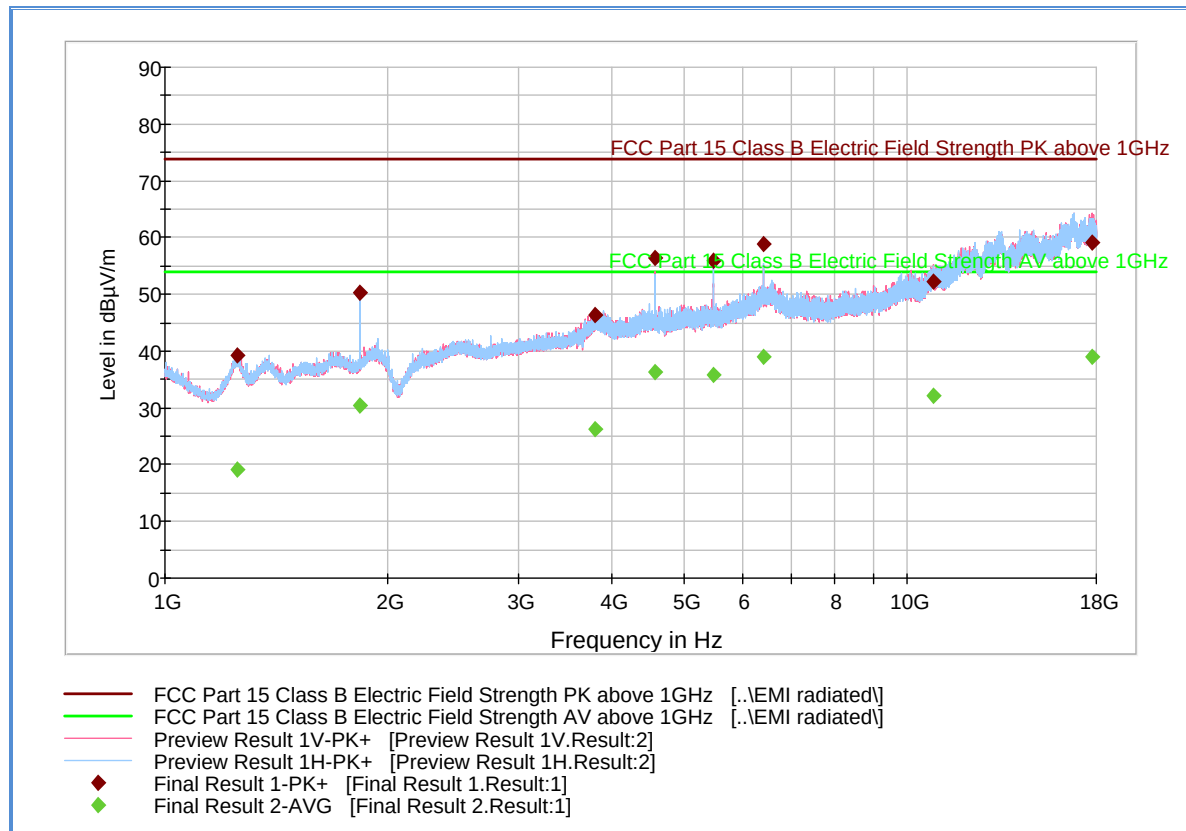

Peak and Average Data


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Peak/Average Margin (dB)	Peak Limit (dBμV)	Average Limit (dBμV/)
1253.83333	39.2	19.2	1000.	1000.000	178.6	V	50.0	-5.3	34.7	73.9	53.9
1829.80000	50.3	30.3	1000.	1000.000	113.7	H	123.0	-2.6	23.6	73.9	53.9
3803.53333	46.3	26.3	1000.	1000.000	196.5	H	346.0	6.0	27.6	73.9	53.9
4574.73333	56.4	36.4	1000.	1000.000	99.7	H	39.0	7.0	17.5	73.9	53.9
5489.33333	55.8	35.8	1000.	1000.000	345.1	H	305.0	8.9	18.1	73.9	53.9
6404.10000	58.9	38.9	1000.	1000.000	164.6	H	20.0	12.7	15.0	73.9	53.9
10876.9666	52.2	32.2	1000.	1000.000	225.4	V	133.0	16.7	21.7	73.9	53.9
17792.2333	59.1	39.1	1000.	1000.000	202.5	V	7.0	25.8	14.8	73.9	53.9

Test Notes: Average data is from Peak data with Duty Cycle Correction Factor applied.

Sample frequency computation:

$$\begin{aligned}
 4574.7 \text{ MHz} &= 56.4 \text{ dB}\mu\text{V/m (Peak)} \\
 &= 56.4 \text{ dB}\mu\text{V/m} + (-20 \text{ dB DCCF}) \\
 &= 36.4 \text{ dB}\mu\text{V/m (Average)}
 \end{aligned}$$

2.4.5 Test Results Above 1GHz (High Channel) for model 7078495 (External antenna)

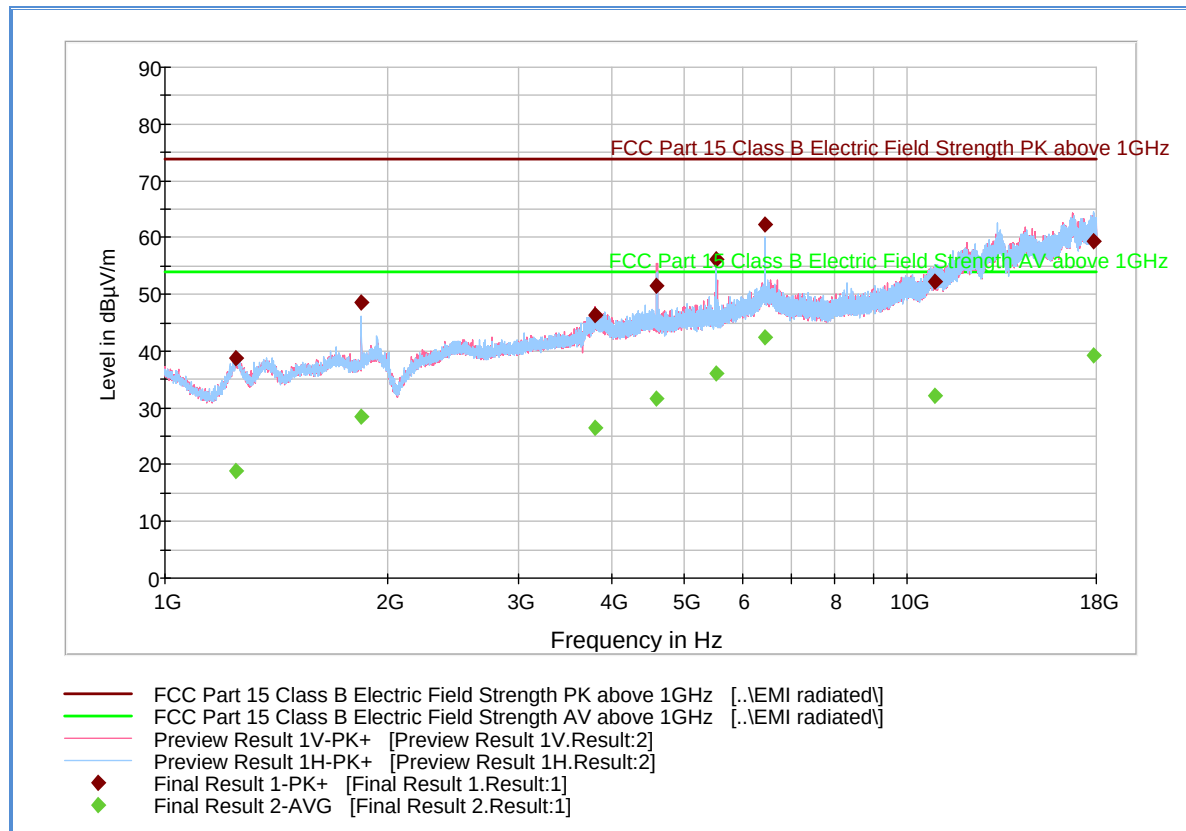

Peak and Average Data

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Peak/Average Margin (dB)	Peak Limit (dBμV)	Average Limit (dBμV/)
1245.36666	38.9	18.9	1000.	1000.000	201.5	V	60.0	-5.3	35.0	73.9	53.9
1842.26666	48.4	28.4	1000.	1000.000	113.7	H	223.0	-2.4	25.5	73.9	53.9
3806.33333	46.5	26.5	1000.	1000.000	301.6	V	0.0	6.0	27.4	73.9	53.9
4605.53333	51.6	31.6	1000.	1000.000	147.7	V	186.0	7.0	22.3	73.9	53.9
5526.73333	56.1	36.1	1000.	1000.000	226.4	H	125.0	8.9	17.8	73.9	53.9
6447.73333	62.4	42.4	1000.	1000.000	163.6	H	9.0	12.7	11.5	73.9	53.9
10914.0666	52.1	32.1	1000.	1000.000	186.5	H	77.0	16.8	21.8	73.9	53.9
17811.2666	59.3	39.3	1000.	1000.000	301.2	H	242.0	25.8	14.6	73.9	53.9


Test Notes: Average data is from Peak data with Duty Cycle Correction Factor applied.

Sample frequency computation:

$$\begin{aligned}
 4605.5 \text{ MHz} &= 51.6 \text{ dB}\mu\text{V/m (Peak)} \\
 &= 51.6 \text{ dB}\mu\text{V/m} + (-20 \text{ dB DCCF}) \\
 &= 31.6 \text{ dB}\mu\text{V/m (Average)}
 \end{aligned}$$

2.4.6 Test Results Below 1GHz (Low Channel – Worst Case Configuration) for model 7077194 (Internal antenna)

Continuous Rotation TUV 3m Radiated 30 to 1000MHz

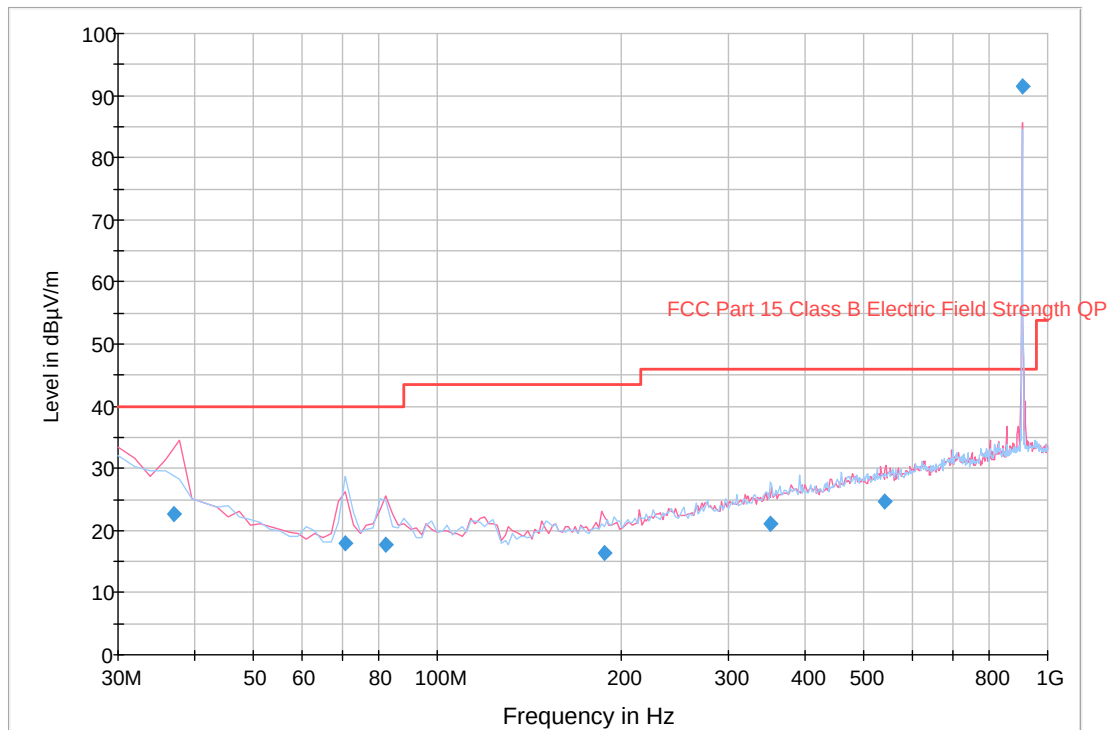


Quasi Peak Data

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
37.015551	22.7	1000.0	120.000	128.0	V	15.0	-9.6	17.3	40.0
70.701643	18.0	1000.0	120.000	100.0	H	83.0	-16.8	22.0	40.0
82.124970	17.6	1000.0	120.000	100.0	V	271.0	-16.3	22.4	40.0
187.951022	16.4	1000.0	120.000	146.0	V	78.0	-11.3	27.1	43.5
352.141483	21.0	1000.0	120.000	400.0	H	359.0	-5.4	25.0	46.0
541.546373	24.6	1000.0	120.000	309.0	V	282.0	-0.6	21.4	46.0
908.397275	91.5	1000.0	120.000	106.0	V	331.0	6.1	Fundamental	

2.4.7 Test Results Above 1GHz (Low Channel) for model 7077194 (Internal antenna)

Continuous Rotation TUV 3m Radiated 1000 to 18000MHz

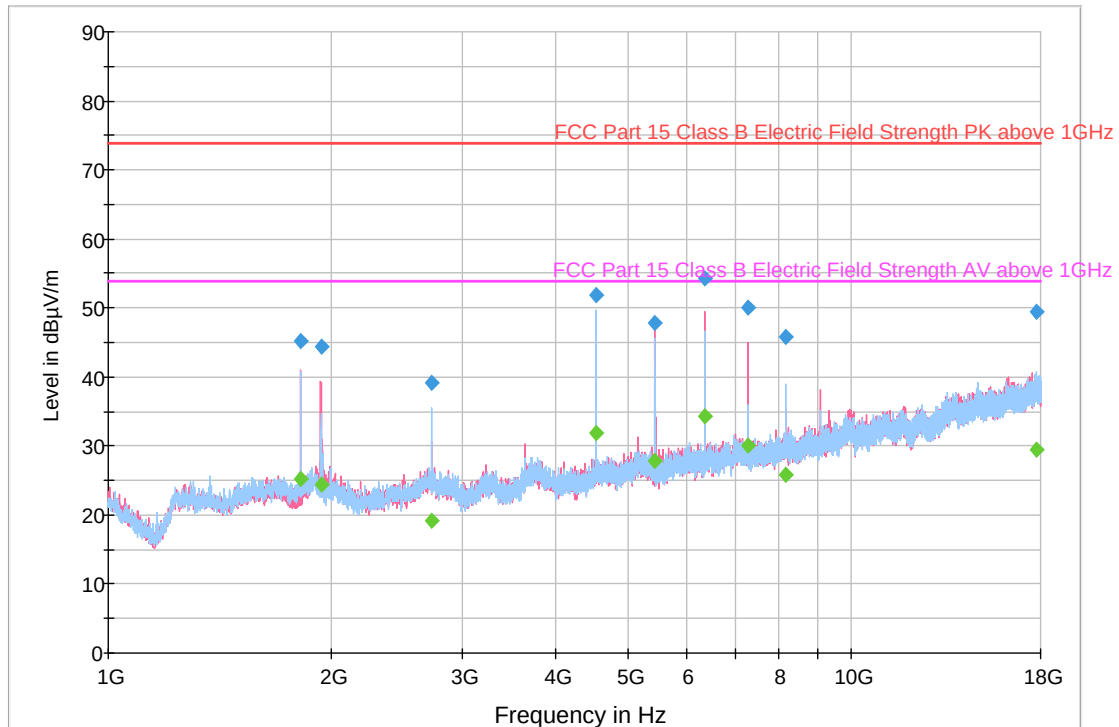

Peak and Average Data

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Peak Margin (dB)	Peak Limit (dBμV)	Average Limit (dBμV/)
1817.56666	45.2	25.2	1000.	1000.000	103.7	V	46.0	-8.0	28.7	73.9	53.9
1932.96666	44.4	24.4	1000.	1000.000	397.4	V	141.0	-6.5	29.5	73.9	53.9
2725.13333	39.2	19.2	1000.	1000.000	391.1	H	20.0	-5.7	34.7	73.9	53.9
4541.86666	51.8	31.8	1000.	1000.000	131.7	H	0.0	-2.4	22.1	73.9	53.9
5450.23333	47.8	27.8	1000.	1000.000	219.4	V	-3.0	0.4	26.1	73.9	53.9
6358.80000	54.4	34.4	1000.	1000.000	182.5	V	14.0	2.4	19.5	73.9	53.9
7267.36666	50.0	30.0	1000.	1000.000	155.6	V	20.0	3.9	23.9	73.9	53.9
8175.10000	45.8	25.8	1000.	1000.000	182.5	H	-3.0	4.5	28.1	73.9	53.9
17767.2333	49.4	29.4	1000.	1000.000	203.4	H	145.0	16.5	24.5	73.9	53.9

Test Notes: Average data is from Peak data with Duty Cycle Correction Factor applied.

Sample frequency computation:

6358.8MHz


= 54.4 dBμV/m (Peak)

= 54.4 dBμV/m + (-20 dB DCCF)

= 34.4 dBμV/m (Average)

2.4.8 Test Results Above 1GHz (Mid Channel) for model 7077194 (Internal antenna)

Continuous Rotation TUV 3m Radiated 1000 to 18000MHz

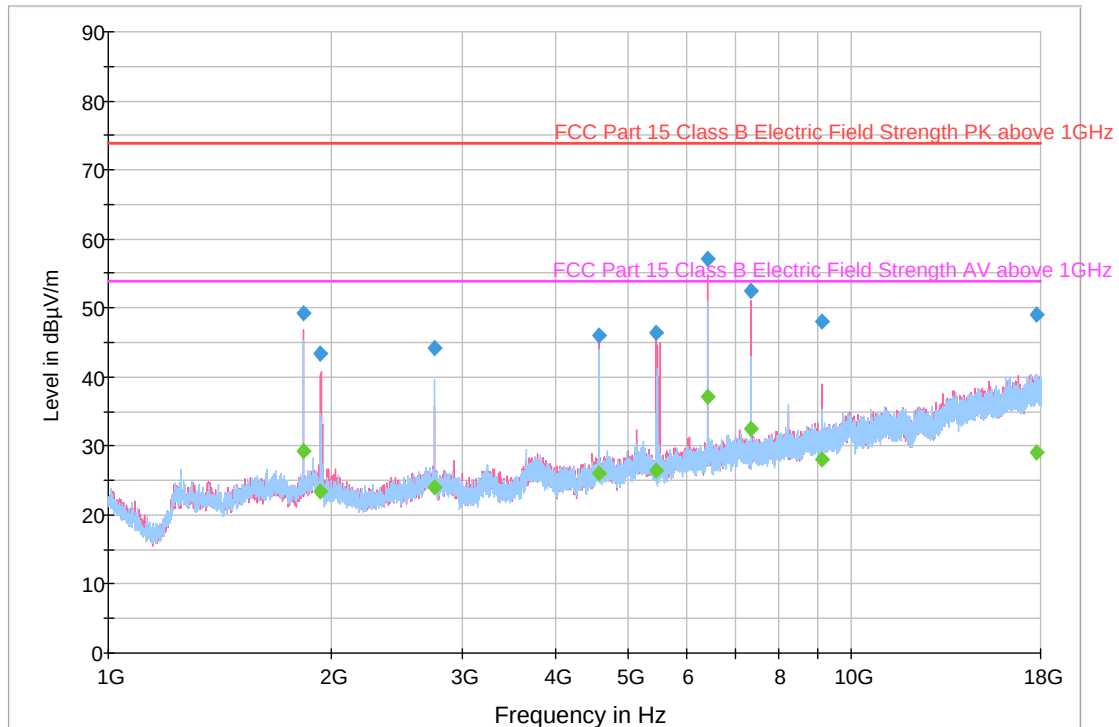

Peak and Average Data

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Peak Margin (dB)	Peak Limit (dBμV)	Average Limit (dBμV/)
1829.80000	49.2	29.2	1000.	1000.000	103.7	V	50.0	-7.9	24.7	73.9	53.9
1932.13333	43.4	23.4	1000.	1000.000	397.4	V	249.0	-6.5	30.5	73.9	53.9
2744.96666	44.1	24.1	1000.	1000.000	300.2	H	-16.0	-5.7	29.8	73.9	53.9
4574.90000	46.0	26.0	1000.	1000.000	154.6	V	52.0	-2.3	27.9	73.9	53.9
5470.96666	46.5	26.5	1000.	1000.000	219.4	V	4.0	0.4	27.4	73.9	53.9
6404.66666	57.1	37.1	1000.	1000.000	163.6	V	30.0	2.6	16.8	73.9	53.9
7319.83333	52.4	32.4	1000.	1000.000	155.6	V	24.0	3.9	21.5	73.9	53.9
9150.00000	48.0	28.0	1000.	1000.000	180.6	V	14.0	6.0	25.9	73.9	53.9
17801.3333	49.0	29.0	1000.	1000.000	103.7	H	158.0	16.6	24.9	73.9	53.9

Test Notes: Average data is from Peak data with Duty Cycle Correction Factor applied.

Sample frequency computation:


6404.66666 MHz

= 57.1 dBμV/m (Peak)

= 57.1 dBμV/m + (-20 dB DCCF)

= 37.1 dBμV/m (Average)

2.4.9 Test Results Above 1GHz (High Channel) for model 7077194 (Internal antenna)

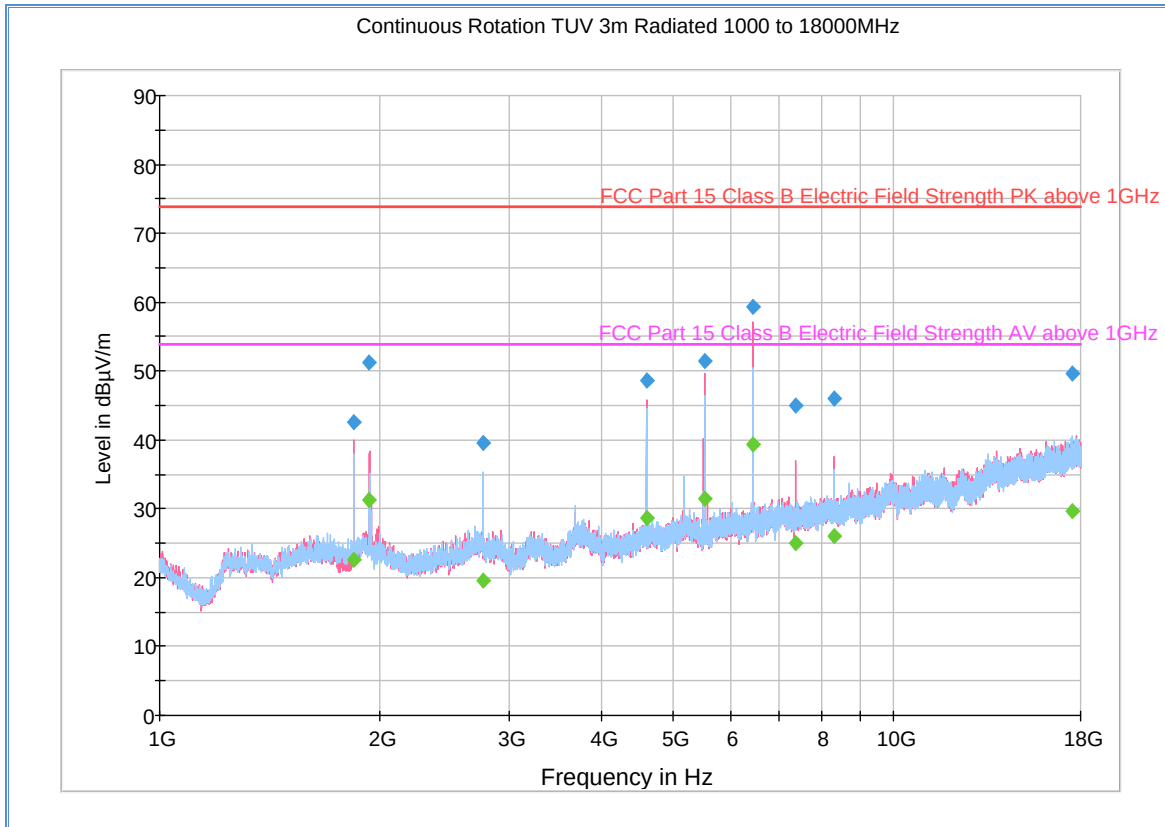

Peak and Average Data

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Peak/Average Margin (dB)	Peak Limit (dBµV)	Average Limit (dBµV/)
1842.26666	42.6	22.6	1000.	1000.000	103.7	V	91.0	-7.8	31.3	73.9	53.9
1932.53333	51.3	31.3	1000.	1000.000	374.0	V	313.0	-6.5	22.6	73.9	53.9
2763.26666	39.6	19.6	1000.	1000.000	179.5	V	230.0	-5.7	34.3	73.9	53.9
4605.90000	48.6	28.6	1000.	1000.000	173.5	V	67.0	-2.3	25.3	73.9	53.9
5527.30000	51.4	31.4	1000.	1000.000	191.5	V	352.0	0.4	22.5	73.9	53.9
6448.33333	59.3	39.3	1000.	1000.000	157.6	V	31.0	2.8	14.6	73.9	53.9
7369.53333	45.1	25.1	1000.	1000.000	116.7	V	40.0	3.9	28.8	73.9	53.9
8290.53333	46.1	26.1	1000.	1000.000	175.5	V	25.0	4.6	27.8	73.9	53.9
17514.6000	49.6	29.6	1000.	1000.000	132.7	H	99.0	16.1	24.3	73.9	53.9

Test Notes: Average data is from Peak data with Duty Cycle Correction Factor applied.

Sample frequency computation:

6448.33333 MHz
 = 59.3 dBµV/m (Peak)
 = 59.3 dBµV/m + (-20 dB DCCF)
 = 39.3 dBµV/m (Average)



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
Radiated Test Setup						
1040	EMI Test Receiver	ESIB40	100292	Rhode & Schwarz	09/29/15	09/29/16
1033	Bilog Antenna	3142C	00044556	EMCO	09/25/14	09/25/16
1016	Pre-amplifier	PAM-0202	187	PAM	12/15/15	12/15/16
1049	EMI Test Receiver	ESU	100133	Rhode & Schwarz	03/17/16	03/17/17
8628	Pre-amplifier	QLJ 01182835-JO	8986002	QuinStar Technologies Inc.	01/11/16	01/11/17
1051	Double-ridged waveguide horn antenna	3115	9408-4329	EMCO	03/21/16	03/21/17
Conducted Test Setup						
9062	Wireless Communications Test Set	8960 Series 10 (E5515C)	00058717	Agilent	07/02/14	07/02/15
1184	20Hz to 26.5GHz Spectrum Analyzer	FSEM	DE23095	Rhode & Schwarz	06/27/14	06/27/15
Miscellaneous						
7560	Barometer/Temperature /Humidity Transmitter	iBTHX-W	1240476	Omega	01/30/14	01/30/15
	Test Software	EMC32	V8.53	Rhode & Schwarz	N/A	

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

3.2.1 Radiated Emission Measurements (Below 1GHz)

Contribution		Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.45	0.26	0.07
2	Cables	Rectangular	0.50	0.29	0.08
3	Preamp	Rectangular	0.50	0.29	0.08
4	Antenna	Rectangular	0.75	0.43	0.19
5	Site	Rectangular	2.70	1.56	2.43
6	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty (u_c):					1.78
Coverage Factor (k):					2
Expanded Uncertainty:					3.57

3.2.2 Radiated Emission Measurements (Above 1GHz)

Contribution		Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.57	0.33	0.11
2	Cables	Rectangular	0.70	0.40	0.16
3	Preamp	Rectangular	0.50	0.29	0.08
4	Antenna	Rectangular	0.37	0.21	0.05
5	Site	Rectangular	2.70	1.56	2.43
6	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty (u_c):					1.78
Coverage Factor (k):					2
Expanded Uncertainty:					3.56

3.2.3 Conducted Antenna Port Measurement


Contribution		Probability Distribution Type	Probability Distribution x_i	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.34	0.20	0.04
2	Cables	Rectangular	0.30	0.17	0.03
3	EUT Setup	Rectangular	0.50	0.29	0.08
Combined Uncertainty (u_c):					0.39
Coverage Factor (k):					1.96
Expanded Uncertainty:					0.76




SECTION 4

DIAGRAM OF TEST SETUP

4.1 TEST SETUP DIAGRAM

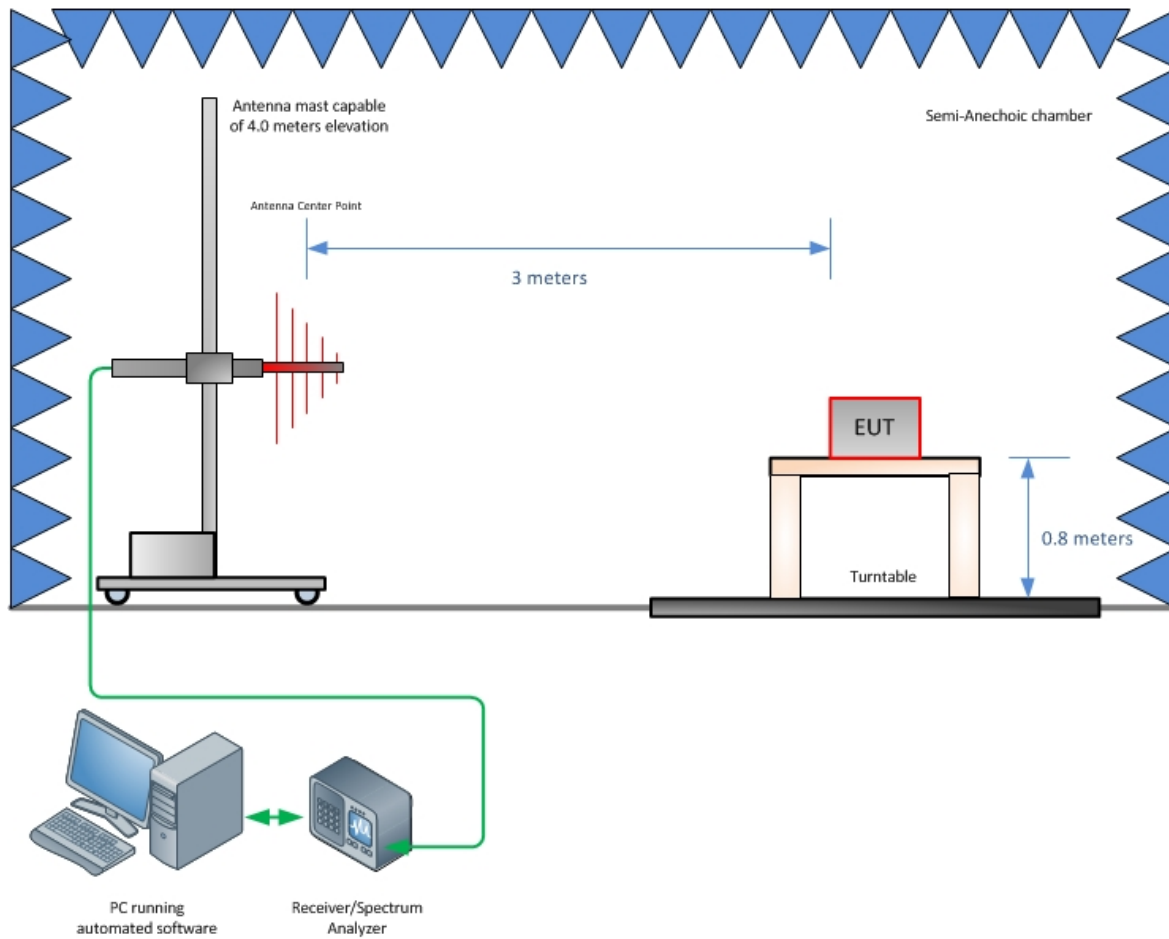

Radiated Emission Test Setup (Below 1GHz)

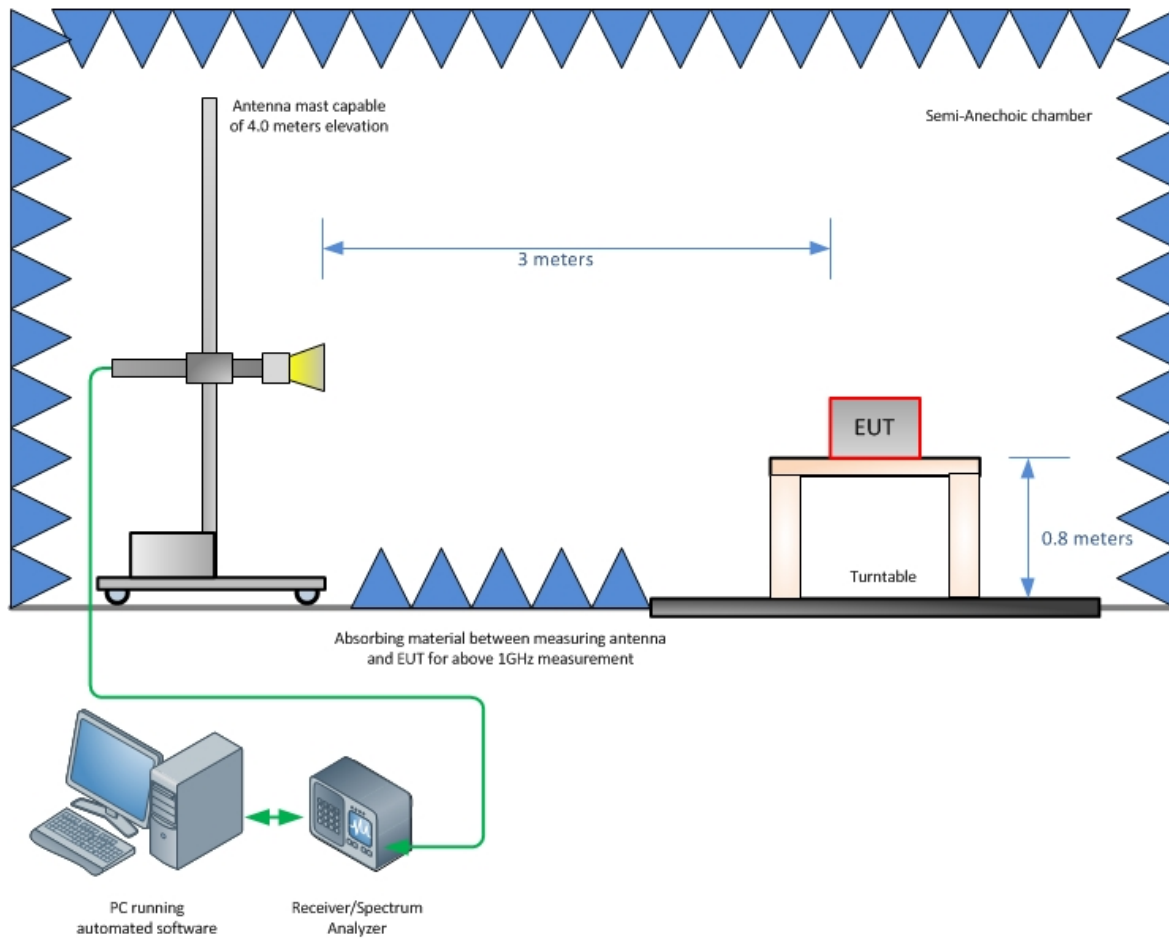

Radiated Emission Test Setup (Above 1GHz)



SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.

