

Plot 1#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 802.11b Low**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.0098

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.221$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.774 W/kg


Body Back/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.819 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.764 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 0.850 W/kg

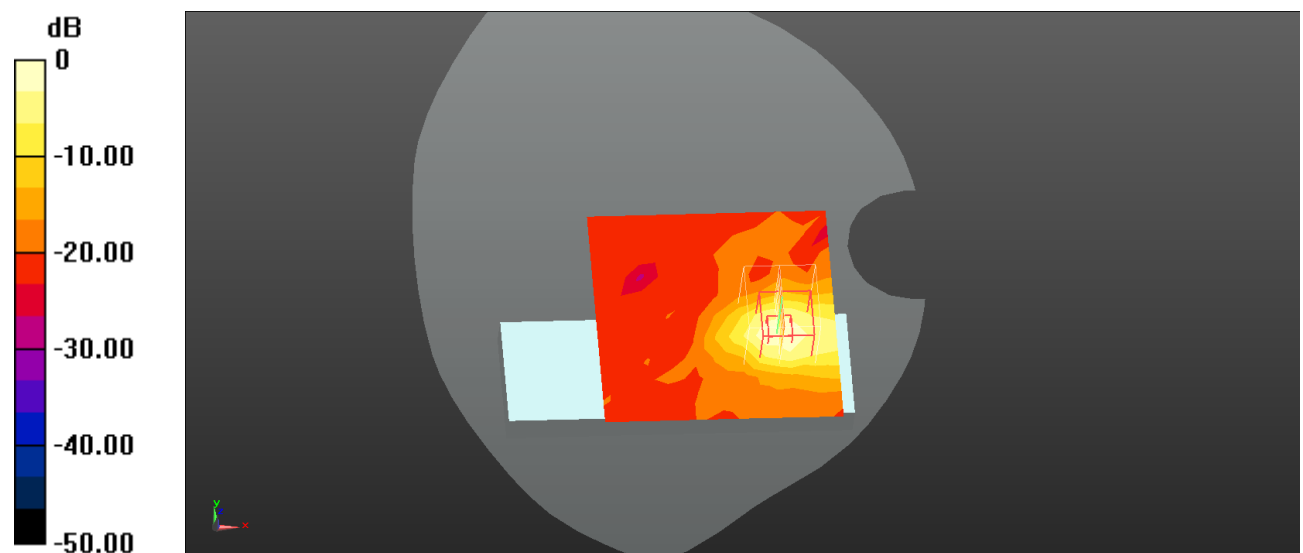

0 dB = 0.850 W/kg = -0.71 dBW/kg

Plot 2#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 802.11b Mid**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.0098

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 39.326$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.793 W/kg


Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.599 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.759 W/kg

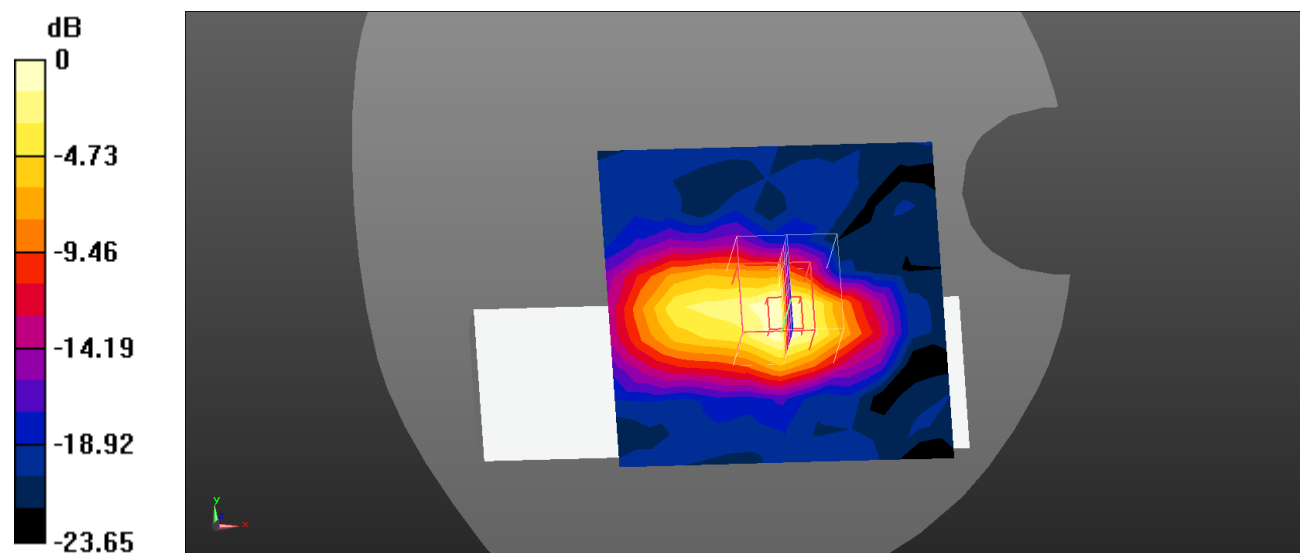

0 dB = 0.759 W/kg = -1.20 dBW/kg

Plot 3#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 802.11b High**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2462 MHz; Duty Cycle: 1:1.0098

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.866$ S/m; $\epsilon_r = 39.389$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.736 W/kg


Body Back/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.334 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.740 W/kg

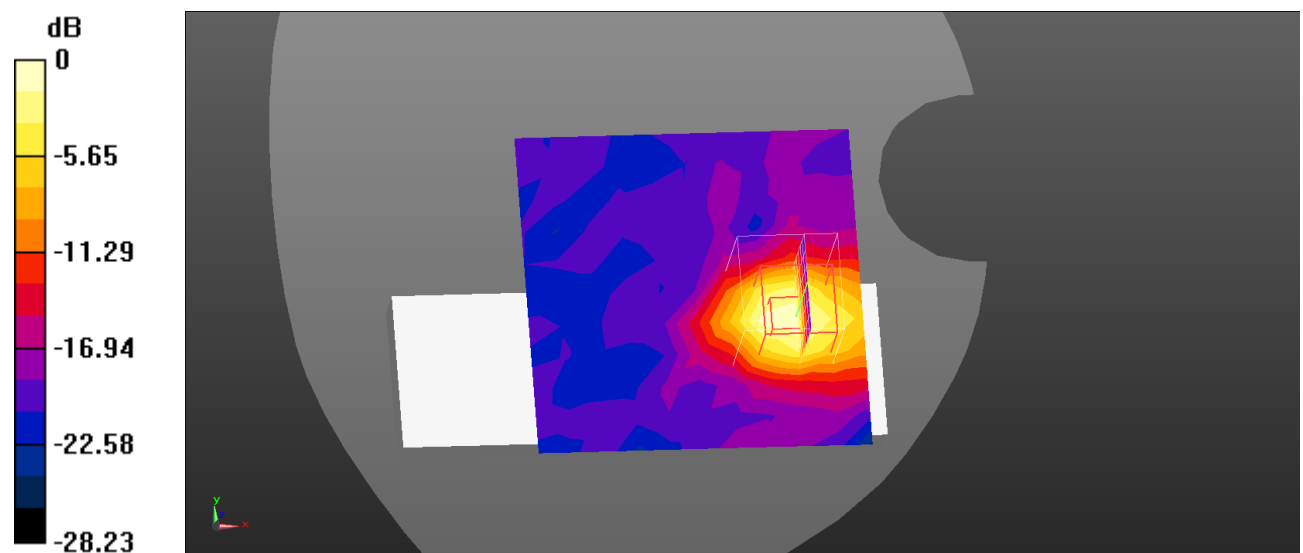

0 dB = 0.740 W/kg = -1.31 dBW/kg

Plot 4#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.2G 802.11n_HT40 Low**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5190 MHz; Duty Cycle: 1:1.03983

Medium parameters used (interpolated): $f = 5190$ MHz; $\sigma = 4.614$ S/m; $\epsilon_r = 36.904$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11n_HT40 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.966 W/kg


Body Back/WLAN 5.2G 802.11n_HT40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.361 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 4.39 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 2.11 W/kg

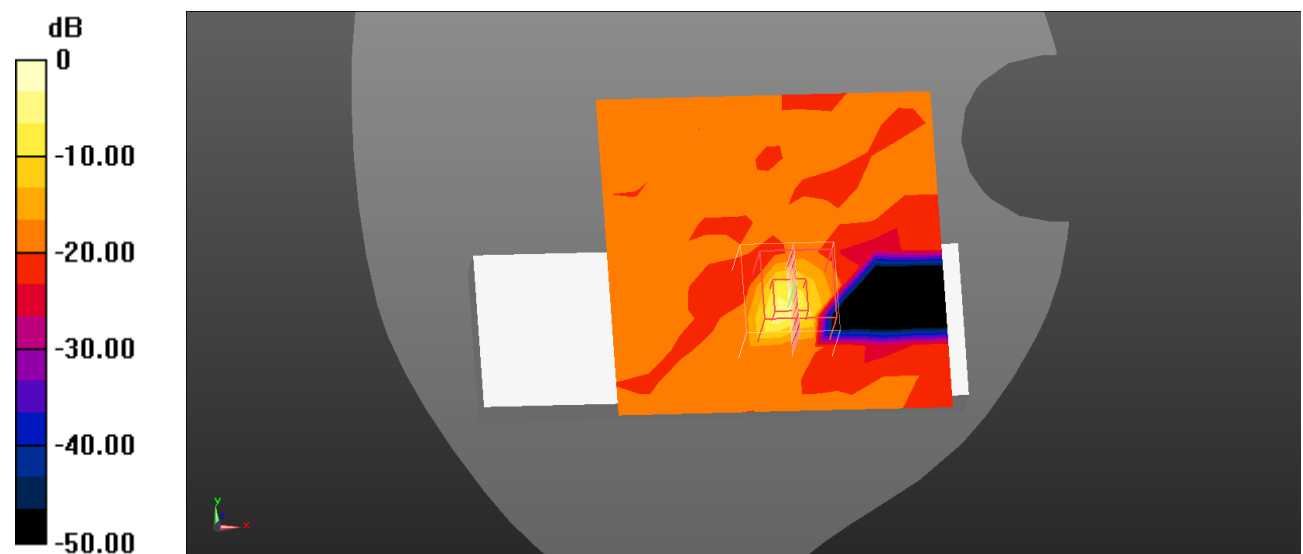

0 dB = 2.11 W/kg = 3.24 dBW/kg

Plot 5#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.2G 802.11n_HT40 High**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5230 MHz; Duty Cycle: 1:1.03983

Medium parameters used (interpolated): $f = 5230$ MHz; $\sigma = 4.667$ S/m; $\epsilon_r = 36.305$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11n_HT40 High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.06 W/kg


Body Back/WLAN 5.2G 802.11n_HT40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.330 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 5.01 W/kg

SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 2.35 W/kg

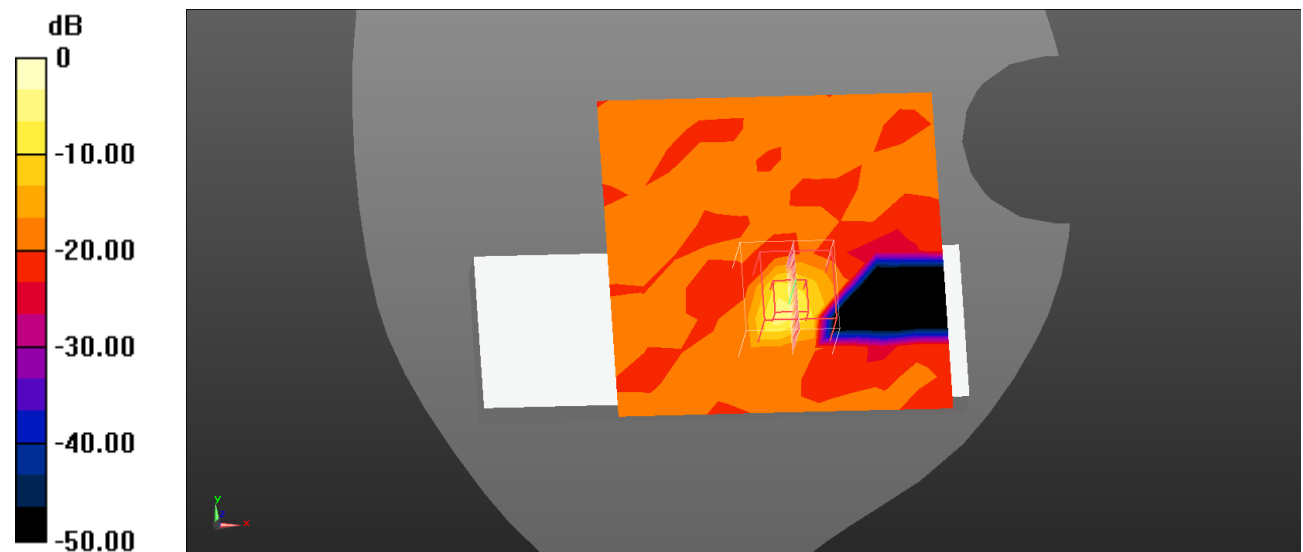

0 dB = 2.35 W/kg = 3.71 dBW/kg

Plot 6#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.3G 802.11n_HT40 Low**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5270 MHz; Duty Cycle: 1:1.03983

Medium parameters used (interpolated): $f = 5270$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 36.674$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.3G 802.11n_HT40 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.15 W/kg


Body Back/WLAN 5.3G 802.11n_HT40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.220 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.58 W/kg

SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 2.52 W/kg

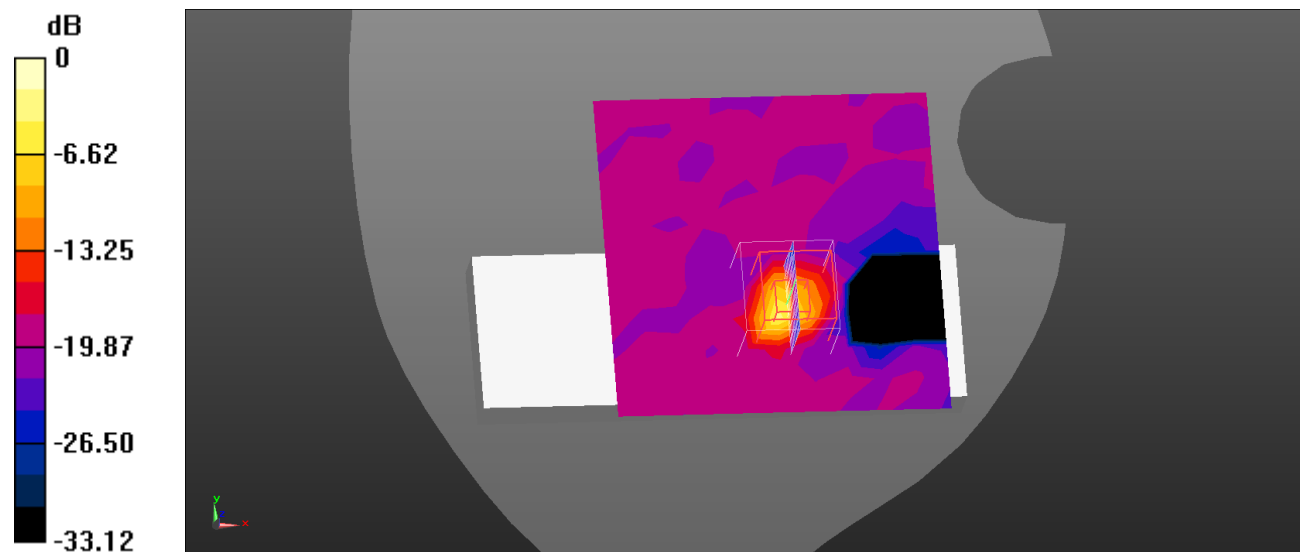

0 dB = 2.52 W/kg = 4.01 dBW/kg

Plot 7#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.3G 802.11n_HT40 High**

Communication System: UID 0, 5.3G WiFi (0); Frequency: 5310 MHz; Duty Cycle: 1:1.03983

Medium parameters used (interpolated): $f = 5310$ MHz; $\sigma = 4.665$ S/m; $\epsilon_r = 36.322$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.3G 802.11n_HT40 High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.22 W/kg


Body Back/WLAN 5.3G 802.11n_HT40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.068 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.93 W/kg

SAR(1 g) = 0.900 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 2.63 W/kg

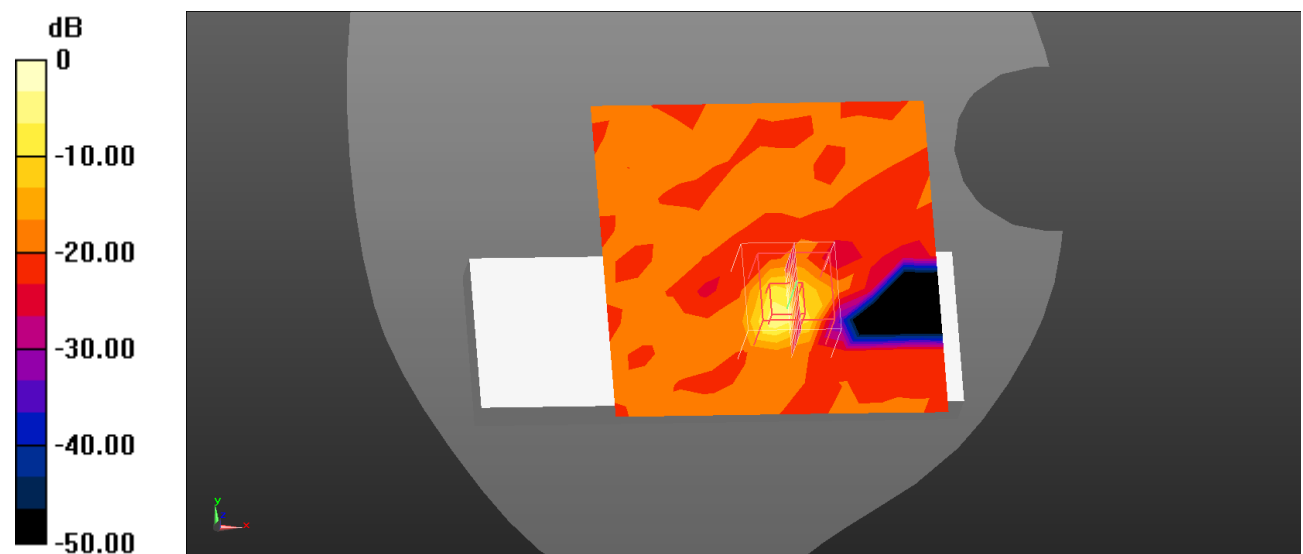

0 dB = 2.63 W/kg = 4.20 dBW/kg

Plot 8#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.6G 802.11n_HT40 Low**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5510 MHz; Duty Cycle: 1:1.04102

Medium parameters used (interpolated): $f = 5510$ MHz; $\sigma = 5.008$ S/m; $\epsilon_r = 35.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(4.85, 4.85, 4.85); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11n_HT40 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.22 W/kg


Body Back/WLAN 5.6G 802.11n_HT40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.248 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 5.97 W/kg

SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 2.54 W/kg

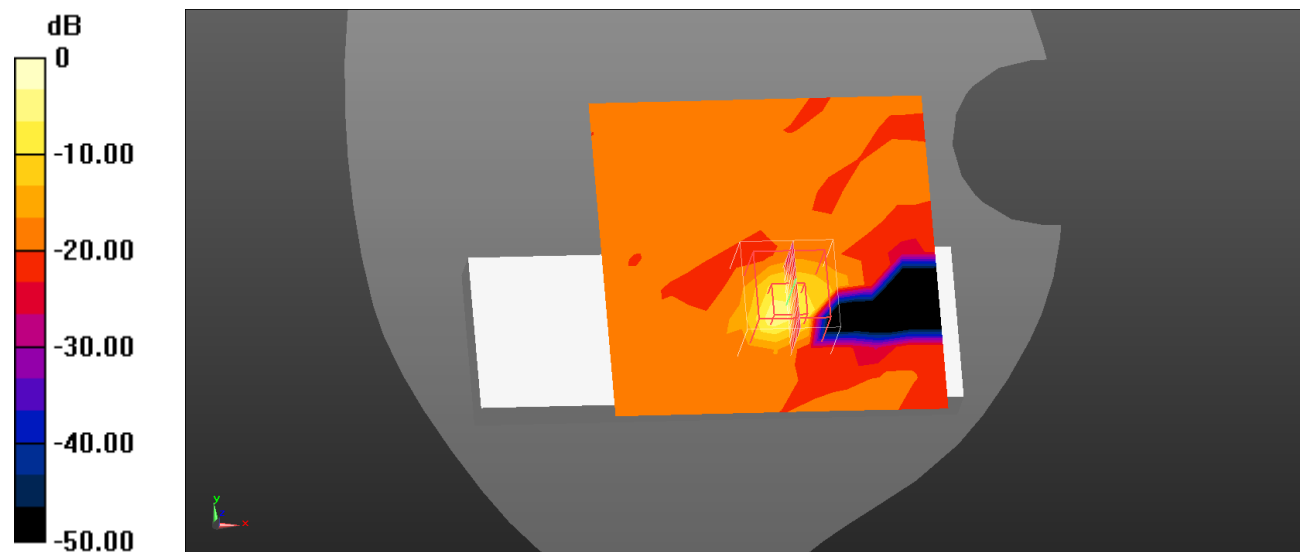

0 dB = 2.54 W/kg = 4.05 dBW/kg

Plot 9#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.6G 802.11n_HT40 Mid**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5550 MHz; Duty Cycle: 1:1.04102

Medium parameters used: $f = 5550$ MHz; $\sigma = 5.098$ S/m; $\epsilon_r = 35.978$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(4.85, 4.85, 4.85); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11n_HT40 Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.22 W/kg


Body Back/WLAN 5.6G 802.11n_HT40 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.518 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 6.10 W/kg

SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 2.55 W/kg

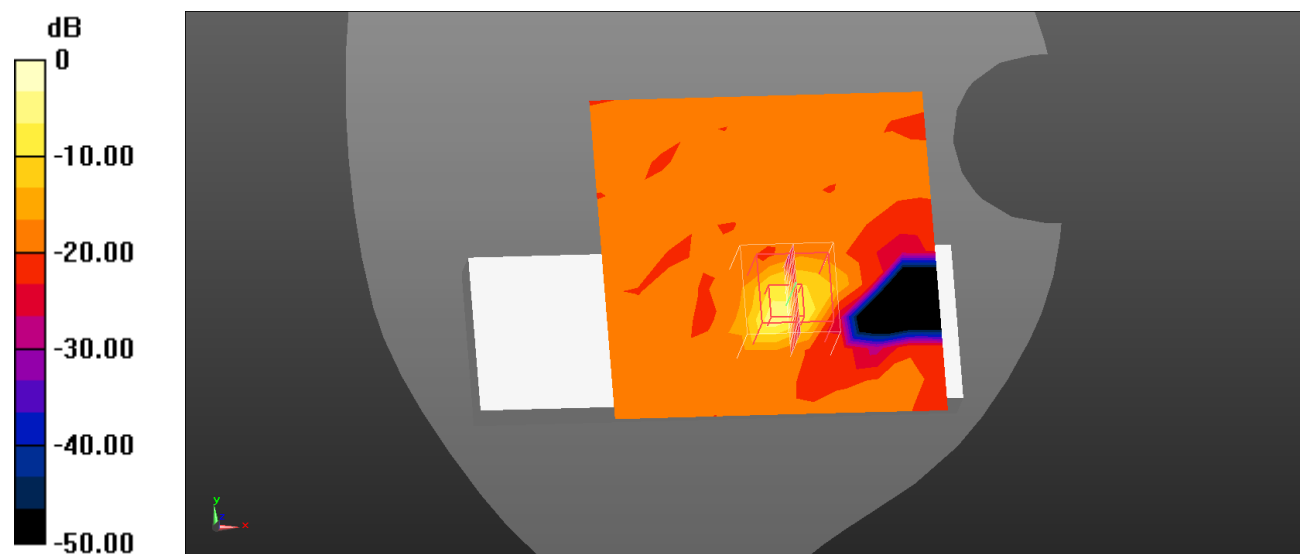

0 dB = 2.55 W/kg = 4.07 dBW/kg

Plot 10#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.6G 802.11n_HT40 High**

Communication System: UID 0, 5.6G WiFi (0); Frequency: 5670 MHz; Duty Cycle: 1:104102

Medium parameters used (interpolated): $f = 5670$ MHz; $\sigma = 5.232$ S/m; $\epsilon_r = 35.289$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(4.85, 4.85, 4.85); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.6G 802.11n_HT40 High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.10 W/kg


Body Back/WLAN 5.6G 802.11n_HT40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.464 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 2.21 W/kg

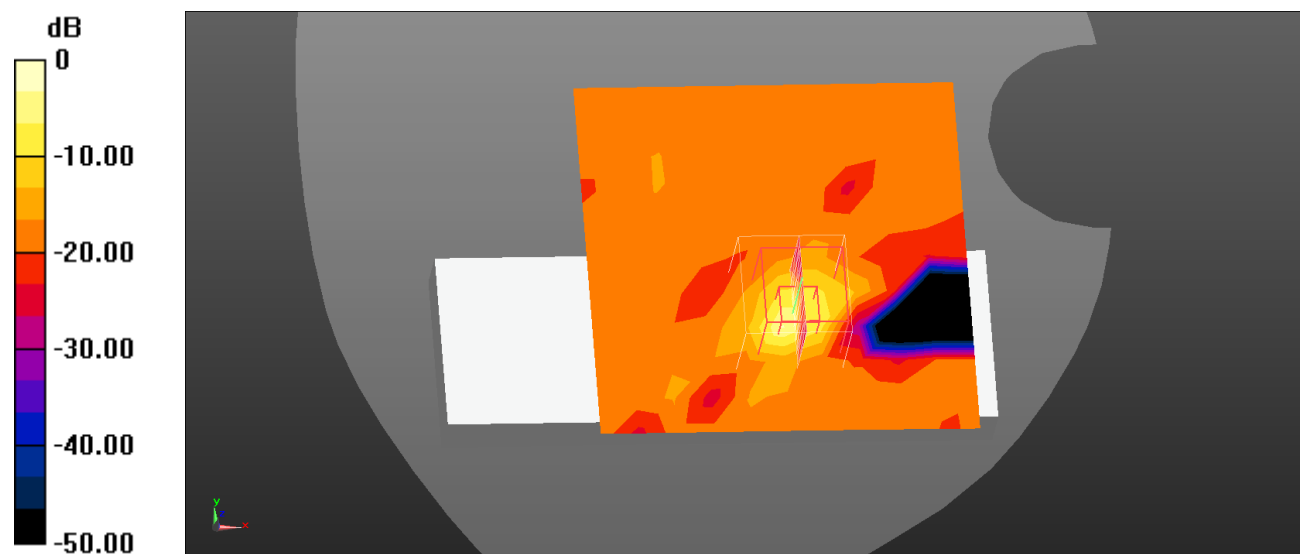

0 dB = 2.21 W/kg = 3.44 dBW/kg

Plot 11#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.8G 802.11n_NT40 Low**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz; Duty Cycle: 1:1.03983

Medium parameters used (interpolated): $f = 5755$ MHz; $\sigma = 5.166$ S/m; $\epsilon_r = 35.317$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(4.83, 4.83, 4.83); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11n_NT40 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.15 W/kg


Body Back/WLAN 5.8G 802.11n_NT40 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.648 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 5.58 W/kg

SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 2.29 W/kg

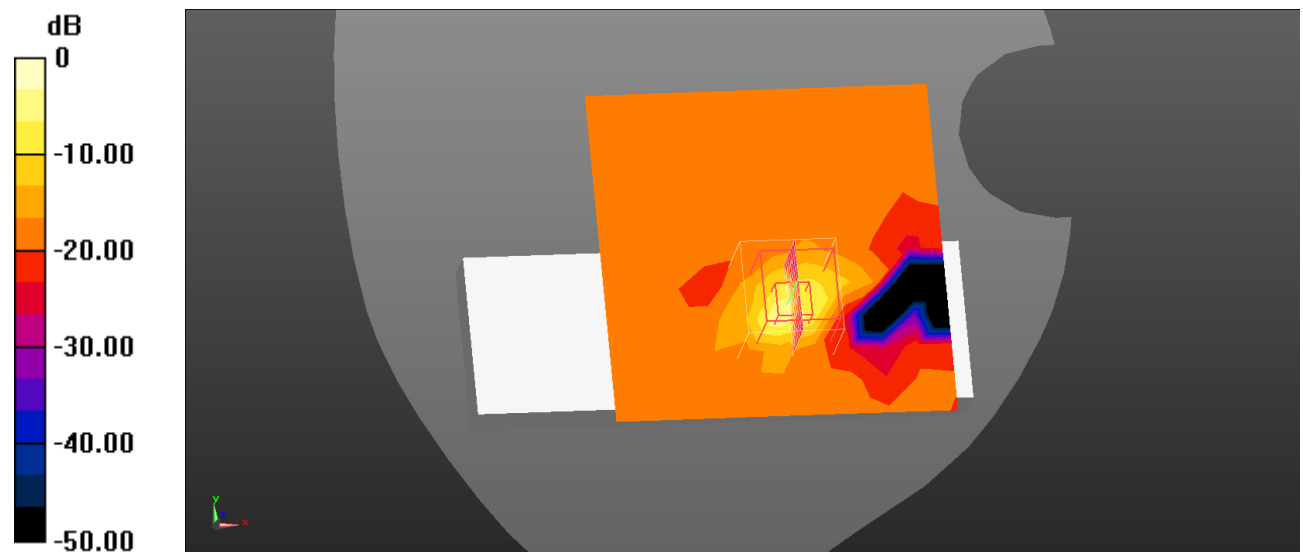

Plot 12#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: WLAN 5.8G 802.11n_HT40 High**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz; Duty Cycle: 1:1.03983

Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35.528$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(4.83, 4.83, 4.83); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11n_NT40 High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.24 W/kg


Body Back/WLAN 5.8G 802.11n_NT40 High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.505 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 6.05 W/kg

SAR(1 g) = 0.845 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 2.49 W/kg

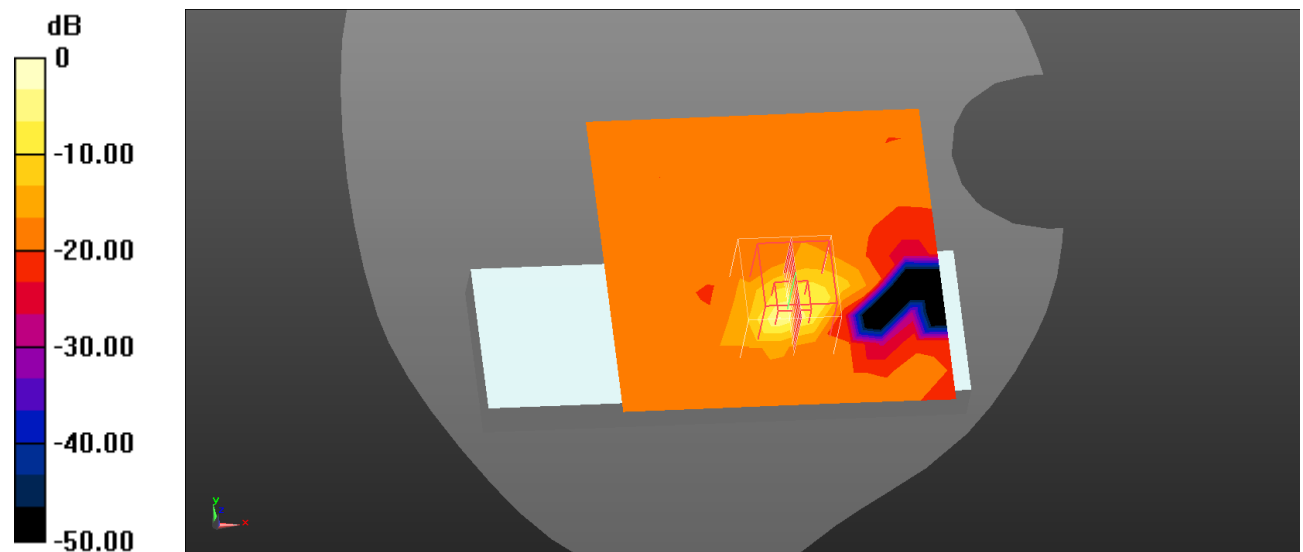

0 dB = 2.49 W/kg = 3.96 dBW/kg

Plot 13#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: Bluetooth Low**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2402 MHz; Duty Cycle: 1:1.29938

Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.641$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Bluetooth BDR(GFSK) low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00853 W/kg


Body Back/Bluetooth BDR(GFSK) low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.664 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.00512 W/kg; SAR(10 g) = 0.00259 W/kg

Maximum value of SAR (measured) = 0.00643 W/kg

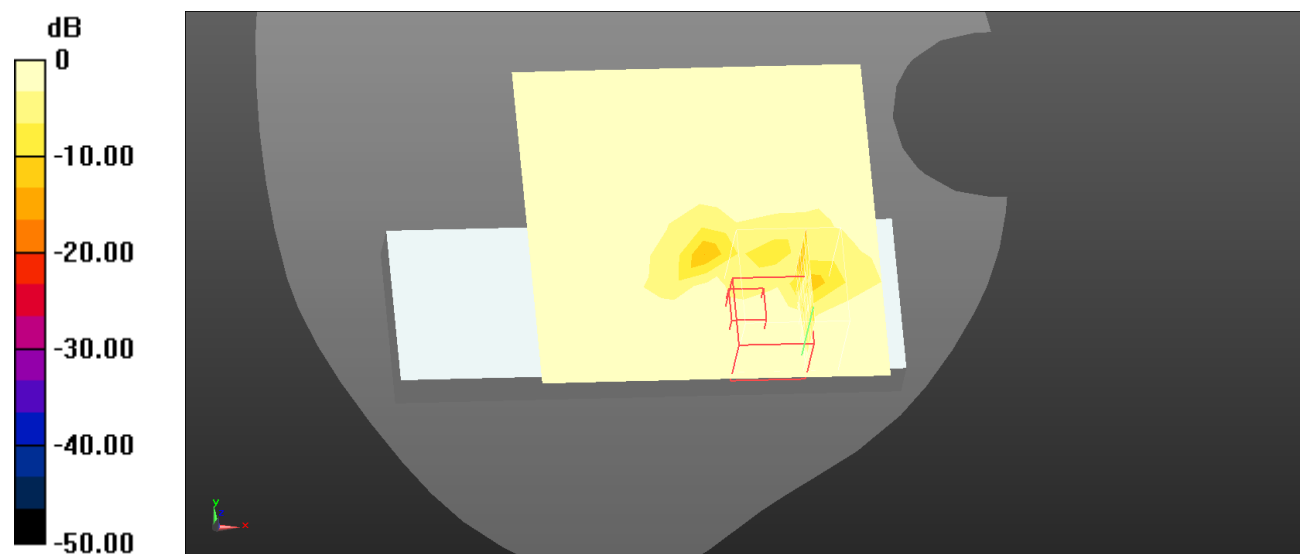

0 dB = 0.00643 W/kg = -21.92 dBW/kg

Plot 14#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: Bluetooth Mid**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.29938

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.798$ S/m; $\epsilon_r = 39.257$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Bluetooth BDR(GFSK) Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00797 W/kg


Body Back/Bluetooth BDR(GFSK) Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.646 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.00497 W/kg; SAR(10 g) = 0.00248 W/kg

Maximum value of SAR (measured) = 0.0149 W/kg

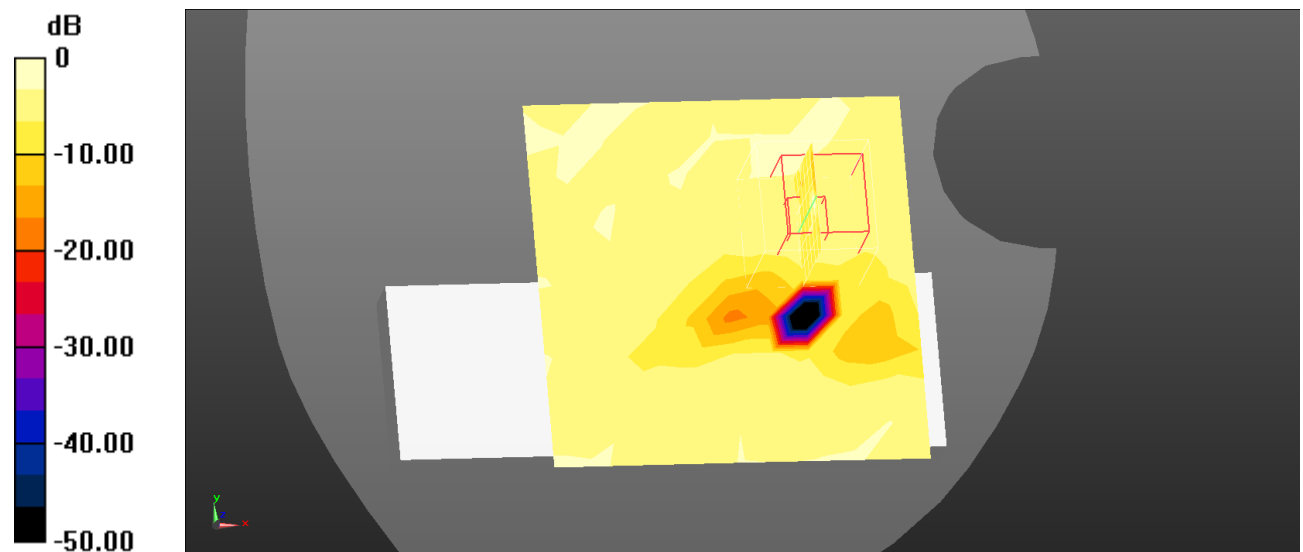

0 dB = 0.0149 W/kg = -18.27 dBW/kg

Plot 15#:**DUT: 492; Type: Shield; Serial: SZNS220630-29398E-SA-S1****Procedure Name: Bluetooth High**

Communication System: UID 0, Bluetooth(GFSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.29938

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.847$ S/m; $\epsilon_r = 39.054$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/Bluetooth BDR(GFSK) High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0106 W/kg

Body Back/Bluetooth BDR(GFSK) High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.947 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.00475 W/kg; SAR(10 g) = 0.00205 W/kg

Maximum value of SAR (measured) = 0.00539 W/kg



0 dB = 0.00539 W/kg = -22.68 dBW/kg