

Bluetooth

Frequency: 2441 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.9°C; Liquid Temperature: 21.5°C
Medium parameters used: $f = 2441$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 38.997$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.33, 7.49, 7.02) @ 2441 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM Twin Phantom V5.0; Type: QD 000 P40 C; Serial: TP-1897

Smart Glasses/Main Ant/Right Cheek/Bluetooth_DH5_ch39/Area Scan (8x12x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0297 W/kg

Smart Glasses/Main Ant/Right Cheek/Bluetooth_DH5_ch39/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6210 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00662 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.0290 W/kg

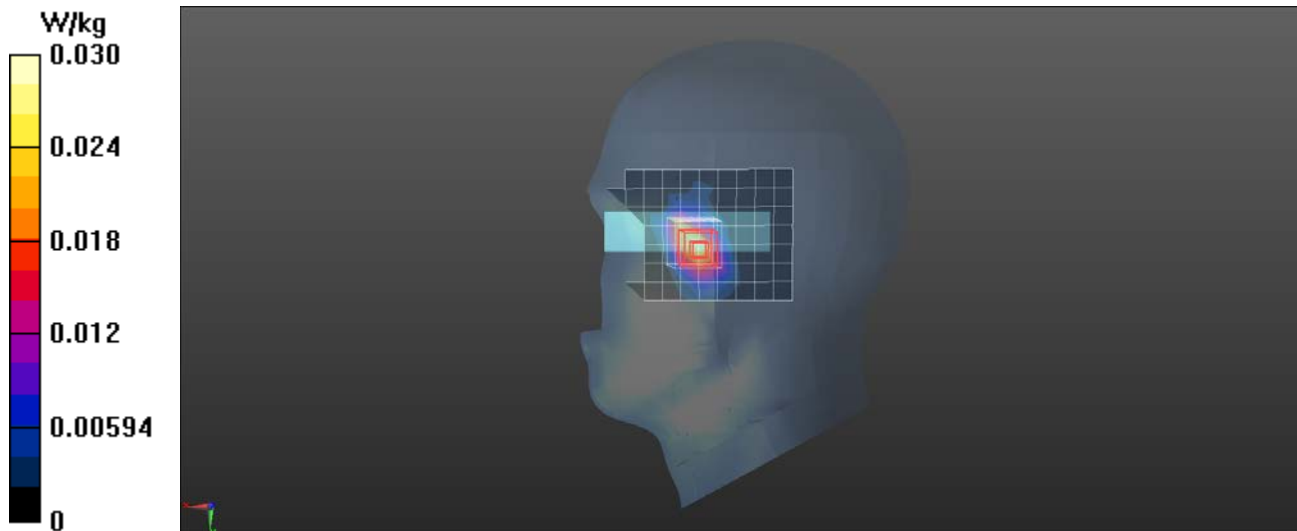

BLE

Frequency: 2440 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.9°C; Liquid Temperature: 21.5°C
Medium parameters used: $f = 2440$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 38.998$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.33, 7.49, 7.02) @ 2440 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM Twin Phantom V5.0; Type: QD 000 P40 C; Serial: TP-1897

Smart Glasses/Main Ant/Right Cheek/BLE_1M_ch19/Area Scan (8x12x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0355 W/kg

Smart Glasses/Main Ant/Right Cheek/BLE_1M_ch19/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7710 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.010 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.0343 W/kg

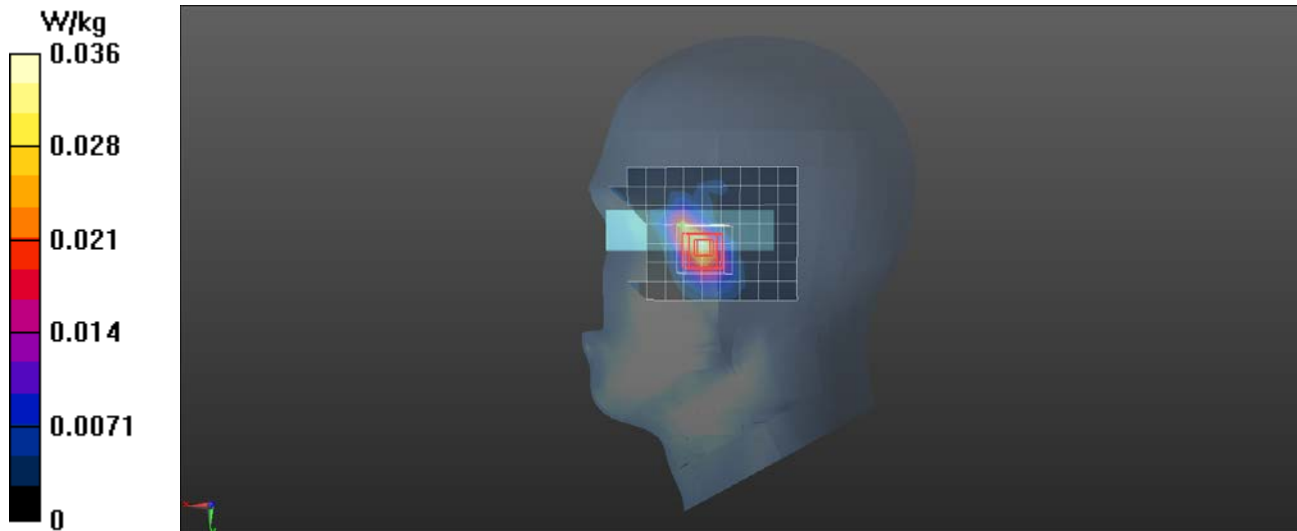

WiFi-2.4G

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.2°C; Liquid Temperature: 21.3°C
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 40.15$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(7.33, 7.49, 7.02) @ 2437 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM Twin Phantom V5.0; Type: QD 000 P40 C; Serial: TP-1897

Smart Glasses/Main Ant/Right Cheek/802.11b_ch6/Area Scan (8x12x1):

Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.752 W/kg

Smart Glasses/Main Ant/Right Cheek/802.11b_ch6/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.913 V/m; Power Drift = -0.08 dB



Peak SAR (extrapolated) = 0.999 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 0.861 W/kg

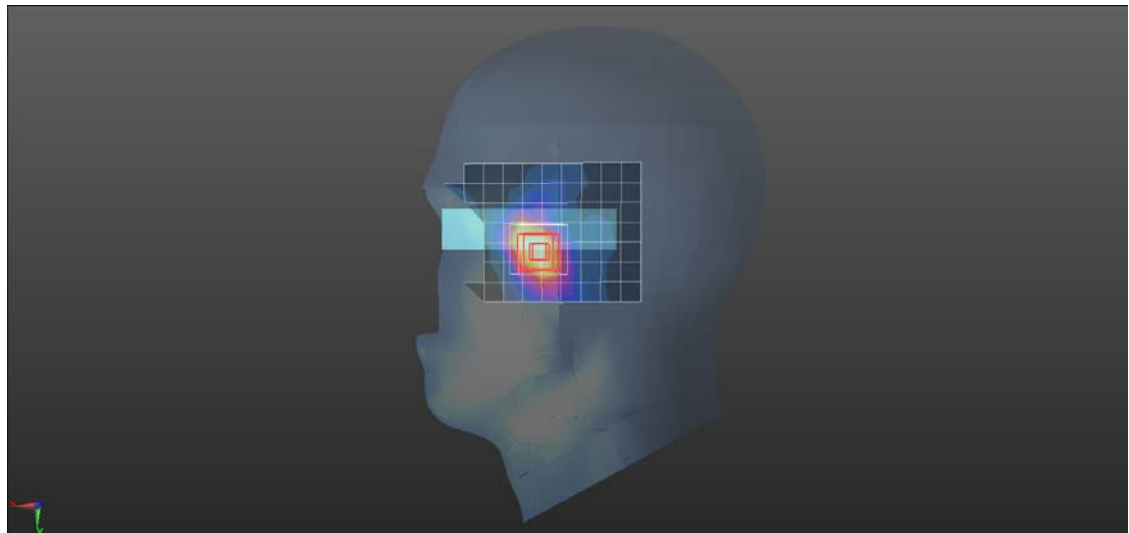

WiFi-5G

Frequency: 5260 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.4°C; Liquid Temperature: 21.1°C
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.857$ S/m; $\epsilon_r = 36.133$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(5.21, 5.32, 4.99) @ 5260 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM Twin Phantom V5.0; Type: QD 000 P40 C; Serial: TP-1897

Smart Glasses/Main Ant/Right Cheek/802.11a_ch52/Area Scan (9x14x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.11 W/kg

Smart Glasses/Main Ant/Right Cheek/802.11a_ch52/Zoom Scan (7x7x13)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.335 V/m; Power Drift = 0.14 dB



Peak SAR (extrapolated) = 4.15 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 2.68 W/kg

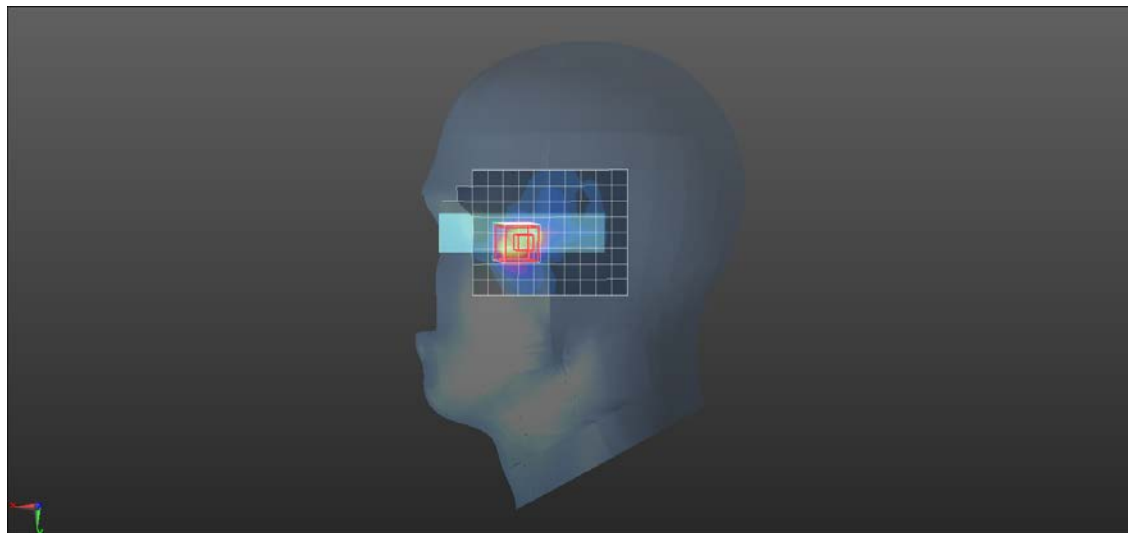

WiFi-5G

Frequency: 5680 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.4°C; Liquid Temperature: 21.1°C
Medium parameters used: $f = 5680$ MHz; $\sigma = 5.355$ S/m; $\epsilon_r = 35.262$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(4.9, 5, 4.68) @ 5680 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM Twin Phantom V5.0; Type: QD 000 P40 C; Serial: TP-1897

Smart Glasses/Main Ant/Right Cheek/802.11a_ch136/Area Scan (9x14x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.31 W/kg

Smart Glasses/Main Ant/Right Cheek/802.11a_ch136/Zoom Scan (7x7x13)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.598 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%.

Maximum value of SAR (measured) = 1.39 W/kg

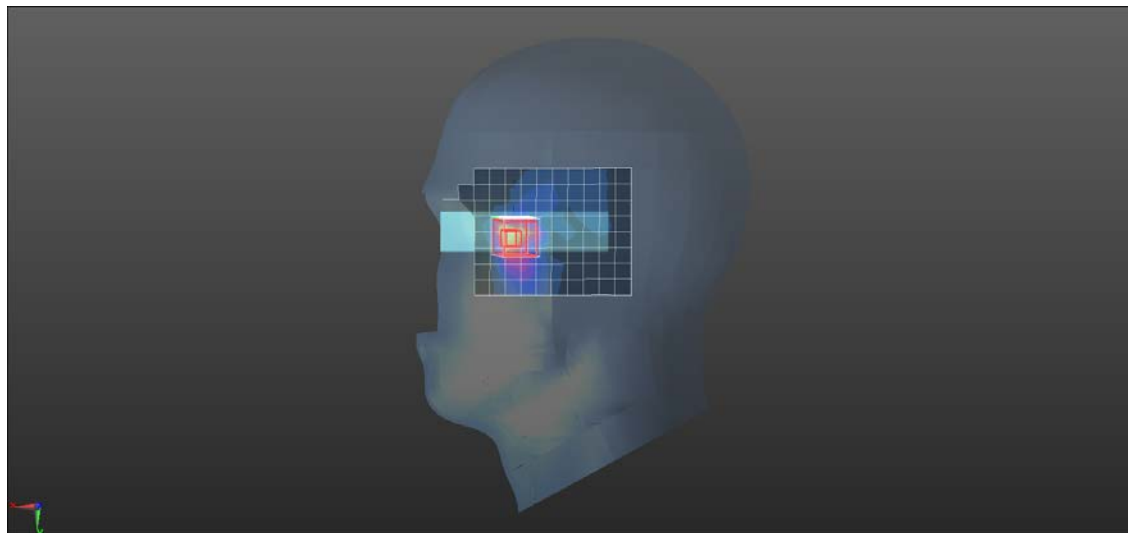

WiFi-5G

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 21.4°C; Liquid Temperature: 21.1°C
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.384$ S/m; $\epsilon_r = 35.159$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2025/6/24
- Probe: EX3DV4 - SN7369; ConvF(4.94, 5.04, 4.73) @ 5745 MHz; Calibrated: 2025/5/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: SAM Twin Phantom V5.0; Type: QD 000 P40 C; Serial: TP-1897

Smart Glasses/Main Ant/Right Cheek/802.11a_ch149/Area Scan (9x14x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 W/kg

Smart Glasses/Main Ant/Right Cheek/802.11a_ch149/Zoom Scan (7x7x13)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.358 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 1.21 W/kg

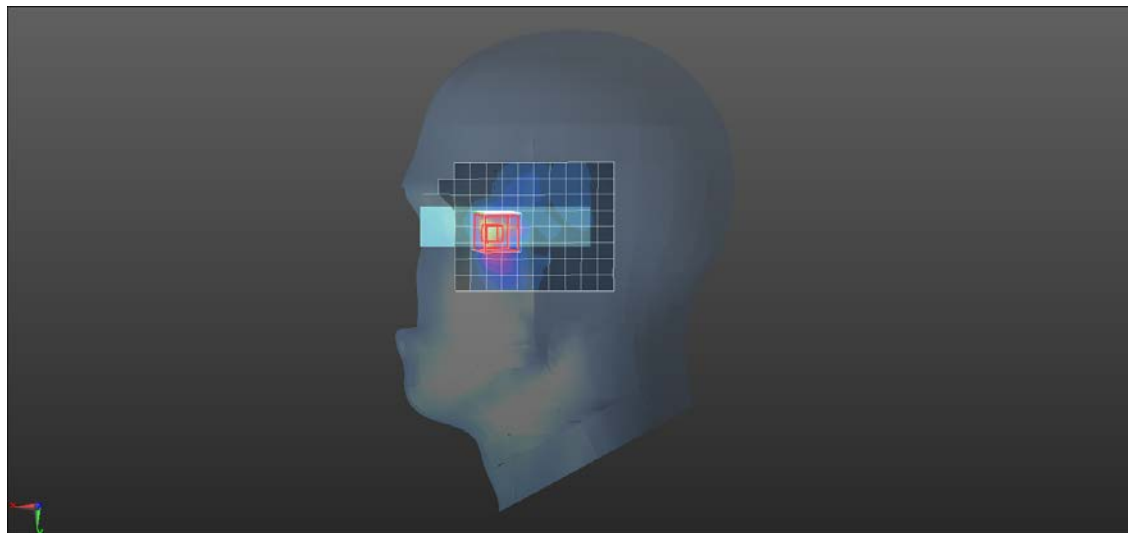

Test Laboratory: BTL-SAR03

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	105.0 x 25.0 x 15.0		Glasses

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, Head Simulating Liquid	CHEEK, 0.00	U-NII-5	WLAN, 10731-AAC	6385.000, 87	5.63	5.92	34.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2125	H6G-251021 , 2025-10-21	EX3DV4 - SN7369, 2025-05-21	DAE4 Sn1486, 2025-06-24

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-10-21	2025-10-21
psSAR1g [W/kg]	0.050	0.071
psSAR10g [W/kg]	0.012	0.014
psAPD (1.0cm2, sq) [W/m2]		0.713
psAPD (4.0cm2, sq) [W/m2]		0.357
Power Drift [dB]		-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		49.9
Dist 3dB Peak [mm]		6.2

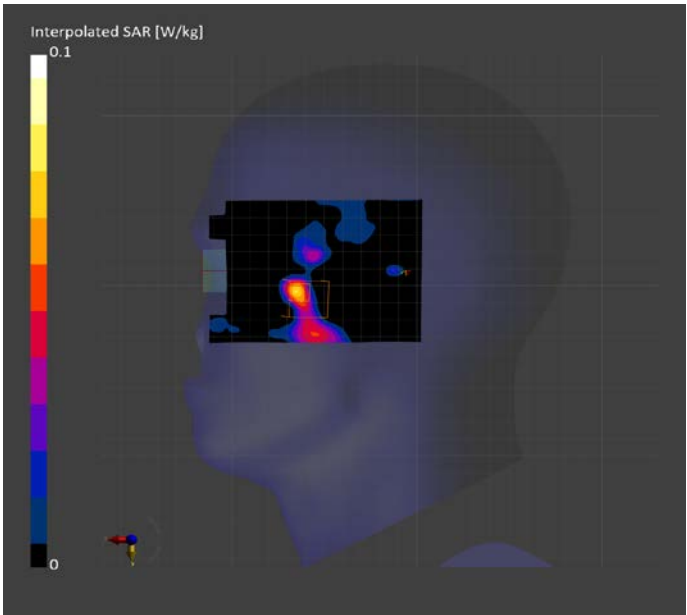

Test Laboratory: BTL-SAR03

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	105.0 x 25.0 x 15.0		Glasses

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, Head Simulating Liquid	CHEEK, 0.00	U-NII-6	WLAN, 10707-AAC	6445.000, 99	5.63	5.94	34.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2125	H6G-251021 , 2025-10-21	EX3DV4 - SN7369, 2025-05-21	DAE4 Sn1486, 2025-06-24

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-10-21	2025-10-21
psSAR1g [W/kg]	0.039	0.046
psSAR10g [W/kg]	0.012	0.009
psAPD (1.0cm2, sq) [W/m2]		0.462
psAPD (4.0cm2, sq) [W/m2]		0.229
Power Drift [dB]		-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		45.6
Dist 3dB Peak [mm]		5.5

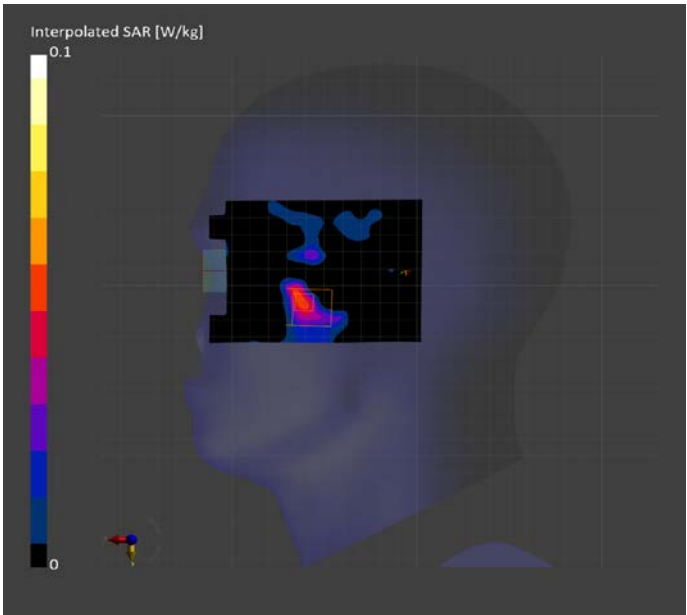

Test Laboratory: BTL-SAR03

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	105.0 x 25.0 x 15.0		Glasses

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, Head Simulating Liquid	CHEEK, 0.00	U-NII-7	WLAN, 10707-AAC	6845.000, 179	5.63	6.34	33.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2125	H6G-251021 , 2025-10-21	EX3DV4 - SN7369, 2025-05-21	DAE4 Sn1486, 2025-06-24

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-10-21	2025-10-21
psSAR1g [W/kg]	0.115	0.036
psSAR10g [W/kg]	0.035	0.004
psAPD (1.0cm2, sq) [W/m2]		0.359
psAPD (4.0cm2, sq) [W/m2]		0.117
Power Drift [dB]		0.12
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		41.8
Dist 3dB Peak [mm]		6.4

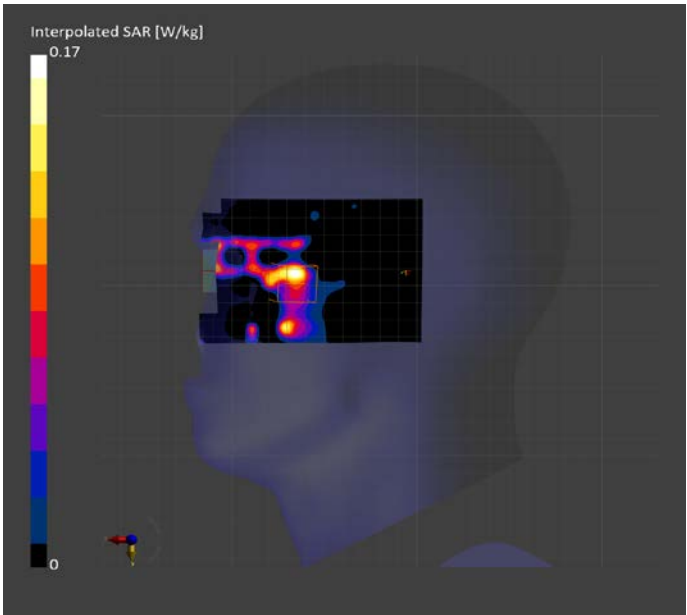

Test Laboratory: BTL-SAR03

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	105.0 x 25.0 x 15.0		Glasses

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, Head Simulating Liquid	CHEEK, 0.00	U-NII-8	WLAN, 10707-AAC	6925.000, 195	5.63	6.40	33.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2125	H6G-251021 , 2025-10-21	EX3DV4 - SN7369, 2025-05-21	DAE4 Sn1486, 2025-06-24

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.2
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-10-21	2025-10-21
psSAR1g [W/kg]	0.154	0.035
psSAR10g [W/kg]	0.059	0.003
psAPD (1.0cm2, sq) [W/m2]		0.346
psAPD (4.0cm2, sq) [W/m2]		0.101
Power Drift [dB]		0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive only	Positive only
M2/M1 [%]		46.7
Dist 3dB Peak [mm]		4.3

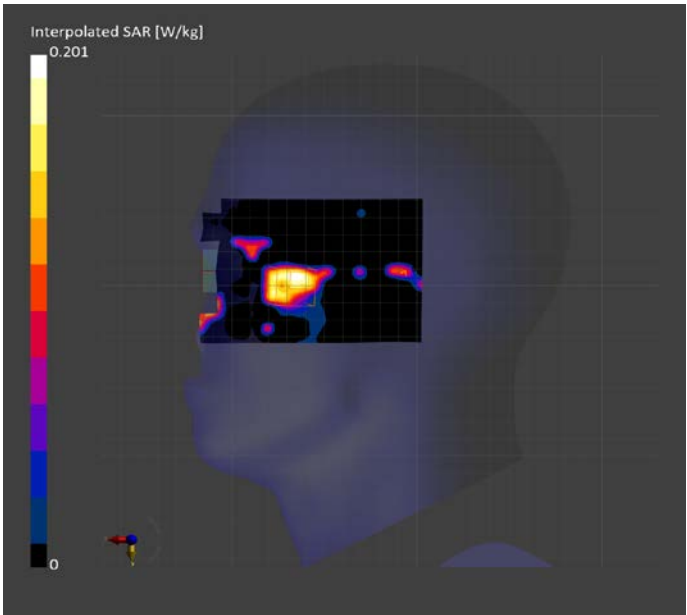

Test Laboratory: BTL-SAR01

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
, Device	105.0 x 25.0 x 15.0		Glasses

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	FRONT, 2.00	U-NII-5	WLAN, 10731-AAC	6385.0, 87	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1085	---Air	EUmmWV4 - SN9586_F1-55GHz, 2025-06-17	DAE4 Sn1486, 2025-06-24

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	2.0
MAIA	Y

Measurement Results

	5G Scan
Date	2025-10-27
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.931
psPDtot+ [W/m ²]	1.69
psPDmod+ [W/m ²]	2.50
E _{max} [V/m]	34.0
Power Drift [dB]	0.06

