

APPLICATION CERTIFICATION
On Behalf of
Parle Innovation Inc.

Dock It Pro
Model No.: DOCPRO-1301-US

FCC ID: 2AA9H-DOCPRO

Prepared for : Parle Innovation Inc.
Address : 800 Airport Blvd.#421 Burlingame,CALIFORNIA 94010
Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20132111
Date of Test : Oct 22-28,2013
Date of Report : Oct 29,2013

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. 20DB BANDWIDTH TEST.....	10
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement	10
5.4. Operating Condition of EUT	10
5.5. Test Procedure	11
5.6. Test Result	11
6. CARRIER FREQUENCY SEPARATION TEST.....	17
6.1. Block Diagram of Test Setup.....	17
6.2. The Requirement For Section 15.247(a)(1).....	17
6.3. EUT Configuration on Measurement	17
6.4. Operating Condition of EUT	17
6.5. Test Procedure	18
6.6. Test Result	18
7. NUMBER OF HOPPING FREQUENCY TEST	24
7.1. Block Diagram of Test Setup.....	24
7.2. The Requirement For Section 15.247(a)(1)(iii).....	24
7.3. EUT Configuration on Measurement	24
7.4. Operating Condition of EUT	24
7.5. Test Procedure	25
7.6. Test Result	25
8. DWELL TIME TEST	27
8.1. Block Diagram of Test Setup.....	27
8.2. The Requirement For Section 15.247(a)(1)(iii).....	27
8.3. EUT Configuration on Measurement	27
8.4. Operating Condition of EUT	27
8.5. Test Procedure	28
8.6. Test Result	28
9. MAXIMUM PEAK OUTPUT POWER TEST	44
9.1. Block Diagram of Test Setup.....	44
9.2. The Requirement For Section 15.247(b)(1).....	44
9.3. EUT Configuration on Measurement	44
9.4. Operating Condition of EUT	44
9.5. Test Procedure	45

9.6.	Test Result	45
10.	RADIATED EMISSION TEST	51
10.1.	Block Diagram of Test Setup.....	51
10.2.	The Limit For Section 15.247(d)	51
10.3.	Restricted bands of operation	52
10.4.	Configuration of EUT on Measurement	52
10.5.	est Procedure.....	53
10.6.	The Field Strength of Radiation Emission Measurement Results	53
11.	BAND EDGE COMPLIANCE TEST	66
11.1.	Block Diagram of Test Setup.....	66
11.2.	The Requirement For Section 15.247(d)	66
11.3.	EUT Configuration on Measurement	66
11.4.	Operating Condition of EUT	66
11.5.	Test Procedure	67
11.6.	Test Result	67
12.	AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	89
12.1.	Block Diagram of Test Setup.....	89
12.2.	The Emission Limit	89
12.3.	Configuration of EUT on Measurement	90
12.4.	Operating Condition of EUT	90
12.5.	Test Procedure	90
12.6.	Power Line Conducted Emission Measurement Results	90
13.	ANTENNA REQUIREMENT.....	93
13.1.	The Requirement	93
13.2.	Antenna Construction	93

Test Report Certification

Applicant : Parle Innovation Inc.
Manufacturer : Shenzhen Doking Electronic Technology Co.,Ltd
EUT Description : Dock It Pro
(A) MODEL NO.: DOCPRO-1301-US
(B) SERIAL NO.: N/A
(C) POWER SUPPLY: DC 3.7V or DC 5V

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4- 2009

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Oct 22-28,2013

Prepared by :



(Engineer)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Dock It Pro
Model Number	:	DOCPRO-1301-US
Frequency Band	:	2402MHz-2480MHz
Number of Channels	:	79
Modulation type	:	GFSK, $\Pi/4$ -DQPSK, 8DPSK
Antenna Gain	:	0dBi
Antenna type	:	PCB Antenna
Power Supply	:	DC 3.7V or DC 5V
Applicant	:	Parle Innovation Inc.
Address	:	800 Airport Blvd.#421 Burlingame,CALIFORNIA 94010
Manufacturer	:	Shenzhen Doking Electronic Technology Co.,Ltd
Address	:	Dingfeng Hi-Tech,Shapu,Songgang Town,Baoan Distic,Shenzhen.
Date of sample received	:	Sep 30, 2013
Date of Test	:	Oct 22-28, 2013

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 12, 2013	Jan. 11, 2014
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 12, 2013	Jan. 11, 2014
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 12, 2013	Jan. 11, 2014
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 12, 2013	Jan. 11, 2014
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Feb. 06, 2013	Feb. 05, 2014
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Feb. 06, 2013	Feb. 05, 2014
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Feb. 06, 2013	Feb. 05, 2014
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1067	Feb. 06, 2013	Feb. 05, 2014
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 12, 2013	Jan. 11, 2014
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 12, 2013	Jan. 11, 2014

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: Transmitting mode


Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

Hopping

3.2.Configuration and peripherals




(EUT: Dock It Pro)

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission Test	Compliant
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d) Section 15.209	Radiated Emission Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 20DB BANDWIDTH TEST

5.1. Block Diagram of Test Setup



(EUT: Dock It Pro)

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


5.6. Test Result

Channel	Frequency (MHz)	GFSK 20dB Bandwidth (MHz)	$\Pi/4$ -DQPSK 20dB Bandwidth (MHz)	8DPSK 20dB Bandwidth (MHz)	Result
Low	2402	0.918	1.308	1.302	Pass
Middle	2441	0.912	1.302	1.308	Pass
High	2480	0.900	1.318	1.300	Pass


The spectrum analyzer plots are attached as below.

GFSK Mode


Low channel

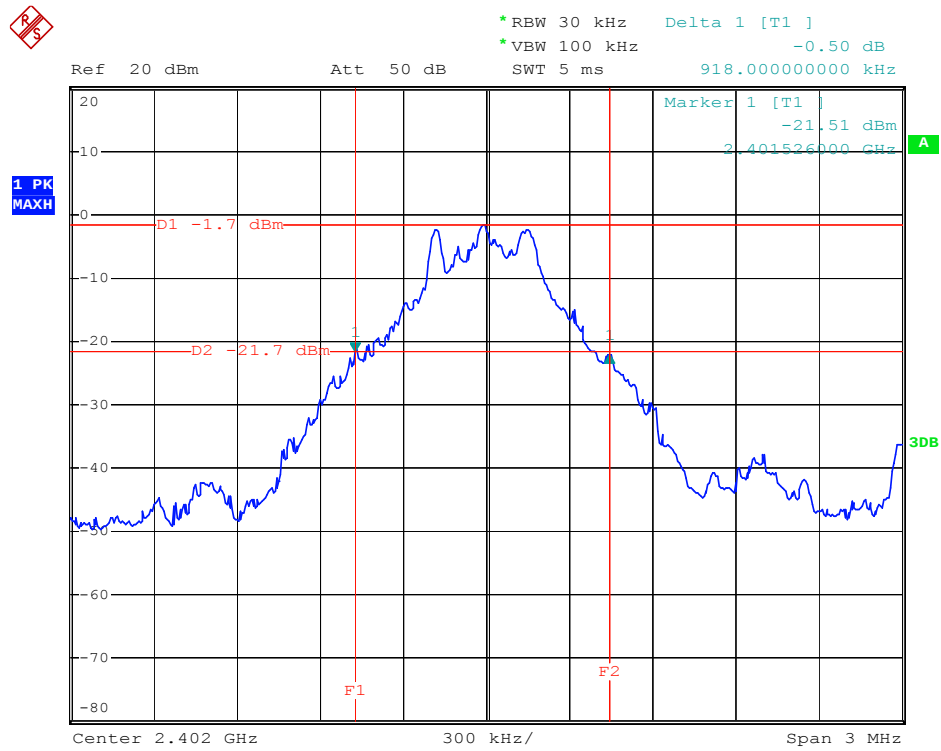

Middle channel

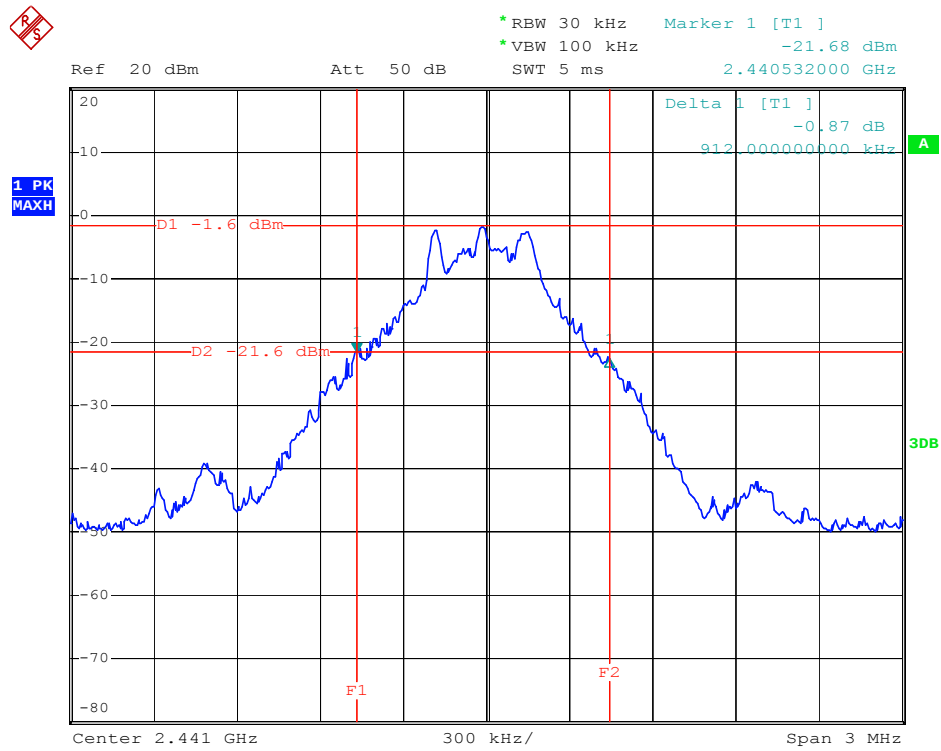


High channel

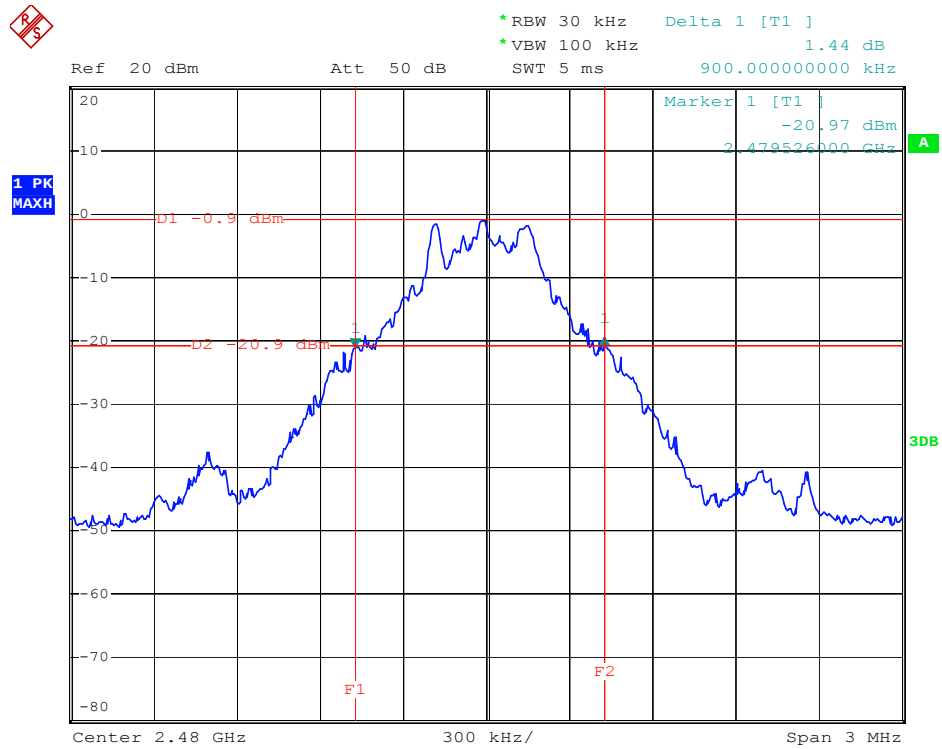


$\Pi/4$ -DQPSK Mode


Low channel

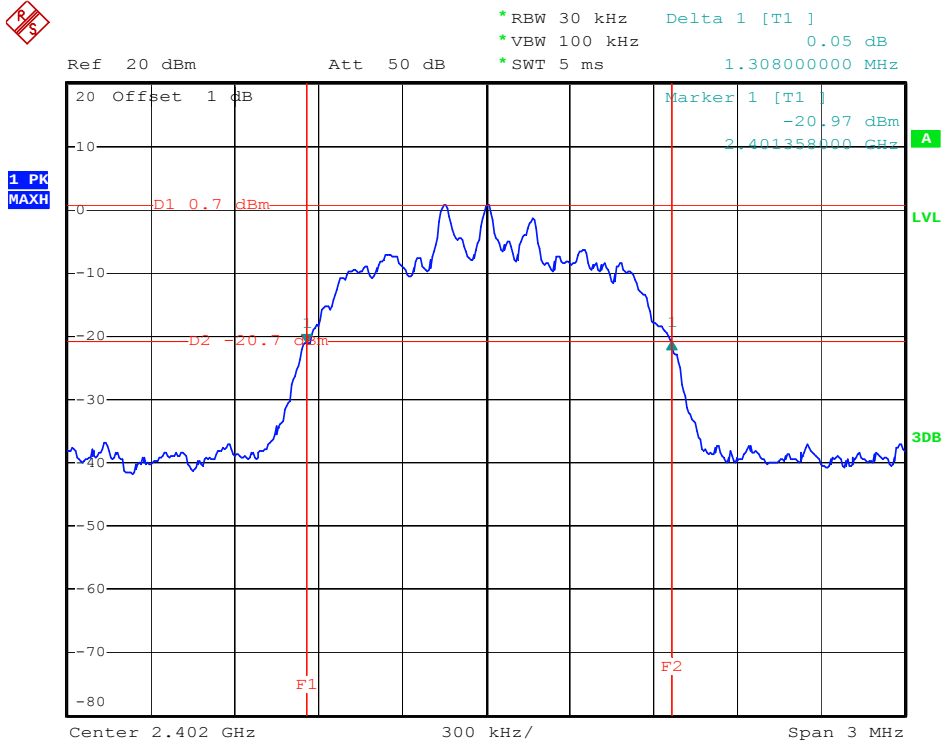



Middle channel

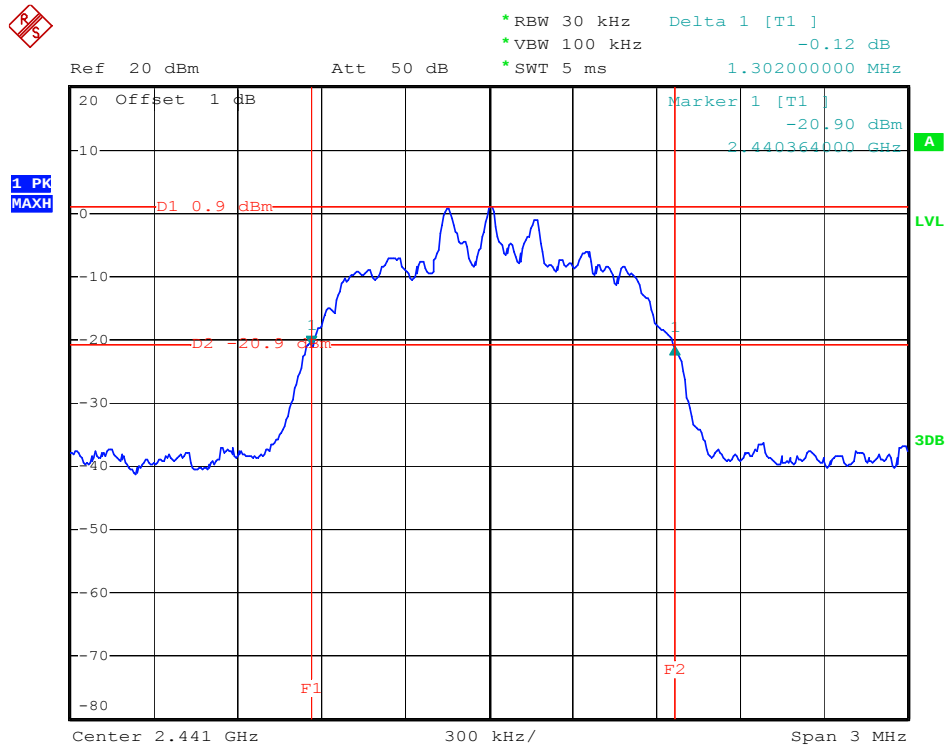


High channel

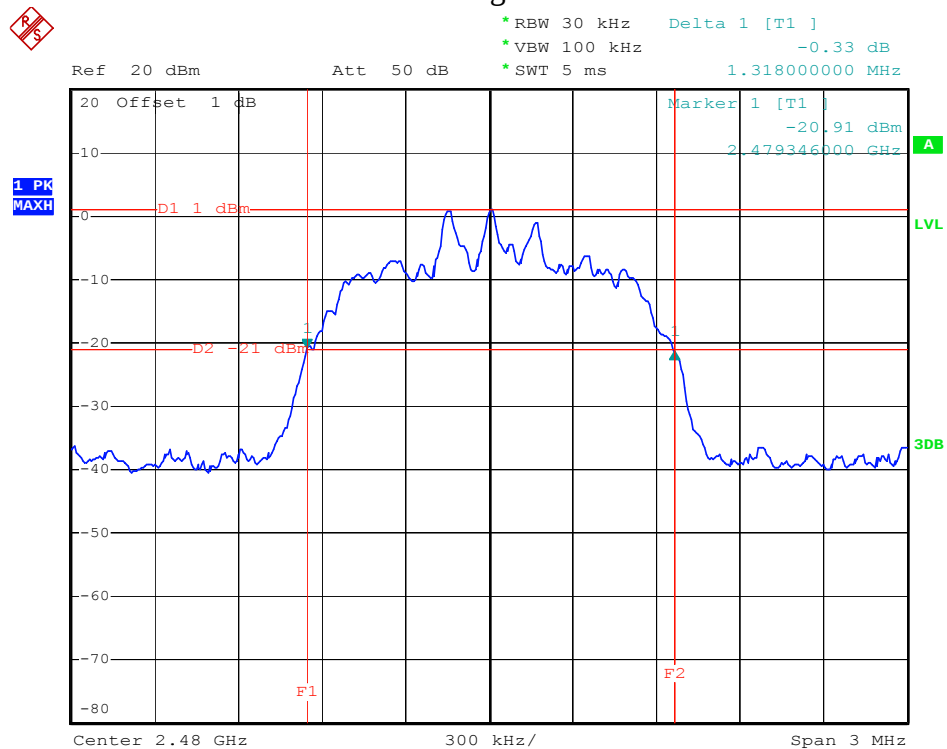


8DPSK Mode

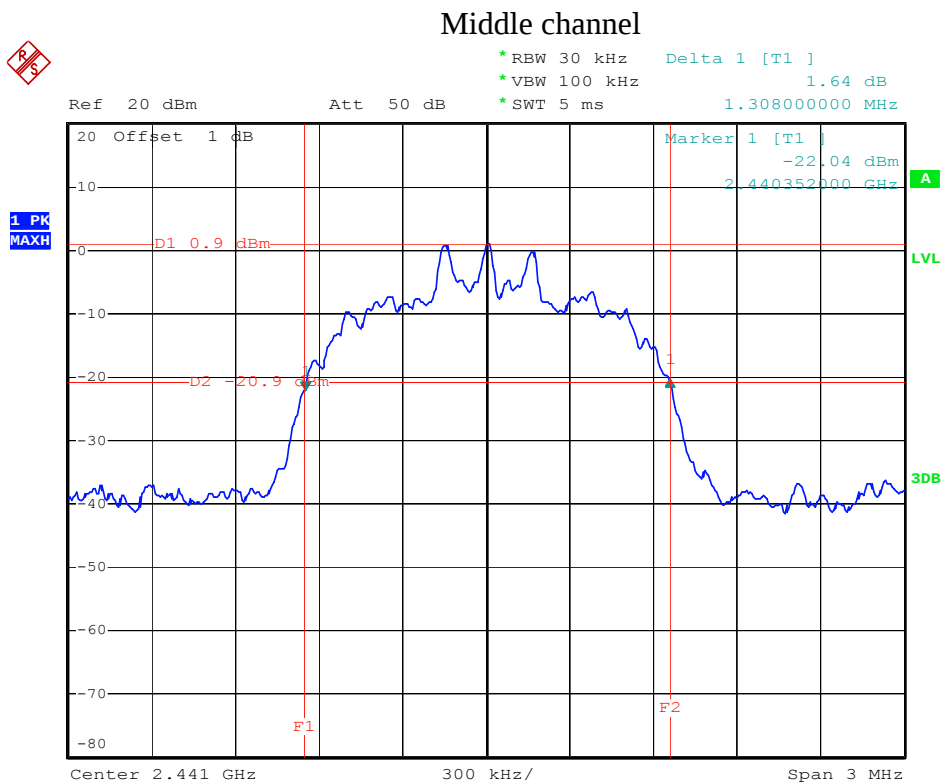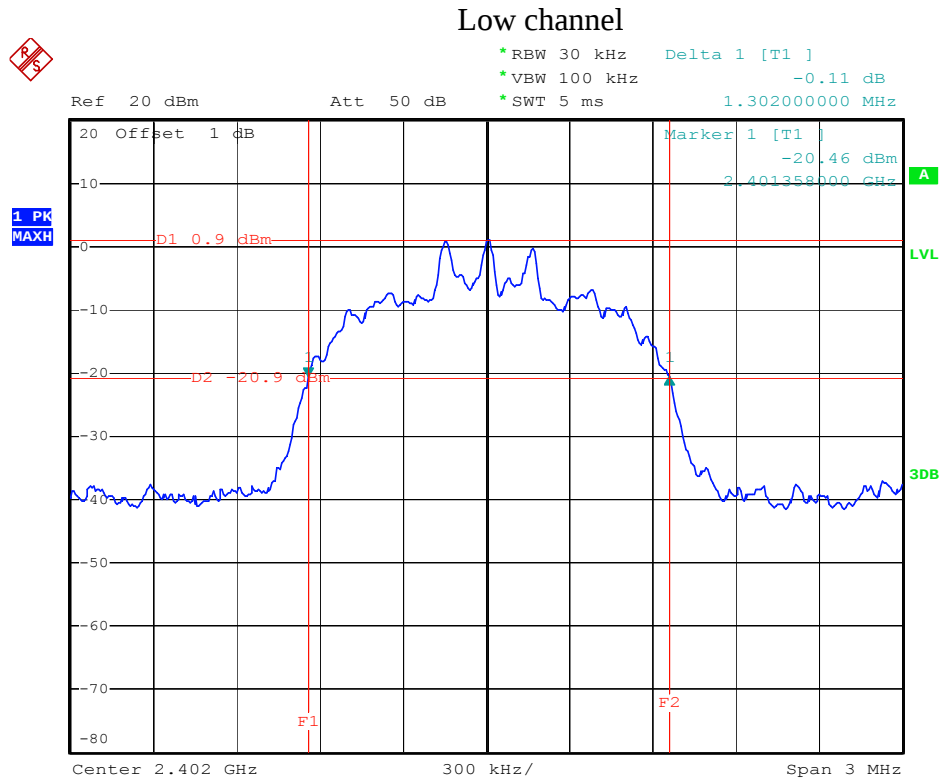

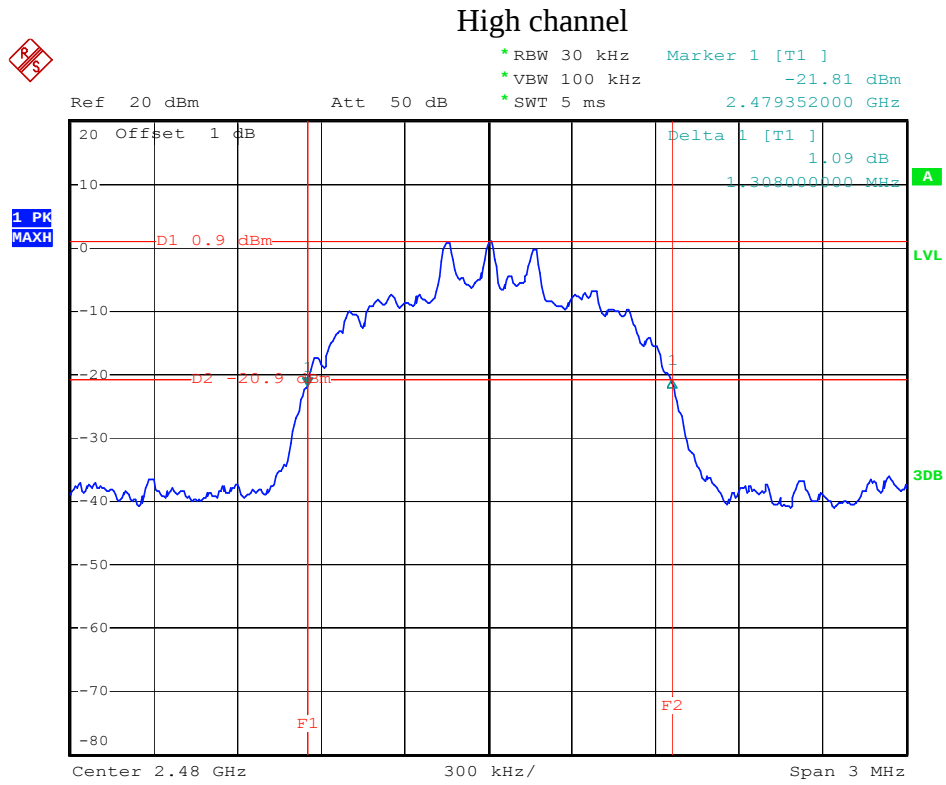

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Block Diagram of Test Setup



(EUT: Dock It Pro)

6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

- 6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- 6.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz. Adjust Span to 3 MHz.
- 6.5.3. Set the adjacent channel of the EUT maxhold another trace.
- 6.5.4. Measurement the channel separation

6.6. Test Result

GFSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.000	25KHz or 20dB bandwidth	PASS
	2403			
Middle	2440	1.000	25KHz or 20dB bandwidth	PASS
	2441			
High	2479	1.000	25KHz or 20dB bandwidth	PASS
	2480			

Π/4-DQPSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2403			
Middle	2440	1.008	25KHz or 2/3*20dB bandwidth	PASS
	2441			
High	2479	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2480			


8DPSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.000	25KHz or 2/3*20dB bandwidth	PASS
	2403			
Middle	2440	1.004	25KHz or 2/3*20dB bandwidth	PASS
	2441			
High	2479	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2480			


The spectrum analyzer plots are attached as below.

GFSK Mode


Low channel

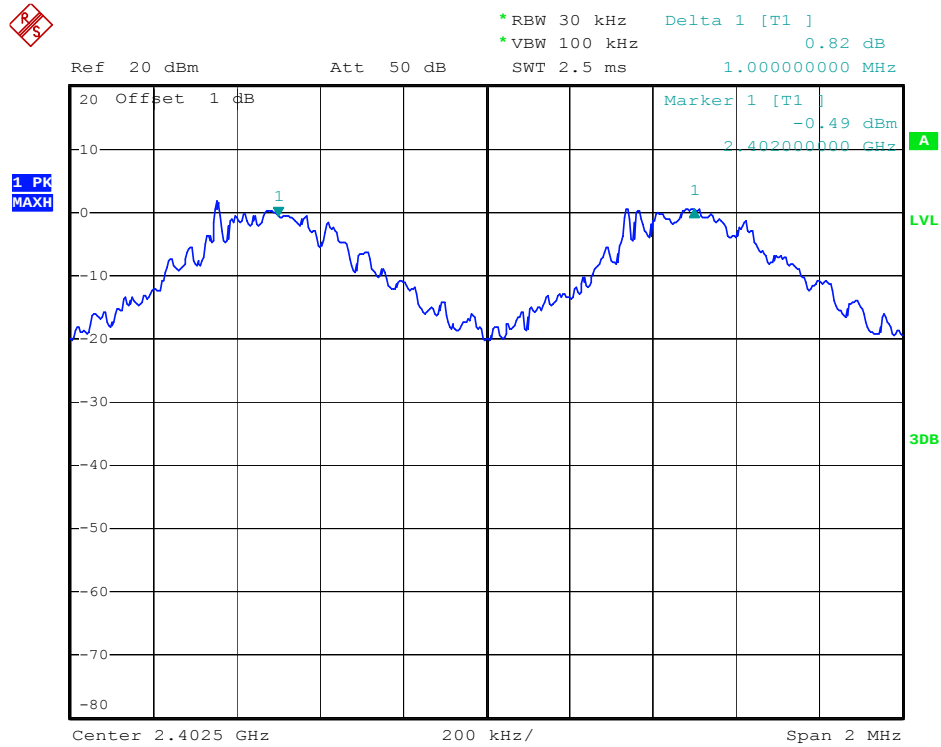

Middle channel

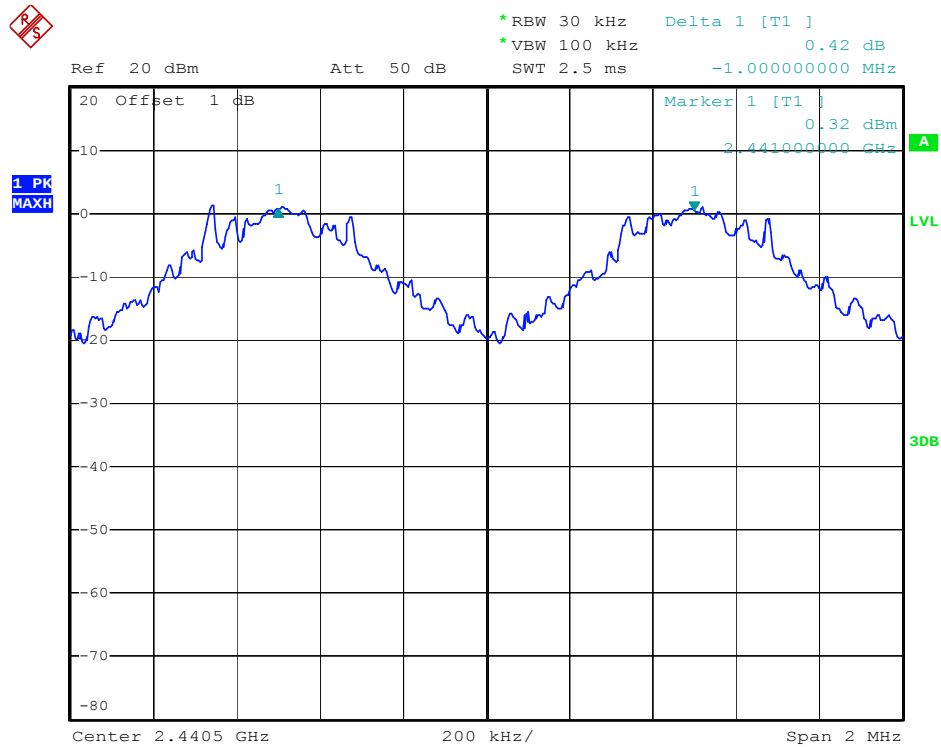


High channel

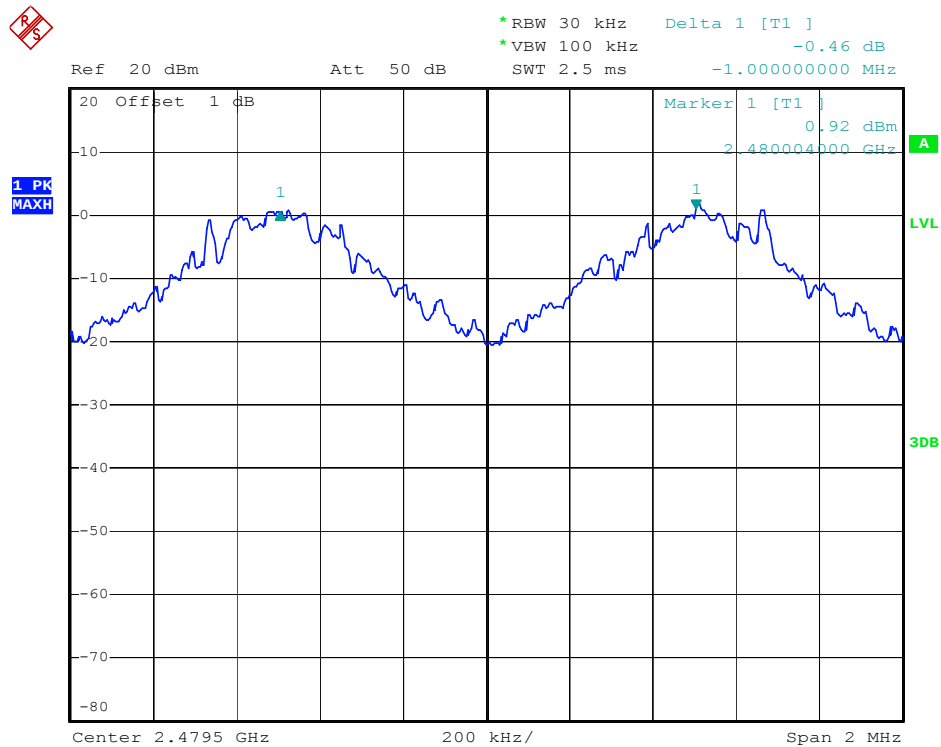


$\Pi/4$ -DQPSK Mode


Low channel

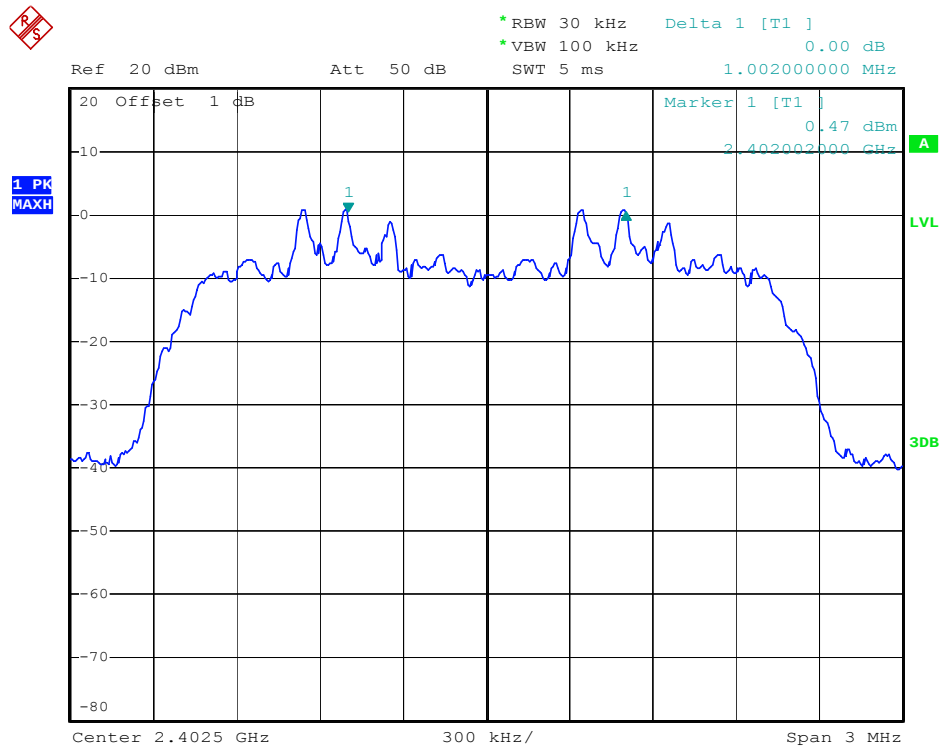



Middle channel

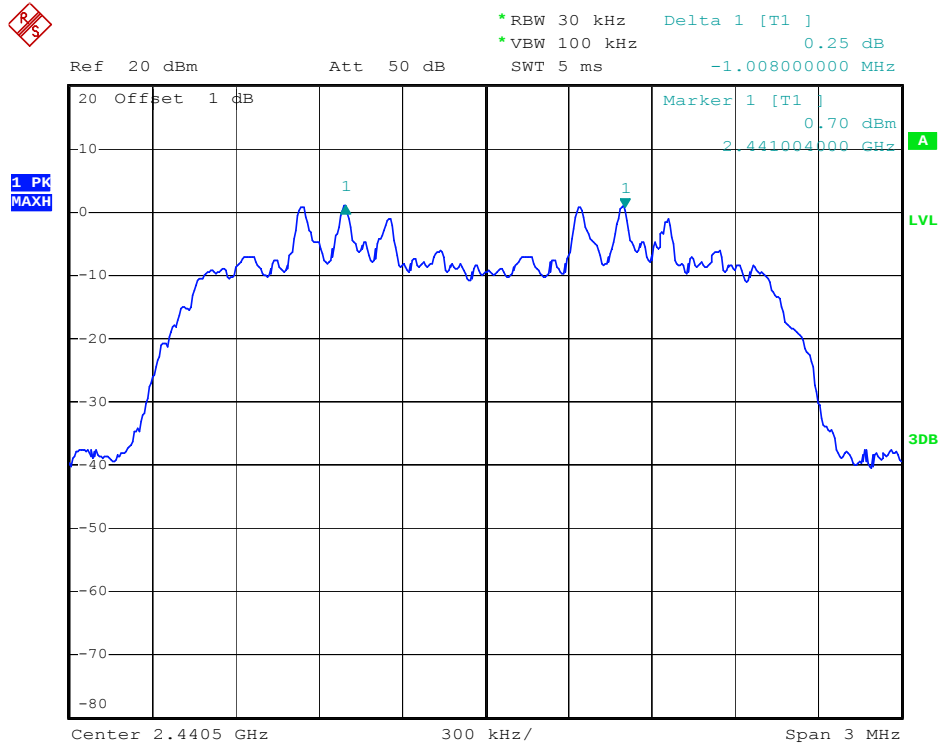


High channel

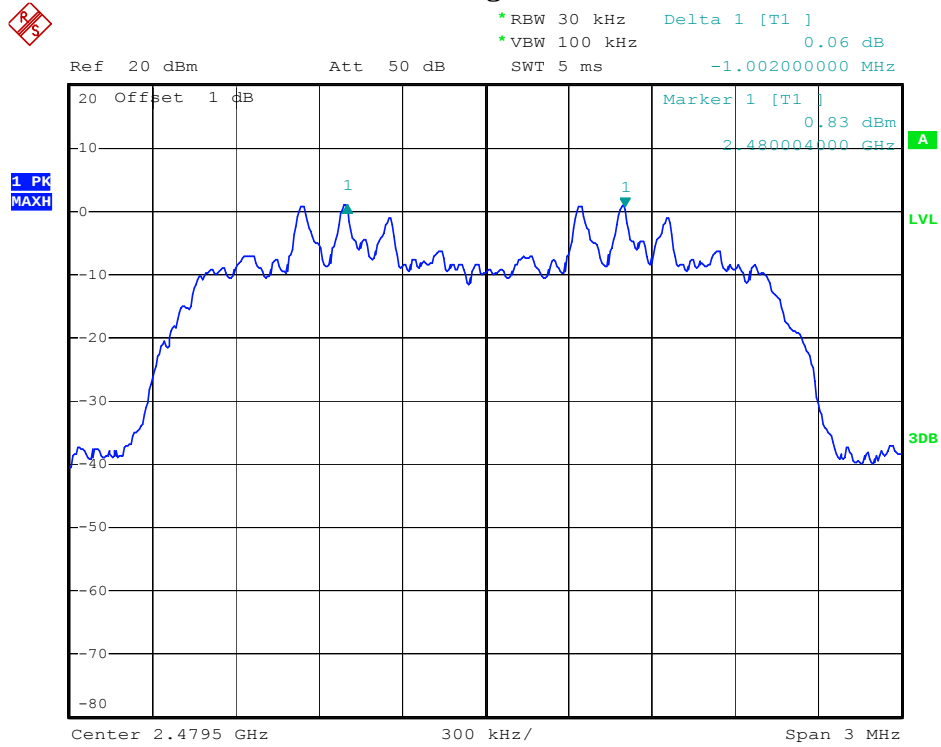


8DPSK Mode

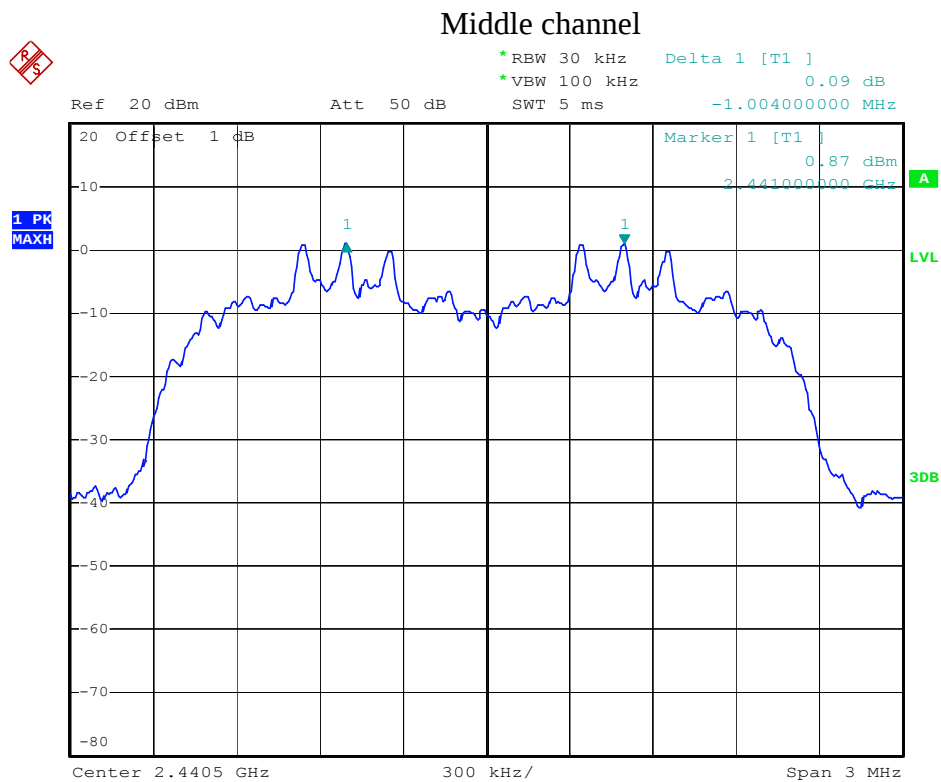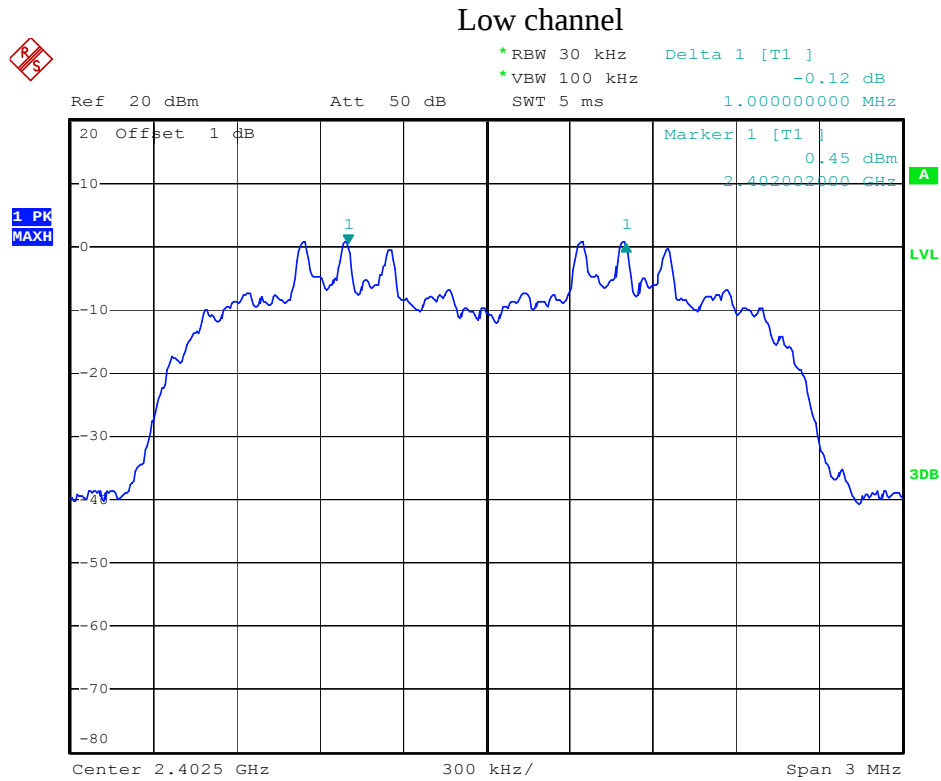

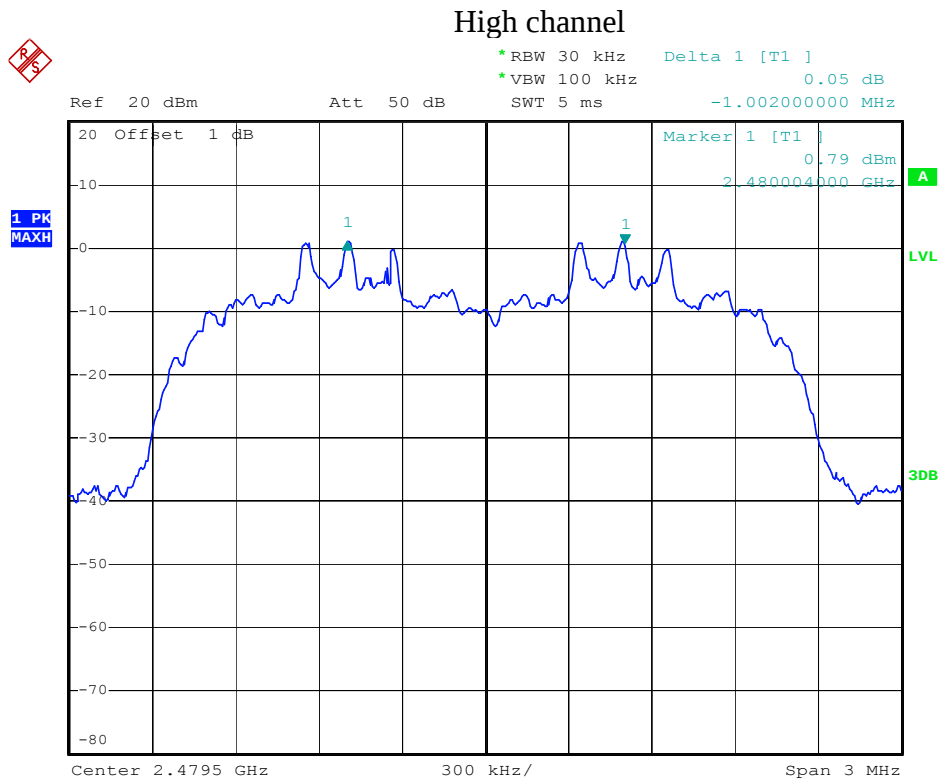

7. NUMBER OF HOPPING FREQUENCY TEST

7.1. Block Diagram of Test Setup



(EUT: Dock It Pro)

7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set the spectrum analyzer as Span=83.5MHz, RBW=100 kHz, VBW=300 kHz.


7.5.3. Max hold, view and count how many channel in the band.

7.6. Test Result


Total number of hopping channel	Measurement result (CH)	Limit (CH)
	79	>15

The spectrum analyzer plots are attached as below.


Number of hopping channels(GFSK)

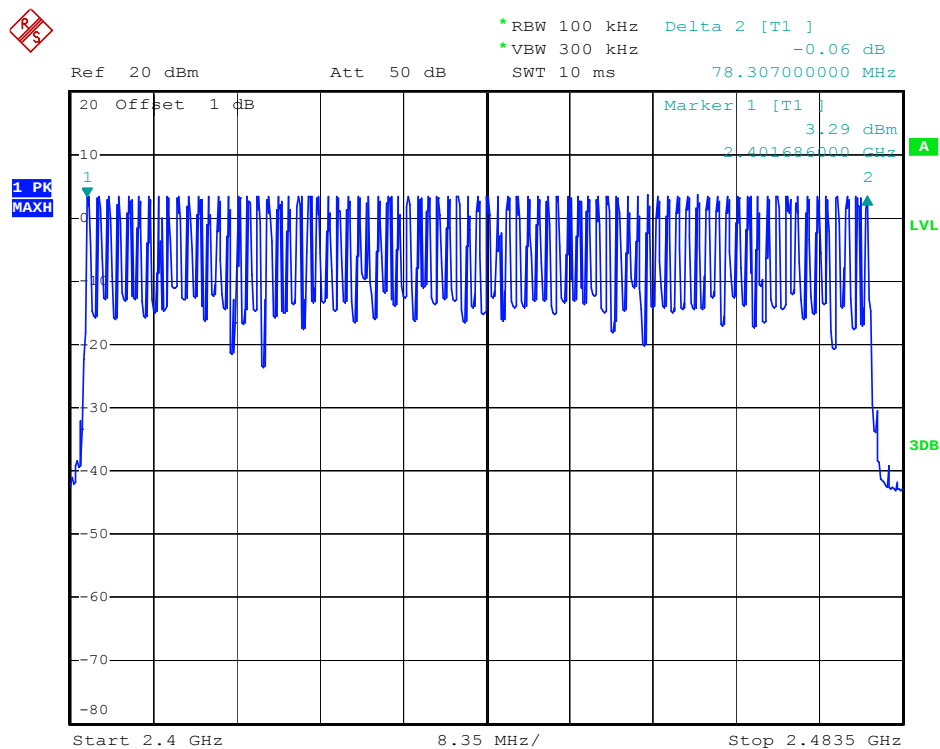

Number of hopping channels($\Pi/4$ -DQPSK)

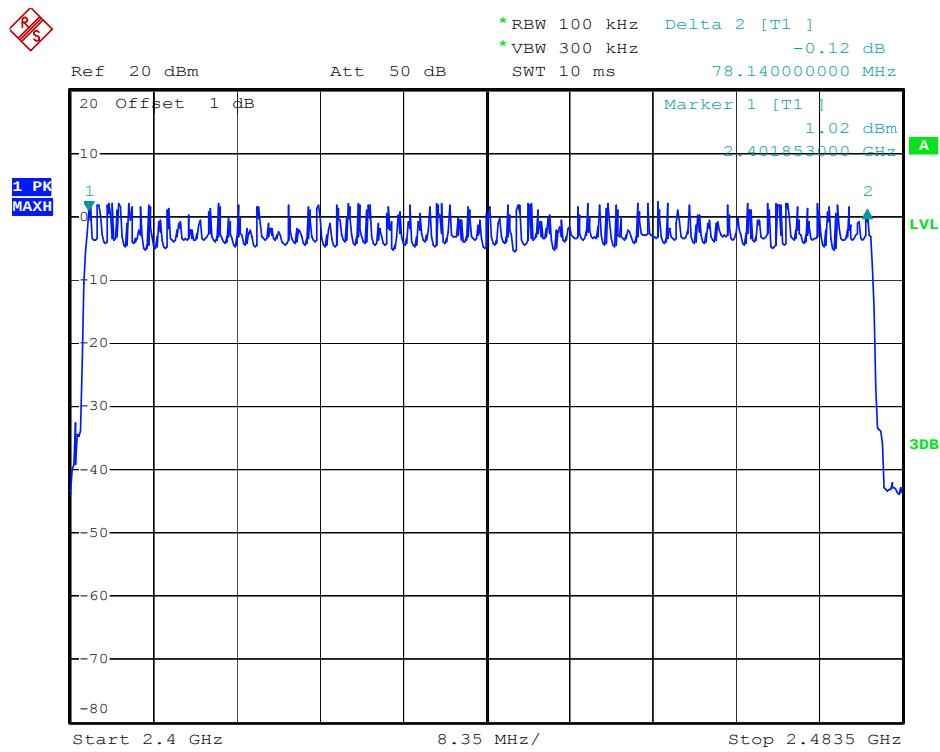


Number of hopping channels(8DPSK)

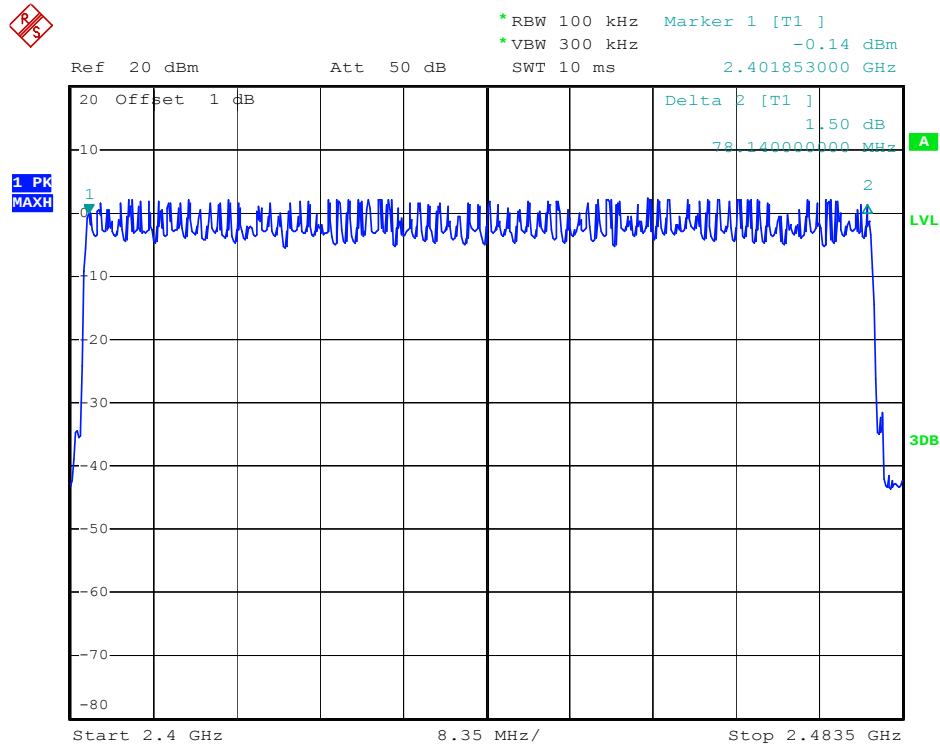

8. DWELL TIME TEST

8.1. Block Diagram of Test Setup



(EUT: Dock It Pro)

8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

- 8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.
- 8.5.2. Set center frequency of spectrum analyzer = operating frequency.
- 8.5.3. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Span=0Hz, Adjust Sweep=1s. Get the burst (in 1 sec.).
- 8.5.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=2ms. Get the pulse time.
- 8.5.5. Repeat above procedures until all frequency measured were complete.

8.6. Test Result

GFSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.415	132.80	400
	2441	0.410	131.20	400
	2480	0.415	132.80	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2 \times 79)) \times 31.6$				
DH3	2402	1.705	272.80	400
	2441	1.705	272.80	400
	2480	1.745	279.20	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4 \times 79)) \times 31.6$				
DH5	2402	3.085	329.07	400
	2441	3.085	329.07	400
	2480	3.025	322.67	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6 \times 79)) \times 31.6$				



Π/4-DQPSK

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.415	132.80	400
	2441	0.420	134.40	400
	2480	0.420	134.40	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2 \times 79)) \times 31.6$				
DH3	2402	1.765	282.40	400
	2441	1.745	279.20	400
	2480	1.745	279.20	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4 \times 79)) \times 31.6$				
DH5	2402	2.965	316.27	400
	2441	3.025	322.67	400
	2480	2.995	319.47	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6 \times 79)) \times 31.6$				


8DPSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2402	0.420	134.40	400
	2441	0.420	134.40	400
	2480	0.420	134.40	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2 \times 79)) \times 31.6$				
DH3	2402	1.780	284.80	400
	2441	1.780	284.80	400
	2480	1.760	281.60	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4 \times 79)) \times 31.6$				
DH5	2402	3.010	321.07	400
	2441	3.010	321.07	400
	2480	3.040	324.27	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6 \times 79)) \times 31.6$				


The spectrum analyzer plots are attached as below.

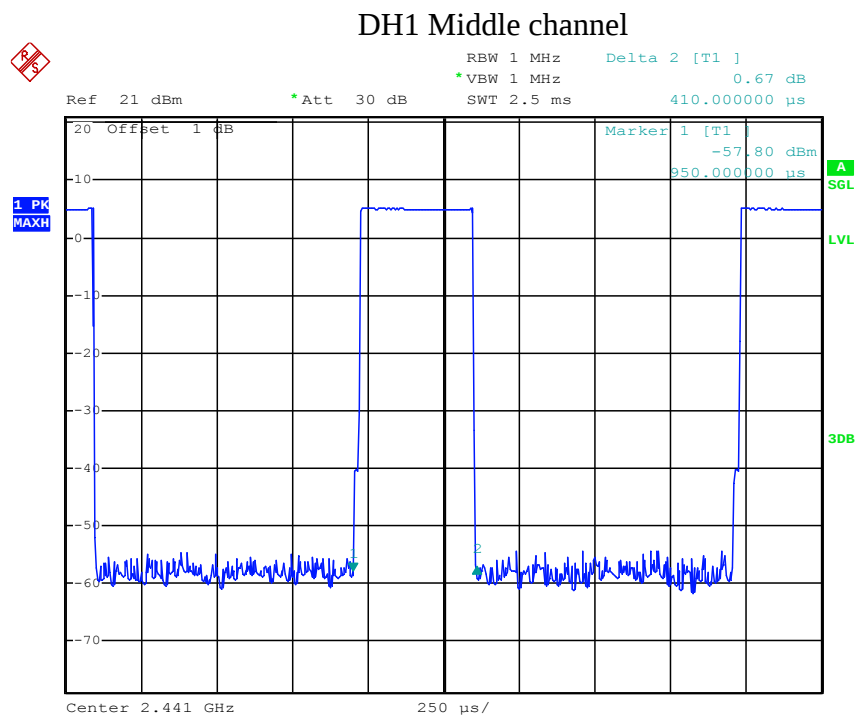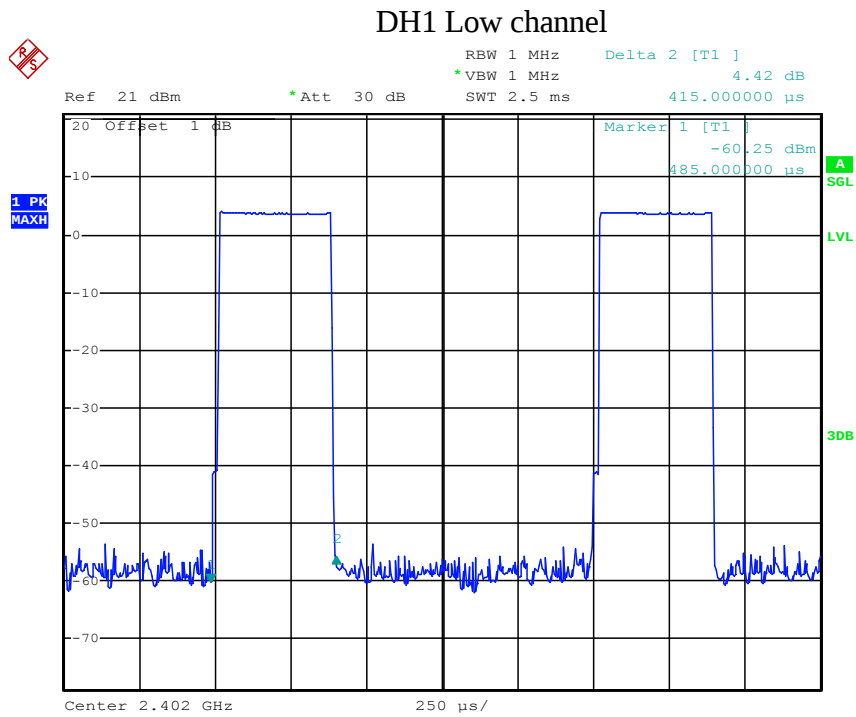


DH1 High channel

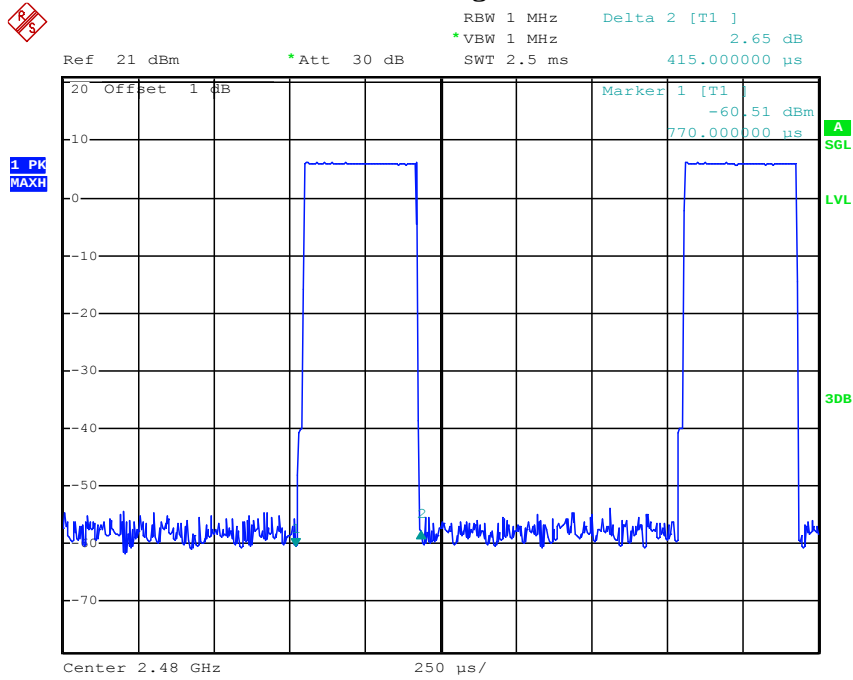


DH3 Low channel

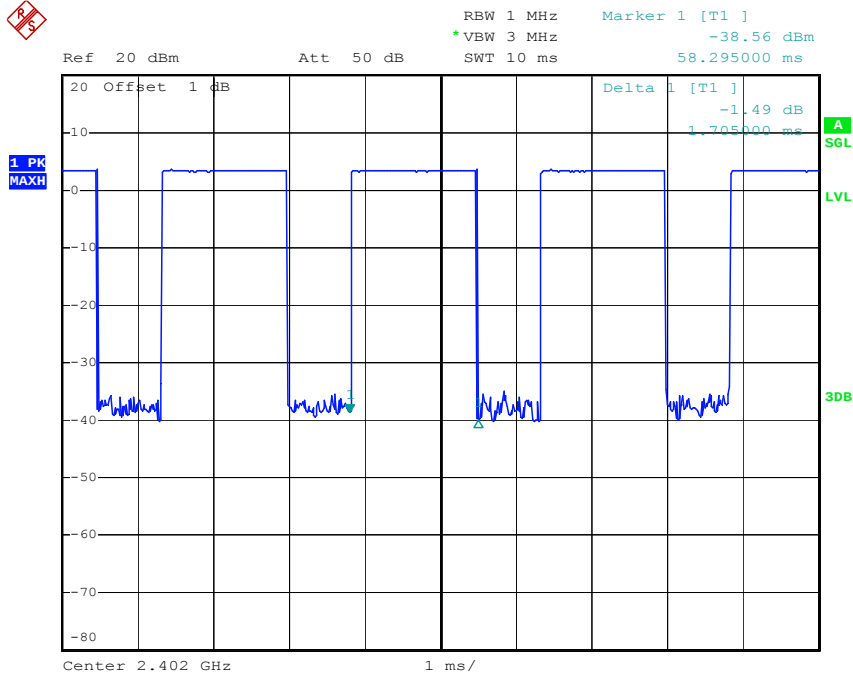


DH3 Middle channel

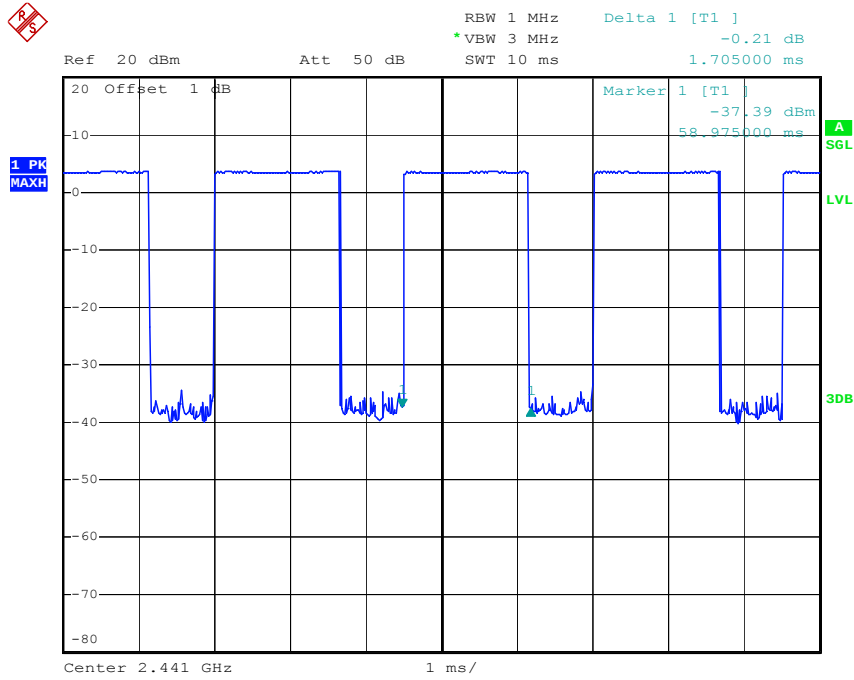


DH3 High channel

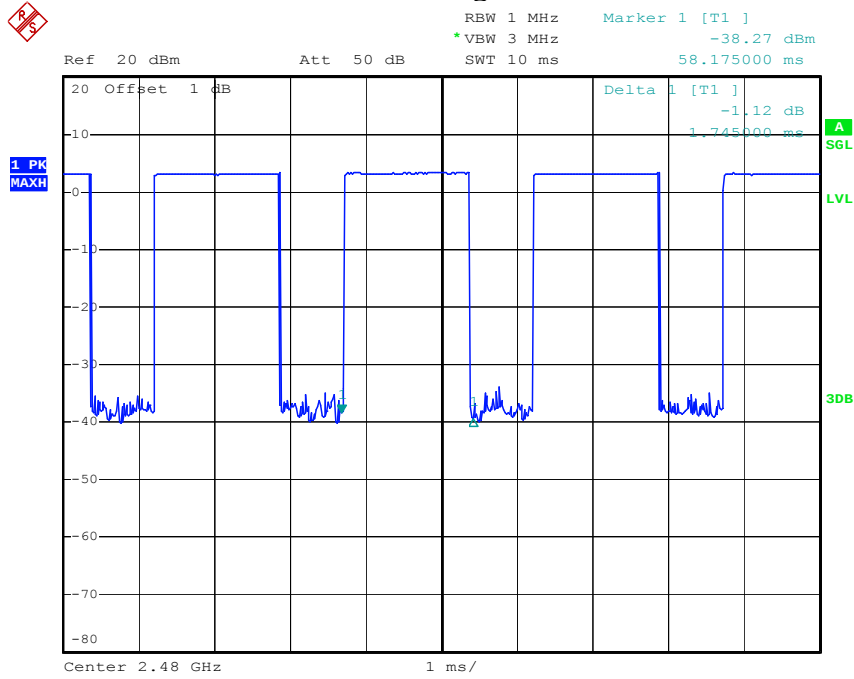


DH5 Low channel

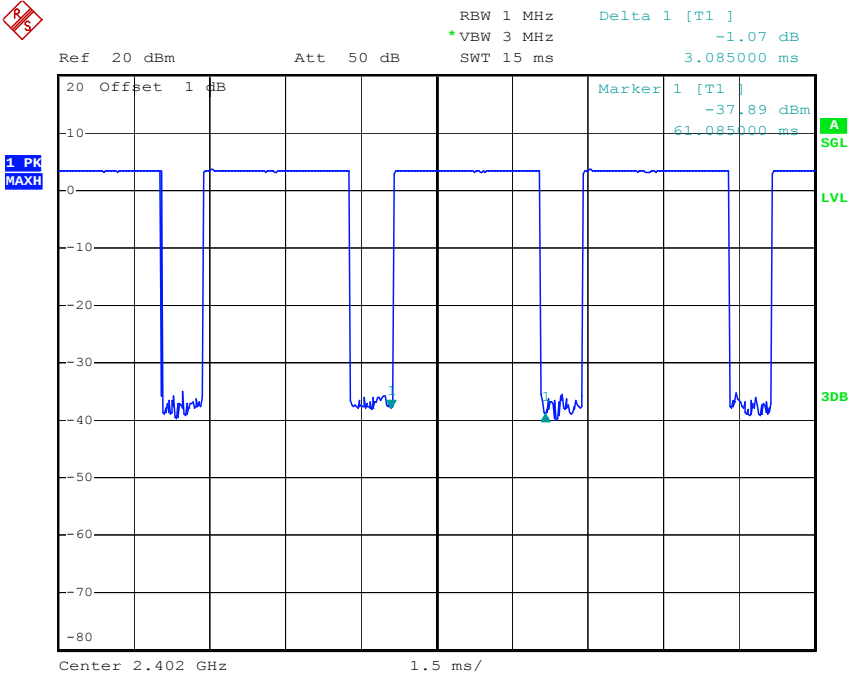


DH5 Middle channel


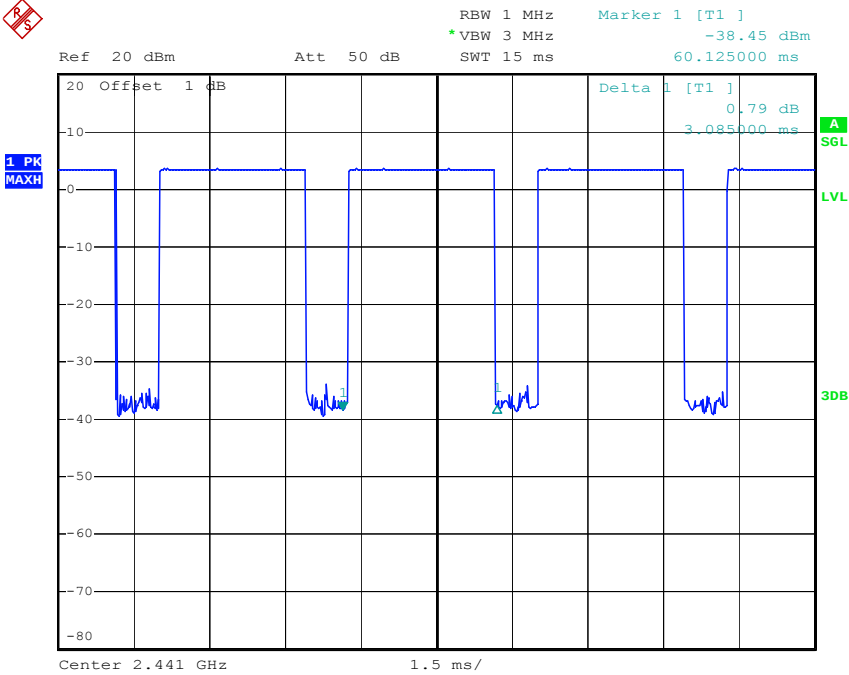




DH5 High channel

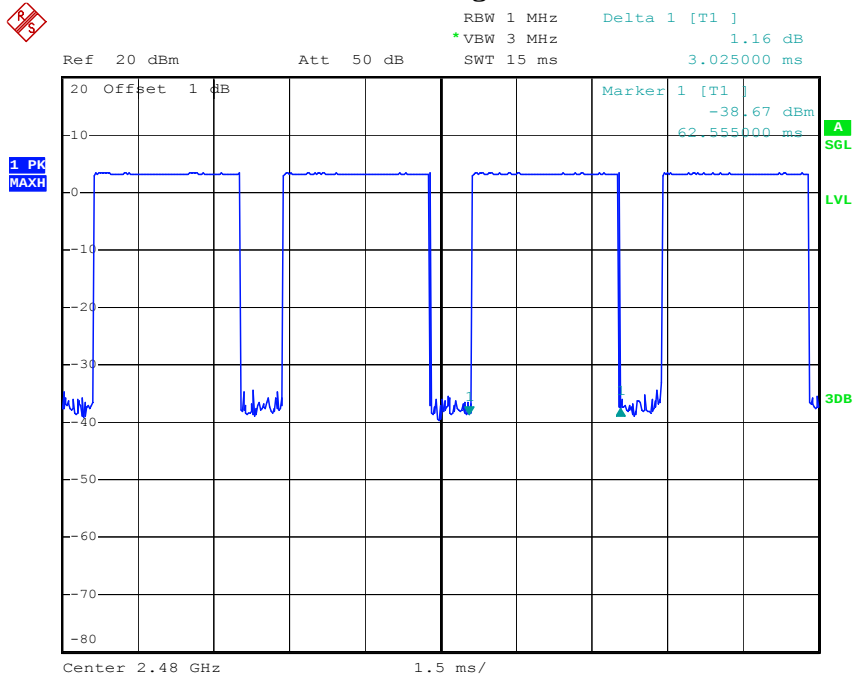


2DH1 Low channel

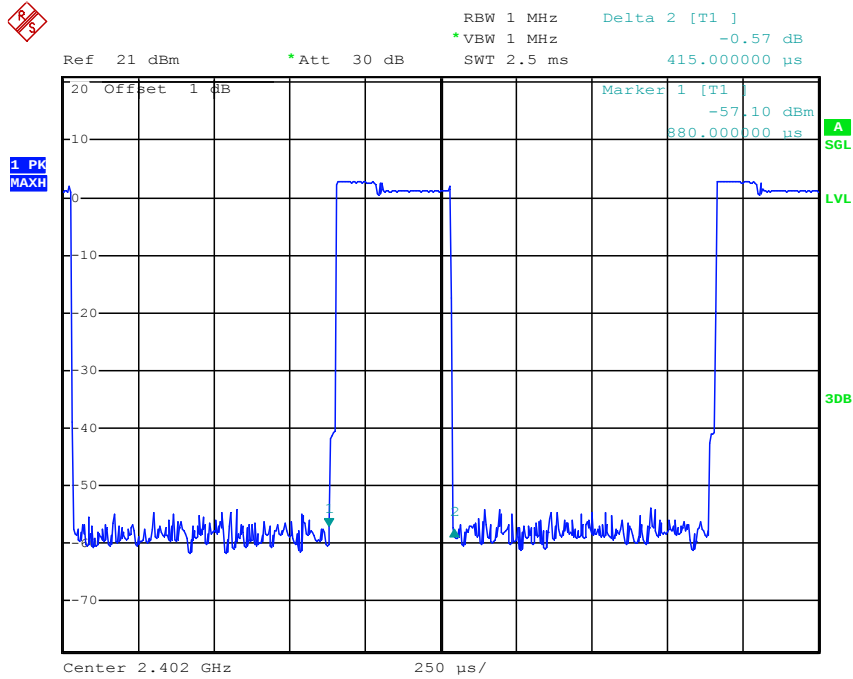

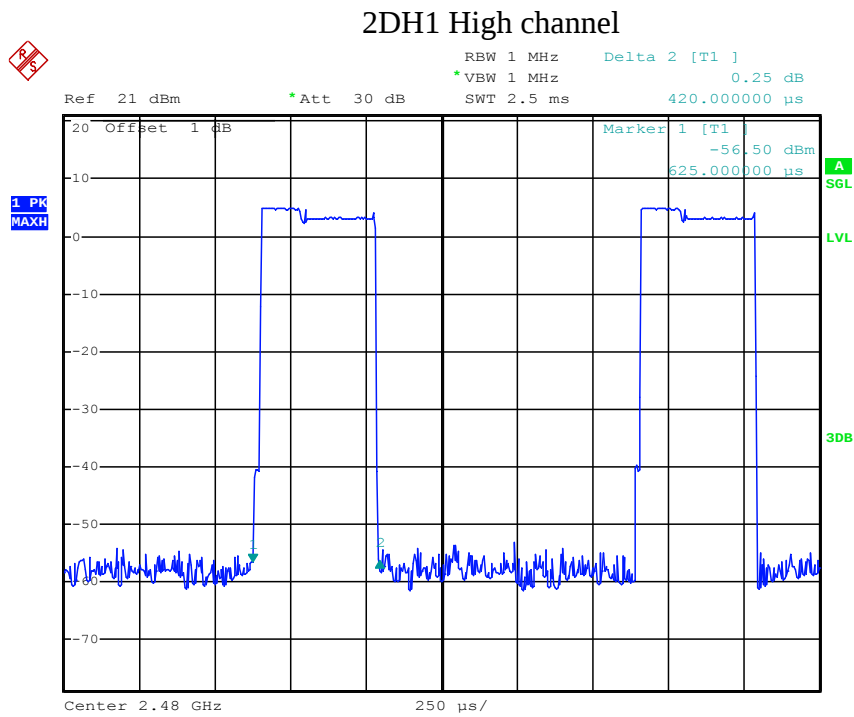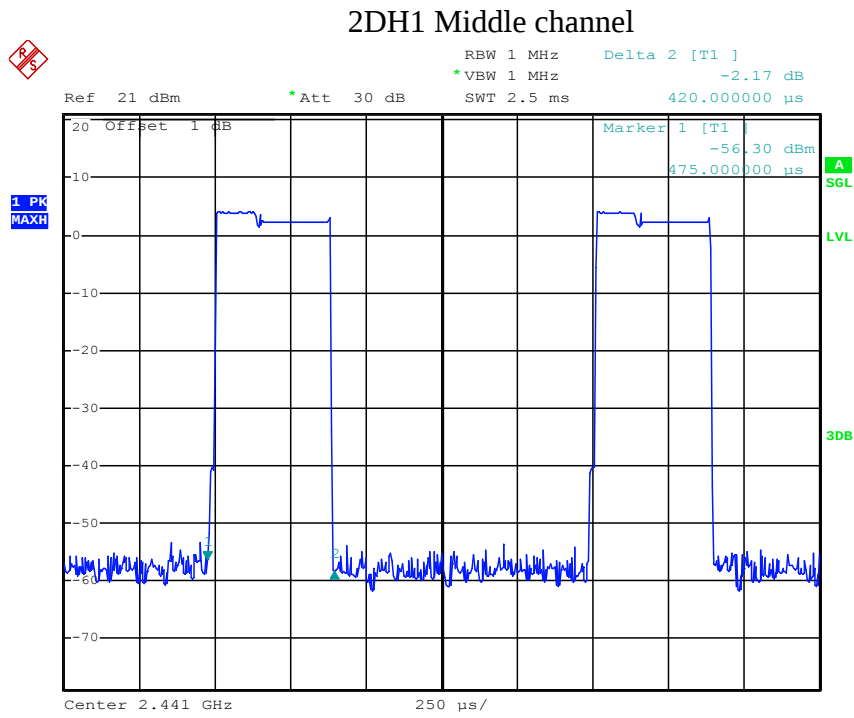


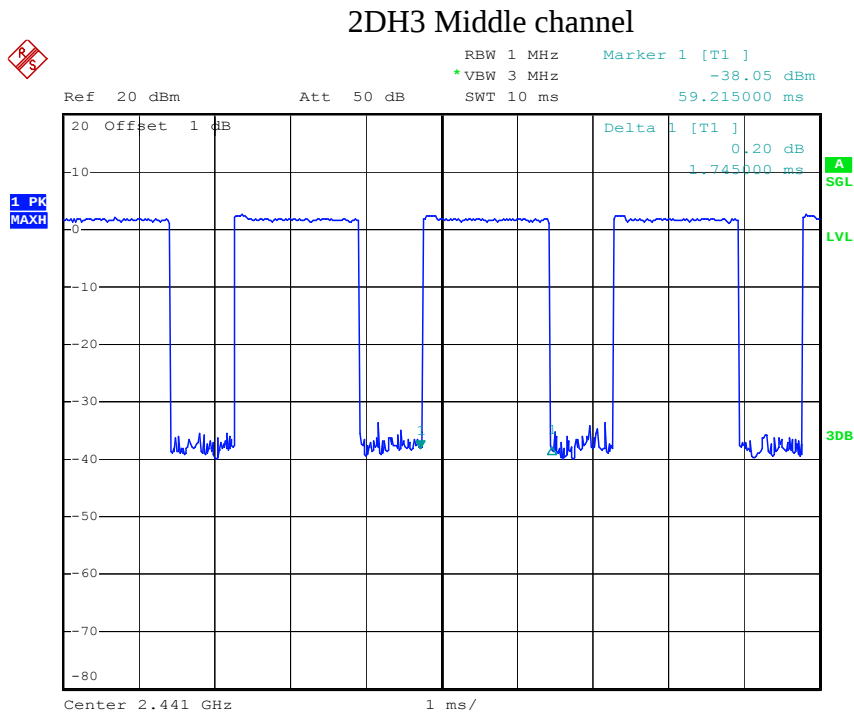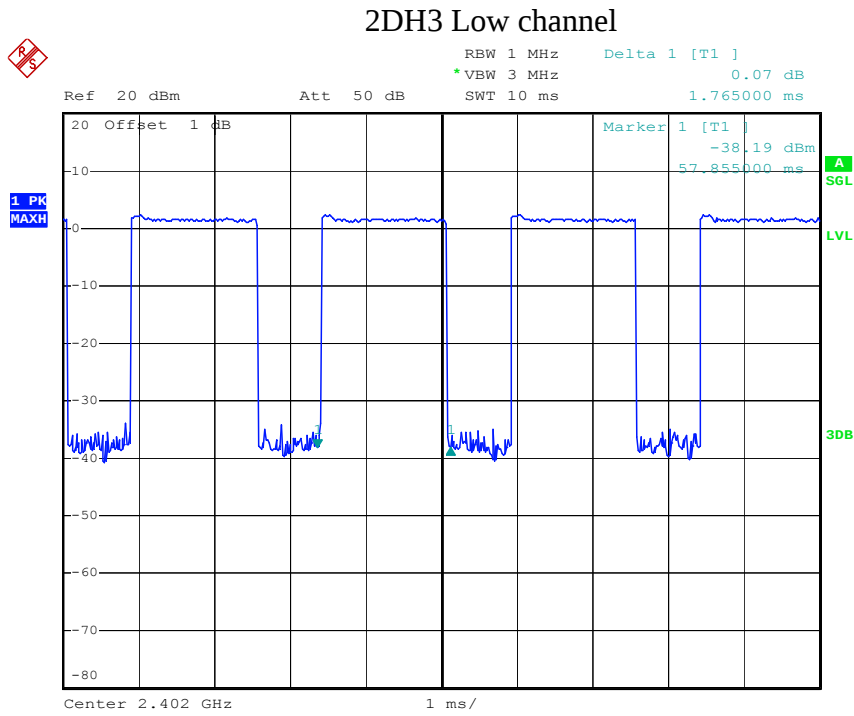


2DH3 High channel

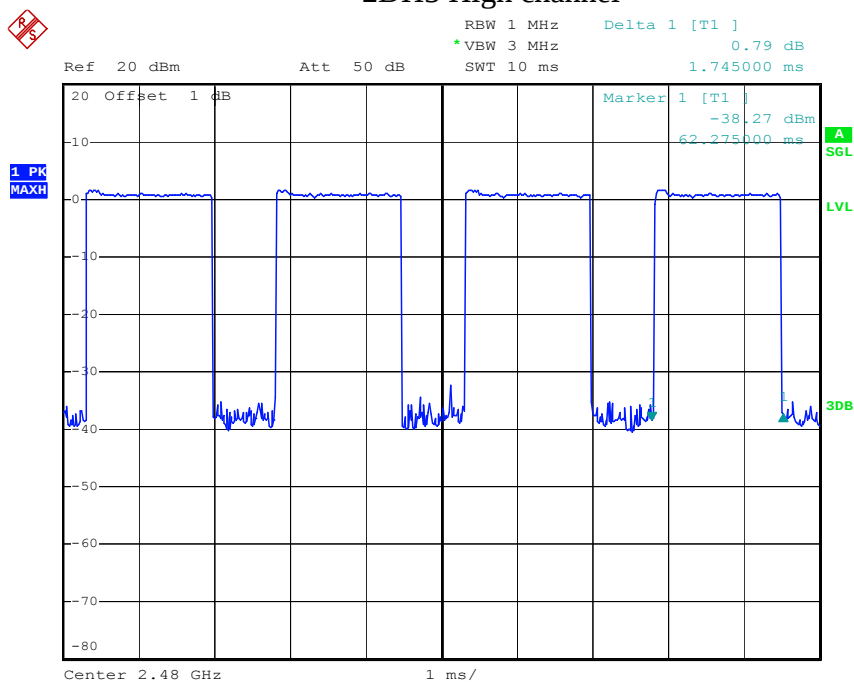


2DH5 Low channel


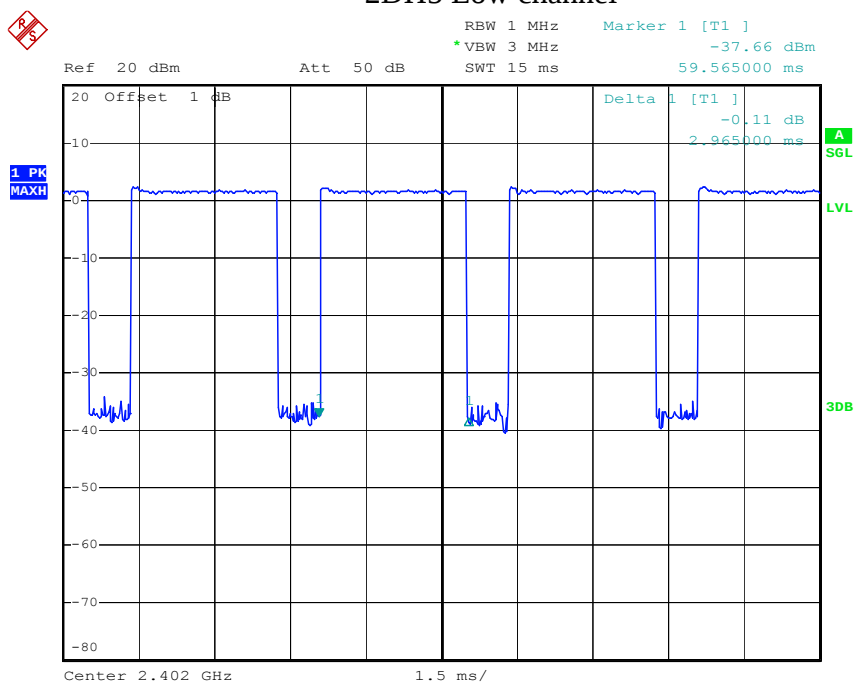


2DH5 Middle channel

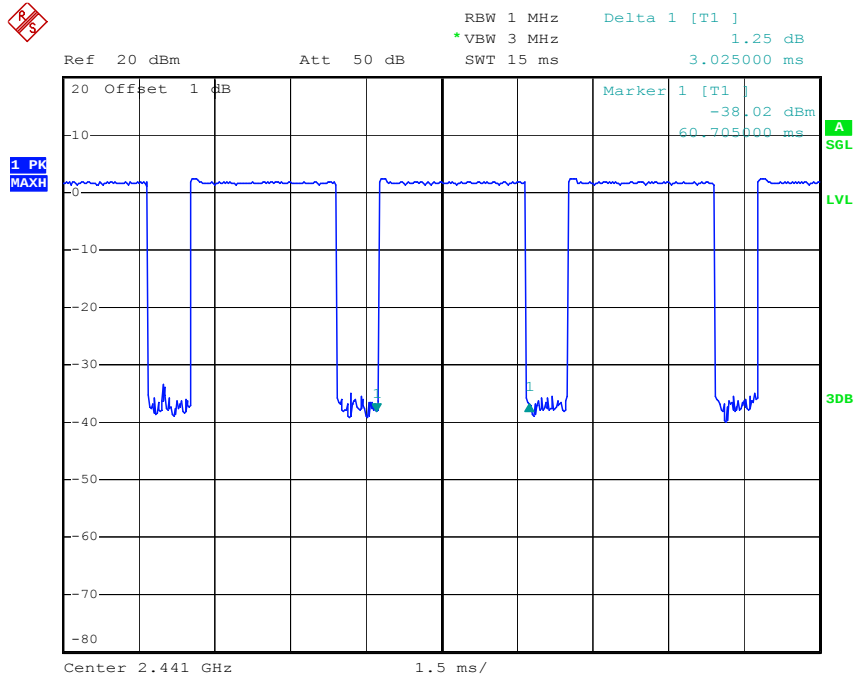


2DH5 High channel

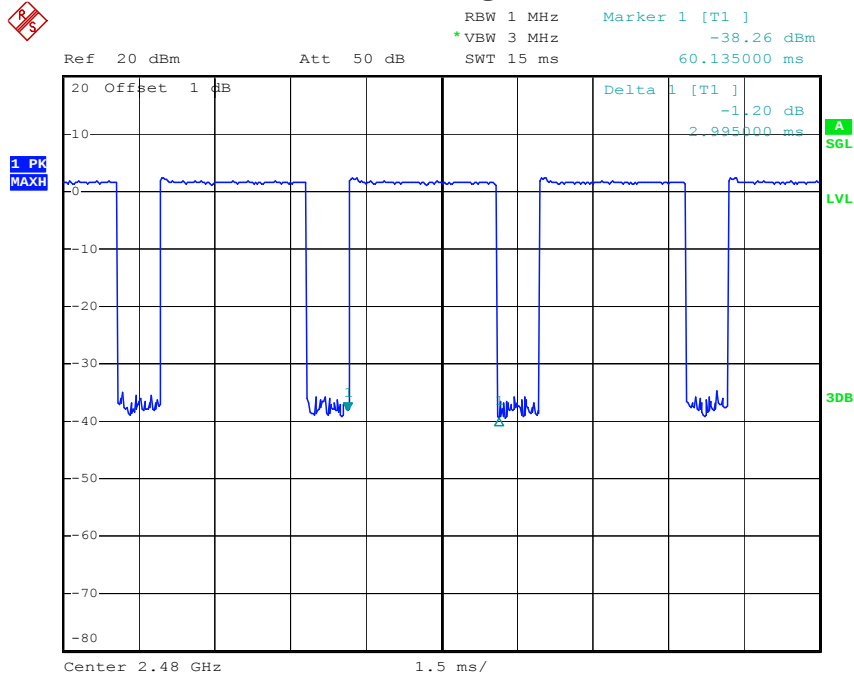


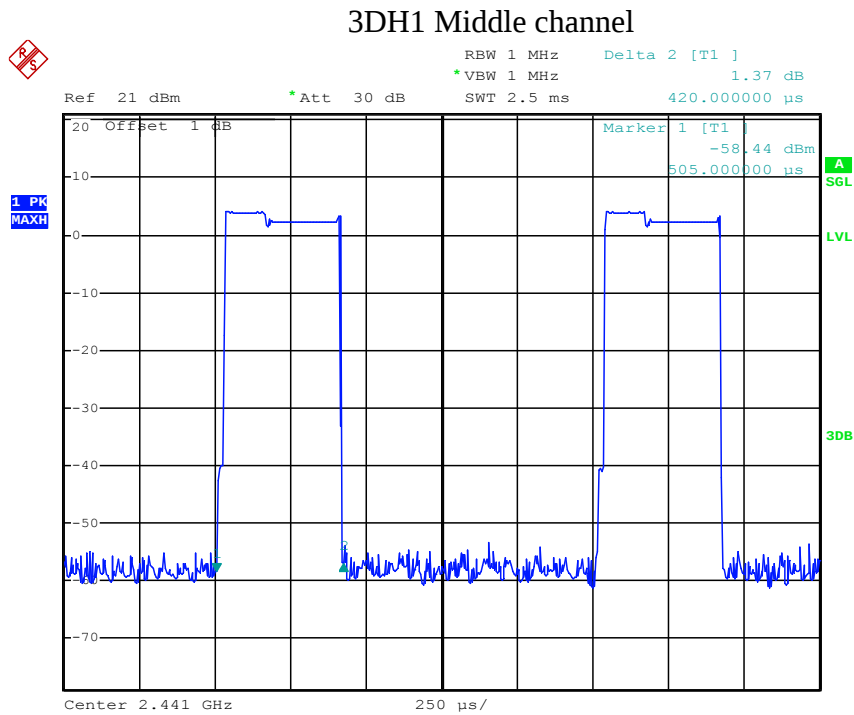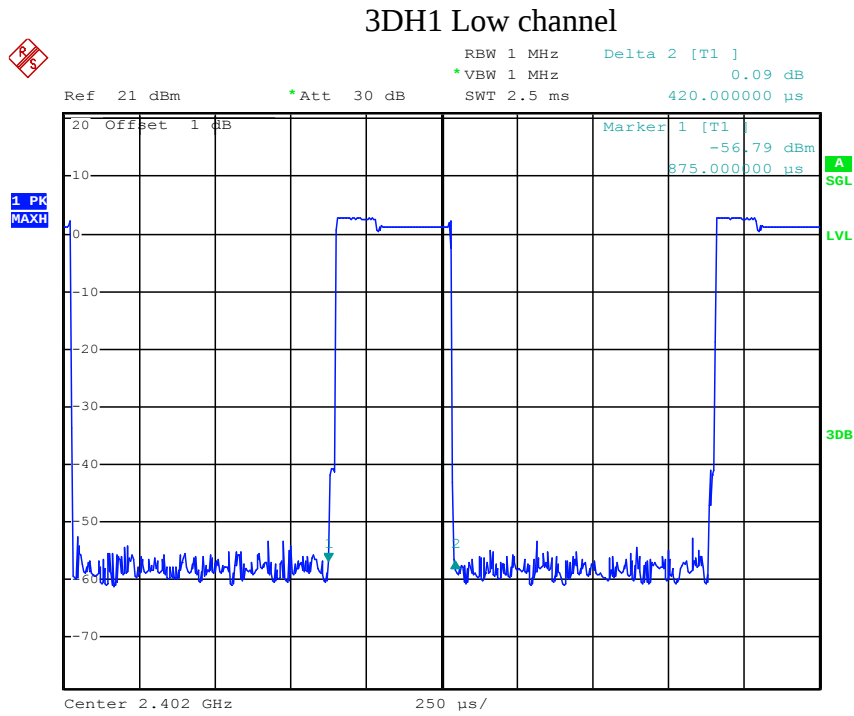


3DH1 High channel

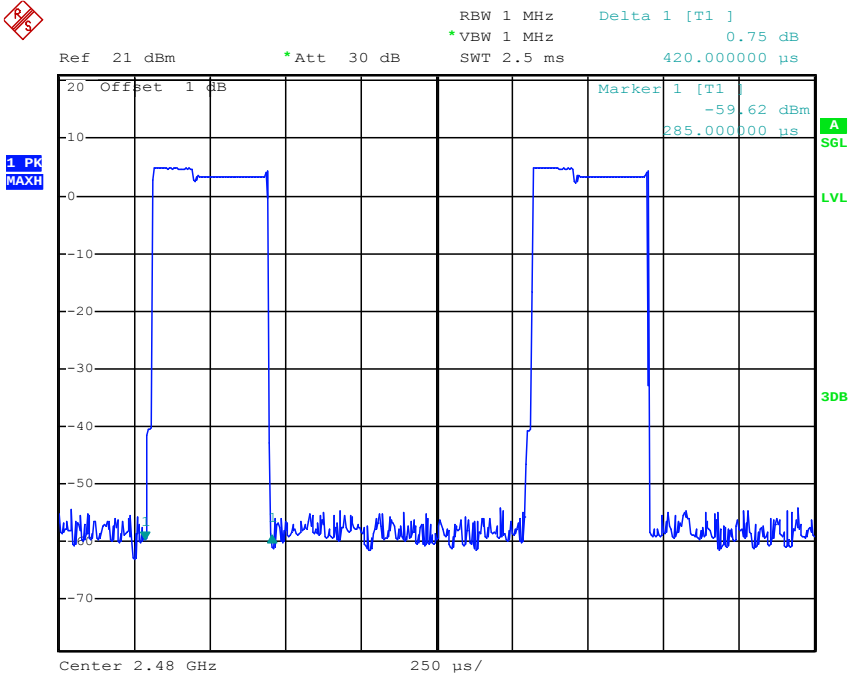


3DH3 Low channel


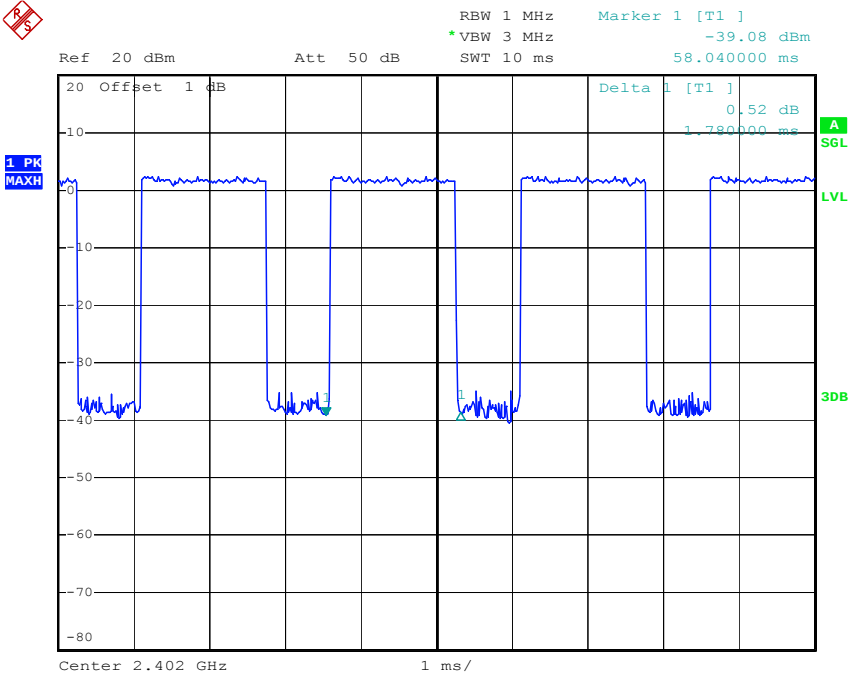



3DH3 Middle channel

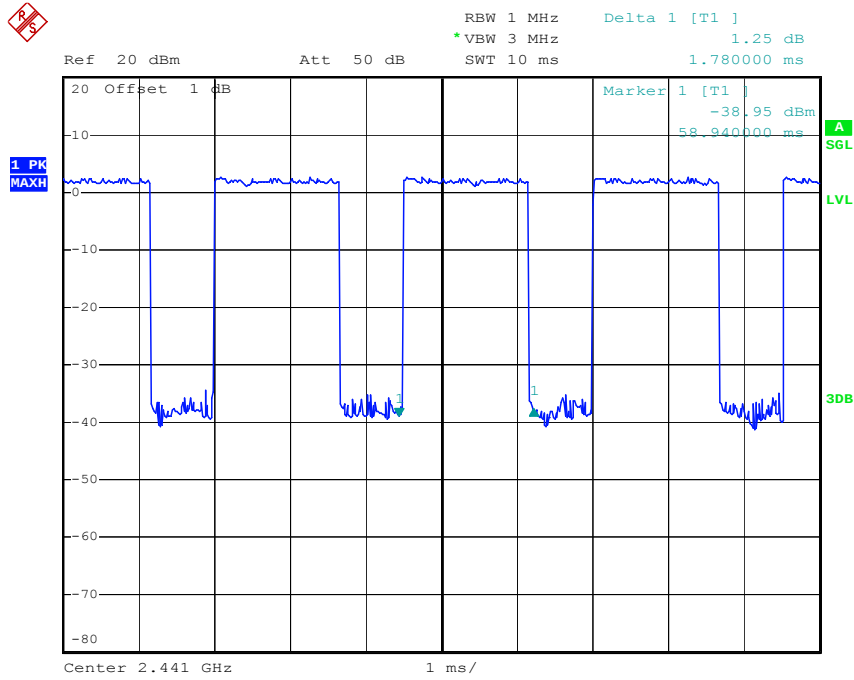

3DH3 High channel

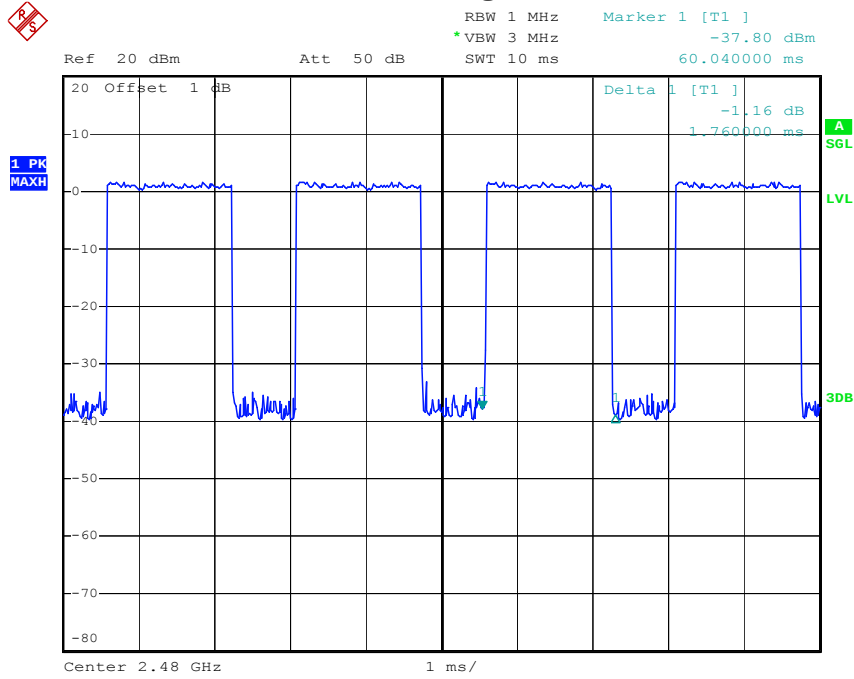


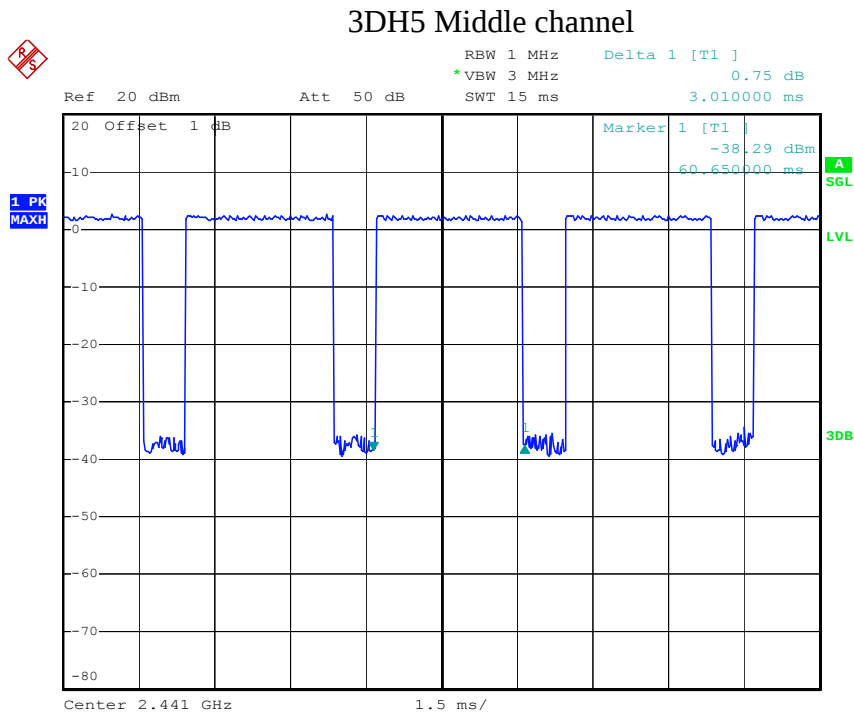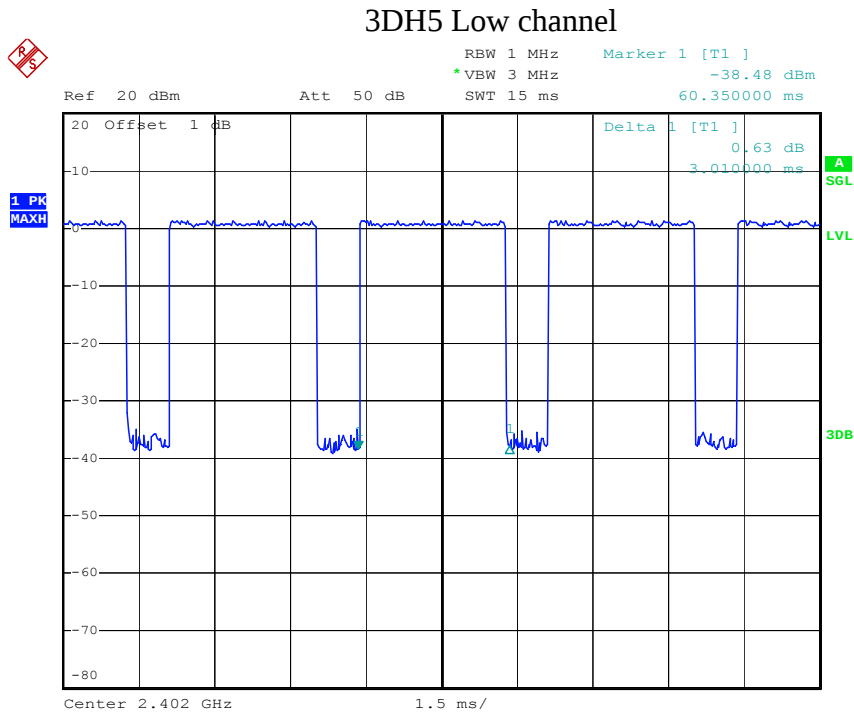

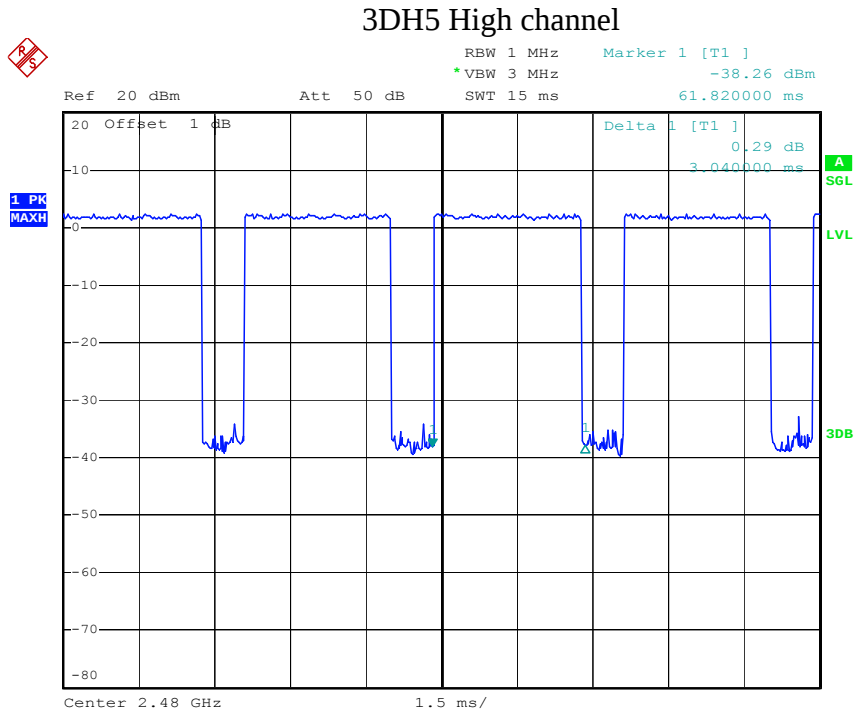

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1. Block Diagram of Test Setup



(EUT: Dock It Pro)

9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 3MHz and VBW to 3MHz.

9.5.3. Measurement the maximum peak output power.

9.6. Test Result

GFSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm)	Limits dBm / W
Low	2402	3.24	30/1.0
Middle	2441	2.25	30/1.0
High	2480	3.53	30/1.0

II/4-DQPSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm)	Limits dBm / W
Low	2402	1.25	21 / 0.125
Middle	2441	1.04	21 / 0.125
High	2480	1.57	21 / 0.125


8DPSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm)	Limits dBm / W
Low	2402	2.33	21 / 0.125
Middle	2441	2.48	21 / 0.125
High	2480	2.43	21 / 0.125


The spectrum analyzer plots are attached as below.

GFSK Mode


Low channel

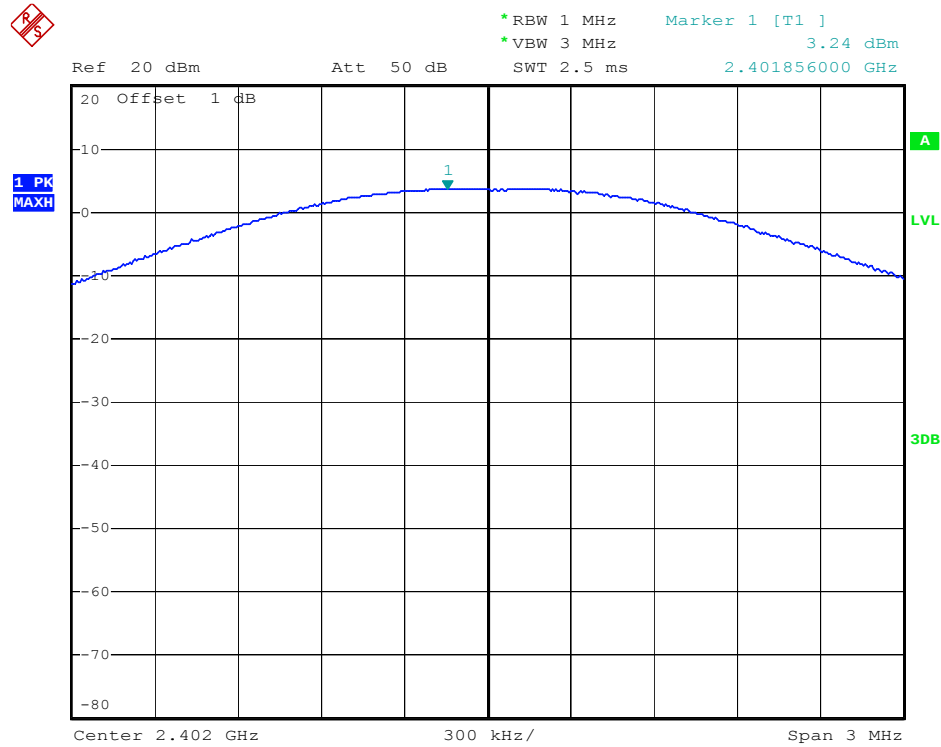

Middle channel

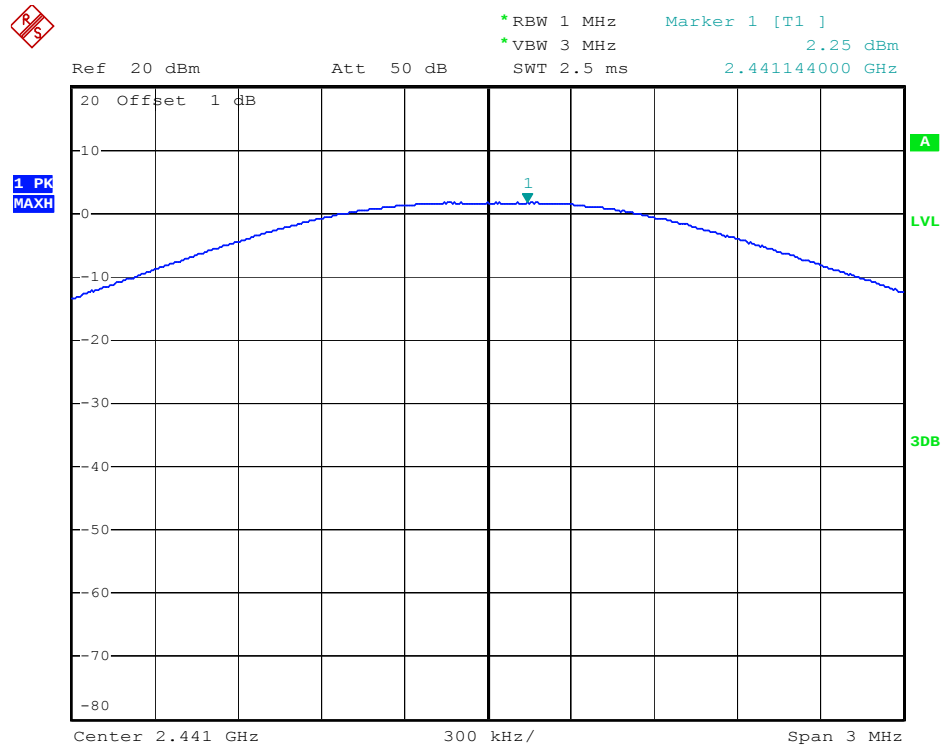


High channel

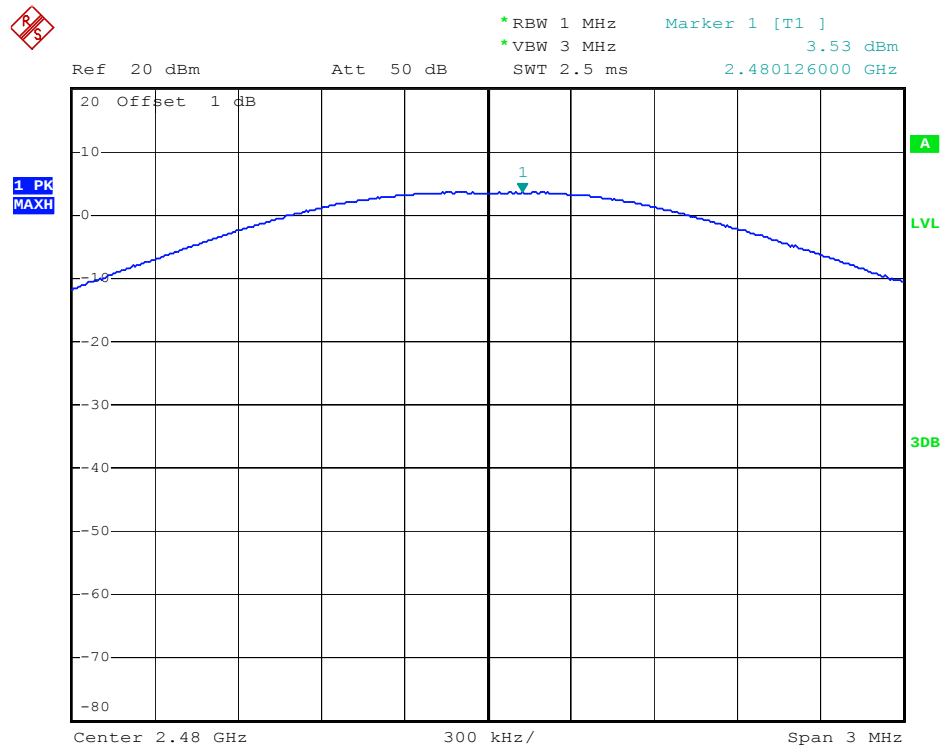


Π/4-DQPSK Mode


Low channel

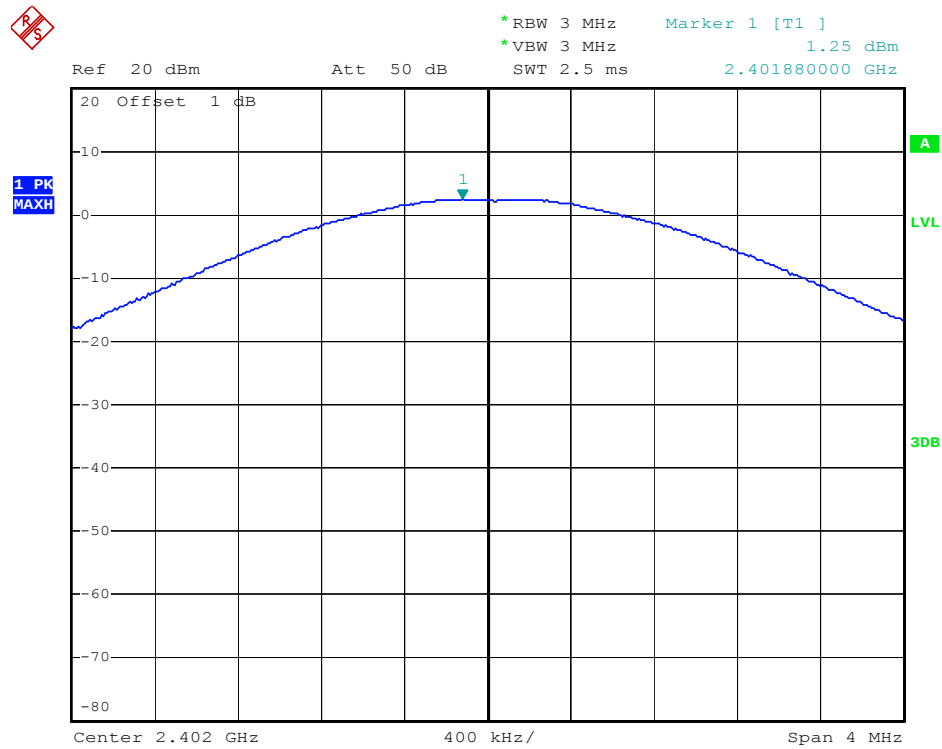

Middle channel

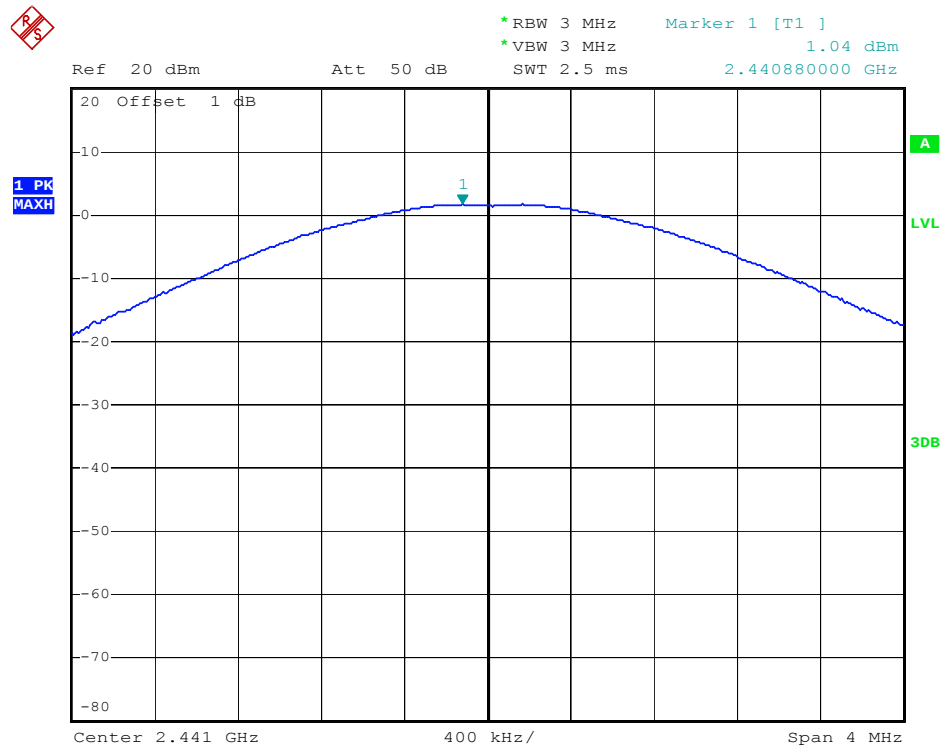


High channel

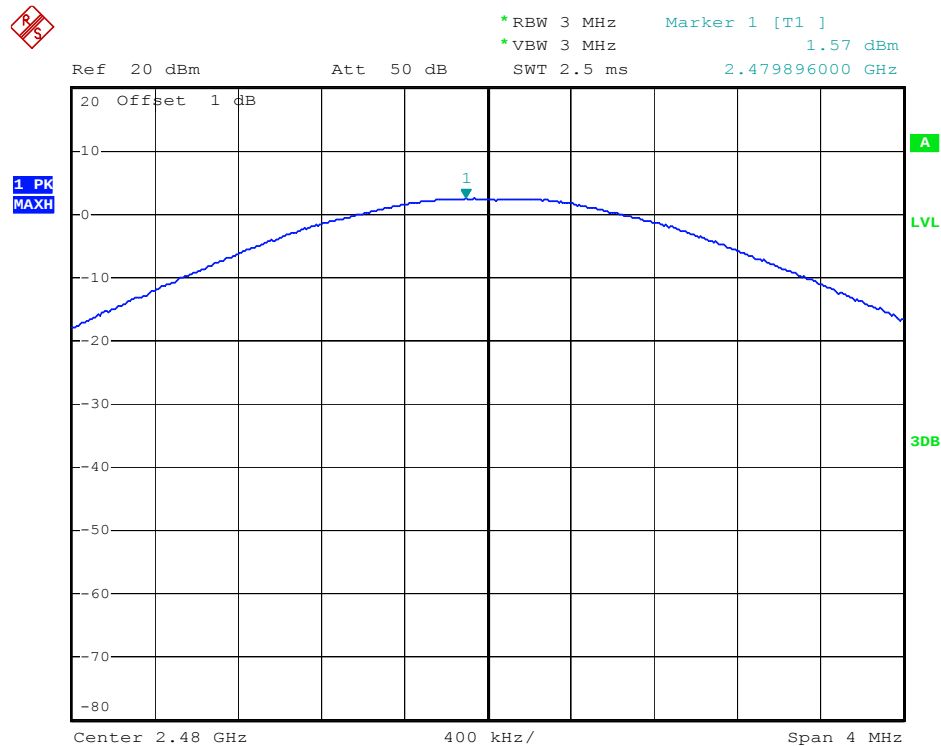


8DPSK Mode


Low channel

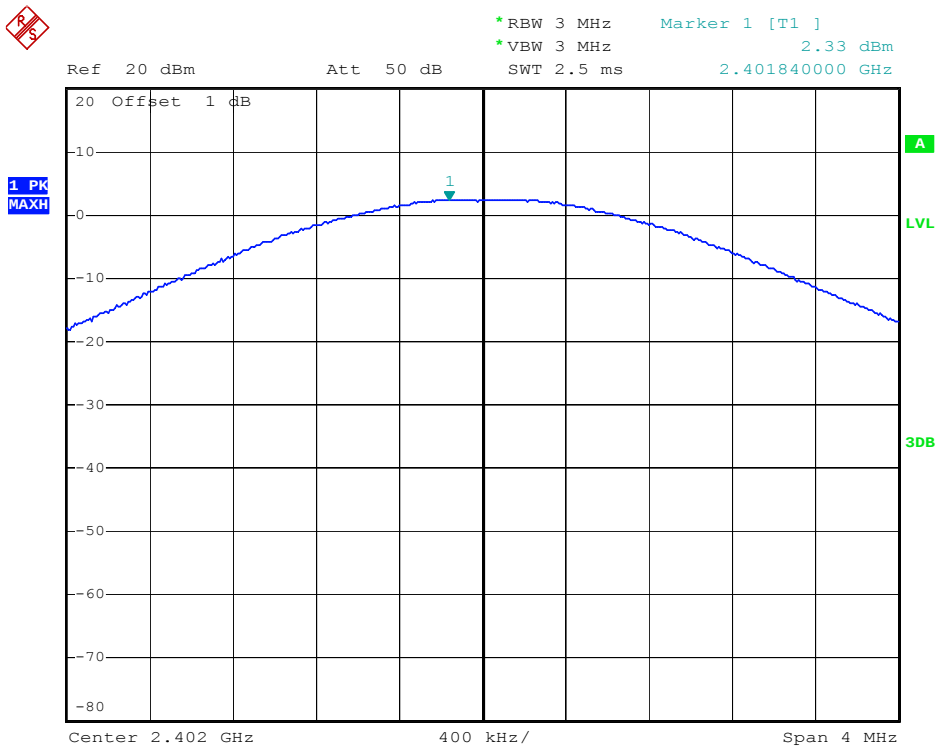

Middle channel

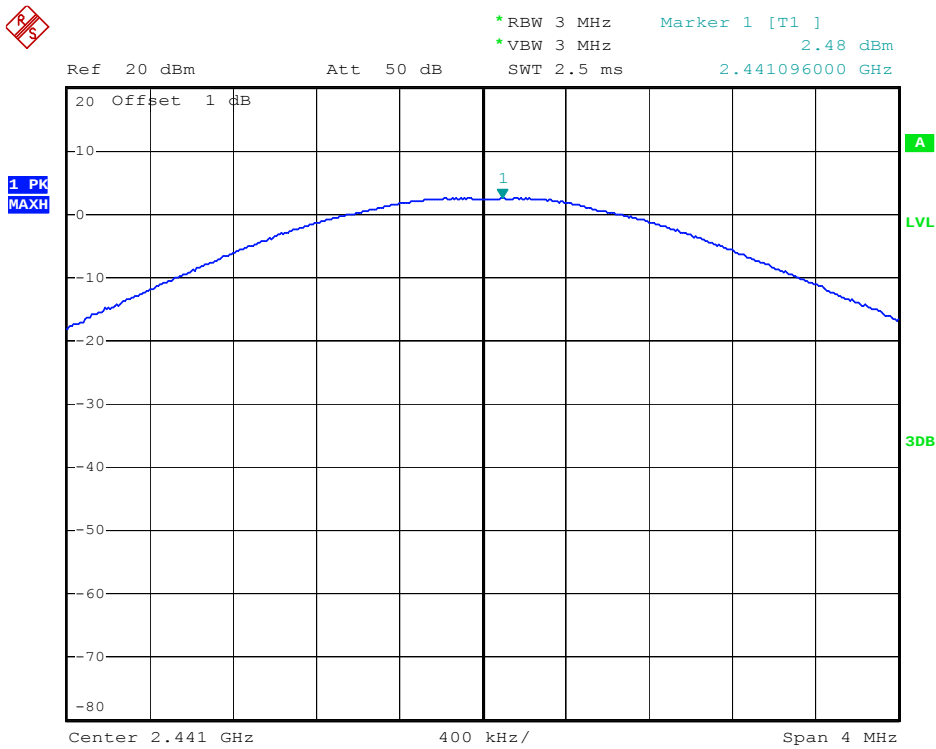


High channel

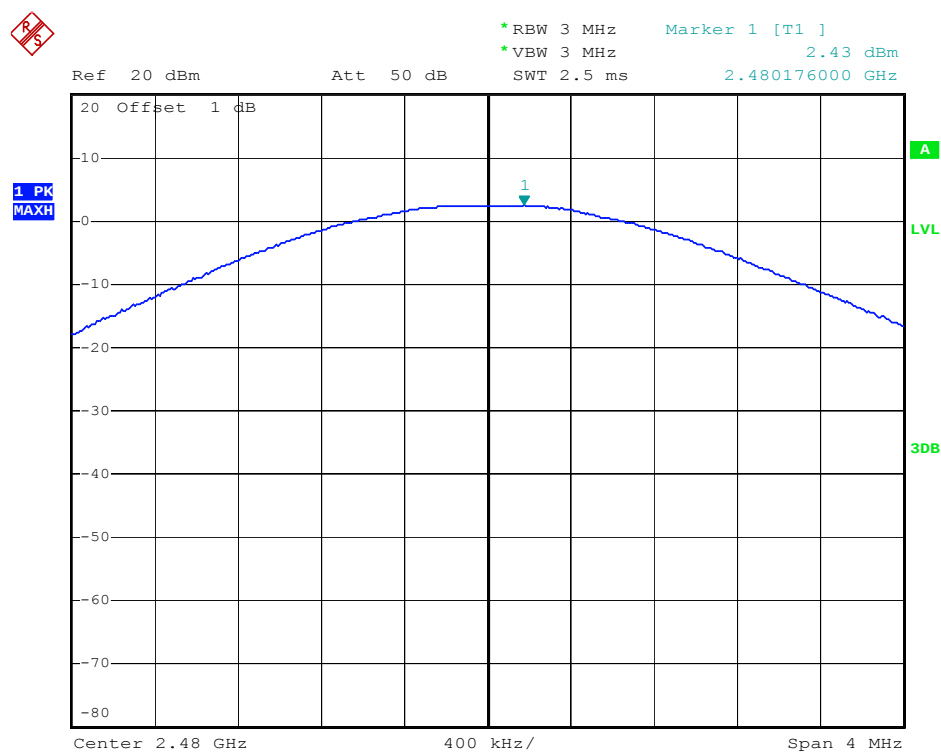

10. RADIATED EMISSION TEST


10.1. Block Diagram of Test Setup

10.1.1. Block diagram of connection between the EUT and simulators



(EUT: Dock It Pro)

10.1.2. Anechoic Chamber Test Setup Diagram

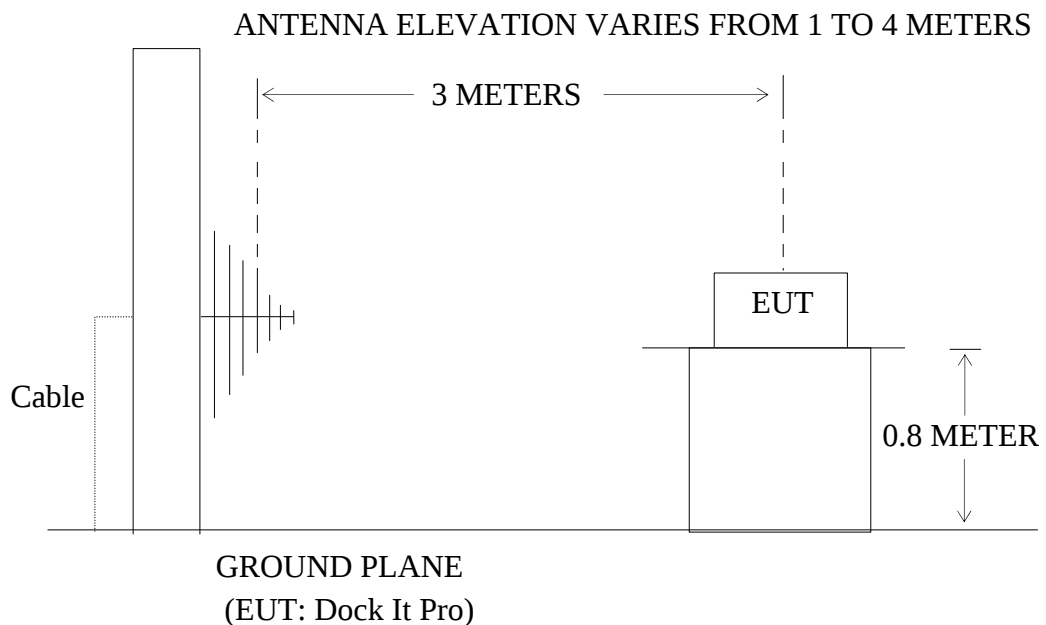

10.2. The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4- 2009 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120 KHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

10.6. The Field Strength of Radiation Emission Measurement Results

Note: 1. We tested GFSK mode, $\pi/4$ -DQPSK Mode & 8DPSK mode and recored the worst case data (GFSK mode) for all test mode.

2. The fundamental radiated emissions were reduced by 2.4G Band Reject Filter in the attached plots.
3. The 18-25GHz emissions are not reported, because the levels are too low against the limit.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: rucky9 #25

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: Dock It Pro

Mode: TX 2402MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/26/

Time: 11:31:03

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20132111

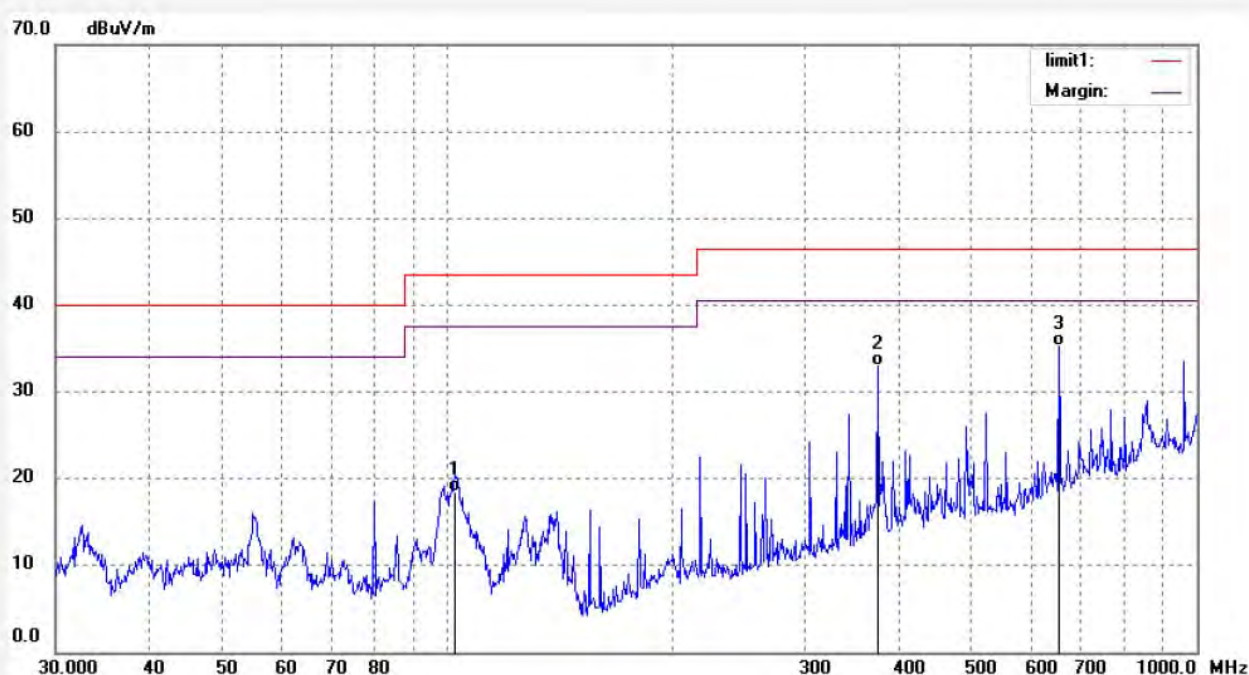

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	102.3597	40.25	-21.74	18.51	43.50	-24.99	QP			
2	375.9385	48.56	-15.50	33.06	46.50	-13.44	QP			
3	654.2318	45.89	-10.58	35.31	46.50	-11.19	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: rucky9 #26
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: Dock It Pro
Mode: TX 2402MHz(GFSK)
Model: DOCPRO-1301-US
Manufacturer: Doking

Polarization: Horizontal
Power Source: DC 5V
Date: 13/10/26/
Time: 11:32:48
Engineer Signature: Ricky
Distance: 3m

Note: Report No.:ATE20132111

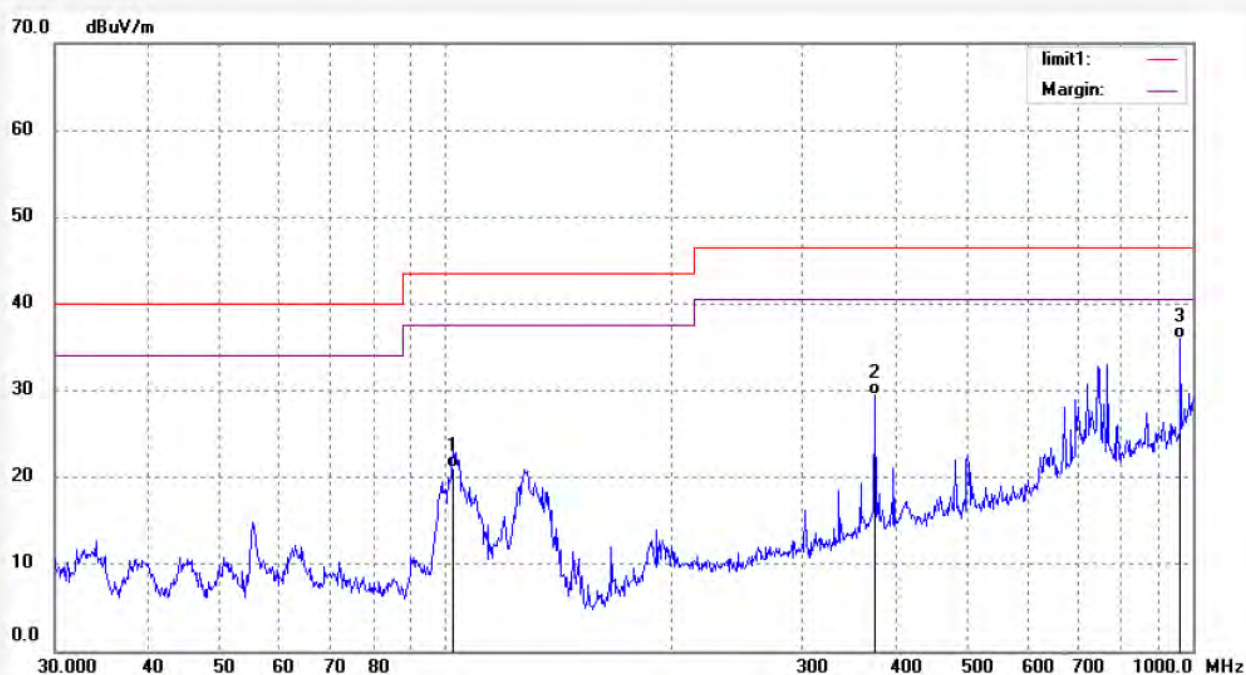

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	102.3597	44.96	-23.82	21.14	43.50	-22.36	QP			
2	374.6225	45.26	-15.82	29.44	46.50	-17.06	QP			
3	962.1623	41.12	-5.23	35.89	46.50	-10.61	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: rucky9 #27

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: Dock It Pro

Mode: TX 2441MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 13/10/26/

Time: 11:34:12

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20132111

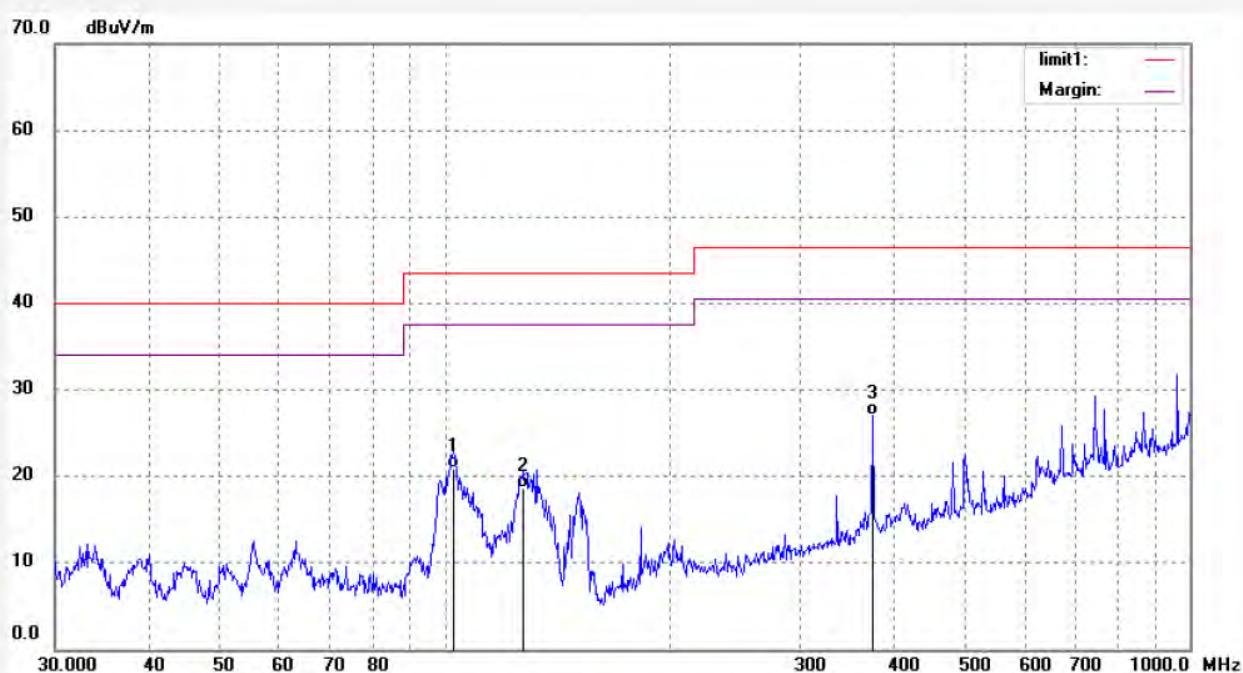

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	102.7192	44.69	-23.84	20.85	43.50	-22.65	QP			
2	127.6645	42.51	-23.91	18.60	43.50	-24.90	QP			
3	375.9385	42.86	-15.81	27.05	46.50	-19.45	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: rucky9 #28

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: Dock It Pro

Mode: TX 2441MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/26/

Time: 11:36:52

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20132111

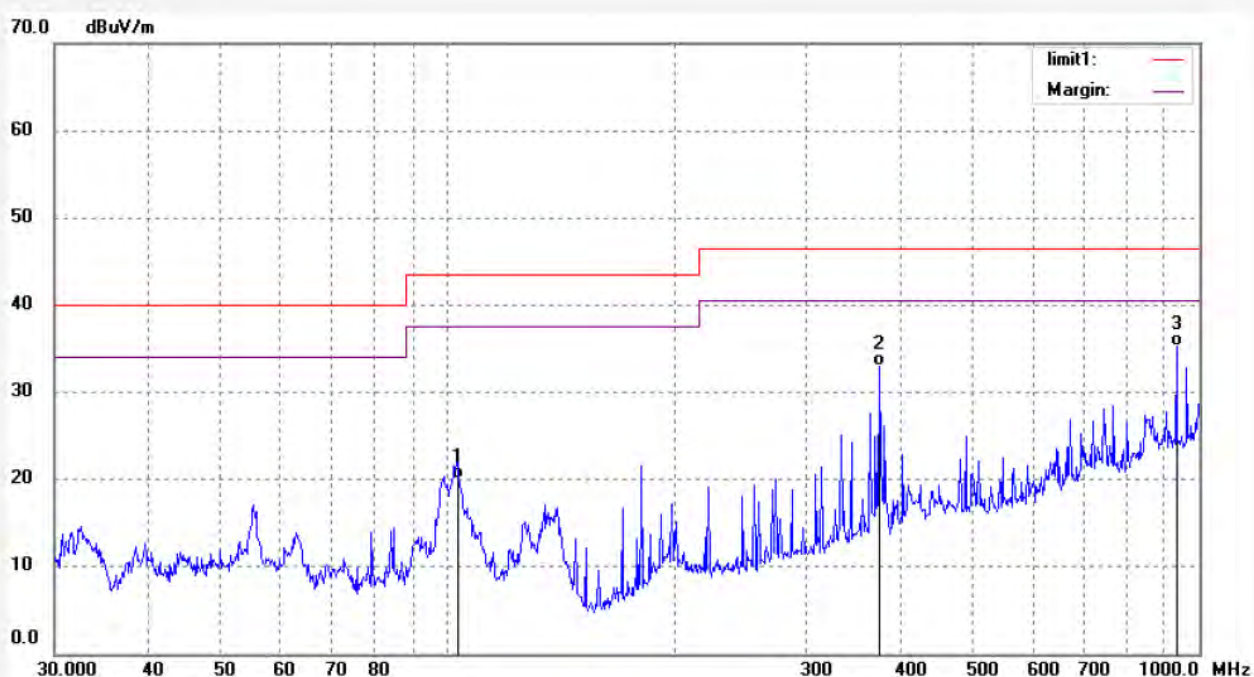

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	103.0800	41.78	-21.75	20.03	43.50	-23.47	QP			
2	374.6225	48.52	-15.54	32.98	46.50	-13.52	QP			
3	932.2715	40.83	-5.63	35.20	46.50	-11.30	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: rucky9 #29

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: Dock It Pro

Mode: TX 2480MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/26/

Time: 11:38:20

Engineer Signature: Ricky

Distance: 3m

Note: Report No.:ATE20132111

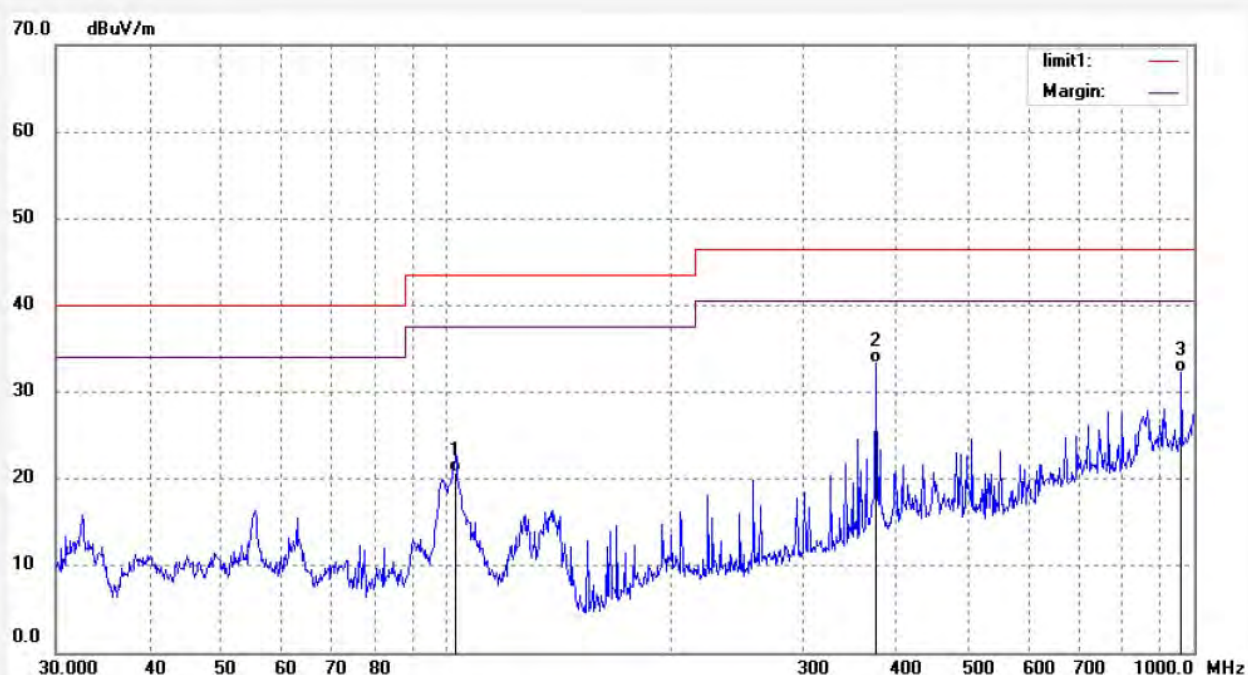

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	102.7192	42.43	-21.75	20.68	43.50	-22.82	QP			
2	374.6225	48.80	-15.54	33.26	46.50	-13.24	QP			
3	962.1623	37.59	-5.23	32.36	46.50	-14.14	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: rucky9 #30
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: Dock It Pro
Mode: TX 2480MHz(GFSK)
Model: DOCPRO-1301-US
Manufacturer: Doking

Polarization: Horizontal
Power Source: DC 5V
Date: 13/10/26/
Time: 11:40:58
Engineer Signature: Ricky
Distance: 3m

Note: Report No.:ATE20132111

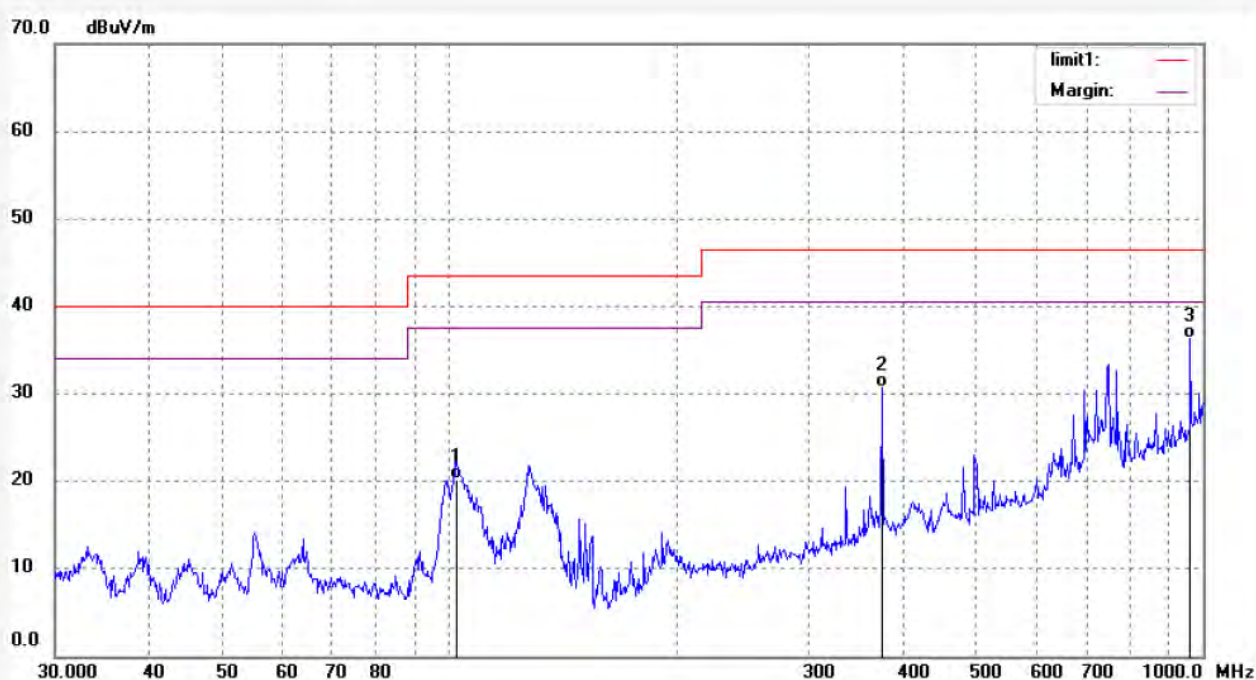

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	102.3597	43.99	-23.82	20.17	43.50	-23.33	QP			
2	374.6225	46.45	-15.82	30.63	46.50	-15.87	QP			
3	962.1623	41.48	-5.23	36.25	46.50	-10.25	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: rucky9 #40

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Dock It Pro

Mode: TX 2402MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/26/

Time: 23/42/30

Engineer Signature: Ricky

Distance:

Note: Report No.:ATE20132111

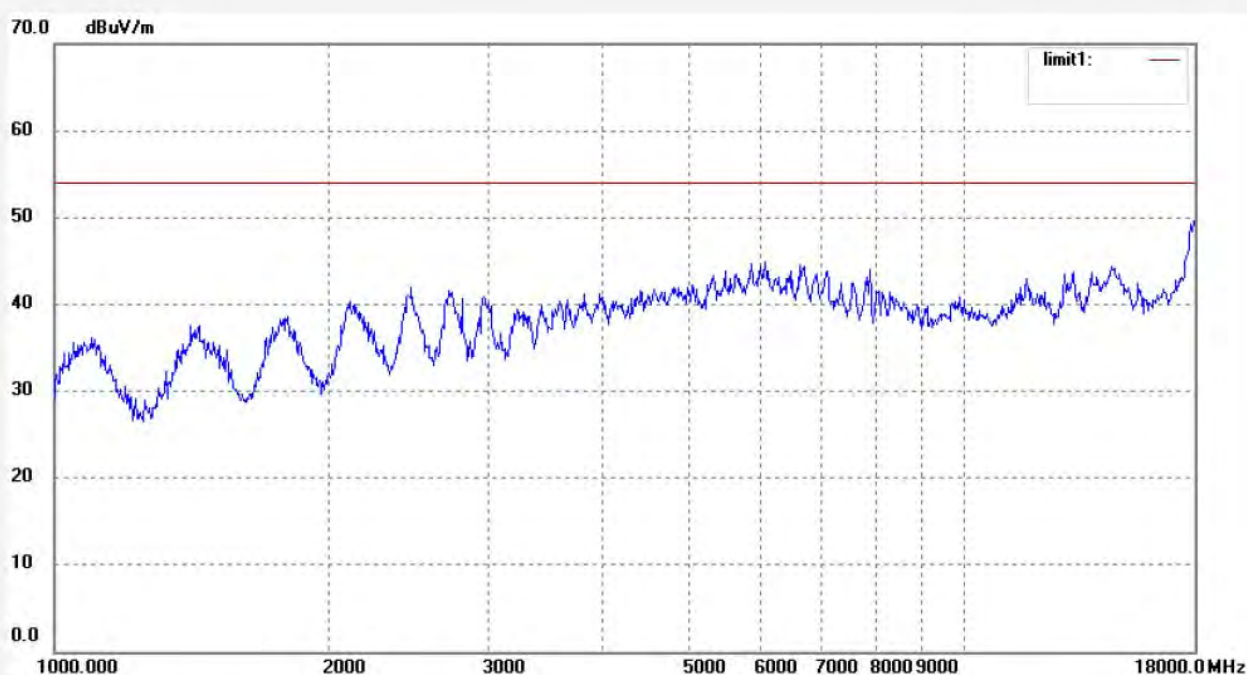

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: rucky9 #39

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Dock It Pro

Mode: TX 2402MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 13/10/26/

Time: 23/41/09

Engineer Signature: Ricky

Distance:

Note: Report No.:ATE20132111

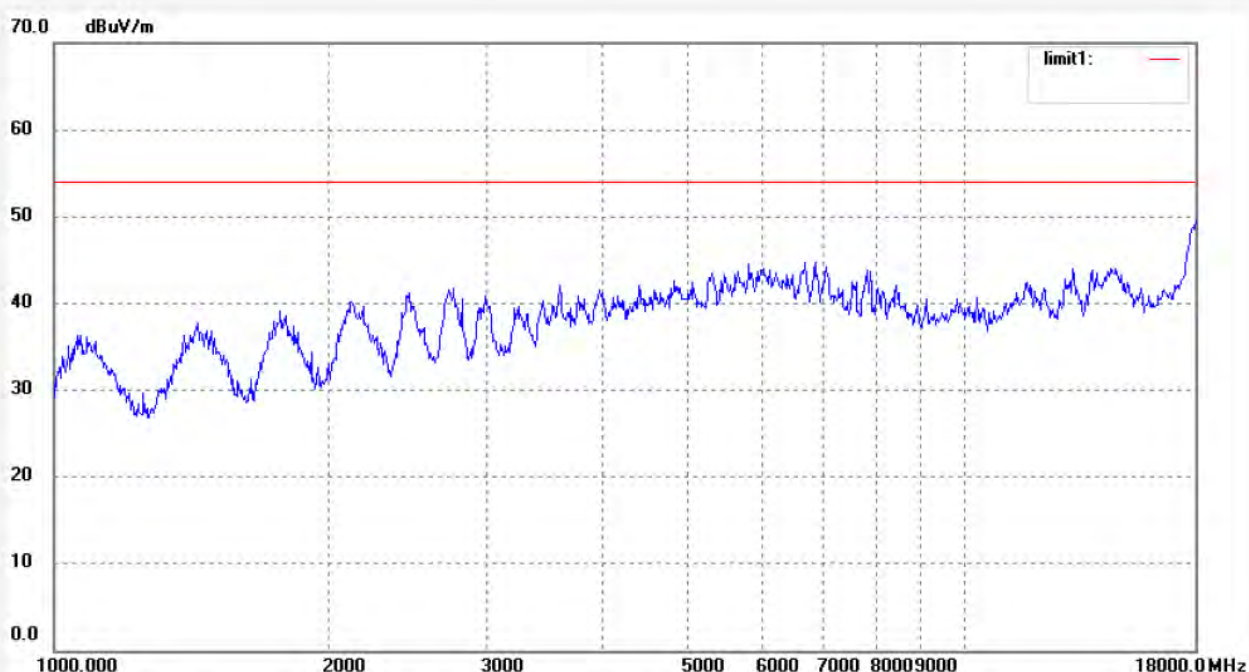

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: rucky9 #38
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 51 %
EUT: Dock It Pro
Mode: TX 2441MHz(GFSK)
Model: DOCPRO-1301-US
Manufacturer: Doking

Polarization: Horizontal
Power Source: DC 5V
Date: 13/10/26/
Time: 23/40/16
Engineer Signature: Ricky
Distance:

Note: Report No.:ATE20132111

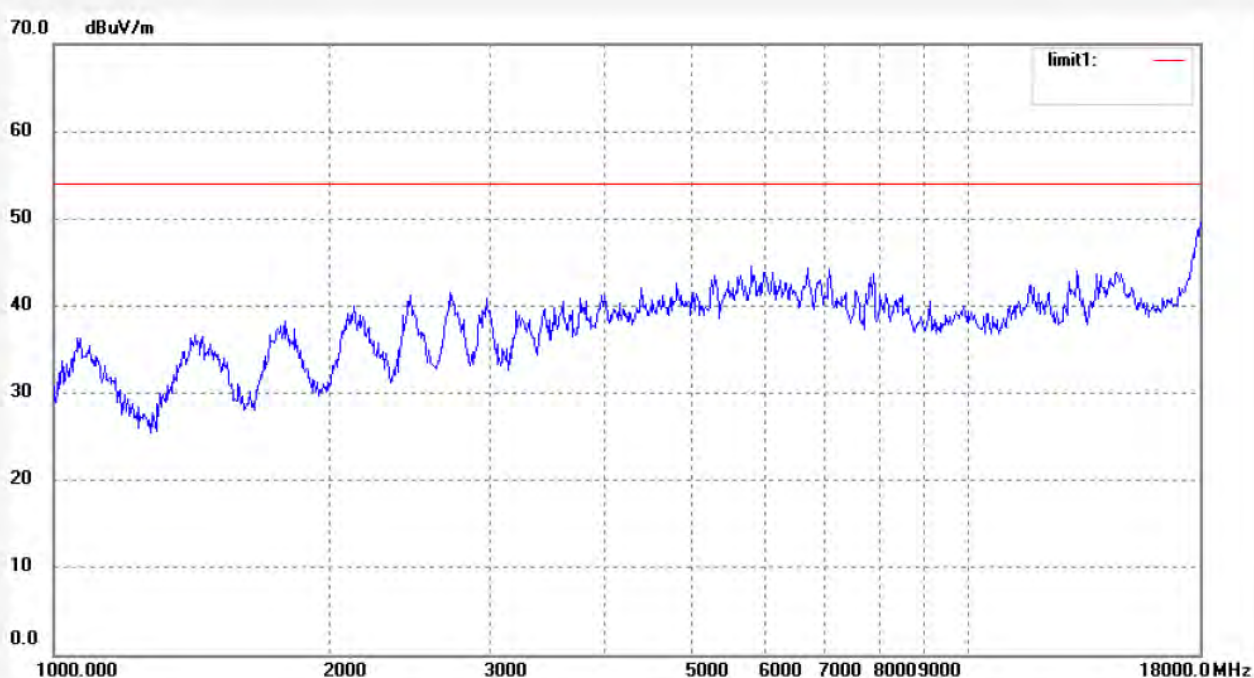

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: rucky9 #37

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Dock It Pro

Mode: TX 2441MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/26/

Time: 23/39/24

Engineer Signature: Ricky

Distance:

Note: Report No.:ATE20132111

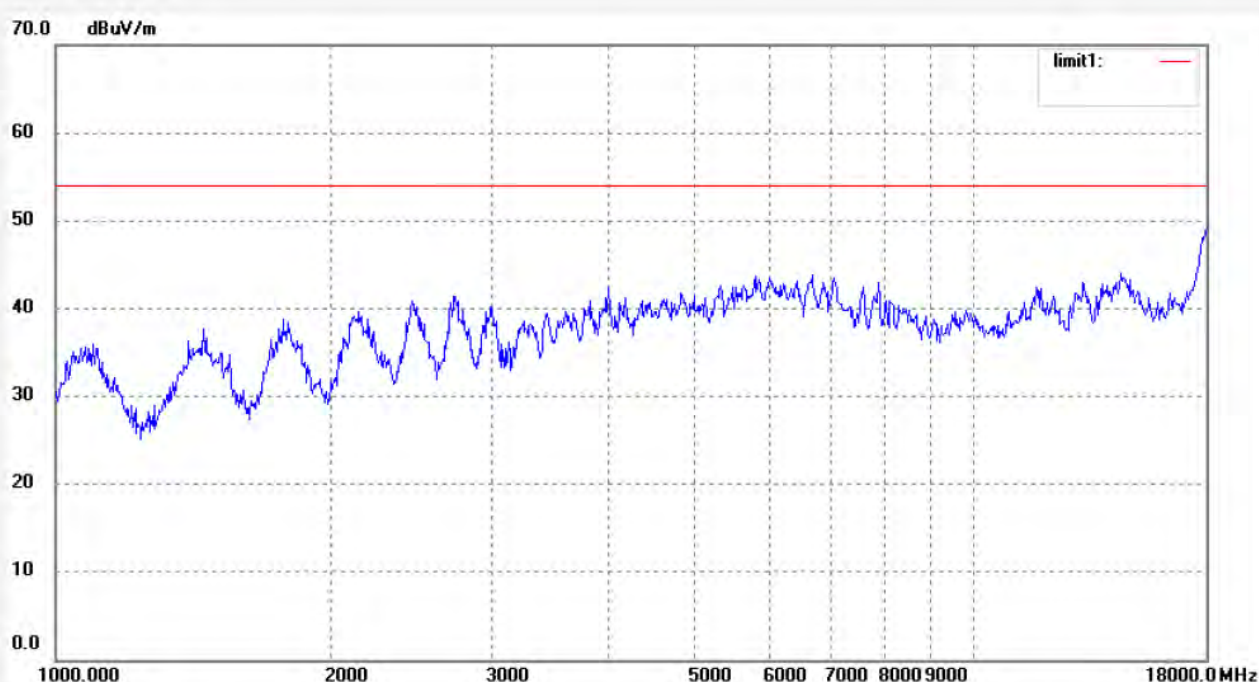

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: rucky9 #36

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Dock It Pro

Mode: TX 2480MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/26/

Time: 23/37/00

Engineer Signature: Ricky

Distance:

Note: Report No.:ATE20132111

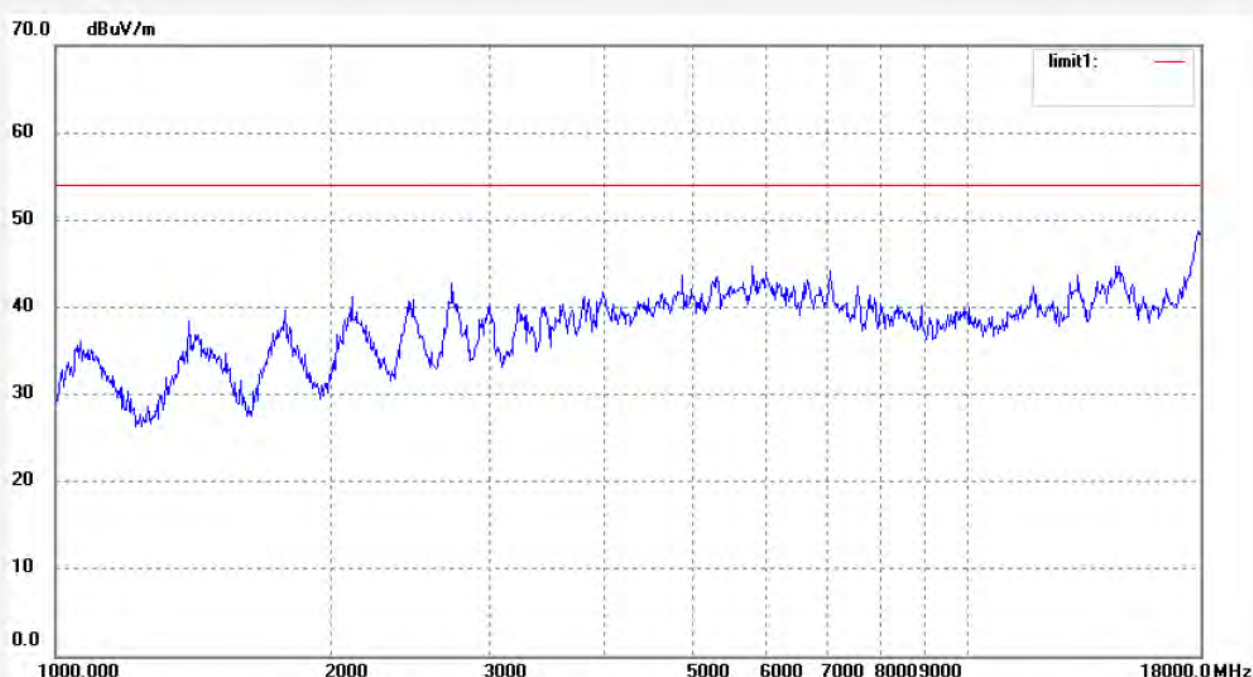

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: rucky9 #35
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 51 %
EUT: Dock It Pro
Mode: TX 2480MHz(GFSK)
Model: DOCPRO-1301-US
Manufacturer: Doking

Polarization: Horizontal
Power Source: DC 5V
Date: 13/10/26/
Time: 23/35/43
Engineer Signature: Ricky
Distance:


Note: Report No.:ATE20132111

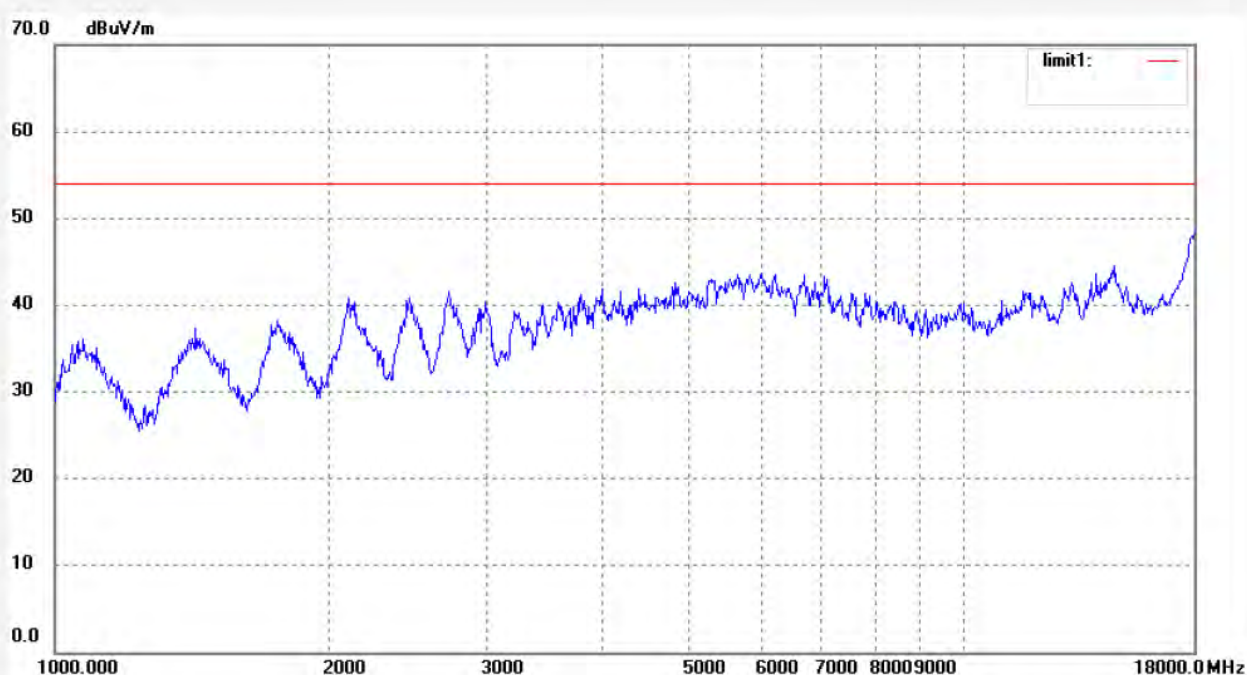

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

11.BAND EDGE COMPLIANCE TEST

11.1.Block Diagram of Test Setup



(EUT: Dock It Pro)

11.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

11.5. Test Procedure



11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz with convenient frequency span including 100 kHz bandwidth from band edge.



11.5.3. The band edges was measured and recorded.

11.6. Test Result



Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
GFSK		
2399.880	44.80	> 20dBc
2483.998	45.58	> 20dBc
Π/4-DQPSK Mode		
2399.802	43.79	> 20dBc
2484.838	44.09	> 20dBc
8DPSK		
2399.750	43.26	> 20dBc
2483.788	44.32	> 20dBc

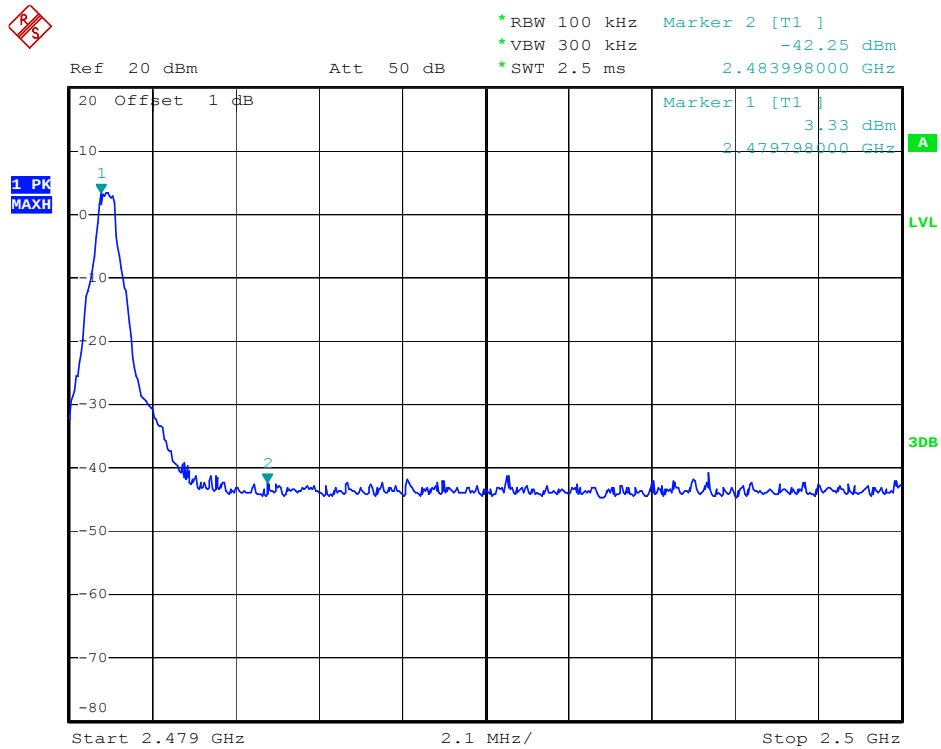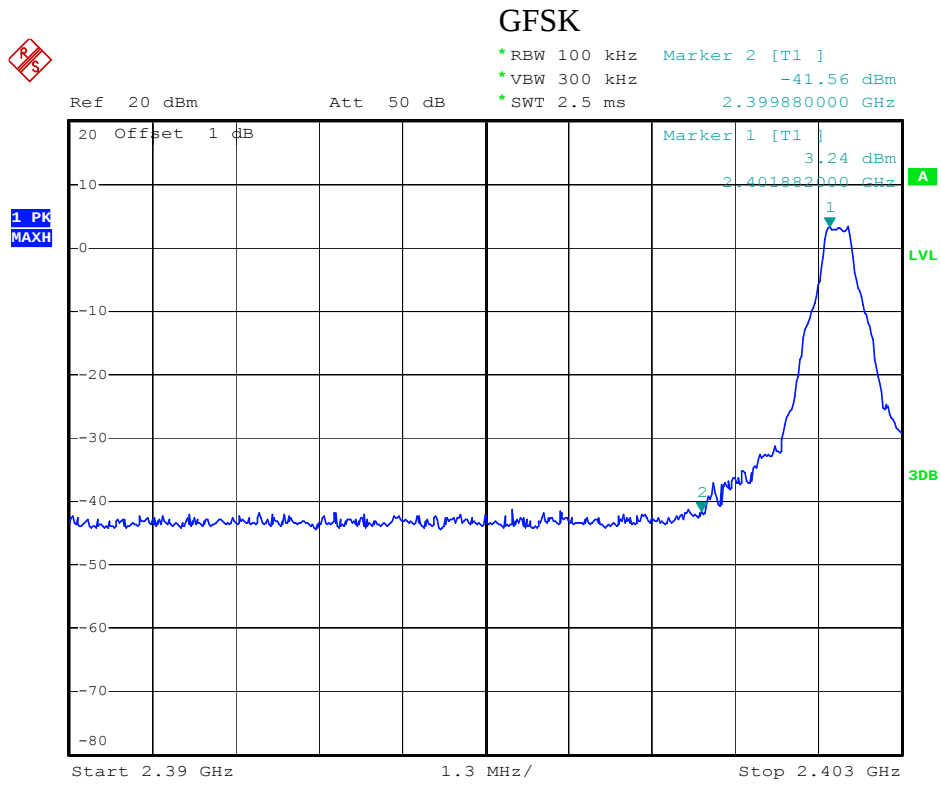

$\Pi/4$ -DQPSK Mode

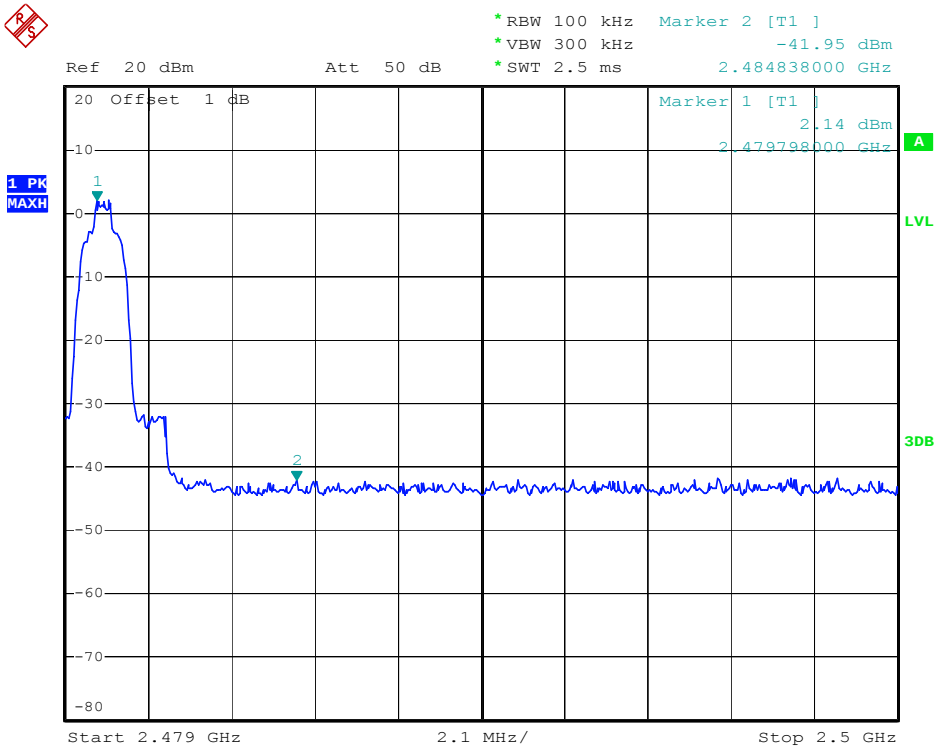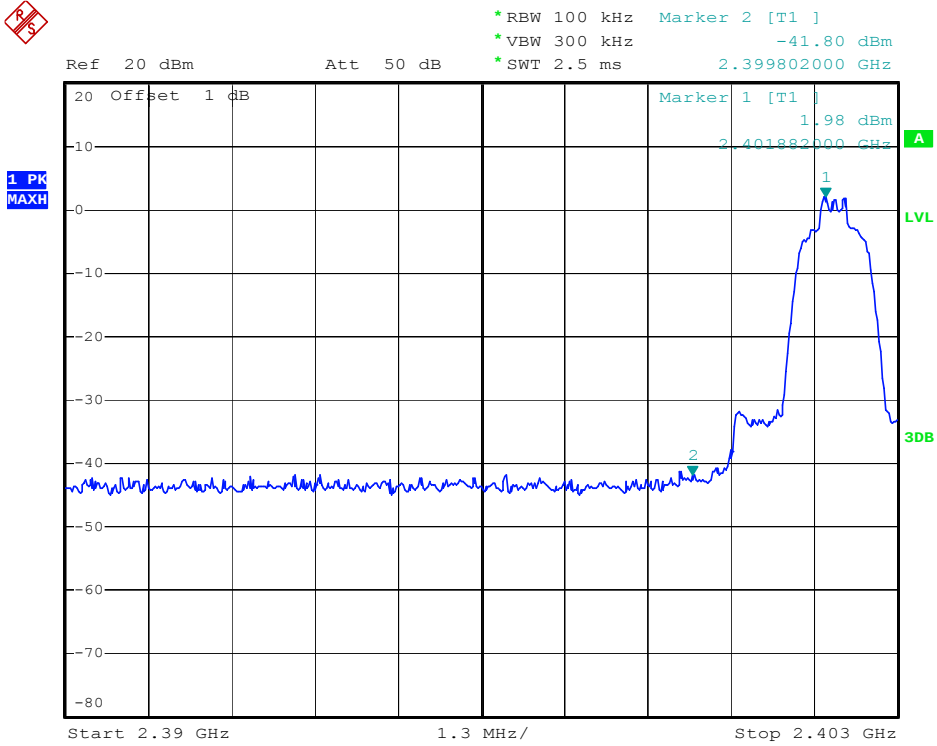

8DPSK

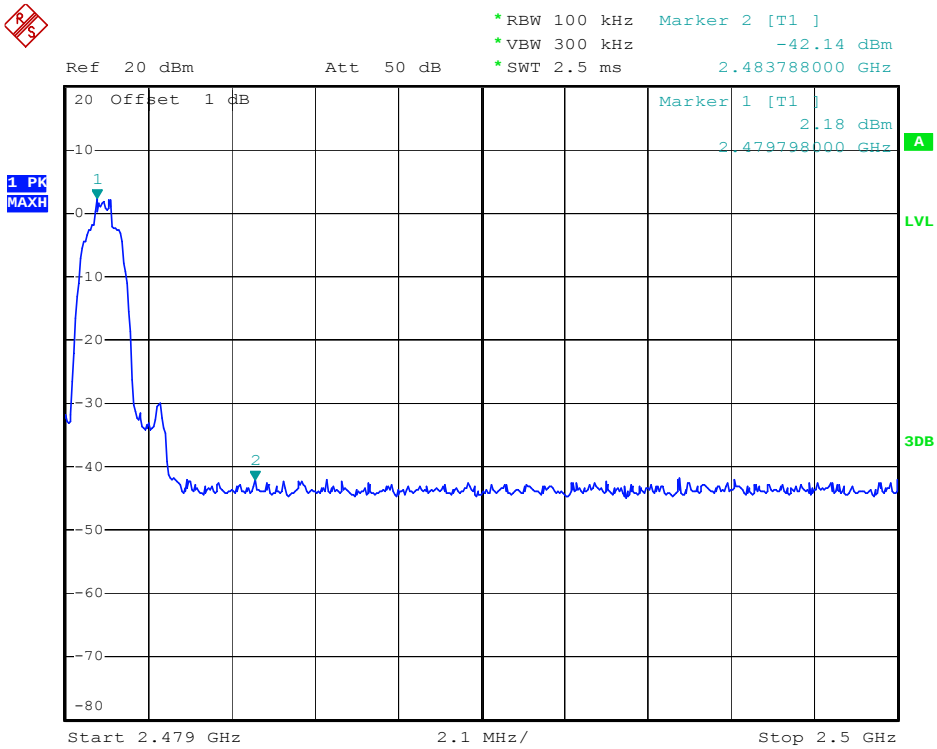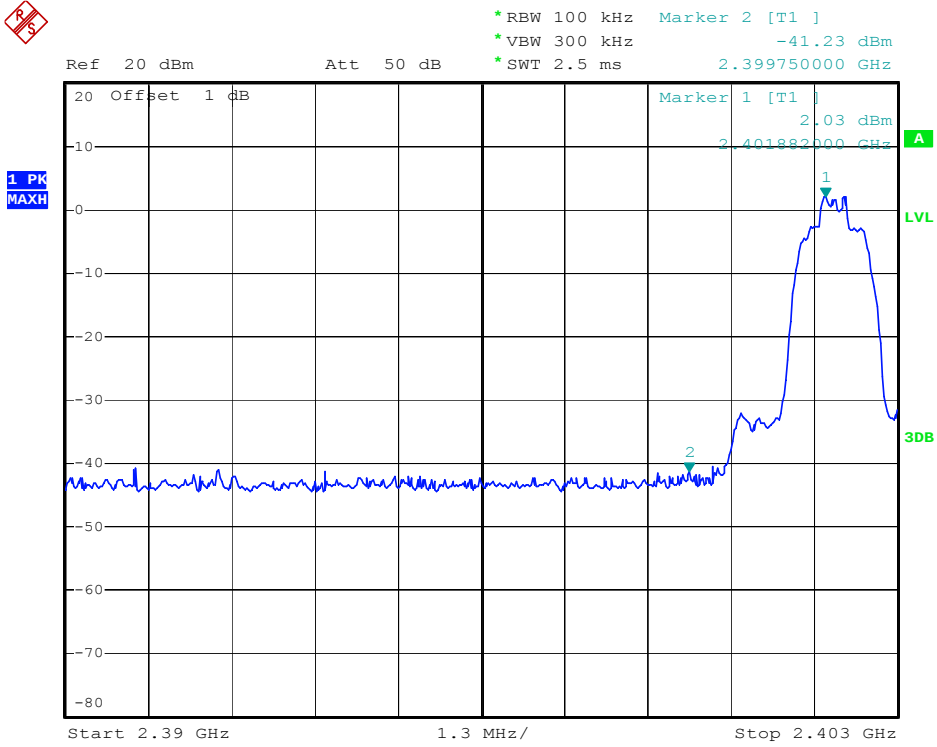

Radiated Band Edge Result

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

3. Display the measurement of peak values.



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4937

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2402MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 2013-10-23

Time: 16:13:29

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

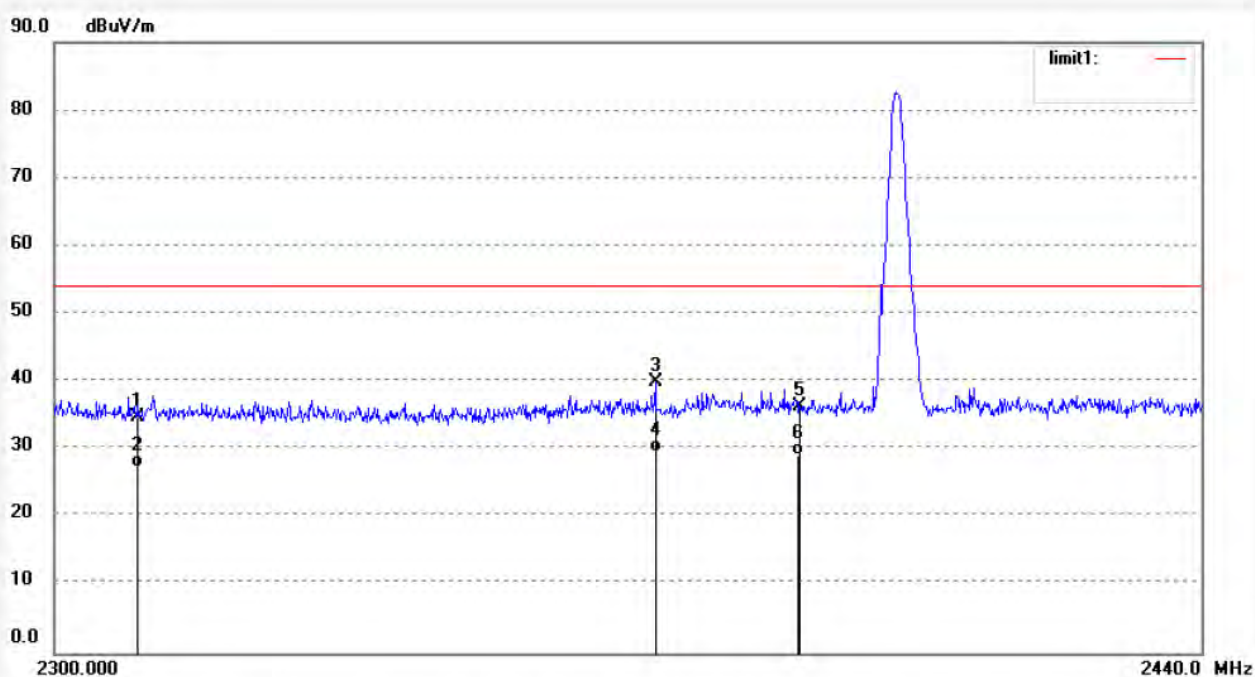

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	42.62	-7.81	34.81	54.00	-19.19	peak			
2	2310.000	35.20	-7.81	27.39	54.00	-26.61	AVG			
3	2372.335	47.49	-7.64	39.85	54.00	-14.15	peak			
4	2372.335	37.26	-7.64	29.62	54.00	-24.38	AVG			
5	2390.000	43.94	-7.53	36.41	54.00	-17.59	peak			
6	2390.000	36.58	-7.53	29.05	54.00	-24.95	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4938
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 45 %
EUT: Dock It Pro
Mode: TX 2402MHz(GFSK)
Model: DOCPRO-1301-US
Manufacturer: Doking

Polarization: Vertical
Power Source: DC 5V
Date: 2013-10-23
Time: 16:15:12
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20132111

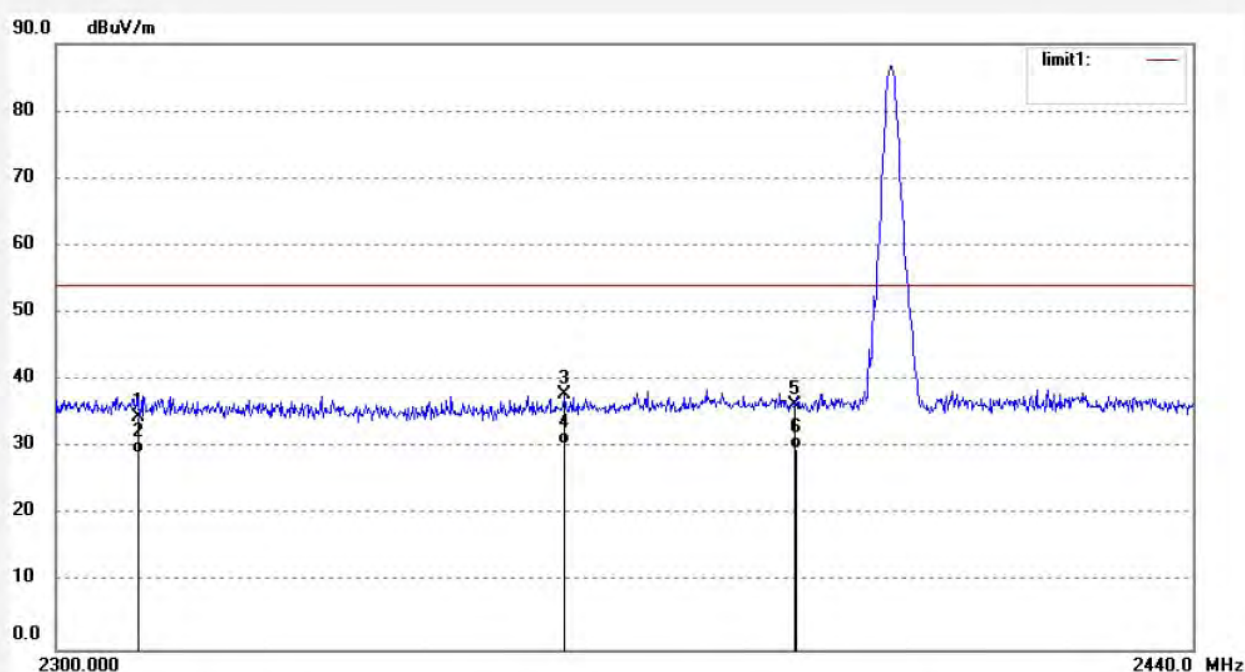

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	42.41	-7.81	34.60	54.00	-19.40	peak			
2	2310.000	36.90	-7.81	29.09	54.00	-24.91	AVG			
3	2361.684	45.71	-7.71	38.00	54.00	-16.00	peak			
4	2361.684	38.30	-7.71	30.59	54.00	-23.41	AVG			
5	2390.000	43.94	-7.53	36.41	54.00	-17.59	peak			
6	2390.000	37.25	-7.53	29.72	54.00	-24.28	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4940

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2480MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 2013-10-23

Time: 16:17:56

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

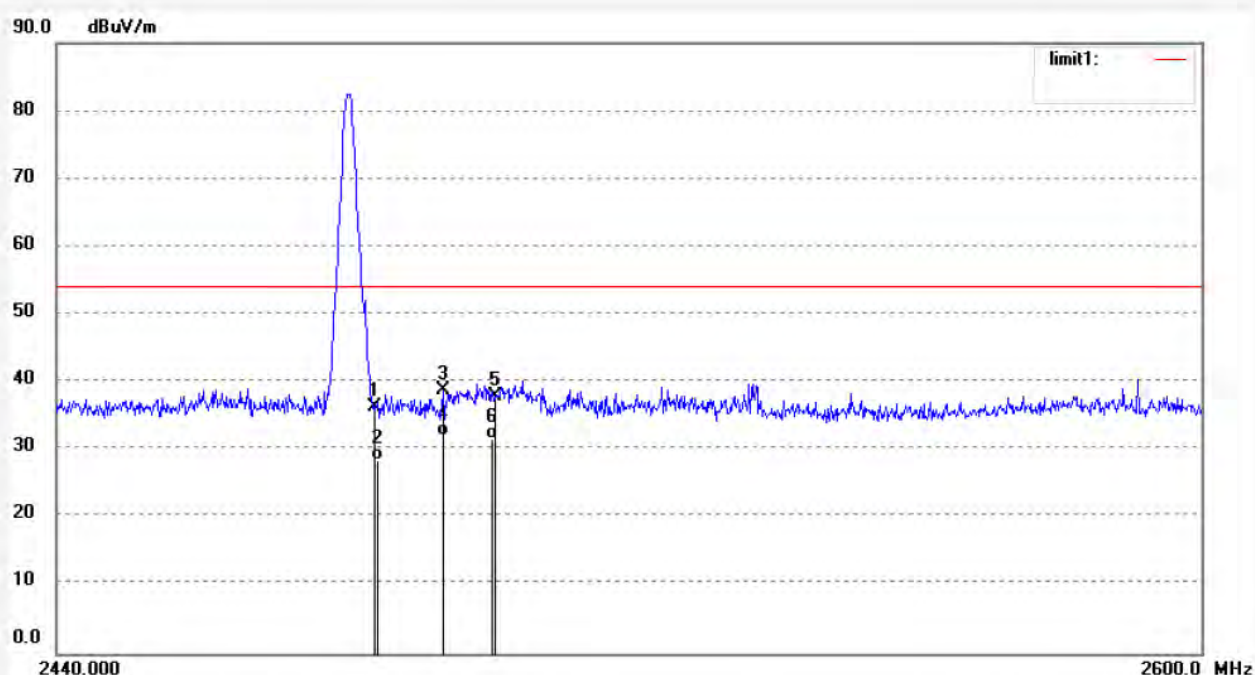

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	43.61	-7.37	36.24	54.00	-17.76	peak			
2	2483.500	35.83	-7.37	28.46	54.00	-25.54	AVG			
3	2492.896	46.26	-7.39	38.87	54.00	-15.13	peak			
4	2492.896	39.36	-7.39	31.97	54.00	-22.03	AVG			
5	2500.000	45.41	-7.40	38.01	54.00	-15.99	peak			
6	2500.000	38.94	-7.40	31.54	54.00	-22.46	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4941

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2480MHz(GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 2013-10-23

Time: 16:21:05

Engineer Signature:

Distance: 3m

Note: Report No.: ATE20132111

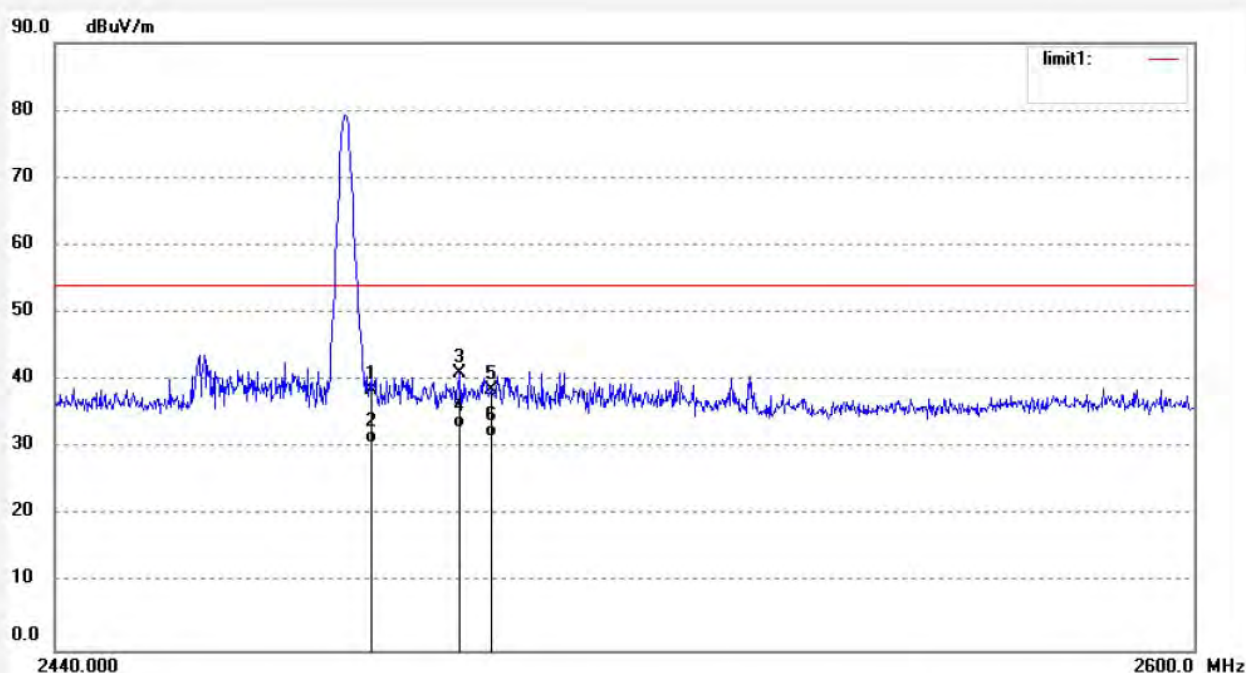

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	46.04	-7.37	38.67	54.00	-15.33	peak			
2	2483.500	38.05	-7.37	30.68	54.00	-23.32	AVG			
3	2495.753	48.53	-7.39	41.14	54.00	-12.86	peak			
4	2495.753	40.30	-7.39	32.91	54.00	-21.09	AVG			
5	2500.000	46.03	-7.40	38.63	54.00	-15.37	peak			
6	2500.000	39.11	-7.40	31.71	54.00	-22.29	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4944

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2402MHz(PI/4 DQPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 2013-10-23

Time: 16:25:52

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

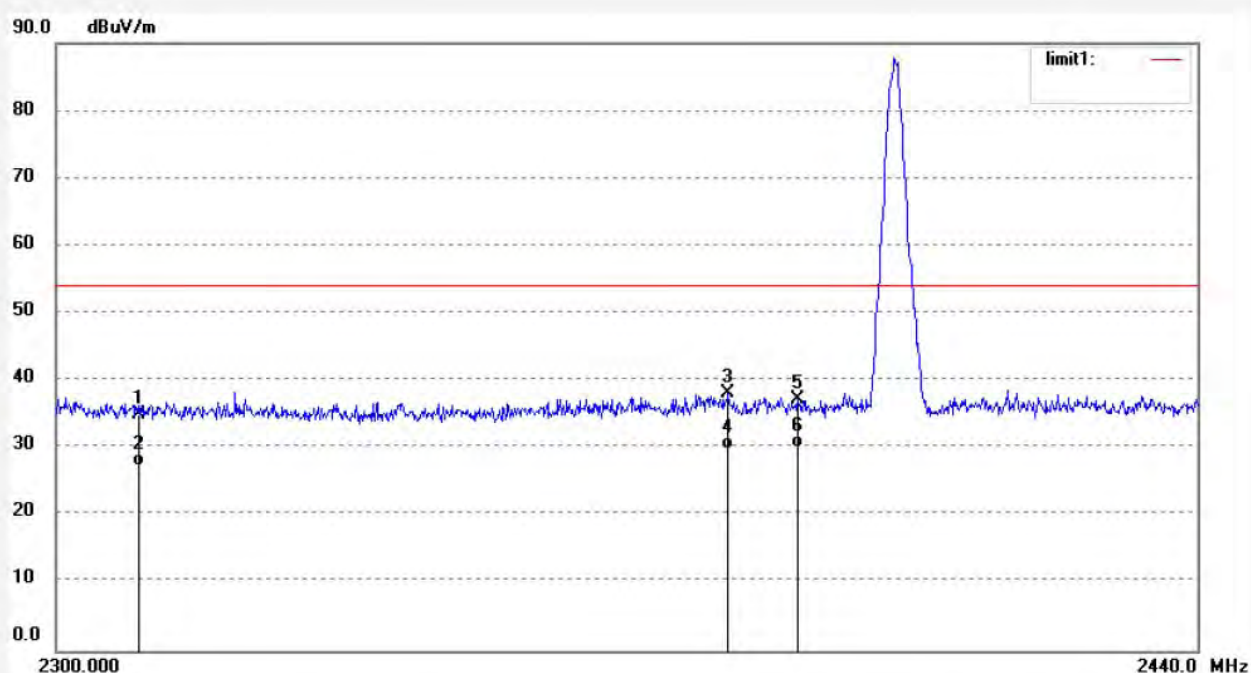

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	42.85	-7.81	35.04	54.00	-18.96	peak			
2	2310.000	35.26	-7.81	27.45	54.00	-26.55	AVG			
3	2381.482	45.77	-7.58	38.19	54.00	-15.81	peak			
4	2381.482	37.30	-7.58	29.72	54.00	-24.28	AVG			
5	2390.000	44.73	-7.53	37.20	54.00	-16.80	peak			
6	2390.000	37.64	-7.53	30.11	54.00	-23.89	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4945

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2402MHz(PI/4 DQPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 2013-10-23

Time: 16:27:11

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

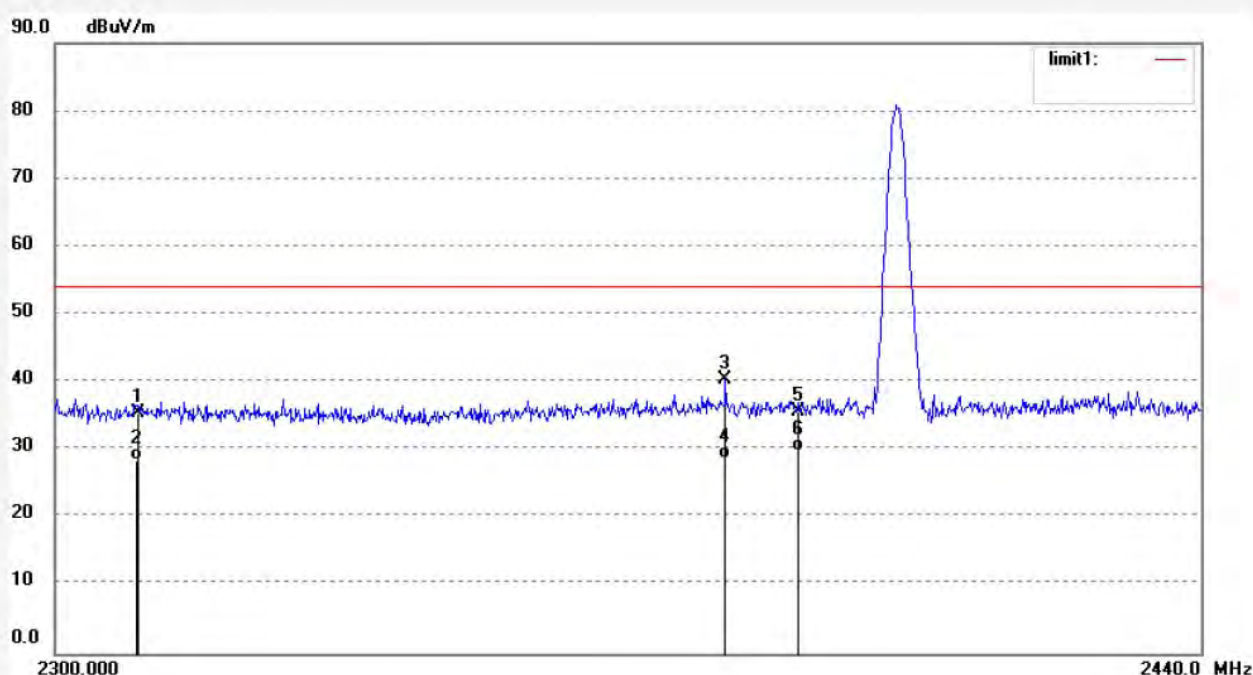

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	43.34	-7.81	35.53	54.00	-18.47	peak			
2	2310.000	36.20	-7.81	28.39	54.00	-25.61	AVG			
3	2380.918	47.94	-7.59	40.35	54.00	-13.65	peak			
4	2380.918	36.21	-7.59	28.62	54.00	-25.38	AVG			
5	2390.000	43.28	-7.53	35.75	54.00	-18.25	peak			
6	2390.000	37.33	-7.53	29.80	54.00	-24.20	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4943

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2480MHz(PI/4 DQPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 2013-10-23

Time: 16:24:19

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

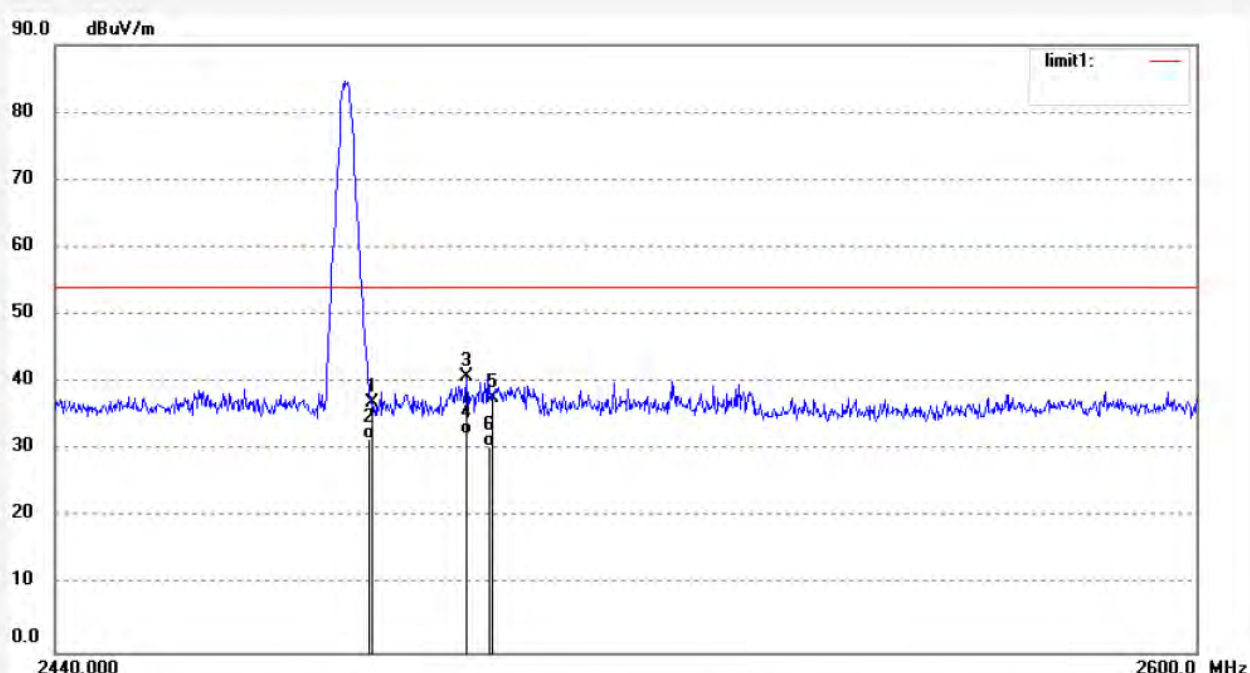

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.32	-7.37	36.95	54.00	-17.05	peak			
2	2483.500	38.99	-7.37	31.62	54.00	-22.38	AVG			
3	2496.547	48.23	-7.40	40.83	54.00	-13.17	peak			
4	2496.547	39.60	-7.40	32.20	54.00	-21.80	AVG			
5	2500.000	45.12	-7.40	37.72	54.00	-16.28	peak			
6	2500.000	37.82	-7.40	30.42	54.00	-23.58	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4942
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 45 %
EUT: Dock It Pro
Mode: TX 2480MHz(PI/4 DQPSK)
Model: DOCPRO-1301-US
Manufacturer: Doking

Polarization: Horizontal
Power Source: DC 5V
Date: 2013-10-23
Time: 16:23:06
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20132111

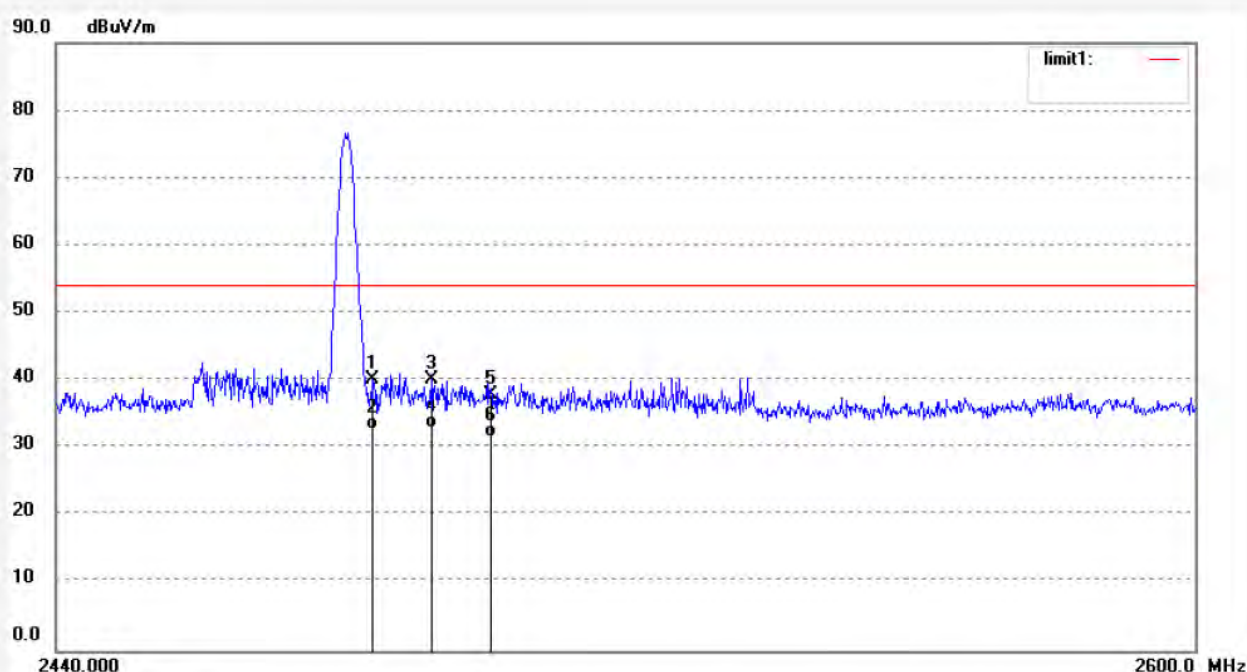

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	47.53	-7.37	40.16	54.00	-13.84	peak			
2	2483.500	40.02	-7.37	32.65	54.00	-21.35	AVG			
3	2491.627	47.45	-7.39	40.06	54.00	-13.94	peak			
4	2491.627	40.30	-7.39	32.91	54.00	-21.09	AVG			
5	2500.000	45.40	-7.40	38.00	54.00	-16.00	peak			
6	2500.000	38.95	-7.40	31.55	54.00	-22.45	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #4946

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2402MHz(8DPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 2013-10-23

Time: 16:28:47

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

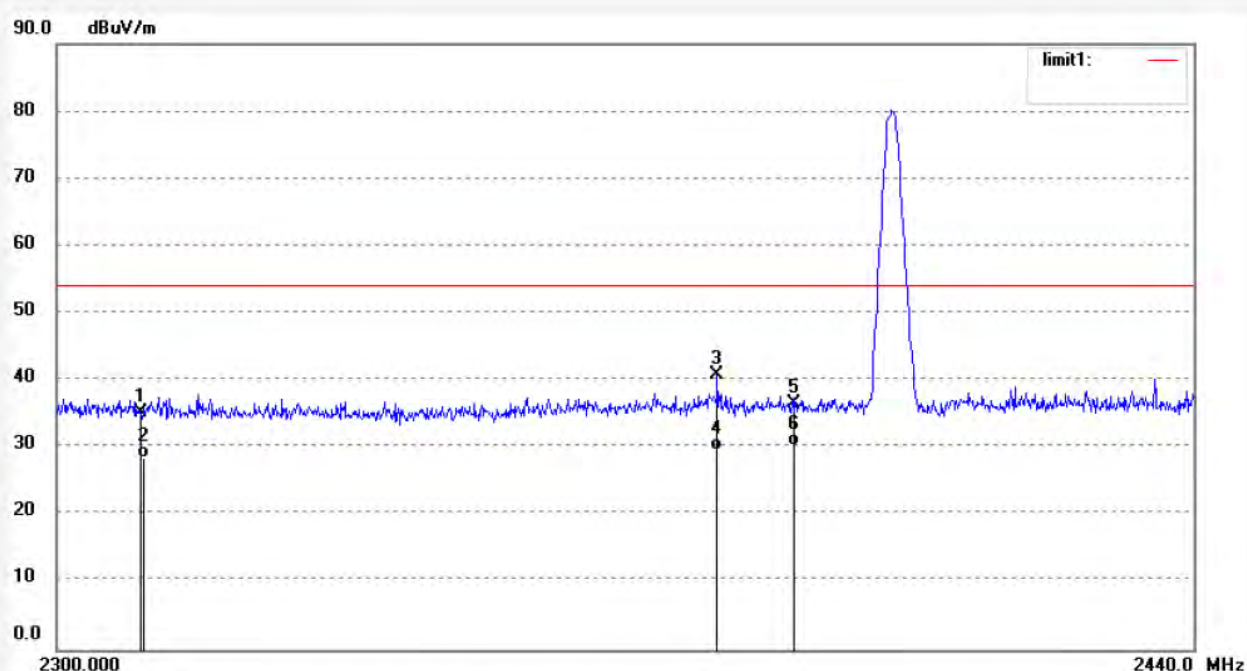

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	43.09	-7.81	35.28	54.00	-18.72	peak			
2	2310.000	36.33	-7.81	28.52	54.00	-25.48	AVG			
3	2380.354	48.35	-7.59	40.76	54.00	-13.24	peak			
4	2380.354	37.20	-7.59	29.61	54.00	-24.39	AVG			
5	2390.000	44.03	-7.53	36.50	54.00	-17.50	peak			
6	2390.000	37.85	-7.53	30.32	54.00	-23.68	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4947

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2402MHz(8DPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 2013-10-23

Time: 16:30:14

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

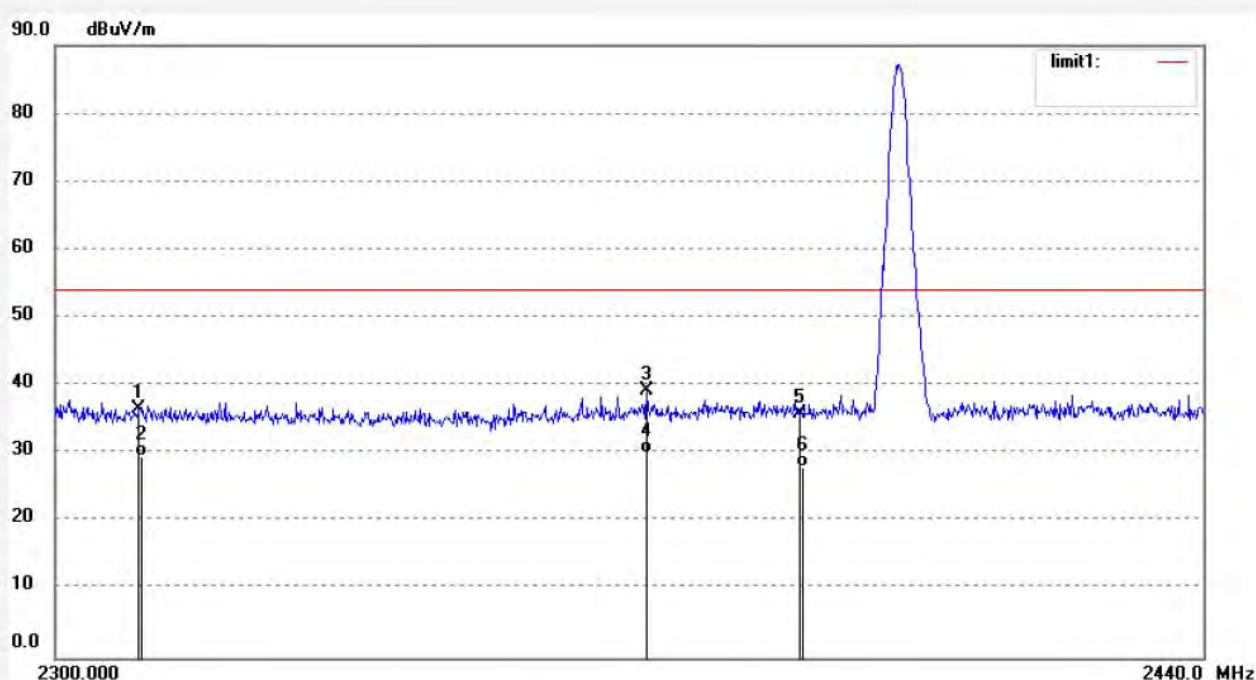

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.42	-7.81	36.61	54.00	-17.39	peak			
2	2310.000	37.41	-7.81	29.60	54.00	-24.40	AVG			
3	2371.071	46.90	-7.66	39.24	54.00	-14.76	peak			
4	2371.071	37.80	-7.66	30.14	54.00	-23.86	AVG			
5	2390.000	43.38	-7.53	35.85	54.00	-18.15	peak			
6	2390.000	35.64	-7.53	28.11	54.00	-25.89	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4948

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2480MHz(8DPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 2013-10-23

Time: 16:31:50

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

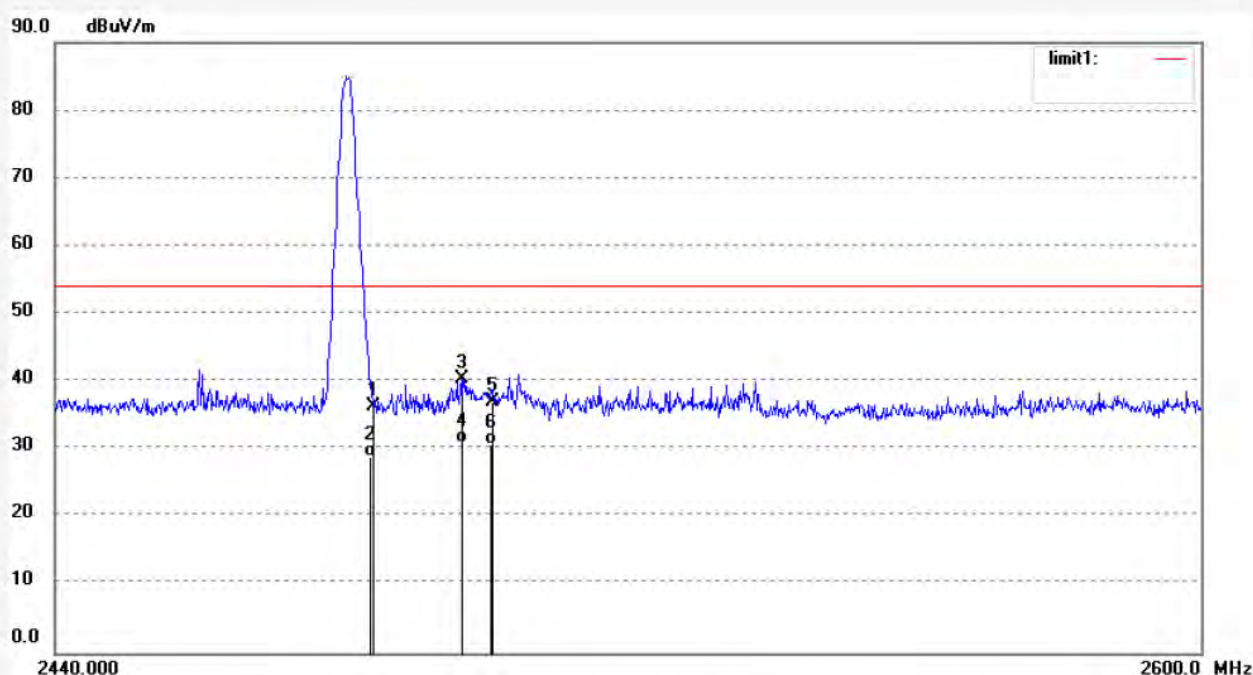

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	43.72	-7.37	36.35	54.00	-17.65	peak			
2	2483.500	36.25	-7.37	28.88	54.00	-25.12	AVG			
3	2495.594	47.82	-7.39	40.43	54.00	-13.57	peak			
4	2495.594	38.43	-7.39	31.04	54.00	-22.96	AVG			
5	2500.000	44.50	-7.40	37.10	54.00	-16.90	peak			
6	2500.000	38.20	-7.40	30.80	54.00	-23.20	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #4949

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 45 %

EUT: Dock It Pro

Mode: TX 2480MHz(8DPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 2013-10-23

Time: 16:33:08

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

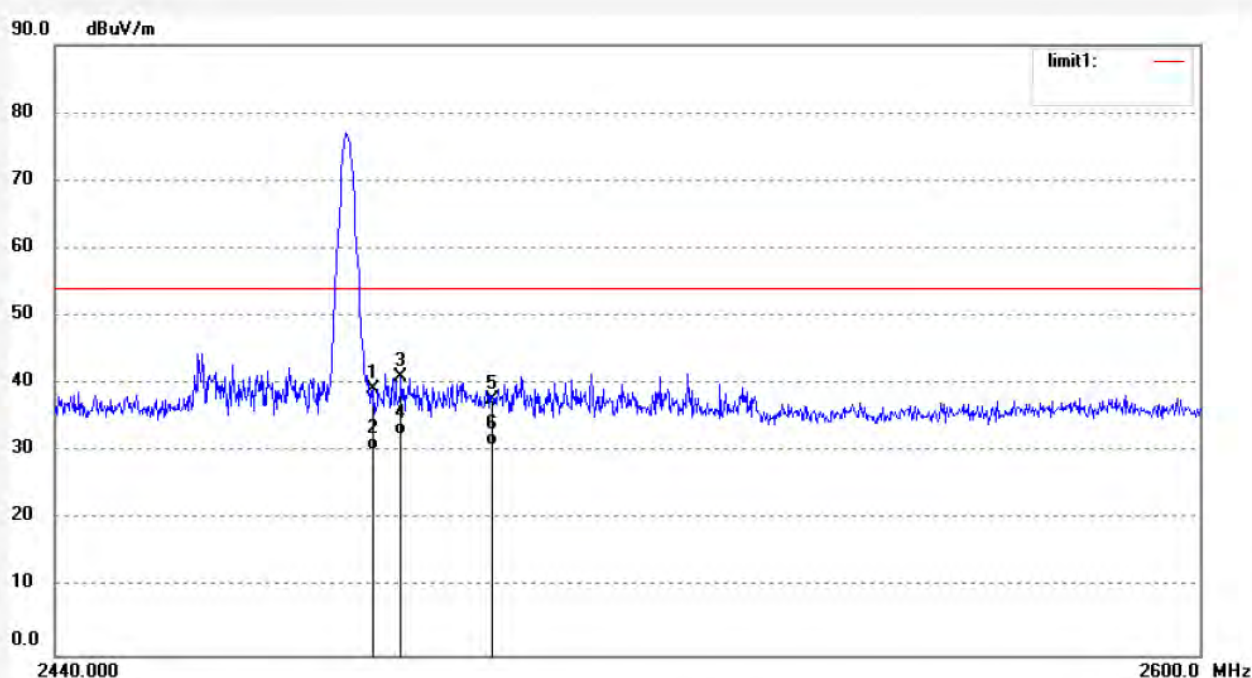

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	46.61	-7.37	39.24	54.00	-14.76	peak			
2	2483.500	37.64	-7.37	30.27	54.00	-23.73	AVG			
3	2487.349	48.46	-7.38	41.08	54.00	-12.92	peak			
4	2487.349	40.00	-7.38	32.62	54.00	-21.38	AVG			
5	2500.000	45.18	-7.40	37.78	54.00	-16.22	peak			
6	2500.000	38.40	-7.40	31.00	54.00	-23.00	AVG			

Hopping mode



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3027

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Dock It Pro

Mode: HOPPING (GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 13/10/24/

Time: 11/22/51

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

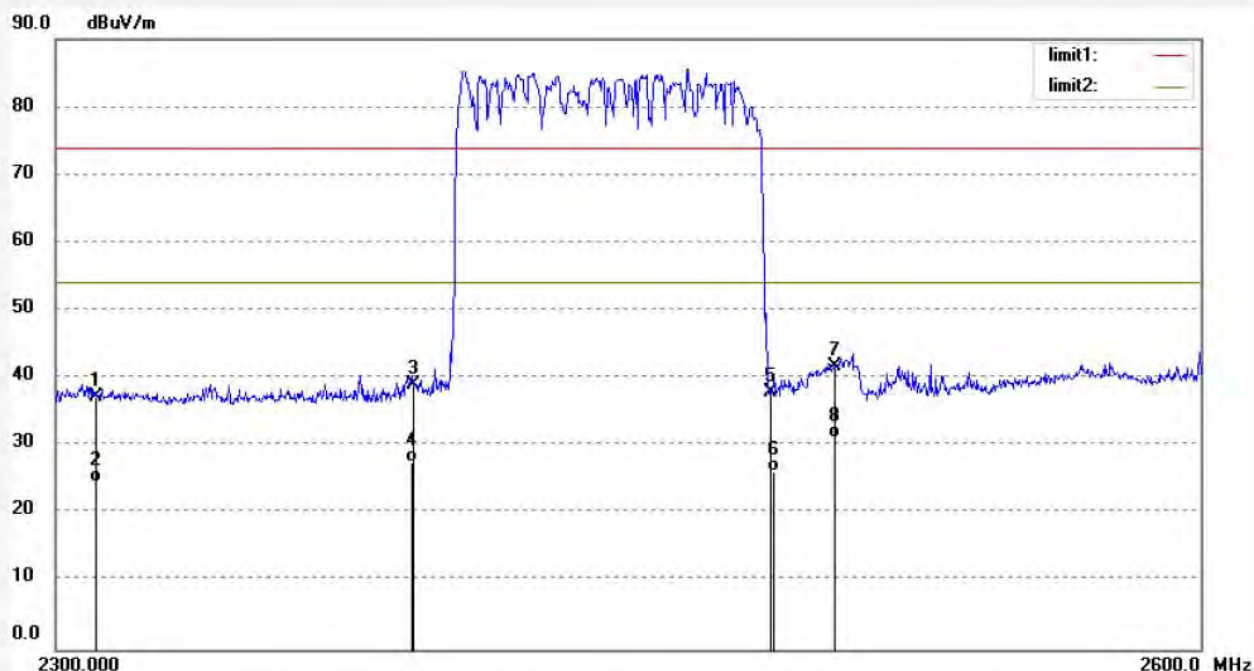

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.18	-6.99	37.19	74.00	-36.81	peak			
2	2310.000	31.58	-6.99	24.59	54.00	-29.41	AVG			
3	2390.000	45.89	-6.78	39.11	74.00	-34.89	peak			
4	2390.000	34.25	-6.78	27.47	54.00	-26.53	AVG			
5	2483.500	44.36	-6.54	37.82	74.00	-36.18	peak			
6	2483.500	32.69	-6.54	26.15	54.00	-27.85	AVG			
7	2500.000	48.29	-6.50	41.79	74.00	-32.21	peak			
8	2500.000	37.66	-6.50	31.16	54.00	-22.84	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3028

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Dock It Pro

Mode: HOPPING (GFSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/24/

Time: 11/25/42

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

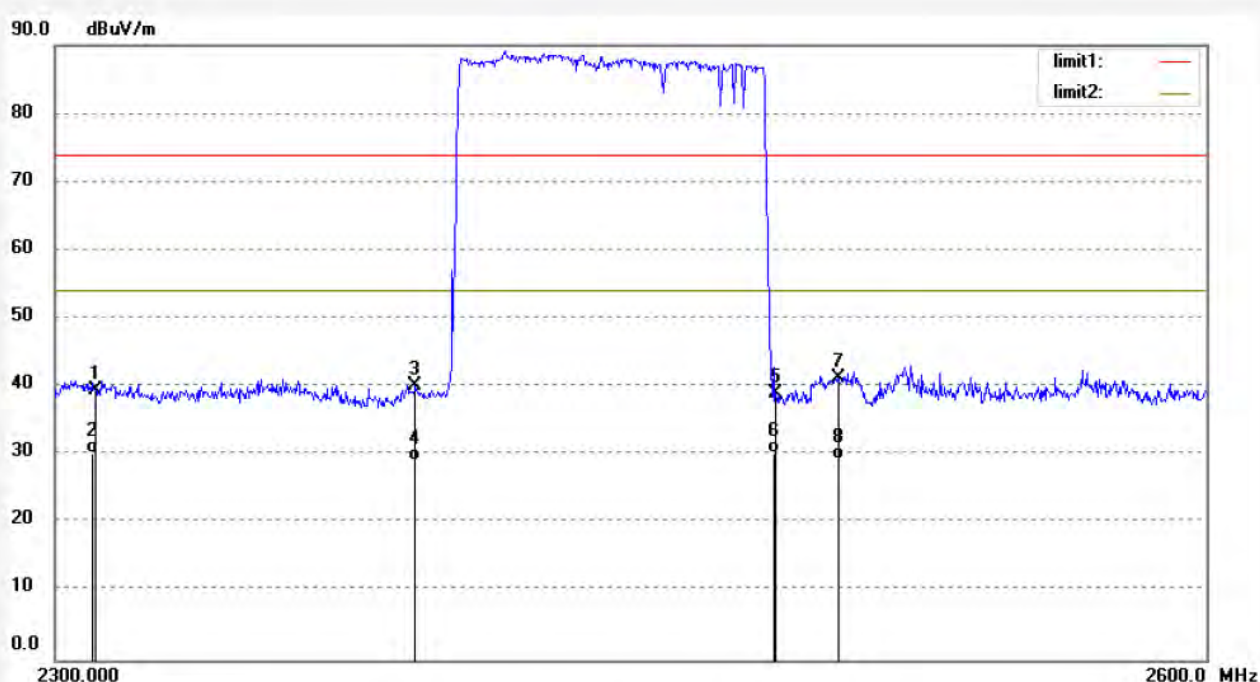

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.43	-6.99	39.44	74.00	-34.56	peak			
2	2310.000	37.25	-6.99	30.26	54.00	-23.74	AVG			
3	2390.000	46.86	-6.78	40.08	74.00	-33.92	peak			
4	2390.000	35.86	-6.78	29.08	54.00	-24.92	AVG			
5	2483.500	45.50	-6.54	38.96	74.00	-35.04	peak			
6	2483.500	36.87	-6.54	30.33	54.00	-23.67	AVG			
7	2500.000	47.78	-6.50	41.28	74.00	-32.72	peak			
8	2500.000	35.88	-6.50	29.38	54.00	-24.62	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3029

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Dock It Pro

Mode: HOPPING (PI/4DQPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/24/

Time: 11/28/17

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

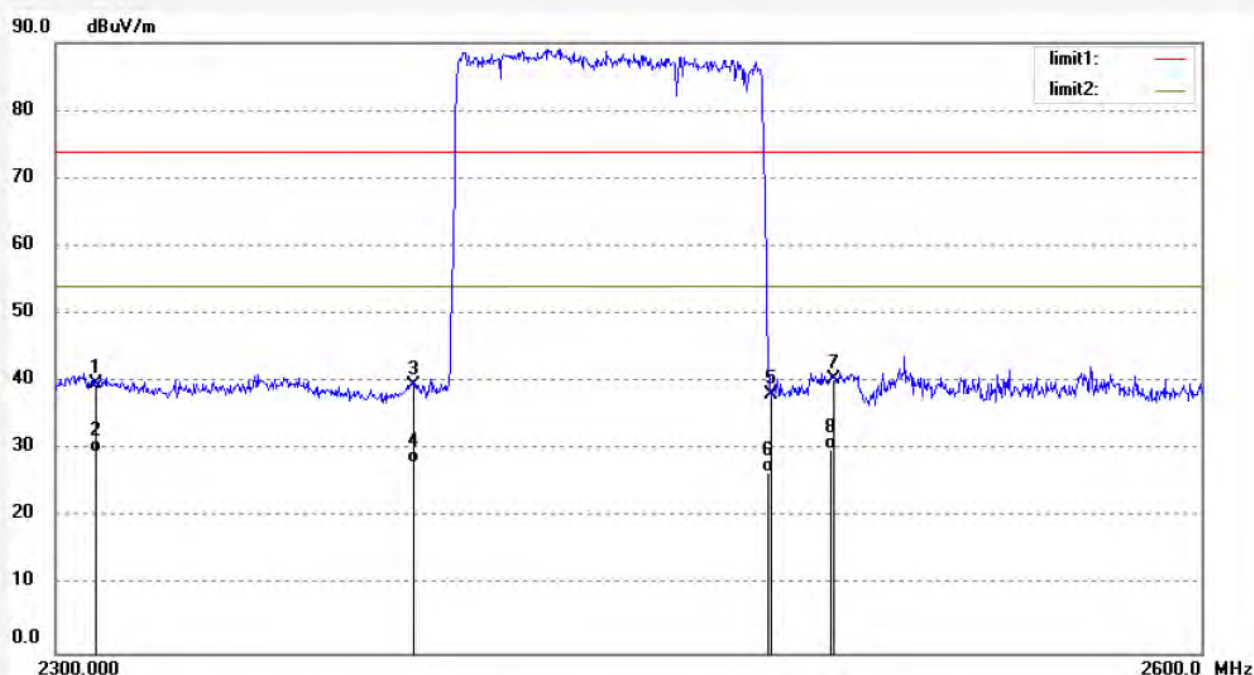

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.75	-6.99	39.76	74.00	-34.24	peak			
2	2310.000	36.55	-6.99	29.56	54.00	-24.44	AVG			
3	2390.000	46.28	-6.78	39.50	74.00	-34.50	peak			
4	2390.000	34.89	-6.78	28.11	54.00	-25.89	AVG			
5	2483.500	44.59	-6.54	38.05	74.00	-35.95	peak			
6	2483.500	33.24	-6.54	26.70	54.00	-27.30	AVG			
7	2500.000	46.93	-6.50	40.43	74.00	-33.57	peak			
8	2500.000	36.43	-6.50	29.93	54.00	-24.07	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3030

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Dock It Pro

Mode: HOPPING (PI/4DQPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 13/10/24/

Time: 11/31/16

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

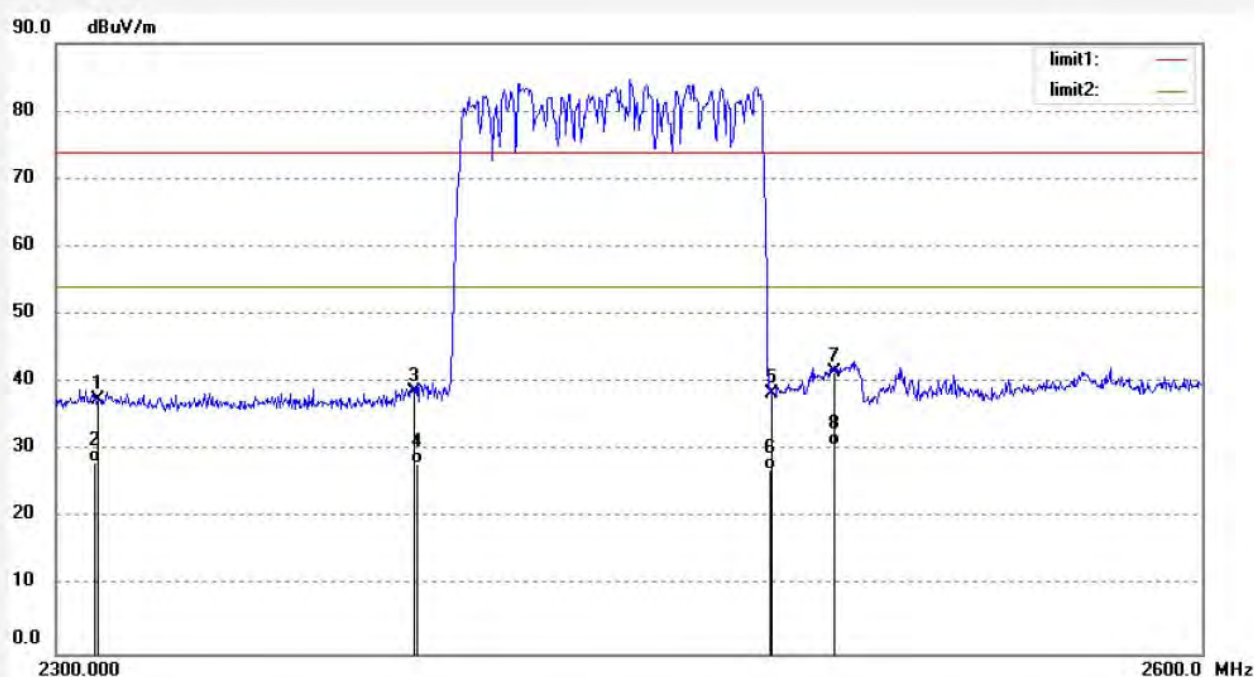

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.36	-6.99	37.37	74.00	-36.63	peak			
2	2310.000	35.24	-6.99	28.25	54.00	-25.75	AVG			
3	2390.000	45.45	-6.78	38.67	74.00	-35.33	peak			
4	2390.000	34.80	-6.78	28.02	54.00	-25.98	AVG			
5	2483.500	44.82	-6.54	38.28	74.00	-35.72	peak			
6	2483.500	33.58	-6.54	27.04	54.00	-26.96	AVG			
7	2500.000	48.09	-6.50	41.59	74.00	-32.41	peak			
8	2500.000	37.32	-6.50	30.82	54.00	-23.18	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR #3031

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Dock It Pro

Mode: HOPPING (8DPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Horizontal

Power Source: DC 5V


Date: 13/10/24/

Time: 11/36/34

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

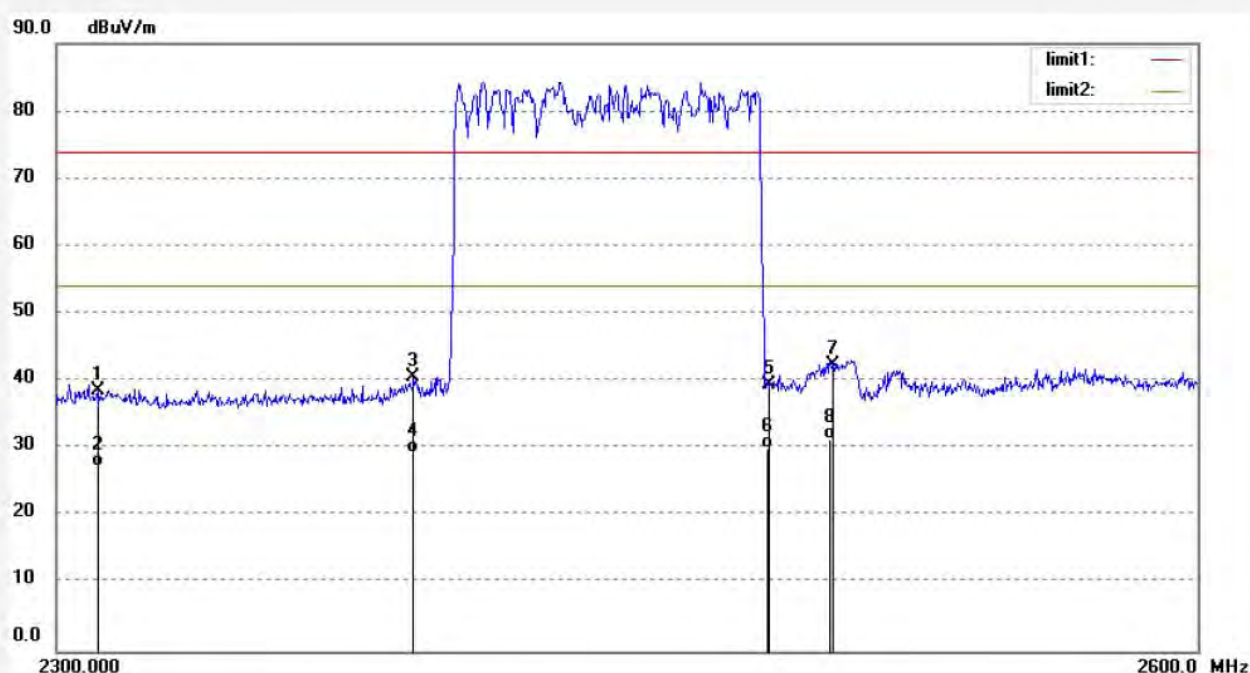

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	45.68	-6.99	38.69	74.00	-35.31	peak			
2	2310.000	34.29	-6.99	27.30	54.00	-26.70	AVG			
3	2390.000	47.42	-6.78	40.64	74.00	-33.36	peak			
4	2390.000	36.10	-6.78	29.32	54.00	-24.68	AVG			
5	2483.500	45.92	-6.54	39.38	74.00	-34.62	peak			
6	2483.500	36.61	-6.54	30.07	54.00	-23.93	AVG			
7	2500.000	48.96	-6.50	42.46	74.00	-31.54	peak			
8	2500.000	37.88	-6.50	31.38	54.00	-22.62	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #3032

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Dock It Pro

Mode: HOPPING (8DPSK)

Model: DOCPRO-1301-US

Manufacturer: Doking

Polarization: Vertical

Power Source: DC 5V


Date: 13/10/24/

Time: 11/39/37

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132111

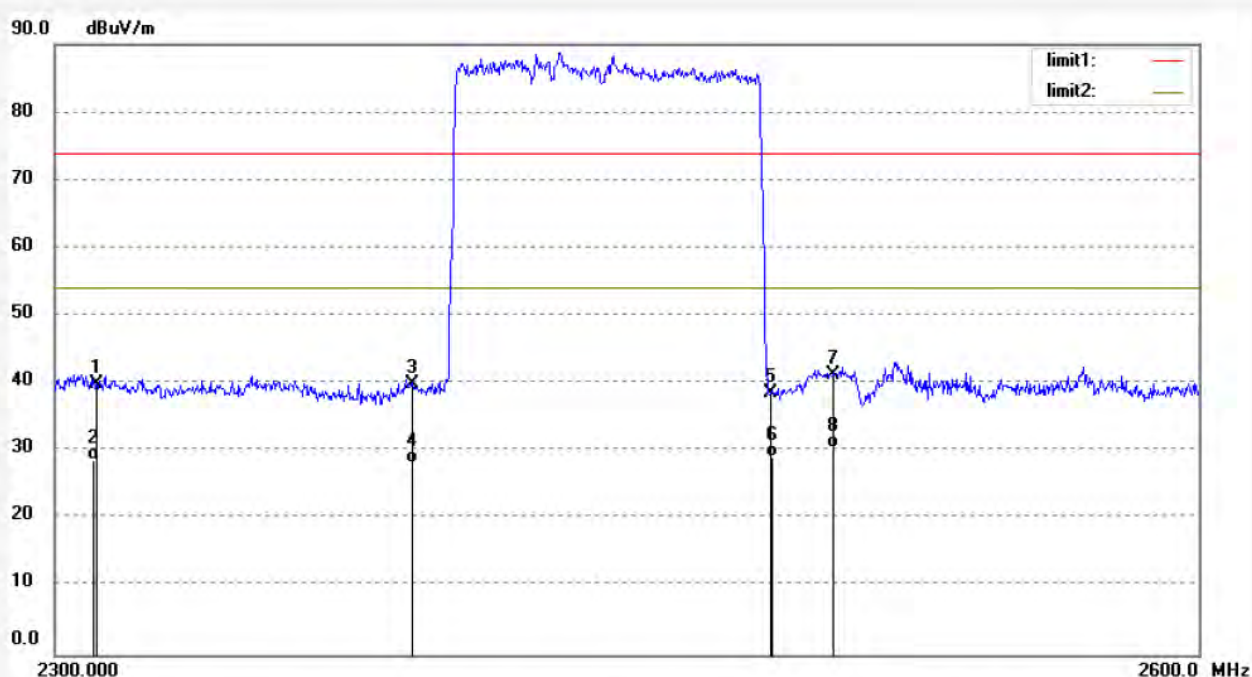


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	46.88	-6.99	39.89	74.00	-34.11	peak			
2	2310.000	35.60	-6.99	28.61	54.00	-25.39	AVG			
3	2390.000	46.74	-6.78	39.96	74.00	-34.04	peak			
4	2390.000	35.10	-6.78	28.32	54.00	-25.68	AVG			
5	2483.500	45.21	-6.54	38.67	74.00	-35.33	peak			
6	2483.500	35.66	-6.54	29.12	54.00	-24.88	AVG			
7	2500.000	47.76	-6.50	41.26	74.00	-32.74	peak			
8	2500.000	36.91	-6.50	30.41	54.00	-23.59	AVG			

12.AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)

12.1.Block Diagram of Test Setup

12.1.1.Block diagram of connection between the EUT and simulators

12.1.2.Shielding Room Test Setup Diagram

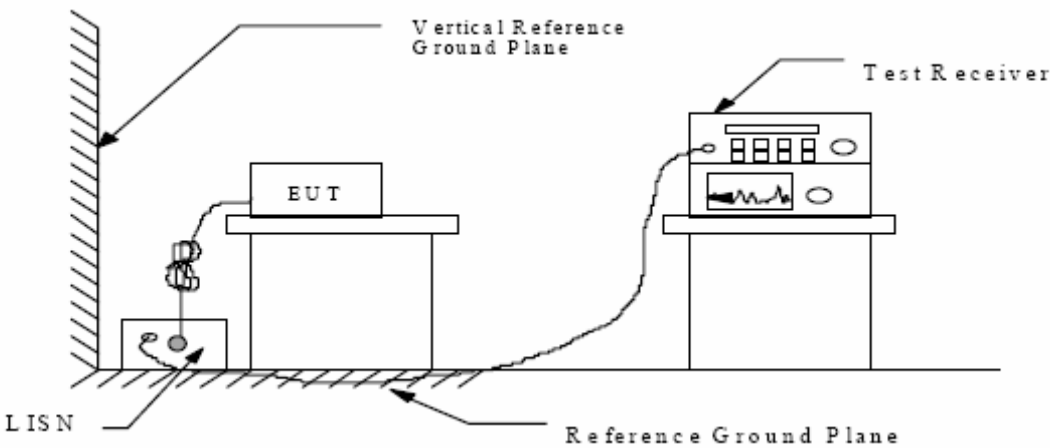

(EUT: Dock It Pro)

12.2.The Emission Limit

12.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

12.3.Configuration of EUT on Measurement

The equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

12.4.Operating Condition of EUT

12.4.1.Setup the EUT and simulator as shown as Section 11.1.

12.4.2.Turn on the power of all equipment.

12.4.3.Let the EUT work in TX (Operation) mode measure it.

12.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4- 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

The frequency range from 150 kHz to 30MHz is checked.


12.6.Power Line Conducted Emission Measurement Results

ACCURATE TECHNOLOGY CO., LTD**CONDUCTED EMISSION STANDARD FCC PART15 B**

EUT: Dock It Pro M/N:DOCPRO-1301-US
 Manufacturer: Doking
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Ricky
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20132111
 Start of Test: 10/27/2013 / 12:02:54AM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

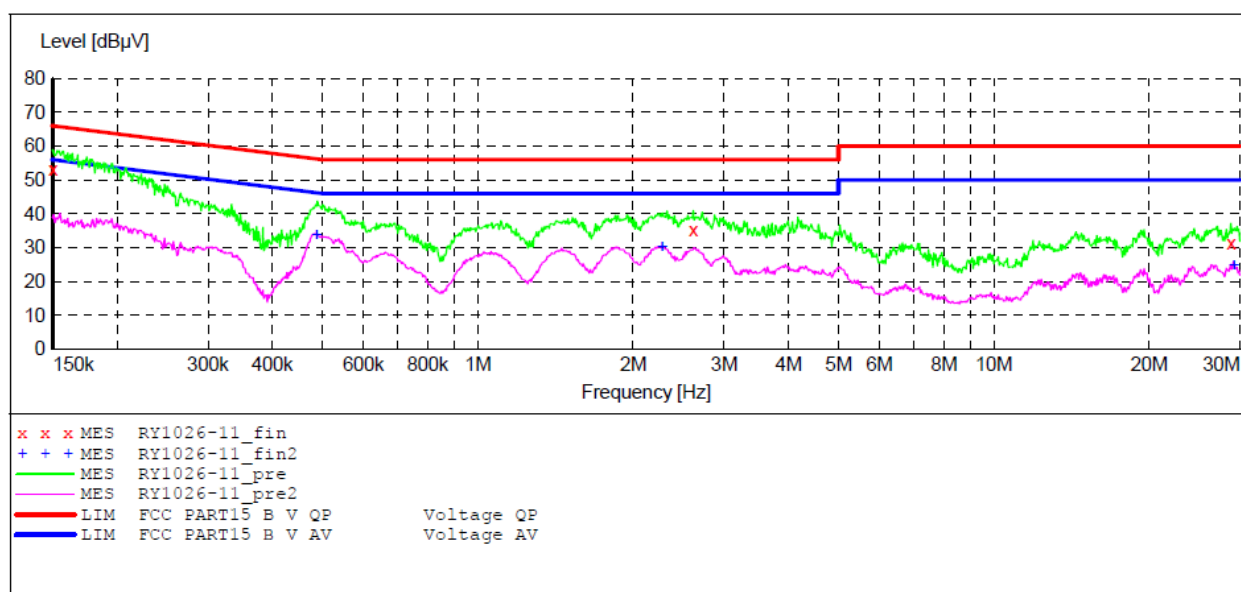**MEASUREMENT RESULT: "RY1026-11_fin"**

10/27/2013 12:05AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	53.30	10.5	66	12.7	QP	L1	GND
2.614747	35.40	11.0	56	20.6	QP	L1	GND
28.799903	31.20	11.5	60	28.8	QP	L1	GND

MEASUREMENT RESULT: "RY1026-11_fin2"

10/27/2013 12:05AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.487008	33.80	10.7	46	12.4	AV	L1	GND
2.273786	30.10	11.0	46	15.9	AV	L1	GND
29.146886	24.60	11.5	50	25.4	AV	L1	GND

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART15 B**

EUT: Dock It Pro M/N:DOCPRO-1301-US
 Manufacturer: Doking
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Ricky
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20132111
 Start of Test: 10/27/2013 / 12:05:45AM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

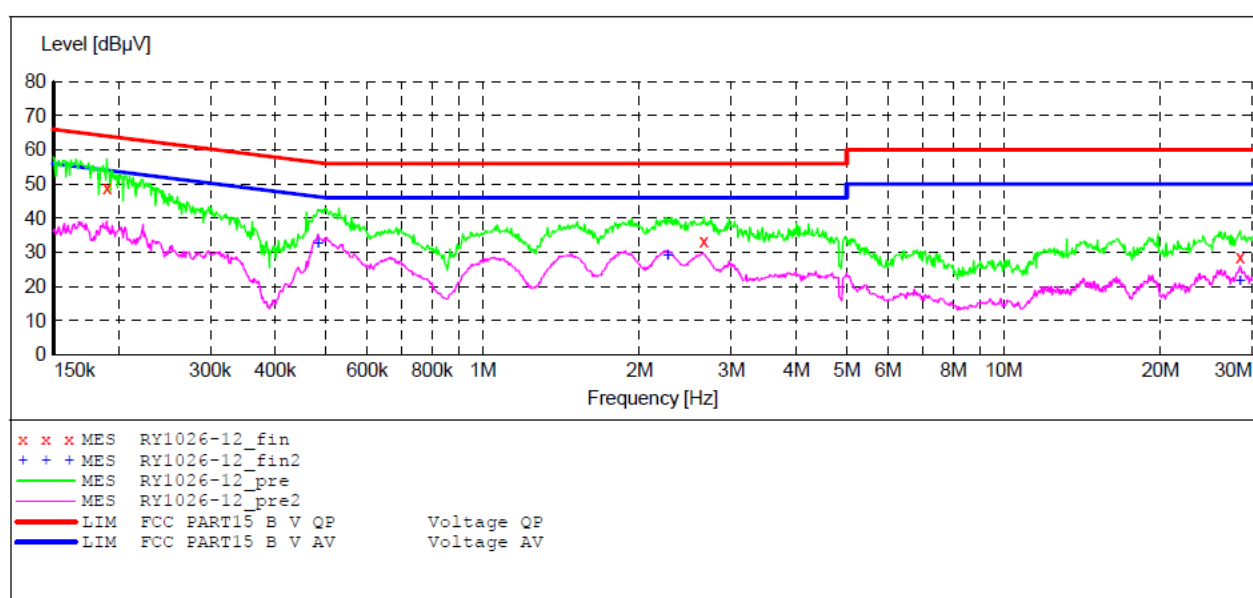**MEASUREMENT RESULT: "RY1026-12_fin"**

10/27/2013 12:08AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.189837	48.70	10.5	64	15.3	QP	N	GND
2.656834	33.30	11.0	56	22.7	QP	N	GND
28.457051	28.70	11.5	60	31.3	QP	N	GND

MEASUREMENT RESULT: "RY1026-12_fin2"

10/27/2013 12:08AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.483136	32.50	10.7	46	13.8	AV	N	GND
2.264728	29.10	11.0	46	16.9	AV	N	GND
28.457051	25.50	11.5	50	24.5	AV	N	GND


13.ANTENNA REQUIREMENT

13.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.2.Antenna Construction

The antenna is PCB Layout antenna, no consideration of replacement. Therefore, the equipment complies with the antenna requirement of Section 15.203.

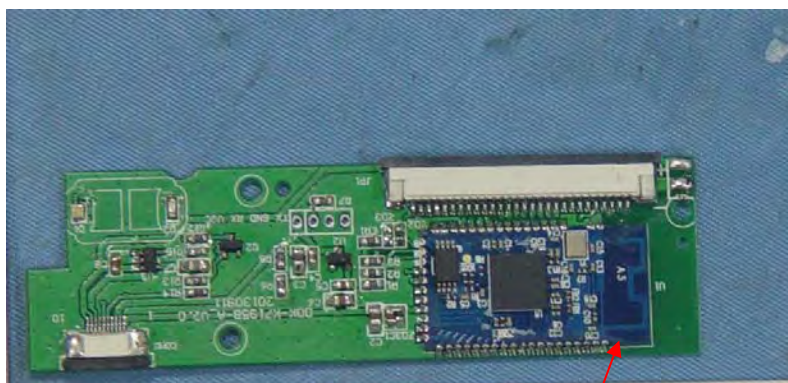

Antenna