



***Full***

# **TEST REPORT**

**No. I14D00014-RFW**

***For***

**Client : VSN Technologies Inc. d/b/a VSN Mobil**

**Production : WCDMA Dual-Mode Digital Mobile Phone**

**Model Name : V.35 / Nextel V.35**

**FCC ID: 2AA9WV1001**

**Model Number: V1001**

**Hardware Version: V01**

**Software Version: V01**

**Issued date: 2014-10-28**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

**Test Laboratory:**

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: [welcome@ecit.org.cn](mailto:welcome@ecit.org.cn)

**Revision Version**

| Report Number | Revision | Date       | Memo                            |
|---------------|----------|------------|---------------------------------|
| I14D00014-RFW | 00       | 2014-10-28 | Initial creation of test report |

**CONTENTS**

|               |                                                                      |           |
|---------------|----------------------------------------------------------------------|-----------|
| <b>1.</b>     | <b>TEST LABORATORY .....</b>                                         | <b>5</b>  |
| <b>1.1.</b>   | <b>TESTING LOCATION .....</b>                                        | <b>5</b>  |
| <b>1.2.</b>   | <b>TESTING ENVIRONMENT .....</b>                                     | <b>5</b>  |
| <b>1.3.</b>   | <b>PROJECT DATA .....</b>                                            | <b>5</b>  |
| <b>1.4.</b>   | <b>SIGNATURE .....</b>                                               | <b>5</b>  |
| <b>2.</b>     | <b>CLIENT INFORMATION .....</b>                                      | <b>6</b>  |
| <b>2.1.</b>   | <b>APPLICANT INFORMATION.....</b>                                    | <b>6</b>  |
| <b>2.2.</b>   | <b>MANUFACTURER INFORMATION .....</b>                                | <b>6</b>  |
| <b>3.</b>     | <b>EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b> | <b>7</b>  |
| <b>3.1.</b>   | <b>ABOUT EUT .....</b>                                               | <b>7</b>  |
| <b>3.2.</b>   | <b>INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....</b>      | <b>7</b>  |
| <b>3.3.</b>   | <b>INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>      | <b>7</b>  |
| <b>4.</b>     | <b>REFERENCE DOCUMENTS .....</b>                                     | <b>8</b>  |
| <b>4.1.</b>   | <b>REFERENCE DOCUMENTS FOR TESTING .....</b>                         | <b>8</b>  |
| <b>5.</b>     | <b>SUMMARY OF TEST RESULTS .....</b>                                 | <b>9</b>  |
| <b>5.1.</b>   | <b>NOTES.....</b>                                                    | <b>10</b> |
| <b>5.2.</b>   | <b>STATEMENTS.....</b>                                               | <b>11</b> |
| <b>6.</b>     | <b>TEST RESULT .....</b>                                             | <b>12</b> |
| <b>6.1.</b>   | <b>MAXIMUM OUTPUT POWER.....</b>                                     | <b>12</b> |
| <b>6.1.1.</b> | <b>MAXIMUM PEAK OUTPUT POWER-CONDUCTED.....</b>                      | <b>12</b> |
| <b>6.1.2.</b> | <b>MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED .....</b>                  | <b>13</b> |
| <b>6.2.</b>   | <b>PEAK POWER SPECTRAL DENSITY .....</b>                             | <b>14</b> |
| <b>6.3.</b>   | <b>OCCUPIED 6DB BANDWIDTH .....</b>                                  | <b>19</b> |
| <b>6.4.</b>   | <b>BAND EDGES COMPLIANCE .....</b>                                   | <b>25</b> |
| <b>6.5.</b>   | <b>TRANSMITTER SPURIOUS EMISSION-CONDUCTED .....</b>                 | <b>28</b> |

|          |                                                      |    |
|----------|------------------------------------------------------|----|
| 6.6.     | TRANSMITTER SPURIOUS EMISSION-RADIATED .....         | 39 |
| 7.       | TEST EQUIPMENTS AND ANCILLARIES USED FOR TESTS ..... | 50 |
| 8.       | TEST ENVIRONMENT .....                               | 51 |
| ANNEX A. | DEVIATIONS FROM PRESCRIBED TEST METHODS .....        | 53 |

## 1. Test Laboratory

### 1.1. Testing Location

|               |                                                                                   |
|---------------|-----------------------------------------------------------------------------------|
| Company Name: | ECIT Shanghai, East China Institute of Telecommunications                         |
| Address:      | 7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China |
| Postal Code:  | 200001                                                                            |
| Telephone:    | (+86)-021-63843300                                                                |
| Fax:          | (+86)-021-63843301                                                                |


### 1.2. Testing Environment

|                      |          |
|----------------------|----------|
| Normal Temperature:  | 15-35℃   |
| Extreme Temperature: | -10/+55℃ |
| Relative Humidity:   | 20-75%   |


### 1.3. Project data

|                     |             |
|---------------------|-------------|
| Project Leader:     | Wangyaqiong |
| Testing Start Date: | 2014-09-09  |
| Testing End Date:   | 2014-10-23  |

### 1.4. Signature

  
Wang Daming  
(Prepared this test report)

  
Liu Jianquan  
(Reviewed this test report)

  
Zheng Zhongbin  
Director of the laboratory  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: VSN Technologies Inc. d/b/a VSN Mobile  
Address: 1975 E. Sunrise Blvd. Suite 400, Fort Lauderdale FL  
Contact Person: Amit Verma  
Telephone: 954-609-4912  
Postcode: 33304

### **2.2. Manufacturer Information**

Company Name: MOBIWIRE MOBILES (NINGBO) CO.,LTD  
Address: No.999,Dacheng East Road,Fenghua City,Zhejiang  
Contact Person: Xu linzhong  
Telephone: 0574 88916450  
Postcode: 315500

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

|                         |                                      |
|-------------------------|--------------------------------------|
| EUT Description         | WCDMA Dual-Mode Digital Mobile Phone |
| Model name              | V.35 / Nextel V.35                   |
| WLAN Frequency          | 2400MHz-2483.5MHz                    |
| WLAN Channel            | Channel1-Channel11                   |
| WLAN type of modulation | 802.11b:DSSS<br>802.11g/n: OFDM      |
| Extreme Temperature     | -10/+55℃                             |
| Nominal Voltage         | 3.9V                                 |
| Extreme High Voltage    | 4.2V                                 |
| Extreme Low Voltage     | 3.6V                                 |

Note: Photographs of EUT are shown in ANNEX A of this test report.

#### 3.2. Internal Identification of EUT used during the test

| EUT ID* | SN or IMEI      | HW Version | SW Version | Date of receipt |
|---------|-----------------|------------|------------|-----------------|
| N07     | 354043060004100 | V01        | V01        | 2014-09-08      |

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

| AE ID* | Description | SN  |
|--------|-------------|-----|
| AE1    | RF cable    | --- |
| AE2    | ---         | --- |

\*AE ID: is used to identify the test sample in the lab internally.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference  | Title                                                                                                                                                                                                                   | Version |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| FCC Part15 | FCC CFR 47, Part 15,Subpart C:<br>15.205 Restricted bands of operation;<br>15.209 Radiated emission limits, general requirements;<br>15.247 Operation within the bands 902-928MHz,<br>2400-2483.5MHz, and 5725-5850MHz. | 2014    |
| ANSI 63.10 | Methods of Measurement of Radio-Noise Emissions from<br>Low-Voltage Electrical and Electronic Equipment in the<br>Range of 9KHz to 40GHz                                                                                | 2009    |

## 5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

| Measurement Items                       | Sub-clause of Part15C | Sub-clause of IC | Verdict |
|-----------------------------------------|-----------------------|------------------|---------|
| Maximum Peak Output Power               | 15.247(a)             | /                | P       |
| Peak Power Spectral Density             | 15.247(e)             | /                | P       |
| Occupied 6dB Bandwidth                  | 15.247(d)             | /                | P       |
| Band Edges Compliance                   | 15.247(b)             | /                | P       |
| Transmitter Spurious Emission-Conducted | 15.247                | /                | P       |
| Transmitter Spurious Emission-Radiated  | 15.247,15.209,        | /                | P       |
| AC Powerline Conducted Emission         | 15.107,15.207         | /                | P       |

Please refer to part 5 for detail.

The measurements are according to ANSI 63.10.

Terms used in Verdict column

|    |                                                                                |
|----|--------------------------------------------------------------------------------|
| P  | Pass, the EUT complies with the essential requirements in the standard.        |
| NP | Not Perform, the test was not performed by ECIT.                               |
| NA | Not Applicable, the test was not applicable.                                   |
| F  | Fail, the EUT does not comply with the essential requirements in the standard. |

## Test Conditions

|      |                    |
|------|--------------------|
| Tnom | Normal temperature |
| Tmin | Low Temperature    |
| Tmax | High Temperature   |
| Vnom | Normal Voltage     |
| Vmin | Low Voltage        |
| Vmax | High Voltage       |
| Hnom | Norm Humidity      |
| Anom | Norm Air Pressure  |

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

|              |      |         |
|--------------|------|---------|
| Temperature  | Tnom | 22℃     |
| Voltage      | Vnom | 3.7V    |
| Humidity     | Hnom | 32%     |
| Air Pressure | Anom | 1010hPa |

**5.1. Notes**

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

**5.2. Statements**

The product name V.35 / Nextel V.35 was a variant product , supporting GSM/GPRS/WCDMA/HSDPA/HSUPA/HSPA+, manufactured by MOBIWIRE MOBILES (NINGBO) CO.,LTD . According to the variant description , the alterations do not affect the RF performance, so no test case to be retested except the worst case of RE. All test results please refer to 2014RFA0089 which is the test report for the initial product of V.35 / Nextel V.35, Selection by V.35 / Nextel V.35.The below result are coming from the initial product of V.35 / Nextel V.35.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

## 6. Test result

### 6.1. Maximum Output Power

Measurement Limit and method:

| Standard          | Limit(dBm) |
|-------------------|------------|
| FCC CRF 15.247(b) | < 30       |

The measurement is according to ANSI 63.10. EUT is operated in continuous transmitting mode.

Measurement Uncertainty:

|                         |        |
|-------------------------|--------|
| Measurement Uncertainty | 0.75dB |
|-------------------------|--------|

#### 6.1.1. Maximum Peak Output Power-conducted

Measurement Results:

802.11b/g mode

| Mode    | Data Rate(Mbps) | Test Result(dBm) |              |               |
|---------|-----------------|------------------|--------------|---------------|
|         |                 | 2412MHz(Ch1)     | 2437MHz(Ch6) | 2462MHz(Ch11) |
| 802.11b | 1               | 7.08             | 8.26         | 6.72          |
|         | 2               | 6.53             | 7.98         | 6.18          |
|         | 5.5             | 6.26             | 7.85         | 6.70          |
|         | 11              | 6.45             | 7.40         | 6.59          |
| 802.11g | 6               | 9.23             | 9.35         | 8.14          |
|         | 9               | 9.20             | 9.41         | 8.52          |
|         | 12              | 8.91             | 9.15         | 8.07          |
|         | 18              | 8.74             | 9.51         | 8.10          |
|         | 24              | 9.46             | 9.89         | 8.20          |
|         | 36              | 9.69             | 9.99         | 8.91          |
|         | 48              | 9.01             | 9.38         | 8.24          |
|         | 54              | 9.24             | 9.32         | 8.64          |

The data rate 1Mbps and 36Mbps are selected as worse condition, and the following cases are performed with this condition.

**802.11n mode**

| Mode           | Data Rate(Index) | Teat Result(dBm) |              |               |
|----------------|------------------|------------------|--------------|---------------|
|                |                  | 2412MHz(Ch1)     | 2437MHz(Ch6) | 2462MHz(Ch11) |
| 802.11n(20MHz) | MCS0             | 5.84             | 5.24         | 5.76          |
|                | MCS1             | 5.92             | 5.36         | 5.17          |
|                | MCS2             | 5.43             | 6.13         | 5.08          |
|                | MCS3             | 5.89             | 6.08         | 5.02          |
|                | MCS4             | 9.47             | 9.75         | 8.97          |
|                | MCS5             | 9.74             | 10.08        | 9.07          |
|                | MCS6             | 9.32             | 9.07         | 9.00          |
|                | MCS7             | 9.32             | 9.98         | 8.94          |
| 802.11n(40MHz) | MCS0             | /                | /            | /             |
|                | MCS1             | /                | /            | /             |
|                | MCS2             | /                | /            | /             |
|                | MCS3             | /                | /            | /             |
|                | MCS4             | /                | /            | /             |
|                | MCS5             | /                | /            | /             |
|                | MCS6             | /                | /            | /             |
|                | MCS7             | /                | /            | /             |

The data rate MCS5 is selected as worse condition, and the following case are performed with this condition.

**6.1.2. Maximum Average Output Power-conducted**
**802.11b/g mode**

| Mode    | Test Result(dBm) |              |               |
|---------|------------------|--------------|---------------|
|         | 2412MHz(Ch1)     | 2437MHz(Ch6) | 2462MHz(Ch11) |
| 802.11b | 4.72             | 4.82         | 3.65          |
| 802.11g | 2.71             | 2.65         | 1.62          |

802.11n mode

| Mode           | Test Result(dBm) |              |               |
|----------------|------------------|--------------|---------------|
|                | 2412MHz(Ch1)     | 2437MHz(Ch6) | 2462MHz(Ch11) |
| 802.11n(20MHz) | 2.94             | 2.75         | 1.79          |
| 802.11n(40MHz) | /                | /            | /             |

**Conclusion: PASS**

## 6.2. Peak Power Spectral Density

**Measure Limit:**

| Standard               | Limit        |
|------------------------|--------------|
| FCC CFR Part 15.247(e) | < 8dBm/3 KHz |

The measurement is according to ANSI 63.10 D01 DTS V03.

**Test procedures:**

1. Connect the EUT to spectrum analyzer.
2. Set RBW=3KHz, VBW=10KHz,span more than 1.5 times channel bandwidth.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

**Measurement Uncertainty:**

|                         |        |
|-------------------------|--------|
| Measurement Uncertainty | 0.75dB |
|-------------------------|--------|

**Measurement Results:**
**802.11b/g mode**

| Mode    | Channel | Power Spectral Density(dBm/3kHz) |        | Conclusion |
|---------|---------|----------------------------------|--------|------------|
| 802.11b | 1       | Fig.1                            | -16.55 | P          |
|         | 6       | Fig.2                            | -21.63 | P          |
|         | 11      | Fig.3                            | -22.12 | P          |
| 802.11g | 1       | Fig.4                            | -20.69 | P          |
|         | 6       | Fig.5                            | -20.38 | P          |
|         | 11      | Fig.6                            | -20.70 | P          |


## 802.11n mode

| Mode           | Channel | Power Spectral Density(dBm/3kHz) |        | Conclusion |
|----------------|---------|----------------------------------|--------|------------|
| 802.11n(20MHz) | 1       | Fig.7                            | -21.98 | P          |
|                | 6       | Fig.8                            | -22.61 | P          |
|                | 11      | Fig.9                            | -22.74 | P          |

|                |    |   |   |   |
|----------------|----|---|---|---|
| 802.11g(40MHz) | 1  | / | / | P |
|                | 6  | / | / | P |
|                | 11 | / | / | P |


**Conclusion: PASS**

**Test graphs as below:**

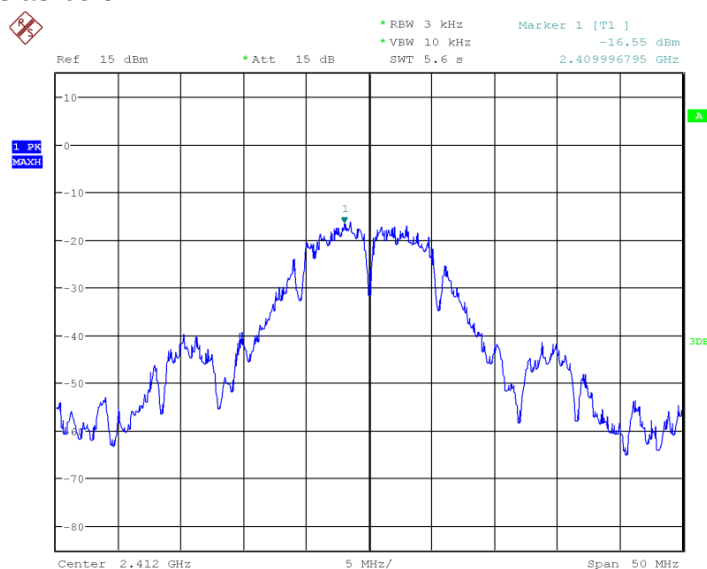


Date: 7.AUG.2014 20:08:26

**Fig.1 Power Spectral Density (802.1b,Ch1)**

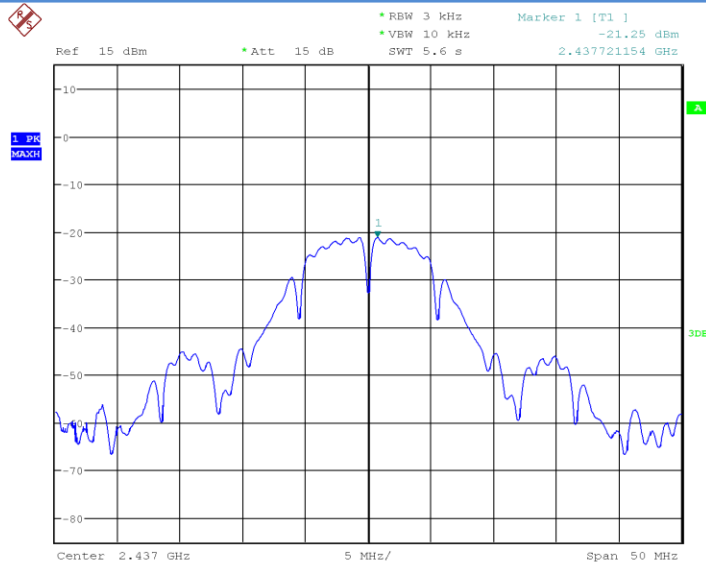


Date: 14.AUG.2014 10:59:44

**Fig.2 Power Spectral Density (802.1b,Ch6)**

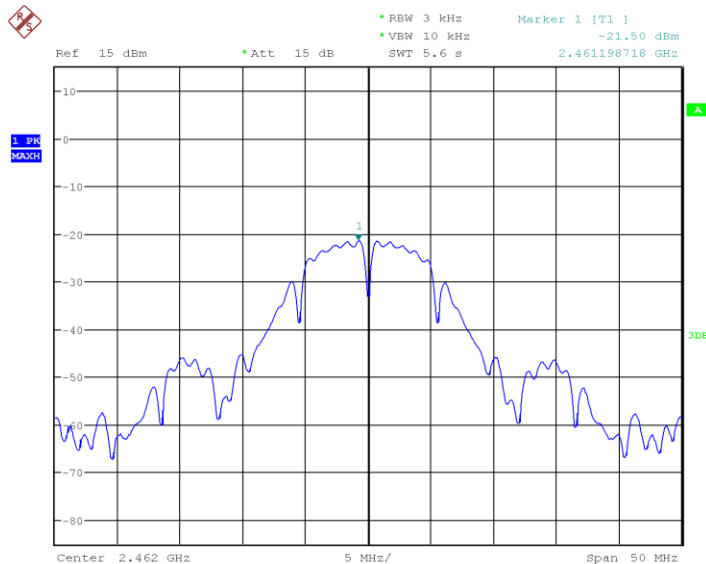


Date: 14.AUG.2014 11:00:20

**Fig.3 Power Spectral Density (802.1b,Ch11)**

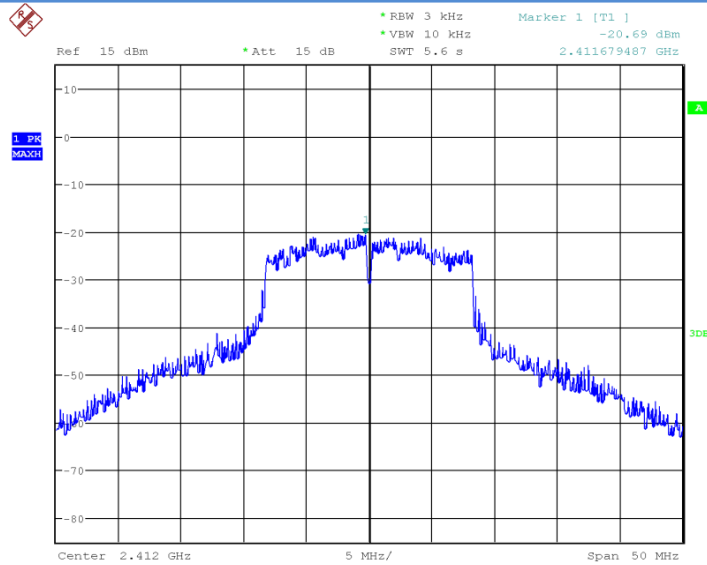


Date: 7.AUG.2014 20:11:42

**Fig.4 Power Spectral Density (802.1g,Ch1)**

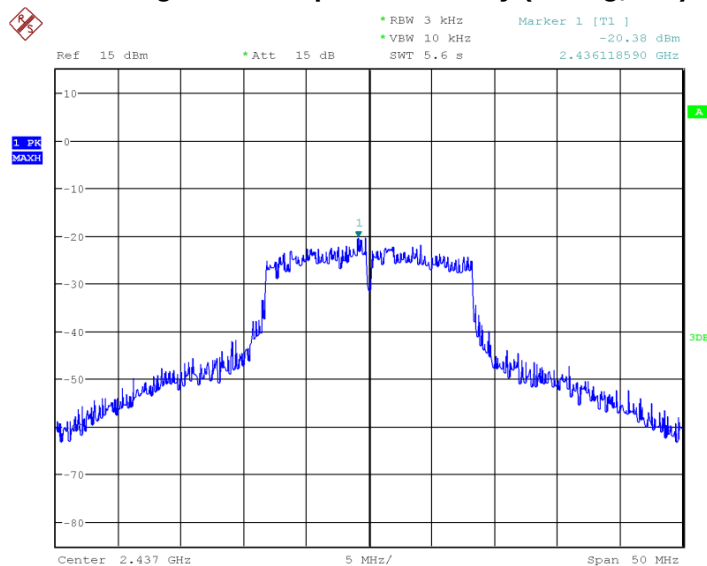


Date: 7.AUG.2014 20:12:14

**Fig.5 Power Spectral Density (802.1g,Ch6)**

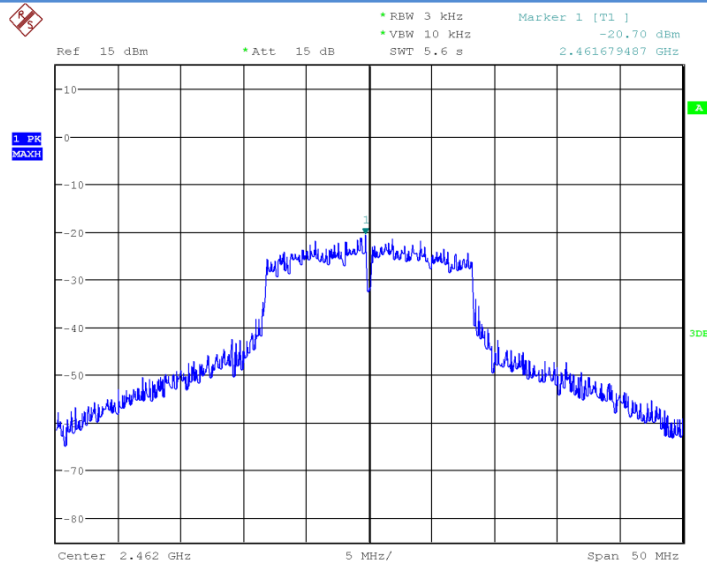


Date: 7.AUG.2014 20:12:44

**Fig.6 Power Spectral Density (802.1g,Ch11)**

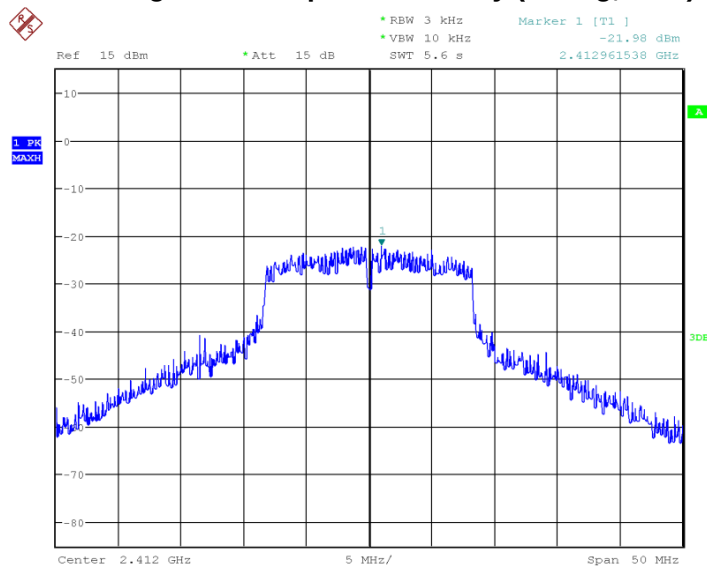


Date: 7.AUG.2014 20:13:24

**Fig.7 Power Spectral Density (802.1n-20MHz,Ch1)**

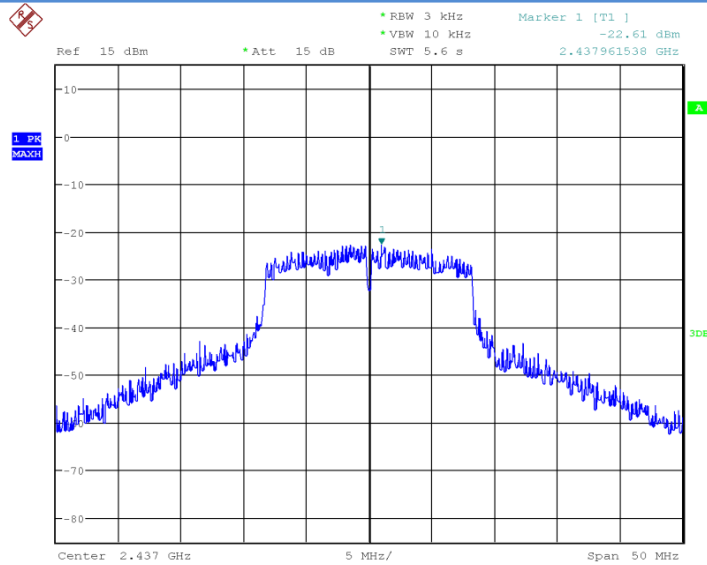

Date: 7.AUG.2014 20:14:09

**Fig.8 Power Spectral Density (802.1n-20MHz,Ch6)**

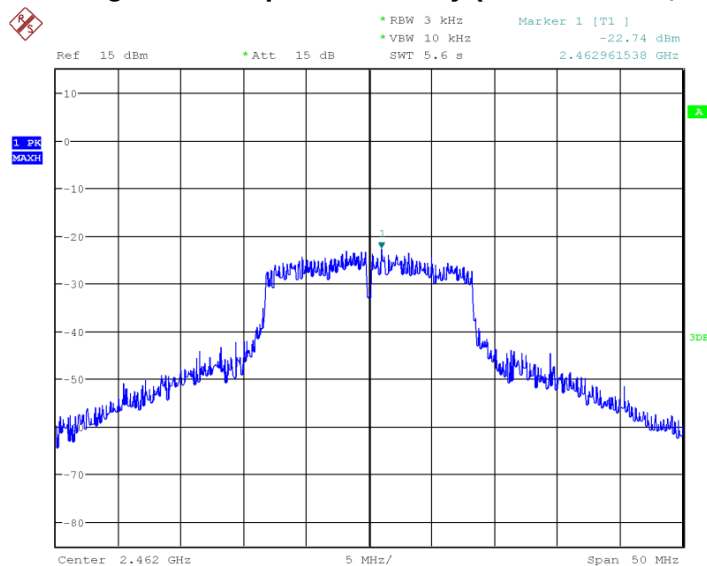

Date: 7.AUG.2014 20:14:35

**Fig.9 Power Spectral Density (802.1n-20MHz,Ch11)**

## 6.3. Occupied 6dB Bandwidth

### Measurement Limit:

| Standard                  | Limit(KHz) |
|---------------------------|------------|
| FCC 47 CFR Part 15.247(a) | ≥500       |

The measurement is according to ANSI 63.10.

### Measurement Uncertainty:

|                         |         |
|-------------------------|---------|
| Measurement Uncertainty | 60.80Hz |
|-------------------------|---------|

## Test procedures:

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz,span more than 1.5 times channel bandwidth.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

## Measurement Result:

### 802.11b/g mode


| Mode    | Channel | Occupied 6dB Bandwidth(KHz) |       | Conclusion |
|---------|---------|-----------------------------|-------|------------|
| 802.11b | 1       | Fig.10                      | 9.29  | P          |
|         | 6       | Fig.11                      | 9.86  | P          |
|         | 11      | Fig.12                      | 10.02 | P          |
| 802.11g | 1       | Fig.13                      | 16.57 | P          |
|         | 6       | Fig.14                      | 16.66 | P          |
|         | 11      | Fig.15                      | 16.66 | P          |

### 802.11n mode

| Mode           | Channel | Occupied 6dB Bandwidth(KHz) |       | Conclusion |
|----------------|---------|-----------------------------|-------|------------|
| 802.11n(20MHz) | 1       | Fig.16                      | 16.66 | P          |
|                | 6       | Fig.17                      | 16.66 | P          |
|                | 11      | Fig.18                      | 16.66 | P          |
| 802.11n(40MHz) | 1       | /                           |       | P          |
|                | 6       | /                           |       | P          |
|                | 11      | /                           |       | P          |


**Conclusion: PASS**

**Test graphs as below:**

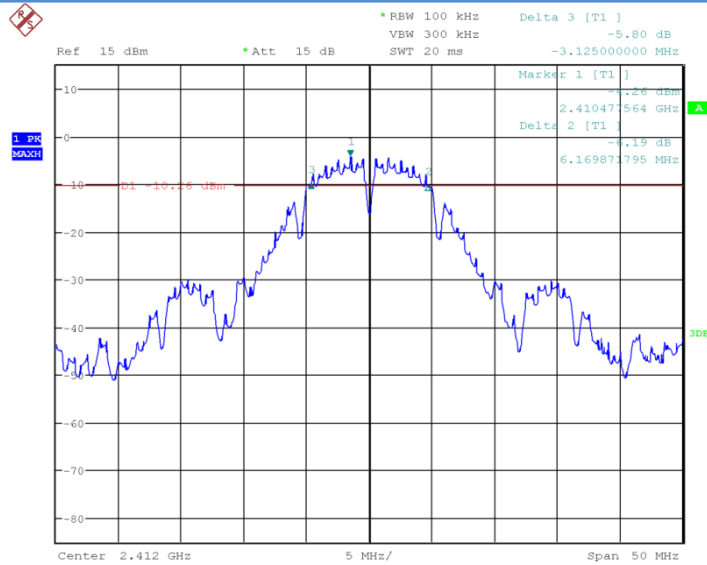


Date: 4.JUN.2014 16:01:44

**Fig.10 Occupied 6dB Bandwidth (802.11b, Ch1)**

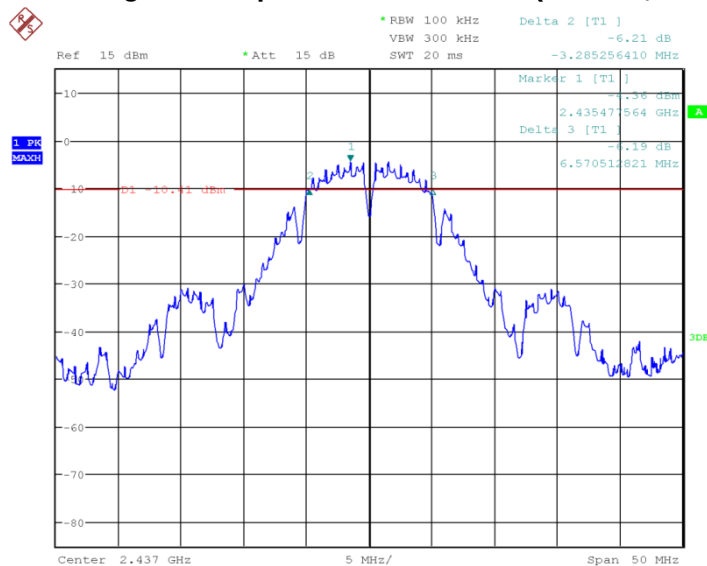


Date: 4.JUN.2014 16:06:04

**Fig.11 Occupied 6dB Bandwidth (802.11b, Ch6)**

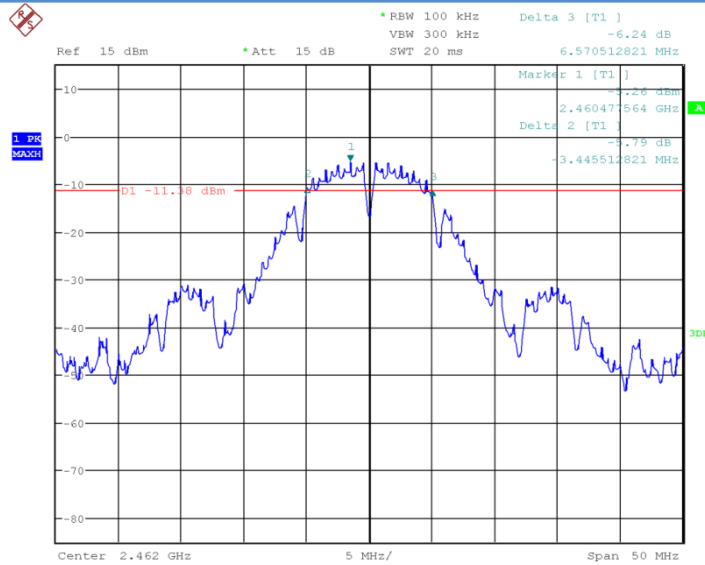


Date: 4.JUN.2014 16:08:46

**Fig.12 Occupied 6dB Bandwidth (802.11b, Ch11)**

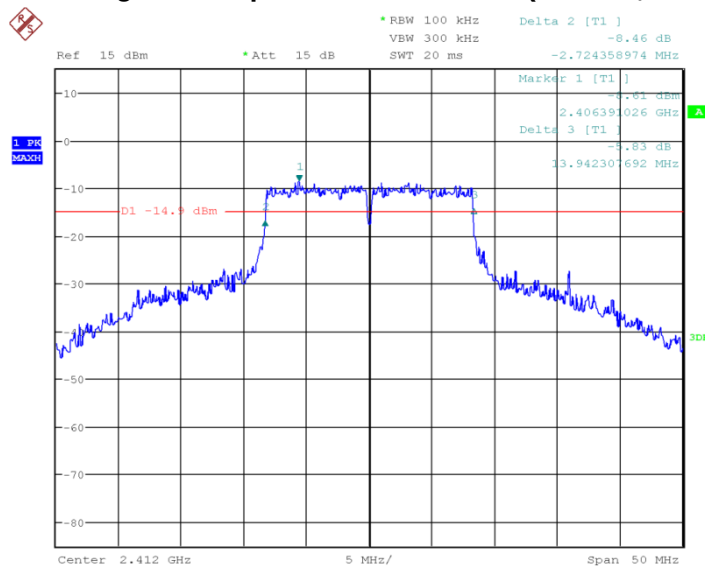


Date: 4.JUN.2014 16:12:44

**Fig.13 Occupied 6dB Bandwidth (802.11g, Ch1)**

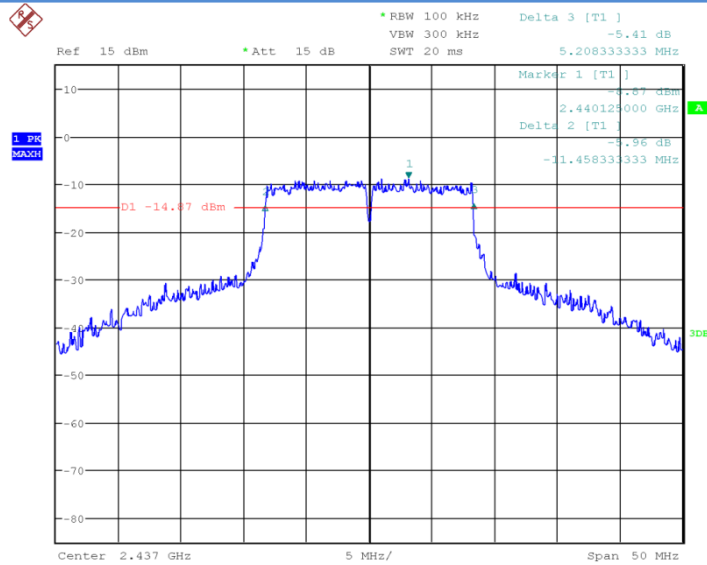


Date: 4.JUN.2014 16:15:17

**Fig.14 Occupied 6dB Bandwidth (802.11g, Ch6)**

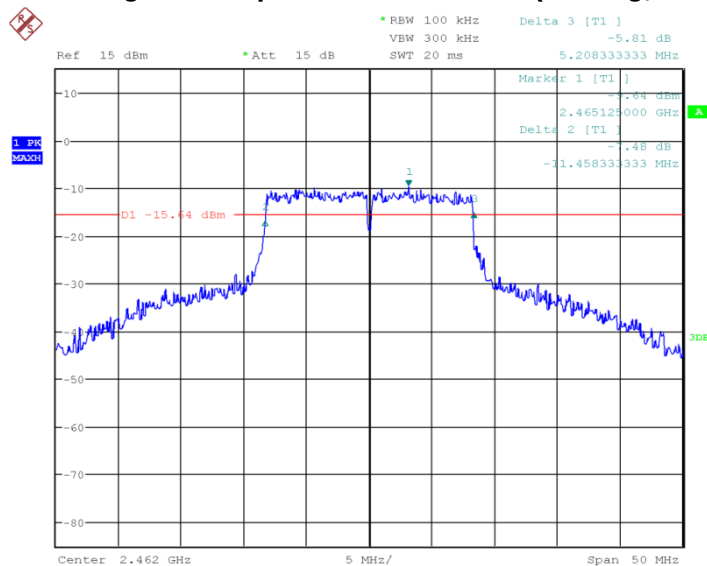


Date: 4.JUN.2014 16:18:01

**Fig.15 Occupied 6dB Bandwidth (802.11g, Ch11)**

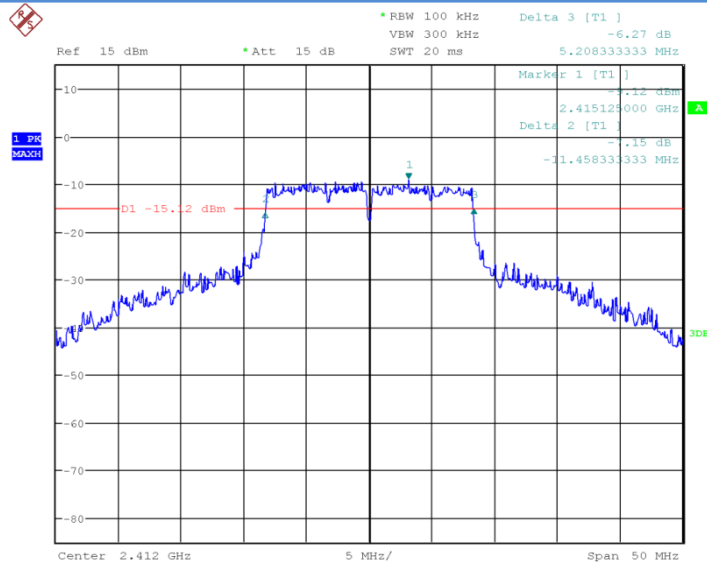


Date: 4.JUN.2014 16:21:17

**Fig.16 Occupied 6dB Bandwidth (802.11n-20MHz, Ch1)**

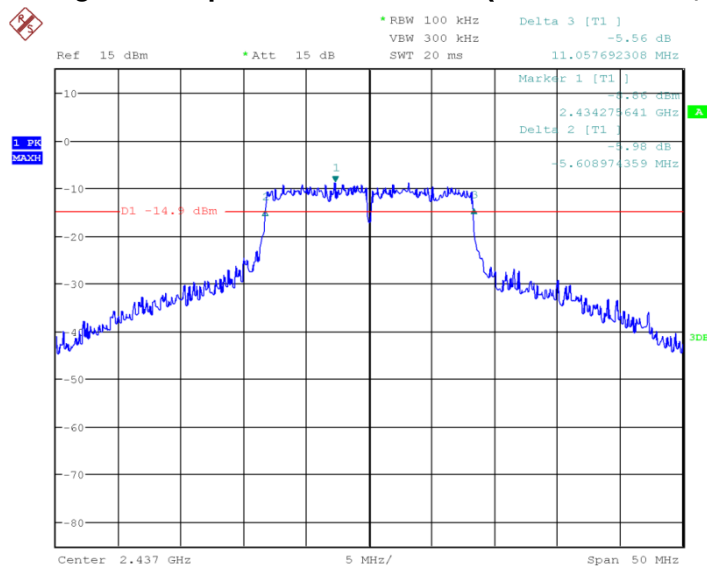

Date: 4.JUN.2014 16:23:03

**Fig.17 Occupied 6dB Bandwidth (802.11n-20MHz, Ch6)**

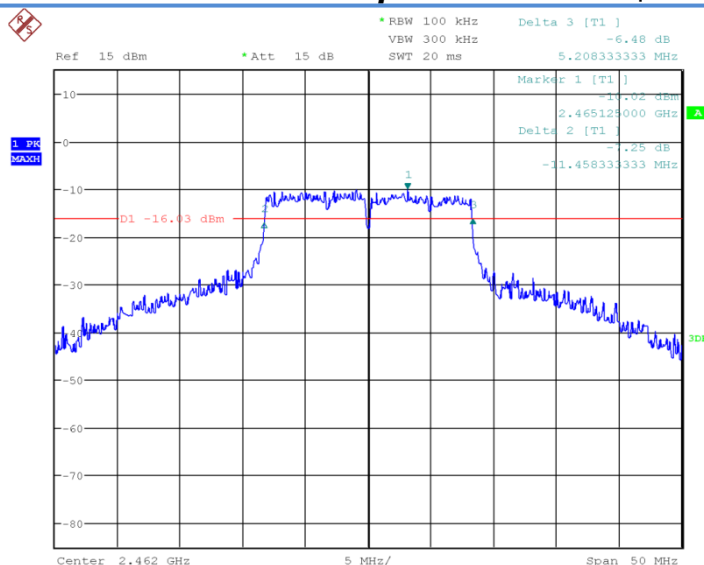

Date: 4.JUN.2014 16:24:41

**Fig.18 Occupied 6dB Bandwidth (802.11n-20MHz, Ch11)**

## 6.4. Band Edges Compliance

### Measurement Limit:

| Standard                  | Limited(dBc) |
|---------------------------|--------------|
| FCC 47 CFR Part 15.247(d) | >20          |

The measurement is according to ANSI 63.10.

### Measurement Uncertainty:

|                         |        |
|-------------------------|--------|
| Measurement Uncertainty | 0.75dB |
|-------------------------|--------|

### Test procedures:

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

### 802.11b/g mode

| Mode    | Channel | Test Results | Conclusion |
|---------|---------|--------------|------------|
| 802.11b | 1       | Fig.19       | P          |
|         | 11      | Fig.20       | P          |
| 802.11g | 1       | Fig.21       | P          |
|         | 11      | Fig.22       | P          |


### 802.11n mode

| Mode | Channel | Test Results | Conclusion |
|------|---------|--------------|------------|
|------|---------|--------------|------------|

|                |    |        |   |
|----------------|----|--------|---|
| 802.11n(20MHz) | 1  | Fig.23 | P |
|                | 11 | Fig.24 | P |
| 802.11(40MHz)  | /  | /      | / |
|                | /  | /      | / |


**Conclusion: PASS**

**Test graphs as blew:**

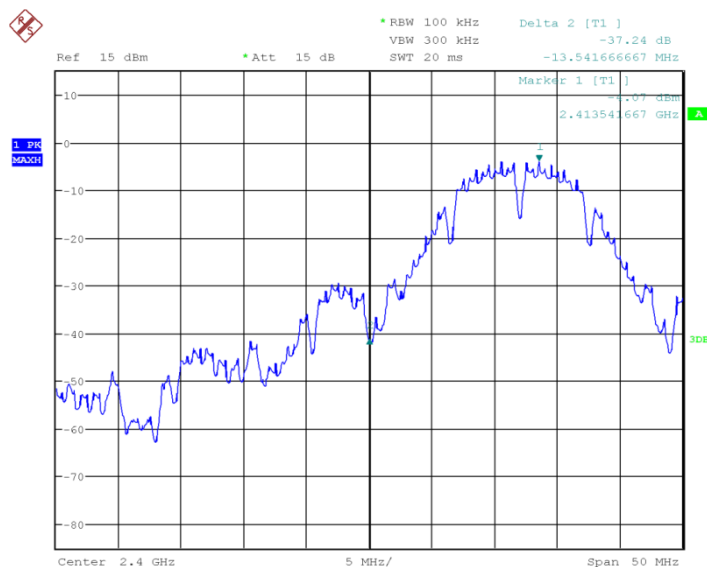


Date: 4.JUN.2014 16:30:16

**Fig.19 Band Edges (802.11b, Ch1)**

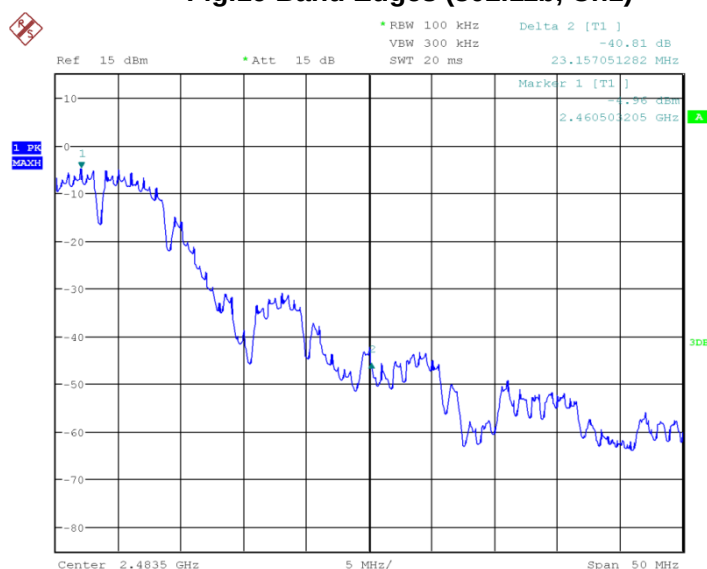


Date: 4.JUN.2014 16:31:51

**Fig.20 Band Edges (802.11b, Ch11)**

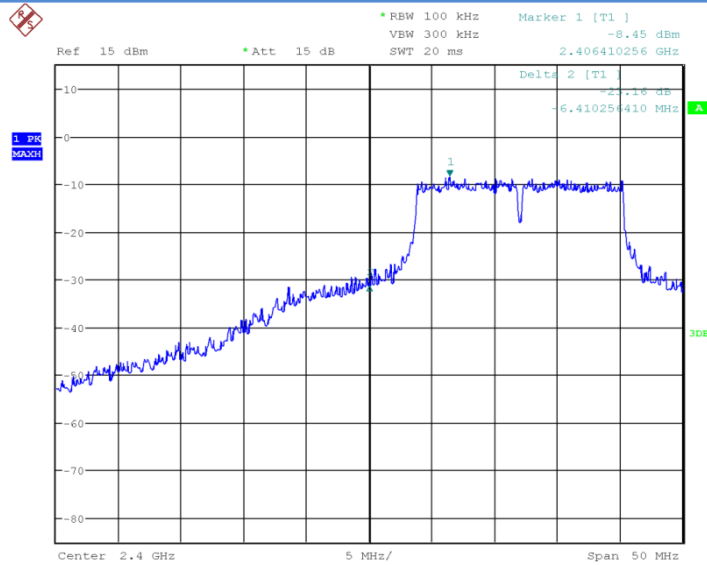


Date: 4.JUN.2014 16:34:04

## Fig.21 Band Edges (802.11g, Ch1)

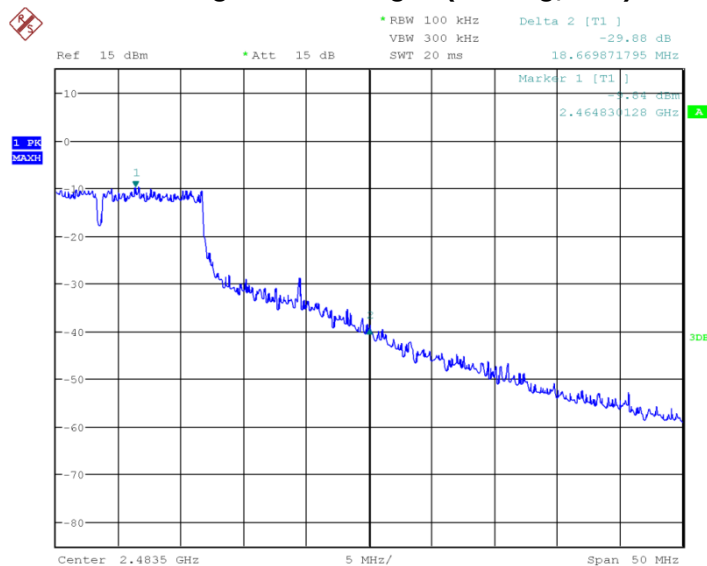


Date: 4.JUN.2014 16:35:31

## Fig.22 Band Edges (802.11g, Ch11)

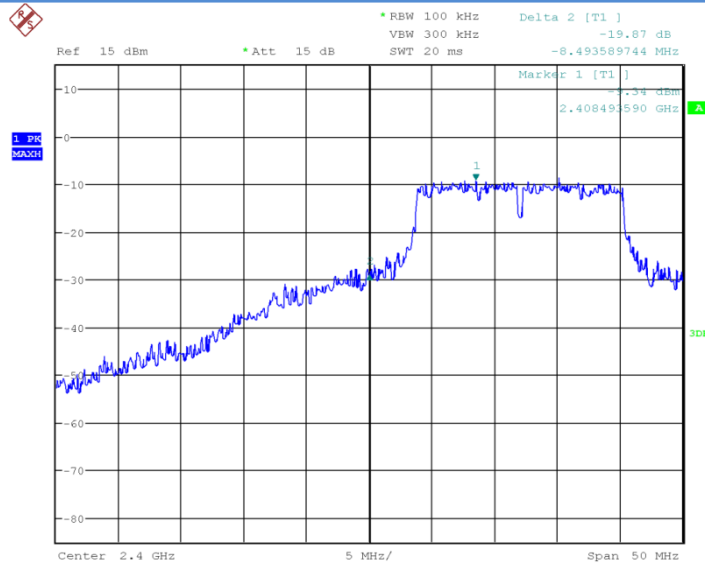

Date: 4.JUN.2014 16:36:35

**Fig.23 Band Edges (802.11n-20MHz, Ch1)**

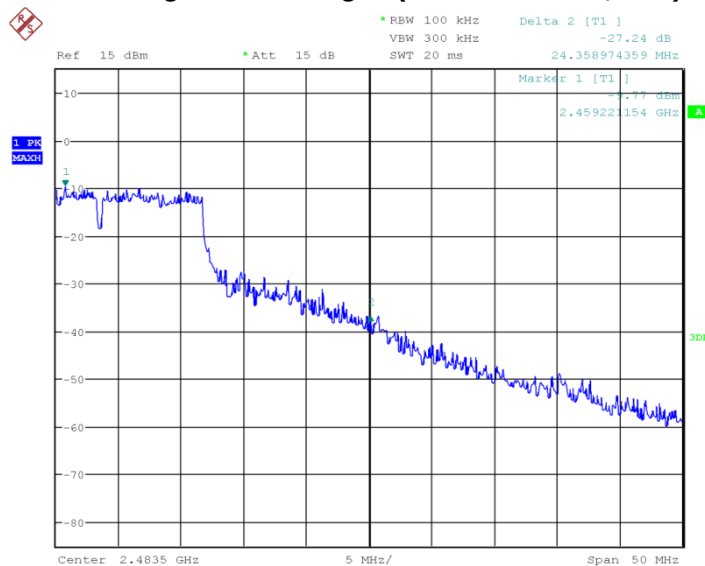

Date: 4.JUN.2014 16:37:36

**Fig.24 Band Edges (802.11b-20MHz, Ch11)**

## 6.5. Transmitter Spurious Emission-conducted

### Measurement Limit:

| Standard                  | Limit                                            |
|---------------------------|--------------------------------------------------|
| FCC 47 CFR Part 15.247(d) | 20dB below peak output power in 100KHz bandwidth |

This measurement is according to ANSI 63.10.

### Measurement Uncertainty:

| Frequency Range                         | Uncertainty |
|-----------------------------------------|-------------|
| $30\text{MHz} \leq f \leq 2\text{GHz}$  | 0.63        |
| $2\text{GHz} \leq f \leq 3.6\text{GHz}$ | 0.82        |
| $3.6\text{GHz} \leq f \leq 8\text{GHz}$ | 1.55        |
| $8\text{GHz} \leq f \leq 20\text{GHz}$  | 1.86        |
| $20\text{GHz} \leq f \leq 22\text{GHz}$ | 1.90        |
| $22\text{GHz} \leq f \leq 26\text{GHz}$ | 2.20        |

## Test procedures:

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

## Measurement Result:

### 802.11b/g mode


| Mode    | Channel | Frequency Range | Test Results | Conclusion |
|---------|---------|-----------------|--------------|------------|
| 802.11b | 1       | 2.412GHz        | Fig.25       | P          |
|         |         | 30MHz~26GHz     | Fig.26       | P          |
|         | 6       | 2.437GHz        | Fig.27       | P          |
|         |         | 30MHz~26GHz     | Fig.28       | P          |
|         | 11      | 2.472GHz        | Fig.29       | P          |
|         |         | 30MHz~26GHz     | Fig.30       | P          |
| 802.11g | 1       | 2.412GHz        | Fig.31       | P          |
|         |         | 30MHz~26GHz     | Fig.32       | P          |
|         | 6       | 2.437GHz        | Fig.33       | P          |
|         |         | 30MHz~26GHz     | Fig.34       | P          |
|         | 11      | 2.472GHz        | Fig.35       | P          |
|         |         | 30MHz~26GHz     | Fig.36       | P          |

### 802.11n mode

| Mode           | Channel | Frequency Range | Test Results | Conclusion |
|----------------|---------|-----------------|--------------|------------|
| 802.11n(20MHz) | 1       | 2.412GHz        | Fig.37       | P          |
|                |         | 30MHz~26GHz     | Fig.38       | P          |
|                | 6       | 2.437GHz        | Fig.39       | P          |
|                |         | 30MHz~26GHz     | Fig.40       | P          |
|                | 11      | 2.472GHz        | Fig.41       | P          |
|                |         | 30MHz~26GHz     | Fig.42       | P          |
| 802.11n(40MHz) | 1       | /               | /            | /          |
|                |         | /               | /            | /          |
|                | 6       | /               | /            | /          |
|                |         | /               | /            | /          |
|                | 11      | /               | /            | /          |
|                |         | /               | /            | /          |


**Conclusion: PASS**

**Test graphs as below:**

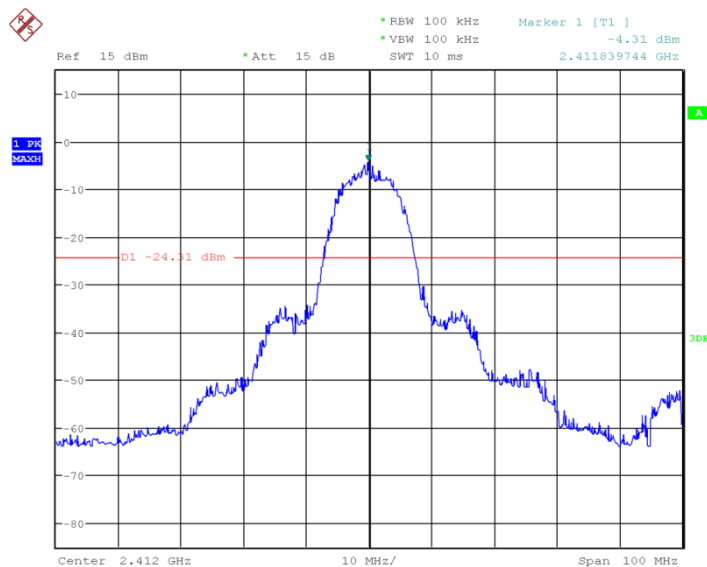


Date: 24.JUN.2014 14:02:13

**Fig.25 Conducted Spurious Emission (802.11b, Ch1)**

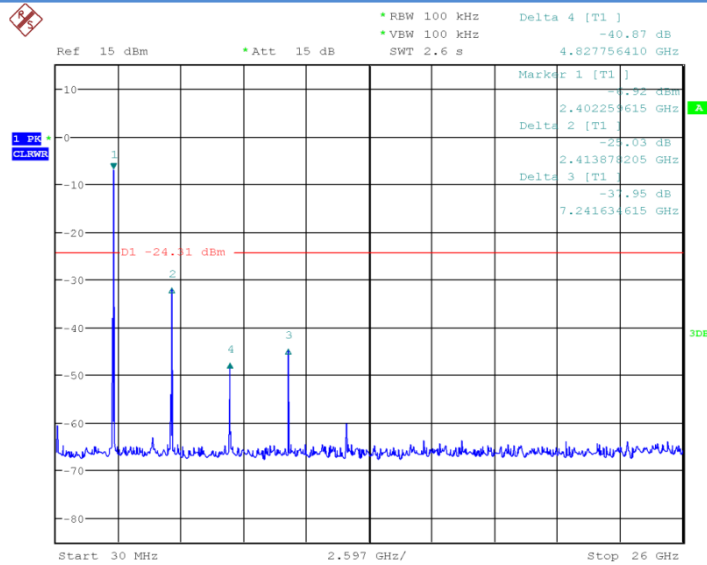


Date: 24.JUN.2014 14:03:27

**Fig.26 Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)**

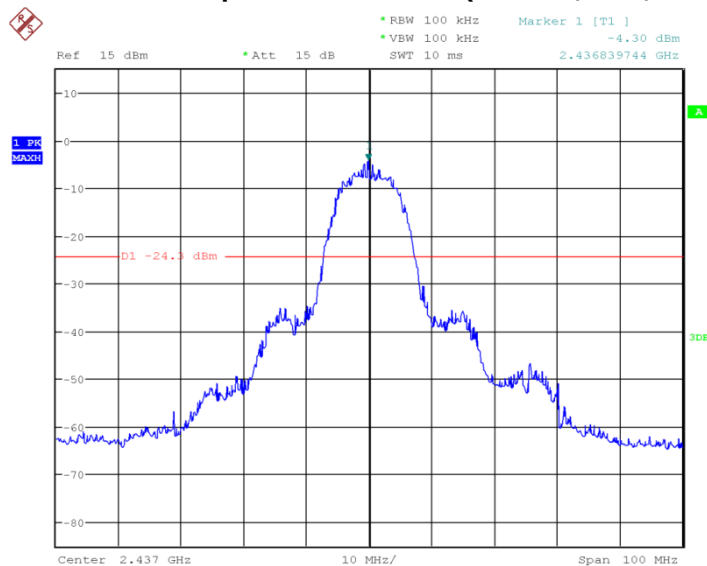


Date: 24.JUN.2014 14:04:44

**Fig.27 Conducted Spurious Emission (802.11b, Ch6)**

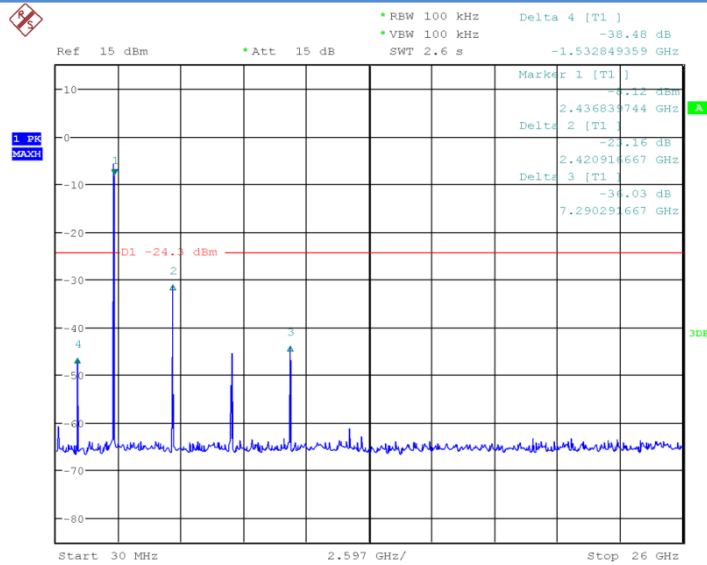


Date: 24.JUN.2014 14:05:14

**Fig.28 Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)**

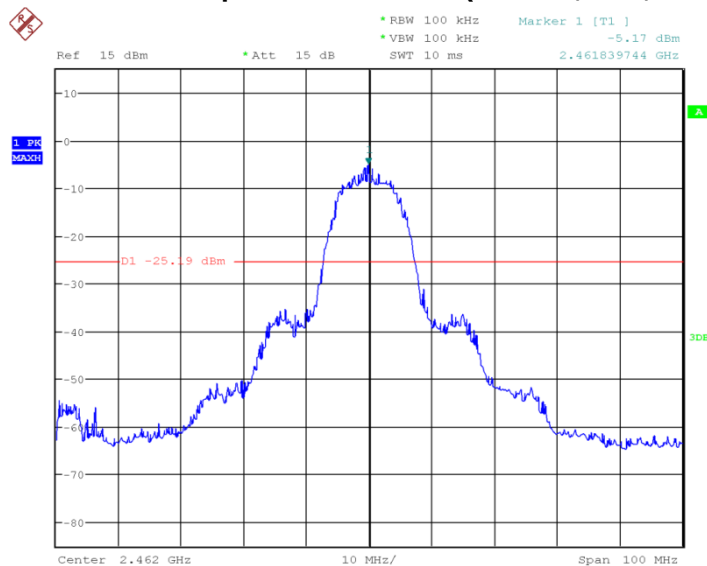


Date: 24.JUN.2014 14:06:18

**Fig.29 Conducted Spurious Emission (802.11b, Ch11)**

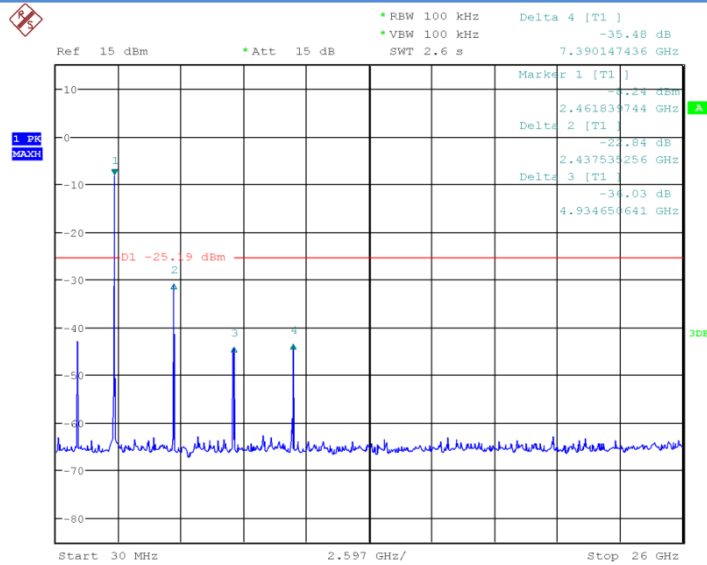

Date: 24.JUN.2014 14:06:53

**Fig.30 Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)**

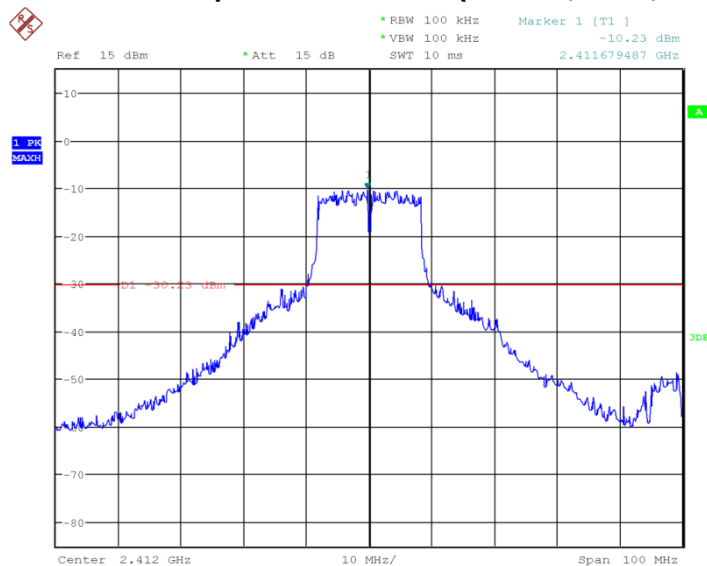

Date: 24.JUN.2014 14:08:34

**Fig.31 Conducted Spurious Emission (802.11g, Ch1)**



Ref 15 dBm \* Att 15 dB RBW 100 kHz VBW 100 kHz SWT 10 ms


Marker 1 [T1] -10.31 dBm 2.436679487 GHz

1. PR NOISE

Center 2.437 GHz 10 MHz/ Span 100 MHz


Date: 24.JUN.2014 14:11:09

**Fig.33 Conducted Spurious Emission (802.11g, Ch6)**

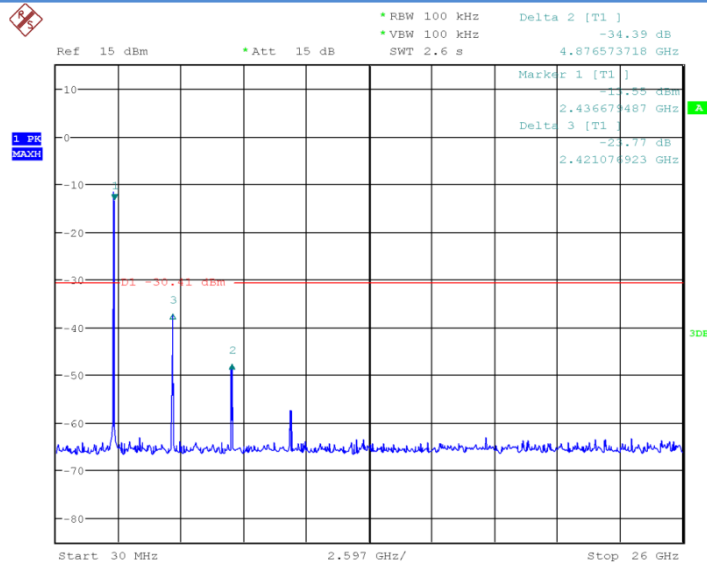


Date: 24.JUN.2014 14:12:09

**Fig.34 Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)**

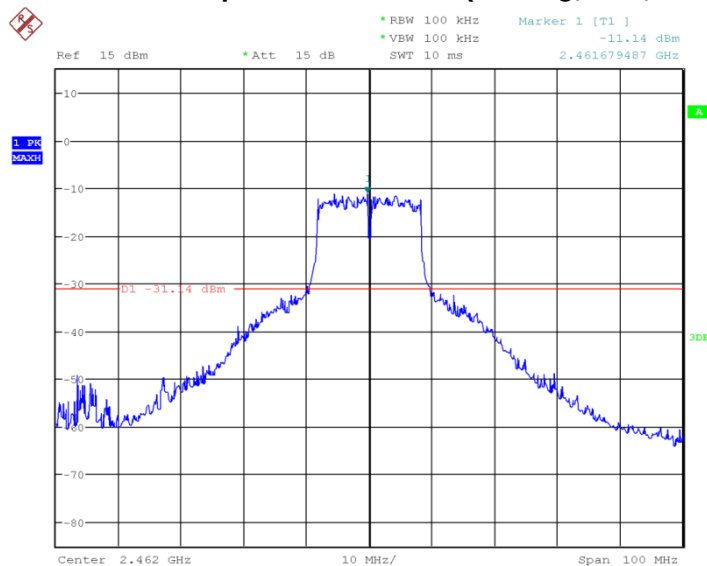


Date: 24.JUN.2014 14:13:25

**Fig.35 Conducted Spurious Emission (802.11g, Ch11)**

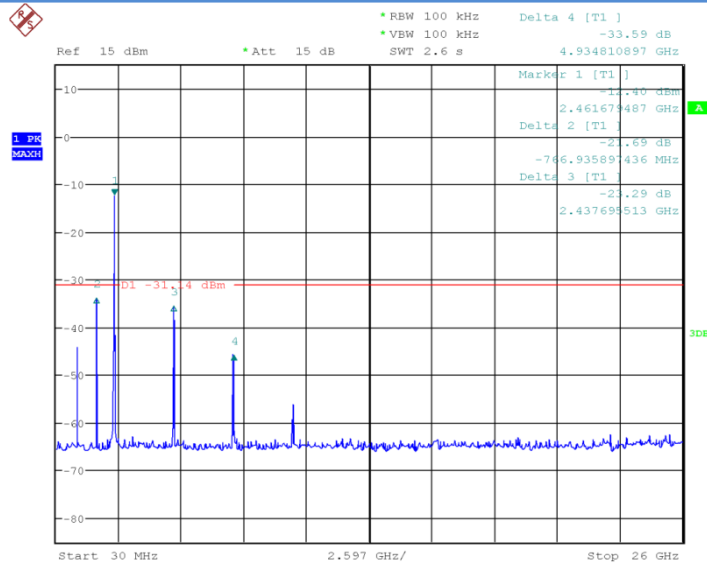


Date: 24.JUN.2014 14:14:22

**Fig.36 Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)**

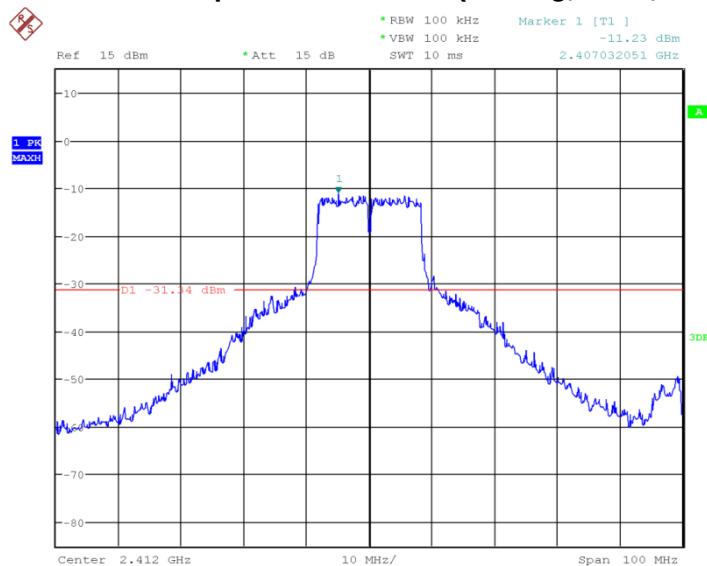


Date: 24.JUN.2014 14:16:42

**Fig.37 Conducted Spurious Emission (802.11n-20MHz, Ch1)**

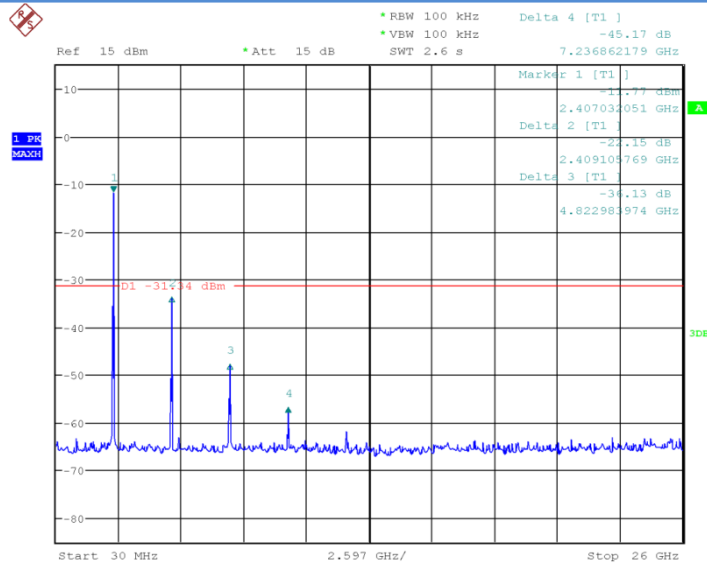


Date: 24.JUN.2014 14:17:09

**Fig.38 Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)**

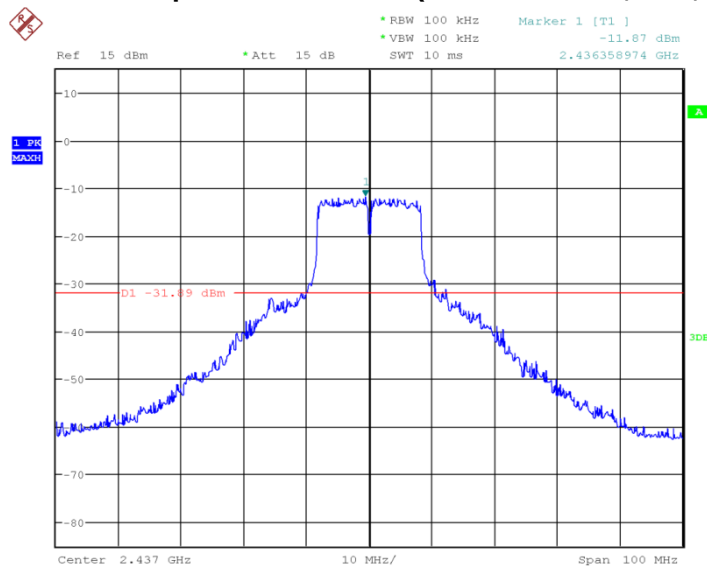


Date: 24.JUN.2014 14:19:19

**Fig.39 Conducted Spurious Emission (802.11n-20MHz, Ch6)**

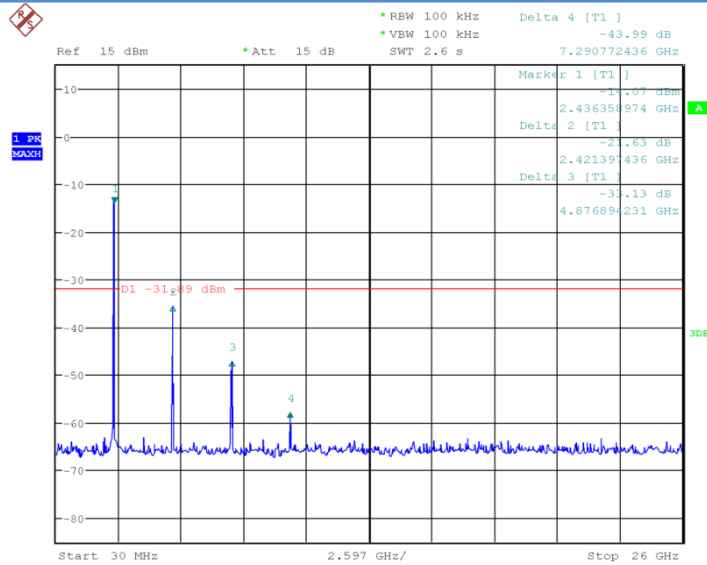


Date: 24.JUN.2014 14:19:39

**Fig.40 Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)**

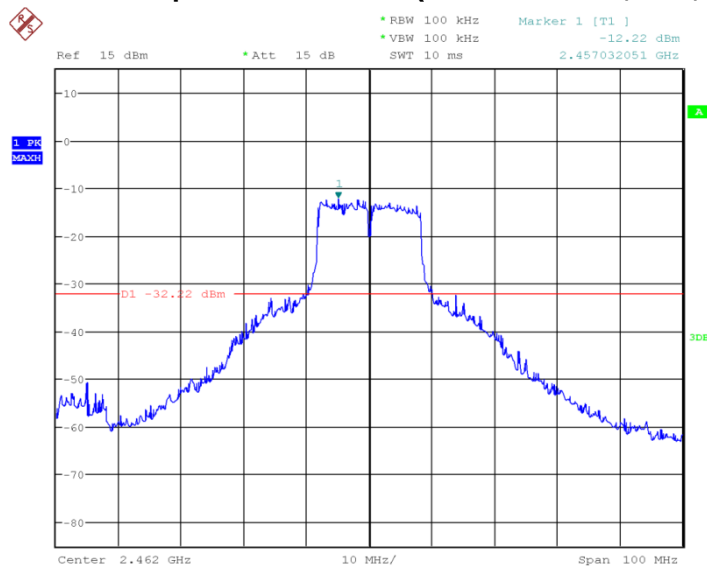

Date: 24.JUN.2014 14:21:06

**Fig.41 Conducted Spurious Emission (802.11n-20MHz, Ch11)**

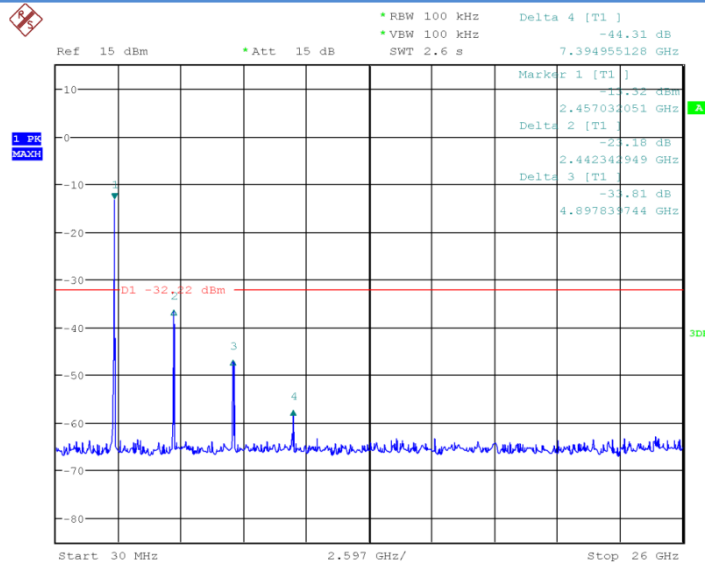

Date: 24.JUN.2014 14:21:33

**Fig.42 Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)**

## 6.6. Transmitter Spurious Emission-Radiated

### Measurement Limit:

| Standard                             | Limit                        |
|--------------------------------------|------------------------------|
| FCC 47 CFR Part 15.247,15.205,15.209 | 20dB below peak output power |

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)). The measurement is according to ANSI 63.10 and KDB558704.

### Limit in restricted band:

| Frequency of emission(MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|----------------------------|----------------------|------------------------|
| 30~88                      | 100                  | 40                     |
| 88~216                     | 150                  | 43.5                   |
| 216~960                    | 200                  | 46                     |
| Above 960                  | 500                  | 54                     |

### Test condition:

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI 63.10-2009 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to

recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

| Frequency of emission (MHz) | RBW/VBW       | Sweep Times (s) |
|-----------------------------|---------------|-----------------|
| 30~1000                     | 100KHz/300KHz | 5               |
| 1000~4000                   | 1MHz/1MHz     | 15              |
| 4000~18000                  | 1MHz/1MHz     | 40              |
| 18000~26500                 | 1MHz/1MHz     | 20              |

**802.11b/g mode**

| Mode    | Channel | Frequency Range | Test Results | Conclusion |
|---------|---------|-----------------|--------------|------------|
| 802.11b | Power   | 2.38GHz~2.45GHz | Fig.44       | P          |
|         | Power   | 2.45GHz~2.5GHz  | Fig.45       | P          |
|         | 1       | 30MHz~1GHz      | Fig.46       | P          |
|         |         | 1GHz~3GHz       | Fig.47       | P          |
|         |         | 3GHz~18GHz      | Fig.48       | P          |
| 802.11g | Power   | 2.38GHz~2.45GHz | Fig.49       | P          |
|         | Power   | 2.45GHz~2.5GHz  | Fig.50       | P          |
|         | 11      | 30MHz~1GHz      | Fig.51       | P          |
|         |         | 1GHz~3GHz       | Fig.52       | P          |
|         |         | 3GHz~18GHz      | Fig.53       | P          |

**802.11n mode**

| Mode           | Channel | Frequency Range | Test Results | Conclusion |
|----------------|---------|-----------------|--------------|------------|
| 802.11n(20MHz) | Power   | 2.38GHz~2.45GHz | Fig.54       | P          |

|   |              |                |        |   |
|---|--------------|----------------|--------|---|
|   | Power        | 2.45GHz~2.5GHz | Fig.55 | P |
|   | 1            | 30MHz~1GHz     | Fig.56 | P |
|   |              | 1GHz~3GHz      | Fig.57 | P |
|   |              | 3GHz~18GHz     | Fig.58 | P |
| / | All channels | 18GHz~26.5GHz  | Fig.59 | P |

**Conclusion: PASS**

## Note:

A "reference path loss" is established and  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result=  $P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss}$ .

## 802.11b mode

### Ch1 30MHz~1GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 34.982704      | 18             | 0.73      | 17.27        | V        |
| 43.732324      | 22             | 0.86      | 21.14        | V        |
| 100.659276     | 12.8           | 1.83      | 10.97        | H        |
| 142.007892     | 2.7            | 2.23      | 0.47         | H        |
| 199.994144     | 14.2           | 2.66      | 11.54        | V        |

### Ch1 1GHz~3GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 2692.197       | 52.1           | 15.87     | 36.23        | V        |
| 2837.5304      | 52.6           | 16.66     | 35.94        | H        |

### Ch1 3GHz~18GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 10736.08667    | 45.4           | 10.42     | 34.98        | V        |
| 15217.7654     | 47.6           | 13.65     | 33.95        | V        |
| 16557.7826     | 49.3           | 14.32     | 34.98        | V        |

802.11g

**Ch11 30MHz~1GHz**

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 35.236         | 16.2           | 0.73      | 15.47        | V        |
| 102.0112       | 17.5           | 1.84      | 15.57        | H        |

**Ch11 1GHz~3GHz**

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 2793.1570      | 53.70          | 16.13     | 37.57        | V        |
| 2821.340       | 54.62          | 16.66     | 37.96        | H        |

**Ch11 3GHz~18GHz**

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 14277.142      | 54.55          | 13.33     | 41.22        | H        |
| 16171.737      | 59.42          | 13.6      | 45.82        | H        |

802.11n-20MHz

**Ch1 30MHz~1GHz**

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 34.169844      | 10.8           | 0.73      | 10.07        | V        |
| 99.959144      | 16.7           | 1.83      | 14.87        | V        |
| 125.009556     | 11             | 2.00      | 9.00         | V        |
| 200.018512     | 15.2           | 2.66      | 12.54        | H        |
| 249.994512     | 19.8           | 3.23      | 16.57        | H        |

**Ch1 1GHz~3GHz**

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 2880.7474      | 53.7           | 16.58     | 37.12        | V        |
| 2936.0168      | 53.5           | 16.57     | 36.93        | H        |

**Ch1 3GHz~18GHz**

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 16280.48953    | 63.52          | 14.36     | 49.16        | V        |
| 16948.44827    | 64.61          | 13.53     | 51.08        | H        |
| 17573.97273    | 67.08          | 14.93     | 52.15        | V        |

## All Ch 18GHz~26.5GHz

| Frequency(MHz) | Result(dBuV/m) | ARpl (dB) | PMea(dBuV/m) | Polarity |
|----------------|----------------|-----------|--------------|----------|
| 21179.000000   | 45.48          | 6.97      | 38.51        | V        |
| 22748.950000   | 41.63          | 3.05      | 38.58        | H        |
| 23684.800000   | 41.59          | 3.05      | 38.54        | H        |
| 24633.400000   | 40.05          | 3.05      | 37.00        | V        |
| 25567.550000   | 43.01          | 2.90      | 40.11        | H        |
| 26066.500000   | 42.06          | 2.90      | 39.16        | V        |

Test graphs as below:



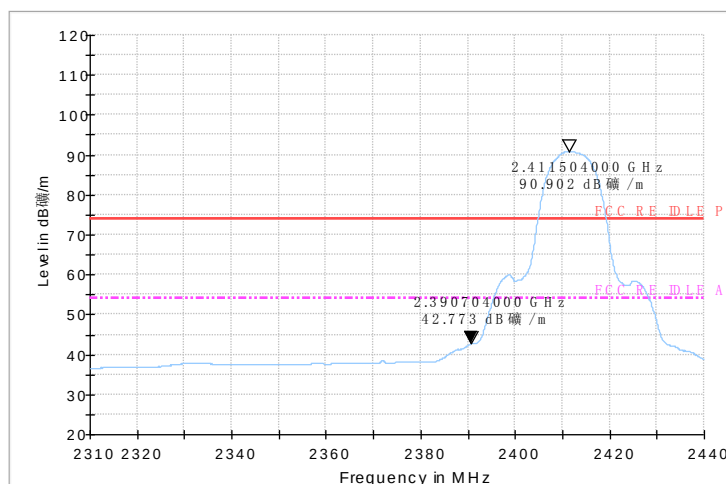



Fig.44 Radiated emission (Power): 802.11b, low channel

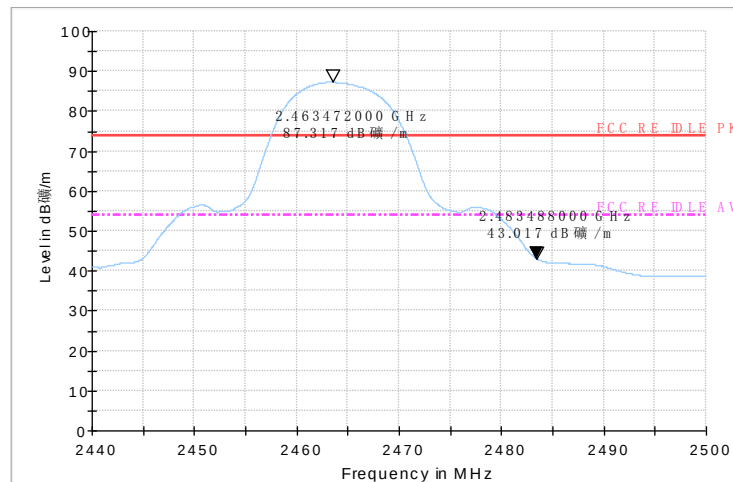


**Fig.45 Radiated emission (Power): 802.11b, high channel**

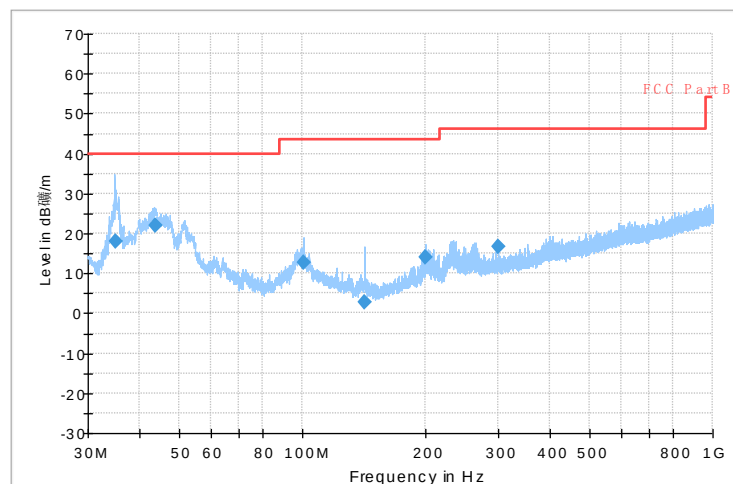


**Fig.46 Radiated Spurious Emission (802.11b,Ch1,30MHz~1GHz)**

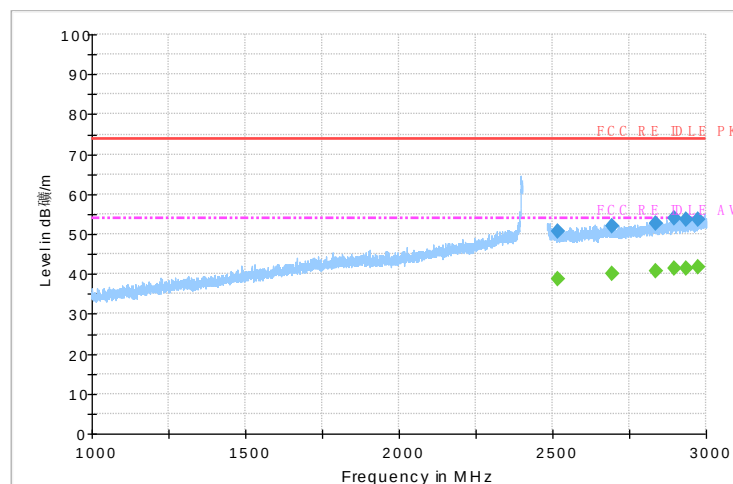


**Fig.47 Radiated Spurious Emission (802.11b,Ch1,1GHz~3GHz)**

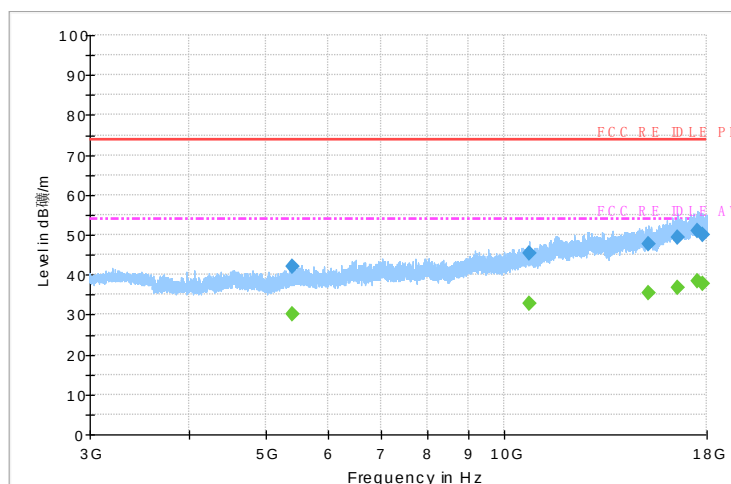

**Fig.48 Radiated Spurious Emission (802.11b, Ch1, 3GHz~18GHz)**

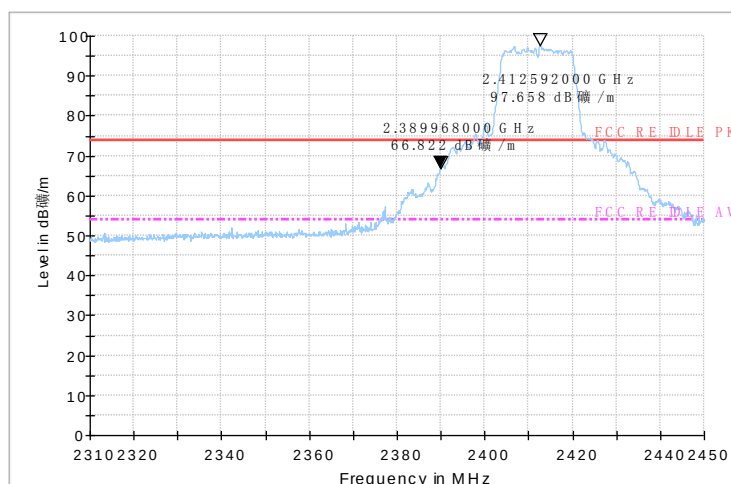


(peak)

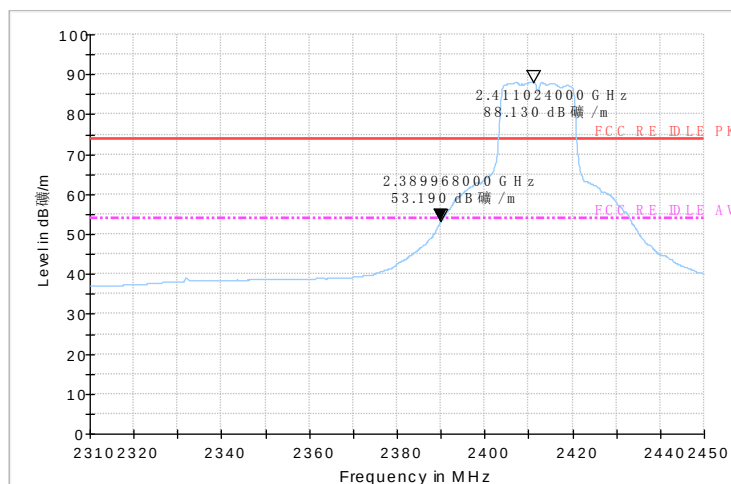


(average)

**Fig.49 Radiated emission (Power): 802.11g, low channel**

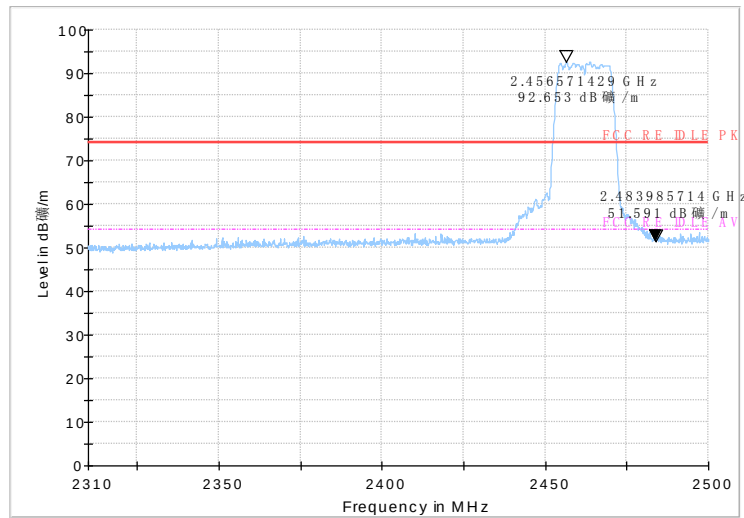


(peak)


**Fig.50 Radiated emission (Power): 802.11g, high channel**

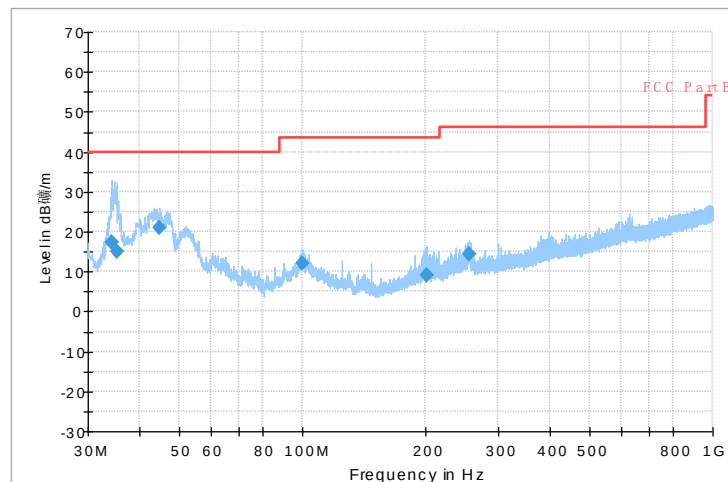


**Fig.51 Radiated Spurious Emission (802.11g,Ch11,30MHz~1GHz)**

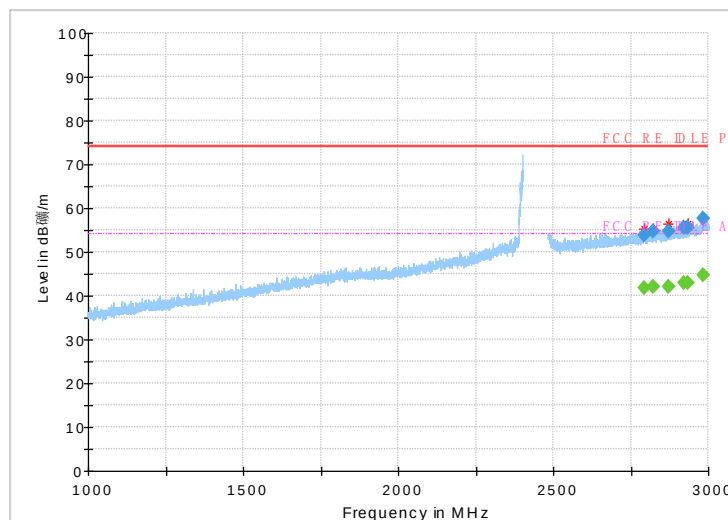


**Fig.52 Radiated Spurious Emission (802.11g,Ch11,1GHz~3GHz)**

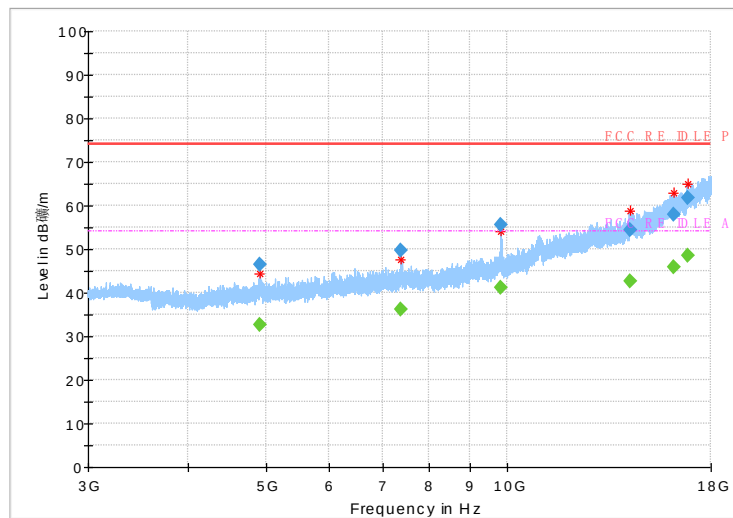

**Fig.53 Radiated Spurious Emission (802.11g,Ch11,3GHz~18GHz)**

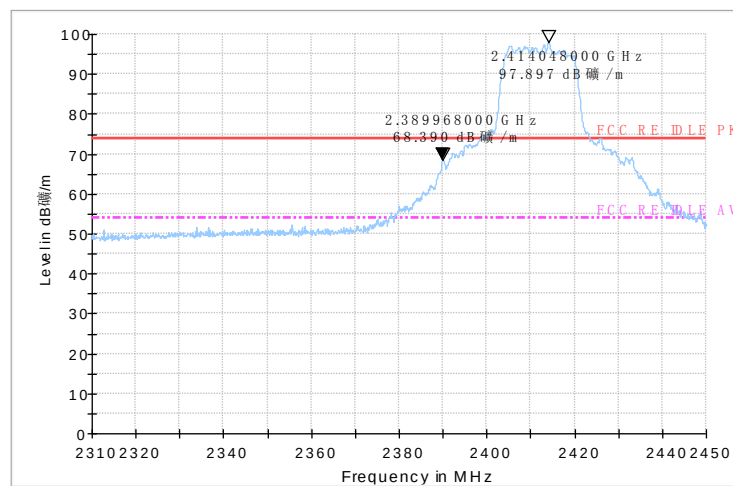


(peak)

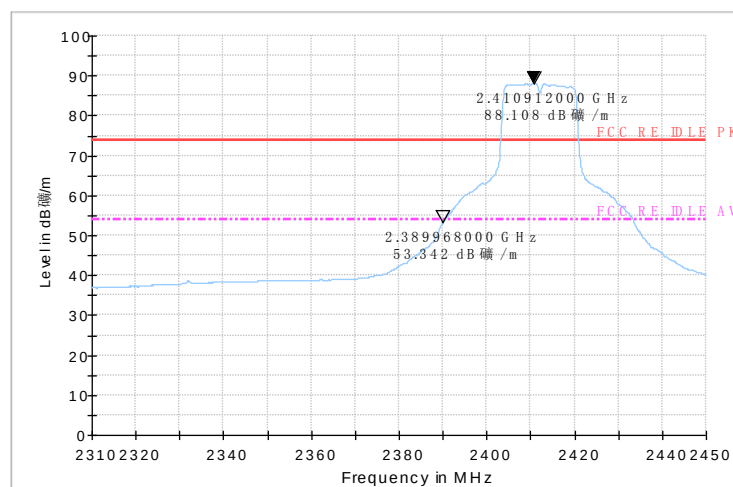


(average)


**Fig.54 Radiated emission (Power): 802.11n, low channel**

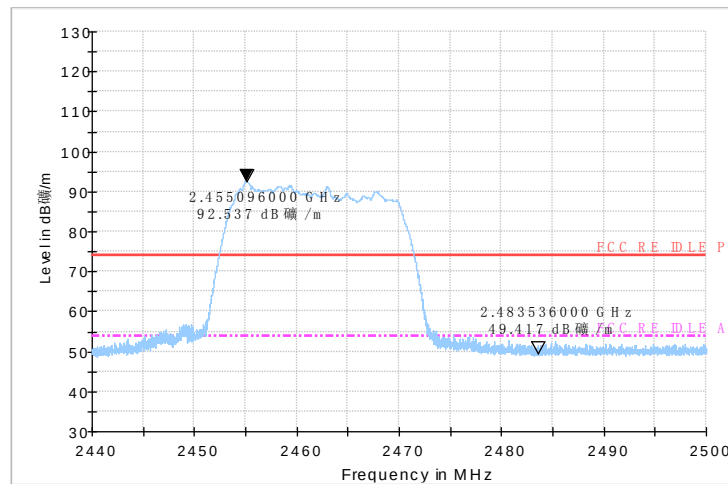


**Fig.55 Radiated emission (Power): 802.11n, high channel**

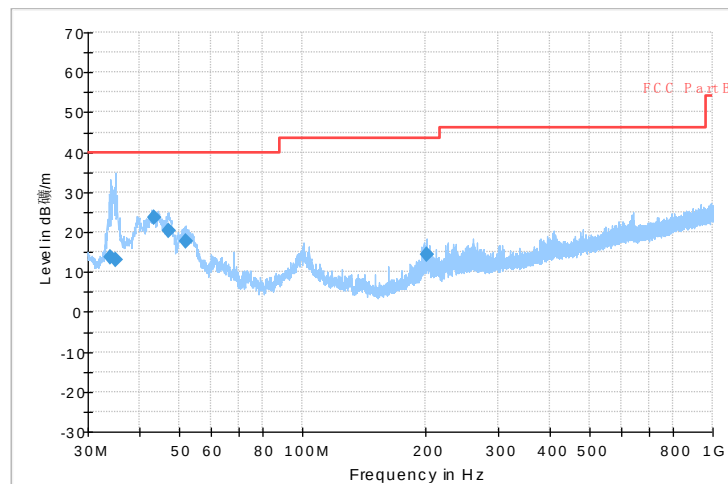


**Fig.56 Radiated Spurious Emission (802.11 n-20MHz,Ch1,30MHz~1GHz)**

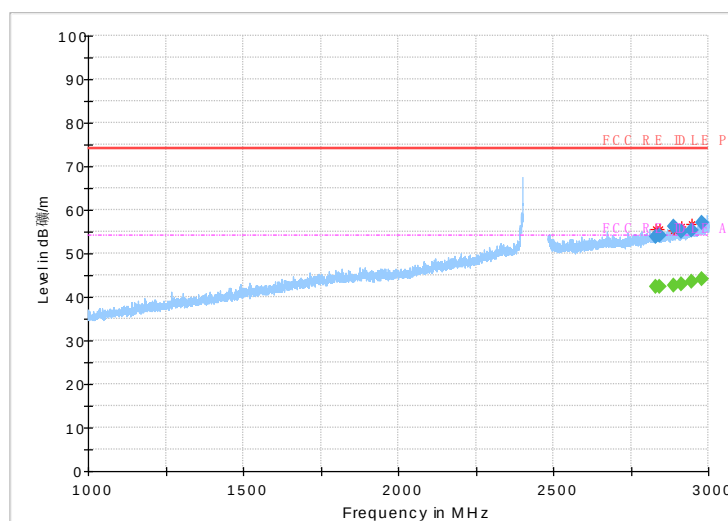

**Fig.57 Radiated Spurious Emission (802.11 n-20MHz,Ch1,1GHz~3GHz)**

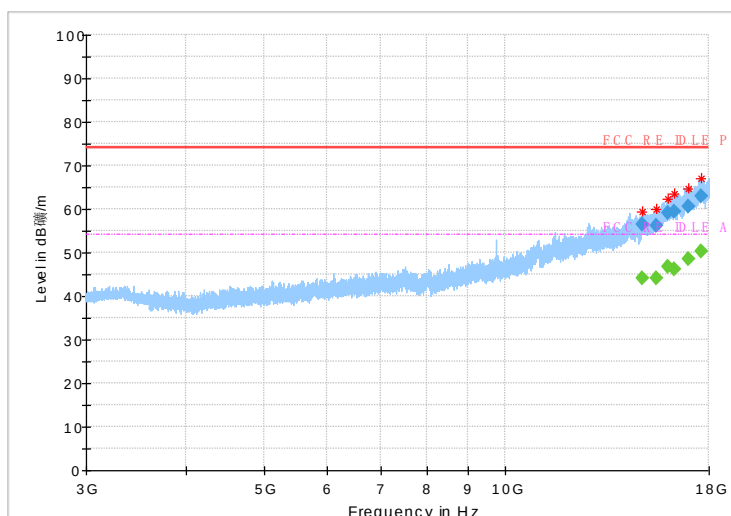

**Fig.58 Radiated Spurious Emission (802.11 n-20MHz,Ch1,3GHz~18GHz)**

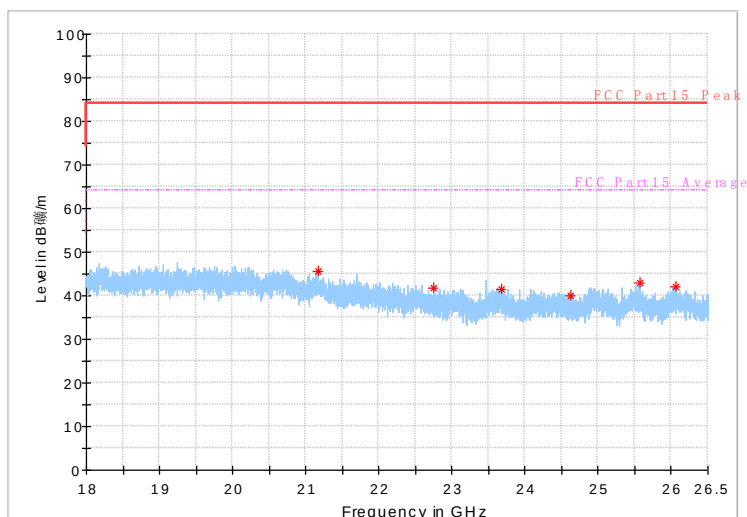

**Fig.59 Radiated emission: GFSK, 18 GHz – 26.5 GHz**

## 7. Test Equipments and Ancillaries Used For Tests

The test equipments and ancillaries used are as follows.

### Conducted test system

| No. | Equipment              | Model    | Serial Number | Manufacturer | Calibration Due date |
|-----|------------------------|----------|---------------|--------------|----------------------|
| 1   | Vector Signal Analyzer | FSQ26    | 101096        | R&S          | 2015-07-06           |
| 2   | DC Power Supply        | ZUP60-14 | LOC-220Z006   | TDL-Lambda   | 2015-01-07           |

### Radiated emission test system

| No. | Equipment                            | Model    | Serial Number | Manufacturer | Calibration Due date |
|-----|--------------------------------------|----------|---------------|--------------|----------------------|
| 1   | Universal Radio Communication Tester | CMU200   | 123126        | R&S          | 2015-07-06           |
| 2   | Test Receiver                        | ESCI     | 101235        | R&S          | 2015-07-06           |
| 3   | Test Receiver                        | ESU40    | 100307        | R&S          | 2015-07-24           |
| 4   | Trilog Antenna                       | VULB9163 | 19-162515     | Schwarzbeck  | 2014-11-10           |
| 5   | Double Ridged Guide Antenna          | ETS-3117 | 135885        | ETS          | 2017-03-01           |
| 6   | 2-Line V-Network                     | ENV216   | 101380        | R&S          | 2015-07-24           |

|    |                                  |          |                 |         |            |
|----|----------------------------------|----------|-----------------|---------|------------|
| 7  | Single Phase Harmonic & Flicker  | DPA500N  | V112610998<br>8 | EM Test | 2015-07-24 |
| 8  | Multifunction AC/DC Power Source | Netwave7 | V112610998<br>9 | EM Test | 2015-07-24 |
| 9  | Audio Analyzer                   | UPV      | 101950          | R&S     | 2015-07-06 |
| 10 | Power Meter                      | NRP2     | 101804          | R&S     | 2015-07-06 |
| 11 | Signal Generator                 | SMB 100A | 105563          | R&S     | 2015-07-06 |

### Anechoic chamber

Fully anechoic chamber by Frankonia German.

## 8. Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

|                              |                                            |
|------------------------------|--------------------------------------------|
| Temperature                  | Min. = 15 °C, Max. = 30 °C                 |
| Relative humidity            | Min. = 30 %, Max. = 60 %                   |
| Shielding effectiveness      | > 110 dB                                   |
| Ground system resistance     | < 0.5 Ω                                    |
| Uniformity of field strength | Between 0 and 6 dB, from 80MHz to 3000 MHz |

**Control room** did not exceed following limits along the EMC testing:

|                   |                            |
|-------------------|----------------------------|
| Temperature       | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. =30 %, Max. = 60 %    |

|                          |          |
|--------------------------|----------|
| Shielding effectiveness  | > 110 dB |
| Electrical insulation    | > 10 kΩ  |
| Ground system resistance | < 0.5 Ω  |

**Fully-anechoic chamber1** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

|                              |                                            |
|------------------------------|--------------------------------------------|
| Temperature                  | Min. = 15 °C, Max. = 30 °C                 |
| Relative humidity            | Min. = 30 %, Max. = 60 %                   |
| Shielding effectiveness      | > 110 dB                                   |
| Electrical insulation        | > 10 kΩ                                    |
| Ground system resistance     | < 0.5 Ω                                    |
| Uniformity of field strength | Between 0 and 6 dB, from 80MHz to 3000 MHz |

**Fully-anechoic chamber2** (Tapered Section: 8.75 meters×3.66 meters×3.66 meters, Rectangular Section: 7.32 meters×3.97 meters×3.66 meters) did not exceed following limits along the EMC testing:

|                              |                                            |
|------------------------------|--------------------------------------------|
| Temperature                  | Min. = 15 °C, Max. = 30 °C                 |
| Relative humidity            | Min. = 35 %, Max. = 60 %                   |
| Shielding effectiveness      | > 110 dB                                   |
| Electrical insulation        | > 10 kΩ                                    |
| Ground system resistance     | < 0.5 Ω                                    |
| Uniformity of field strength | Between 0 and 6 dB, from 30MHz to 40000MHz |

**ANNEX A. Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

**\*\*\*\*\*End The Report\*\*\*\*\***