

Antenna specification datasheet

Manufacturer: STANDARD MERIT INDUSTRIAL LIMITED

Address: 604 Kalok Building, 720 Nathan Road, Kowloon, Hong Kong

Product name: 2.4GHz Antenna L=133mm

Model number: UB01C208J2D3322A

Modification History

Version	Content Revision	Issued by	Date
A	Original version	King	2022-10-14

Content

<i>Item</i>	<i>Description</i>
1.-----	Electrical Specification
2.-----	Test Items and Equipment
3.-----	S Parameter
4.-----	Efficiency and Gain
5.-----	Radiation Pattern
6.-----	Mechanical Specification

1. Electrical Specification:

Characteristics	Specifications	Unit
Outline Dimensions	$\Phi 3.5 \times 208$	mm
Frequency	2400-2500	MHz
Impedance	50	Ω
Machine VSWR	≤ 2.0	
Polarization	Linear Polarization	
Gain	2.0 REF	dBi
Efficiency	> 65	%
Connector Type	/	
Operating temperature	-20℃~+70℃	
Storage Temp	-20℃~+70℃	


2. Test Items and Equipment

	Test items	Test equipment
S Parameter	1.Return Loss 2.VSWR	Network analyzer (Agilent E5071B)
The whole machine of Passive parameters	1.Frequency 2.Gain 3.Radiation Pattern	1.3D microwave darkroom (5m*5m*5m) 2.Network analyzer (Agilent E5071B)
The whole machine of Active parameters	1.TRP 2.TIS	1.3D microwave darkroom (5m*5m*5m) 2.Comprehensive test instrument (CMW500)



3. S Parameter

Frequency (MHz)	Return Loss (dB)	VSWR
2400	-16.83	1.33
2450	-28.26	1.08
2500	-16.7	1.34

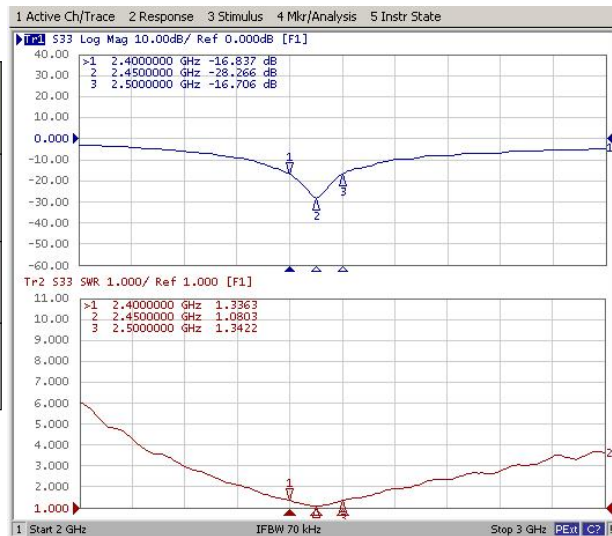


* Voltage Standing Wave Ratio(VSWR)

Return Loss(RL)

$$RL=20*\log_{10}[(VSWR+1)/(VSWR-1)]$$




4. Efficiency and Gain

Frequency (MHz)	2400	2450	2500
Efficiency (%)	71.92	72.78	70.15
Gain (dBi)	2.07	2.37	2

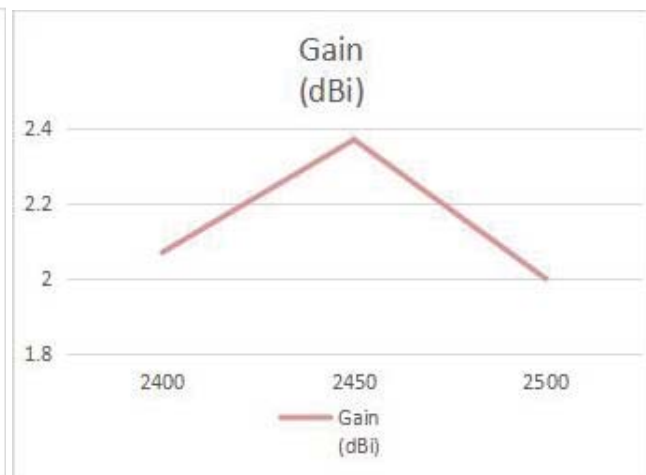


5. Radiation Pattern


5-1 Antenna 3D Radiation Pattern

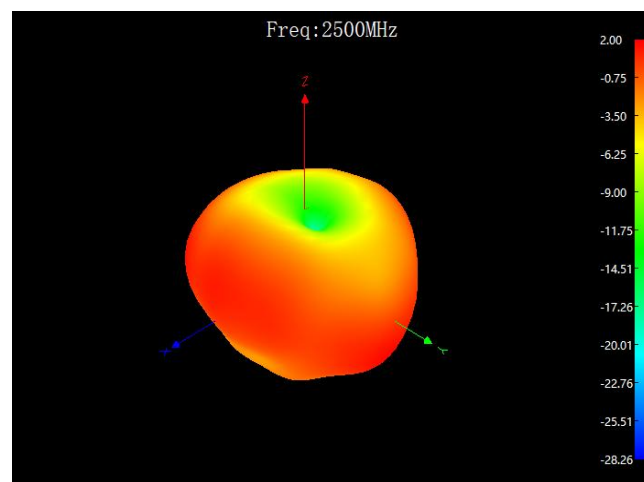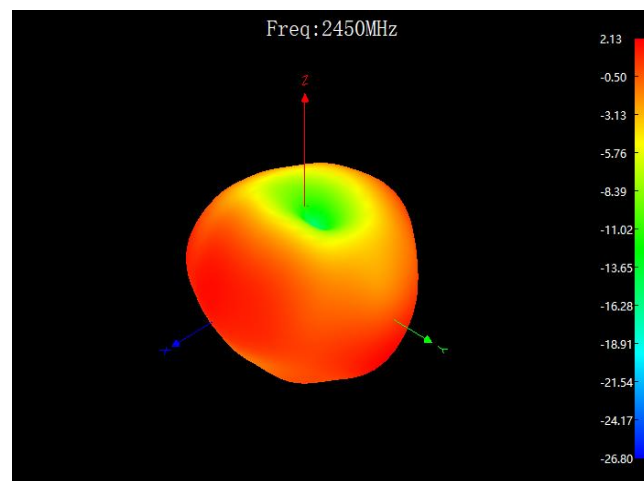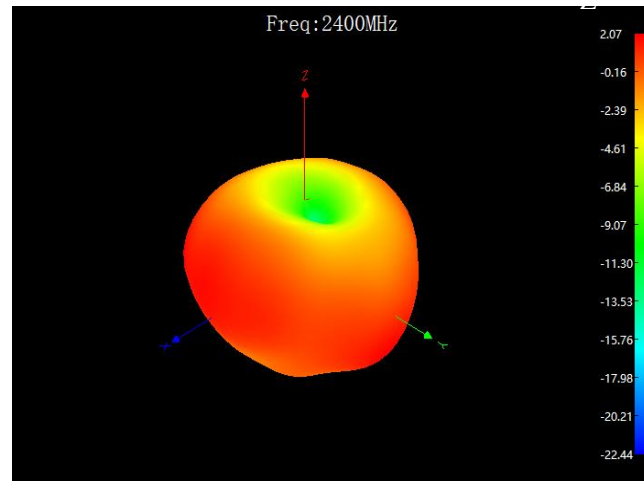


5-2 Antenna 2D Radiation Pattern

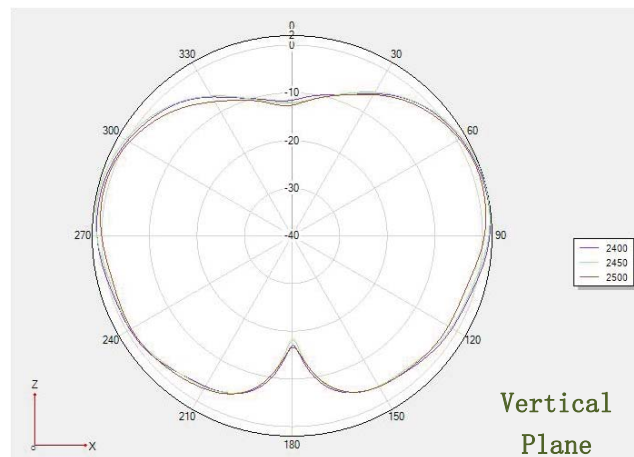

Phi 0 2D

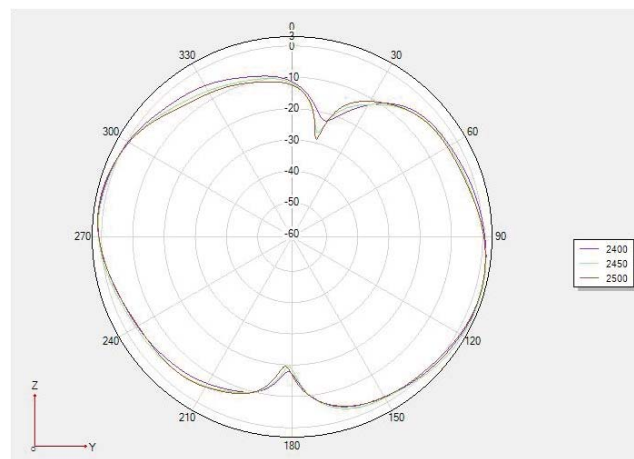

Phi 90 2D

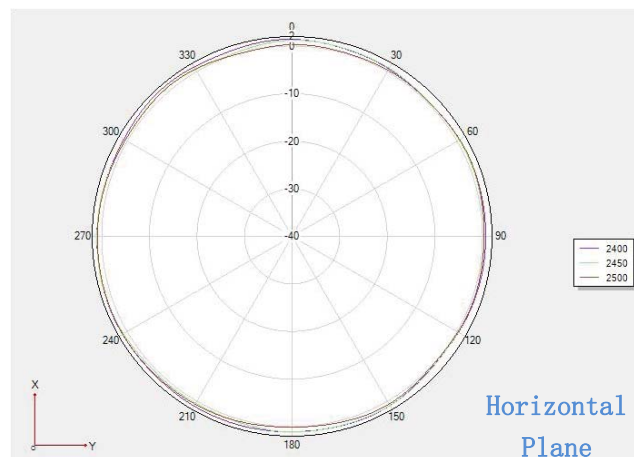

Theta 90 2D

