



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #531

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2437MHz(802.11n40)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 2013/05/09

Time: 17:38:50

Engineer Signature:

Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	51.3004	48.23	-20.77	27.46	40.00	-12.54	QP			
2	155.3643	50.86	-24.34	26.52	43.50	-16.98	QP			
3	441.7425	41.91	-14.88	27.03	46.50	-19.47	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #532

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2422MHz(802.11n40)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 2013/05/09

Time: 17:39:33

Engineer Signature:

Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	51.4807	47.32	-20.78	26.54	40.00	-13.46	QP			
2	161.4742	47.21	-23.69	23.52	43.50	-19.98	QP			
3	441.7426	41.70	-14.88	26.82	46.50	-19.68	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #533

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2422MHz(802.11n40)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz

Date: 2013/05/09

Time: 17:40:19

Engineer Signature:

Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.2760	46.91	-17.29	29.62	40.00	-10.38	QP			
2	45.5347	48.63	-18.52	30.11	40.00	-9.89	QP			
3	51.4806	53.75	-20.74	33.01	40.00	-6.99	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #534

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: 7 Inch Tablet PC/MID

Mode: Operation

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2013/05/09

Time: 17:40:41

Engineer Signature:

Distance: 3m

Note:

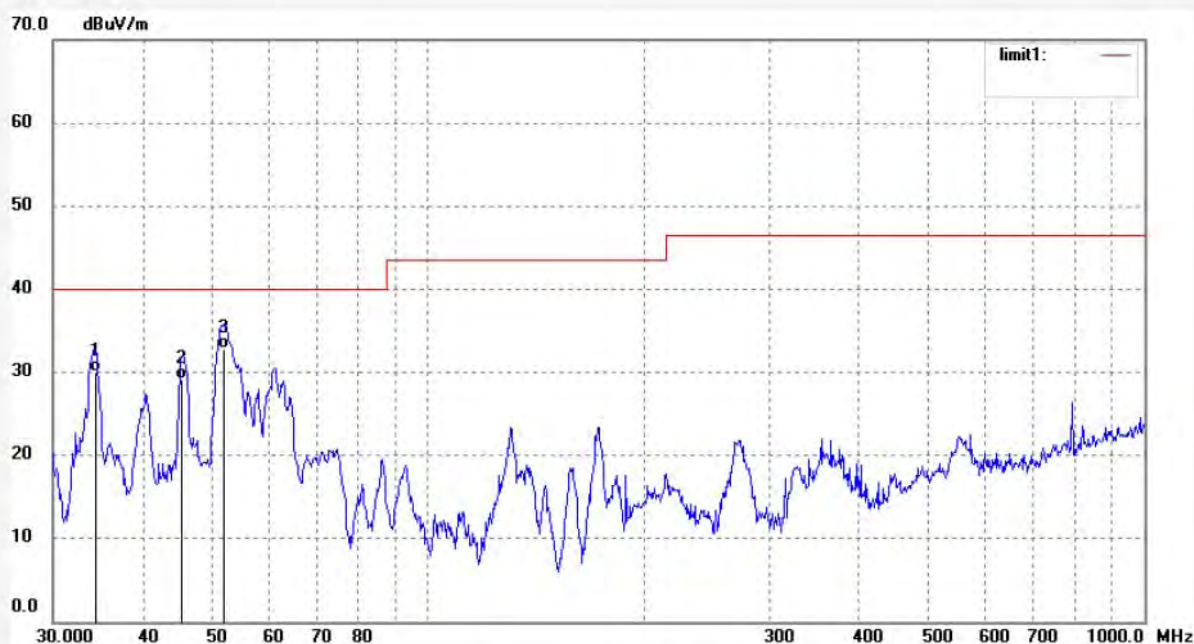

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.3963	47.23	-17.28	29.95	40.00	-10.05	QP			
2	45.3755	47.68	-18.46	29.22	40.00	-10.78	QP			
3	51.8430	53.65	-20.77	32.88	40.00	-7.12	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #535

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 55 %

EUT: 7 Inch Tablet PC/MID

Mode: Operation

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 2013/05/09

Time: 17:41:25

Engineer Signature:

Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	51.3005	48.01	-20.77	27.24	40.00	-12.76	QP			
2	162.6106	48.68	-23.58	25.10	43.50	-18.40	QP			
3	441.7426	42.01	-14.88	27.13	46.50	-19.37	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #715

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2422MHz(802.11n)(40MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 8/57/31

Engineer Signature:

Distance: 3m

Note:

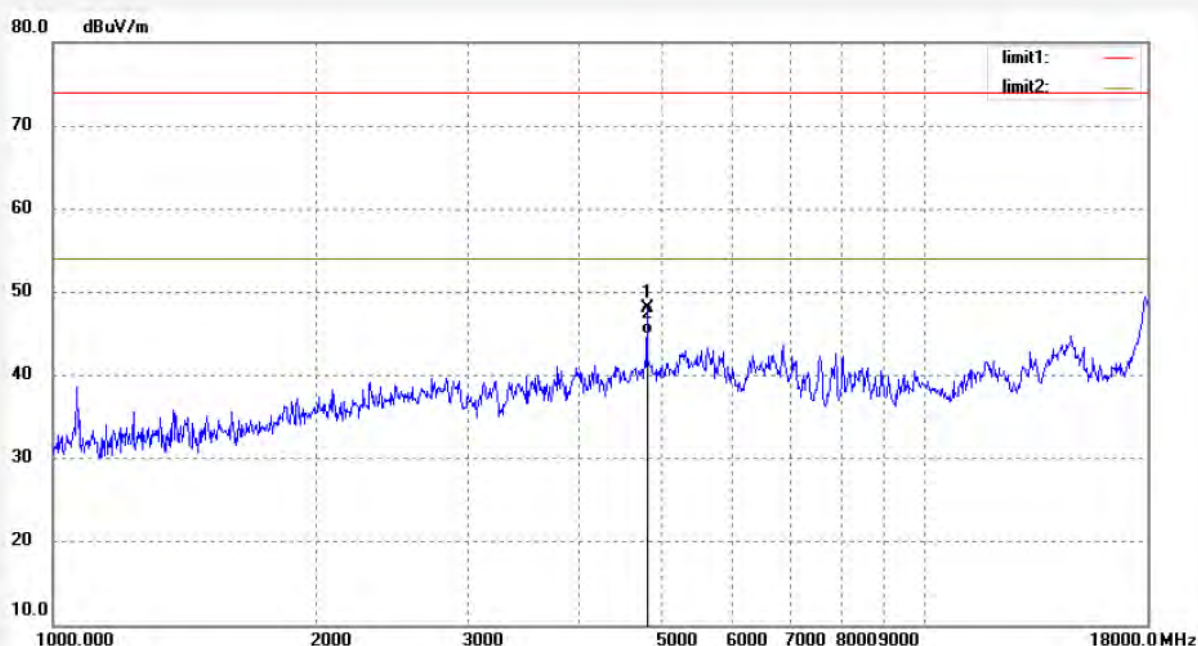

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4844.000	48.31	-0.31	48.00	74.00	-26.00	peak			
2	4844.000	45.21	-0.31	44.90	54.00	-9.10	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #716

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2422MHz(802.11n)(40MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 8/57/54

Engineer Signature:

Distance: 3m

Note:

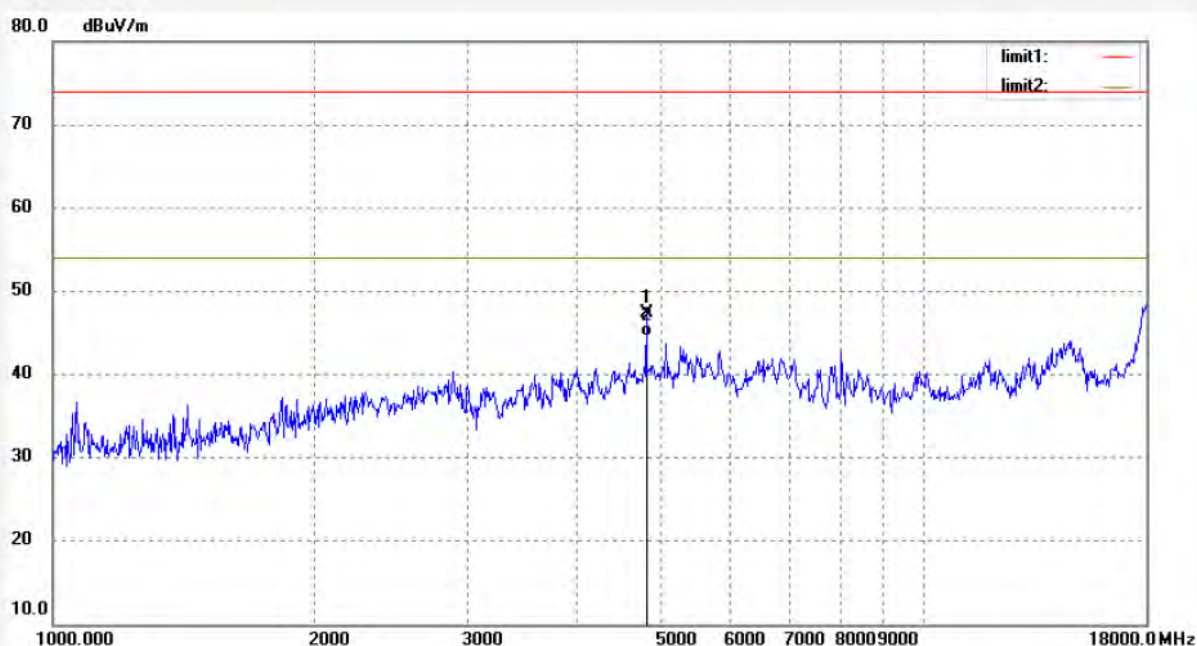

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4844.000	47.74	-0.31	47.43	74.00	-26.57	peak			
2	4844.000	44.89	-0.31	44.58	54.00	-9.42	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #717

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2437MHz(802.11n)(40MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 8/58/14

Engineer Signature:

Distance: 3m

Note:

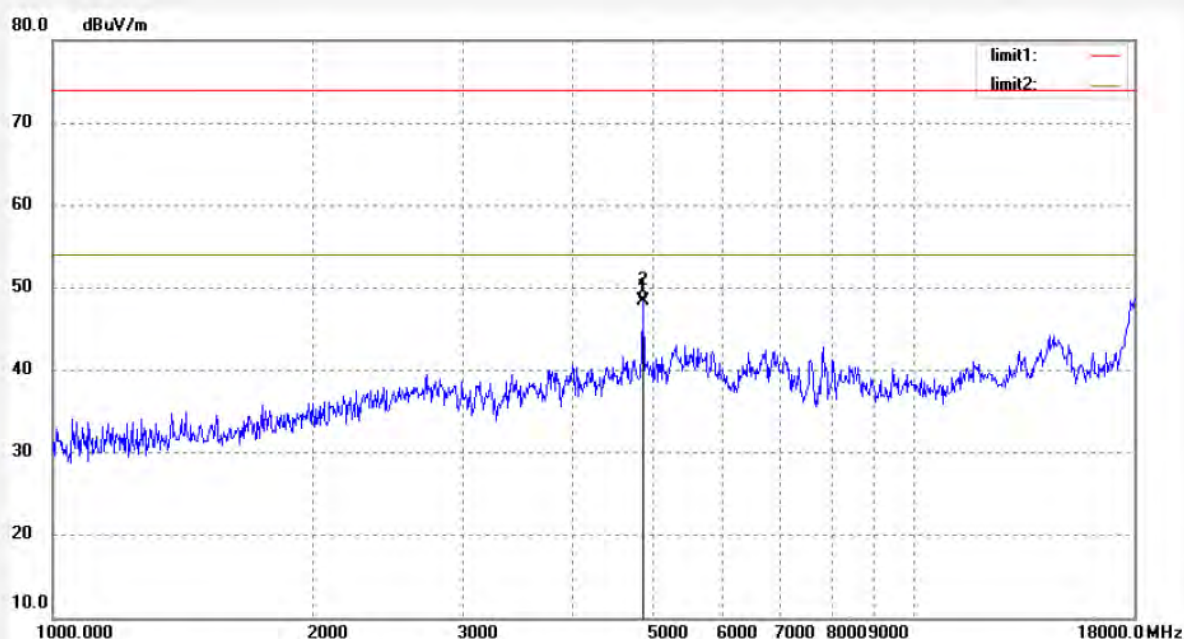

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4874.000	48.49	-0.08	48.41	74.00	-25.59	peak			
2	4874.000	48.49	-0.08	48.41	54.00	-5.59	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #718

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2437MHz(802.11n)(40MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 8/58/41

Engineer Signature:

Distance: 3m

Note:

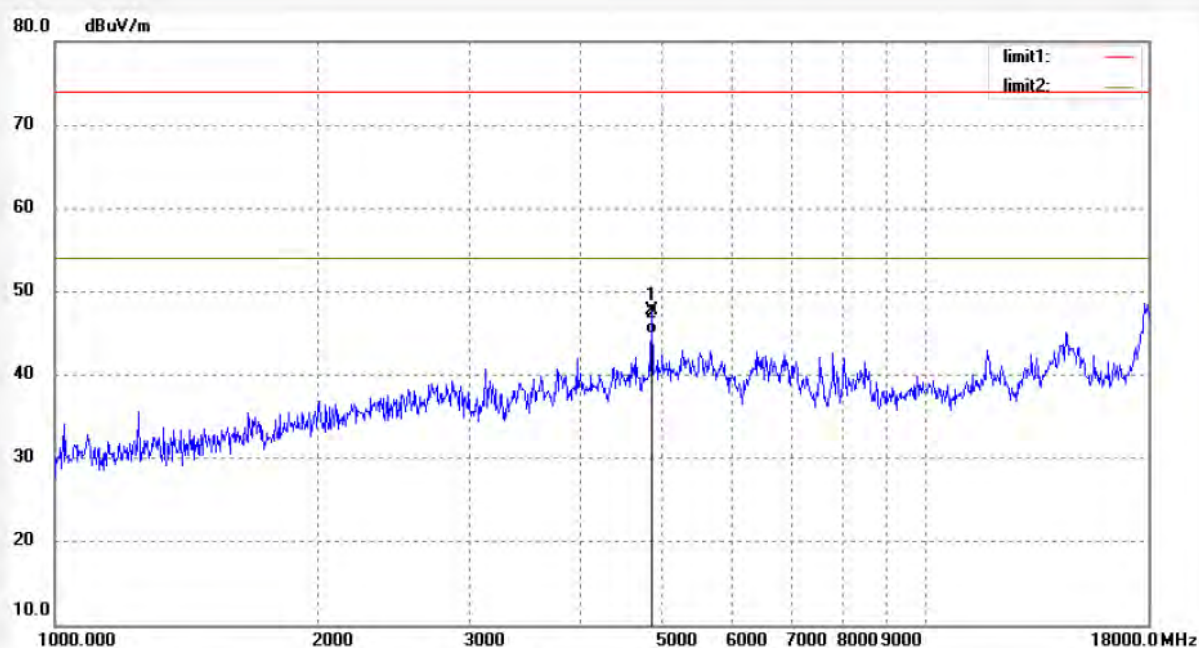

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4874.000	47.74	-0.08	47.66	74.00	-26.34	peak			
2	4874.000	45.02	-0.08	44.94	54.00	-9.06	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #719

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2452MHz(802.11n)(40MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 8/59/11

Engineer Signature:

Distance: 3m

Note:

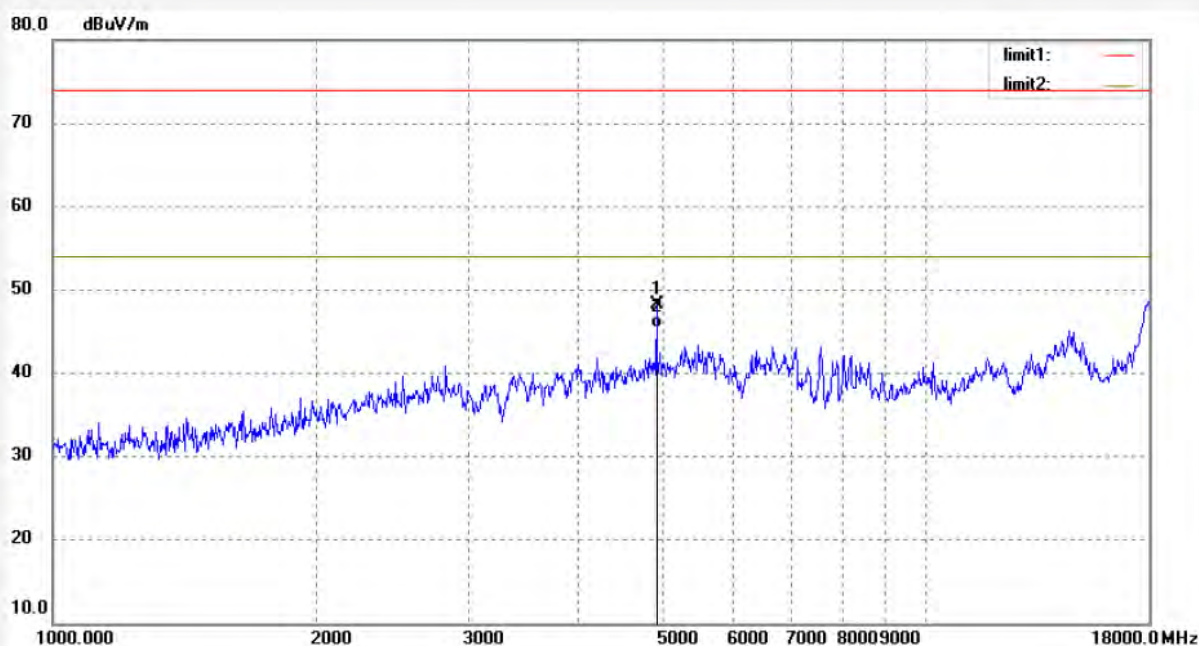

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4904.000	47.96	0.30	48.26	74.00	-25.74	peak			
2	4904.000	45.12	0.30	45.42	54.00	-8.58	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #720

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2462MHz(802.11n)(40MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 8/59/29

Engineer Signature:

Distance: 3m

Note:

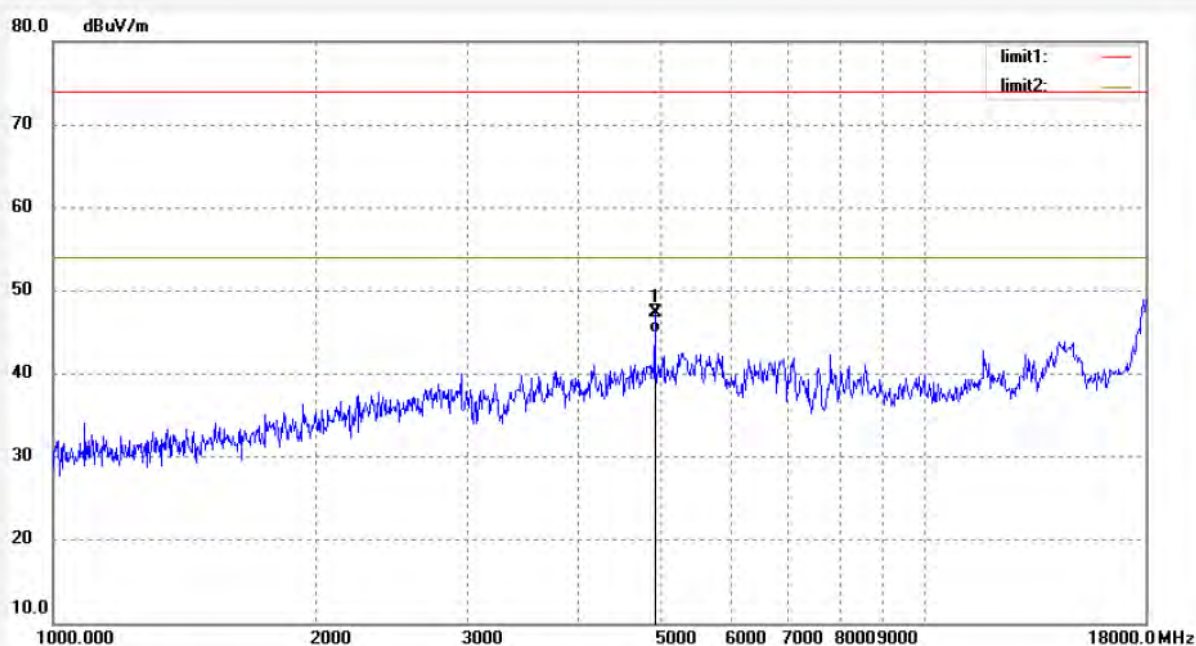

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4904.000	47.08	0.30	47.38	74.00	-26.62	peak			
2	4904.000	44.65	0.30	44.95	54.00	-9.05	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #721

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2462MHz(802.11n)(20MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 8/59/50

Engineer Signature:

Distance: 3m

Note:

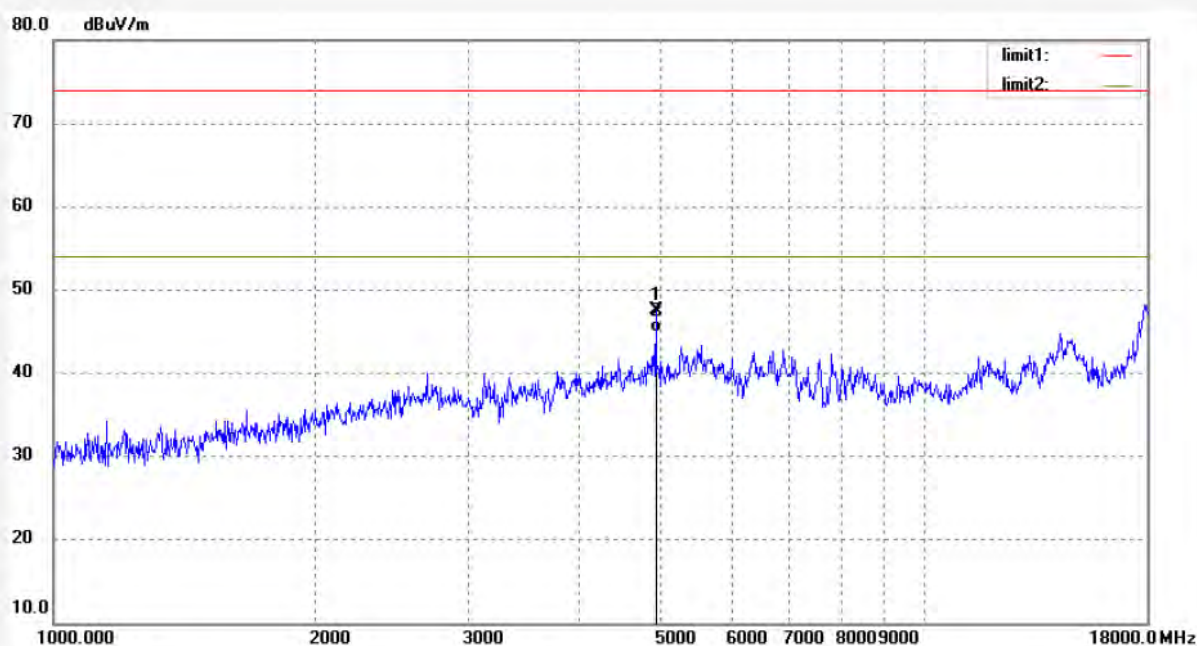

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4924.000	47.23	0.30	47.53	74.00	-26.47	peak			
2	4924.000	44.68	0.30	44.98	54.00	-9.02	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #722

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2462MHz(802.11n)(20MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/03/20

Engineer Signature:

Distance: 3m

Note:

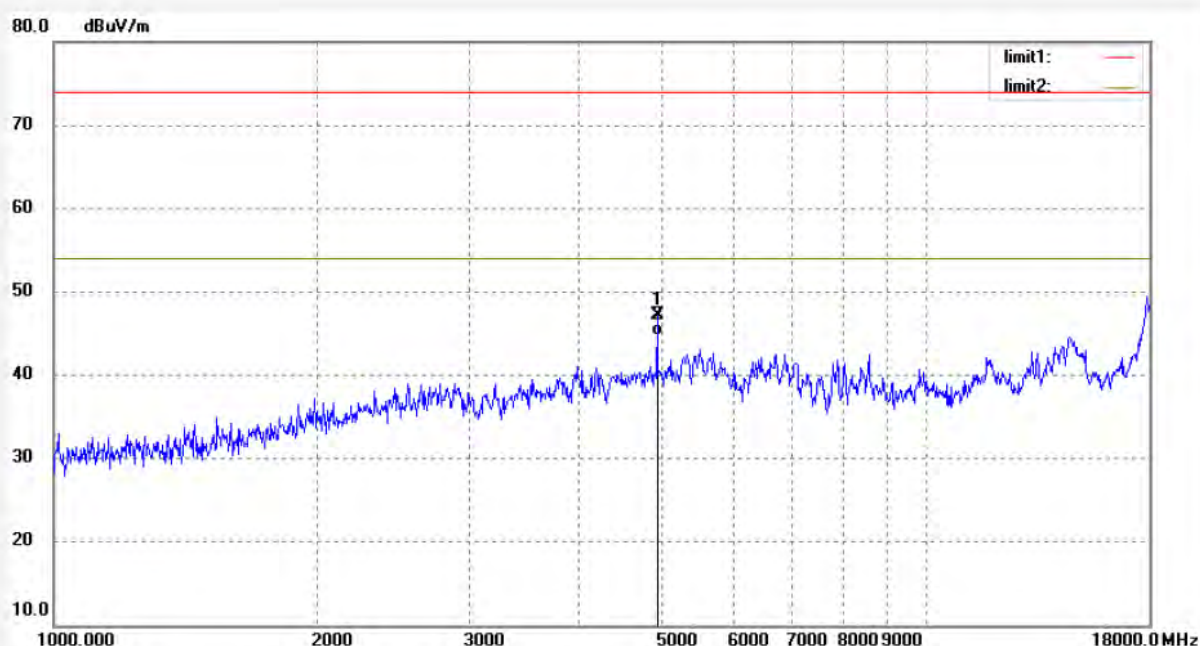

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4924.000	46.91	0.30	47.21	74.00	-26.79	peak			
2	4924.000	44.36	0.30	44.66	54.00	-9.34	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #723

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2437MHz(802.11n)(20MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/03/39

Engineer Signature:

Distance: 3m

Note:

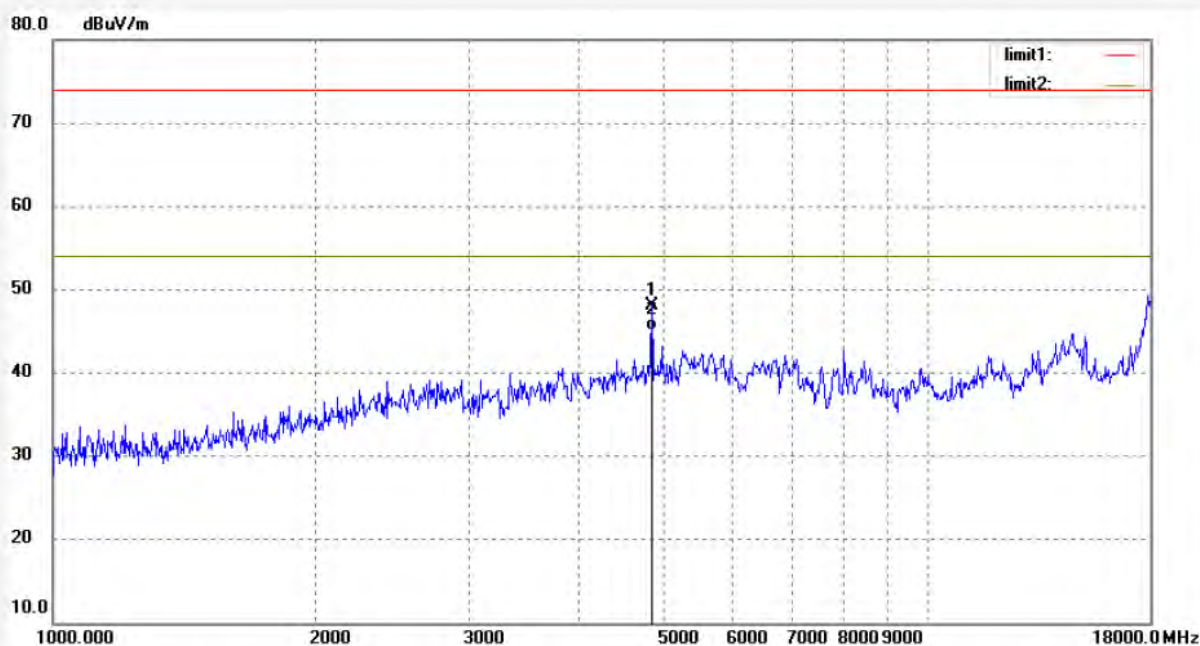

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4874.000	48.23	-0.08	48.15	74.00	-25.85	peak			
2	4874.000	45.15	-0.08	45.07	54.00	-8.93	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #724

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2437MHz(802.11n)(20MHz)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/04/08

Engineer Signature:

Distance: 3m

Note:

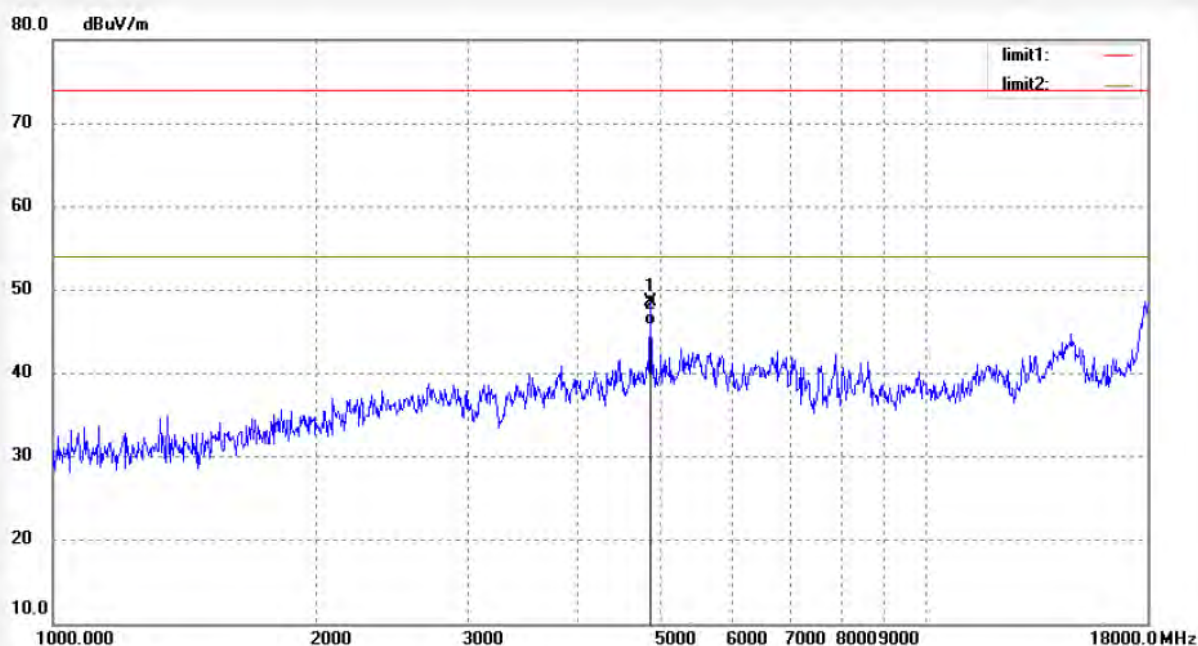

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4874.000	48.66	-0.08	48.58	74.00	-25.42	peak			
2	4874.000	45.87	-0.08	45.79	54.00	-8.21	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #725
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 60 %
EUT: 7 Inch Tablet PC/MID
Mode: TX 2412MHz(802.11n)(20MHz)
Model: APRIL T7
Manufacturer: April

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 13/05/13/
Time: 9/04/30
Engineer Signature:
Distance: 3m

Note:

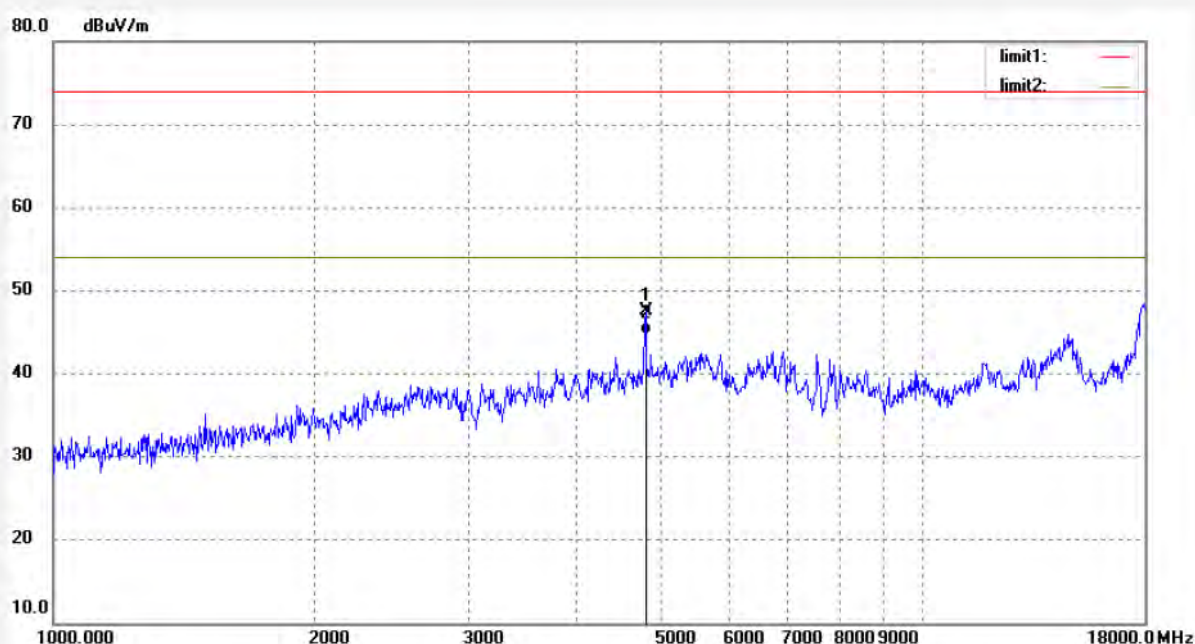

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4824.000	47.76	-0.31	47.45	74.00	-26.55	peak			
2	4824.000	45.02	-0.31	44.71	54.00	-9.29	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #726
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 60 %
EUT: 7 Inch Tablet PC/MID
Mode: TX 2412MHz(802.11n)(20MHz)
Model: APRIL T7
Manufacturer: April

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/05/13/
Time: 9/04/53
Engineer Signature:
Distance: 3m

Note:

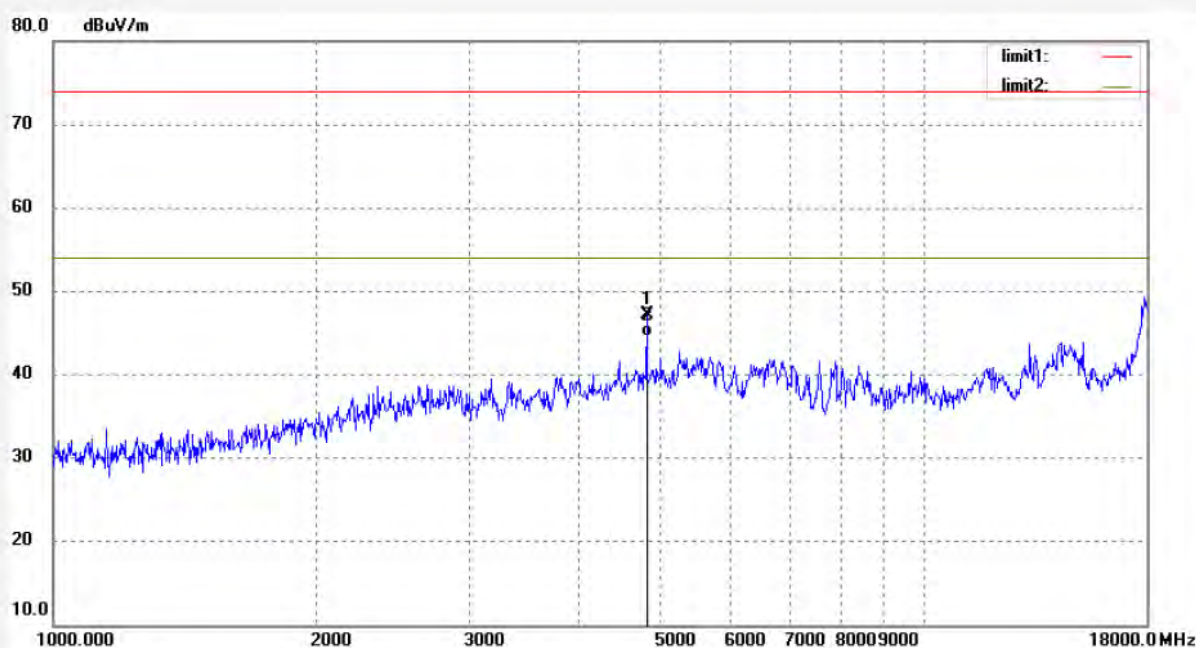

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4824.000	47.53	-0.31	47.22	74.00	-26.78	peak			
2	4824.000	44.89	-0.31	44.58	54.00	-9.42	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #727

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2462MHz(802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/05/17

Engineer Signature:

Distance: 3m

Note:

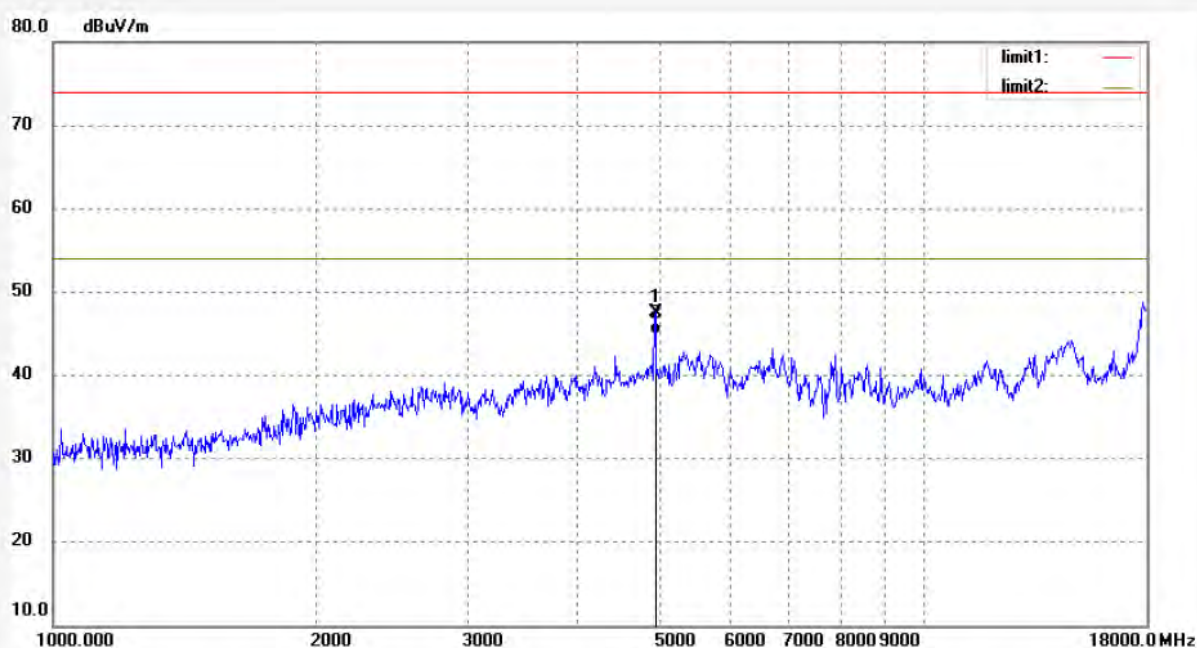

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4924.000	47.21	0.30	47.51	74.00	-26.49	peak			
2	4924.000	44.56	0.30	44.86	54.00	-9.14	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #728

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2462MHz(802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/05/32

Engineer Signature:

Distance: 3m

Note:

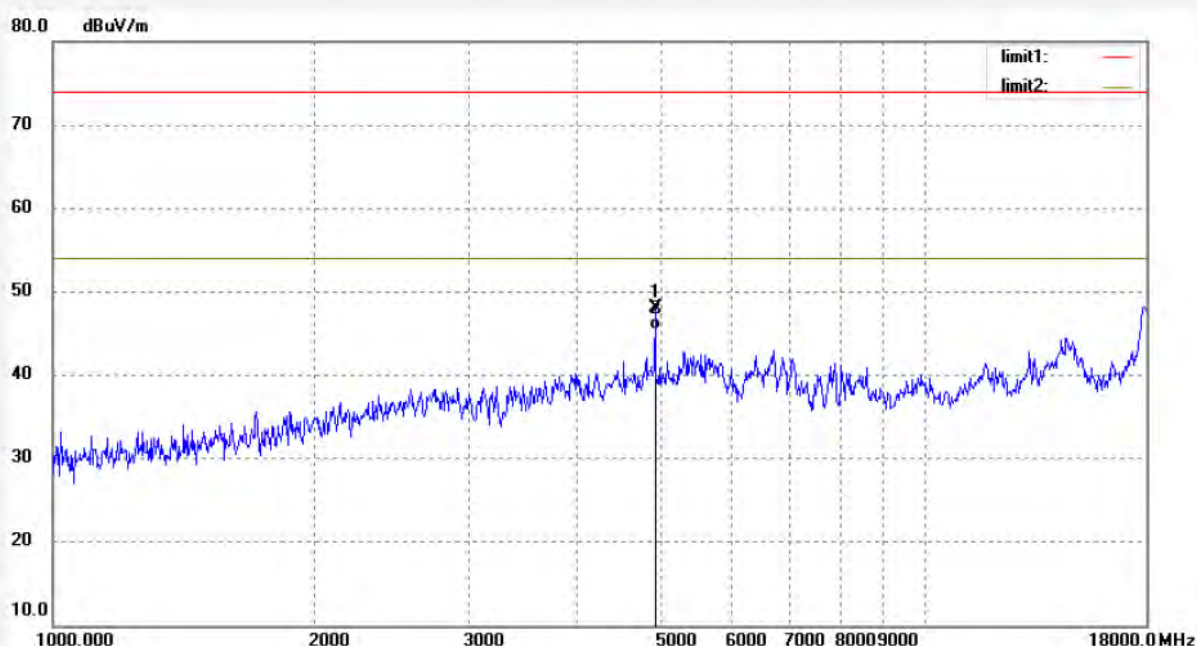

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4924.000	47.74	0.30	48.04	74.00	-25.96	peak			
2	4924.000	45.12	0.30	45.42	54.00	-8.58	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #729

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2437MHz(802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/05/51

Engineer Signature:

Distance: 3m

Note:

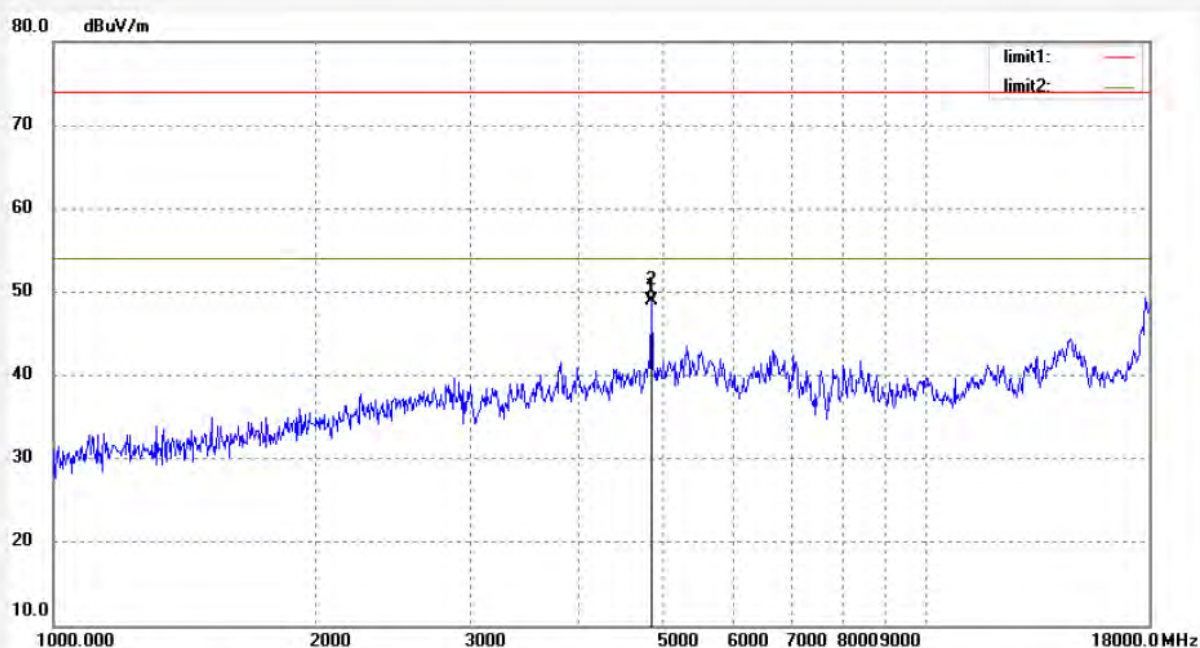

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4874.000	48.94	-0.08	48.86	74.00	-25.14	peak			
2	4874.000	48.94	-0.08	48.86	54.00	-5.14	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #730

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2437MHz(802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/06/13

Engineer Signature:

Distance: 3m

Note:

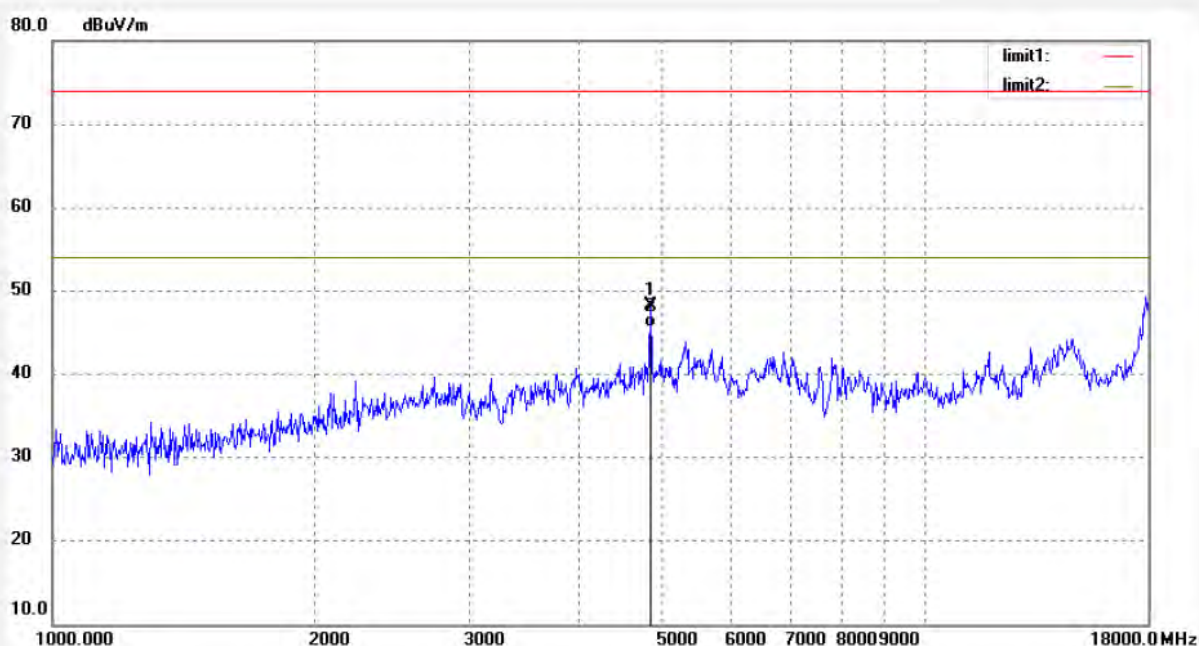

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4874.000	48.33	-0.08	48.25	74.00	-25.75	peak			
2	4874.000	45.67	-0.08	45.59	54.00	-8.41	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #731

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2412MHz(802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/06/37

Engineer Signature:

Distance: 3m

Note:

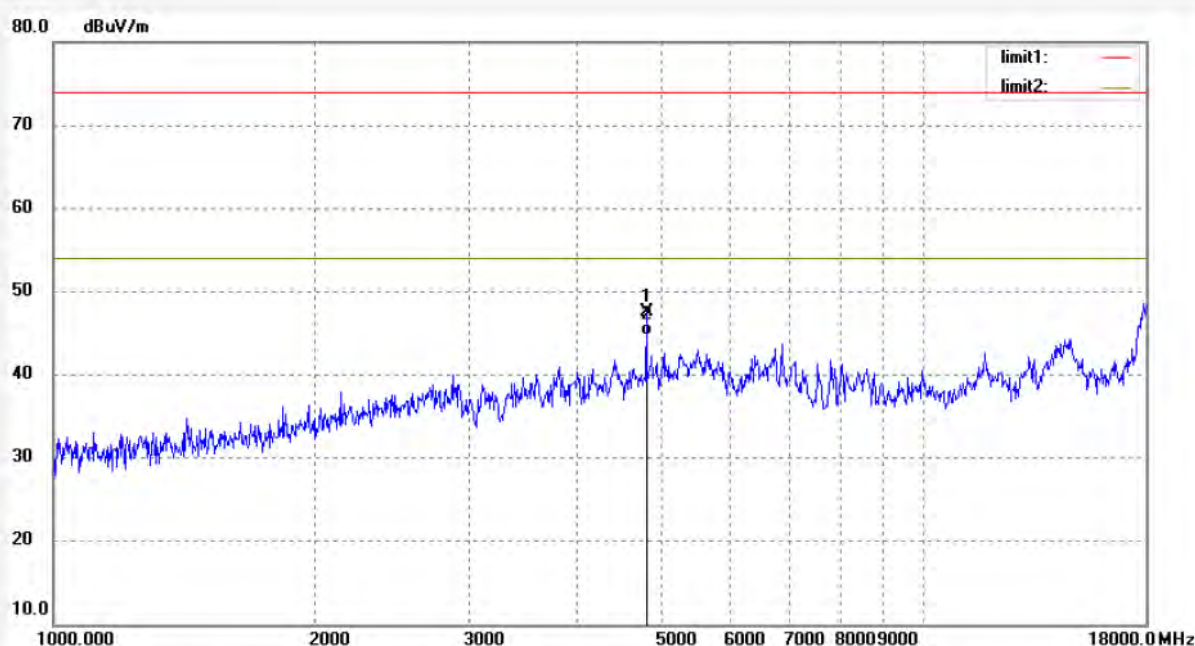

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4824.000	47.80	-0.31	47.49	74.00	-26.51	peak			
2	4824.000	45.02	-0.31	44.71	54.00	-9.29	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #732

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2412MHz(802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/06/57

Engineer Signature:

Distance: 3m

Note:

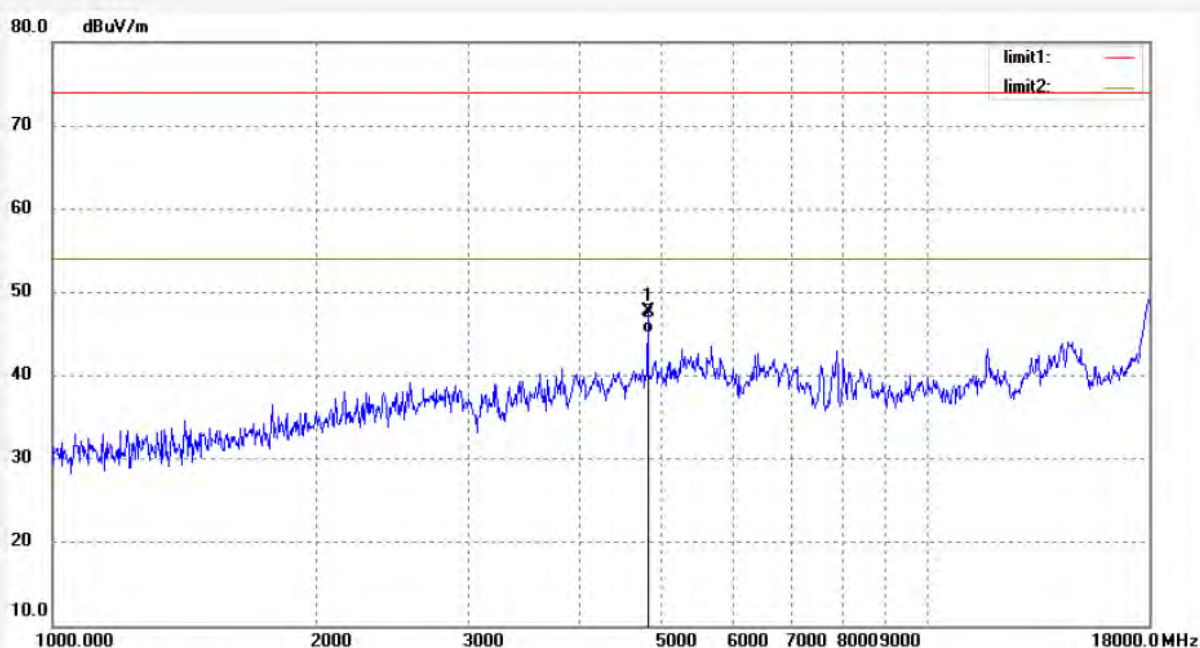

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4824.000	48.07	-0.31	47.76	74.00	-26.24	peak			
2	4824.000	45.36	-0.31	45.05	54.00	-8.95	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #733

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2412MHz(802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/07/19

Engineer Signature:

Distance: 3m

Note:

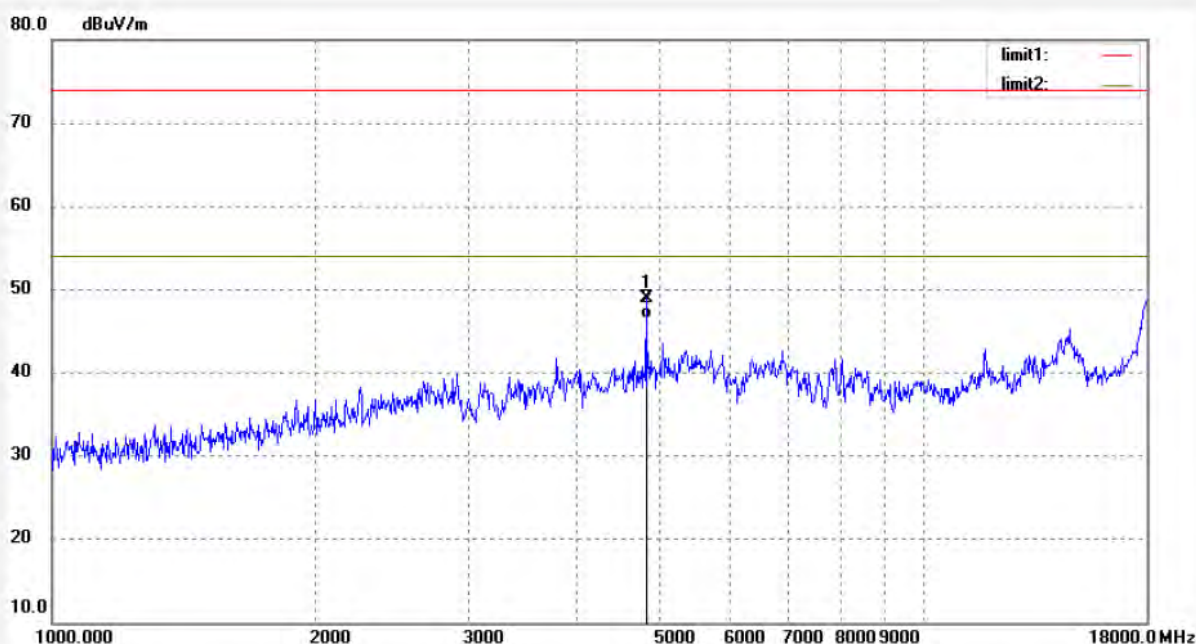

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4824.000	49.26	-0.31	48.95	74.00	-25.05	peak			
2	4824.000	46.78	-0.31	46.47	54.00	-7.53	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #734

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2412MHz(802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/07/38

Engineer Signature:

Distance: 3m

Note:

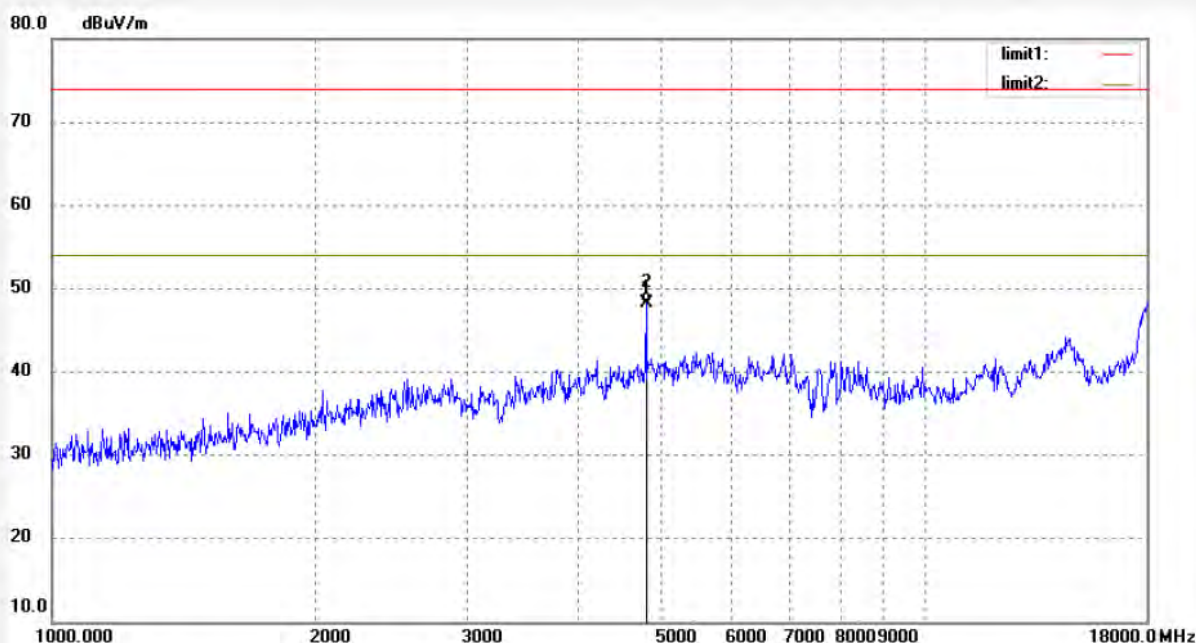

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4824.000	48.49	-0.31	48.18	74.00	-25.82	peak			
2	4824.000	48.49	-0.31	48.18	54.00	-5.82	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #735
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 60 %
EUT: 7 Inch Tablet PC/MID
Mode: TX 2437MHz(802.11b)
Model: APRIL T7
Manufacturer: April

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/05/13/
Time: 9/08/01
Engineer Signature:
Distance: 3m

Note:

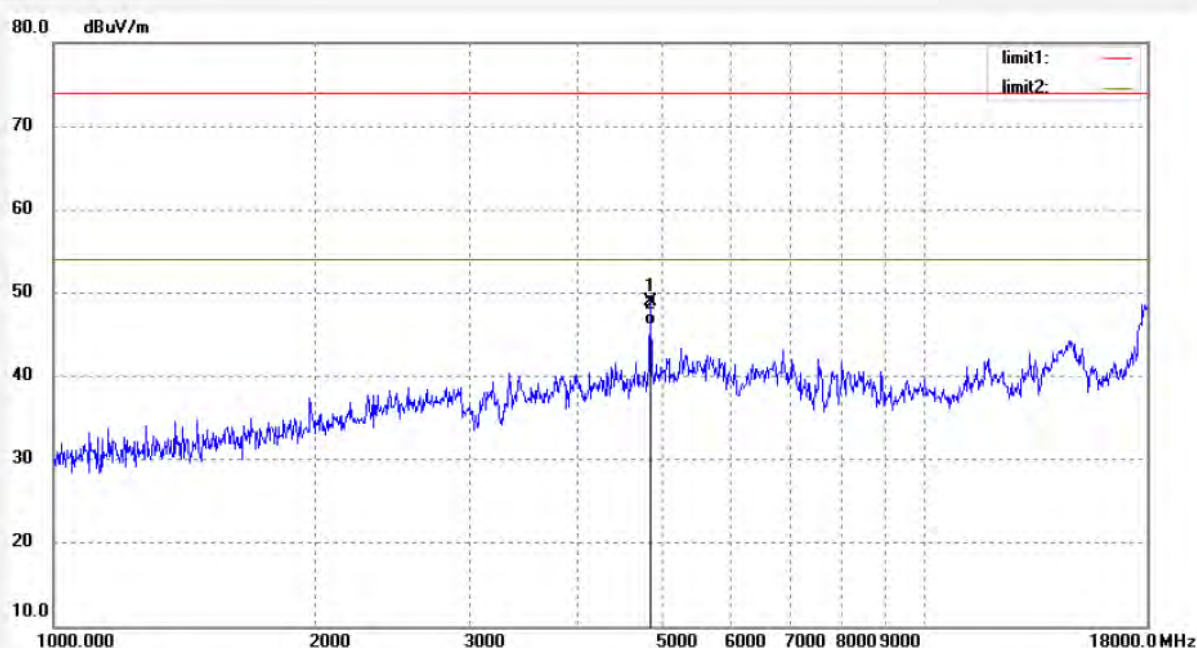

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4874.000	48.94	-0.08	48.86	74.00	-25.14	peak			
2	4874.000	46.25	-0.08	46.17	54.00	-7.83	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #736

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2437MHz(802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/08/28

Engineer Signature:

Distance: 3m

Note:

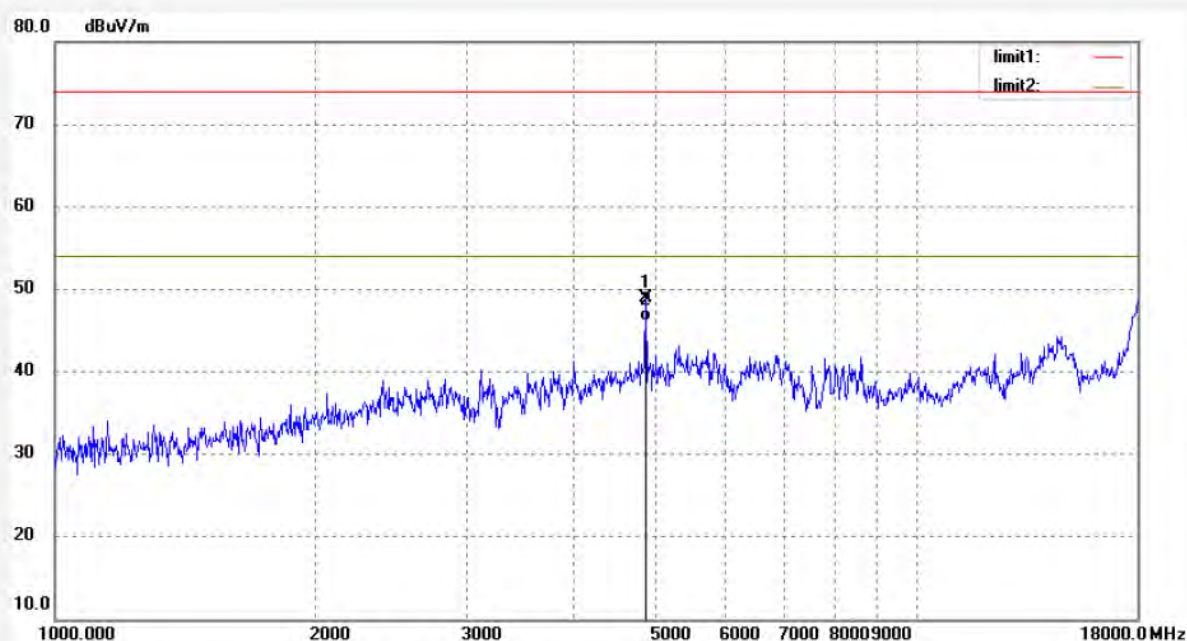

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4874.000	49.06	-0.08	48.98	74.00	-25.02	peak			
2	4874.000	46.23	-0.08	46.15	54.00	-7.85	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: alen #737

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 26 C / 60 %

EUT: 7 Inch Tablet PC/MID

Mode: TX 2462MHz(802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/05/13/

Time: 9/08/43

Engineer Signature:

Distance: 3m

Note:

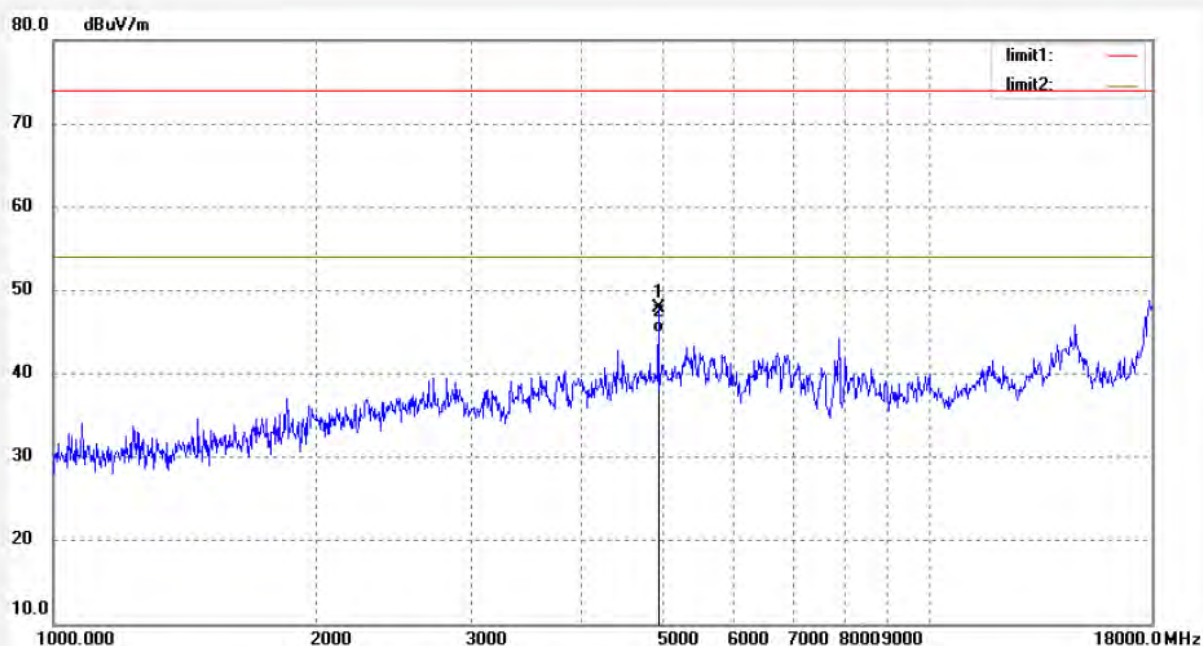

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4924.000	47.54	0.30	47.84	74.00	-26.16	peak			
2	4924.000	44.65	0.30	44.95	54.00	-9.05	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #738
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 60 %
EUT: 7 Inch Tablet PC/MID
Mode: TX 2462MHz(802.11b)
Model: APRIL T7
Manufacturer: April

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 13/05/13/
Time: 9/09/03
Engineer Signature:
Distance: 3m

Note:

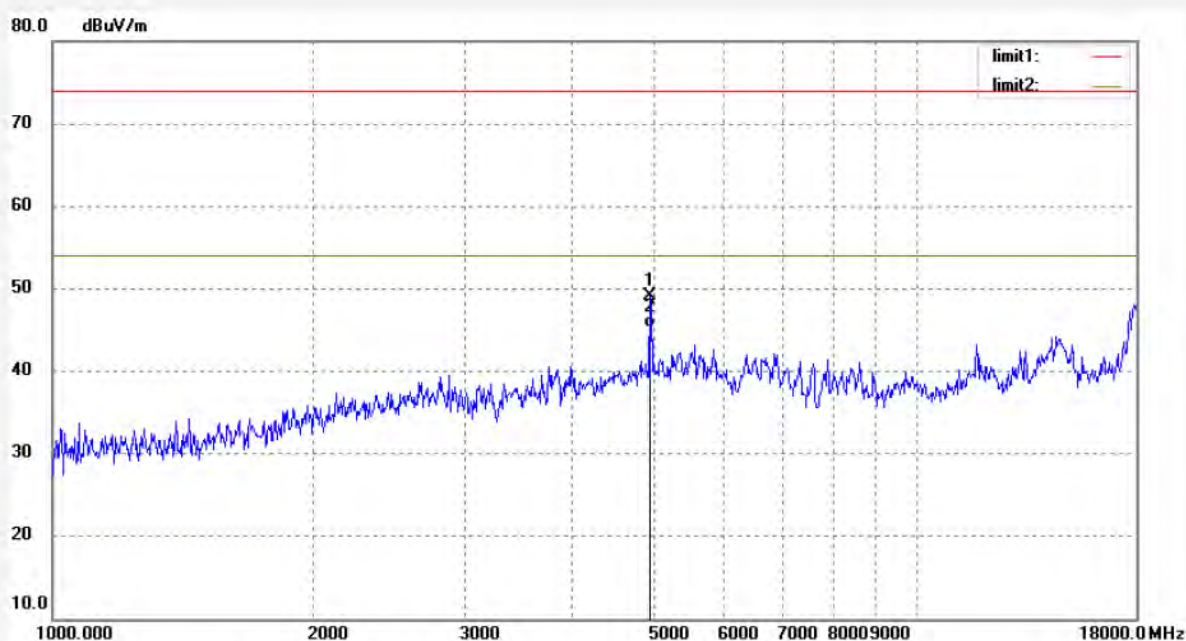

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4924.000	48.76	0.30	49.06	74.00	-24.94	peak			
2	4924.000	45.01	0.30	45.31	54.00	-8.69	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #670

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 1 (802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:07:15

Engineer Signature:

Distance: 3m

Note:

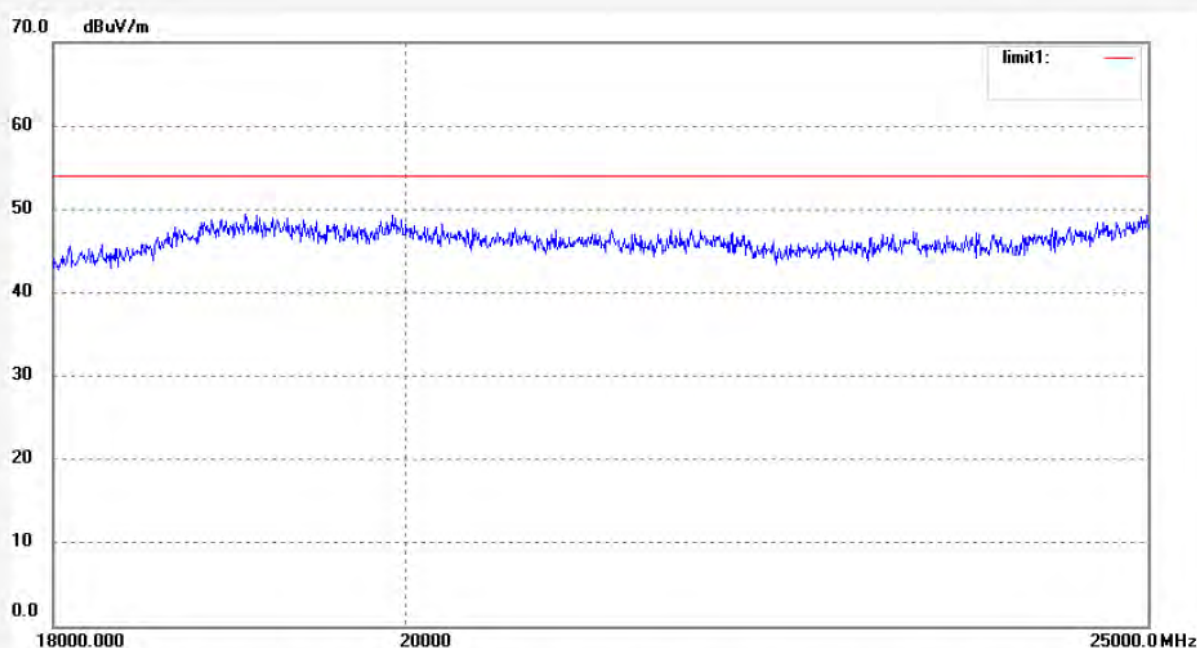

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #671

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 1 (802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:09:22

Engineer Signature:

Distance: 3m

Note:

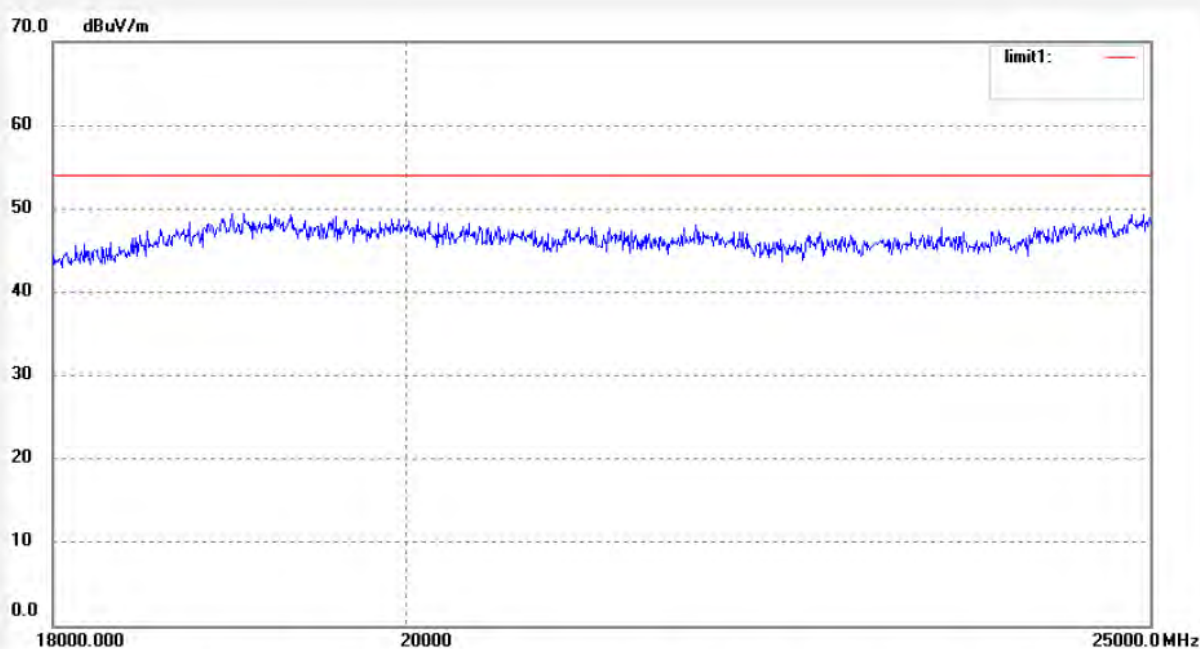

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #672

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 6 (802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:14:45

Engineer Signature:

Distance: 3m

Note:

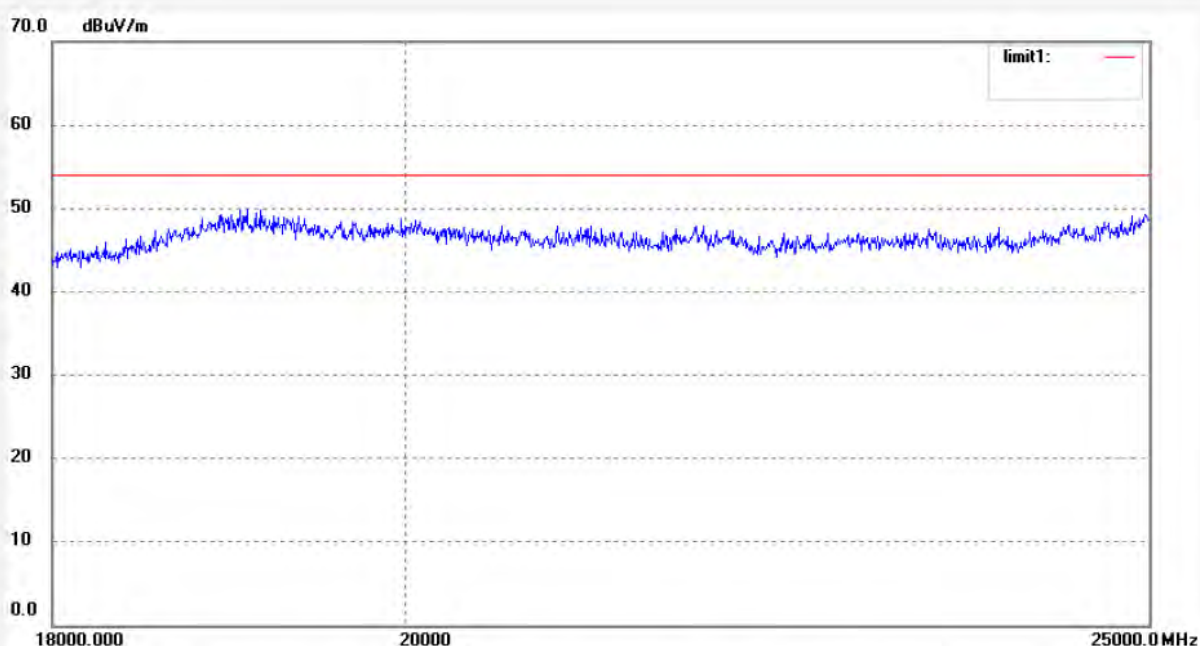

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #673

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 6 (802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:18:36

Engineer Signature:

Distance: 3m

Note:

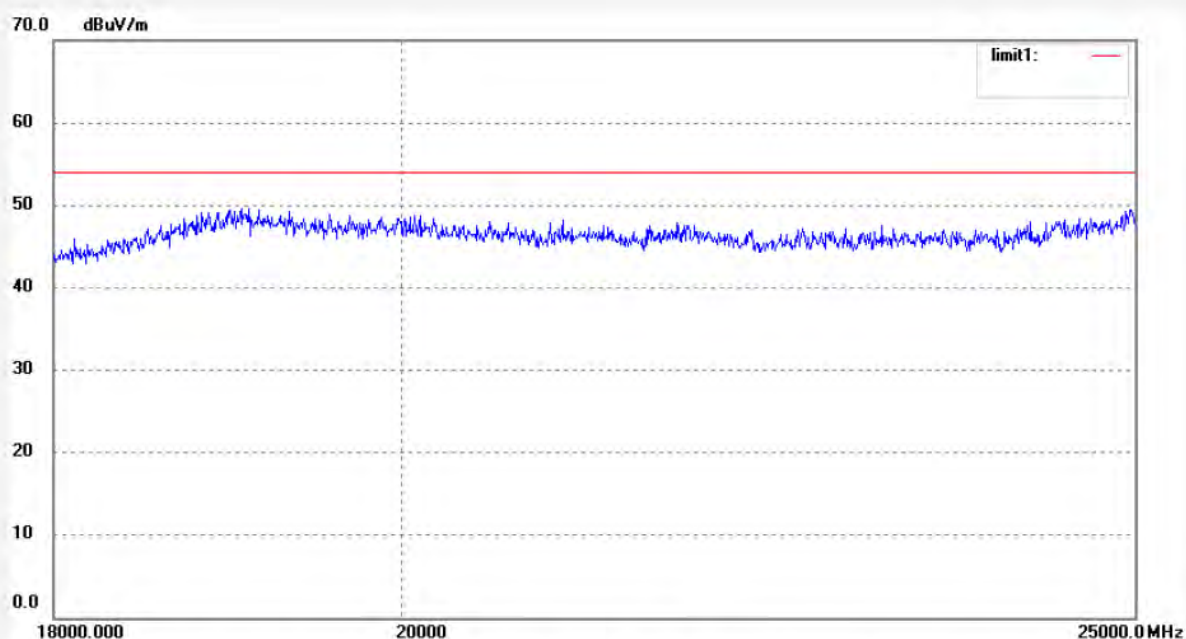

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #674

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 11 (802.11b)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:23:55

Engineer Signature:

Distance: 3m

Note:

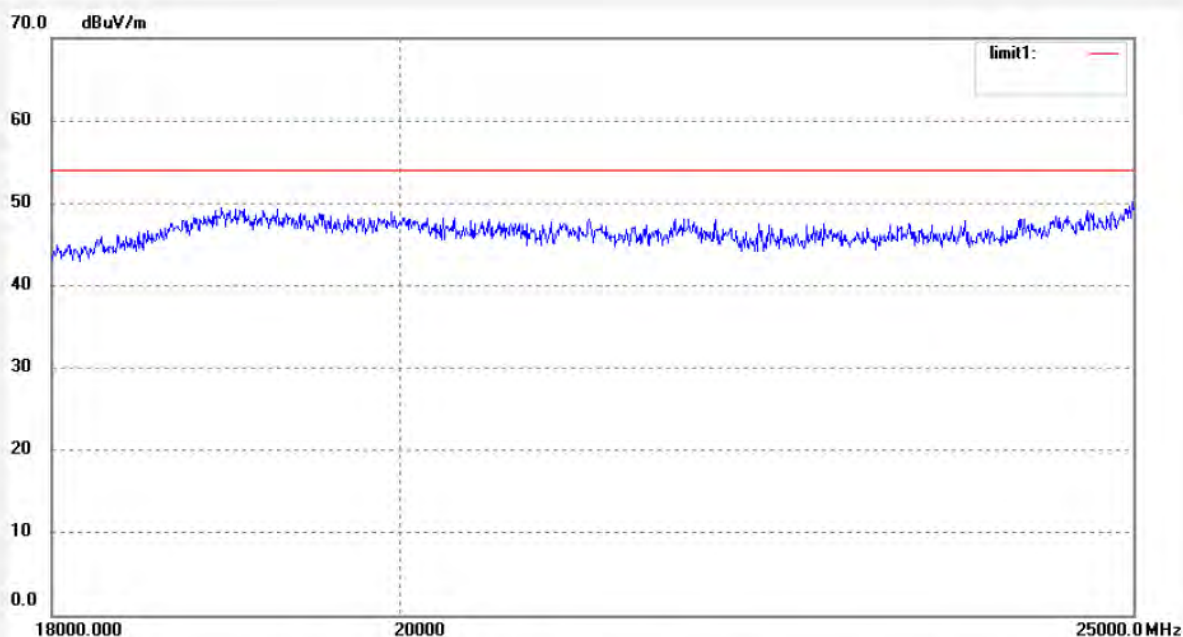

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN#675	Polarization: Vertical
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/5/09/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 11:27:11
EUT: 7 Inch Tablet PC/MID	Engineer Signature:
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: APRIL T7	
Manufacturer: April	

Note:

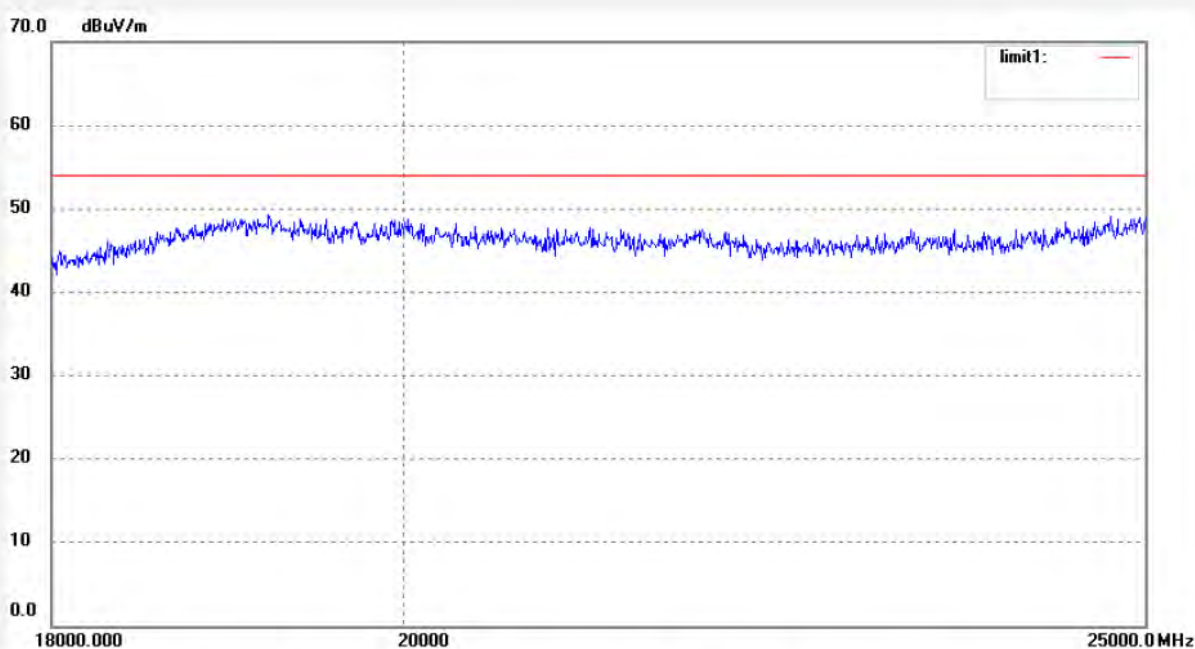

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #676

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 1 (802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:32:05

Engineer Signature:

Distance: 3m

Note:

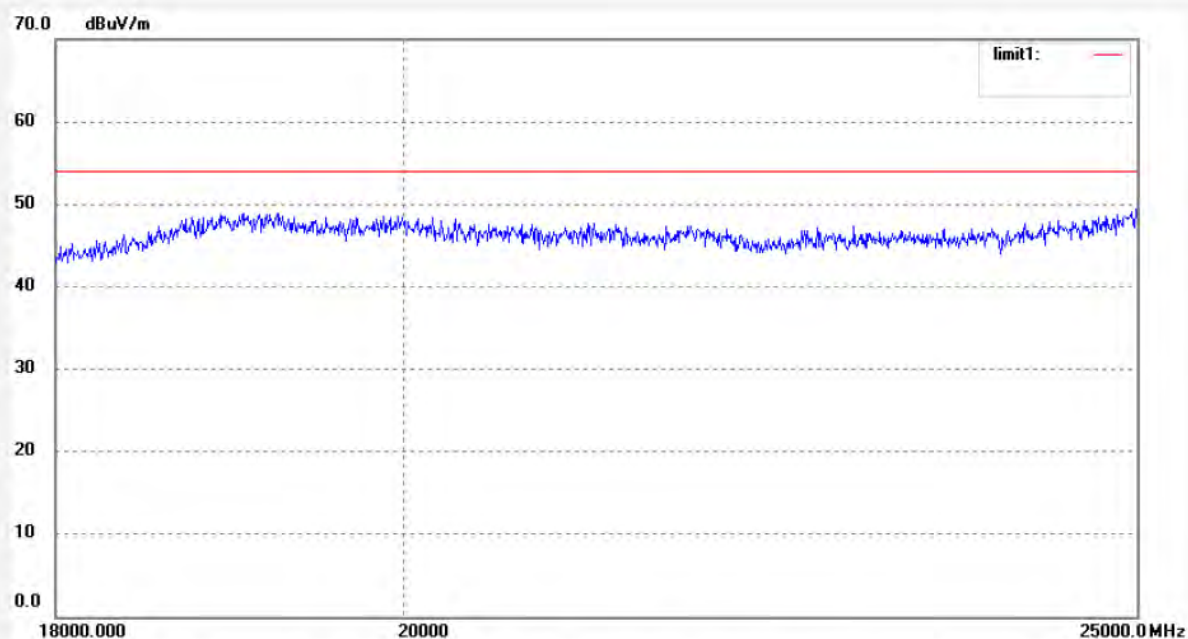

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #677

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 1 (802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:35:56

Engineer Signature:

Distance: 3m

Note:

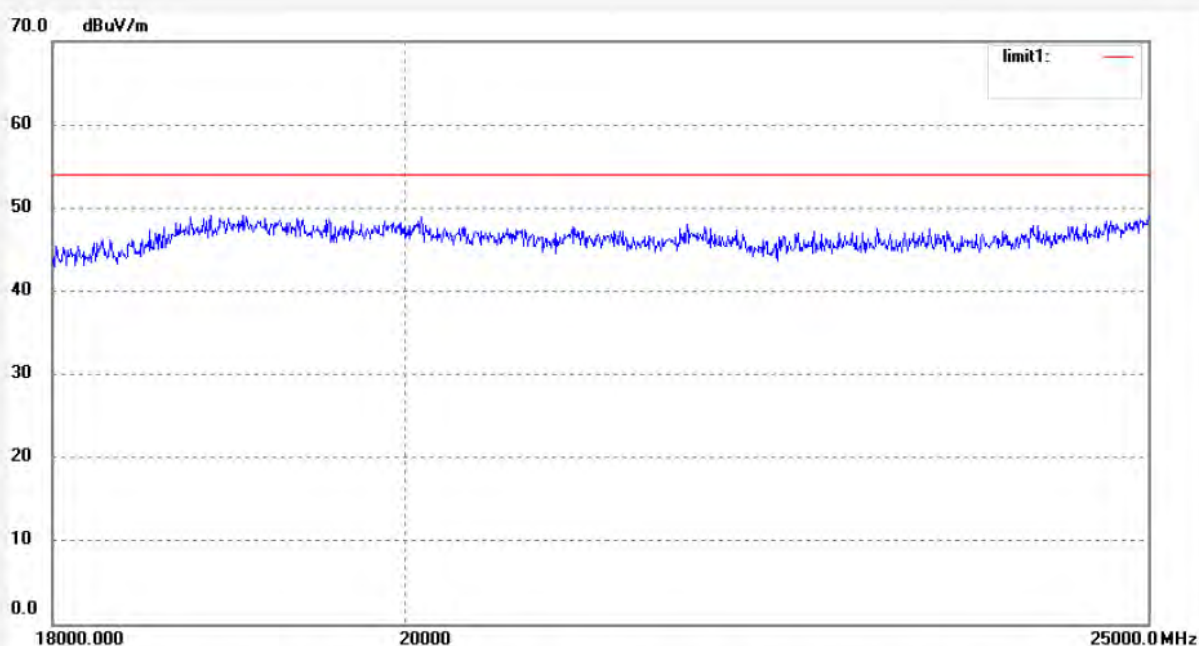

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #678	Polarization: Horizontal
Standard: FCC I5C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/5/09/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 11:38:38
EUT: 7 Inch Tablet PC/MID	Engineer Signature:
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: APRIL T7	
Manufacturer: April	

Note:

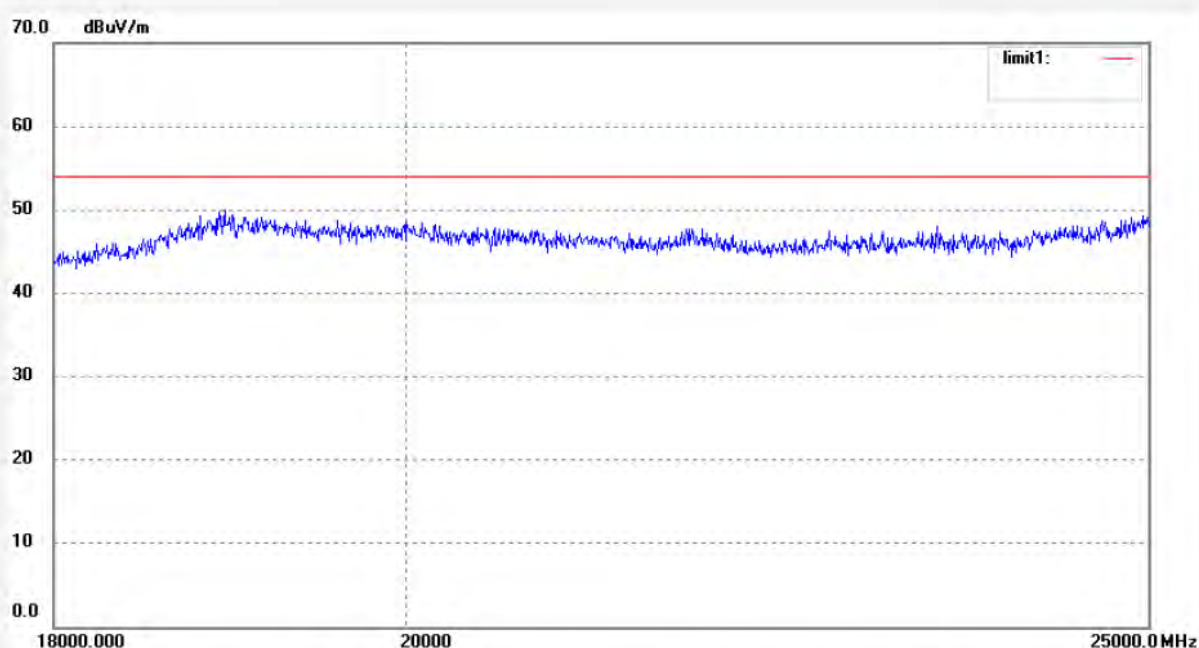

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #679
Standard: FCC 15C
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: 7 Inch Tablet PC/MID
Mode: TX Channel 6 (802.11g)
Model: APRIL T7
Manufacturer: April

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/5/09/
Time: 11:43:17
Engineer Signature:
Distance: 3m

Note:

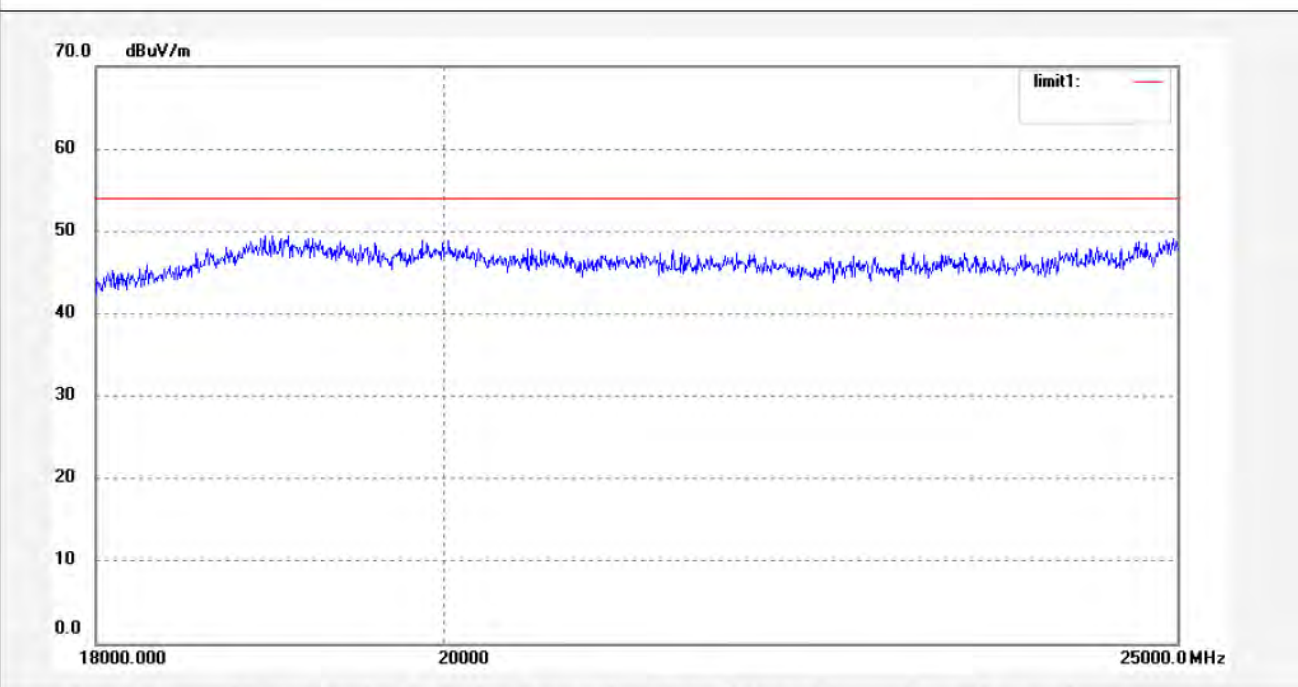

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: ALEN #680

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 11 (802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:47:55

Engineer Signature:

Distance: 3m

Note:

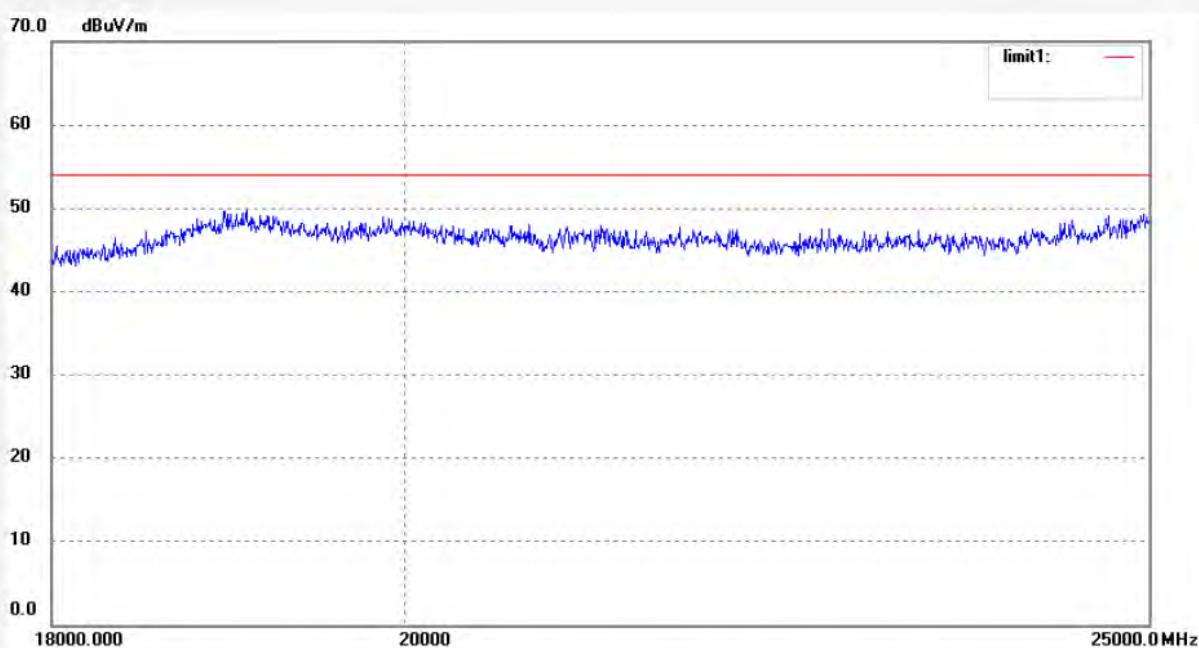

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: ALEN #681

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 11 (802.11g)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 11:50:47

Engineer Signature:

Distance: 3m

Note:

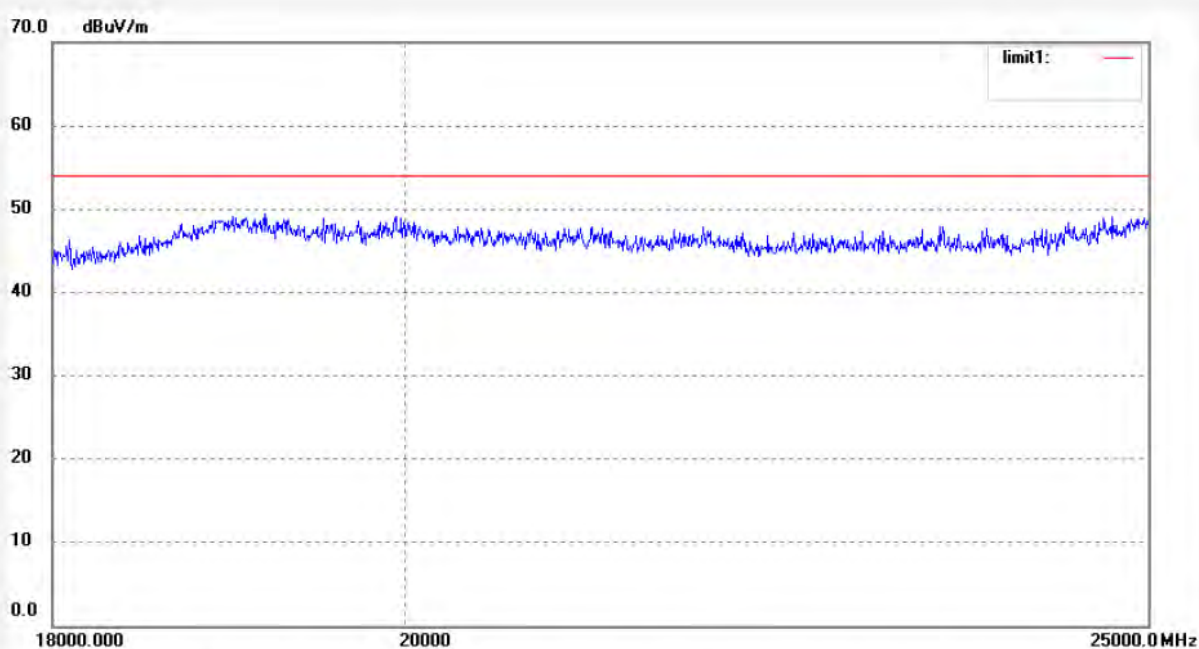

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #682

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 11 (802.11n)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 12:41:05

Engineer Signature:

Distance: 3m

Note:

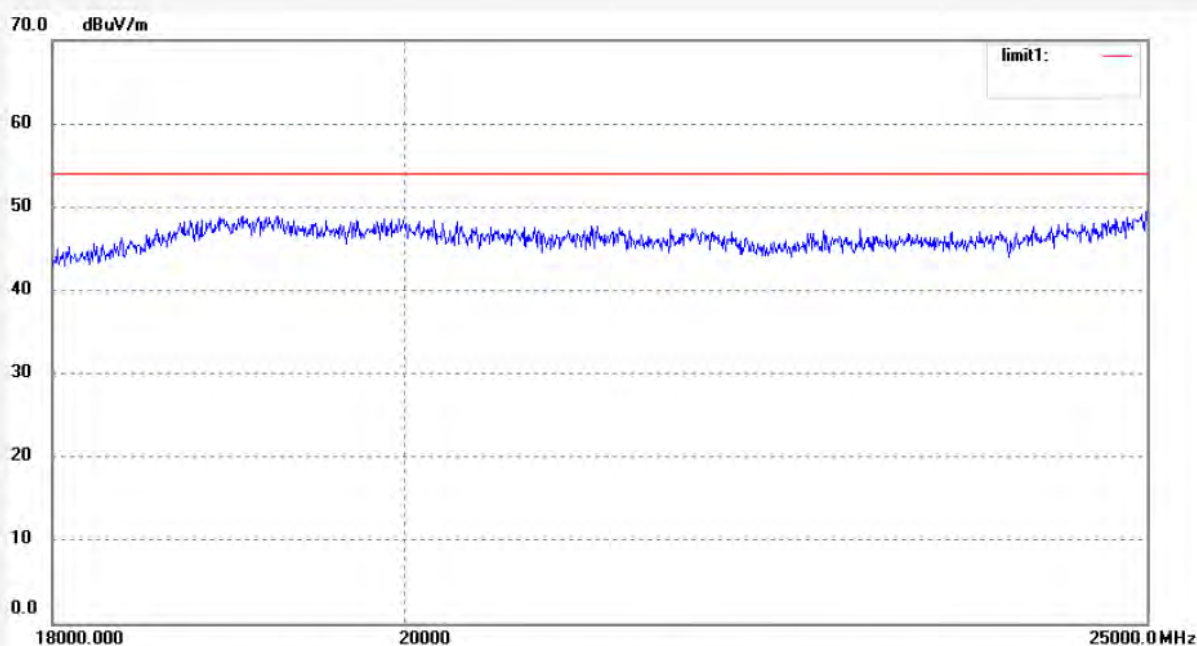

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #683	Polarization: Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/5/09/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 12:42:56
EUT: 7 Inch Tablet PC/MID	Engineer Signature:
Mode: TX Channel 11 (802.11n)	Distance: 3m
Model: APRIL T7	
Manufacturer: April	

Note:

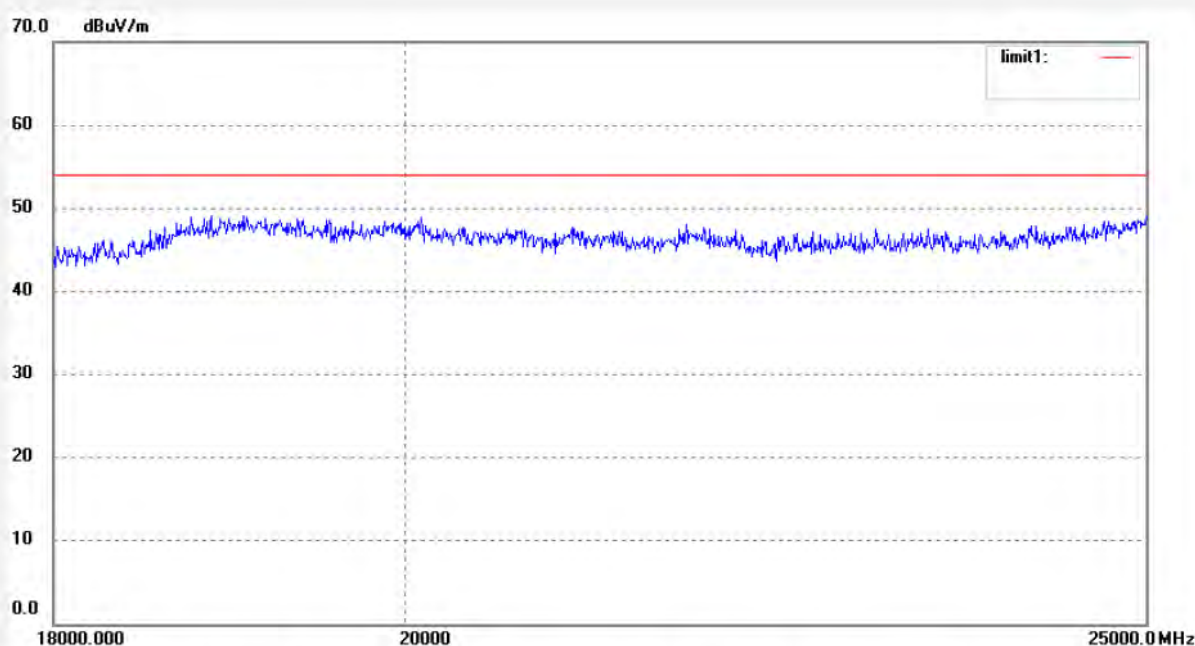

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Alen #684

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 6 (802.11n)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 12:44:38

Engineer Signature:

Distance: 3m

Note:

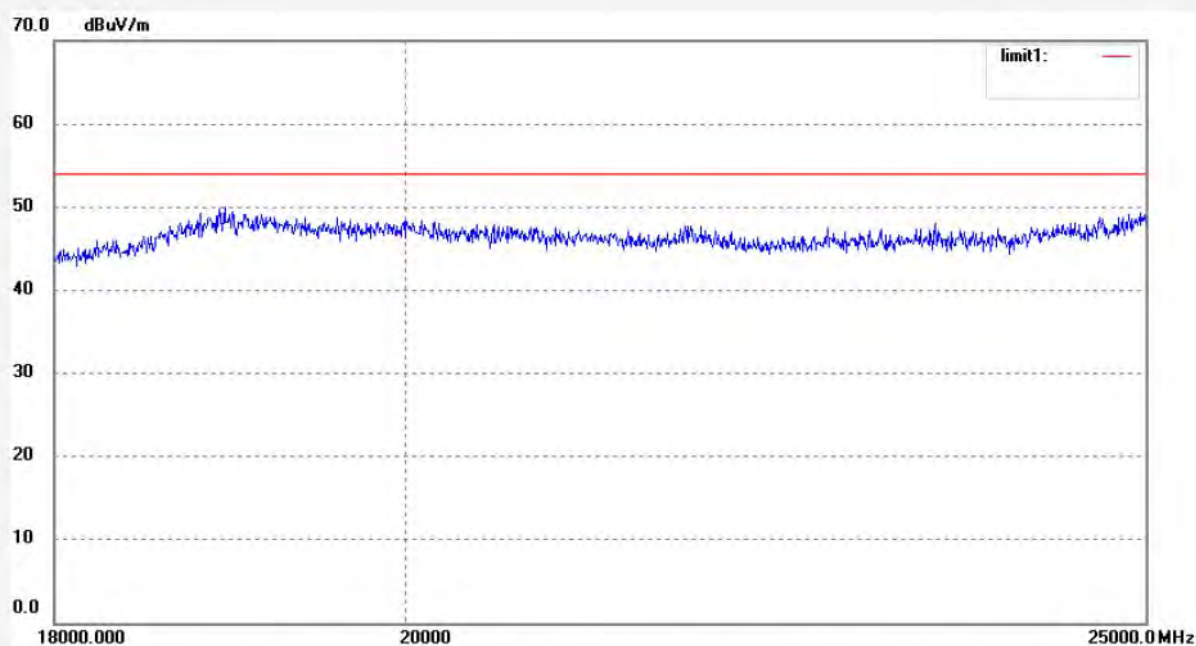

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #685

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 6 (802.11n)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 12:45:42

Engineer Signature:

Distance: 3m

Note:

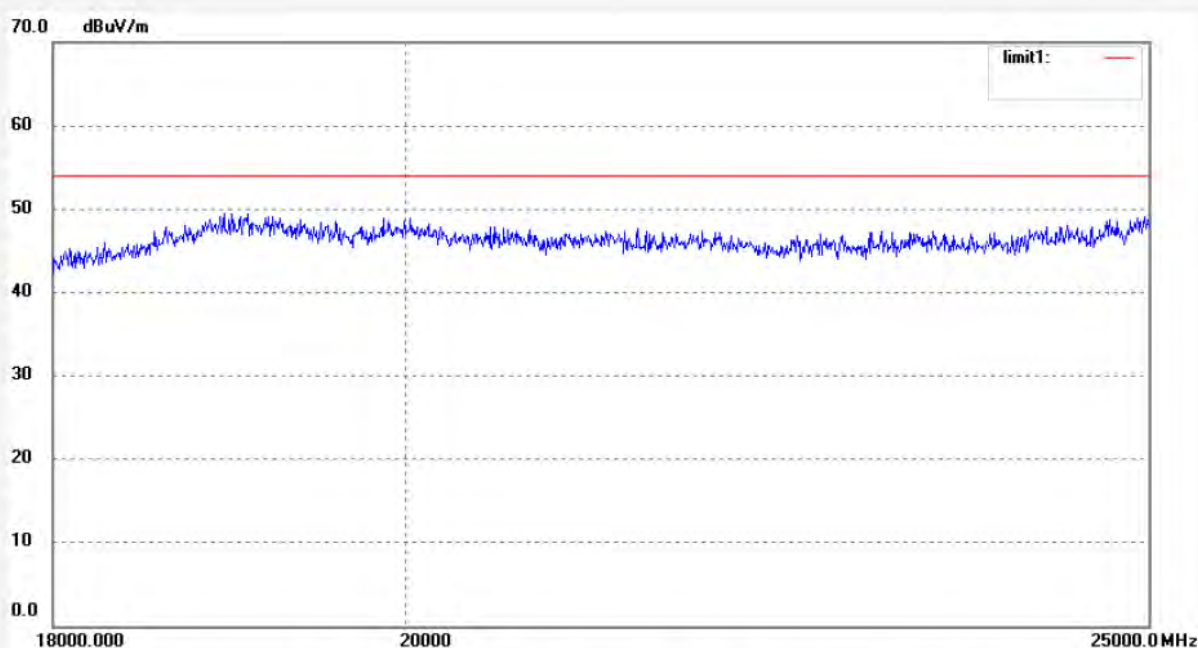

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: Alen #686

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 1 (802.11n)

Model: APRIL T7

Manufacturer: April

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 12:48:59

Engineer Signature:

Distance: 3m

Note:

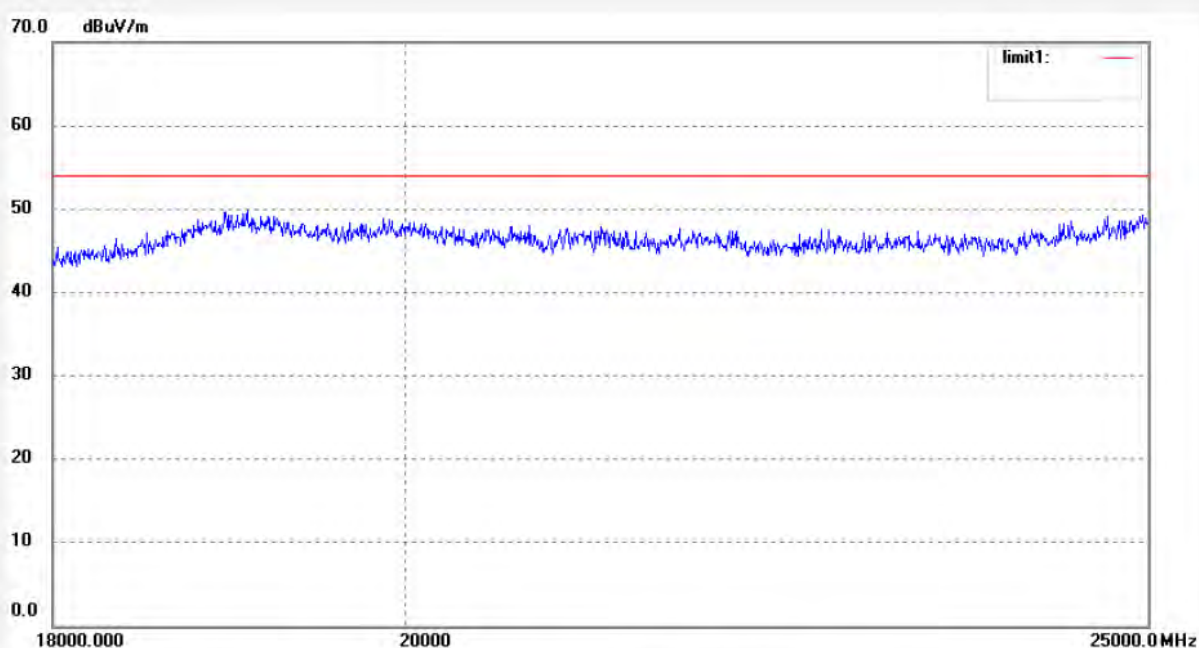

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #687

Standard: FCC 15C

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: 7 Inch Tablet PC/MID

Mode: TX Channel 1 (802.11n)

Model: APRIL T7

Manufacturer: April

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/5/09/

Time: 12:52:35

Engineer Signature: Alen

Distance: 3m

Note:

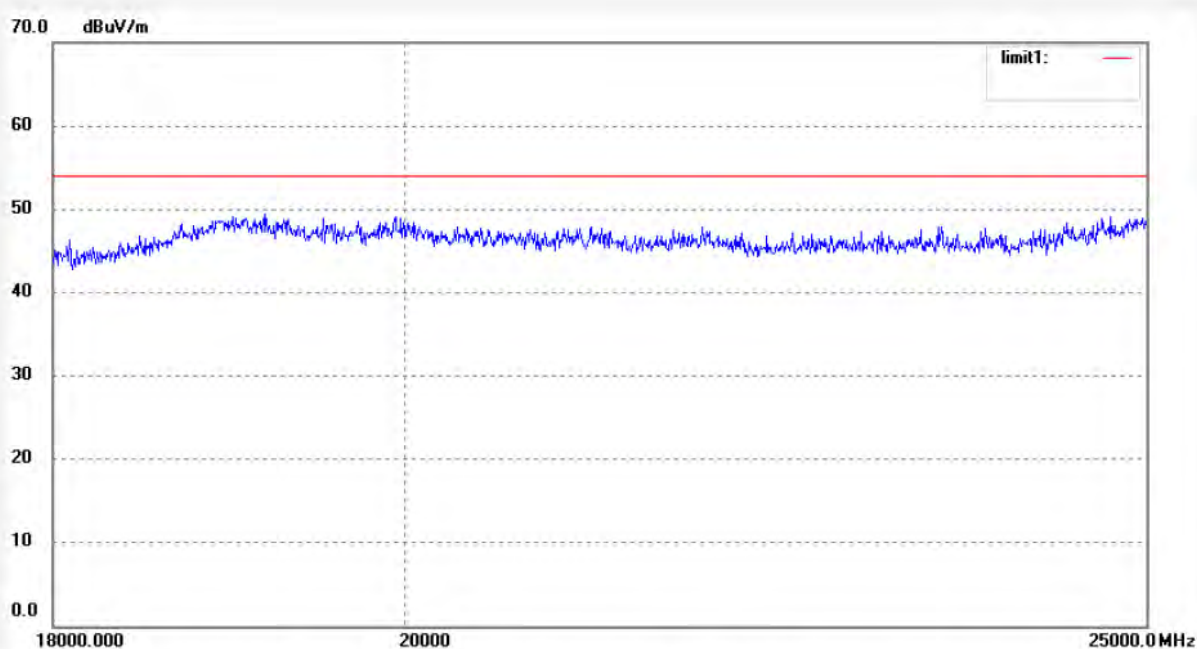

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #688
Standard: FCC 15C
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: 7 Inch Tablet PC/MID
Mode: TX Channel 9 (802.11n)40MHz
Model: APRIL T7
Manufacturer: April

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/5/09/
Time: 13:21:05
Engineer Signature:
Distance: 3m

Note:

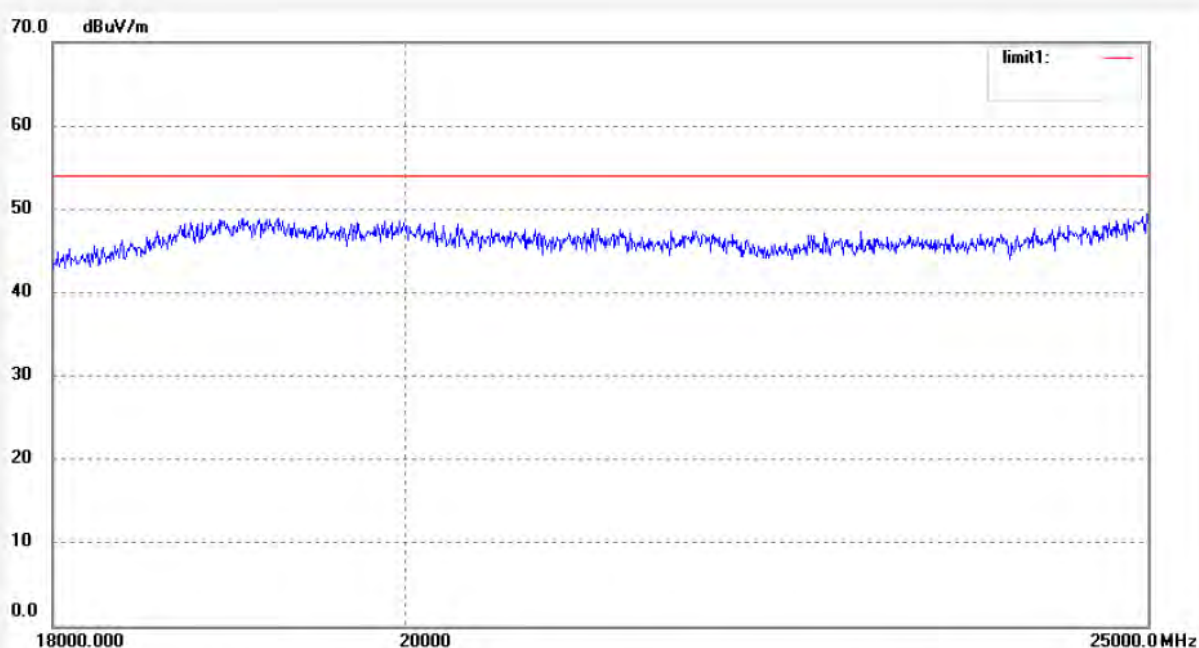

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #689
Standard: FCC 15C
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: 7 Inch Tablet PC/MID
Mode: TX Channel 9 (802.11n)40MHz
Model: APRIL T7
Manufacturer: April

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 13/5/09/
Time: 13:22:56
Engineer Signature:
Distance: 3m

Note:

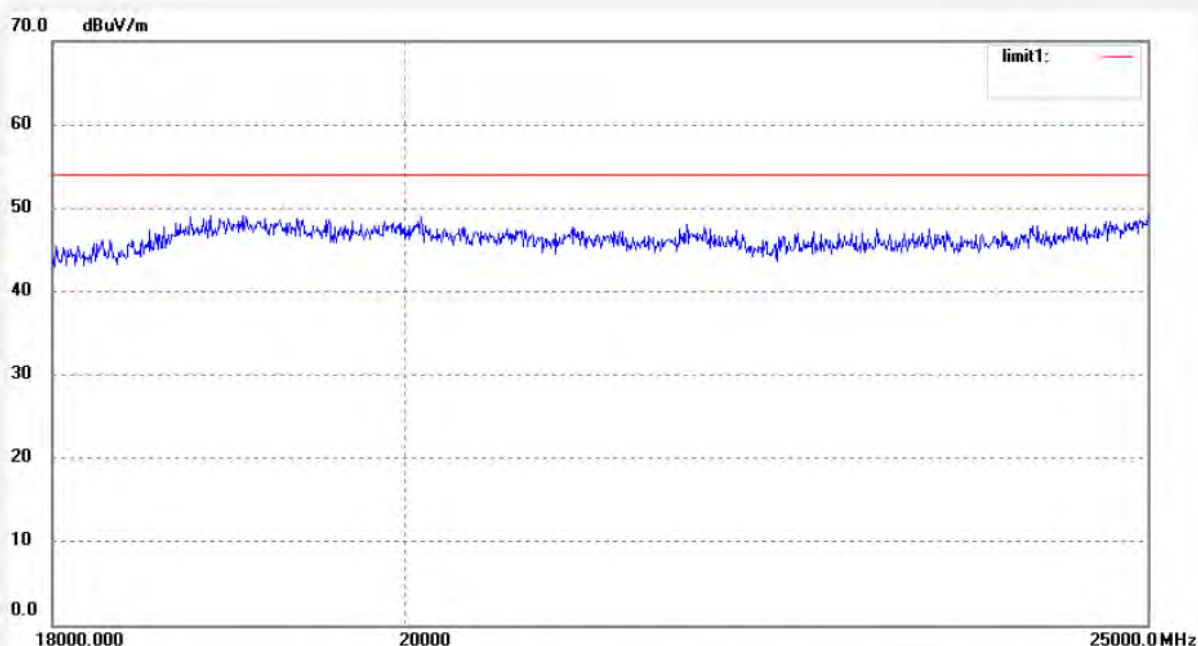

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #690
Standard: FCC 15C
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: 7 Inch Tablet PC/MID
Mode: TX Channel 6 (802.11n)40MHz
Model: APRIL T7
Manufacturer: April

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 13/5/09/
Time: 13:24:38
Engineer Signature:
Distance: 3m

Note:

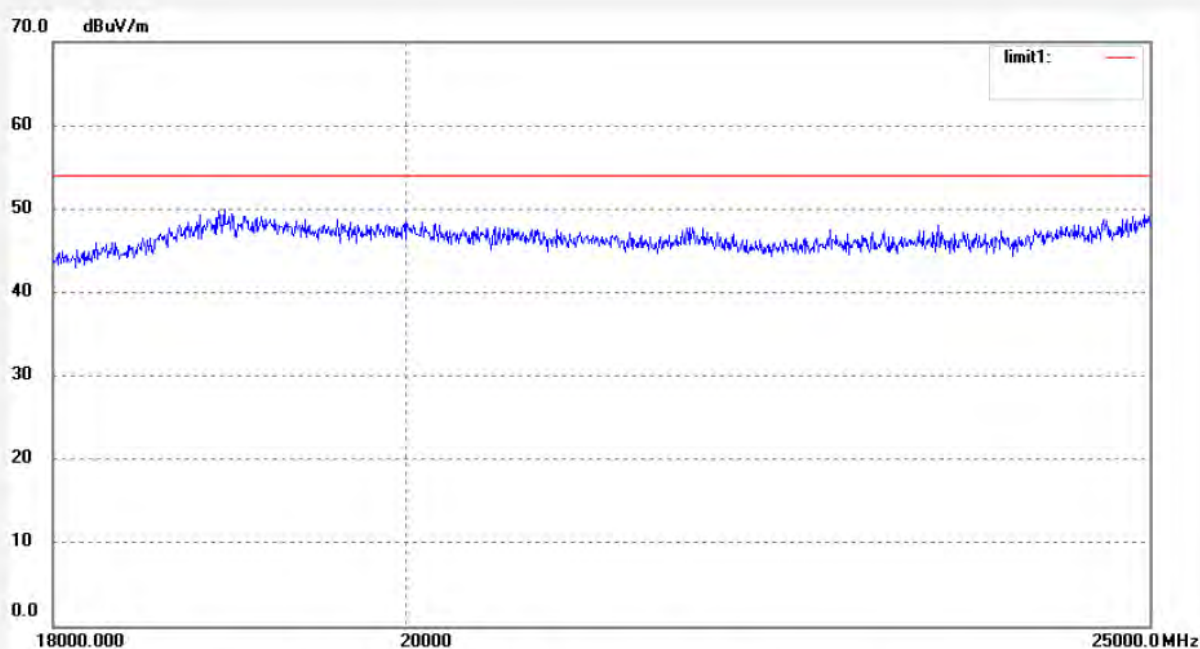

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #691
Standard: FCC 15C
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: 7 Inch Tablet PC/MID
Mode: TX Channel 6 (802.11n)40MHz
Model: APRIL T7
Manufacturer: April

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/5/09/
Time: 13:25:42
Engineer Signature:
Distance: 3m

Note:

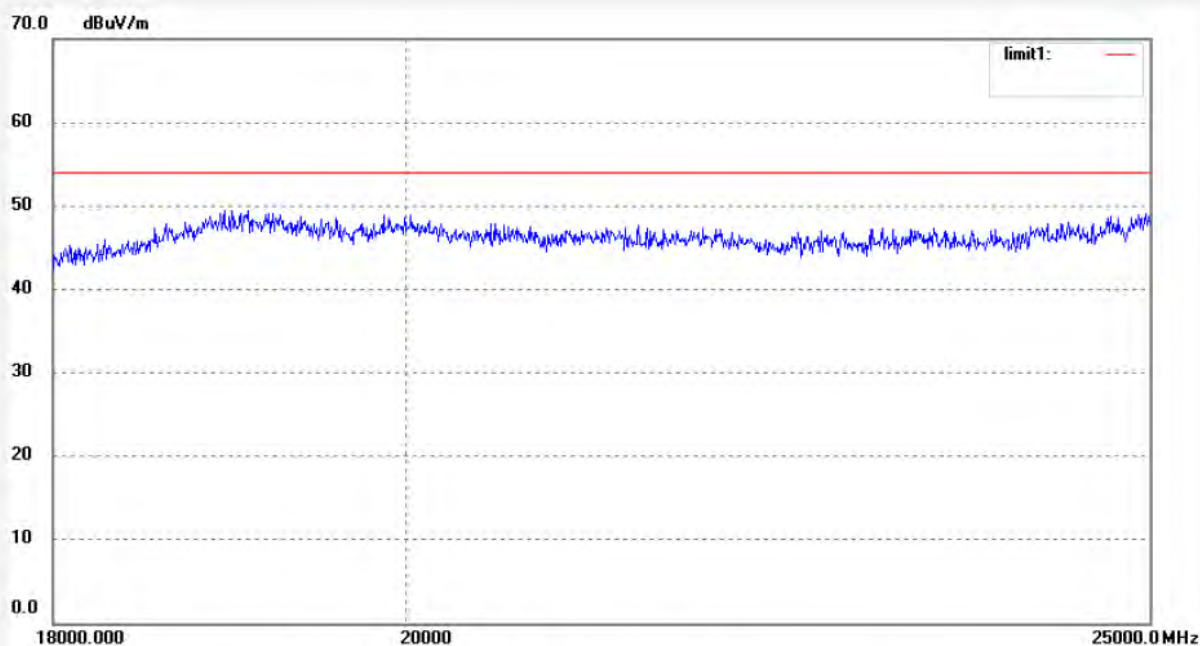

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #692
Standard: FCC 15C
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: 7 Inch Tablet PC/MID
Mode: TX Channel 3 (802.11n)40MHz
Model: APRIL T7
Manufacturer: April

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/5/09/
Time: 13:28:59
Engineer Signature:
Distance: 3m

Note:

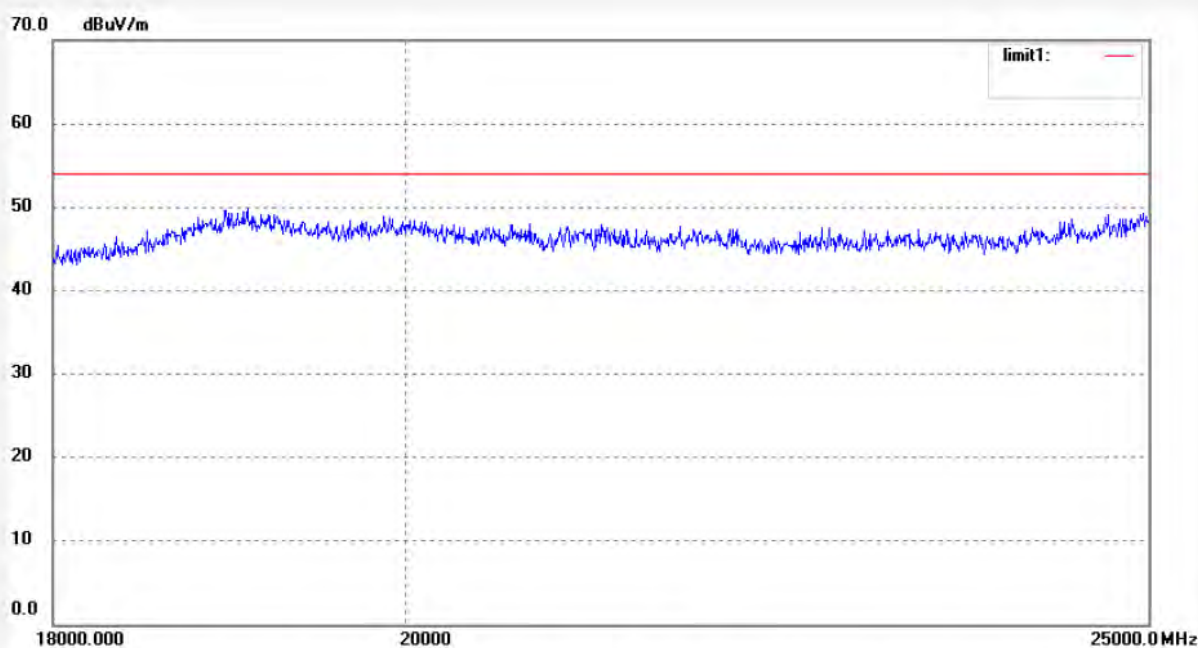

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Alen #693	Polarization: Horizontal
Standard: FCC 15C	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/5/09/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 13:32:35
EUT: 7 Inch Tablet PC/MID	Engineer Signature: Alen
Mode: TX Channel 3 (802.11n)40MHz	Distance: 3m
Model: APRIL T7	
Manufacturer: April	


Note:

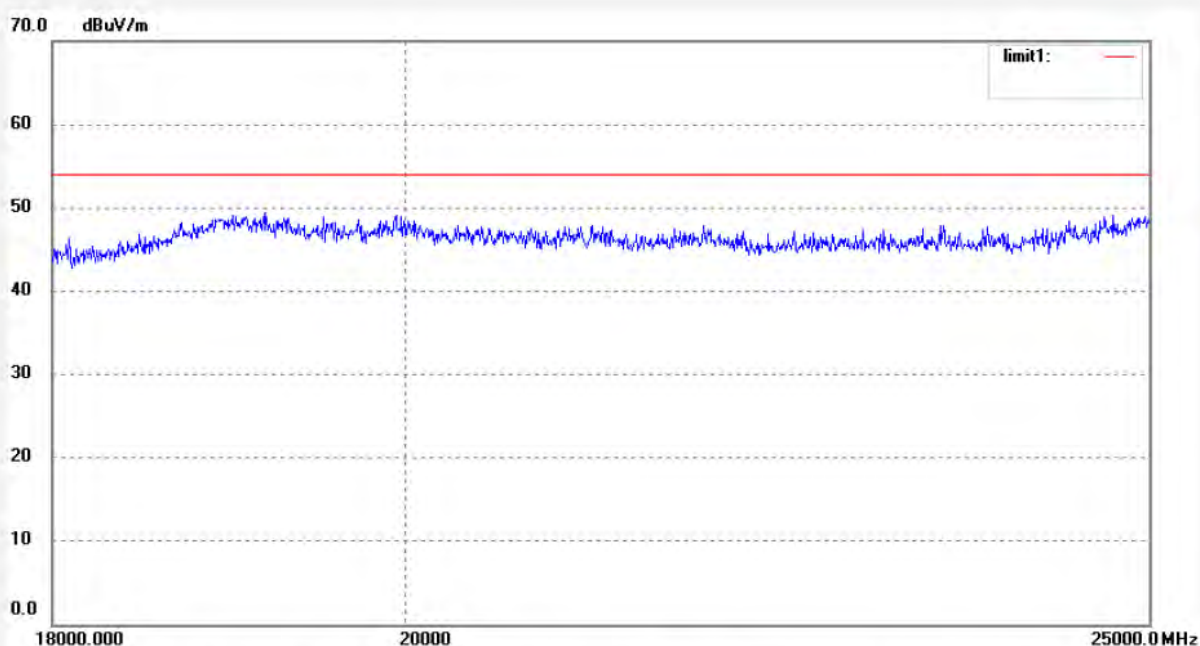

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

10.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1.Block Diagram of Test Setup



(EUT: 7 Inch Tablet PC /MID)

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1. 7 Inch Tablet PC /MID (EUT)

Model Number	:	APRIL T7
Serial Number	:	N/A
Manufacturer	:	April Computers L.L.C.

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.5.Test Procedure

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz for up to 1GHz, RBW of spectrum analyzer to 1MHz and VBW 3MHz for above 1GHz



10.5.3.The Conducted Spurious Emission was measured and recorded.

10.6.Test Result



Pass.

The spectrum analyzer plots are attached as below.



TX 802.11b Channel Low 2412MHz

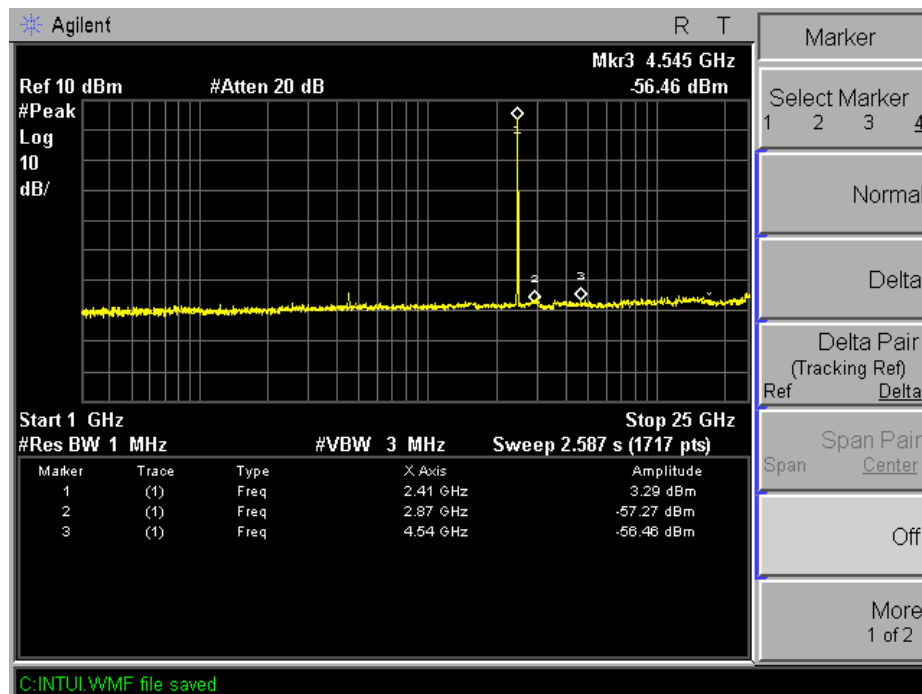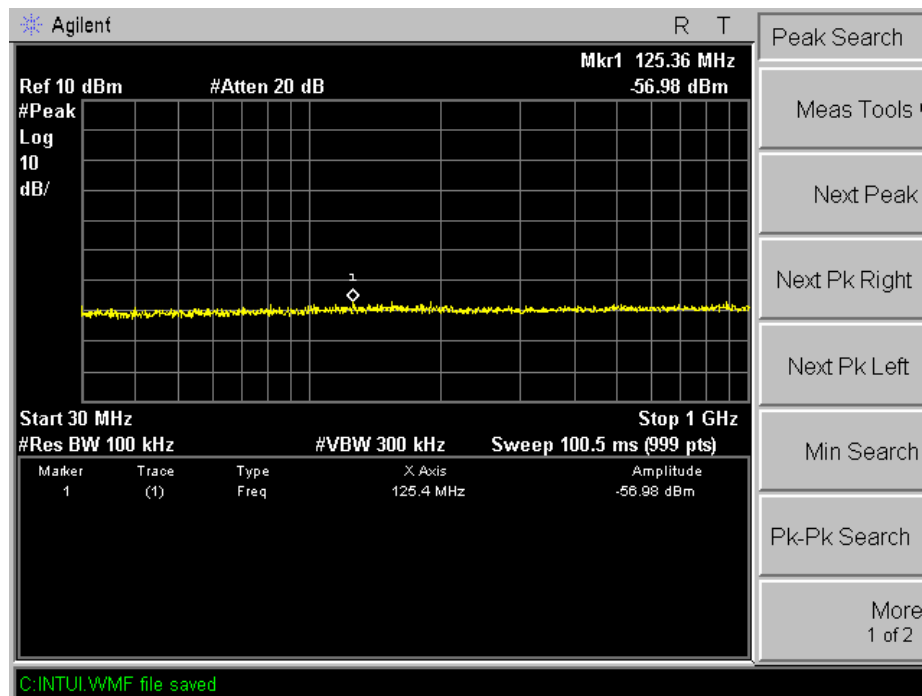



TX 802.11b Channel Middle 2437MHz

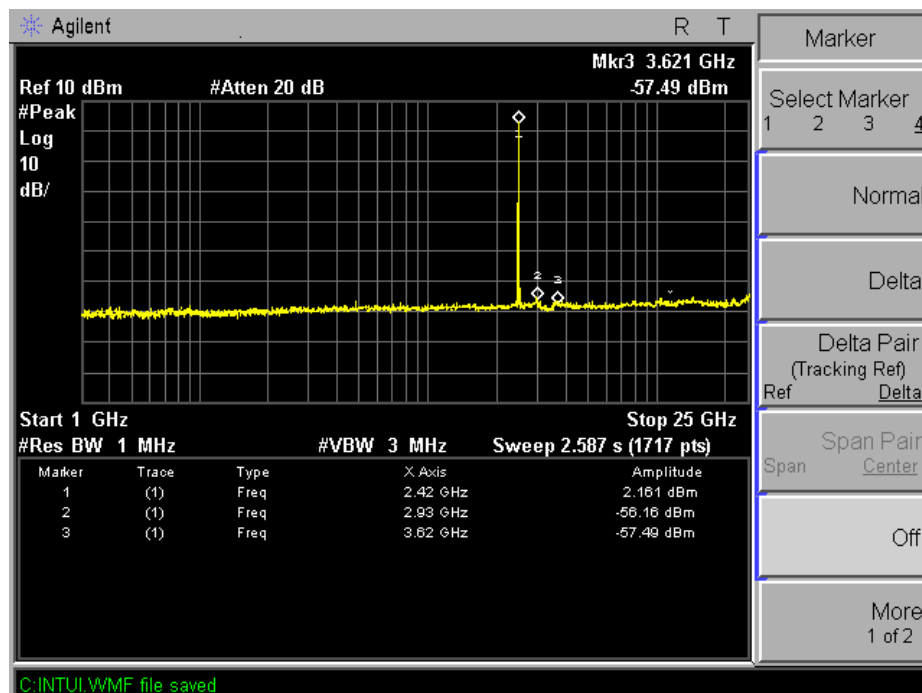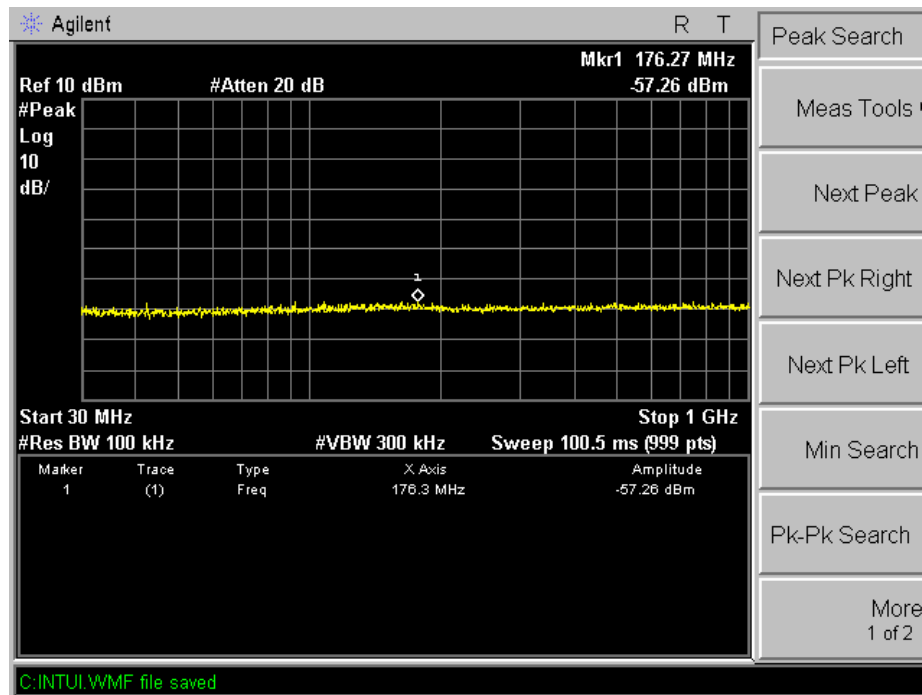



TX 802.11b Channel High 2462MHz

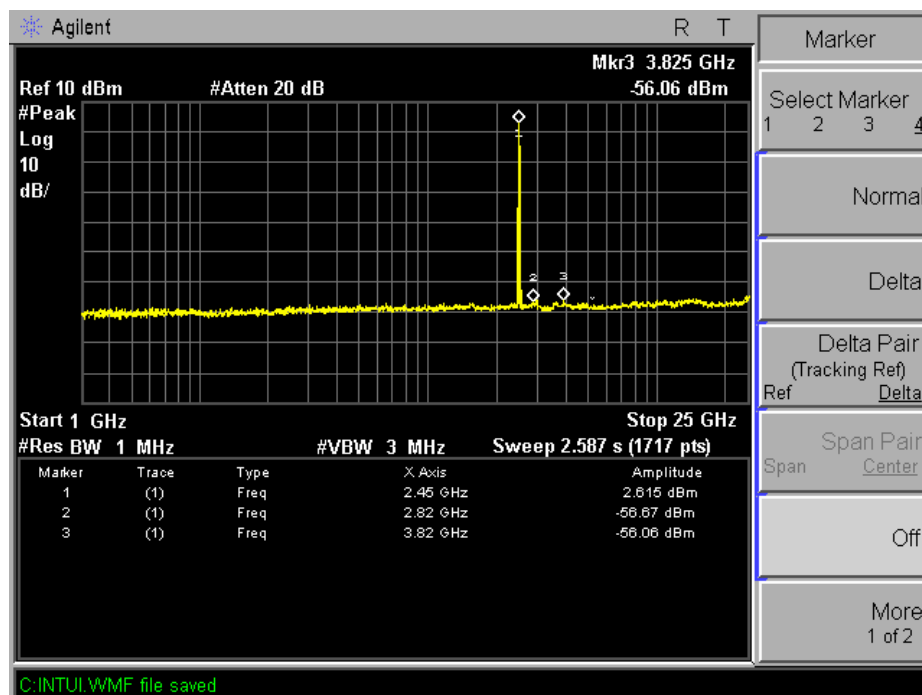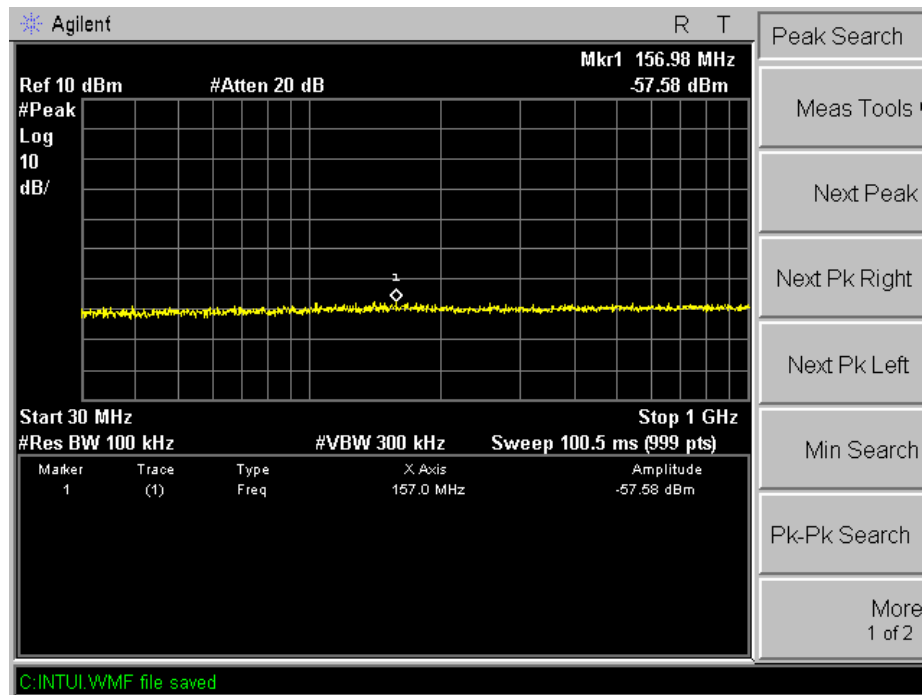



TX 802.11g Channel Low 2412MHz

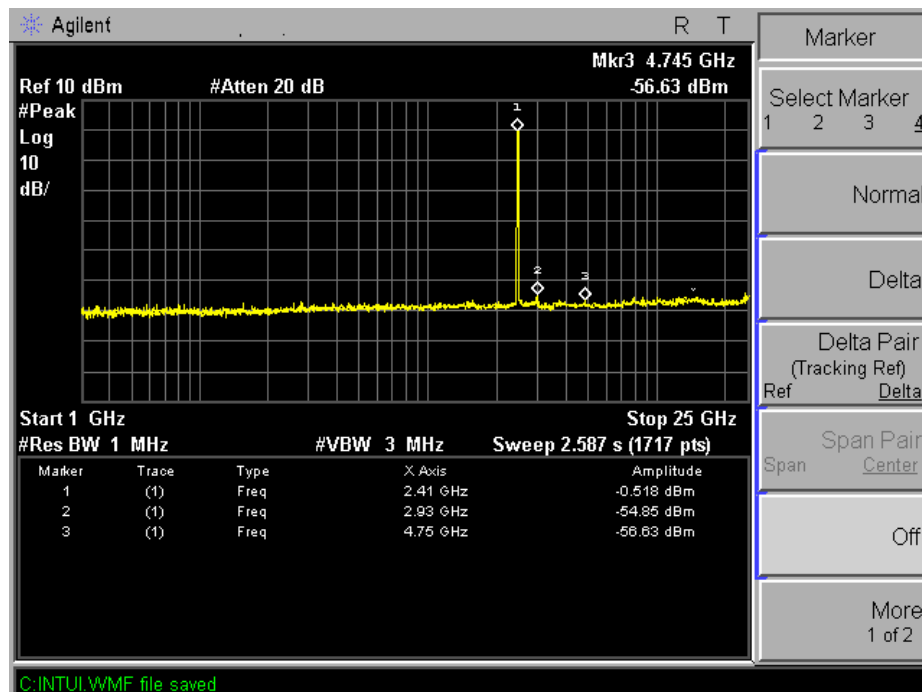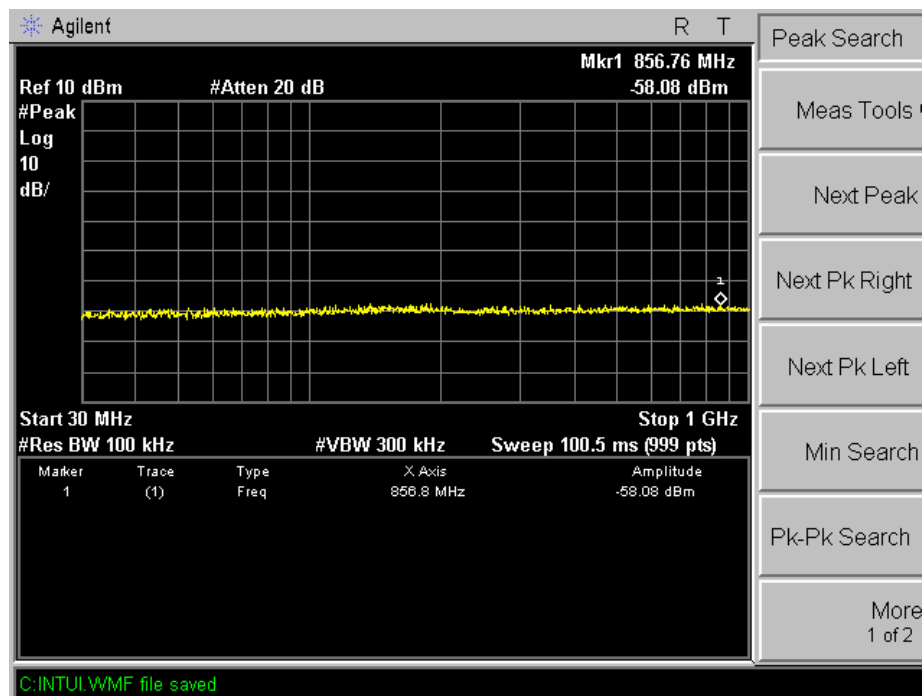



TX 802.11g Channel Middle 2437MHz

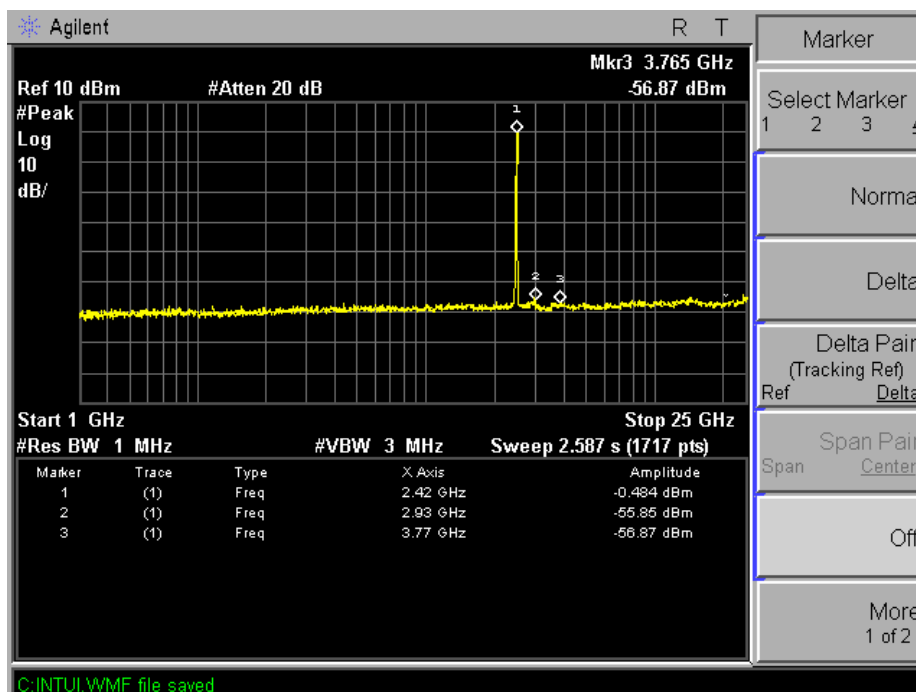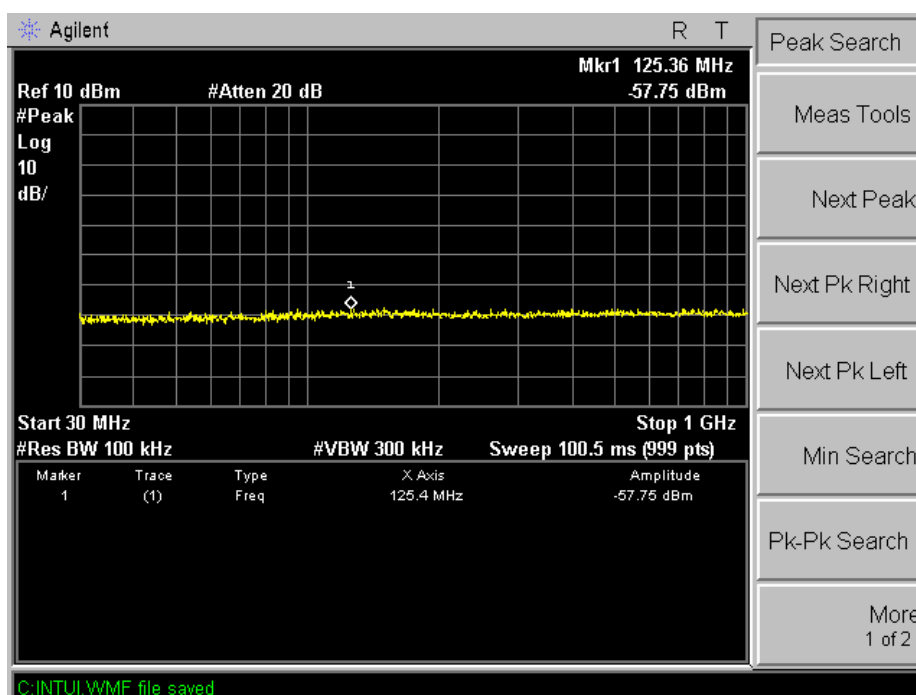



TX 802.11g Channel High 2462MHz

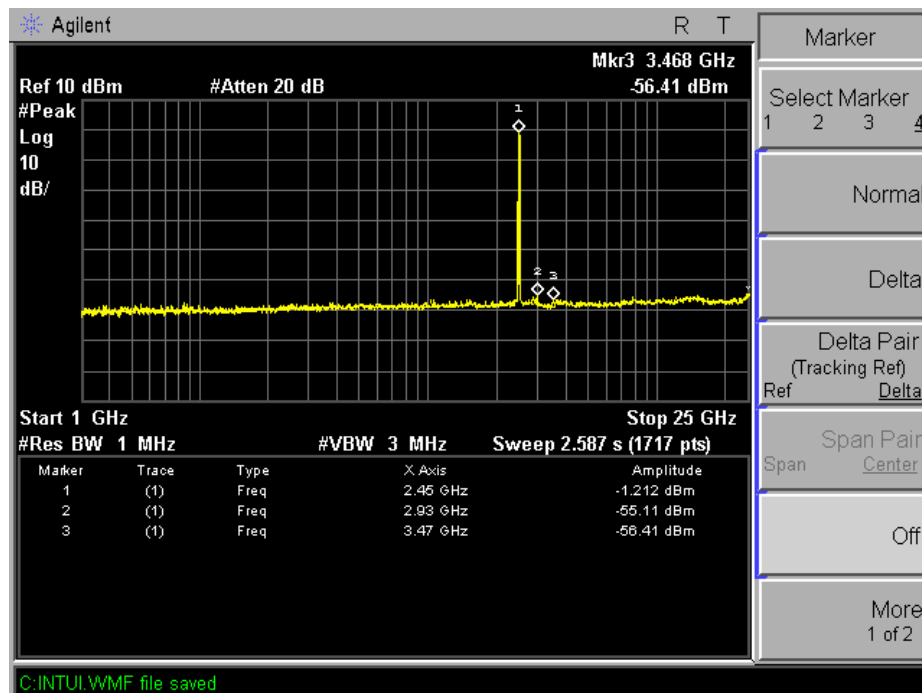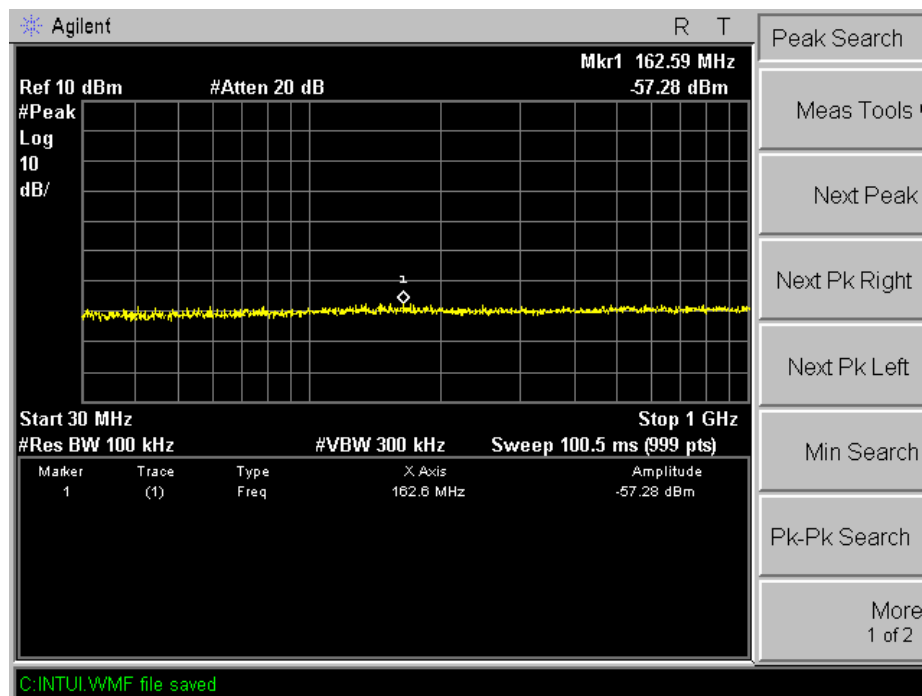



TX 802.11n Channel Low 2412MHz (20MHz)

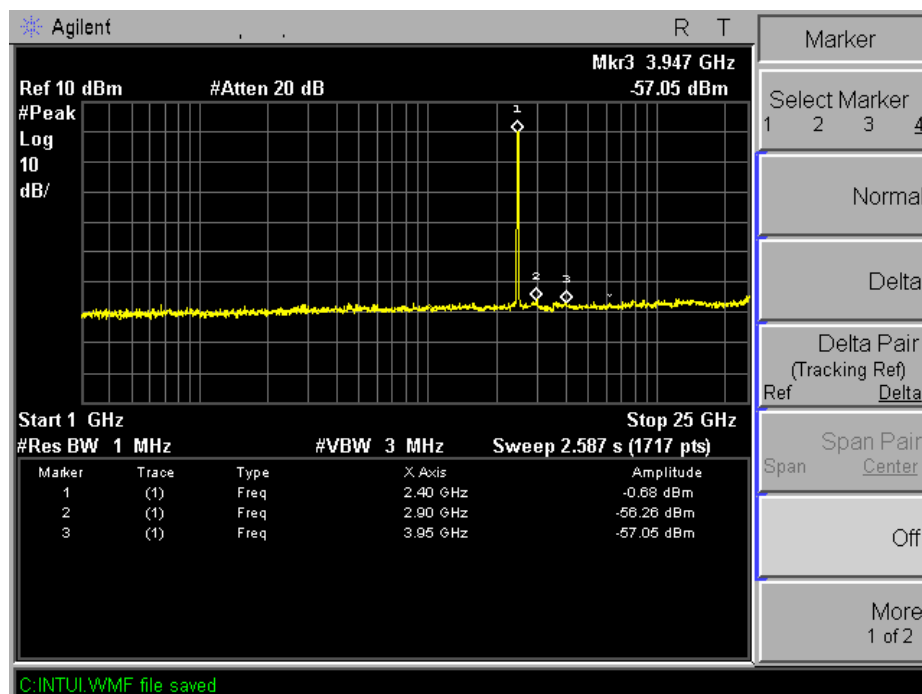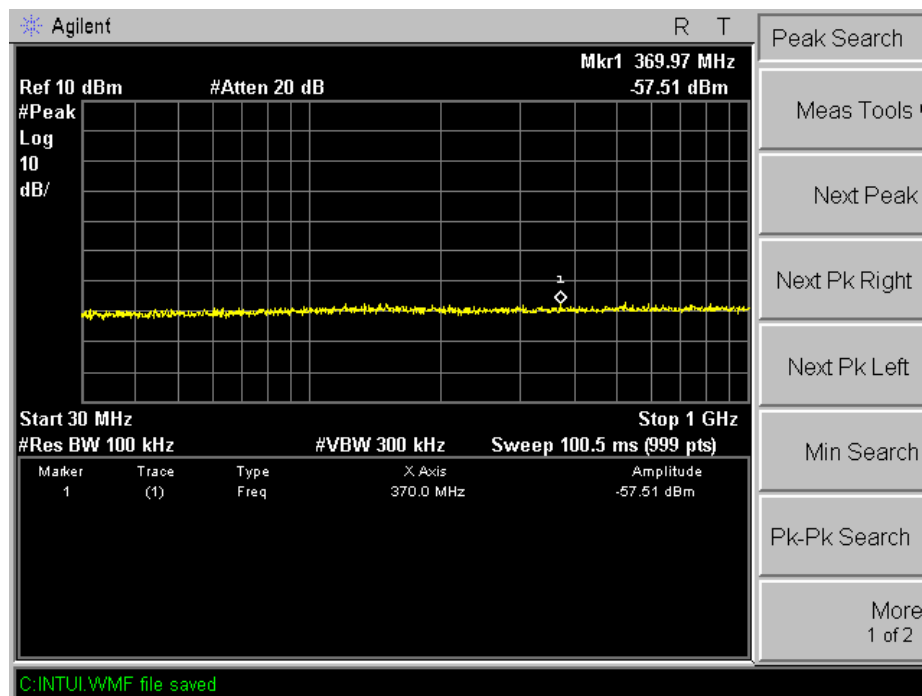



TX 802.11n Channel Middle 2437MHz (20MHz)

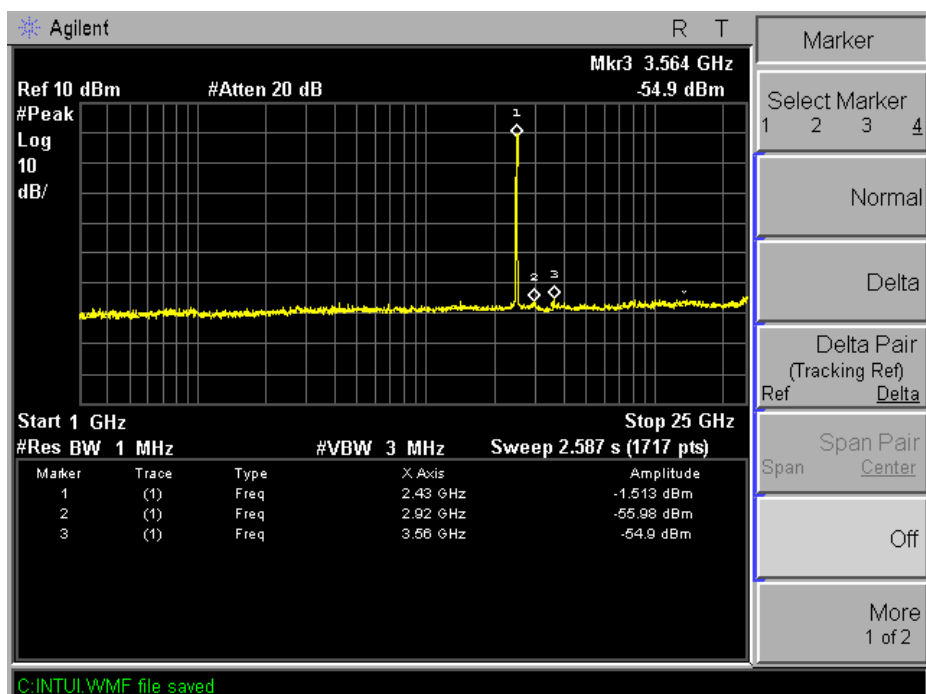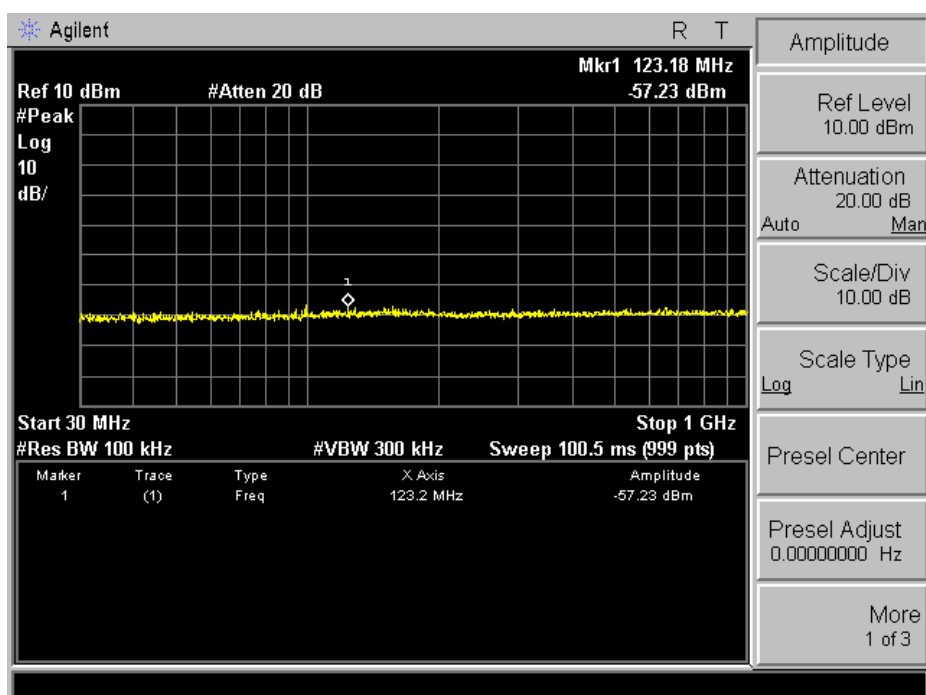



TX 802.11n Channel High 2462MHz (20MHz)

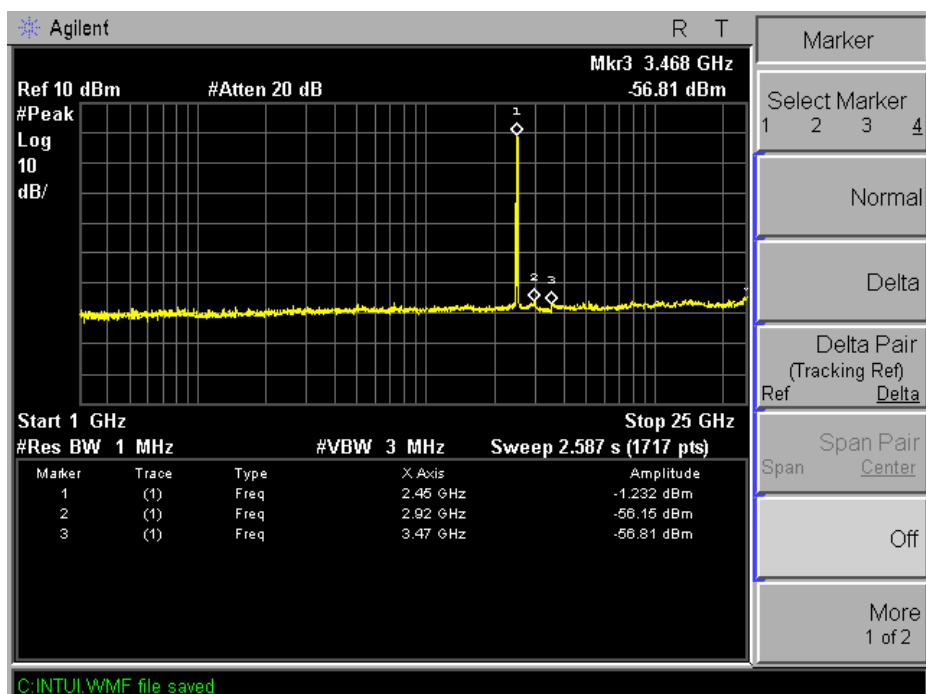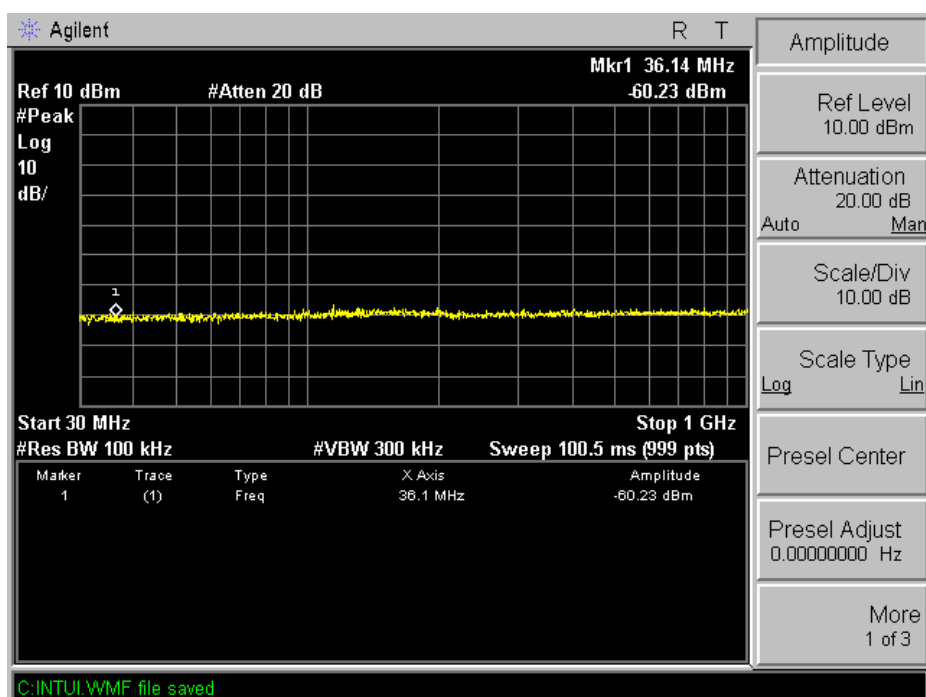



TX 802.11n Channel Low 2422MHz (40MHz)

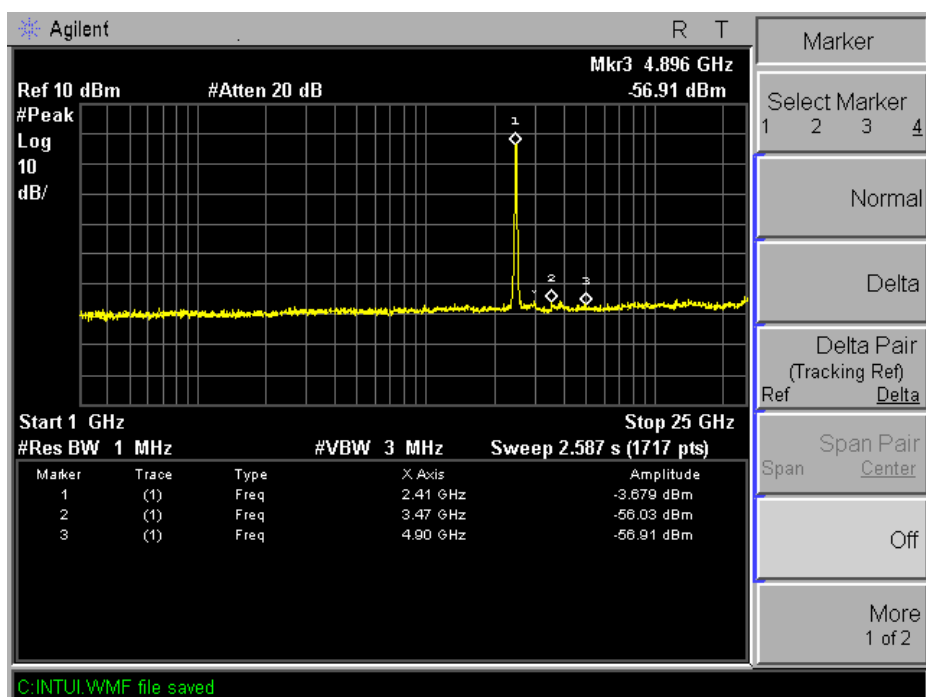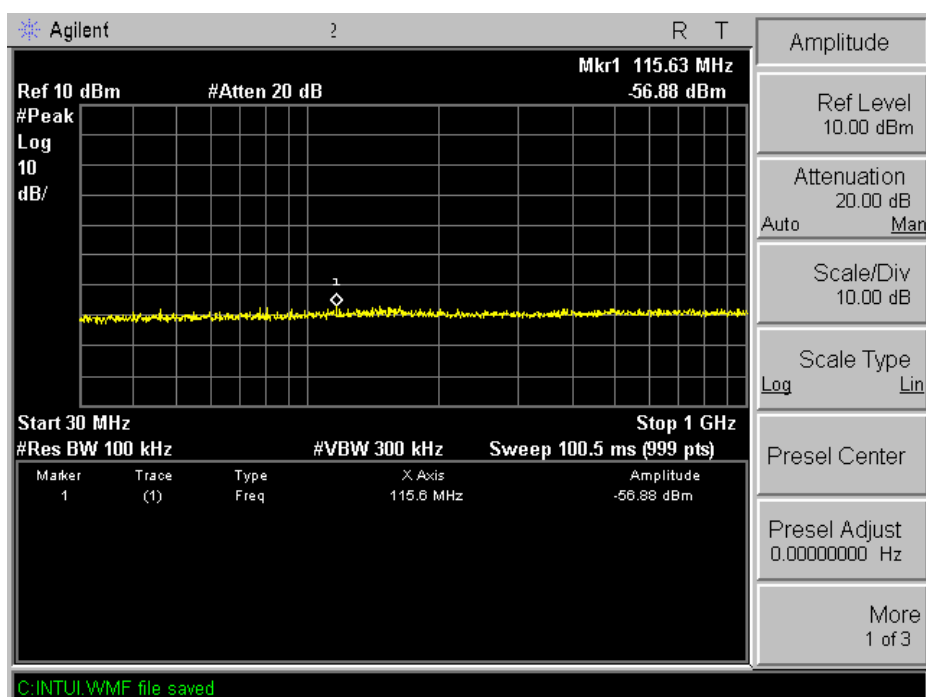

TX 802.11n Channel Middle 2437MHz (40MHz)

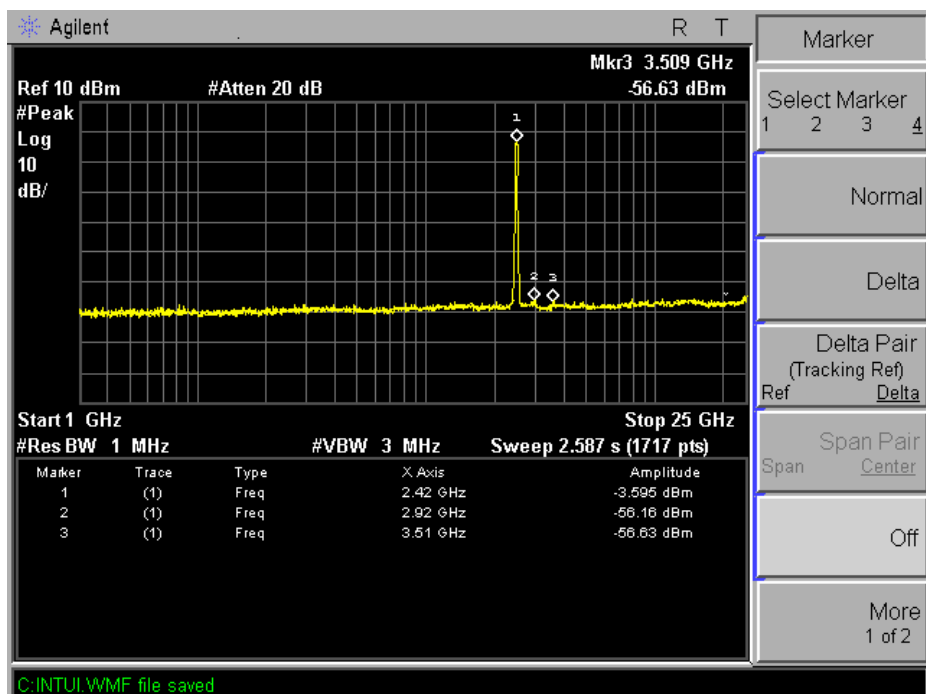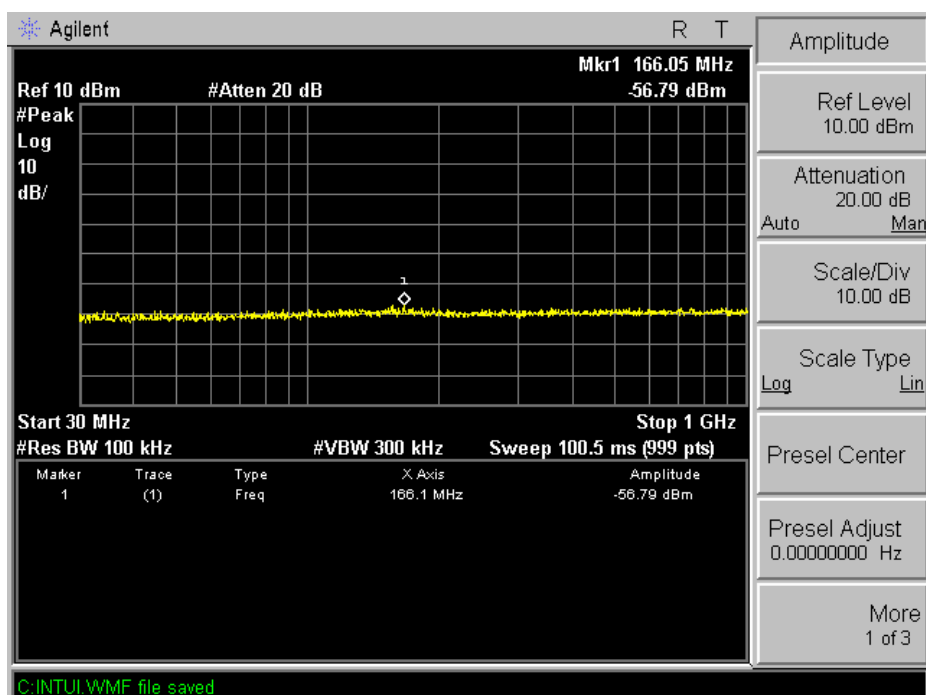


TX 802.11n Channel High 2452MHz (40MHz)

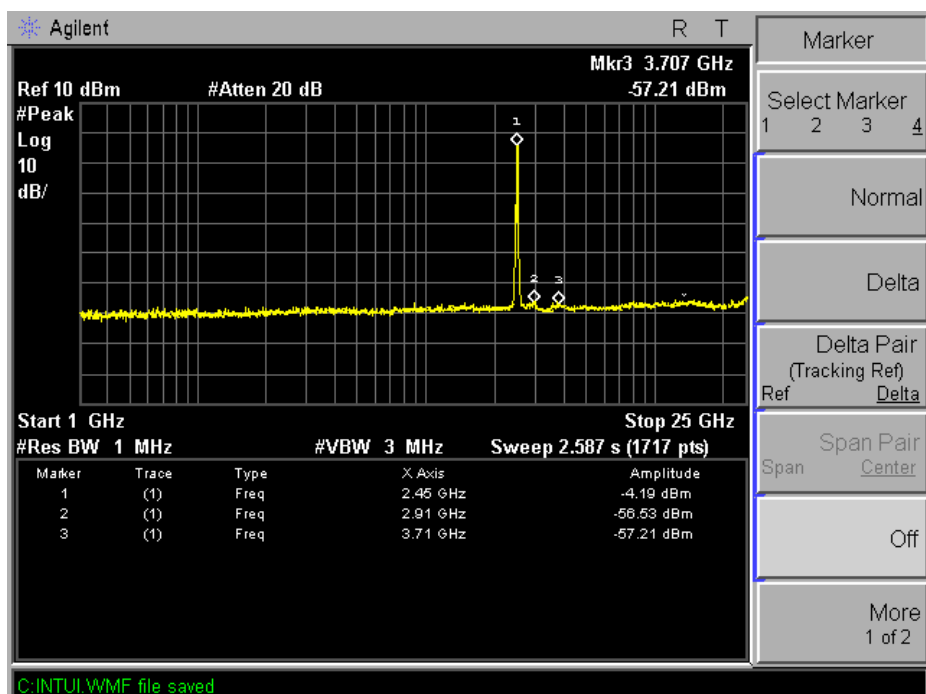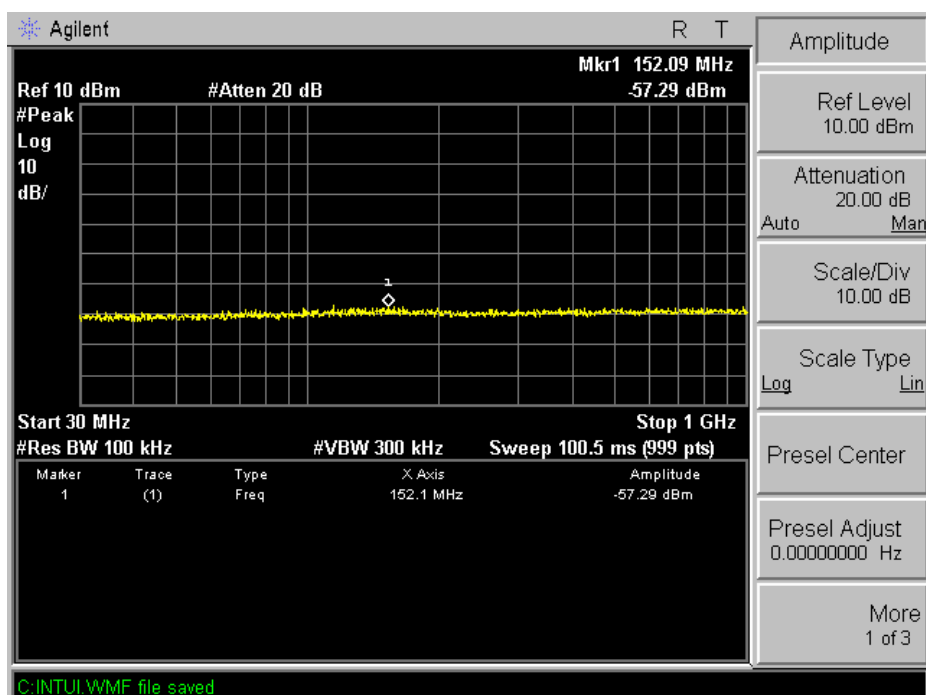


11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)

11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators

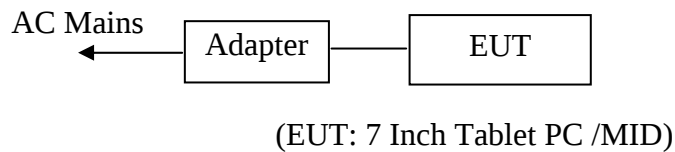

11.1.2.Shielding Room Test Setup Diagram

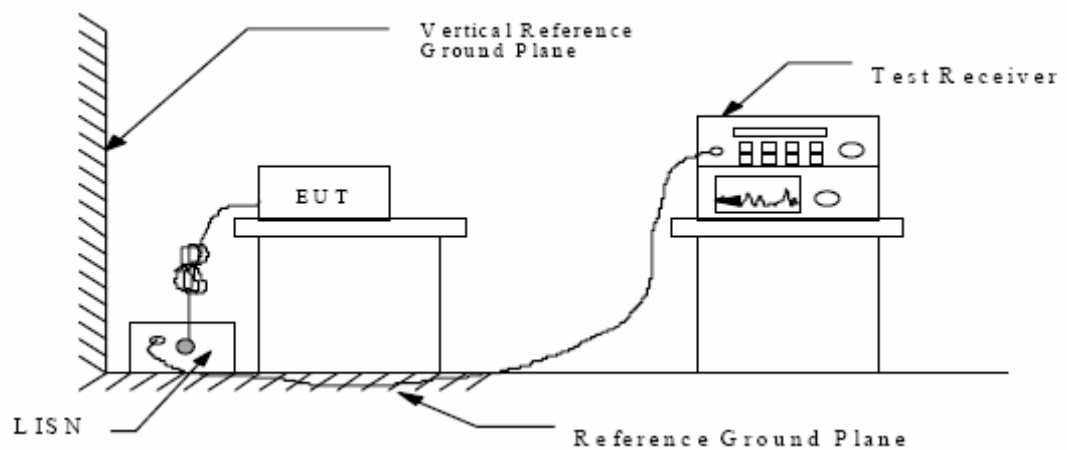

(EUT: 10 inch Tablet PC)

11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.1. 7 Inch Tablet PC /MID (EUT)

Model Number : APRIL T7
Serial Number : N/A
Manufacturer : April Computers L.L.C.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX (Charging) mode measure it.

11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.

The frequency range from 150 kHz to 30MHz is checked.

11.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150 kHz to 30MHz is checked.

Date of Test:	May 13, 2013	Temperature:	25°C
EUT:	7 Inch Tablet PC /MID	Humidity:	50%
Model No.:	APRIL T7	Power Supply:	AC 120V/60Hz
Test Mode:	operation	Test Engineer:	Allen

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.185344	52.40	64	11.8	QP	Neutral
0.229932	49.40	63	13.1	QP	
0.270820	45.10	61	16.0	QP	
0.185344	37.20	54	17.0	AV	
0.230851	35.50	52	16.9	AV	
0.498814	28.80	46	17.2	AV	
0.494848	50.70	56	5.4	QP	Live
1.112795	45.40	56	10.6	QP	
5.258106	43.10	60	16.9	QP	
0.342744	42.80	49	6.3	AV	
0.391005	42.50	48	5.5	AV	
0.585177	41.10	46	4.9	AV	


Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: 7 Inch Tablet PC/MID M/N:APRIL T7
 Manufacturer: April
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 5/13/2013 / 2:10:17PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

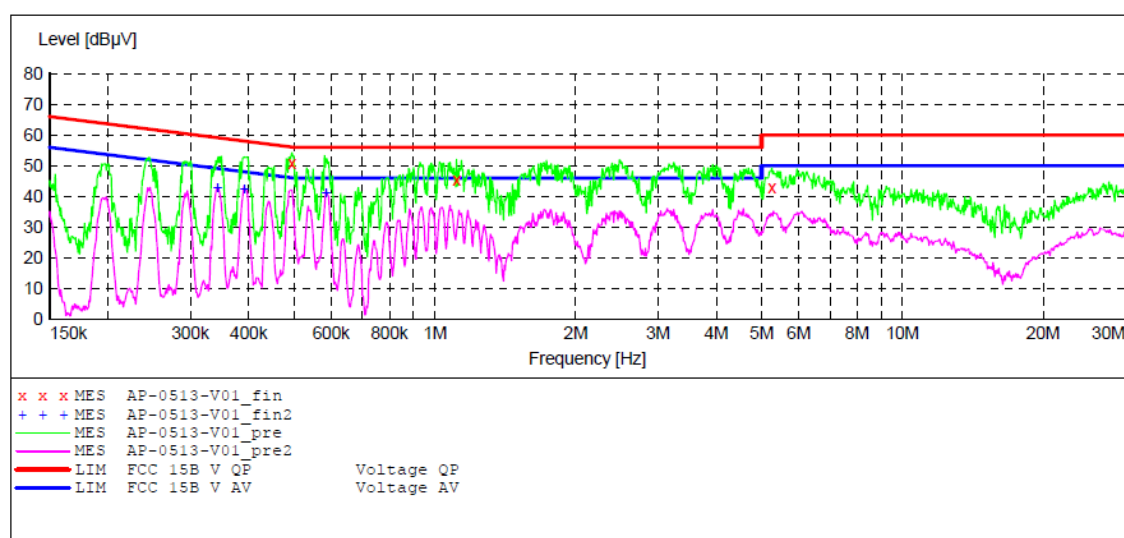**MEASUREMENT RESULT: "AP-0513-V01_fin"**

5/13/2013 2:12PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.494848	50.70	12.6	56	5.4	QP	L1	GND
1.112795	45.40	12.5	56	10.6	QP	L1	GND
5.258106	43.10	12.3	60	16.9	QP	L1	GND

MEASUREMENT RESULT: "AP-0513-V01_fin2"

5/13/2013 2:12PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.342744	42.80	12.2	49	6.3	AV	L1	GND
0.391005	42.50	12.4	48	5.5	AV	L1	GND
0.585177	41.10	12.6	46	4.9	AV	L1	GND

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: 7 Inch Tablet PC/MID M/N:APRIL T7
 Manufacturer: April
 Operating Condition: Operation
 Test Site: 1#Shielding Room
 Operator: Alen
 Test Specification: N 120V/60Hz
 Comment: Mains Port
 Start of Test: 5/13/2013 / 2:13:14PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

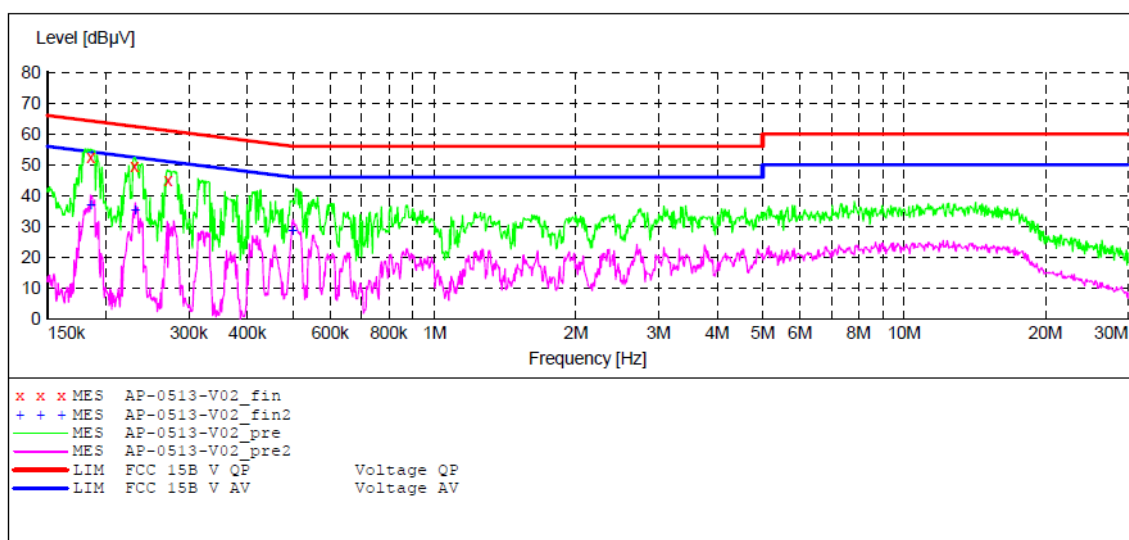**MEASUREMENT RESULT: "AP-0513-V02_fin"**

5/13/2013 2:22PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.185344	52.40	11.7	64	11.8	QP	N	GND
0.229932	49.40	11.9	63	13.1	QP	N	GND
0.270820	45.10	12.0	61	16.0	QP	N	GND

MEASUREMENT RESULT: "AP-0513-V02_fin2"

5/13/2013 2:22PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.185344	37.20	11.7	54	17.0	AV	N	GND
0.230851	35.50	11.9	52	16.9	AV	N	GND
0.498814	28.80	12.6	46	17.2	AV	N	GND


12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

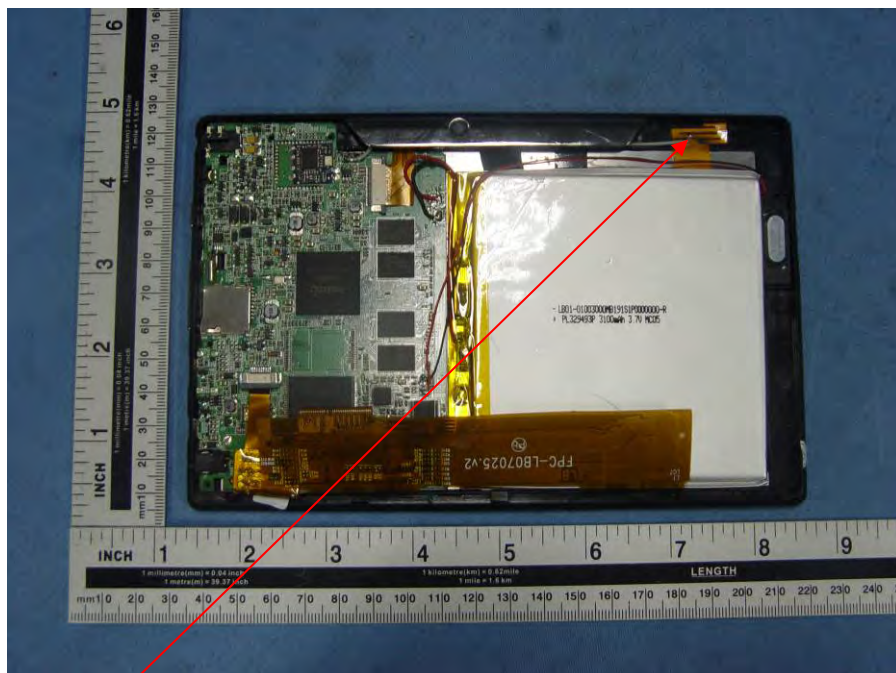

Antenna