

P01 LTE Band 5_QPSK10M_Front Face_1cm_Ch20600_1RB_OS0

Communication System: LTE-FDD; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: HSL835_1024 Medium parameters used: $f = 844$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.511$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.86, 10.86, 10.86); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.729 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.69 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.4%

Maximum value of SAR (measured) = 0.717 W/kg

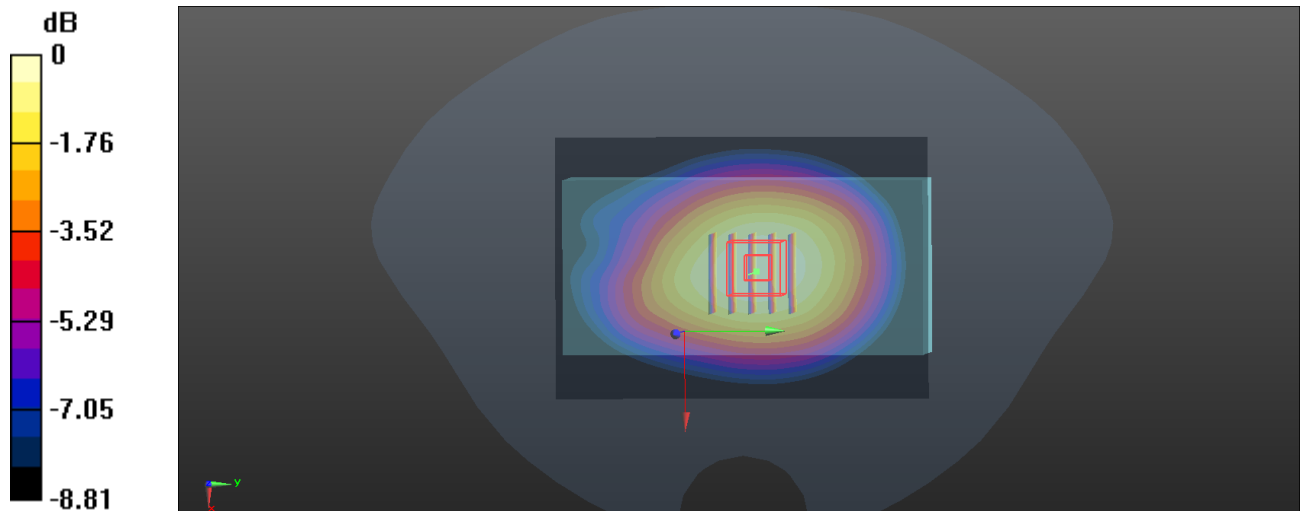

0 dB = 0.717 W/kg

P02 LTE Band 7_QPSK20M_Rear Face_1cm_Ch21100_1RB_OS99

Communication System: LTE-FDD; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600_1031 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.765 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.25 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 18 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.734 W/kg

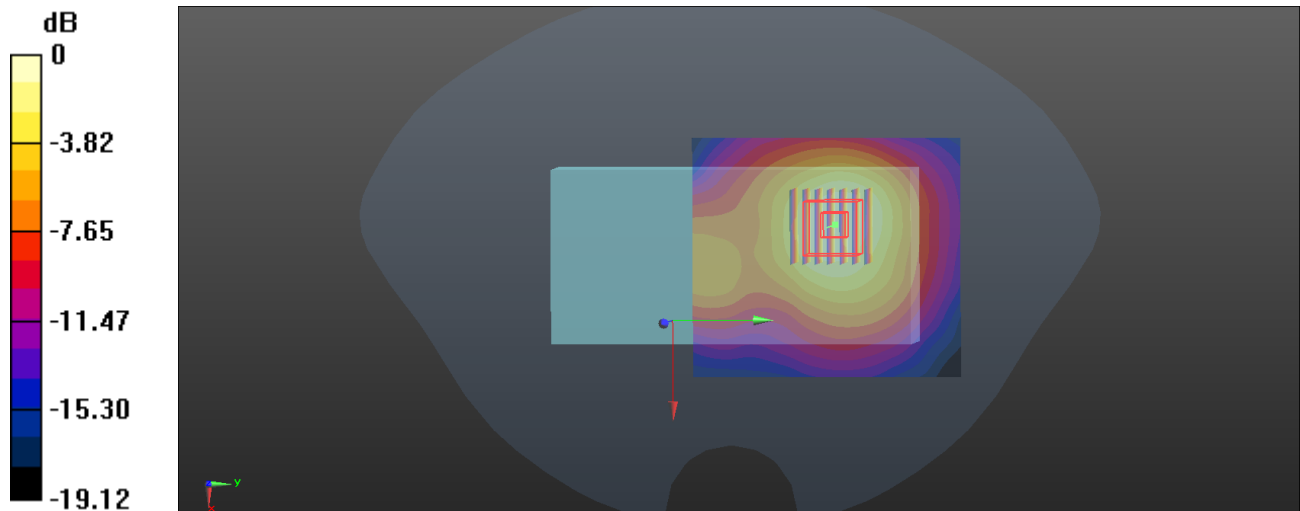

0 dB = 0.734 W/kg

P03 LTE Band 12_QPSK10M_Front Face_1cm_Ch23130_1RB_OS49

Communication System: LTE-FDD; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 711$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.901$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.538 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.30 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 0.545 W/kg

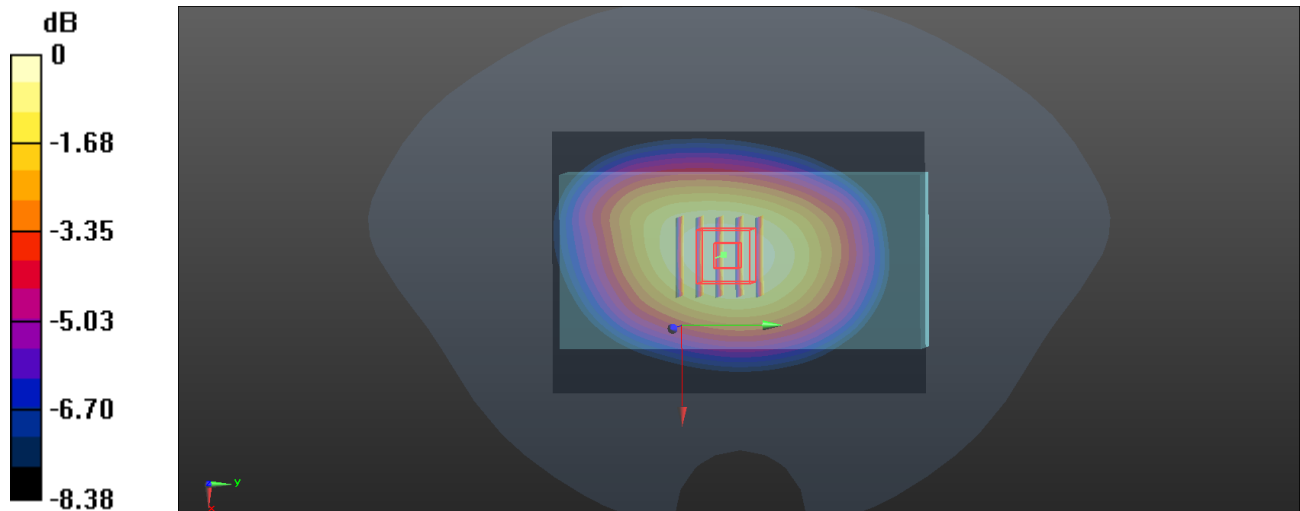

0 dB = 0.545 W/kg

P04 LTE Band 13_QPSK10M_Front Face_1cm_Ch23230_1RB_OS0

Communication System: LTE-FDD; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 782$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.741$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.771 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.69 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.459 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.5%

Maximum value of SAR (measured) = 0.758 W/kg

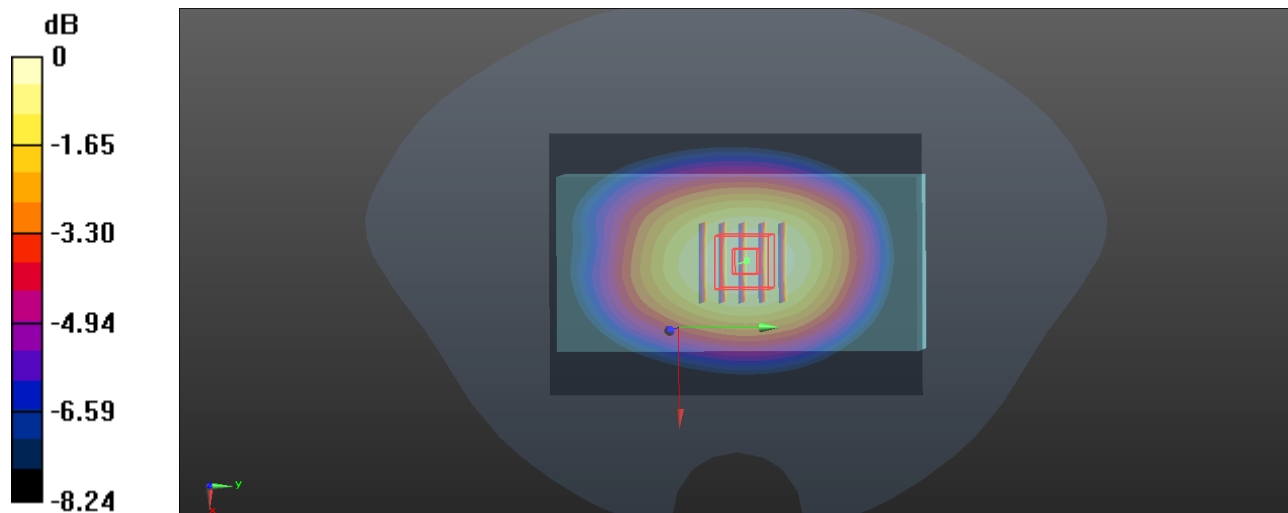

0 dB = 0.758 W/kg

P05 LTE Band 14_QPSK10M_Front Face_1cm_Ch23330_1RB_OS0

Communication System: LTE-FDD; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 793$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.766 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.28 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.451 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 0.764 W/kg

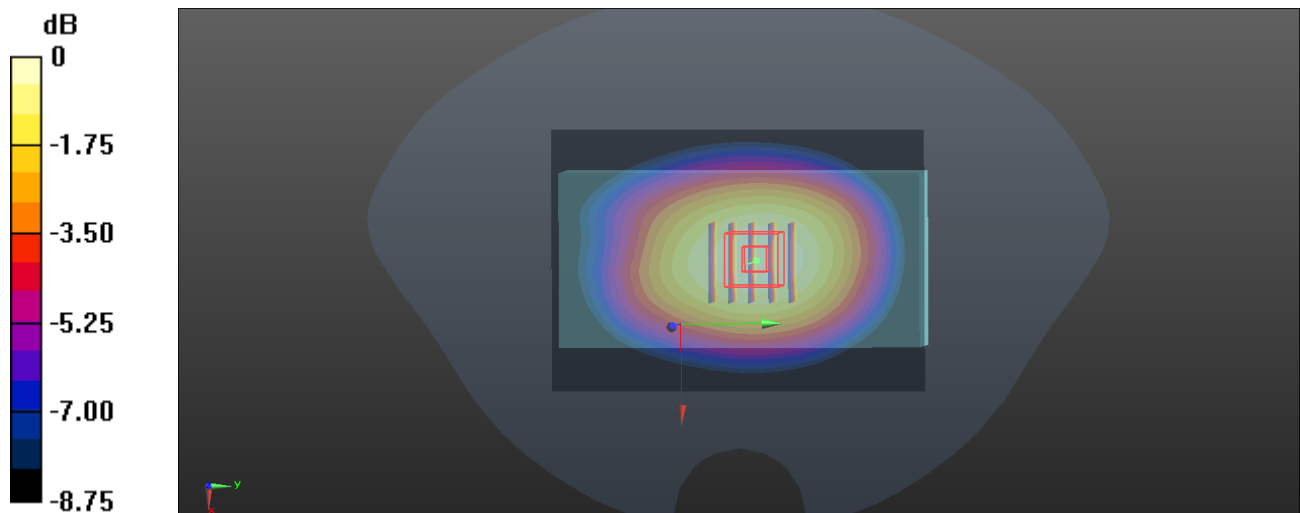

P06 LTE Band 25_QPSK20M_Rear Face_1cm_Ch26590_1RB_OS0

Communication System: LTE-FDD; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: HSL1900_1021 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 40.131$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.77, 7.97, 7.97); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.710 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.78 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.798 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.314 W/kg

Smallest distance from peaks to all points 3 dB below = 17.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 0.689 W/kg

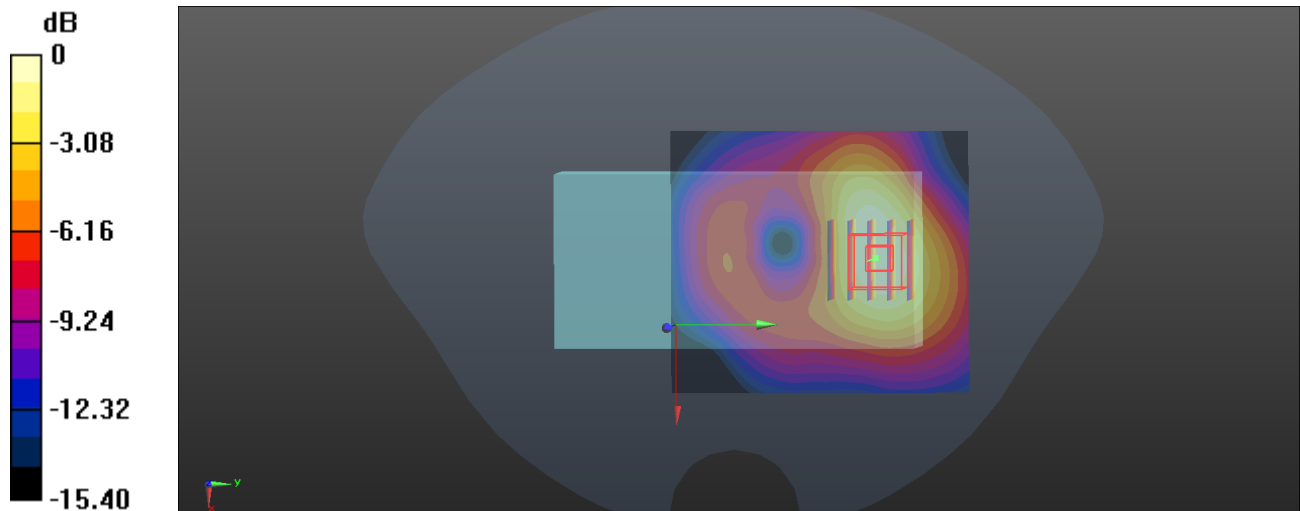

0 dB = 0.689 W/kg

P07 LTE Band 26_QPSK15M_Front Face_1cm_Ch26865_1RB_OS0

Communication System: LTE-FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835_1024 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.559$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.86, 10.86, 10.86); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.714 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.00 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.3%

Maximum value of SAR (measured) = 0.712 W/kg

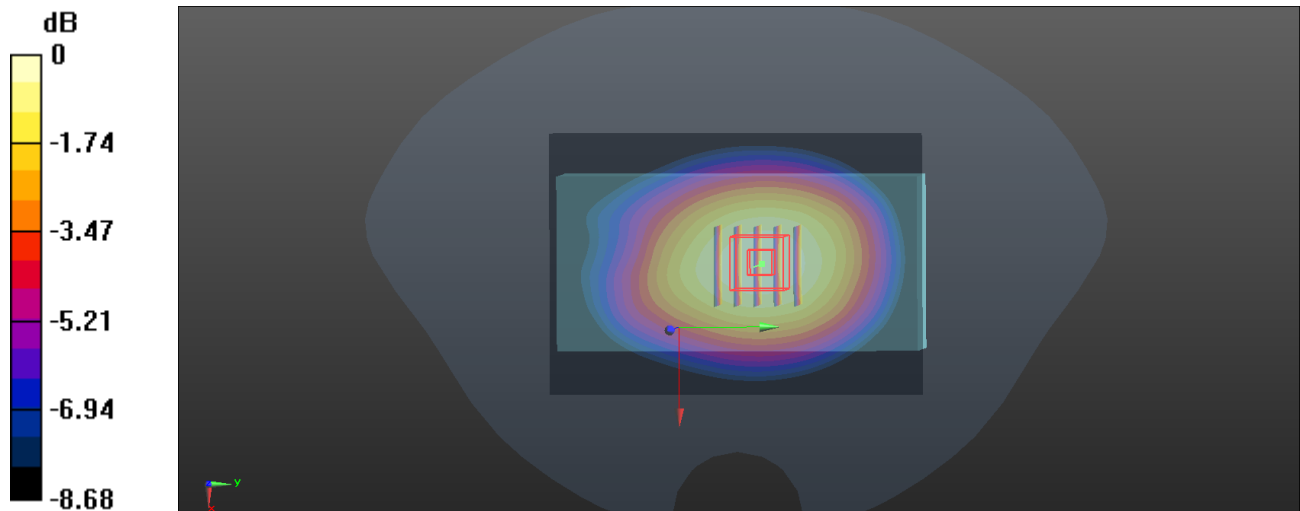

0 dB = 0.712 W/kg

P08 LTE Band 30_QPSK10M_Rear Face_1cm_Ch27710_1RB_OS0

Communication System: LTE-FDD; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300_1030 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 40.315$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.36, 8.36, 8.36); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.725 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 1.26 W/kg

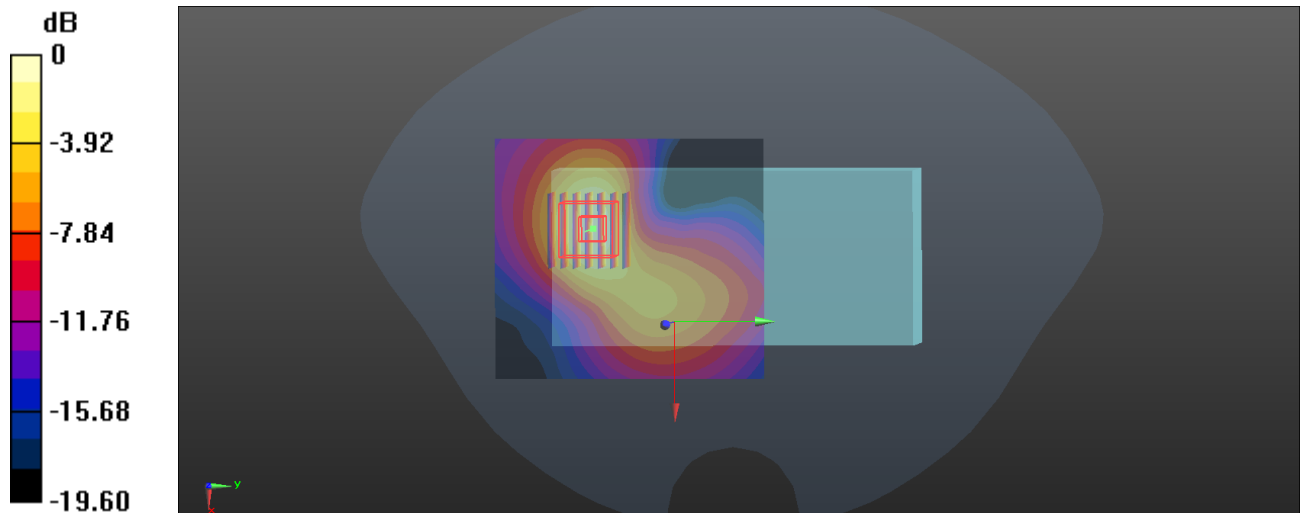

0 dB = 1.26 W/kg

P09 LTE Band 41_QPSK20M_Rear Face_1cm_Ch40185_1RB_OS99

Communication System: LTE-TDD; Frequency: 2549.5 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_1031 Medium parameters used: $f = 2549.5$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 39.958$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.453 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.762 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.169 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.452 W/kg

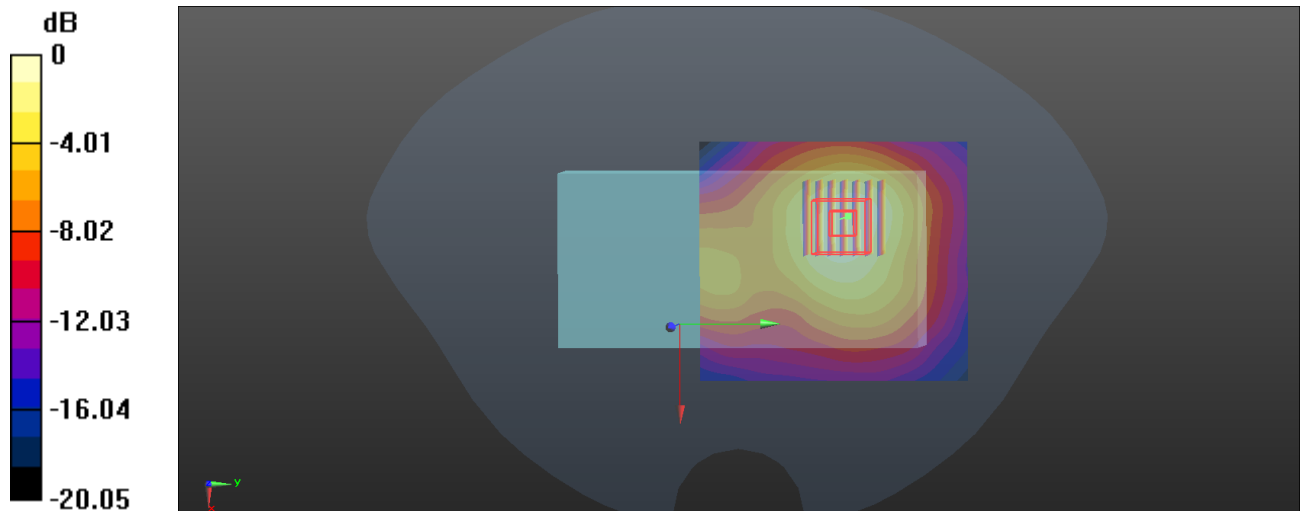

0 dB = 0.452 W/kg

P10 LTE Band 42_QPSK20M_Rear Face_1cm_Ch42590_1RB_OS50

Communication System: LTE-TDD; Frequency: 3500 MHz; Duty Cycle: 1:1.59

Medium: HSL3500_1026 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.816$ S/m; $\epsilon_r = 39.606$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.28, 7.28, 7.28); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.355 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.310 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 15.3 mm

Ratio of SAR at M2 to SAR at M1 = 69.5%

Maximum value of SAR (measured) = 0.356 W/kg

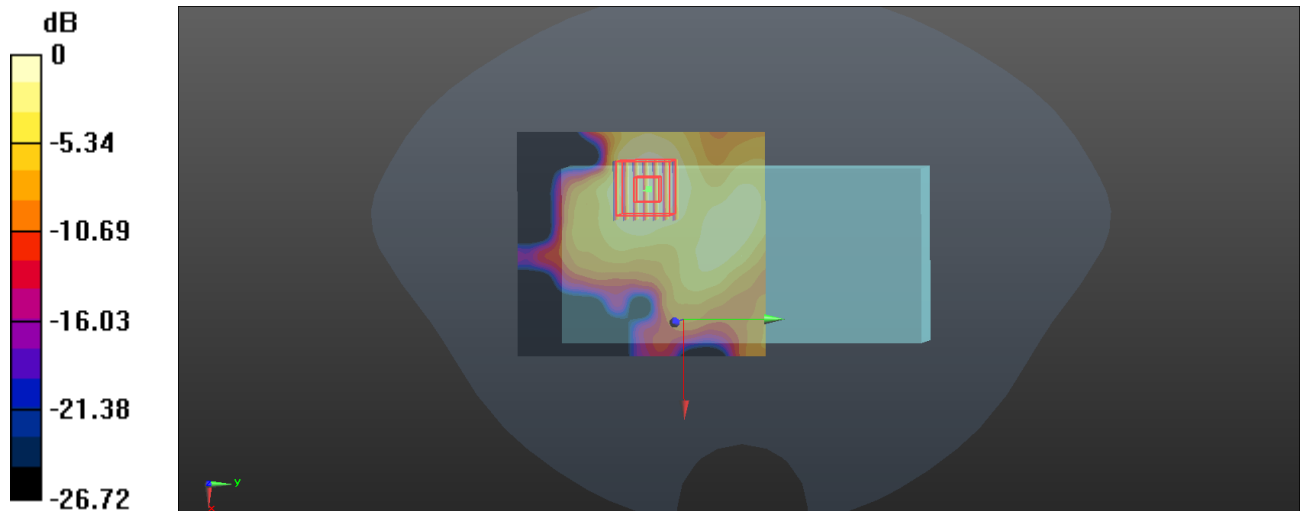

0 dB = 0.356 W/kg

P11 LTE Band 48_QPSK20M_Rear Face_1cm_Ch55830_1RB_OS99

Communication System: LTE-TDD; Frequency: 3609 MHz; Duty Cycle: 1:1.59

Medium: HSL3700_1027 Medium parameters used: $f = 3609$ MHz; $\sigma = 2.919$ S/m; $\epsilon_r = 39.438$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.05, 7.05, 7.05); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.511 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.957 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 0.495 W/kg

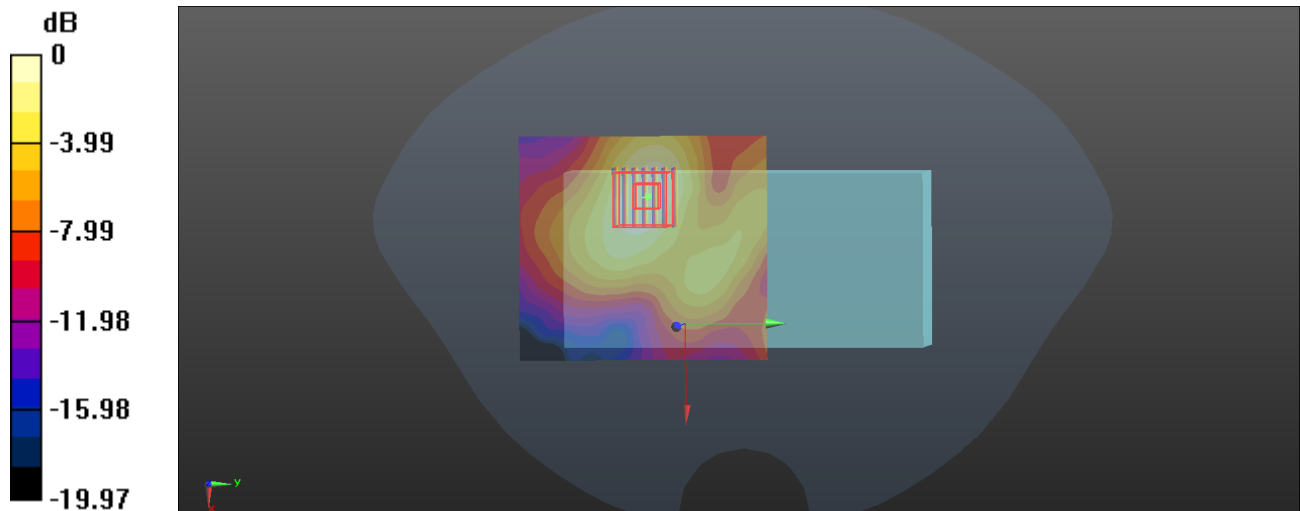

0 dB = 0.495 W/kg

P12 LTE Band 66_QPSK20M_Rear Face_1cm_Ch132572_1RB_OS0

Communication System: LTE-FDD; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750_1020 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 41.048$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.16, 9.16, 9.16); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.531 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.83 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below = 22.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 0.514 W/kg

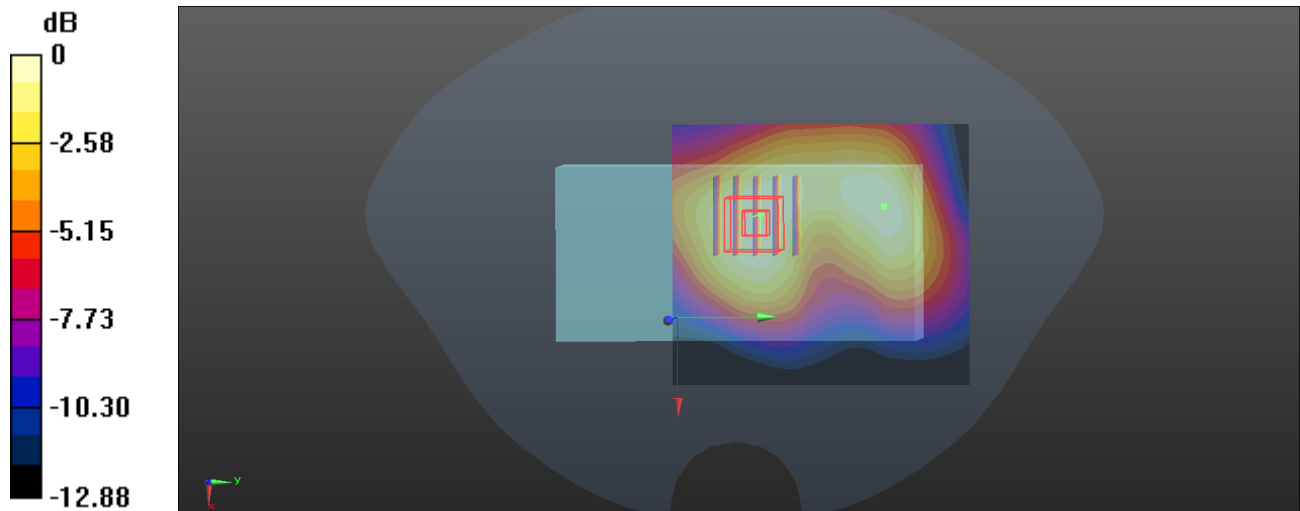

0 dB = 0.514 W/kg

P13 LTE Band 71_QPSK20M_Rear Face_1cm_Ch133372_1RB_OS0

Communication System: LTE-FDD; Frequency: 688 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 688$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 43.006$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.394 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.82 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.3%

Maximum value of SAR (measured) = 0.394 W/kg

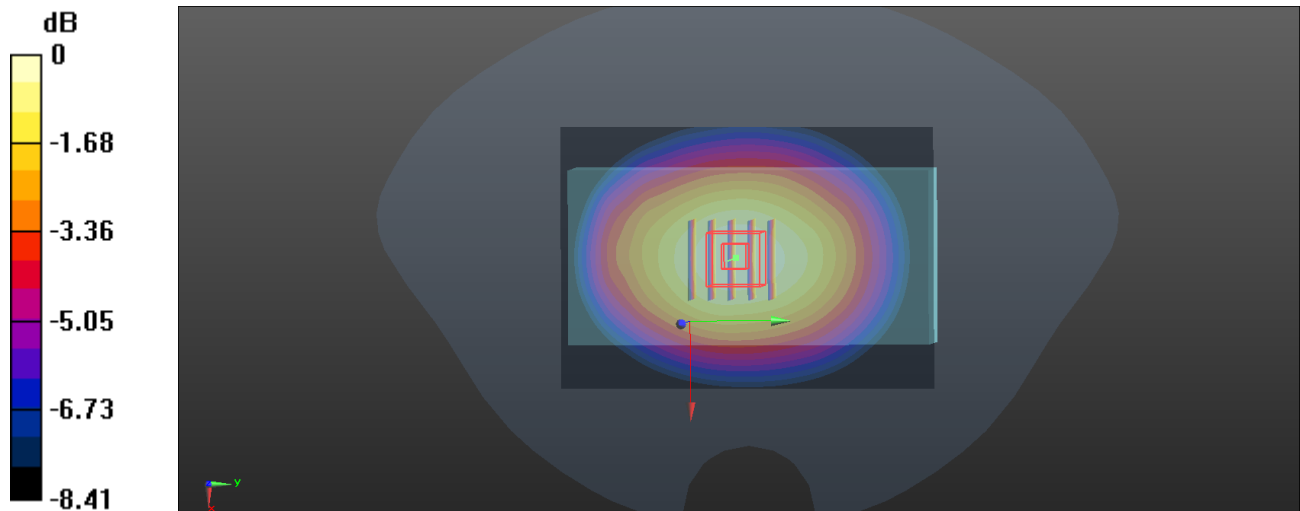

0 dB = 0.394 W/kg

P14 FR1 n5_DFT-QPSK20M_Front Face_1cm_Ch166800_1RB_OS1

Communication System: 5G NR; Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835_1024 Medium parameters used: $f = 834$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.548$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.86, 10.86, 10.86); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.712 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.62 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.9%

Maximum value of SAR (measured) = 0.714 W/kg

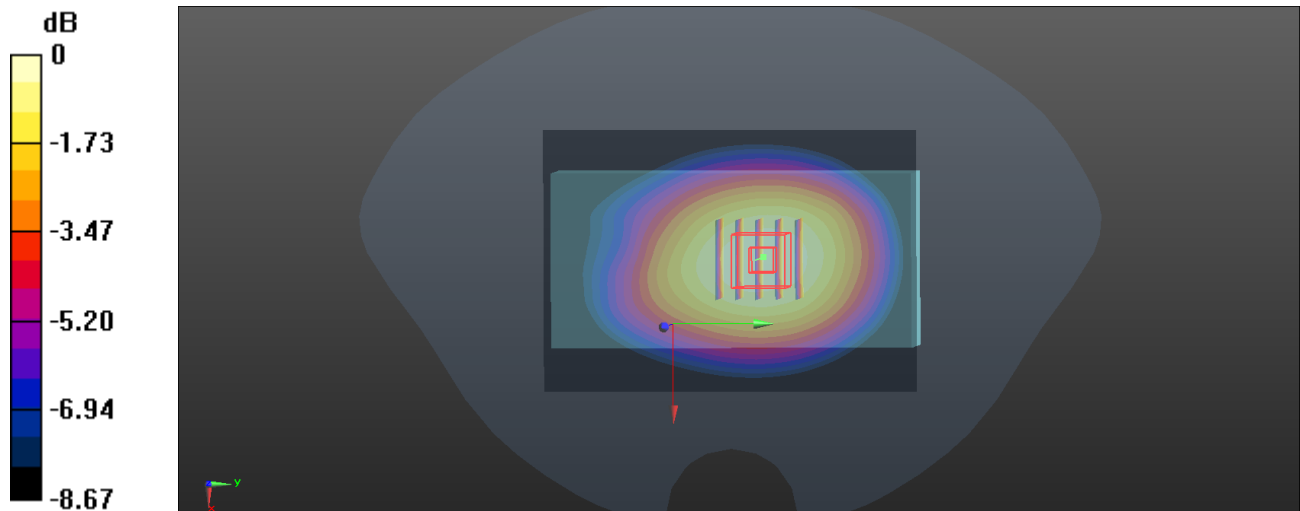

0 dB = 0.714 W/kg

P15 FR1 n7_DFT-QPSK40M_Rear Face_1cm_Ch507000_1RB_OS1

Communication System: 5G NR; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600_1031 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.906$ S/m; $\epsilon_r = 39.98$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.791 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.45 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.950 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.293 W/kg

Smallest distance from peaks to all points 3 dB below = 16.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 0.789 W/kg

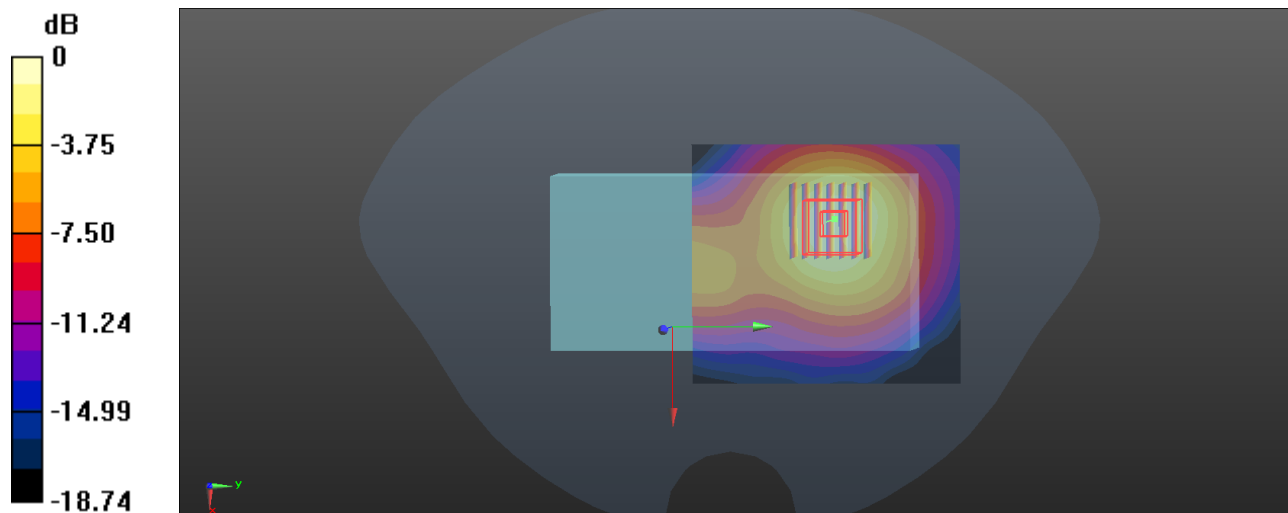

0 dB = 0.789 W/kg

P16 FR1 n12_DFT-QPSK15M_Rear Face_1cm_Ch141300_36RB_OS22

Communication System: 5G NR; Frequency: 706.5 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 706.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.921$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.530 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.34 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.310 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 71.3%

Maximum value of SAR (measured) = 0.531 W/kg

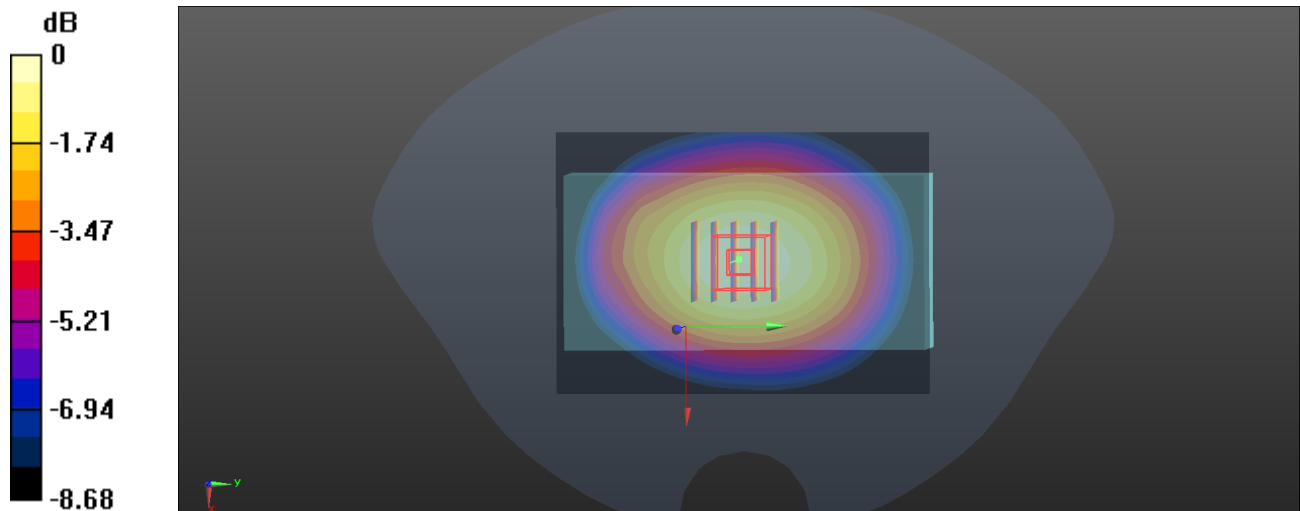

0 dB = 0.531 W/kg

P17 FR1 n14_DFT-QPSK10M_Front Face_1cm_Ch158600_25RB_OS14

Communication System: 5G NR; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 793$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.740 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.80 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.449 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 0.744 W/kg

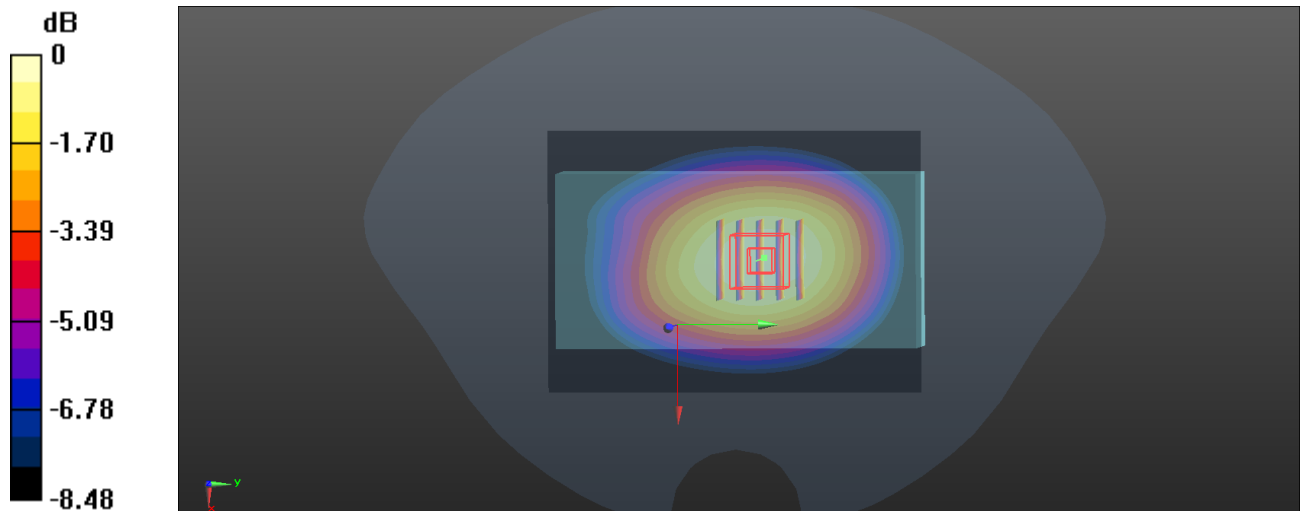

0 dB = 0.744 W/kg

P18 FR1 n25_DFT-QPSK40M_Front Face_1cm_Ch376500_108RB_OS54

Communication System: 5G NR; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1900_1021 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.129$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.77, 7.97, 7.97); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.644 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.937 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 0.636 W/kg

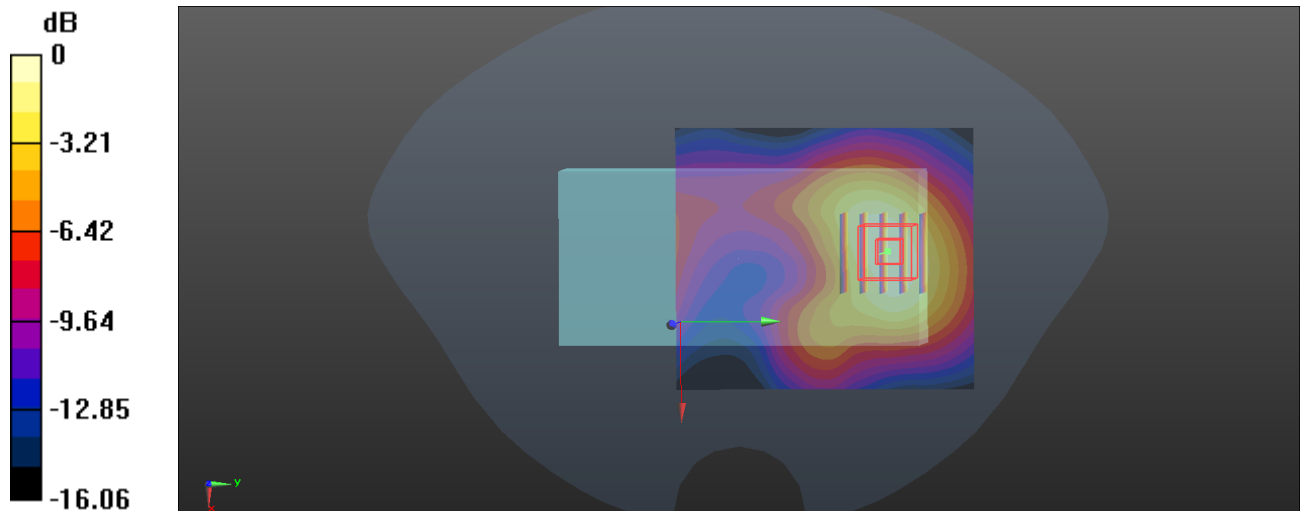

0 dB = 0.636 W/kg

P19 FR1 n30_DFT-QPSK10M_Rear Face_1cm_Ch462000_25RB_OS14

Communication System: 5G NR; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300_1030 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 40.315$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.36, 8.36, 8.36); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.69 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.970 W/kg; SAR(10 g) = 0.510 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 1.46 W/kg

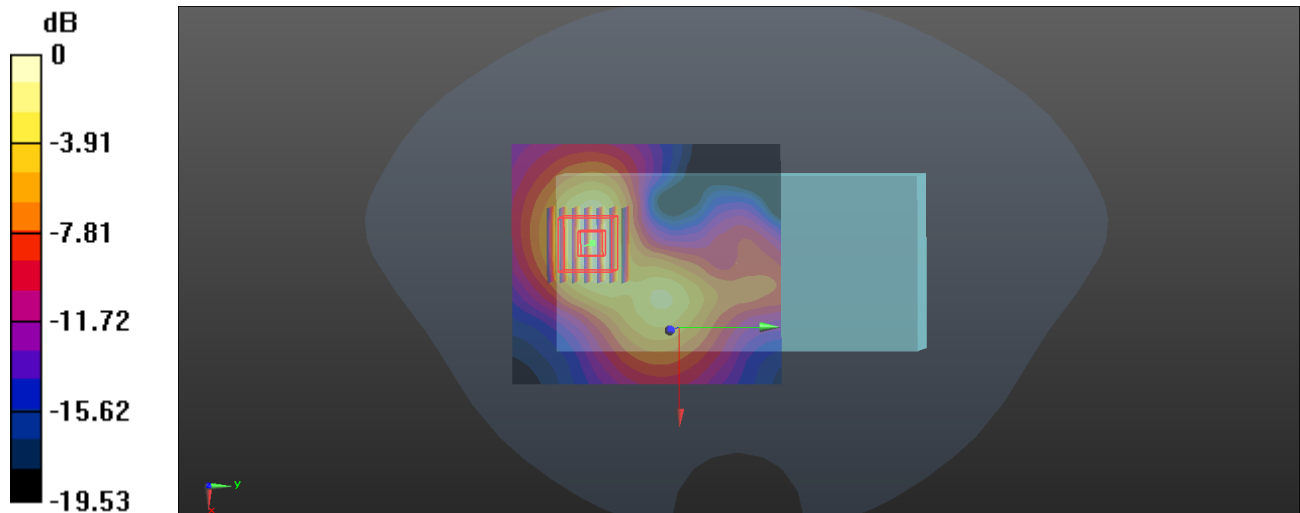

0 dB = 1.46 W/kg

P20 FR1 n41_DFT-QPSK100M_Rear Face_1cm_Ch528000_135RB_OS69

Communication System: 5G NR; Frequency: 2640 MHz; Duty Cycle: 1:2.5

Medium: HSL2600_1031 Medium parameters used: $f = 2640$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 39.81$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.320 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.300 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 16.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 0.323 W/kg

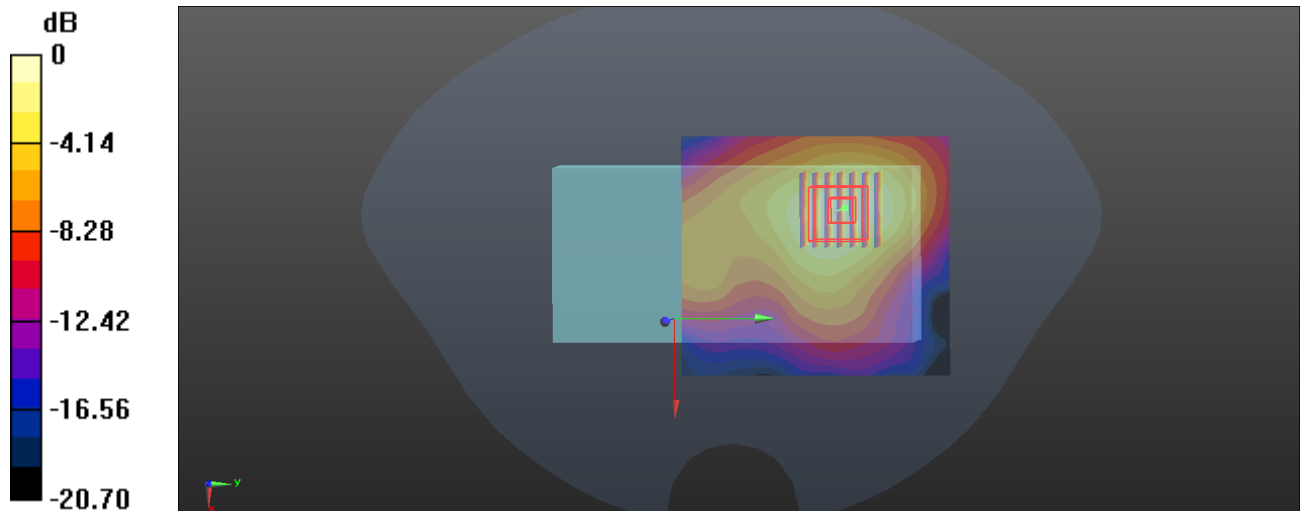

0 dB = 0.323 W/kg

P21 FR1 n48_DFT-QPSK40M_Rear Face_1cm_Ch645332_50RB_OS28

Communication System: 5G NR; Frequency: 3679.98 MHz; Duty Cycle: 1:2.5

Medium: HSL3700_1027 Medium parameters used: $f = 3680$ MHz; $\sigma = 2.989$ S/m; $\epsilon_r = 39.318$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.05, 7.05, 7.05); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.411 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.177 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 0.394 W/kg

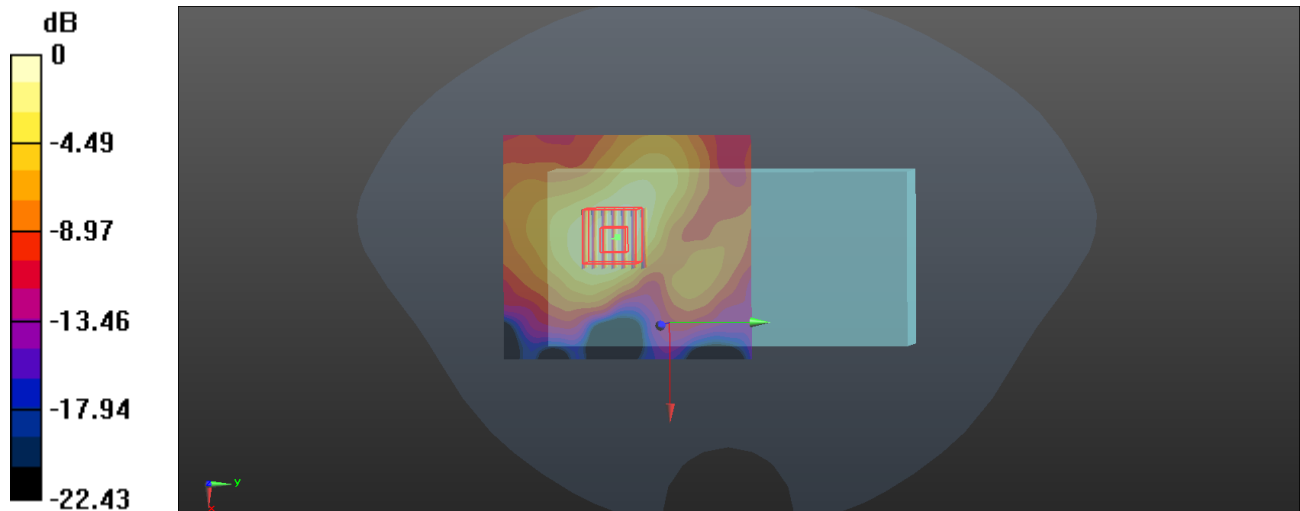

0 dB = 0.394 W/kg

P22 FR1 n66_DFT-QPSK40M_Front Face_1cm_Ch352000_108RB_OS54

Communication System: 5G NR; Frequency: 1760 MHz; Duty Cycle: 1:1

Medium: HSL1750_1020 Medium parameters used: $f = 1760$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 41.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.16, 9.16, 9.16); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.706 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 0.733 W/kg

Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.252 W/kg

Smallest distance from peaks to all points 3 dB below = 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.690 W/kg

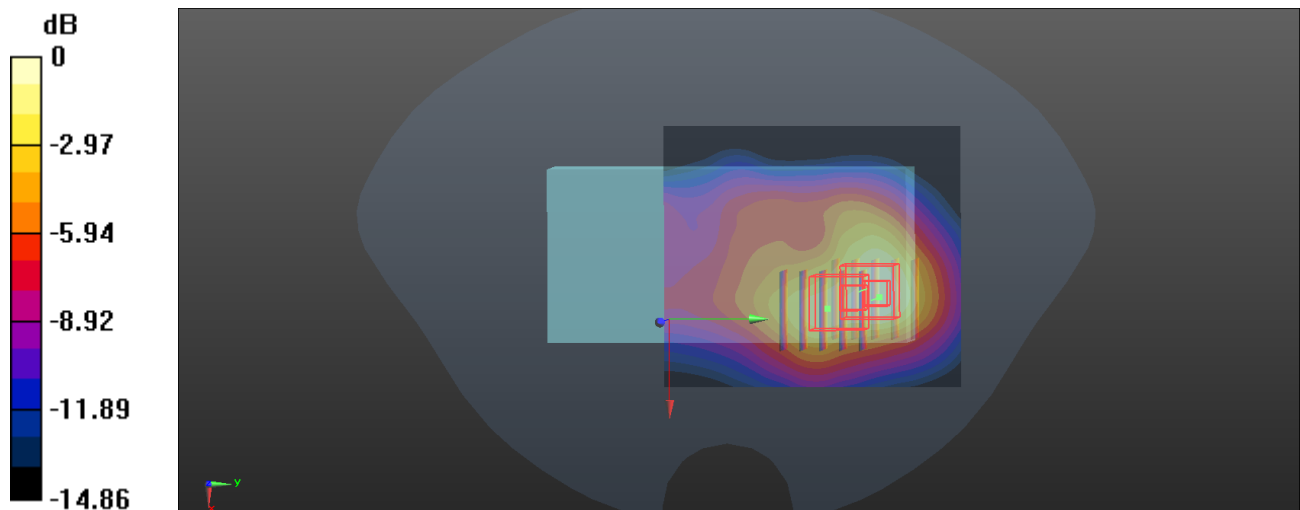

0 dB = 0.690 W/kg

P23 FR1 n71_DFT-QPSK20M_Rear Face_1cm_Ch137600_50RB_OS28

Communication System: 5G NR; Frequency: 688 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 688$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 43.006$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.442 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.13 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.261 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.3%

Maximum value of SAR (measured) = 0.442 W/kg

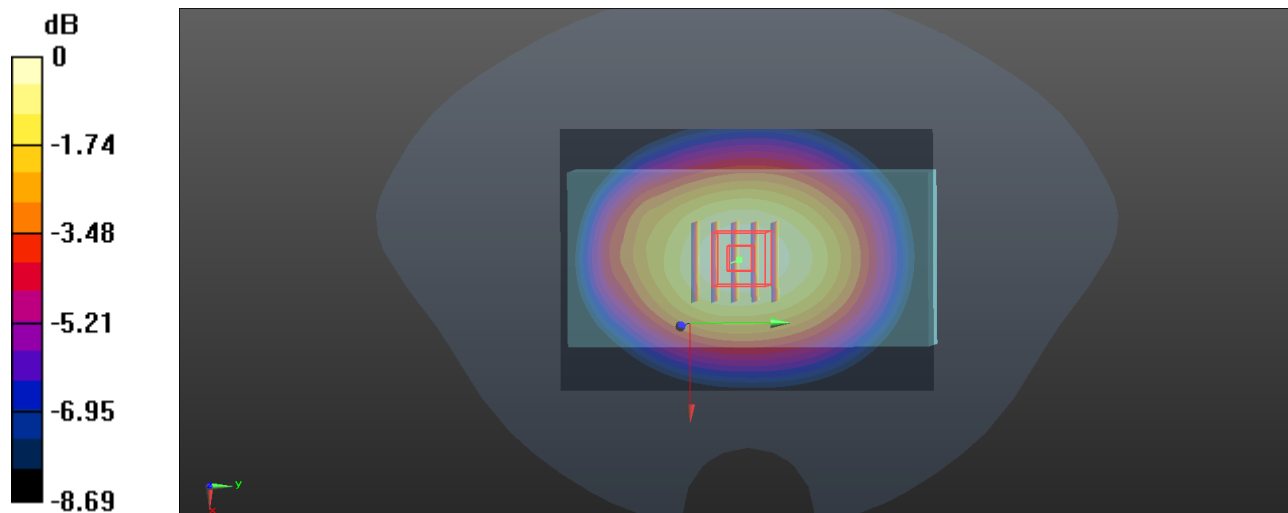

0 dB = 0.442 W/kg

P24 FR1 n77_DFT-QPSK100M_Front Face_1cm_Ch656000_135RB_OS69

Communication System: 5G NR; Frequency: 3840 MHz; Duty Cycle: 1:2.5

Medium: HSL3900_1028 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.145$ S/m; $\epsilon_r = 39.051$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(6.94, 6.94, 6.94); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.695 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.689 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.921 W/kg

SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below = 13.1 mm

Ratio of SAR at M2 to SAR at M1 = 70%

Maximum value of SAR (measured) = 0.706 W/kg

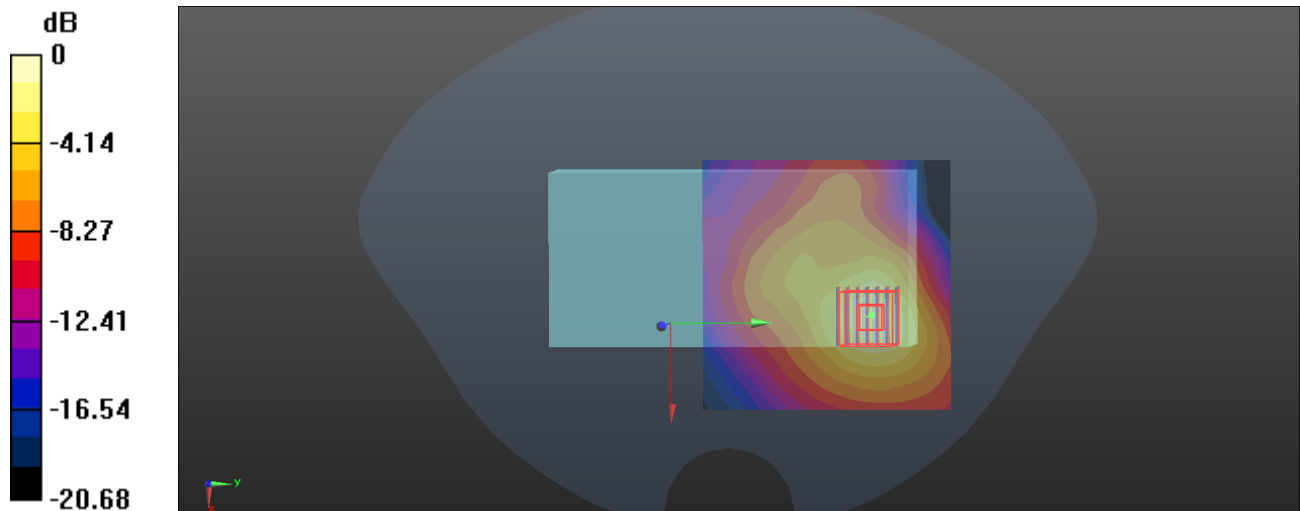

0 dB = 0.706 W/kg

P25 WLAN 2.4GHz_802.11b_Rear Face_1cm_Ch11

Communication System: WiFi 2.4 GHz; Frequency: 2462 MHz; Duty Cycle: 1:1.015

Medium: HSL2450_1102 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.849$ S/m; $\epsilon_r = 40.105$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.1, 8.1, 8.1); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.120 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.428 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.123 W/kg

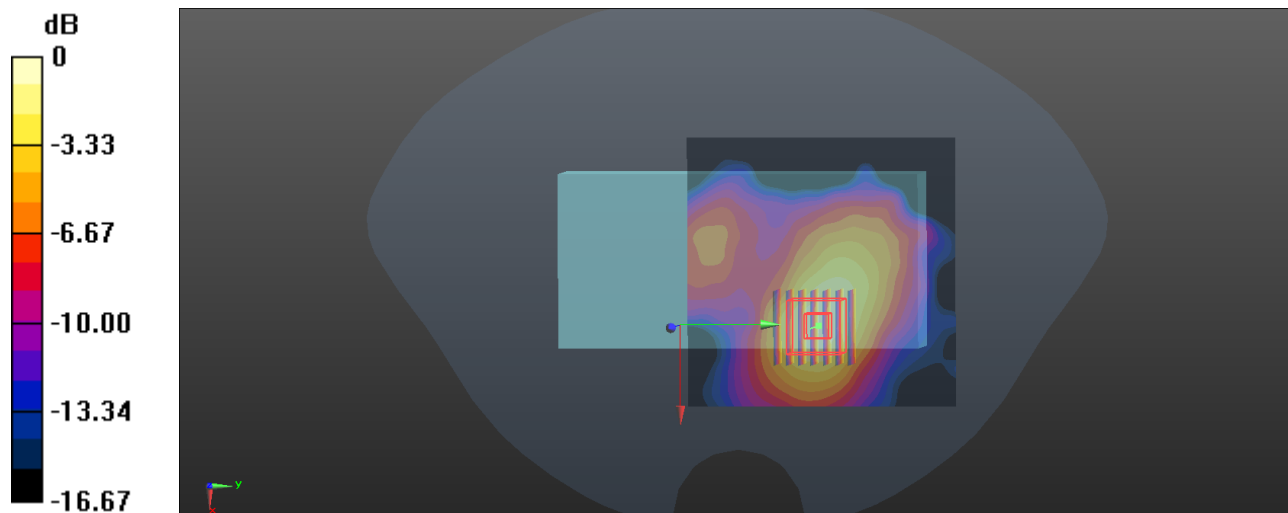

0 dB = 0.123 W/kg

P26 WLAN 5GHz_802.11a_Rear Face_1cm_Ch64

Communication System: WiFi 5 GHz; Frequency: 5320 MHz; Duty Cycle: 1:1.01

Medium: HSL5250_1103 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.589$ S/m; $\epsilon_r = 36.987$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.71, 5.71, 5.71); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.258 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.546 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.250 W/kg

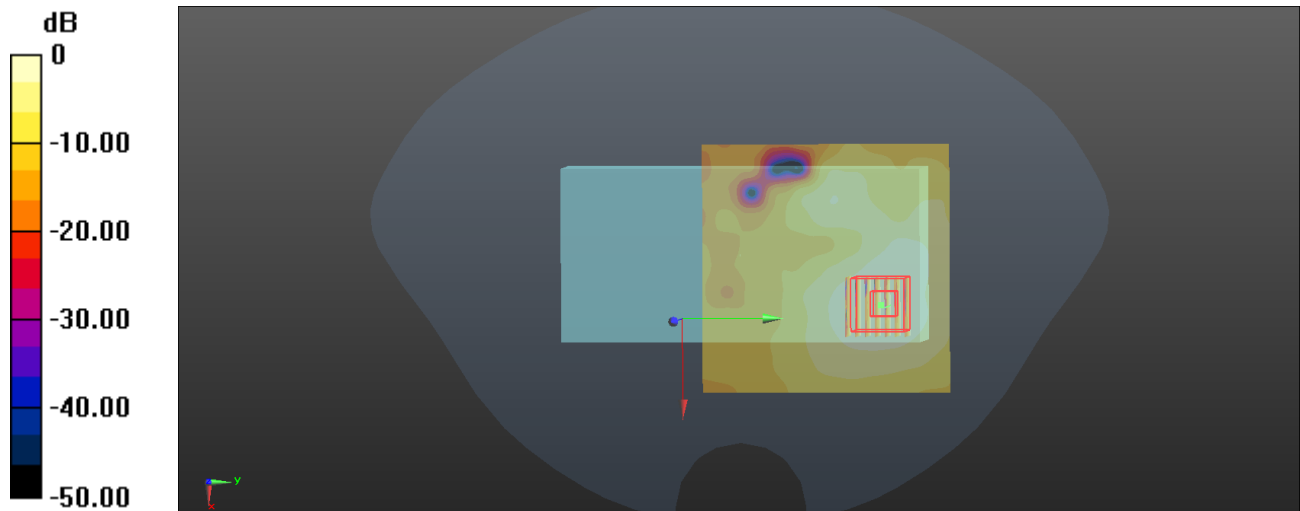

0 dB = 0.250 W/kg = -6.02 dBW/kg

P27 WLAN 5GHz_802.11a_Rear Face_1cm_Ch100

Communication System: WiFi 5 GHz; Frequency: 5500 MHz; Duty Cycle: 1:1.01

Medium: HSL5600_1104 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.782$ S/m; $\epsilon_r = 36.701$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.1, 5.1, 5.1); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.367 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.866 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.345 W/kg

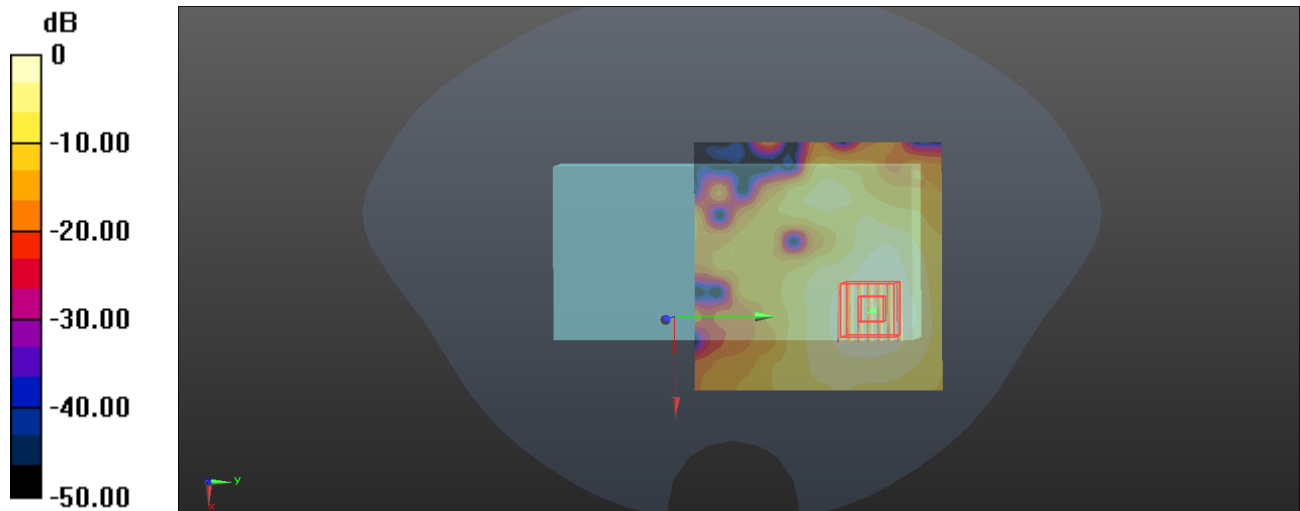

0 dB = 0.345 W/kg

P28 WLAN 5GHz_802.11a_Rear Face_1cm_Ch149

Communication System: WiFi 5 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1.01

Medium: HSL5750_1106 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.084$ S/m; $\epsilon_r = 36.315$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.21, 5.21, 5.21); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.287 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.950 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.285 W/kg

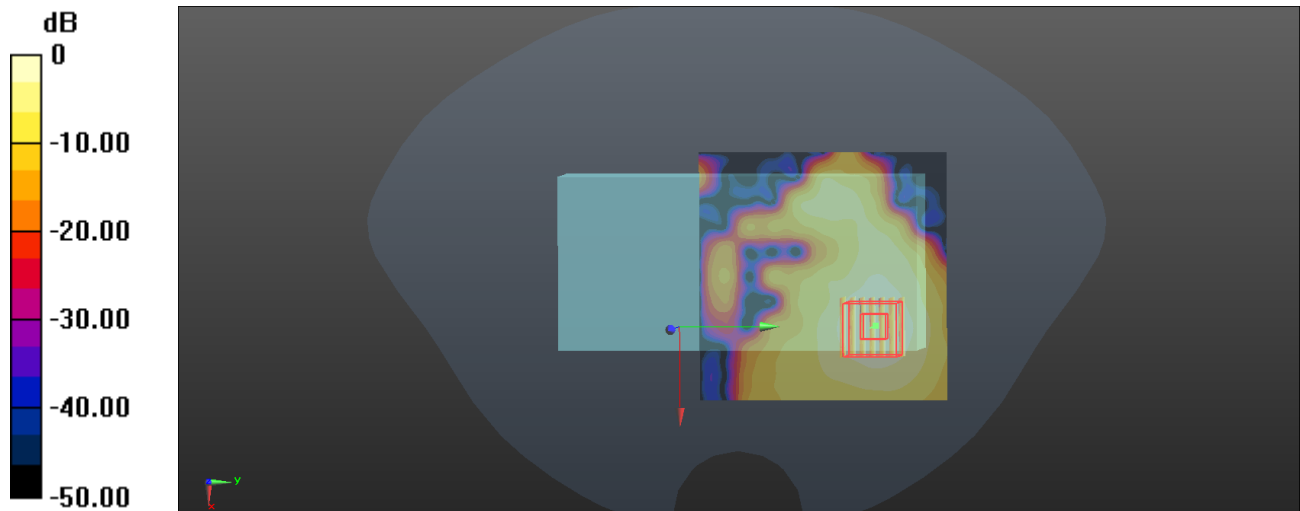

0 dB = 0.285 W/kg = -5.45 dBW/kg

P29 Bluetooth_GFSK_Front Face_1cm_Ch39

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450_1102 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.835$ S/m; $\epsilon_r = 40.138$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.1, 8.1, 8.1); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0388 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.9980 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 0.0355 W/kg

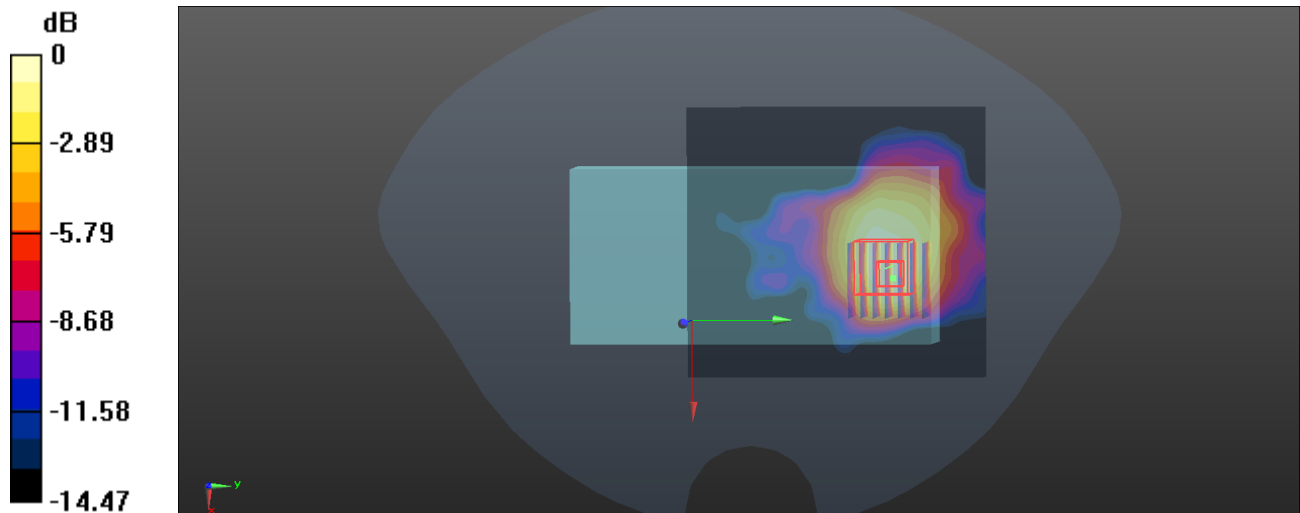

0 dB = 0.0355 W/kg

P30 LTE Band 5_QPSK10M_Front Face_1cm_Ch20600_1RB_OS0

Communication System: LTE-FDD; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: HSL835_1024 Medium parameters used: $f = 844$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.511$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.86, 10.86, 10.86); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.729 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.69 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.4%

Maximum value of SAR (measured) = 0.717 W/kg

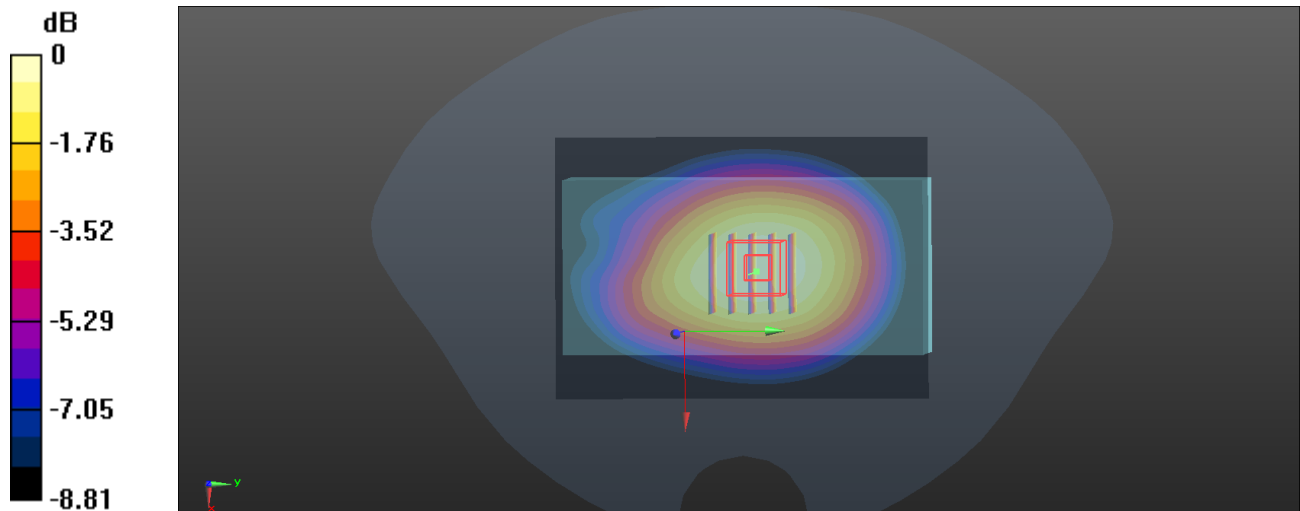

0 dB = 0.717 W/kg

P31 LTE Band 7_QPSK20M_Right Side_1cm_Ch21350_50RB_OS50

Communication System: LTE-FDD; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL2600_1031 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 39.943$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.934 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.32 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 0.913 W/kg

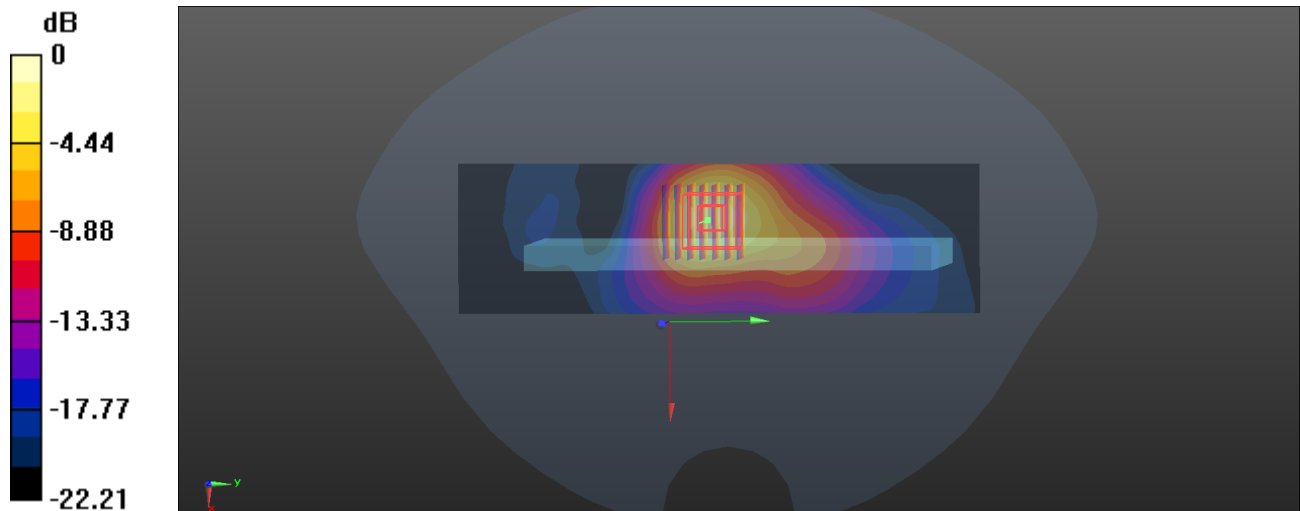

0 dB = 0.913 W/kg

P32 LTE Band 12_QPSK10M_Front Face_1cm_Ch23130_1RB_OS49

Communication System: LTE-FDD; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 711$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.901$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.538 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.30 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 0.545 W/kg

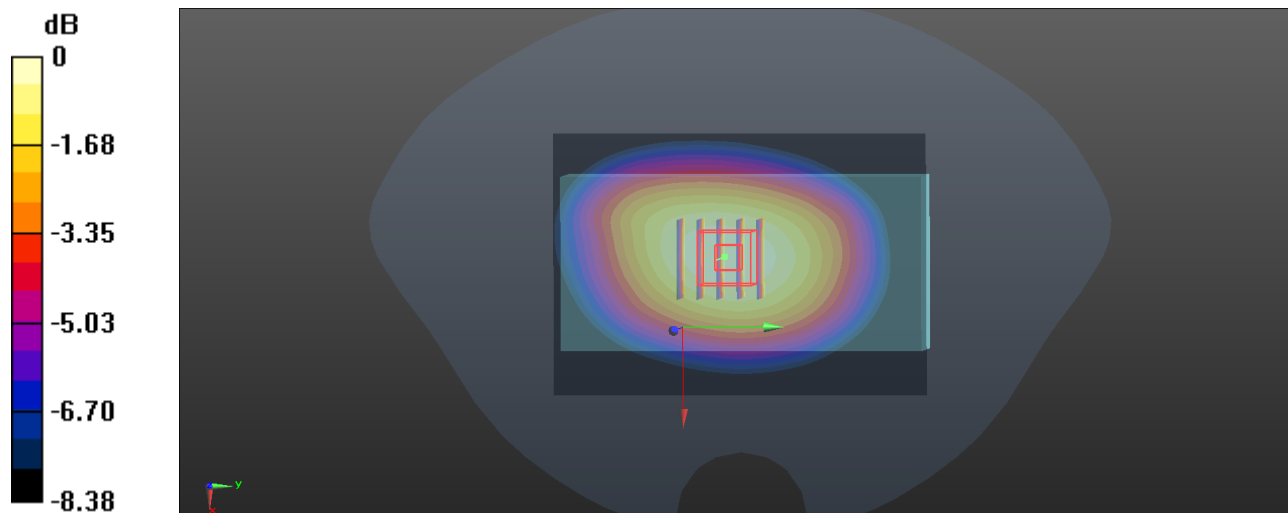

0 dB = 0.545 W/kg

P33 LTE Band 13_QPSK10M_Front Face_1cm_Ch23230_1RB_OS0

Communication System: LTE-FDD; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 782$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.741$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.771 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.69 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.459 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.5%

Maximum value of SAR (measured) = 0.758 W/kg

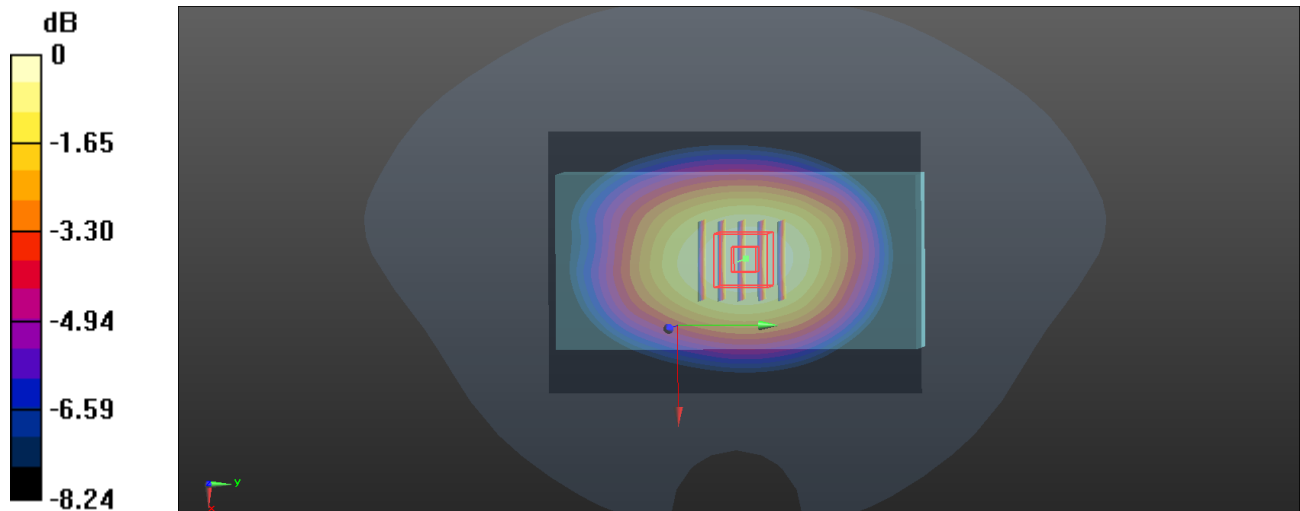

0 dB = 0.758 W/kg

P34 LTE Band 14_QPSK10M_Front Face_1cm_Ch23330_1RB_OS0

Communication System: LTE-FDD; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 793$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.766 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.28 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.451 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 0.764 W/kg

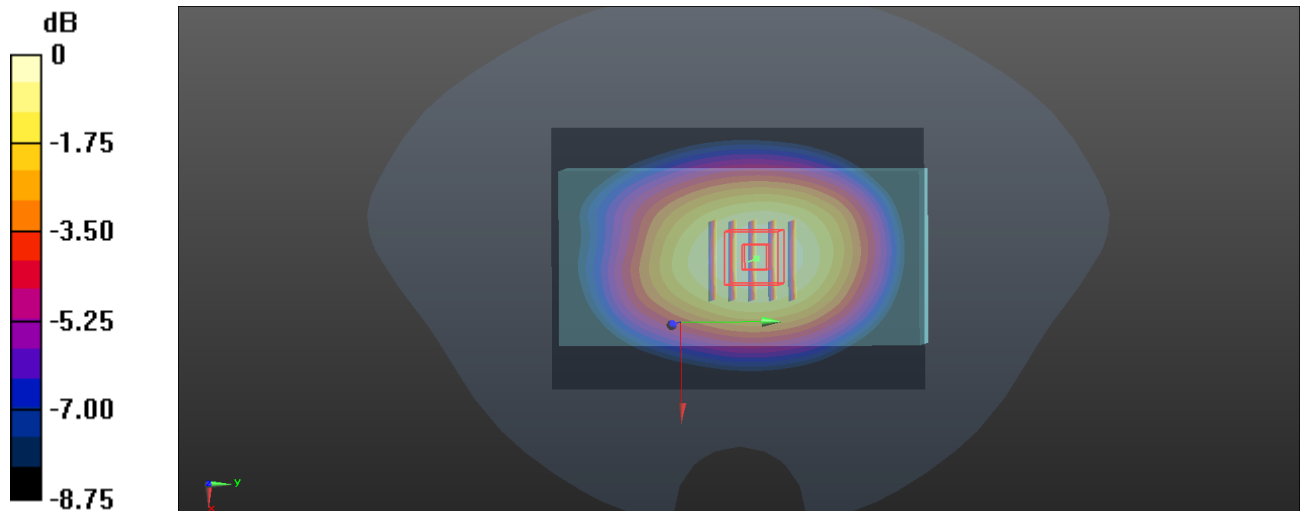

0 dB = 0.764 W/kg

P35 LTE Band 25_QPSK20M_Right Side_1cm_Ch26140_1RB_OS0

Communication System: LTE-FDD; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900_1021 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 40.172$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.77, 7.97, 7.97); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.938 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.20 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 0.910 W/kg

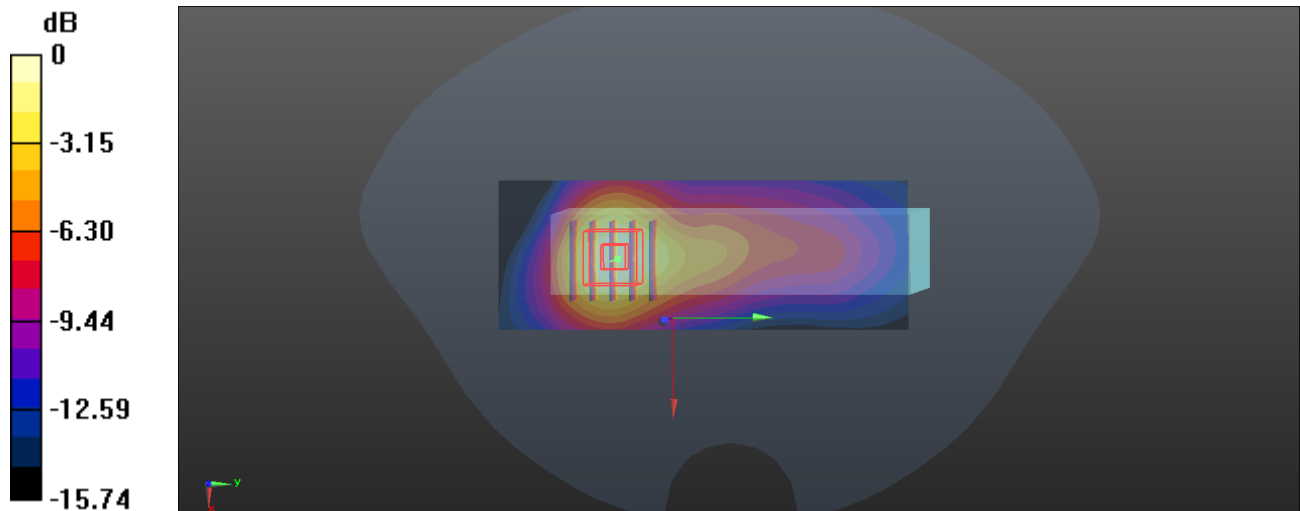

0 dB = 0.910 W/kg

P36 LTE Band 26_QPSK15M_Front Face_1cm_Ch26865_1RB_OS0

Communication System: LTE-FDD; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835_1024 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.559$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.86, 10.86, 10.86); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.714 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.00 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 73.3%

Maximum value of SAR (measured) = 0.712 W/kg

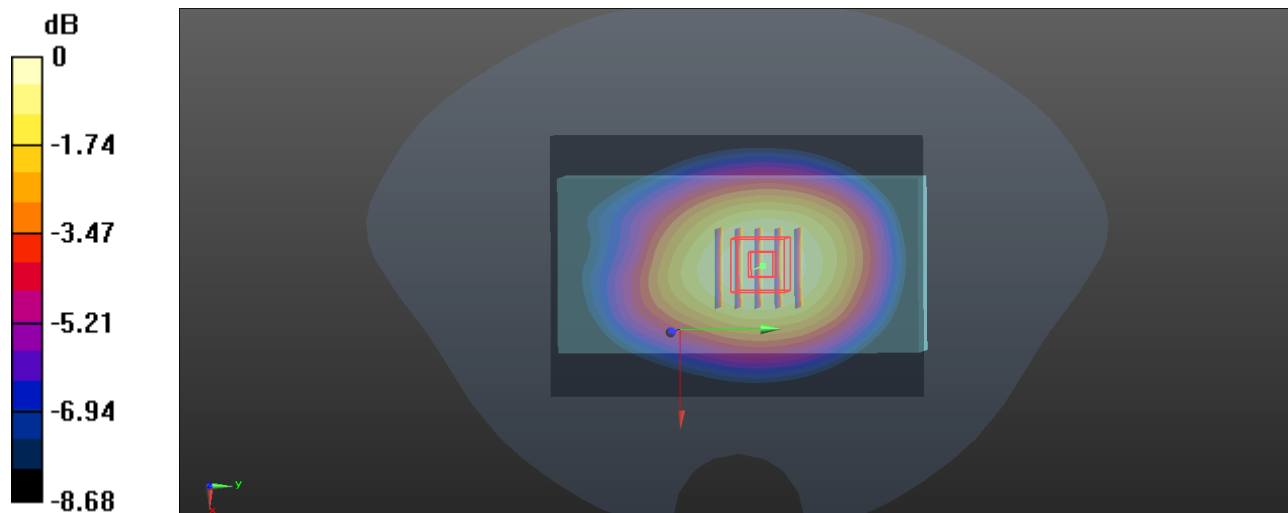

0 dB = 0.712 W/kg

P37 LTE Band 30_QPSK10M_Bottom Side_1cm_Ch27710_1RB_OS0

Communication System: LTE-FDD; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300_1030 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 40.315$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.36, 8.36, 8.36); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.50 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.03 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.939 W/kg; SAR(10 g) = 0.486 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 1.45 W/kg

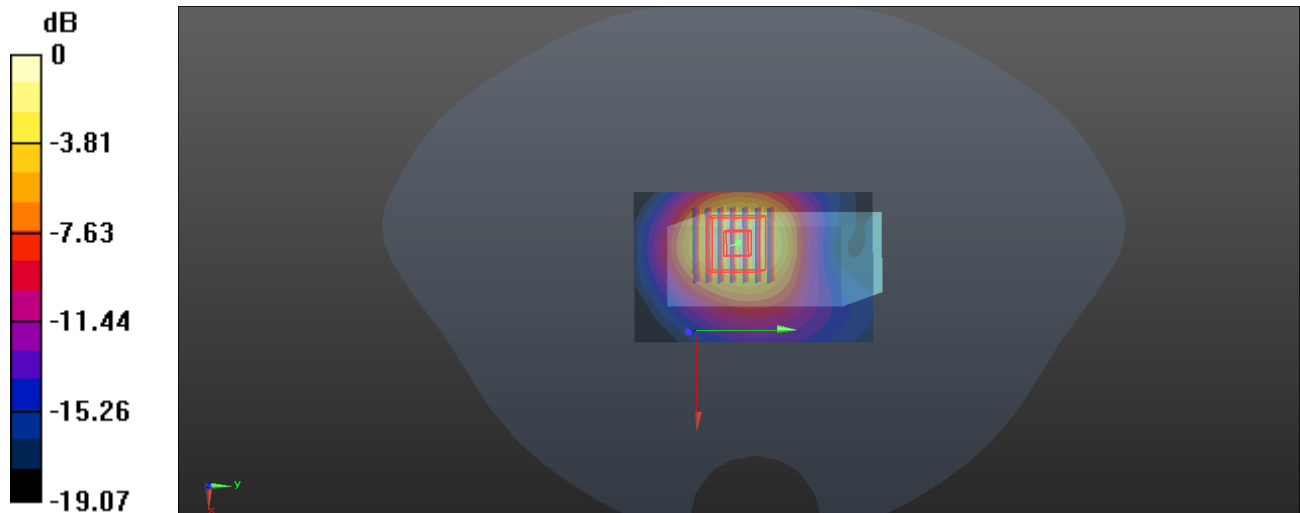

0 dB = 1.45 W/kg = 1.61 dBW/kg

P38_LTE Band 41_QPSK20M_Right Side_1cm_Ch41055_1RB_OS0

Communication System: LTE-TDD; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: HSL2600_1031 Medium parameters used: $f = 2637$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 39.813$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.917 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.23 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.980 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.224 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.796 W/kg

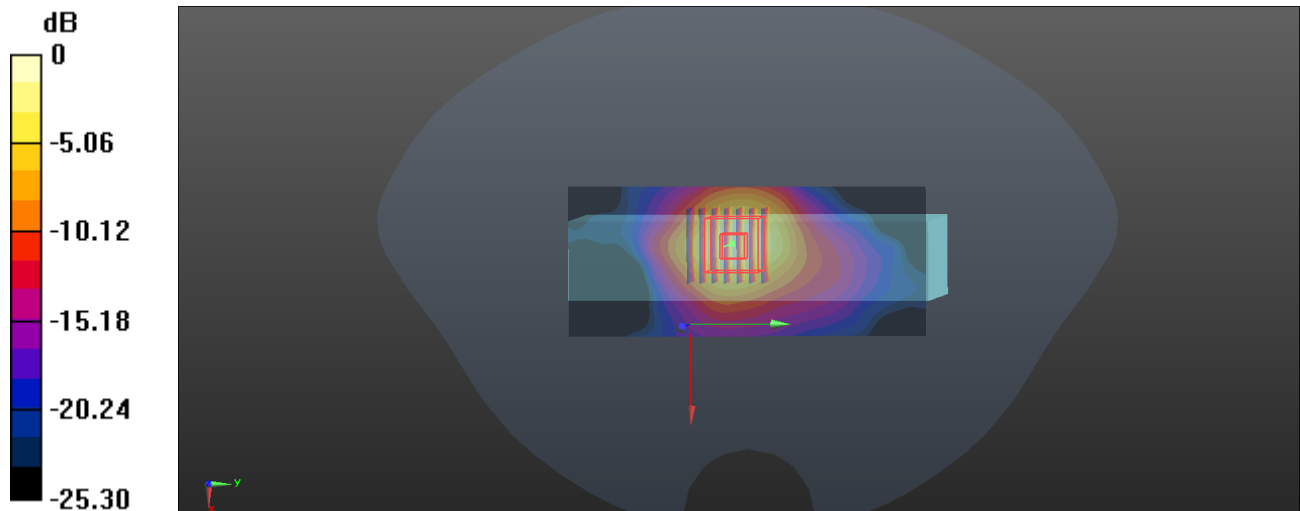

0 dB = 0.796 W/kg

P39 LTE Band 42_QPSK20M_Right Side_1cm_Ch42990_1RB_OS50

Communication System: LTE-TDD; Frequency: 3540 MHz; Duty Cycle: 1:1.59

Medium: HSL3500_1026 Medium parameters used: $f = 3540$ MHz; $\sigma = 2.854$ S/m; $\epsilon_r = 39.537$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.28, 7.28, 7.28); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.648 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.16 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 0.617 W/kg

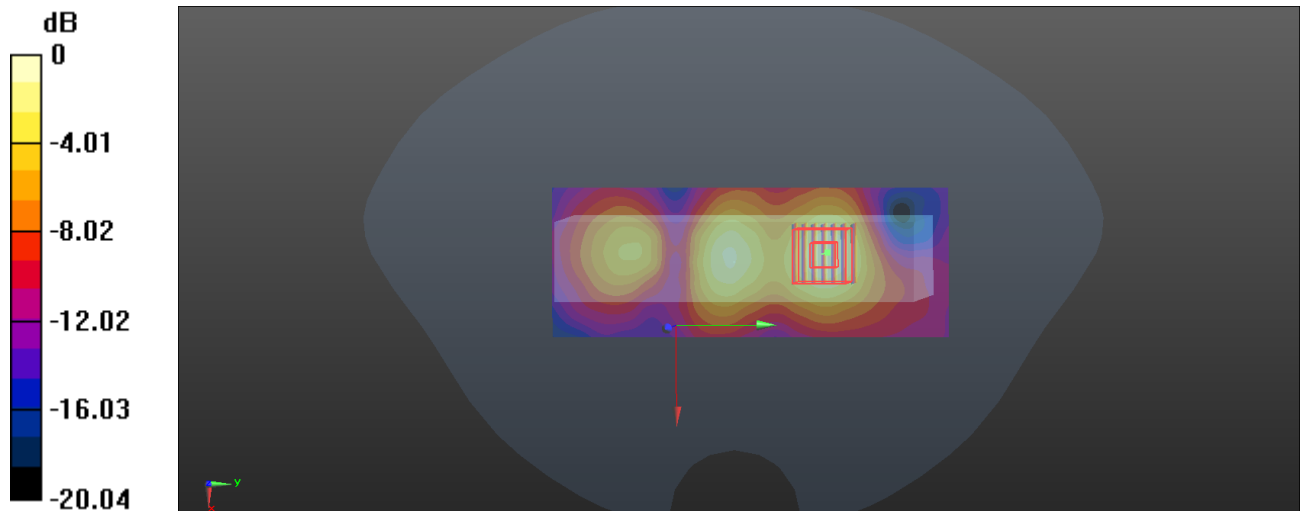

P40 LTE Band 48_QPSK20M_Right Side_1cm_Ch56150_1RB_OS99

Communication System: LTE-TDD; Frequency: 3641 MHz; Duty Cycle: 1:1.59

Medium: HSL3700_1027 Medium parameters used: $f = 3641$ MHz; $\sigma = 2.95$ S/m; $\epsilon_r = 39.378$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.05, 7.05, 7.05); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.803 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.95 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.193 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 69.7%

Maximum value of SAR (measured) = 0.777 W/kg

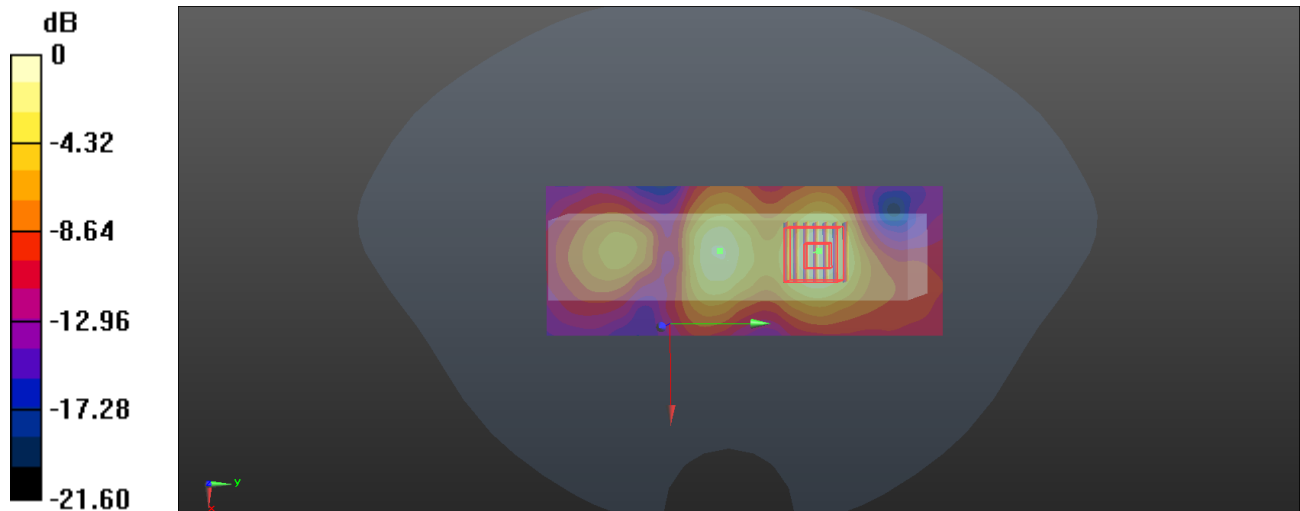

0 dB = 0.777 W/kg

P41 LTE Band 66_QPSK20M_Right Side_1cm_Ch132572_1RB_OS0

Communication System: LTE-FDD; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750_1020 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 41.048$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.16, 9.16, 9.16); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.70 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.415 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 1.01 W/kg

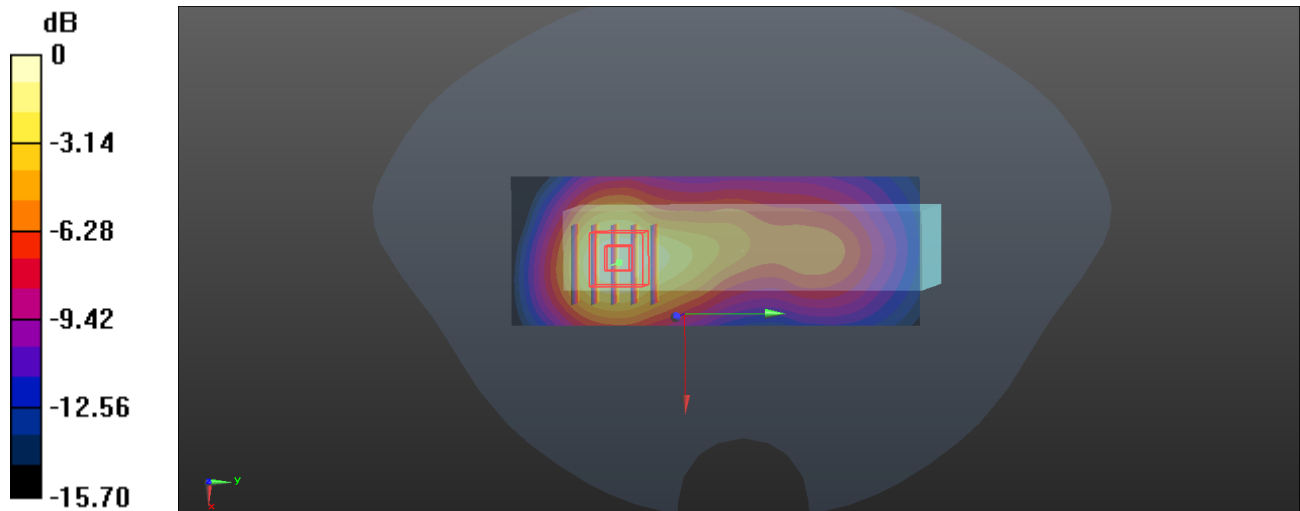

0 dB = 1.01 W/kg

P42 LTE Band 71_QPSK20M_Rear Face_1cm_Ch133372_1RB_OS0

Communication System: LTE-FDD; Frequency: 688 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 688$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 43.006$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.394 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.82 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.3%

Maximum value of SAR (measured) = 0.394 W/kg

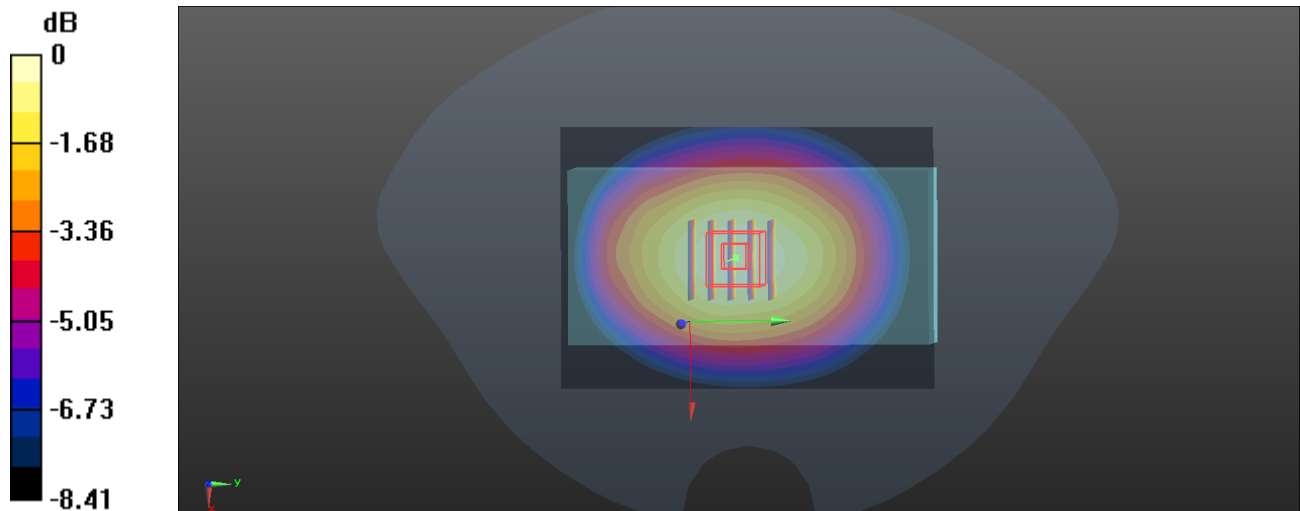

0 dB = 0.394 W/kg

P43 FR1 n5_DFT-QPSK20M_Front Face_1cm_Ch166800_1RB_OS1

Communication System: 5G NR; Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835_1024 Medium parameters used: $f = 834$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.548$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(10.86, 10.86, 10.86); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.712 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.62 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.9%

Maximum value of SAR (measured) = 0.714 W/kg

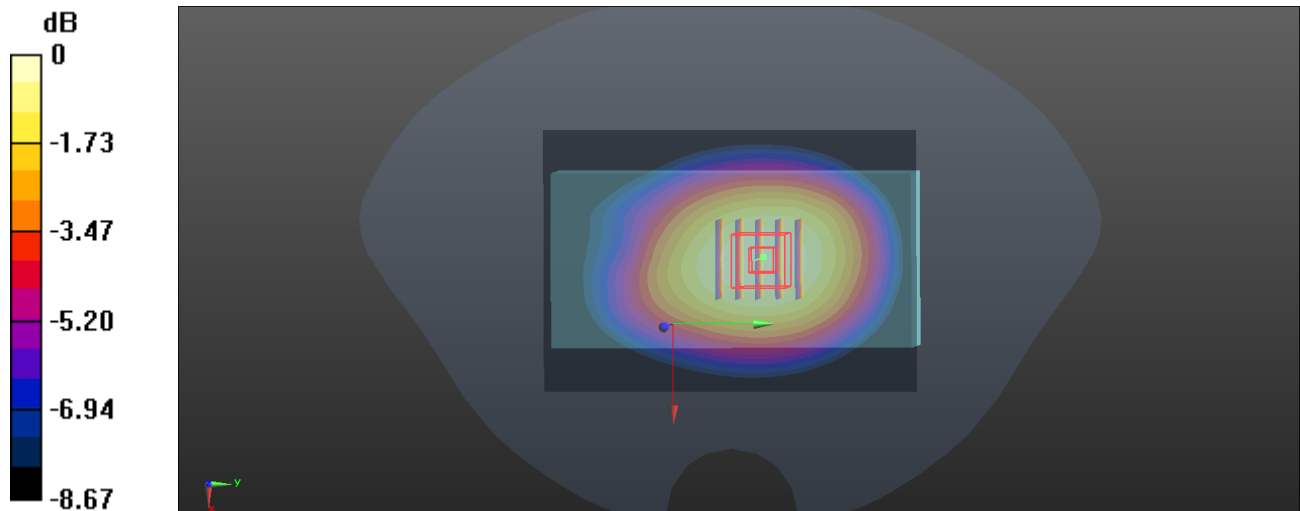

0 dB = 0.714 W/kg

P44 FR1 n7_DFT-QPSK40M_Right Side_1cm_Ch510000_108RB_OS54

Communication System: 5G NR; Frequency: 2550 MHz; Duty Cycle: 1:1

Medium: HSL2600_1031 Medium parameters used: $f = 2550$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 39.957$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.15 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.284 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.986 W/kg

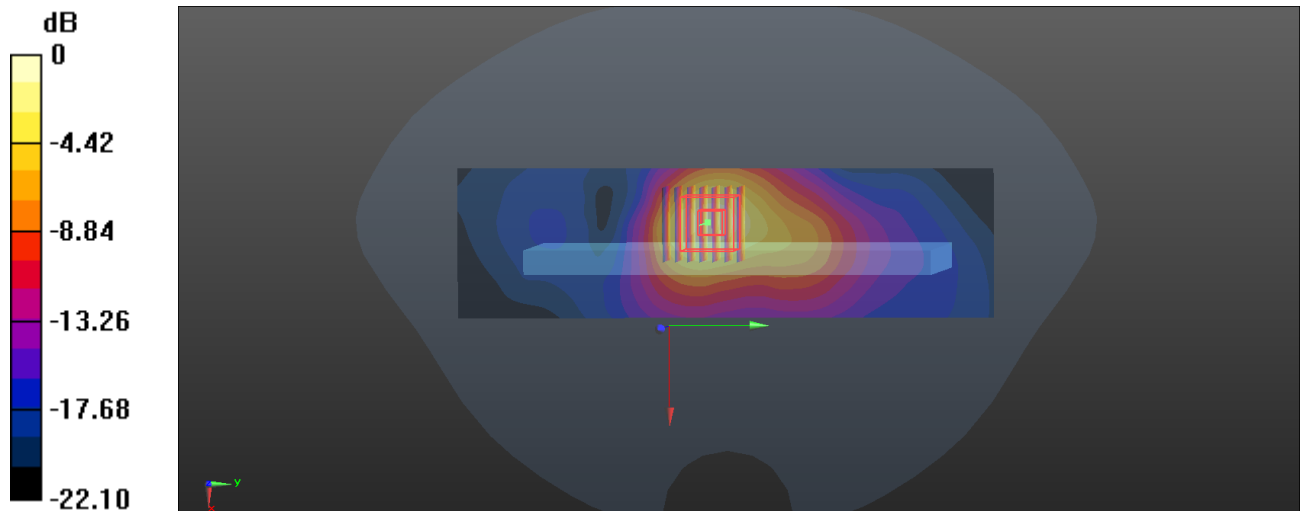

0 dB = 0.986 W/kg

P45 FR1 n12_DFT-QPSK15M_Rear Face_1cm_Ch141300_36RB_OS22

Communication System: 5G NR; Frequency: 706.5 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 706.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.921$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.530 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.34 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.310 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 71.3%

Maximum value of SAR (measured) = 0.531 W/kg

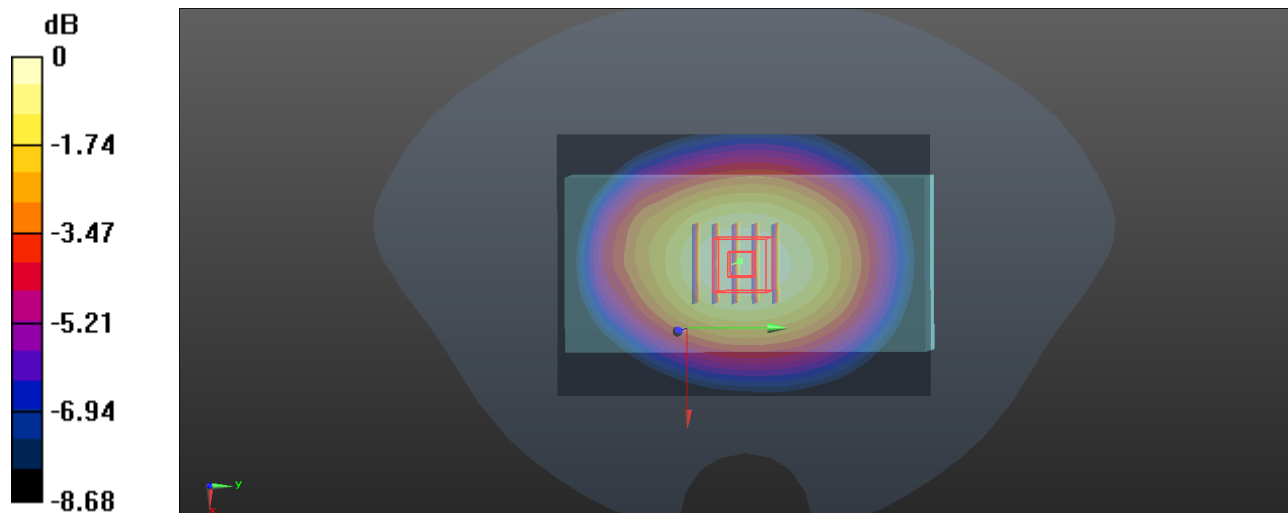

0 dB = 0.531 W/kg

P46 FR1 n14_DFT-QPSK10M_Front Face_1cm_Ch158600_25RB_OS14

Communication System: 5G NR; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 793$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 42.718$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.740 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.80 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.449 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 0.744 W/kg

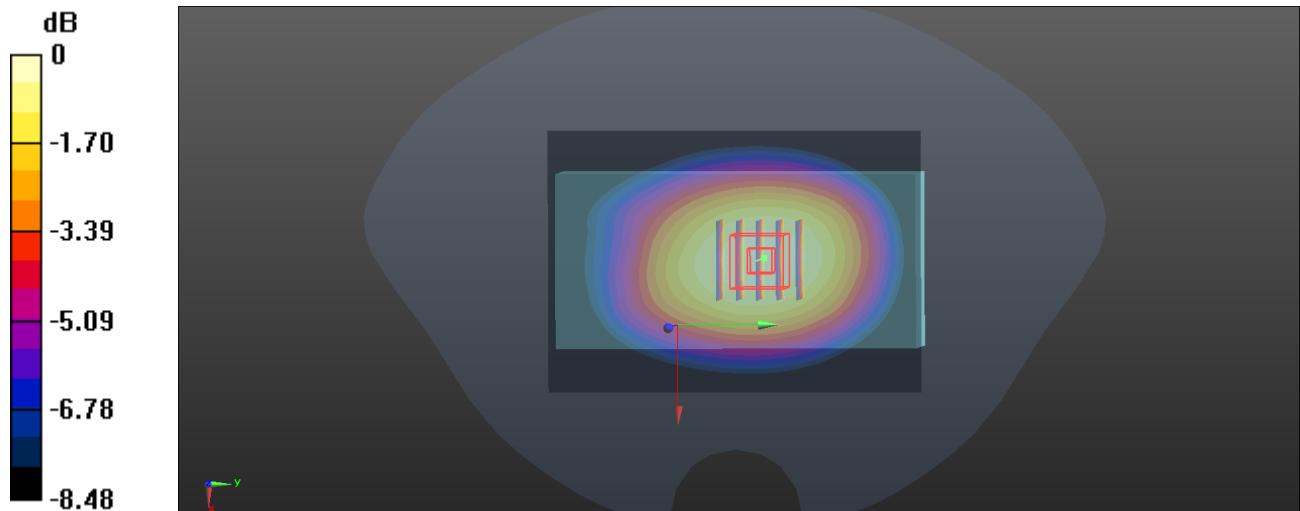

0 dB = 0.744 W/kg

P47 FR1 n25_DFT-QPSK40M_Right Side_1cm_Ch376500_1RB_OS1

Communication System: 5G NR; Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1900_1021 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.129$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.77, 7.97, 7.97); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.878 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.84 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.996 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 0.846 W/kg

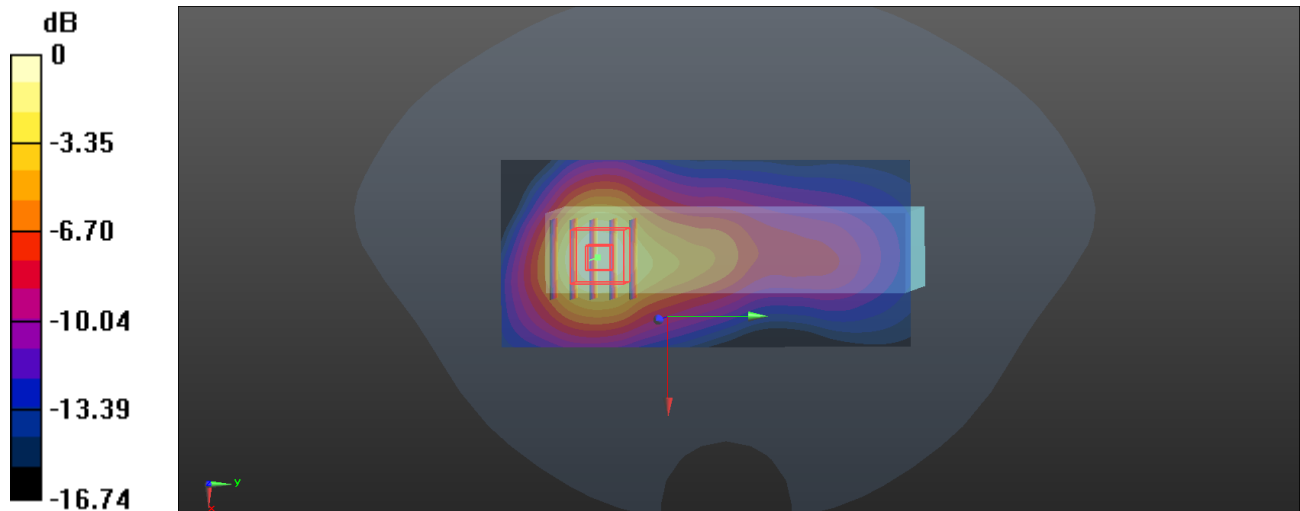

0 dB = 0.846 W/kg

P48 FR1 n30_DFT-QPSK10M_Bottom Side_1cm_Ch462000_25RB_OS14

Communication System: 5G NR; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300_1030 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 40.315$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.36, 8.36, 8.36); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.65 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.966 W/kg; SAR(10 g) = 0.499 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.50 W/kg

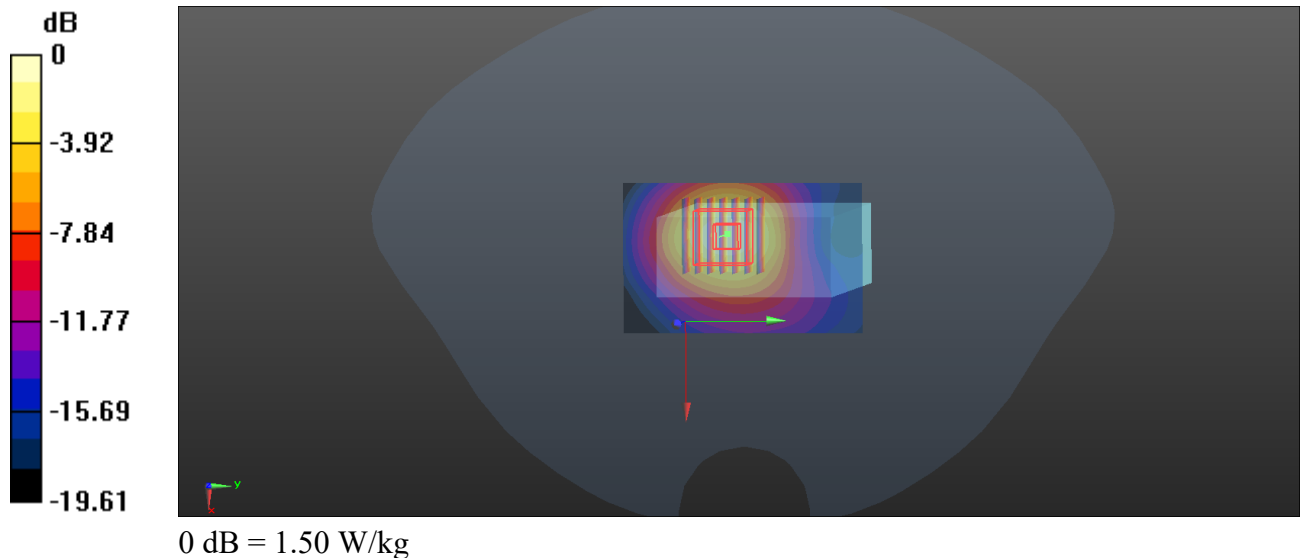

P49 FR1 n41_DFT-QPSK100M_Right Side_1cm_Ch528000_135RB_OS69

Communication System: 5G NR; Frequency: 2640 MHz; Duty Cycle: 1:2.5

Medium: HSL2600_1031 Medium parameters used: $f = 2640$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 39.81$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.9, 7.9, 7.9); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.759 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.26 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.905 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.738 W/kg

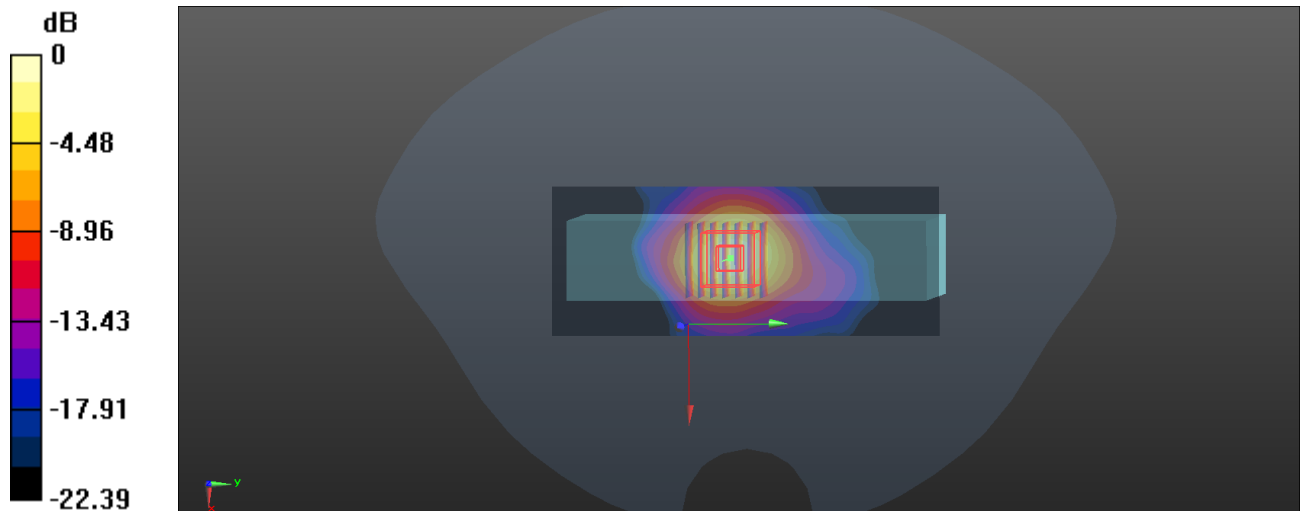

0 dB = 0.738 W/kg

P50 FR1 n48_DFT-QPSK40M_Bottom Side_1cm_Ch645332_50RB_OS28

Communication System: 5G NR; Frequency: 3679.98 MHz; Duty Cycle: 1:2.5

Medium: HSL3700_1027 Medium parameters used: $f = 3680$ MHz; $\sigma = 2.989$ S/m; $\epsilon_r = 39.318$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(7.05, 7.05, 7.05); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.639 W/kg

Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.78 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 70.3%

Maximum value of SAR (measured) = 0.641 W/kg

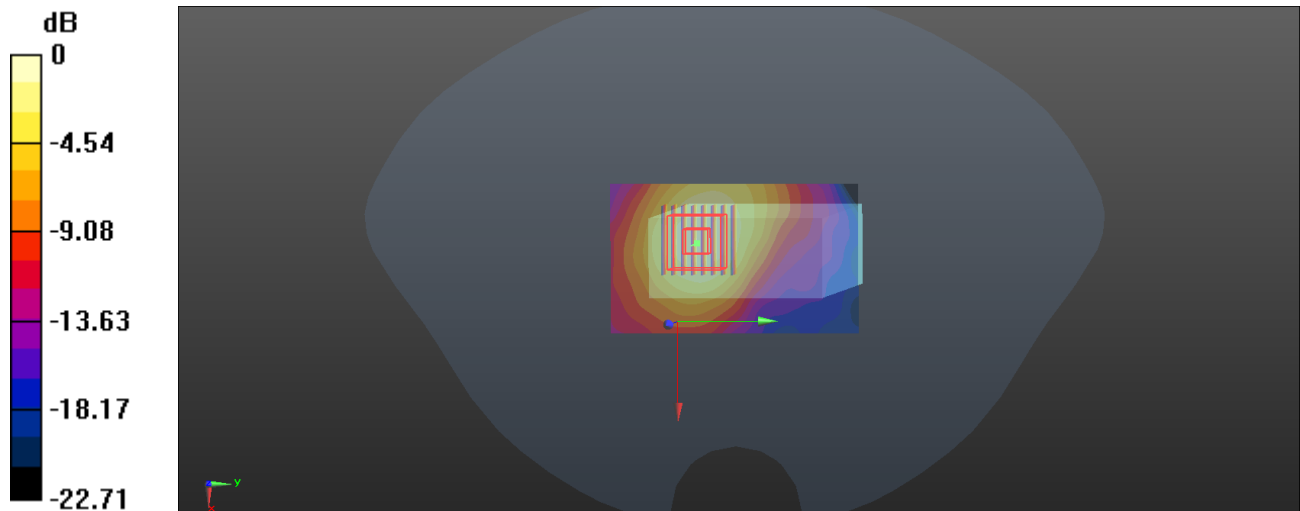

0 dB = 0.641 W/kg

P51 FR1 n66_DFT-QPSK40M_Right Side_1cm_Ch349000_1RB_OS1

Communication System: 5G NR; Frequency: 1730 MHz; Duty Cycle: 1:1

Medium: HSL1750_1020 Medium parameters used: $f = 1730$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 41.128$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(9.16, 9.16, 9.16); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.844 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.47 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.944 W/kg

SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.794 W/kg

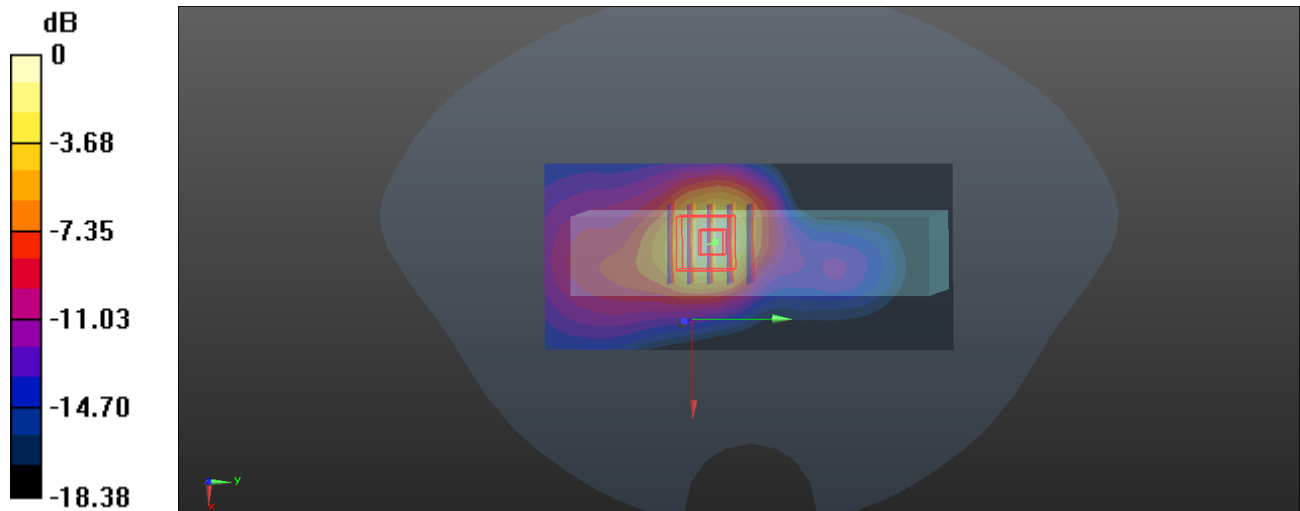

0 dB = 0.794 W/kg

P52 FR1 n71_DFT-QPSK20M_Rear Face_1cm_Ch137600_50RB_OS28

Communication System: 5G NR; Frequency: 688 MHz; Duty Cycle: 1:1

Medium: HSL750_1022 Medium parameters used: $f = 688$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 43.006$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(11.3, 11.3, 11.3); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.442 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.13 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.261 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.3%

Maximum value of SAR (measured) = 0.442 W/kg

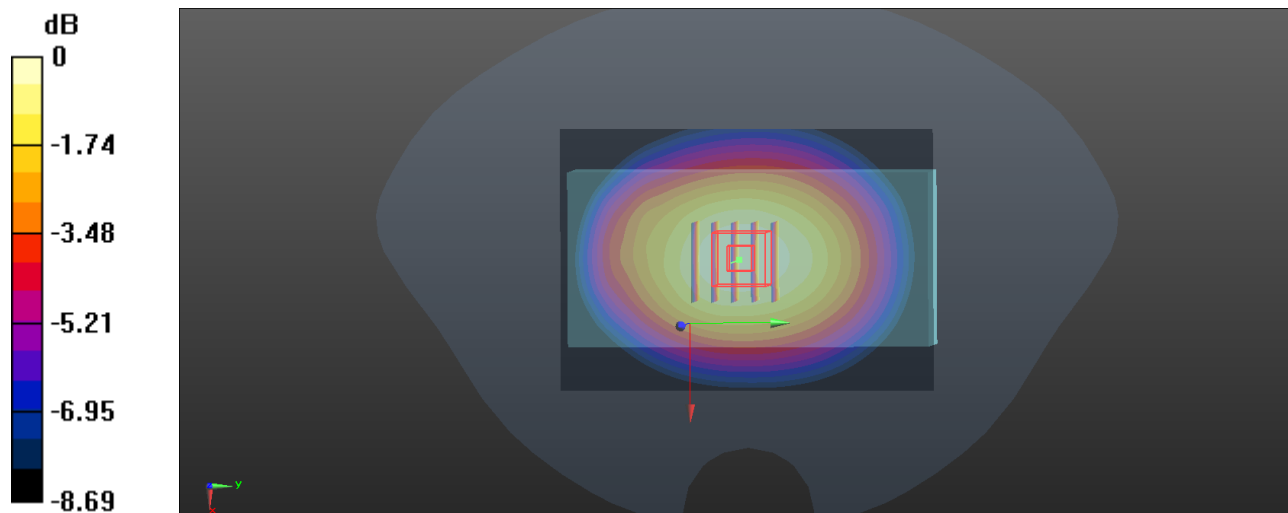

0 dB = 0.442 W/kg

P53 FR1 n77_DFT-QPSK100M_Left Side_1cm_Ch656000_1RB_OS1

Communication System: 5G NR; Frequency: 3840 MHz; Duty Cycle: 1:2.5

Medium: HSL3900_1028 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.145$ S/m; $\epsilon_r = 39.051$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(6.94, 6.94, 6.94); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 19.01 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.1%

Maximum value of SAR (measured) = 1.04 W/kg

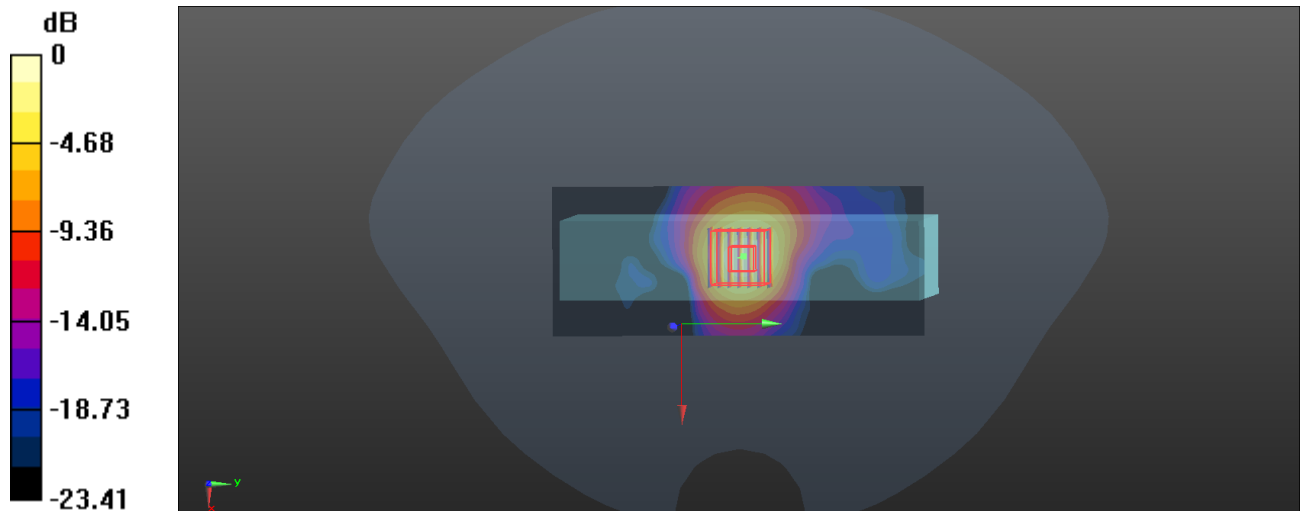

P54 WLAN 2.4GHz_802.11b_Left Side_1cm_Ch11

Communication System: WiFi 2.4 GHz; Frequency: 2462 MHz; Duty Cycle: 1:1.015

Medium: HSL2450_1102 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.849$ S/m; $\epsilon_r = 40.105$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.1, 8.1, 8.1); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.261 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.125 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 0.244 W/kg

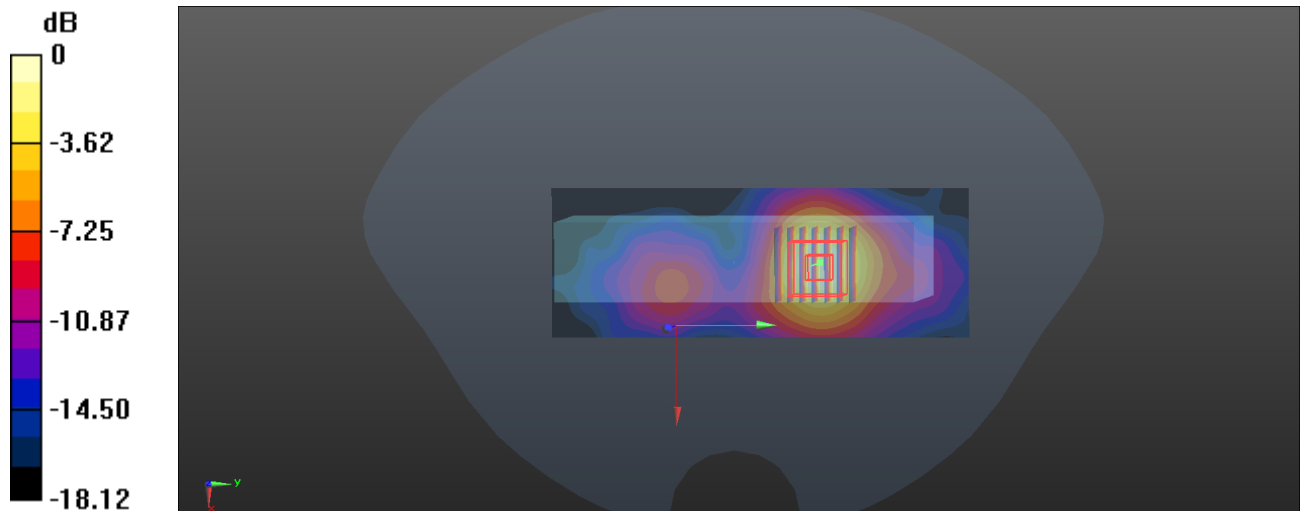

0 dB = 0.244 W/kg

P55 WLAN 5GHz_802.11a_Rear Face_1cm_Ch40

Communication System: WiFi 5 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1.01

Medium: HSL5250_1103 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.449$ S/m; $\epsilon_r = 37.206$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.71, 5.71, 5.71); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.170 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.753 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.039 W/kg

Smallest distance from peaks to all points 3 dB below = 14.2 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.170 W/kg

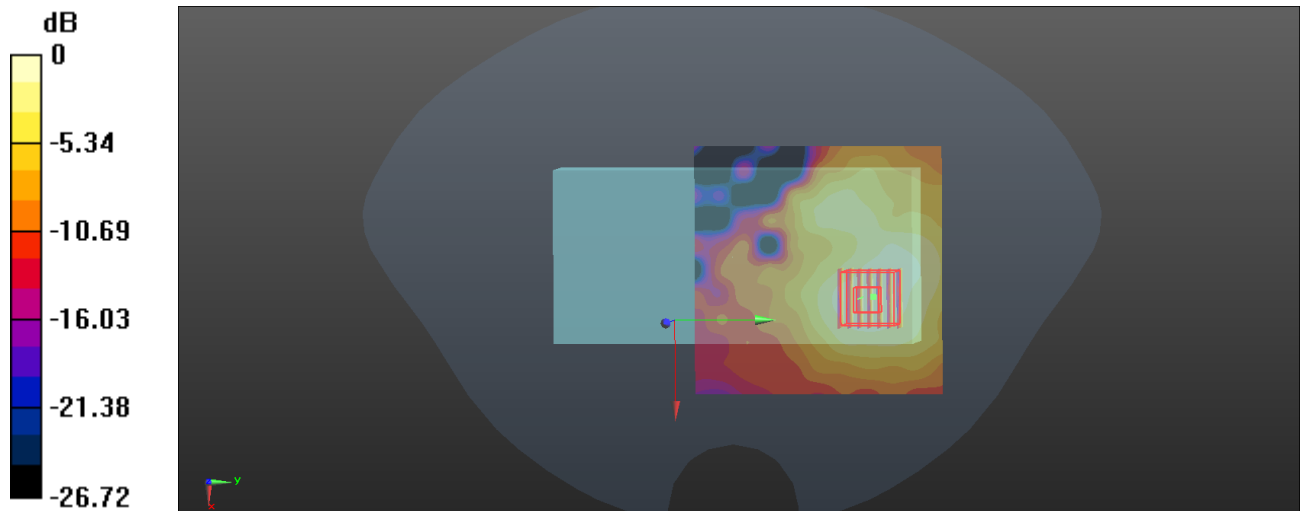

0 dB = 0.170 W/kg

P56 WLAN 5GHz_802.11a_Rear Face_1cm_Ch149

Communication System: WiFi 5 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1.01

Medium: HSL5750_1106 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.084$ S/m; $\epsilon_r = 36.315$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(5.21, 5.21, 5.21); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.287 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.950 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.285 W/kg

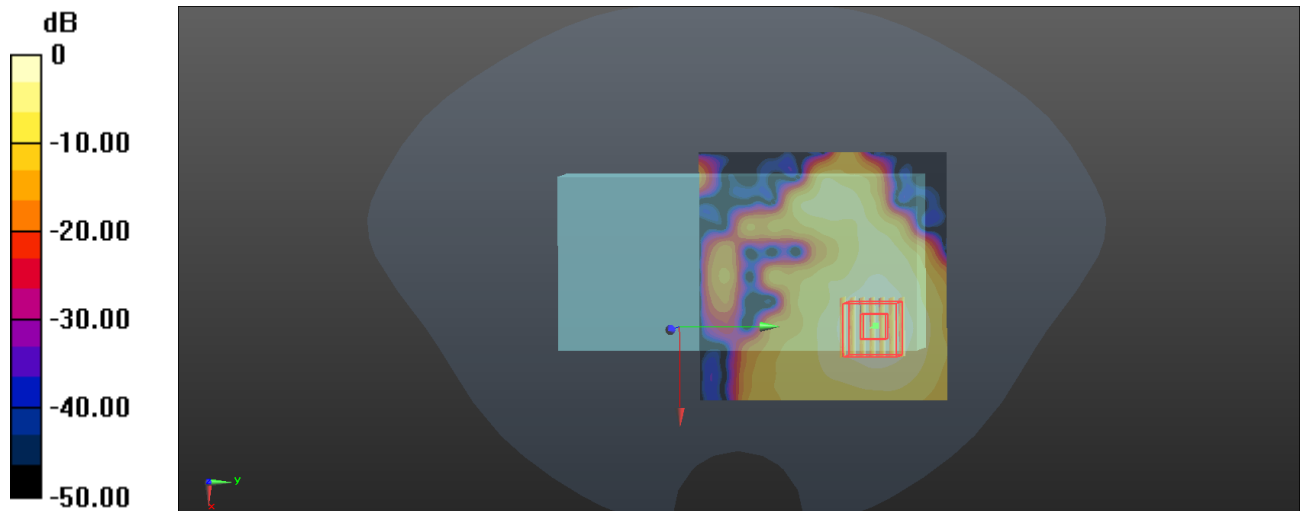

0 dB = 0.285 W/kg = -5.45 dBW/kg

P57 Bluetooth_GFSK_Front Face_1cm_Ch39

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium: HSL2450_1102 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.835$ S/m; $\epsilon_r = 40.138$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7612; ConvF(8.1, 8.1, 8.1); Calibrated: 2025/5/7
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2024/11/11
- Phantom: SAM with CRP V5.0; Type: QD000P40CB; Serial: TP:1502
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0388 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9980 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 0.0355 W/kg

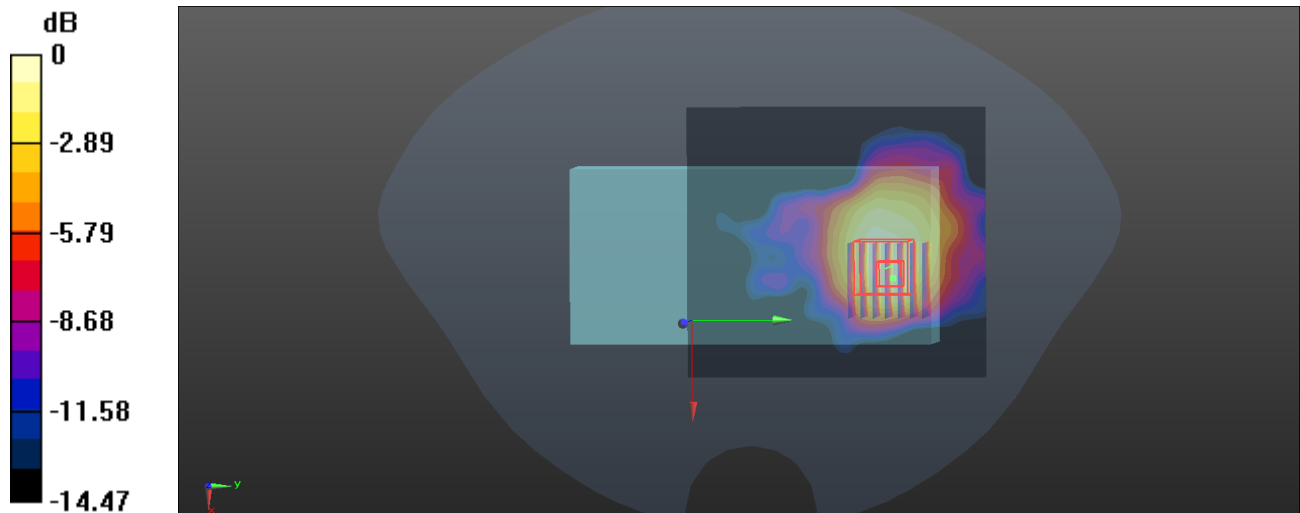

0 dB = 0.0355 W/kg